

Company: Silver Spring Networks

Test of: NIC 510
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Report No.: SSNT108-U7 Rev A

CONDUCTED, RADIATED TEST REPORT



CONDUCTED, RADIATED TEST REPORT



Test of: Silver Spring Networks NIC 511-0303
to

To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Test Report Serial No.: SSNT108-U7 Rev A

This report supersedes: NONE

Applicant: Silver Spring Networks
555 Broadway Street
Redwood City, California 94063
USA

Product Function: Plug-in radio device, will
communicate over 900 MHz and
2.4 GHz mesh network

Issue Date: 10th December 2015

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Table of Contents

| | |
|---|-----------|
| 1. ACCREDITATION, LISTINGS & RECOGNITION..... | 5 |
| 1.1. TESTING ACCREDITATION..... | 5 |
| 1.2. RECOGNITION | 6 |
| 1.3. PRODUCT CERTIFICATION | 7 |
| 2. DOCUMENT HISTORY | 8 |
| 3. TEST RESULT CERTIFICATE..... | 9 |
| 4. REFERENCES AND MEASUREMENT UNCERTAINTY | 10 |
| 4.1. Normative References | 10 |
| 4.2. Test and Uncertainty Procedure | 11 |
| 5. PRODUCT DETAILS AND TEST CONFIGURATIONS..... | 12 |
| 5.1. Technical Details | 12 |
| 5.2. Scope Of Test Program | 14 |
| 5.3. Equipment Model(s) and Serial Number(s) | 16 |
| 5.4. Antenna Details | 16 |
| 5.5. Cabling and I/O Ports | 16 |
| 5.6. Test Configurations..... | 17 |
| 5.7. Equipment Modifications | 17 |
| 5.8. Deviations from the Test Standard | 17 |
| 6. TEST SUMMARY | 18 |
| 7. TEST EQUIPMENT CONFIGURATION(S) | 19 |
| 7.1. Conducted | 19 |
| 7.2. Radiated Emissions..... | 21 |
| 7.3. ac Wireline Emission..... | 23 |
| 8. MEASUREMENT AND PRESENTATION OF TEST DATA | 24 |
| 9. TEST RESULTS | 25 |
| 9.1. 20 dB & 99% Bandwidth | 25 |
| <i>Modulation (FHSS).....</i> | 26 |
| 9.2. 6 dB & 99% Bandwidth | 29 |
| <i>Modulation (DTS).....</i> | 30 |
| 9.3. Number Of Channels | 31 |
| 9.4. Channel Spacing | 33 |
| 9.5. Dwell Time & Channel Occupancy | 35 |
| 9.6. Conducted Output Power | 37 |
| 9.6.1. <i>Modulation (DTS).....</i> | 39 |
| 9.6.2. <i>Modulation (FHSS).....</i> | 40 |
| 9.7. Emissions | 43 |
| 9.7.1. <i>Conducted Emissions</i> | 43 |
| 9.7.1.1. Conducted Spurious Emissions | 43 |
| 10.7.1.1.1 Modulation (DTS)..... | 44 |
| 10.7.1.1.2 Modulation (FHSS)..... | 45 |
| 9.7.1.2. Conducted Band-Edge Emissions | 48 |
| 9.7.1.2.1. Conducted Low Band-Edge Emissions..... | 48 |
| 9.7.1.2.2. Conducted High Band-Edge Emissions..... | 52 |
| 9.7.2. <i>Radiated Spurious Emissions > 1GHz.....</i> | 56 |
| 9.7.2.3. Restricted Band Emissions | 58 |
| 9.7.2.4. Restricted Band-Edge Emissions..... | 68 |
| 9.7.3. <i>Digital Emissions (0.03 - 1 GHz).....</i> | 82 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz).....86
9.9. Power Spectral Density88
 9.9.1. Modulation (DTS).....89
A. APPENDIX - GRAPHICAL IMAGES90
A.1. 20 dB & 99% Bandwidth91
A.2. 6 dB & 99% Bandwidth100
A.3. Number of Channels103
A.4. Channel Spacing113
A.5. Dwell Time & Channel Occupancy.....115
A.6. Emissions119
 A.6.1. Conducted Emissions119
 A.6.1.1. Conducted Spurious Emissions119
 A.6.1.2. Conducted Band-Edge Emissions131
 A.6.1.2.1. Conducted Low Band-Edge Emissions131
 A.6.1.2.2. Conducted High Band-Edge Emissions135
A.7. Power Spectral Density139

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 5 of 145

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



Accredited Laboratory

A2LA has accredited

MICOM LABS
Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 28th day of February 2014.

President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to December 31, 2015
Revised November 18, 2015

For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

| Country | Recognition Body | Status | Phase | Identification No. |
|-----------|--|--------|------------|---|
| USA | Federal Communications Commission (FCC) | TCB | - | US0159 Listing #: 102167 |
| Canada | Industry Canada (IC) | FCB | APEC MRA 2 | US0159 Listing #: 4143A-2 4143A-3 |
| Japan | MIC (Ministry of Internal Affairs and Communication) | CAB | APEC MRA 2 | RCB 210 |
| | VCCI | -- | -- | A-0012 |
| Europe | European Commission | NB | EU MRA | NB 2280 |
| Australia | Australian Communications and Media Authority (ACMA) | CAB | APEC MRA 1 | US0159 |
| Hong Kong | Office of the Telecommunication Authority (OFTA) | CAB | APEC MRA 1 | |
| Korea | Ministry of Information and Communication Radio Research Laboratory (RRL) | CAB | APEC MRA 1 | |
| Singapore | Infocomm Development Authority (IDA) | CAB | APEC MRA 1 | |
| Taiwan | National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI) | CAB | APEC MRA 1 | |
| Vietnam | Ministry of Communication (MIC) | CAB | APEC MRA 1 | |

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 7 of 145

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 *Requirements for bodies certifying products, processes and services*. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.



Presented this 28th day of February 2014.

President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to December 31, 2015
Revised November 18, 2015

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 8 of 145

2. DOCUMENT HISTORY

| Document History | | |
|------------------|--------------------------------|------------------|
| Revision | Date | Comments |
| Draft | | |
| Rev A | 10 th December 2015 | Initial release. |
| . | | |
| . | | |
| . | | |
| . | | |
| . | | |

In the above table the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 9 of 145

3. TEST RESULT CERTIFICATE

| | |
|--|---|
| Manufacturer: Silver Spring Networks 555 Broadway Street Redwood City California 94063 USA | Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA |
| Model: NIC 511-0303 | Telephone: +1 925 462 0304 Fax: +1 925 462 0306 |
| Type Of Equipment: Plug-in radio device, will communicate over 900 MHz and 2.4 GHz mesh network | |
| S/N's: 00:13:50:07:00:00:07:6D | |
| Test Date(s): 10th – 19th November 2015 | Website: www.micomlabs.com |

| STANDARD(S) | TEST RESULTS |
|---|--------------------|
| FCC CFR 47 Part 15 Subpart C 15.247 (DTS) | EQUIPMENT COMPLIES |

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:





Graeme Grievie
Quality Manager MiCOM Labs, Inc.

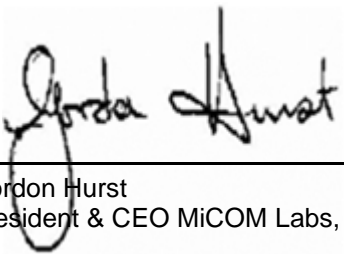

Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 10 of 145

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

| REF. | PUBLICATION | YEAR | TITLE |
|------|------------------------|---------------------|---|
| I | KDB 662911 | Oct 31 2013 | Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band |
| II | KDB 558074 D01 v03r03 | 9th June 2015 | Guidance for performing compliance measurements on Digital Transmission Systems (DTS) operating under section 15.247. |
| III | A2LA | June 2015 | R105 - Requirement's When Making Reference to A2LA Accreditation Status |
| IV | ANSI C63.10 | 2013 | American National Standard for Testing Unlicensed Wireless Devices |
| V | ANSI C63.4 | 2009 | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| VI | CISPR 22 | 2008 | Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement |
| VII | ETSI TR 100 028 | 2001-12 | Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics |
| VIII | FCC 47 CFR Part 15.247 | 2014 | Radio Frequency Devices; Subpart C – Intentional Radiators |
| IX | ICES-003 | Issue 5 2012 | Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (ITE) – Limits and methods of measurement. |
| X | M 3003 | Edition 3 Nov. 2012 | Expression of Uncertainty and Confidence in Measurements |
| XI | RSS-247 Issue 1 | May 2015 | Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices |
| XII | RSS-Gen Issue 4 | November 2014 | General Requirements and Information for the Certification of Radiocommunication Equipment |
| XIII | KDB 644545 D03 v01 | August 14th 2014 | Guidance for IEEE 802.11ac New Rules |
| XIV | FCC 47 CFR Part 2.1033 | 2014 | FCC requirements and rules regarding photographs and test setup diagrams. |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 11 of 145

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 12 of 145

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

| Details | Description |
|--------------------------------------|---|
| Purpose: | Test of the Silver Spring Networks NIC511-0303 to FCC CFR 47 Part 15 Subpart C 15.247 (DTS) and Industry Canada RSS-247. Radio Frequency Devices; Subpart C – Intentional Radiators |
| Applicant: | Silver Spring Networks 555 Broadway Street Redwood City California 94063 USA |
| Manufacturer: | As Applicant |
| Laboratory performing the tests: | MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA |
| Test report reference number: | SSNT108-U7 Rev A Report |
| Date EUT received: | 9 th November 2015 |
| Standard(s) applied: | FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247 |
| Dates of test (from - to): | 10th – 19th November 2015 |
| No of Units Tested: | 1 |
| Type of Equipment: | Network Interface Card (NIC) |
| Product Family Name: | NIC 510 |
| Model(s): | NIC 511-0303 |
| Location for use: | Indoor/Outdoor |
| Declared Frequency Range(s): | 902 - 928 MHz; 2400 - 2483.5 MHz; |
| Primary function of equipment: | Plug-in radio device, will communicate over 900 MHz and 2.4 GHz mesh network |
| Secondary function of equipment: | None Provided |
| Type of Modulation: | FHSS, DTS |
| EUT Modes of Operation: | 2400 - 2483.5 MHz: OFDM; 2FSK; OQPSK; |
| Declared Nominal Output Power (Ave): | 2400 - 2483.5 MHz: OFDM: 28 dBm; 2FSK: 28 dBm; OQPSK: 28 dBm |
| Transmit/Receive Operation: | Transceiver - Half Duplex |
| Rated Input Voltage and Current: | DC only (Battery operated / external supply) 4Vdc |
| Operating Temperature Range: | Declared Range -40°C to 85°C |
| ITU Emission Designator: | FHSS: 2FSK 87K0F1D OFDM 324KG1D OQPSK 117KF1D DTS: OFDM 1M38G1D |
| Equipment Dimensions: | 114.5mm x 101.6mm x 19mm |
| Weight: | 140 grams |
| Hardware Rev: | 173-0674-00: NIC 511-0303 173-0728-00: NIC 511-0301 173-0729-00: NIC 511-0302 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 13 of 145

| |
|--------------------|
| Software Rev: 3.10 |
|--------------------|

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 14 of 145

5.2. Scope Of Test Program

Silver Spring Networks NIC 511-0303

The scope of the test program was to test the Silver Spring Networks NIC 511-0303, Network Interface Card (NIC) configurations in the frequency ranges 902 - 928 MHz; 2400 - 2483.5 MHz; for compliance against the following specification:

FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Radio Frequency Devices; Subpart C – Intentional Radiators

Product Description

The following product description was provided by the manufacturer.

NIC 510

The Silver Spring Networks (SSN) Network Interface Card, or NIC 511, is based on SSN's 5th Generation radio platform. NIC 511 may be configured for energy meters and other devices to be used in SSN Smart Energy Networks (SEN). The NIC 511 family incorporates a 902-928 MHz frequency hopping mesh radio, a 902-928 MHz DSSS radio, a 2.4 GHz ISM band frequency hopping mesh radio, and a 2.4 GHz DSSS radio. The NIC 511 family supports basic meter types including single-phase meters and three-phase meters.


This report is intended to cover the NIC 510 family of products which includes the NIC 511-0303 and represents a worst case configuration of the product family.

NIC 510 products include the following model numbers/configurations:

NIC 511-0303 – 900+2.4, INT/EXT ANT, HW1
NIC 511-0302 – 900+2.4, EXT ANT, HW1
NIC 511-0301 – 900+2.4, INT ANT, HW1

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Silver Spring Networks NIC 511-0303

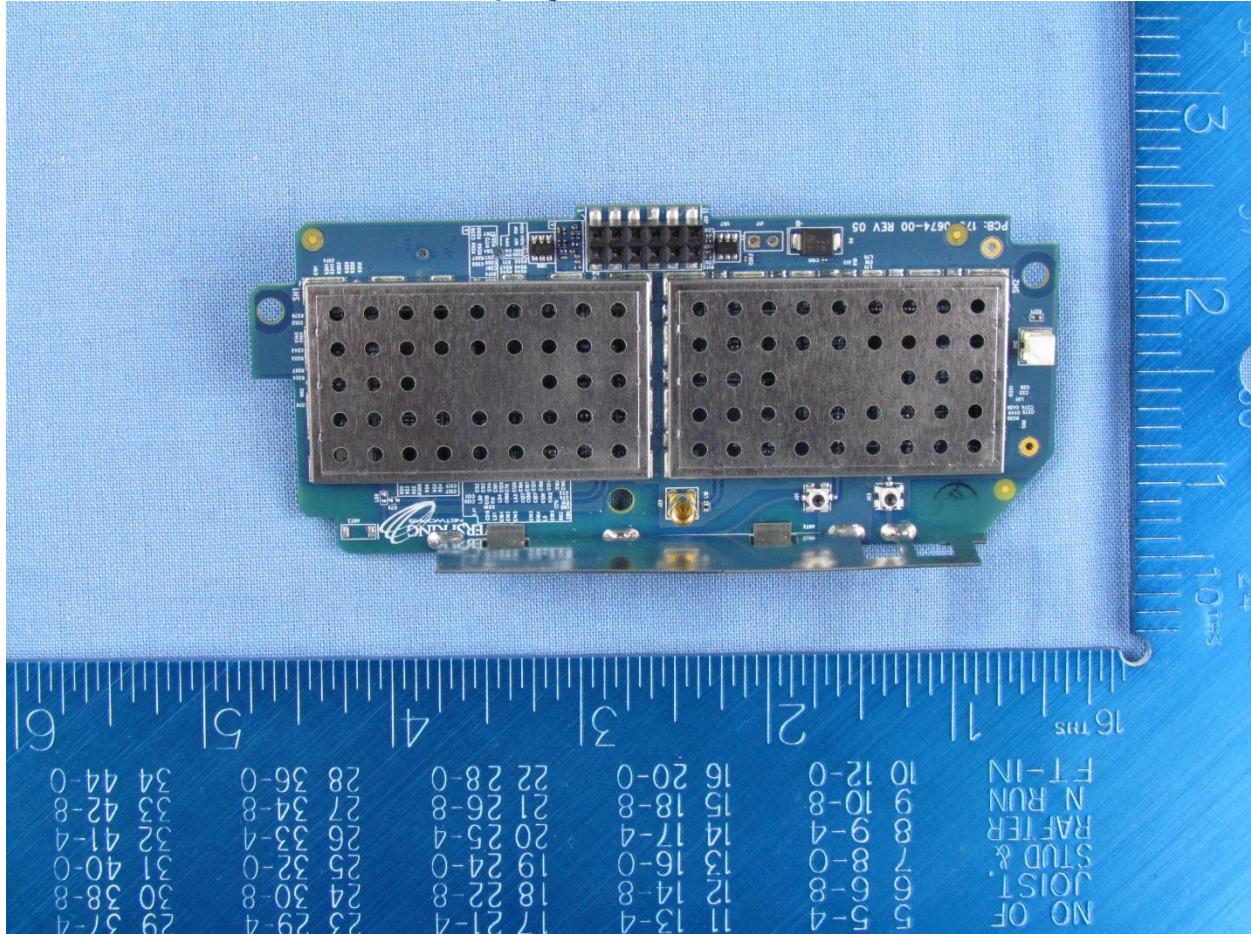

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 16 of 145

5.3. Equipment Model(s) and Serial Number(s)

| Type | Description | Manufacturer | Model | Serial no. | Delivery Date |
|---------|------------------------------|------------------------|--------------|-------------------------|-------------------------------|
| EUT | Network Interface Card (NIC) | Silver Spring Networks | NIC 511-0303 | 00:13:50:07:00:00:07:6D | 9 th November 2015 |
| Support | Laptop | IBM | ThinkPad | None | -- |

5.4. Antenna Details

| Type | Manufacturer | Model | Family | Gain (dBi) | BF Gain | Dir BW | X-Pol | Frequency Band (MHz) |
|----------|----------------|---------------|-------------|------------|---------|--------|-------|----------------------|
| external | WP | WPANT30017-CA | OMNI | 3.0 | - | 360 | - | 902 - 928 |
| external | WP | WPANT30017-CA | OMNI | 4.5 | - | 360 | - | 2400 - 2483.5 |
| external | WP | WPANT40010-C | Wrap Around | 1.0 | - | 360 | - | 902 - 928 |
| external | WP | WPANT40010-C | Wrap Around | 3.5 | - | 360 | - | 2400 - 2483.5 |
| integral | Tai Sheng Chen | 155-0010 | F-Type | 2.0 | - | 360 | - | 902 - 928 |
| integral | Tai Sheng Chen | 155-0010 | F-Type | 5.0 | - | 360 | - | 2400 - 2483.5 |

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

*None

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 17 of 145

5.6. Test Configurations

| Channel Spacing (kHz) | Operational Mode(s) (FHSS) | Data Rate with Highest Power (Kbps) | Channel Frequency (MHz) | | |
|--------------------------|----------------------------|-------------------------------------|-------------------------|---------|---------|
| | | | Low | Mid | High |
| 2400 - 2483.5 MHz | | | | | |
| 200 | 2FSK | 50.00 | 2400.20 | 2413.80 | 2427.20 |
| 400 | OFDM | 600.00 | 2400.40 | 2440.00 | 2454.40 |
| 200 | OQPSK | 6.25 | 2400.20 | 2413.00 | 2427.2 |

| Channel Spacing (kHz) | Operational Mode(s) (DTS) | Data Rate with Highest Power (Kbps) | Channel Frequency (MHz) | | |
|--------------------------|---------------------------|-------------------------------------|-------------------------|---------|---------|
| | | | Low | Mid | High |
| 2400 - 2483.5 MHz | | | | | |
| 1200 | OFDM | 2400.00 | 2401.20 | 2440.80 | 2472.00 |

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 18 of 145

6. TEST SUMMARY

List of Measurements

| Test Header | Result | Data Link |
|--|----------|---------------------------|
| Conducted Test Results | | |
| 15.247(a)(2) 20 dB & 99% Bandwidth | Complies | View Data |
| 15.247(a)(2) 6 dB & 99% Bandwidth | Complies | View Data |
| 15.247(a)(2) Number of Channels; Channel Spacing; Dwell Time & Channel Occupancy | Complies | View Data |
| 15.247(b), 15.31(e) Conducted Output Power | Complies | View Data |
| 15.247(d) Emissions | - | - |
| (1) Conducted Emissions | - | - |
| (i) Conducted Spurious Emissions | Complies | View Data |
| (ii) Conducted Band-Edge Emissions | Complies | View Data |
| 15.247(e) Power Spectral Density | Complies | View Data |
| Radiated Emissions | | |
| (i) 15.205 Restricted Band Emissions | Complies | View Data |
| (ii) 15.205 Restricted Band-Edge Emissions | Complies | View Data |
| ac Wireline Emissions | | |
| (3) 15.209 Digital Emissions (0.03 - 1 GHz) | Complies | View Data |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Conducted

Conducted RF Emission Test Set-up(s)

The following tests were performed using the conducted test set-up shown in the diagram below.

1. 20 dB & 99% Bandwidth
2. 6 dB & 99% Bandwidth
3. Number of Channels
4. Channel Spacing
5. Dwell time & Channel Occupancy
6. Conducted Output Power
7. Conducted Spurious Emissions
8. Conducted Spurious Band-Edge Emissions
9. Power Spectral Density

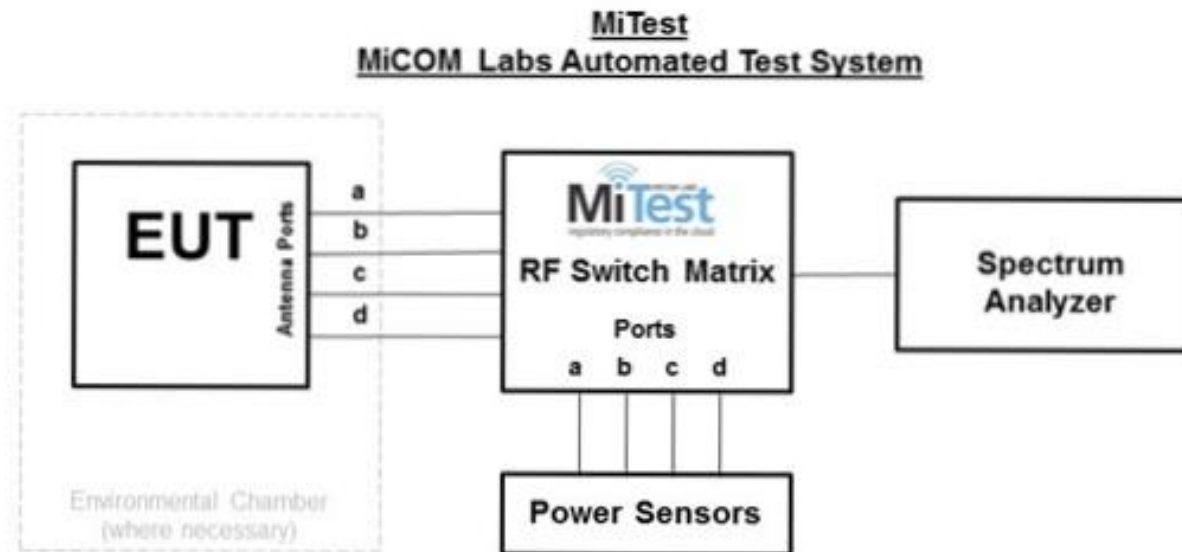

Conducted Test Measurement Setup

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 20 of 145

| Asset# | Description | Manufacturer | Model# | Serial# | Calibration Due Date |
|-------------|--|----------------------|----------------------|---------------|----------------------|
| 127 | Power Supply | HP | 6674A | US36370530 | Cal when used |
| 158 | Barometer/Thermometer | Control Company | 4196 | E2846 | 04 Dec 2015 |
| 193 | Receiver 20 Hz to 7 GHz | Rhode & Schwarz | ESI 7 | 838496/007 | 14 Jan 2016 |
| 248 | Resistance Thermometer | Thermotronics | GR2105-02 | 9340 #1 | 21 Oct 2016 |
| 287 | Rohde & Schwarz 40 GHz Receiver | Rhode & Schwarz | ESIB40 | 100201 | 27 Aug 2016 |
| 376 | USB 10MHz - 18GHz Average Power Sensor | Agilent | U2000A | MY51440005 | 23 Oct 2016 |
| 378 | Rohde & Schwarz 40 GHz Receiver with Generator | Rhode & Schwarz | ESIB40 | 100107/040 | 04 Aug 2016 |
| 381 | 4x4 RF Switch Box | MiCOM Labs | MiTest RF Switch Box | MIC002 | 20 Dec 2015 |
| 419 | Laptop with Labview Software | Lenova | W520 | TS02 | Not Required |
| 420 | USB to GPIB Interface | National Instruments | GPIB-USB HS | 1346738 | Not Required |
| 435 | USB Wideband Power Sensor | Boonton | 55006 | 8730 | 31 Jul 2016 |
| 440 | USB Wideband Power Sensor | Boonton | 55006 | 9178 | 25 Sep 2016 |
| 441 | USB Wideband Power Sensor | Boonton | 55006 | 9179 | 25 Sep 2016 |
| 442 | USB Wideband Power Sensor | Boonton | 55006 | 9181 | 25 Sep 2016 |
| 445 | PoE Injector | D-Link | DPE-101GL | QTAH1E2000625 | Not Required |
| 460 | Dell Computer | Dell | Optiplex330 | BC944G1 | Not Required |
| 74 | Environmental Chamber 3 | Tenney | TTC | 12808-1 | 30 Sep 2016 |
| RF#2 GPIB#1 | GPIB cable to Power Supply | HP | GPIB | None | Not Required |
| RF#2 SMA#1 | EUT to Mitest box port 1 | Flexco | SMA Cable port1 | None | 20 Dec 2015 |
| RF#2 SMA#2 | EUT to Mitest box port 2 | Flexco | SMA Cable port2 | None | 20 Dec 2015 |
| RF#2 SMA#3 | EUT to Mitest box port 3 | Flexco | SMA Cable port3 | None | 20 Dec 2015 |
| RF#2 SMA#4 | EUT to Mitest box port 4 | Flexco | SMA Cable port4 | None | 20 Dec 2015 |
| RF#2 SMA#SA | Mitest box to SA | Flexco | SMA Cable SA | None | 20 Dec 2015 |
| RF#2 USB#1 | USB Cable to Mitest Box | Dynex | USB Cable | None | Not Required |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


7.2. Radiated Emissions

The following tests were performed using the radiated test set-up shown in the diagram below.

10.7 Radiated Spurious Emissions (1 – 10 GHz)

10.8 Radiated Digital Emissions (0.03 – 1 GHz)

Radiated Emission Measurement Setup

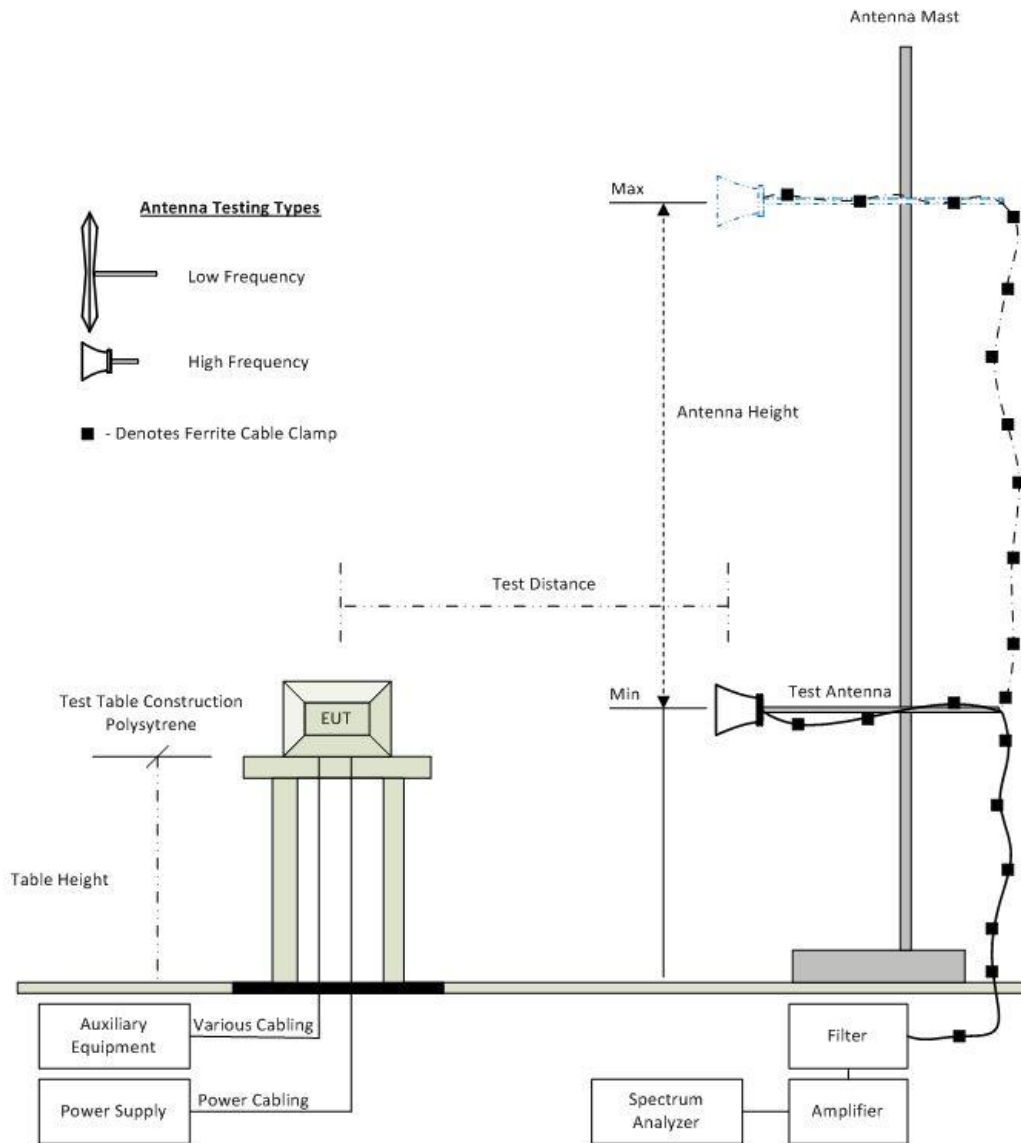

Radiated Emission Test Setup

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 22 of 145

| Asset# | Description | Manufacturer | Model# | Serial# | Calibration Due Date |
|--------|---|----------------------|--|-------------|----------------------|
| 158 | Barometer/Thermometer | Control Company | 4196 | E2846 | 04 Dec 2015 |
| 170 | Video System Controller for Semi Anechoic Chamber | Panasonic | WV-CY101 | 04R08507 | Not Required |
| 287 | Rohde & Schwarz 40 GHz Receiver | Rhode & Schwarz | ESIB40 | 100201 | 27 Aug 2016 |
| 338 | Sunol 30 to 3000 MHz Antenna | Sunol | JB3 | A052907 | 15 Aug 2016 |
| 341 | 900MHz Notch Filter | EWT | EWT-14-0199 | H1 | 18 Aug 2016 |
| 342 | 2.4 GHz Notch Filter | EWT | EWT-14-0203 | H1 | 18 Aug 2016 |
| 396 | 2.4 GHz Notch Filter | Microtronics | BRM50701 | 001 | 18 Aug 2016 |
| 397 | Amp 10 - 2500MHz | MiCOM Labs | Amp 10 - 2500 MHz | NA | 24 Feb 2016 |
| 399 | ETS 1-18 GHz Horn Antenna | ETS | 3117 | 00154575 | 10 Oct 2016 |
| 406 | Amplifier for Radiated Emissions | MiCOM Labs | 40dB 1 to 18GHz Amp | 0406 | 28 May 2016 |
| 410 | Desktop Computer | Dell | Inspiron 620 | WS38 | Not Required |
| 411 | Mast/Turntable Controller | Sunol Sciences | SC98V | 060199-1D | Not Required |
| 412 | USB to GPIB Interface | National Instruments | GPIB-USB HS | 11B8DC2 | Not Required |
| 413 | Mast Controller | Sunol Science | TWR95-4 | 030801-3 | Not Required |
| 414 | DC Power Supply 0-60V | HP | 6274 | 1029A01285 | Cal when used |
| 415 | Turntable Controller | Sunol Sciences | Turntable Controller | None | Not Required |
| 447 | Rad Emissions Test Software | MiCOM | Rad Emissions Test Software Version 1.0.73 | 447 | Not Required |
| 462 | Schwarzbeck cable from Antenna to Amplifier. | Schwarzbeck | AK 9513 | 462 | 25 Feb 2016 |
| 463 | Schwarzbeck cable from Amplifier to Bulkhead. | Schwarzbeck | AK 9513 | 463 | 25 Feb 2016 |
| 464 | Schwarzbeck cable from Bulkhead to Receiver | Schwarzbeck | AK 9513 | 464 | 25 Feb 2016 |
| 465 | Low Pass Filter DC-1000 MHz | Mini-Circuits | NLP-1200+ | VUU01901402 | 18 Aug 2016 |
| 480 | Cable - Bulkhead to Amp | SRC Haverhill | 157-157-3050360 | 480 | 11 Aug 2016 |
| 481 | Cable - Bulkhead to Receiver | SRC Haverhill | 151-151-3050787 | 481 | 11 Aug 2016 |
| 482 | Cable - Amp to Antenna | SRC Haverhill | 157-157-3051574 | 482 | 11 Aug 2016 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




7.3. ac Wireline Emission

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 9.6 ac Wireline Conducted Emissions

Test Measurement Set up

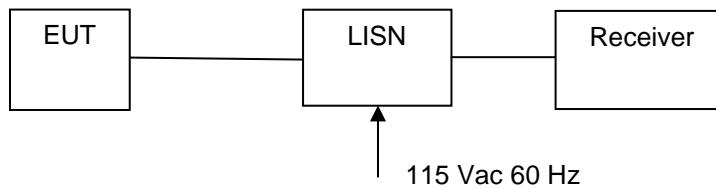

Measurement set up for AC Wireline Conducted Emissions Test

Traceability of Test Equipment Utilized for ac Wireline Emission Testing

| Asset# | Description | Manufacturer | Model# | Serial# | Calibration Due Date |
|-------------|--|------------------------|--------------|-------------|----------------------|
| 158 | Barometer/Thermometer | Control Company | 4196 | E2846 | 04 Dec 2015 |
| 184 | Pulse Limiter | Rhode & Schwarz | ESH3Z2 | 357.8810.52 | 07 Jan 2016 |
| 190 | LISN (two-line V-network) | Rhode & Schwarz | ESH3Z5 | 836679/006 | 29 Oct 2016 |
| 193 | Receiver 20 Hz to 7 GHz | Rhode & Schwarz | ESI 7 | 838496/007 | 14 Jan 2016 |
| 287 | Rohde & Schwarz 40 GHz Receiver | Rhode & Schwarz | ESIB40 | 100201 | 27 Aug 2016 |
| 307 | BNC-CABLE | Megaphase | 1689 1GVT4 | 15F50B002 | 07 Jan 2016 |
| 316 | Dell desktop computer workstation with Vasona | Dell | Desktop | WS04 | Not Required |
| 372 | AC Variable PS | California Instruments | 1251P | L06951 | Cal when used |
| 378 | Rohde & Schwarz 40 GHz Receiver with Generator | Rhode & Schwarz | ESIB40 | 100107/040 | 04 Aug 2016 |
| 388 | LISN (3 Phase) 9kHz - 30MHz | Rohde & Schwarz | ESH2-Z5 | 892107/022 | 30 Oct 2016 |
| ADAPT SMA#1 | SMA Cable | Megaphase | SMA Cable #1 | None | Cal when used |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 24 of 145

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 25 of 145

9. TEST RESULTS

9.1. 20 dB & 99% Bandwidth

| Conducted Test Conditions for 20 dB and 99% Bandwidth | | | |
|---|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | 20 dB and 99 % Bandwidth | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(2) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for 20 dB and 99% Bandwidth Measurement

The bandwidth at 20 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for 20 dB and 99% Bandwidth

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 26 of 145

Modulation (FHSS)

| Equipment Configuration for 20 dB & 99% Bandwidth | | | |
|---|----------------|-----------------------------------|----------------|
| Variant: | 2FSK | Duty Cycle (%): | 99.00 |
| Data Rate: | 50.00 Kbps | Antenna Gain (dBi): | 5.00 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured 20 dB Bandwidth (MHz) | | | | 20 dB Bandwidth (MHz) | | Limit | Lowest Margin |
|----------------|--------------------------------|----|----|----|-----------------------|--------|--------|---------------|
| | Port(s) | | | | Highest | Lowest | | |
| | MHz | a | b | c | | | d | KHz |
| 2400.2 | 0.088 | -- | -- | -- | 0.088 | 0.08 | ≤500.0 | -412.0 |
| 2413.8 | 0.092 | -- | -- | -- | 0.092 | 0.092 | ≤500.0 | -408.0 |
| 2427.2 | 0.091 | -- | -- | -- | 0.091 | 0.091 | ≤500.0 | -409.0 |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | Maximum 99% Bandwidth (MHz) | | |
|----------------|------------------------------|----|----|----|-----------------------------|--|--|
| | Port(s) | | | | | | |
| | MHz | a | b | c | d | | |
| 2400.2 | 0.085 | -- | -- | -- | 0.085 | | |
| 2413.8 | 0.087 | -- | -- | -- | 0.087 | | |
| 2427.2 | 0.087 | -- | -- | -- | 0.087 | | |

| Traceability to Industry Recognized Test Methodologies | |
|--|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 27 of 145

Equipment Configuration for 20 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 400 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 600.00 Kbps | Antenna Gain (dBi): | 5.00 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured 20 dB Bandwidth (MHz) | | | | 20 dB Bandwidth (MHz) | | Limit | Lowest Margin |
|----------------|--------------------------------|----|----|----|-----------------------|--------|--------|---------------|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | KHz | KHz |
| 2400.4 | 0.398 | -- | -- | -- | 0.398 | 0.398 | ≤500.0 | -102.0 |
| 2440.0 | 0.391 | -- | -- | -- | 0.391 | 0.391 | ≤500.0 | -108.0 |
| 2454.4 | 0.393 | -- | -- | -- | 0.393 | 0.393 | ≤500.0 | -107.0 |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | Maximum 99% Bandwidth (MHz) | | |
|----------------|------------------------------|----|----|----|-----------------------------|--|--|
| | Port(s) | | | | | | |
| MHz | a | b | c | d | | | |
| 2400.4 | 0.322 | -- | -- | -- | 0.322 | | |
| 2440.0 | 0.324 | -- | -- | -- | 0.324 | | |
| 2454.4 | 0.324 | -- | -- | -- | 0.324 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | 2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 28 of 145

Equipment Configuration for 20 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | OQPSK | Duty Cycle (%): | 99.00 |
| Data Rate: | 6.25 Kbps | Antenna Gain (dBi): | 5.00 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured 20 dB Bandwidth (MHz) | | | | 20 dB Bandwidth (MHz) | | Limit | Lowest Margin |
|----------------|--------------------------------|----|----|----|-----------------------|--------|--------|---------------|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | KHz | KHz |
| 2400.2 | 0.113 | -- | -- | -- | 0.113 | 0.113 | ≤500.0 | -387.0 |
| 2413.8 | 0.127 | -- | -- | -- | 0.127 | 0.127 | ≤500.0 | -373.0 |
| 2427.2 | 0.128 | -- | -- | -- | 0.128 | 0.128 | ≤500.0 | -372.0 |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | Maximum 99% Bandwidth (MHz) | | |
|----------------|------------------------------|----|----|----|-----------------------------|--|--|
| | Port(s) | | | | | | |
| MHz | a | b | c | d | | | |
| 2400.2 | 0.113 | -- | -- | -- | 0.113 | | |
| 2413.8 | 0.117 | -- | -- | -- | 0.117 | | |
| 2427.2 | 0.115 | -- | -- | -- | 0.115 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 29 of 145

9.2. 6 dB & 99% Bandwidth

| Conducted Test Conditions for 6 dB and 99% Bandwidth | | | |
|--|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | 6 dB and 99 % Bandwidth | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(2) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for 6 dB and 99% Bandwidth Measurement
The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for 6 dB and 99% Bandwidth

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
 - (2) Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 30 of 145

Modulation (DTS)

Equipment Configuration for 6 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 1200 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 2400.00 Kbps | Antenna Gain (dBi): | 5.00 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured 6 dB Bandwidth (MHz) | | | | 6 dB Bandwidth (MHz) | | Limit | Lowest Margin |
|----------------|-------------------------------|----|----|----|----------------------|--------|--------|---------------|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | KHz | MHz |
| 2401.2 | 1.101 | -- | -- | -- | 1.101 | 1.101 | ≥500.0 | -0.60 |
| 2440.8 | 1.077 | -- | -- | -- | 1.077 | 1.077 | ≥500.0 | -0.58 |
| 2472.0 | 1.087 | -- | -- | -- | 1.087 | 1.087 | ≥500.0 | -0.59 |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | Maximum 99% Bandwidth (MHz) | | |
|----------------|------------------------------|----|----|----|-----------------------------|--|--|
| | Port(s) | | | | | | |
| MHz | a | b | c | d | | | |
| 2401.2 | 1.342 | -- | -- | -- | 1.342 | | |
| 2440.8 | 1.385 | -- | -- | -- | 1.385 | | |
| 2472.0 | 1.356 | -- | -- | -- | 1.356 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.3. Number Of Channels

| Conducted Test Conditions for Number Of Channels | | | |
|--|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Number of Channels | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(2) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure
The number of channels and channel occupancy is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limit

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 32 of 145

Equipment Configuration for Hopping Sequence

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | Not Applicable | Duty Cycle (%): | Not Applicable |
| Data Rate: | Not Applicable | Antenna Gain (dBi): | Not Applicable |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Variant | Frequency Range (MHz) | Number of Hopping Channels | Limit | Total Number of Hops | Results |
|---------|-----------------------|---------------------------------------|------------------------|-----------------------|---------|
| | | | No of Hopping Channels | | |
| OQPSK | 2400.00 – 2420.00 | 99.0 | ≥ 15 | 136.0 | Pass |
| OQPSK | 2420.00 – 2430.00 | 37.0 | ≥ 15 | 136.0 | Pass |
| OQPSK | 2400.00 – 2483.50 | Total No. of Hopping Channels: | | 136.0 | Pass |
| OFDM | 2400.00 – 2410.00 | 25.0 | ≥ 15 | 136.0 | Pass |
| OFDM | 2410.00 – 2420.00 | 25.0 | ≥ 15 | 136.0 | Pass |
| OFDM | 2420.00 – 2430.00 | 25.0 | ≥ 15 | 136.0 | Pass |
| OFDM | 2430.00 – 2440.00 | 25.0 | ≥ 15 | 136.0 | Pass |
| OFDM | 2440.00 – 2450.00 | 25.0 | ≥ 15 | 136.0 | Pass |
| OFDM | 2450.00 – 2460.00 | 11.0 | ≥ 15 | 136.0 | Pass |
| OFDM | 2400.00 – 2483.50 | Total No. of Hopping Channels: | | 136.0 | Pass |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.4. Channel Spacing

| Conducted Test Conditions for 6 dB and 99% Bandwidth | | | |
|--|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Channel Spacing | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(2) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure
The number of channels and channel occupancy is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limit
(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 34 of 145

Equipment Configuration for Channel Separation

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | Not Applicable | Duty Cycle (%): | Not Applicable |
| Data Rate: | Not Applicable | Antenna Gain (dBi): | Not Applicable |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Center Frequency | Variant Type | Chan Separation | Limit (20 dB Occ. BW) | Result |
|------------------|--------------|-----------------|--------------------------|--------|
| MHz | | MHz | MHz | |
| 2413.80 | OQPSK | <u>0.200</u> | ≥ 0.128 | Pass |
| 2440.00 | OFDM | <u>0.400</u> | ≥ 0.398 | Pass |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|--|
| Measurement Uncertainty: | ±2.81 dB (Spectrum/Amplitude), ±0.86 ppm (Frequency) |
|--------------------------|--|

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.5. Dwell Time & Channel Occupancy

| Conducted Test Conditions for Channel Occupancy | | | |
|---|--------------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Dwell Time & Channel Occupancy | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(2) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure

The number of channels and channel occupancy is measured with a spectrum analyzer connected to the antenna terminal, while the EUT is operating in transmission mode at the appropriate center frequency and modulation.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limit

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 36 of 145

Equipment Configuration for Dwell Time & Channel Occupancy

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | Not Applicable | Duty Cycle (%): | Not Applicable |
| Data Rate: | Not Applicable | Antenna Gain (dBi): | Not Applicable |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

| Test Measurement Results | | | | | |
|--------------------------|--------------|-----------------------------|------------------------|-------------------------|--------|
| Center Frequency | Variant Type | Dwell Time (Single Channel) | Channel Occupancy | Channel Occupancy Limit | Result |
| MHz | | mS | ms | ms | |
| 2413.80 | OQPSK | 138.00 | 276.00 | 400.00 | Pass |
| 2440.00 | OFDM | 15.00 | 45.00 | 400.00 | Pass |

| Traceability to Industry Recognized Test Methodologies | |
|--|--|
| Measurement Uncertainty: | ±2.81 dB (Spectrum/Amplitude), ±0.86 ppm (Frequency) |

Note: click the links in the above matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.6. Conducted Output Power

| Conducted Test Conditions for Fundamental Emission Output Power | | | |
|---|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Output Power | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (b) & (c) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Fundamental Emission Output Power Measurement
In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information
Calculated Power = $A + G + Y + 10 \log (1/x)$ dBm

A = Total Power [$10 \cdot \text{Log}_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]
 G = Antenna Gain
 Y = Beamforming Gain
 x = Duty Cycle (average power measurements only)

Limits for Fundamental Emission Output Power
(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:

(3) For systems using digital modulation in the 902-928 MHz and 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 38 of 145

instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or staff having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 39 of 145

9.6.1. Modulation (DTS)

Equipment Configuration for Peak Output Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 1200 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 2400.00 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | OFDM | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured Output Power + DCCF (+0.04 dB) (dBm) | | | | Calculated Total Power Σ Port(s) | Limit | Margin | EUT Power Setting |
|----------------|---|----|----|----|---|-------|--------|-------------------|
| | Port(s) | | | | | | | |
| MHz | a | b | c | d | dBm | dBm | dB | |
| 2401.2 | 28.26 | -- | -- | -- | 28.26 | 30.00 | -1.74 | 30.00 |
| 2440.8 | 27.77 | -- | -- | -- | 27.77 | 30.00 | -2.23 | 30.00 |
| 2472.0 | 27.49 | -- | -- | -- | 27.49 | 30.00 | -2.51 | 30.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ± 1.33 dB |

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 40 of 145

9.6.2. Modulation (FHSS)

Equipment Configuration for Peak Output Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 2FSK | Duty Cycle (%): | 99.00 |
| Data Rate: | 50.00 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured Output Power + DCCF (+0.04 dB) (dBm) | | | | Calculated Total Power Σ Port(s) | Limit | Margin | EUT Power Setting |
|----------------|---|----|----|----|---|-------|--------|-------------------|
| | Port(s) | | | | | | | |
| MHz | a | b | c | d | dBm | dBm | dB | |
| 2400.2 | 27.28 | -- | -- | -- | 27.28 | 30.00 | -2.72 | 30.00 |
| 2413.8 | 27.40 | -- | -- | -- | 27.40 | 30.00 | -2.60 | 30.00 |
| 2427.2 | 27.36 | -- | -- | -- | 27.36 | 30.00 | -2.64 | 30.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|---------------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ± 1.33 dB |

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 41 of 145

Equipment Configuration for Peak Output Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 400 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 600.00 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured Output Power + DCCF (+0.04 dB) (dBm) | | | | Calculated Total Power Σ Port(s) | Limit | Margin | EUT Power Setting |
|----------------|---|----|----|----|---|-------|--------|-------------------|
| | Port(s) | | | | | | | |
| MHz | a | b | c | d | dBm | dBm | dB | |
| 2400.4 | 27.99 | -- | -- | -- | 27.99 | 30.00 | -2.01 | 30.00 |
| 2440.0 | 27.55 | -- | -- | -- | 27.55 | 30.00 | -2.45 | 30.00 |
| 2454.4 | 27.56 | -- | -- | -- | 27.56 | 30.00 | -2.44 | 30.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ± 1.33 dB |

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 42 of 145

Equipment Configuration for Peak Output Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | OQPSK | Duty Cycle (%): | 99.00 |
| Data Rate: | 6.25 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured Output Power + DCCF (+0.04 dB) (dBm) | | | | Calculated Total Power Σ Port(s) | Limit | Margin | EUT Power Setting |
|----------------|---|----|----|----|---|-------|--------|-------------------|
| | Port(s) | | | | | | | |
| MHz | a | b | c | d | dBm | dBm | dB | |
| 2400.2 | 27.84 | -- | -- | -- | 27.84 | 30.00 | -2.16 | 30.00 |
| 2413.8 | 27.37 | -- | -- | -- | 27.37 | 30.00 | -2.63 | 30.00 |
| 2427.2 | 27.23 | -- | -- | -- | 27.23 | 30.00 | -2.77 | 30.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ± 1.33 dB |

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.7. Emissions

9.7.1. Conducted Emissions

9.7.1.1. Conducted Spurious Emissions

| Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions | | | |
|--|------------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Max Unwanted Emission Levels | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (d) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 44 of 145

10.7.1.1.1 Modulation (DTS)

Equipment Configuration for Transmitter Conducted Spurious Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 1200 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 2400.00 Kbps | Antenna Gain (dBi): | Not Applicable |
| Modulation: | DTS | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Frequency Range | Transmitter Conducted Spurious Emissions (dBm) | | | | | | | |
|------------------------|-----------------|--|-------|--------|-------|--------|-------|--------|-------|
| | | Port a | | Port b | | Port c | | Port d | |
| MHz | MHz | SE | Limit | SE | Limit | SE | Limit | SE | Limit |
| 2401.2 | 30.0 - 26000.0 | -22.521 | 1.00 | -- | -- | -- | -- | -- | -- |
| 2440.8 | 30.0 - 26000.0 | -22.324 | 0.00 | -- | -- | -- | -- | -- | -- |
| 2472.0 | 30.0 - 26000.0 | -4.771 | 0.00 | -- | -- | -- | -- | -- | -- |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz \pm 2.37 dB, > 40 GHz \pm 4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 45 of 145

10.7.1.1.2 Modulation (FHSS)

Equipment Configuration for Transmitter Conducted Spurious Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 2FSK | Duty Cycle (%): | 99.00 |
| Data Rate: | 50.00 Kbps | Antenna Gain (dBi): | Not Applicable |
| Modulation: | FHSS | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Frequency Range | Transmitter Conducted Spurious Emissions (dBm) | | | | | | | |
|------------------------|-----------------|--|-------|--------|-------|--------|-------|--------|-------|
| | | Port a | | Port b | | Port c | | Port d | |
| MHz | MHz | SE | Limit | SE | Limit | SE | Limit | SE | Limit |
| 2400.2 | 30.0 - 26000.0 | -35.380 | 7.22 | -- | -- | -- | -- | -- | -- |
| 2413.8 | 30.0 - 26000.0 | -22.377 | 6.00 | -- | -- | -- | -- | -- | -- |
| 2427.2 | 30.0 - 26000.0 | -23.160 | 7.00 | -- | -- | -- | -- | -- | -- |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz \pm 2.37 dB, > 40 GHz \pm 4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 46 of 145

Equipment Configuration for Transmitter Conducted Spurious Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 400 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 600.00 Kbps | Antenna Gain (dBi): | Not Applicable |
| Modulation: | FHSS | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Frequency Range | Transmitter Conducted Spurious Emissions (dBm) | | | | | | | |
|------------------------|-----------------|--|-------|--------|-------|--------|-------|--------|-------|
| | | Port a | | Port b | | Port c | | Port d | |
| MHz | MHz | SE | Limit | SE | Limit | SE | Limit | SE | Limit |
| 2400.4 | 30.0 - 26000.0 | -22.509 | 4.00 | -- | -- | -- | -- | -- | -- |
| 2440.0 | 30.0 - 26000.0 | -22.426 | 5.00 | -- | -- | -- | -- | -- | -- |
| 2454.4 | 30.0 - 26000.0 | -22.393 | 4.00 | -- | -- | -- | -- | -- | -- |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 47 of 145

Equipment Configuration for Transmitter Conducted Spurious Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | OQPSK | Duty Cycle (%): | 99.00 |
| Data Rate: | 6.25 Kbps | Antenna Gain (dBi): | Not Applicable |
| Modulation: | FHSS | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Frequency Range | Transmitter Conducted Spurious Emissions (dBm) | | | | | | | |
|------------------------|-----------------|--|-------|--------|-------|--------|-------|--------|-------|
| | | Port a | | Port b | | Port c | | Port d | |
| MHz | MHz | SE | Limit | SE | Limit | SE | Limit | SE | Limit |
| 2400.2 | 30.0 - 26000.0 | -35.24 | 7.09 | -- | -- | -- | -- | -- | -- |
| 2413.8 | 30.0 - 26000.0 | -22.507 | 7.00 | -- | -- | -- | -- | -- | -- |
| 2427.2 | 30.0 - 26000.0 | -22.534 | 6.00 | -- | -- | -- | -- | -- | -- |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 48 of 145

9.7.1.2. Conducted Band-Edge Emissions

9.7.1.2.1. Conducted Low Band-Edge Emissions

9.7.1.2.1.1. Modulation (DTS)

| |
|---|
| Equipment Configuration for Conducted Low Band-Edge Emissions - Peak |
|---|

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 1200 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 2400.00 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | DTS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

| |
|---------------------------------|
| Test Measurement Results |
|---------------------------------|

| | | | | | | |
|------------------------------|------------------------------------|-------------------------|---------------------------|------------------------|----------------------------|---------------|
| Channel Frequency: | 2401.2 MHz | | | | | |
| Band-Edge Frequency: | 2400.0 MHz | | | | | |
| Test Frequency Range: | 2390.0 - 2402.0 MHz | | | | | |
| Port(s) | Band-Edge Markers and Limit | | | Revised Limit | | Margin |
| | M1 Amplitude (dBm) | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz) |
| a | <u>-0.60</u> | 4.00 | 2400.30 | -- | -- | -0.300 |

| | |
|---|---|
| Traceability to Industry Recognized Test Methodologies | |
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 49 of 145

9.7.1.2.1.2. Modulation (FHSS)

Equipment Configuration for Conducted Low Band-Edge Emissions - Peak

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 2FSK | Duty Cycle (%): | 99.00 |
| Data Rate: | 50.00 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Channel Frequency: | 2400.2 MHz | | | | | |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------|
| Band-Edge Frequency: | 2400.0 MHz | | | | | |
| Test Frequency Range: | 2390.0 - 2401.0 MHz | | | | | |
| Port(s) | Band-Edge Markers and Limit | | | Revised Limit | | Margin |
| | M1 Amplitude (dBm) | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz) |
| a | -7.49 | 7.8 | 2400.043 | -- | -- | -0.043 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 50 of 145

Equipment Configuration for Conducted Low Band-Edge Emissions - Peak

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 400 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 600.00 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| | | | | | | |
|------------------------------|------------------------------------|-------------------------|---------------------------|------------------------|----------------------------|---------------|
| Channel Frequency: | 2400.4 MHz | | | | | |
| Band-Edge Frequency: | 2400.0 MHz | | | | | |
| Test Frequency Range: | 2390.0 - 2402.0 MHz | | | | | |
| Port(s) | Band-Edge Markers and Limit | | | Revised Limit | | Margin |
| | M1 Amplitude (dBm) | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz) |
| a | 2.23 | 6.00 | 2400.10 | -- | -- | -0.100 |

Traceability to Industry Recognized Test Methodologies

| | |
|---------------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 51 of 145

Equipment Configuration for Conducted Low Band-Edge Emissions - Peak

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | OQPSK | Duty Cycle (%): | 99.00 |
| Data Rate: | 6.25 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| | | | | | | |
|------------------------------|------------------------------------|-------------------------|---------------------------|------------------------|----------------------------|---------------|
| Channel Frequency: | 2400.2 MHz | | | | | |
| Band-Edge Frequency: | 2400.0 MHz | | | | | |
| Test Frequency Range: | 2390.0 - 2402.0 MHz | | | | | |
| Port(s) | Band-Edge Markers and Limit | | | Revised Limit | | Margin |
| | M1 Amplitude (dBm) | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz) |
| a | -1.03 | 7.20 | 2400.030 | -- | -- | -0.030 |

Traceability to Industry Recognized Test Methodologies

| | |
|---------------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 52 of 145

9.7.1.2.2. Conducted High Band-Edge Emissions

9.7.1.2.2.1. Modulation (DTS)

| Equipment Configuration for Conducted High Band-Edge Emissions - Peak | | | |
|---|----------------|-----------------------------------|----------------|
| Variant: | 1200 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 2400.00 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | DTS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| | | | | | | |
|------------------------------|------------------------------------|-------------------------|---------------------------|------------------------|----------------------------|---------------|
| Channel Frequency: | 2472.0 MHz | | | | | |
| Band-Edge Frequency: | 2483.5 MHz | | | | | |
| Test Frequency Range: | 2470.0 - 2490.0 MHz | | | | | |
| Port(s) | Band-Edge Markers and Limit | | | Revised Limit | | Margin |
| | M3 Amplitude (dBm) | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz) |
| a | -28.50 | 2.91 | 2472.90 | -- | -- | -10.600 |

Traceability to Industry Recognized Test Methodologies

| | |
|---------------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 53 of 145

9.7.1.2.2.2. Modulation (FHSS)

Equipment Configuration for Conducted High Band-Edge Emissions - Peak

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 2FSK | Duty Cycle (%): | 99.00 |
| Data Rate: | 50.00 KBit/s | Antenna Gain (dBi): | 3.50 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Channel Frequency: | 2427.2 MHz | | | | | |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|---------|
| Band-Edge Frequency: | 2483.5 MHz | | | | | |
| Test Frequency Range: | 2425.0 - 2490.0 MHz | | | | | |
| Port(s) | Band-Edge Markers and Limit | | | Revised Limit | | Margin |
| | M3 Amplitude (dBm) | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz) |
| a | -28.84 | 7.00 | 2427.30 | -- | -- | -56.200 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 54 of 145

Equipment Configuration for Conducted High Band-Edge Emissions - Peak

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 400 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 600.00 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| | | | | | | |
|------------------------------|------------------------------------|-------------------------|---------------------------|------------------------|----------------------------|---------------|
| Channel Frequency: | 2454.4 MHz | | | | | |
| Band-Edge Frequency: | 2483.5 MHz | | | | | |
| Test Frequency Range: | 2450.0 - 2490.0 MHz | | | | | |
| Port(s) | Band-Edge Markers and Limit | | | Revised Limit | | Margin |
| | M3 Amplitude (dBm) | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz) |
| a | -28.49 | 6.00 | 2454.80 | -- | -- | -28.700 |

Traceability to Industry Recognized Test Methodologies

| | |
|---------------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 55 of 145

Equipment Configuration for Conducted High Band-Edge Emissions - Peak

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | OQPSK | Duty Cycle (%): | 99.00 |
| Data Rate: | 6.25 Kbps | Antenna Gain (dBi): | 3.50 |
| Modulation: | FHSS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| | | | | | | |
|------------------------------|------------------------------------|-------------------------|---------------------------|------------------------|----------------------------|---------------|
| Channel Frequency: | 2427.2 MHz | | | | | |
| Band-Edge Frequency: | 2483.5 MHz | | | | | |
| Test Frequency Range: | 2425.0 - 2490.0 MHz | | | | | |
| Port(s) | Band-Edge Markers and Limit | | | Revised Limit | | Margin |
| | M3 Amplitude (dBm) | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz) |
| a | -28.56 | 7.00 | 2427.30 | -- | -- | -56.200 |

Traceability to Industry Recognized Test Methodologies

| | |
|---------------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 56 of 145

9.7.2. Radiated Spurious Emissions > 1GHz

Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands

FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209
Industry Canada RSS-247 §A5.5

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 57 of 145

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add 10 log (N) dB was implemented

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




9.7.2.3. Restricted Band Emissions

Spurious Emissions > 1G Integral Antenna



Variant: FSK, Test Freq: 2400.20 MHz, Antenna: Integral, Power Setting: 28 dBm, Duty Cycle (%): 100

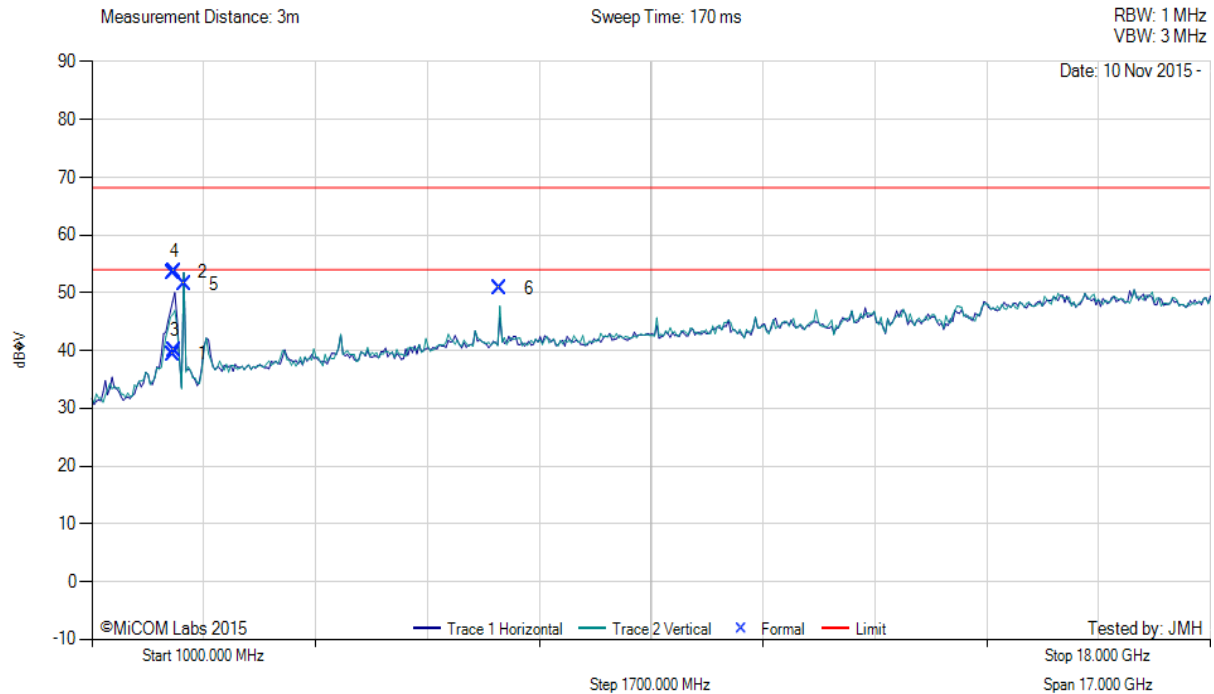


| Num | Frequency MHz | Raw dBµV | Cable Loss | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2225.53 | 49.11 | 2.64 | -12.33 | 39.42 | Max Avg | Horizontal | 100 | 53 | 54.0 | -14.6 | Pass |
| 2 | 2225.53 | 63.17 | 2.64 | -12.33 | 53.48 | Max Peak | Horizontal | 100 | 53 | 68.2 | -14.8 | Pass |
| 3 | 2252.30 | 49.50 | 2.63 | -12.10 | 40.03 | Max Avg | Horizontal | 104 | 76 | 54.0 | -14.0 | Pass |
| 4 | 2252.30 | 63.08 | 2.63 | -12.10 | 53.61 | Max Peak | Horizontal | 104 | 76 | 68.2 | -14.6 | Pass |
| 5 | 2400.28 | 60.69 | 2.69 | -11.84 | 51.54 | Fundamental | Horizontal | 169 | 360 | -- | -- | |
| 6 | 7200.70 | 53.90 | 4.24 | -7.35 | 50.79 | Peak (NRB) | Vertical | 151 | 12 | -- | -- | Pass |

Test Notes: Test Notes: EUT on table at 150cm powered by DC PS 4V

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Variant: OFDM, Test Freq: 2440.80 MHz, Antenna: Integral, Power Setting: 28 dBm, Duty Cycle (%): 100

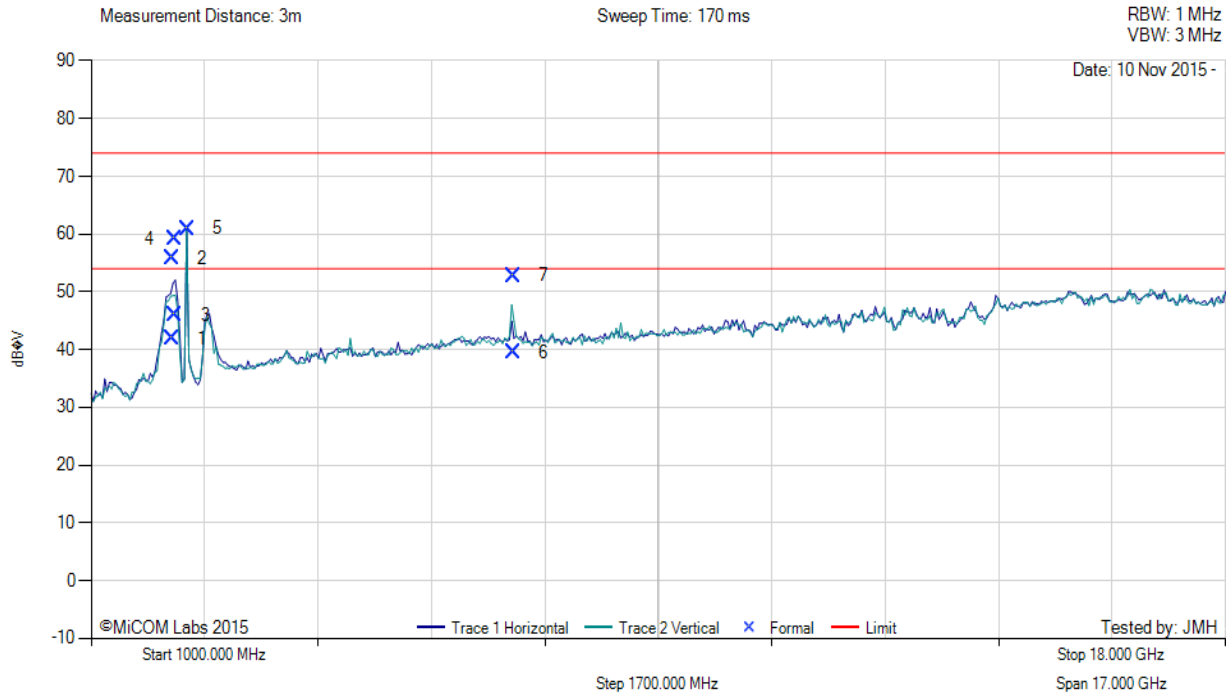


| Num | Frequency MHz | Raw dBµV | Cable Loss | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2218.34 | 51.64 | 2.62 | -12.41 | 41.85 | Max Avg | Horizontal | 105 | 73 | 54.0 | -12.2 | Pass |
| 2 | 2218.34 | 65.51 | 2.62 | -12.41 | 55.72 | Max Peak | Horizontal | 105 | 73 | 74.0 | -18.3 | Pass |
| 3 | 2262.21 | 55.50 | 2.64 | -12.12 | 46.02 | Max Avg | Horizontal | 151 | 63 | 54.0 | -8.0 | Pass |
| 4 | 2262.21 | 68.70 | 2.64 | -12.12 | 59.22 | Max Peak | Horizontal | 151 | 63 | 74.0 | -14.8 | Pass |
| 5 | 2440.65 | 69.99 | 2.72 | -11.72 | 60.99 | Fundamental | Horizontal | 151 | 0 | -- | -- | |
| 6 | 7322.26 | 42.56 | 4.26 | -7.26 | 39.56 | Max Avg | Vertical | 148 | 345 | 54.0 | -14.4 | Pass |
| 7 | 7322.26 | 55.79 | 4.26 | -7.26 | 52.79 | Max Peak | Vertical | 148 | 345 | 74.0 | -21.2 | Pass |

Test Notes: EUT on table at 150cm powered by DC PS 4V

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Variant: OFDM, Test Freq: 2476.80 MHz, Antenna: Integral, Power Setting: 28 dBm, Duty Cycle (%): 100

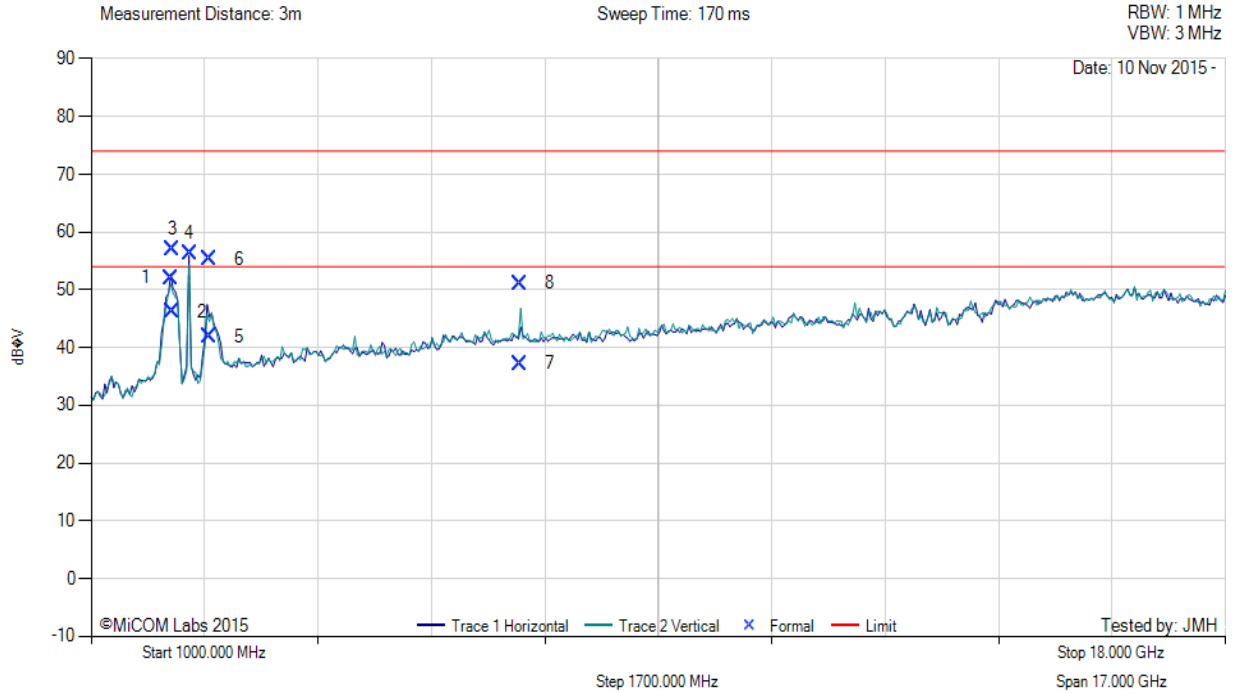

| Num | Frequency MHz | Raw dBµV | Cable Loss | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2190.90 | 62.10 | 2.60 | -12.58 | 52.12 | Peak (NRB) | Horizontal | 151 | 0 | -- | -- | Pass |
| 2 | 2216.91 | 56.00 | 2.62 | -12.42 | 46.20 | Max Avg | Horizontal | 100 | 0 | 54.0 | -7.8 | Pass |
| 3 | 2216.91 | 66.78 | 2.62 | -12.42 | 56.98 | Max Peak | Horizontal | 100 | 0 | 74.0 | -17.0 | Pass |
| 4 | 2476.98 | 65.27 | 2.72 | -11.66 | 56.33 | Fundamental | Horizontal | 151 | 0 | -- | -- | |
| 5 | 2762.90 | 50.43 | 2.82 | -11.34 | 41.91 | Max Avg | Horizontal | 121 | 76 | 54.0 | -12.1 | Pass |
| 6 | 2762.90 | 63.88 | 2.82 | -11.34 | 55.36 | Max Peak | Horizontal | 121 | 76 | 74.0 | -18.6 | Pass |
| 7 | 7430.34 | 40.06 | 4.34 | -7.13 | 37.27 | Max Avg | Vertical | 110 | 124 | 54.0 | -16.7 | Pass |
| 8 | 7430.34 | 53.93 | 4.34 | -7.13 | 51.14 | Max Peak | Vertical | 110 | 124 | 74.0 | -22.9 | Pass |

Test Notes: EUT on table at 150cm powered by DC PS 4V


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Spurious Emissions > 1G WP-WPANT40010-C Antenna



Variant: FSK, Test Freq: 2400.20 MHz, Antenna: WP-WPANT40010-C, Power Setting: 28 dBm, Duty Cycle (%): 100

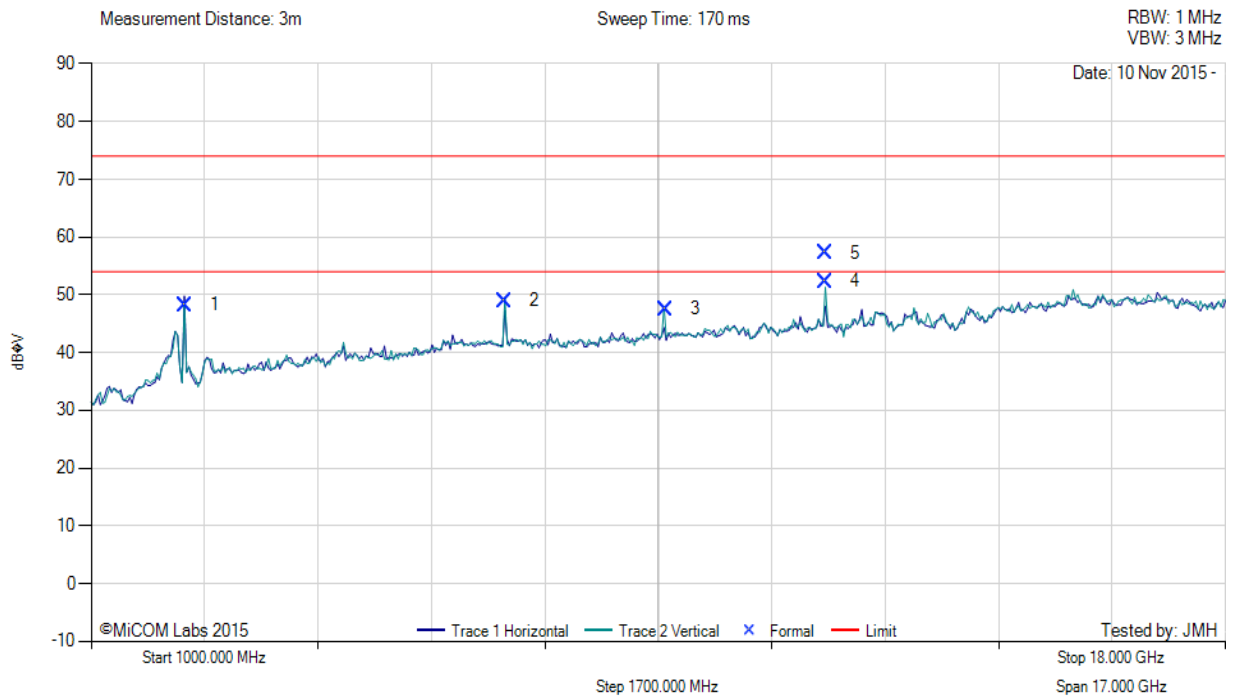

| Num | Frequency MHz | Raw dBµV | Cable Loss | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2400.21 | 57.41 | 2.69 | -11.84 | 48.26 | Fundamental | Horizontal | 100 | 0 | -- | -- | |
| 2 | 7200.60 | 52.10 | 4.24 | -7.35 | 48.99 | Peak (NRB) | Vertical | 151 | 308 | -- | -- | Pass |
| 3 | 9600.80 | 48.27 | 5.26 | -6.02 | 47.51 | Peak (NRB) | Vertical | 151 | 134 | -- | -- | Pass |
| 4 | 12001.05 | 52.11 | 5.37 | -5.17 | 52.31 | Max Avg | Vertical | 100 | 103 | 54.0 | -1.7 | Pass |
| 5 | 12001.05 | 56.99 | 5.37 | -5.17 | 57.19 | Max Peak | Vertical | 100 | 103 | 74.0 | -16.8 | Pass |

Test Notes: EUT on table at 150cm powered by DC PS 4V


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 62 of 145



Variant: OFDM, Test Freq: 2440.80 MHz, Antenna: WP-WPANT40010-C, Power Setting: 28 dBm, Duty Cycle (%): 100

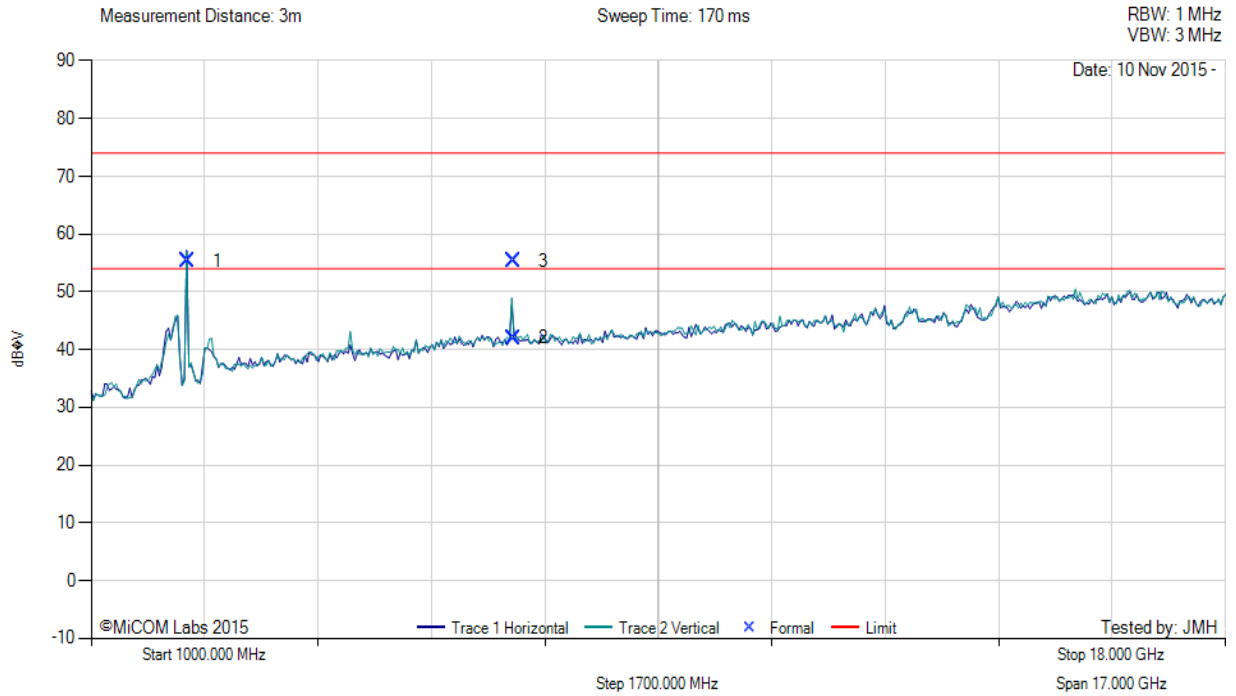

| Num | Frequency MHz | Raw dBµV | Cable Loss | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2440.88 | 64.31 | 2.72 | -11.72 | 55.31 | Fundamental | Horizontal | 101 | 0 | -- | -- | |
| 2 | 7322.62 | 45.06 | 4.26 | -7.26 | 42.06 | Max Avg | Vertical | 196 | 111 | 54.0 | -11.9 | Pass |
| 3 | 7322.62 | 58.38 | 4.26 | -7.26 | 55.38 | Max Peak | Vertical | 196 | 111 | 74.0 | -18.6 | Pass |

Test Notes: EUT on table at 150cm powered by DC PS 4V


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 63 of 145



Variant: OFDM, Test Freq: 2476.80 MHz, Antenna: WP-WPANT40010-C, Power Setting: 28 dBm, Duty Cycle (%): 100

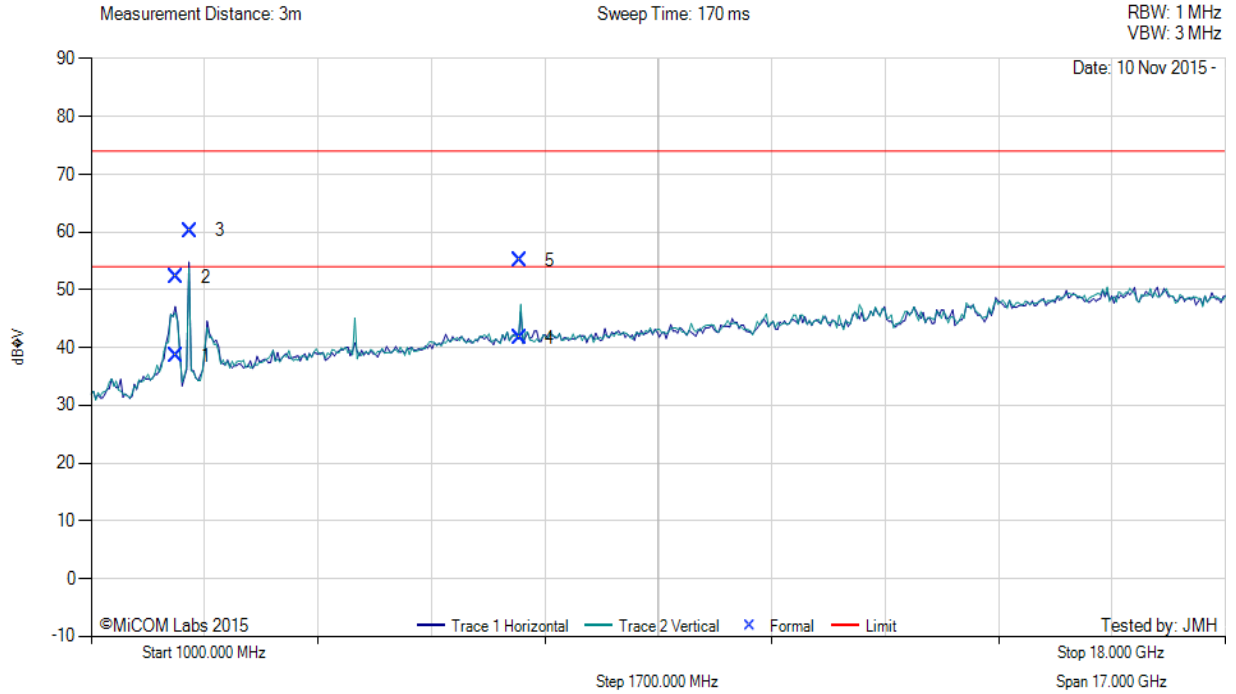

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2264.88 | 48.00 | 2.64 | -12.13 | 38.51 | Max Avg | Horizontal | 122 | 27 | 54.0 | -15.5 | Pass |
| 2 | 2264.88 | 61.69 | 2.64 | -12.13 | 52.20 | Max Peak | Horizontal | 122 | 27 | 74.0 | -21.8 | Pass |
| 3 | 2476.65 | 69.17 | 2.72 | -11.66 | 60.23 | Fundamental | Horizontal | 151 | 360 | -- | -- | |
| 4 | 7430.36 | 44.52 | 4.34 | -7.13 | 41.73 | Max Avg | Vertical | 126 | 104 | 54.0 | -12.3 | Pass |
| 5 | 7430.36 | 57.85 | 4.34 | -7.13 | 55.06 | Max Peak | Vertical | 126 | 104 | 74.0 | -18.9 | Pass |

Test Notes: EUT on table at 150cm powered by DC PS 4V

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 64 of 145

Spurious Emissions > 1G WP-WPANT30017-CA Antenna



Variant: FSK, Test Freq: 2400.20 MHz, Antenna: WP-WPANT30017-CA, Power Setting: 28 dBm, Duty Cycle (%): 100

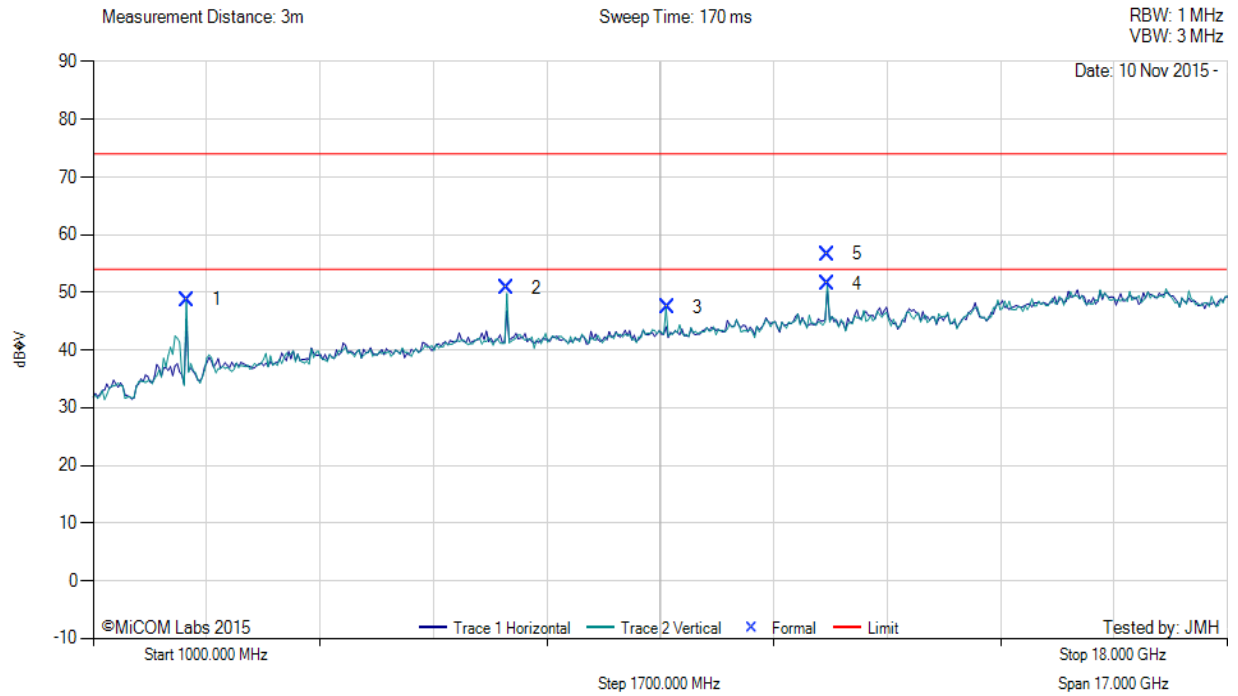

| Num | Frequency MHz | Raw dBµV | Cable Loss | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 2400.15 | 57.89 | 2.69 | -11.84 | 48.74 | Fundamental | Vertical | 200 | 226 | -- | -- | |
| 2 | 7200.79 | 53.86 | 4.24 | -7.35 | 50.75 | Peak (NRB) | Vertical | 148 | 13 | -- | -- | Pass |
| 3 | 9600.81 | 48.12 | 5.26 | -6.02 | 47.36 | Peak (NRB) | Vertical | 148 | 0 | -- | -- | Pass |
| 4 | 12001.02 | 51.29 | 5.37 | -5.17 | 51.49 | Max Avg | Vertical | 100 | 126 | 54.0 | -2.5 | Pass |
| 5 | 12001.02 | 56.47 | 5.37 | -5.17 | 56.67 | Max Peak | Vertical | 100 | 126 | 74.0 | -17.3 | Pass |

Test Notes: EUT on 150cm table, DC PS 4V


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 65 of 145



Variant: FSK, Test Freq: 2440.80 MHz, Antenna: WP-WPANT30017-CA, Power Setting: 28 dBm, Duty Cycle (%): 100

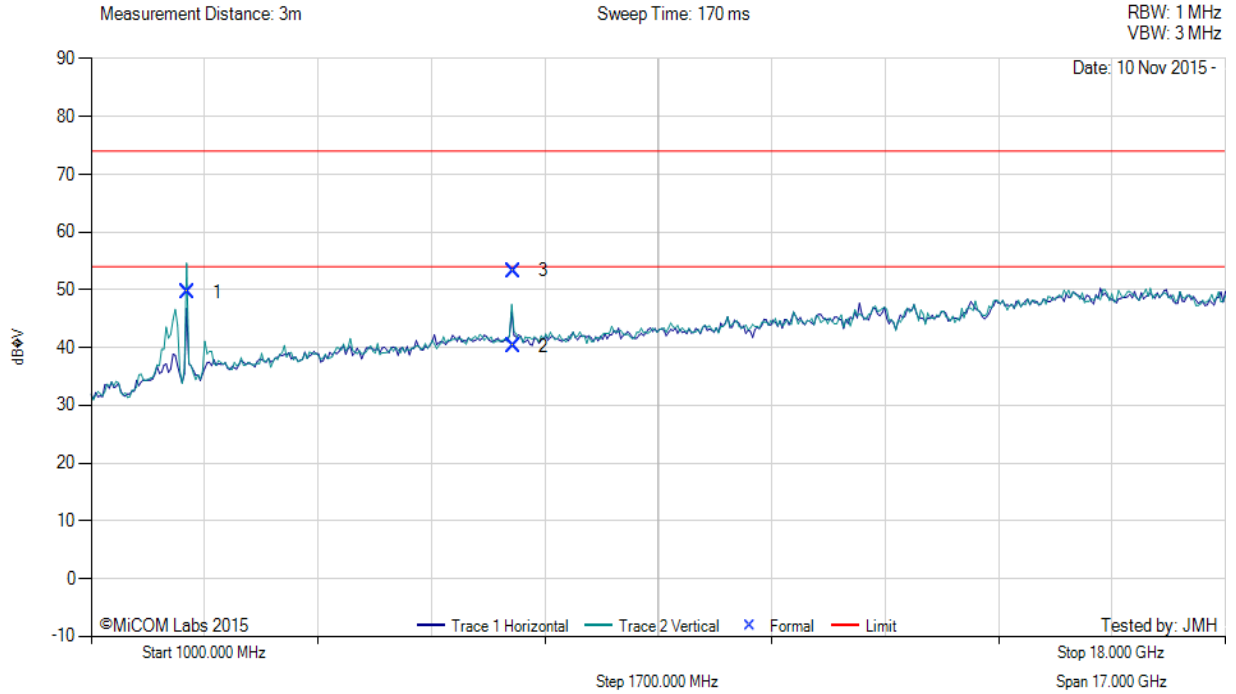

| Num | Frequency MHz | Raw dBµV | Cable Loss | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 2440.68 | 58.60 | 2.72 | -11.72 | 49.60 | Fundamental | Vertical | 199 | 1 | -- | -- | |
| 2 | 7322.43 | 43.26 | 4.26 | -7.26 | 40.26 | Max Avg | Vertical | 185 | 350 | 54.0 | -13.7 | Pass |
| 3 | 7322.43 | 56.31 | 4.26 | -7.26 | 53.31 | Max Peak | Vertical | 185 | 350 | 74.0 | -20.7 | Pass |

Test Notes: EUT on table at 150cm, powered by DC PS 4V


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 66 of 145



Variant: FSK, Test Freq: 2476.80 MHz, Antenna: WP-WPANT30017-CA, Power Setting: 28 dBm, Duty Cycle (%): 100

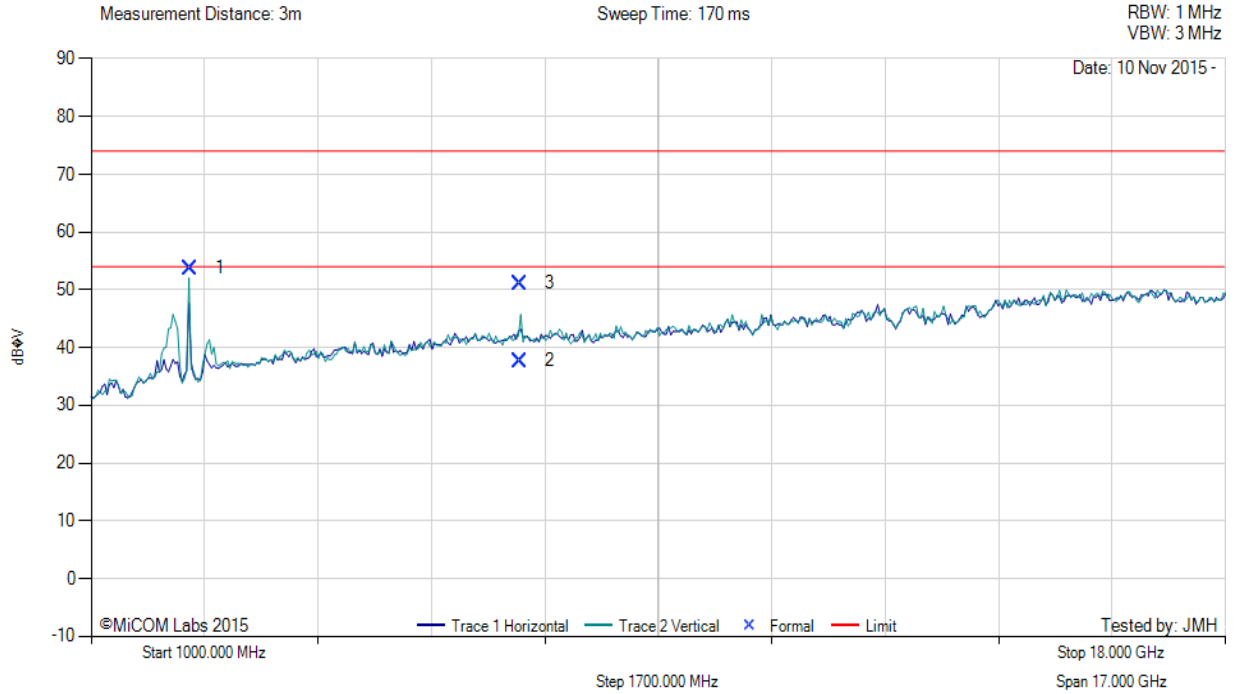

| Num | Frequency MHz | Raw dBµV | Cable Loss | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 2476.84 | 62.67 | 2.72 | -11.66 | 53.73 | Fundamental | Vertical | 101 | 353 | -- | -- | |
| 2 | 7430.36 | 40.47 | 4.34 | -7.13 | 37.68 | Max Avg | Vertical | 128 | 109 | 54.0 | -16.3 | Pass |
| 3 | 7430.36 | 53.93 | 4.34 | -7.13 | 51.14 | Max Peak | Vertical | 128 | 109 | 74.0 | -22.9 | Pass |

Test Notes: Test Notes: EUT on table at 150cm powered by DC PS 4V


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 67 of 145



Variant: FSK, Test Freq: 2440.80 MHz, Antenna: WP-WPANT30017-CA, Power Setting: 28 dBm, Duty Cycle (%): 100

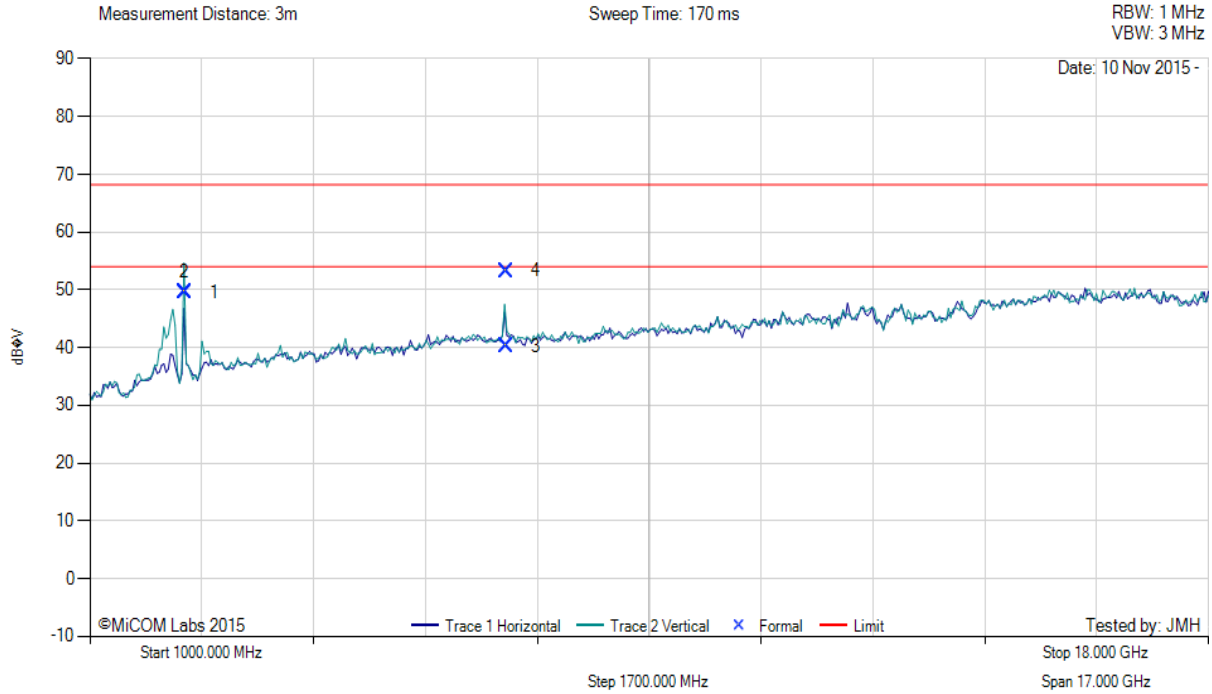

| Num | Frequency MHz | Raw dBµV | Cable Loss | AF dB | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 2440.68 | 58.60 | 2.72 | -11.72 | 49.60 | Fundamental | Vertical | 199 | 1 | -- | -- | |
| 3 | 7322.43 | 43.26 | 4.26 | -7.26 | 40.26 | Max Avg | Vertical | 185 | 350 | 54.0 | -13.7 | Pass |
| 4 | 7322.43 | 56.31 | 4.26 | -7.26 | 53.31 | Max Peak | Vertical | 185 | 350 | 68.2 | -14.9 | Pass |

Test Notes: EUT on table at 150cm, powered by DC PS 4V

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.7.2.4. Restricted Band-Edge Emissions

Complied Summary of Radiated Band-Edge Results

Integral Antenna (155-0010)

| NIC 511 | | Band-Edge Freq | Peak (Limit 74.0dB μ V/m) | Average (Limit 54.0dB μ V/m) | Power Setting |
|----------------------|---------------------------|----------------|----------------------------------|-------------------------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dB μ V/m | dB μ V/m | |
| FSK | 2400.20 | 2390.00 | 60.73 | 52.32 | 28.00 |
| OFDM* (600 Kbps) | 2400.40 | 2390.00 | 64.33 | 50.24 | 28.00 |
| OFDM (2.4 Mbit/s) | 2401.20 | 2390.00 | 63.87 | 51.16 | 28.00 |

| NIC 511 | | Band-Edge Freq | Peak (Limit 74.0dB μ V/m) | Average (Limit 54.0dB μ V/m) | Power Setting |
|----------------------|---------------------------|----------------|----------------------------------|-------------------------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dB μ V/m | dB μ V/m | |
| FSK* | -- | --- | --- | ---- | ---- |
| OFDM* (600 Kbps) | ---- | --- | ---- | --- | --- |
| OFDM (2.4 Mbit/s) | 2476.80 | 2483.50 | 71.40 | 45.10 | 28.00 |

*Note: EUT channel plan only has 2.4 Mbit/s OFDM at higher frequencies



External Antenna (WPANT40010-C)

| NIC 511 | | Band-Edge Freq | Peak (Limit 74.0dBµV/m) | Average (Limit 54.0dBµV/m) | Power Setting |
|----------------------|---------------------------|----------------|----------------------------|-------------------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dBµV/m | dBµV/m | |
| FSK | 2400.20 | 2390.00 | 53.06 | 41.58 | 28.00 |
| OFDM* (600 Kbps) | 2400.40 | 2390.00 | 57.90 | 45.02 | 28.00 |
| OFDM (2.4 Mbit/s) | 2401.20 | 2390.00 | 58.06 | 45.42 | 28.00 |

| NIC 511 | | Band-Edge Freq | Peak (Limit 74.0dBµV/m) | Average (Limit 54.0dBµV/m) | Power Setting |
|----------------------|---------------------------|----------------|----------------------------|-------------------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dBµV/m | dBµV/m | |
| FSK* | -- | --- | --- | ---- | ---- |
| OFDM* (600 Kbps) | ---- | --- | ---- | --- | --- |
| OFDM (2.4 Mbit/s) | 2476.80 | 2483.50 | 71.63 | 44.43 | 28.00 |

*Note: EUT channel plan only has 2.4 Mbit/s OFDM at higher frequencies

External Antenna (WPANT30017-CA)

| NIC 511 | | Band-Edge Freq | Peak (Limit 74.0dBµV/m) | Average (Limit 54.0dBµV/m) | Power Setting |
|----------------------|---------------------------|----------------|----------------------------|-------------------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dBµV/m | dBµV/m | |
| FSK | 2400.20 | 2390.00 | 53.38 | 41.70 | 28.00 |
| OFDM* (600 Kbps) | 2400.40 | 2390.00 | 56.80 | 43.71 | 28.00 |
| OFDM (2.4 Mbit/s) | 2401.20 | 2390.00 | 57.08 | 43.71 | 28.00 |


| NIC 511 | | Band-Edge Freq | Peak (Limit 74.0dBµV/m) | Average (Limit 54.0dBµV/m) | Power Setting |
|----------------------|---------------------------|----------------|----------------------------|-------------------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dBµV/m | dBµV/m | |
| FSK* | -- | --- | --- | ---- | ---- |
| OFDM* (600 Kbps) | ---- | --- | ---- | --- | --- |
| OFDM (2.4 Mbit/s) | 2476.80 | 2483.50 | 61.27 | 47.04 | 28.00 |

*Note: EUT channel plan only has 2.4 Mbit/s OFDM at higher frequencies

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Integral Antenna - Radiated Band-Edge @ 2390 MHz - FSK

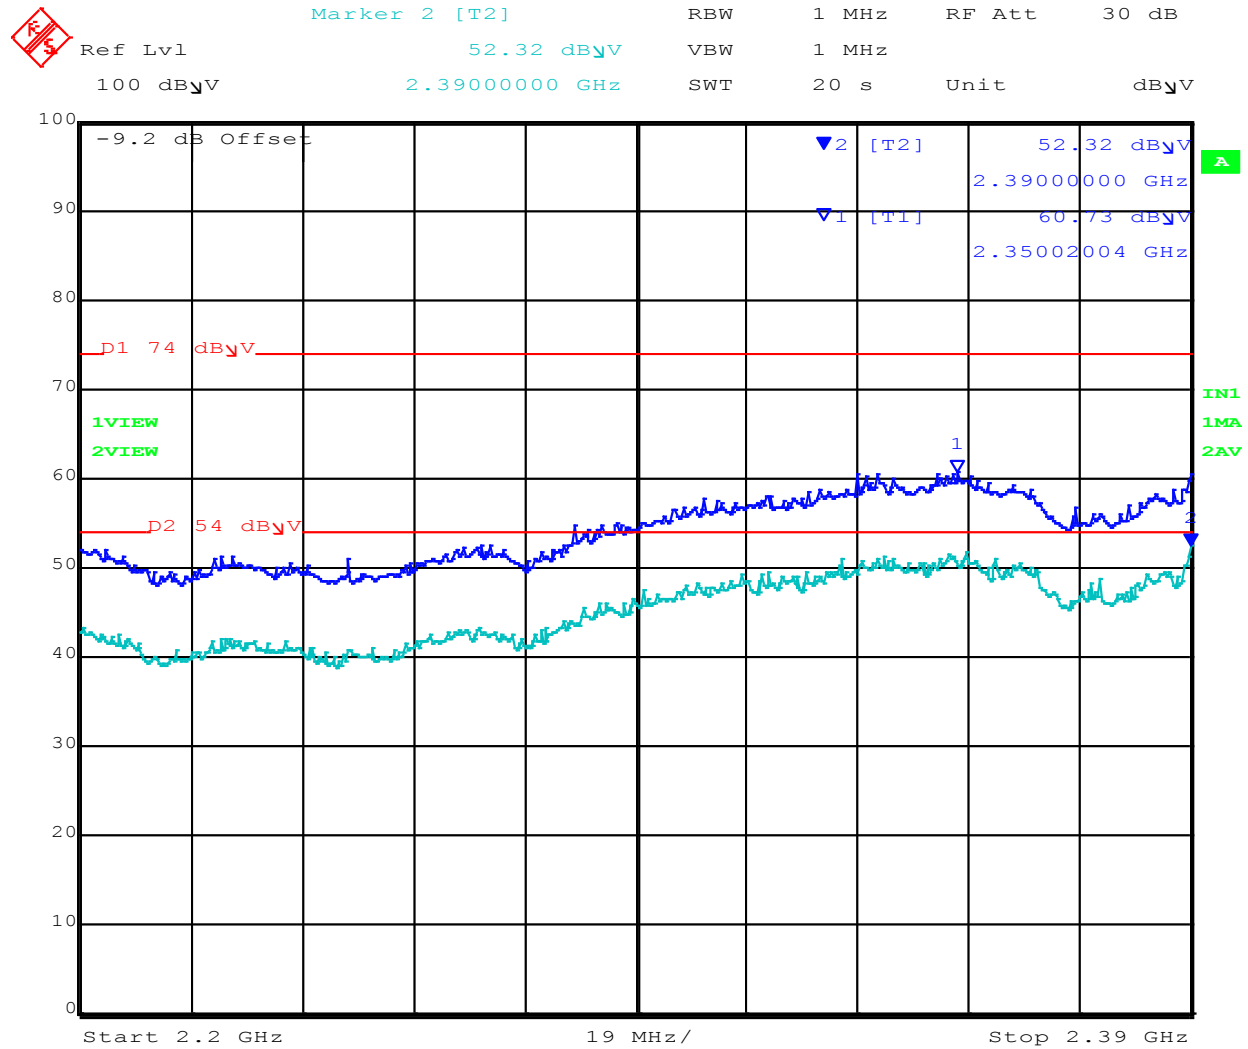


Date: 10.NOV.2015 20:50:54

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Integral Antenna - Radiated Band-Edge @ 2390 MHz – OFDM (600 KB)

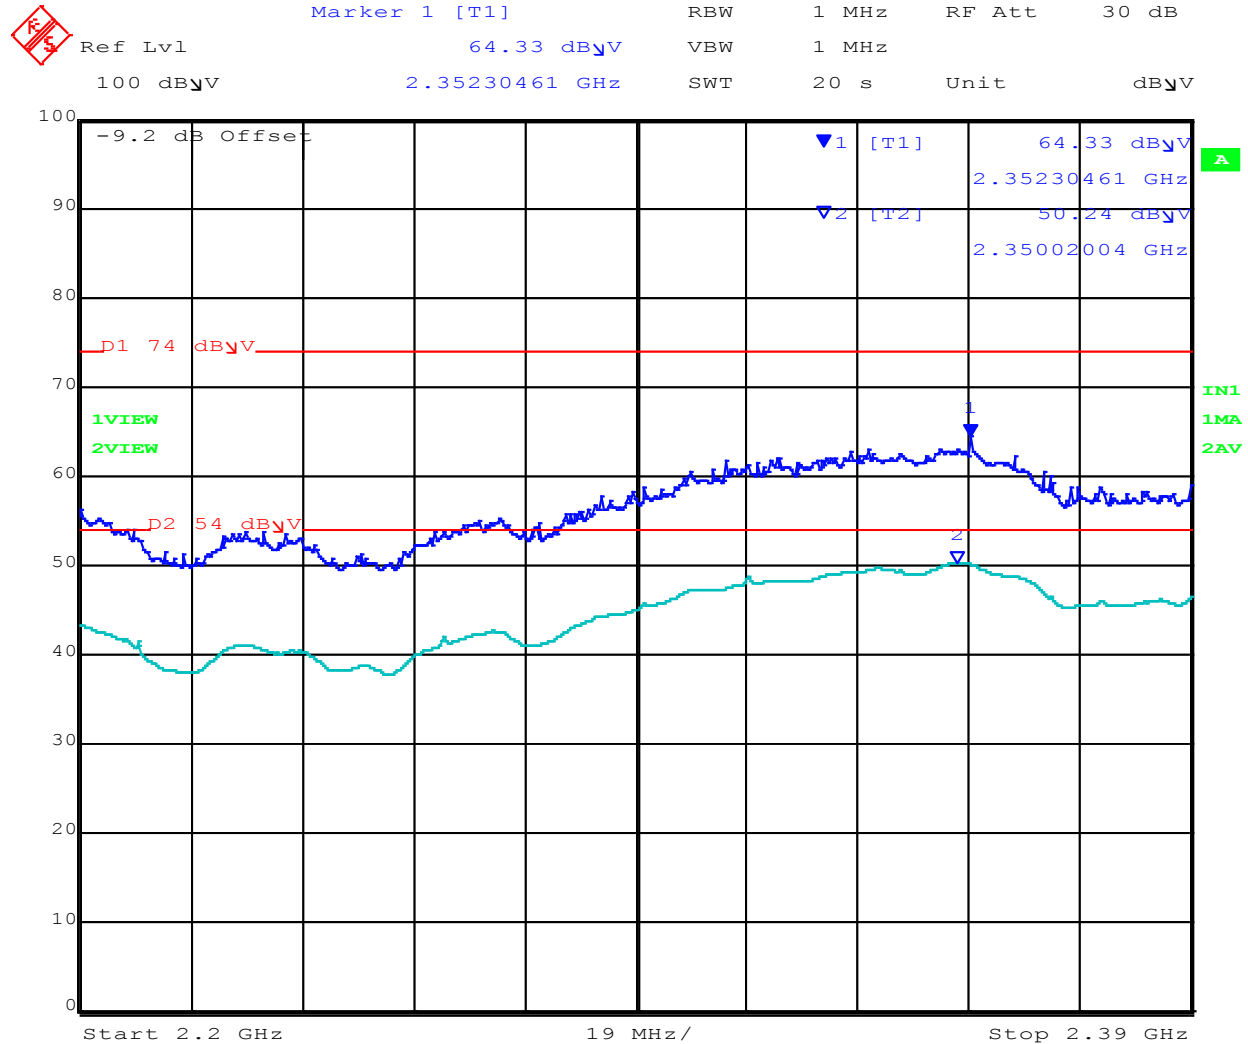

Date: 10.NOV.2015 20:53:52

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Integral Antenna - Radiated Band-Edge @ 2390 MHz – OFDM (2.4 MB)



| | | | | | |
|----------------|------------------|-----|-------|--------|------------|
| Ref Lvl | Marker 1 [T1] | RBW | 1 MHz | RF Att | 30 dB |
| 100 dB μ V | 63.87 dB μ V | VBW | 1 MHz | | |
| | 2.35192385 GHz | SWT | 20 s | Unit | dB μ V |

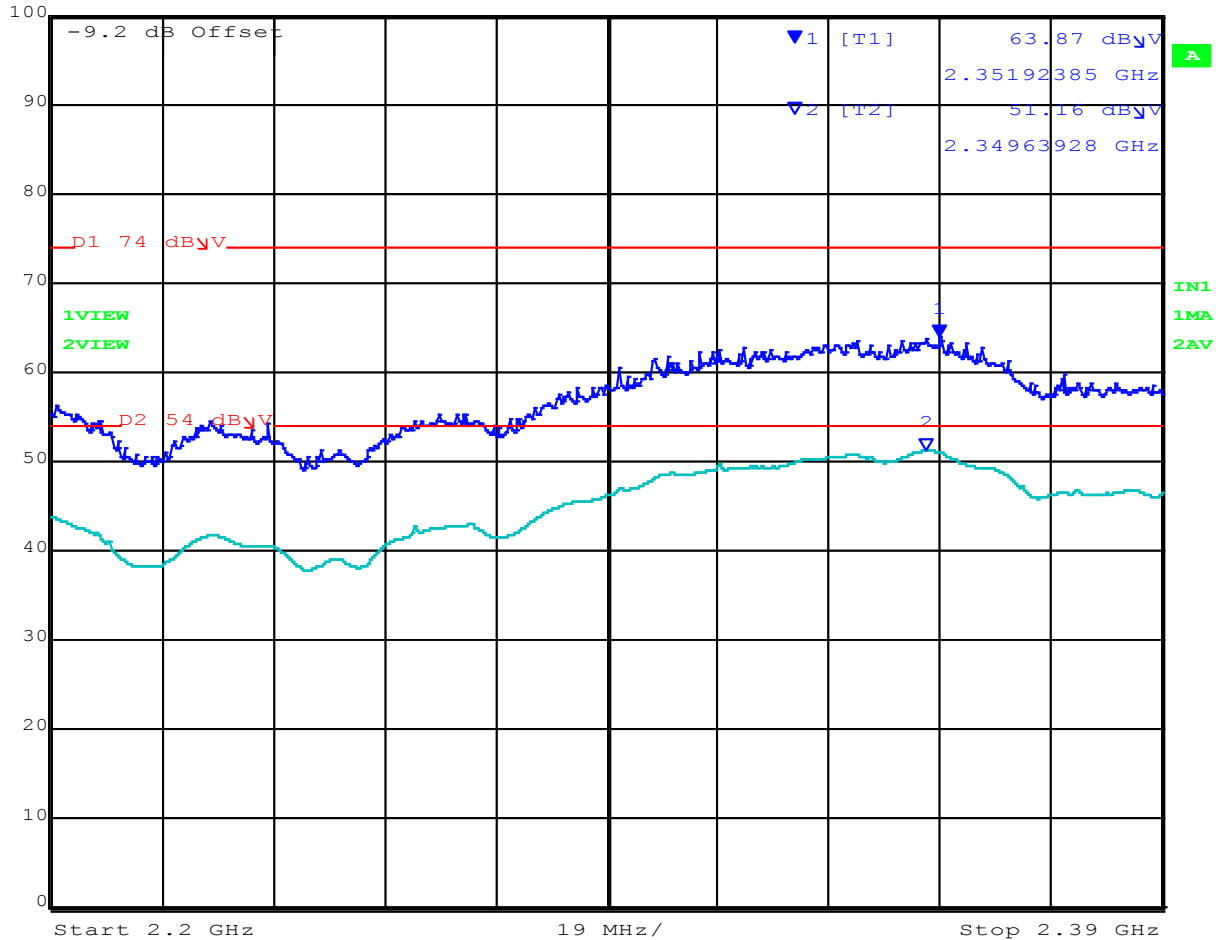

Date: 10.NOV.2015 20:56:21

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Integral Antenna - Radiated Band-Edge @ 2483.5 MHz – OFDM (2.4 MB)



| | | | | | |
|----------------|------------------|-----|-------|--------|------------|
| Ref Lvl | Marker 1 [T1] | RBW | 1 MHz | RF Att | 30 dB |
| 100 dB μ V | 71.40 dB μ V | VBW | 1 MHz | | |
| | 2.48373146 GHz | SWT | 20 s | Unit | dB μ V |

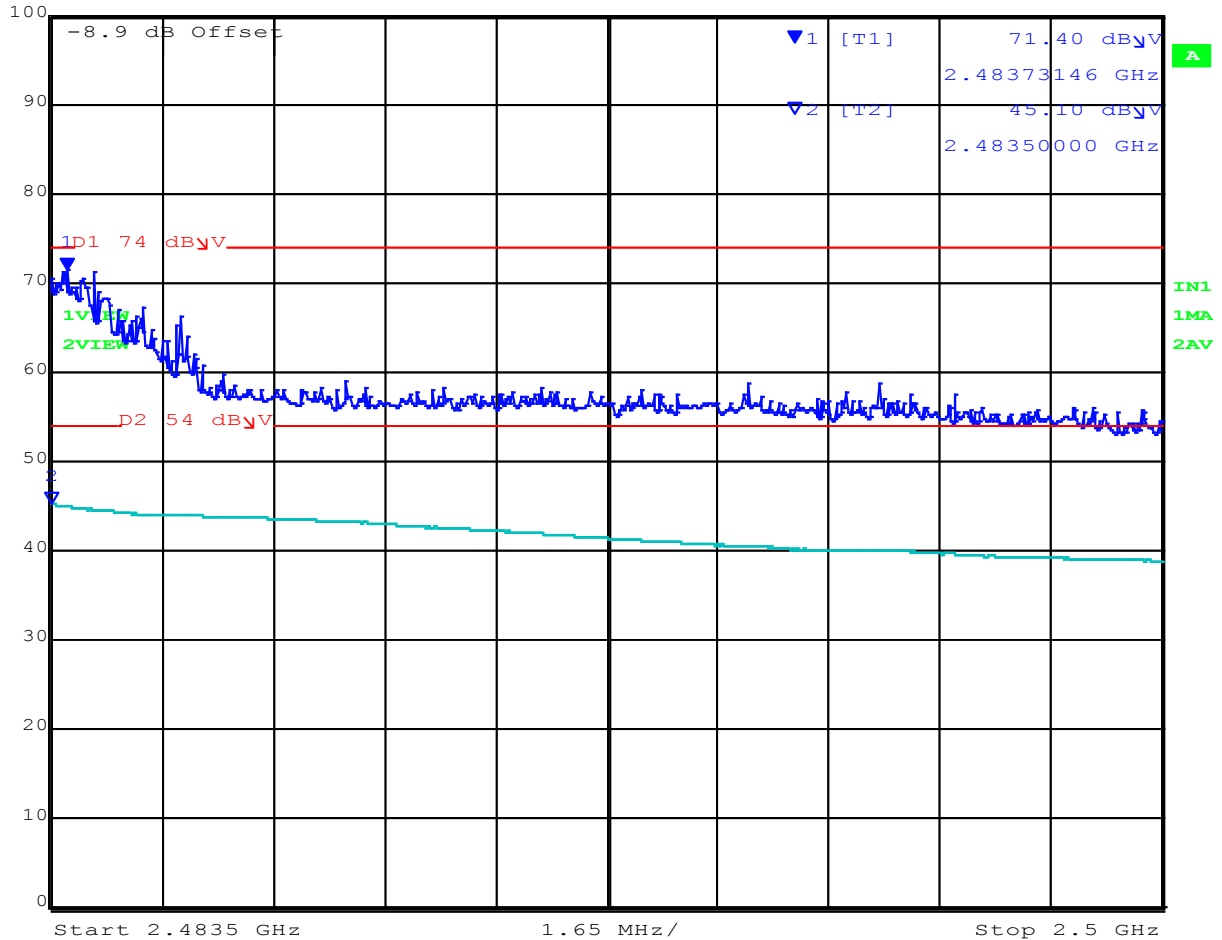

Date: 10.NOV.2015 21:03:35


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 74 of 145

External Antenna (WPANT40010-C) - Radiated Band-Edge @ 2390 MHz - FSK

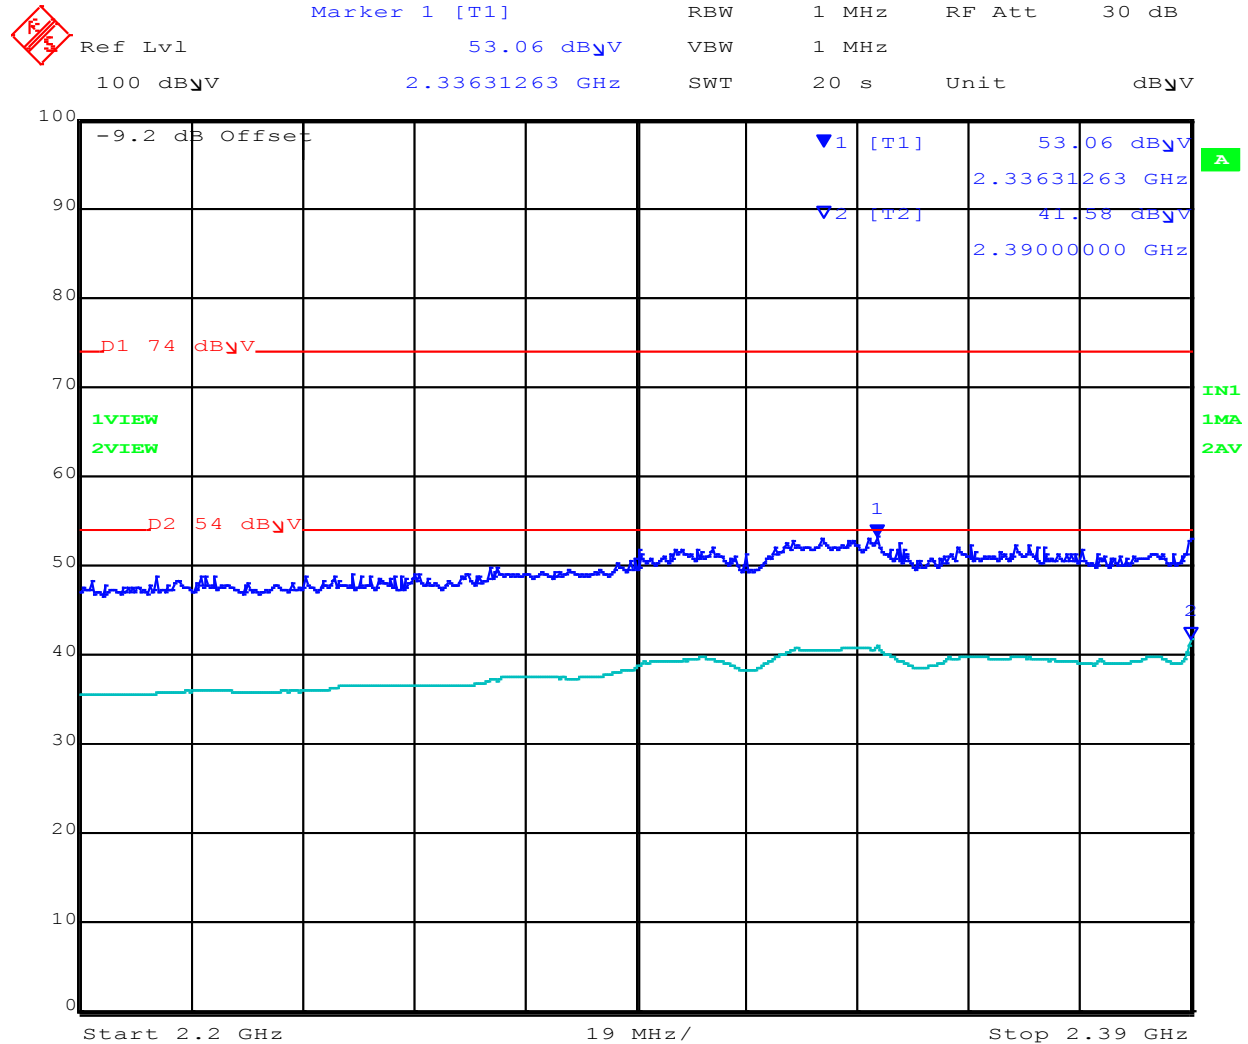


Date: 10.NOV.2015 20:43:17

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



External Antenna (WPANT40010-C) - Radiated Band-Edge @ 2390 MHz – OFDM (600 KB)

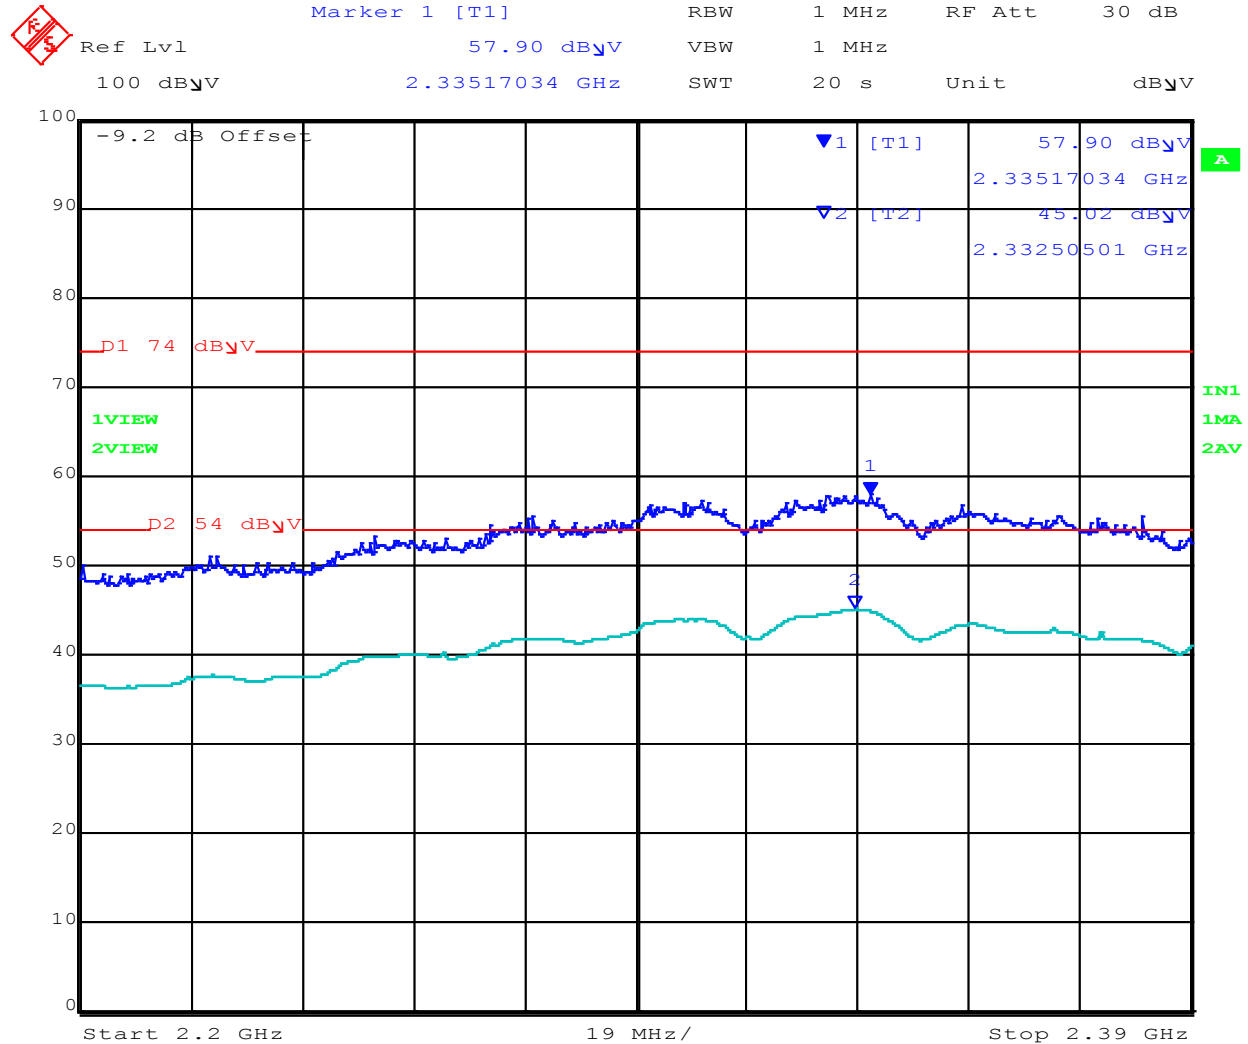


Date: 10.NOV.2015 20:39:48

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



External Antenna (WPANT40010-C) - Radiated Band-Edge @ 2390 MHz – OFDM (2.4 MB)

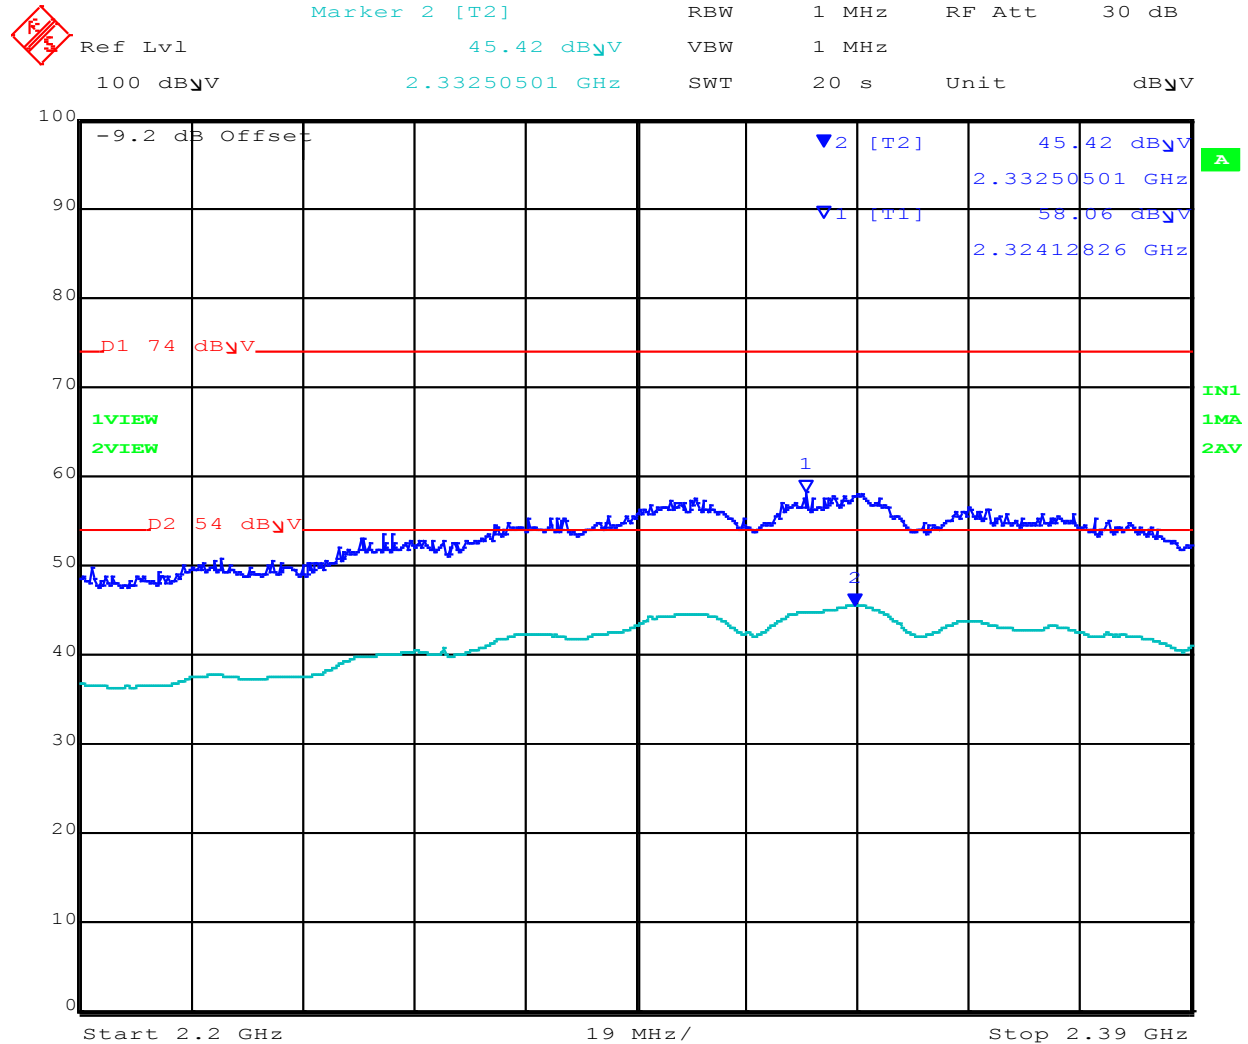

Date: 10.NOV.2015 20:36:30

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



External Antenna (WPANT40010-C)- Radiated Band-Edge @ 2483.5 MHz – OFDM (2.4 MB)



| | | | | | | | |
|---------|----------------|---------------|------------------|-----|-------|--------|------------|
| Ref Lvl | 100 dB μ V | Marker 1 [T1] | 71.63 dB μ V | RBW | 1 MHz | RF Att | 30 dB |
| | | | 2.48353307 GHz | VBW | 1 MHz | | |
| | | | | SWT | 20 s | Unit | dB μ V |

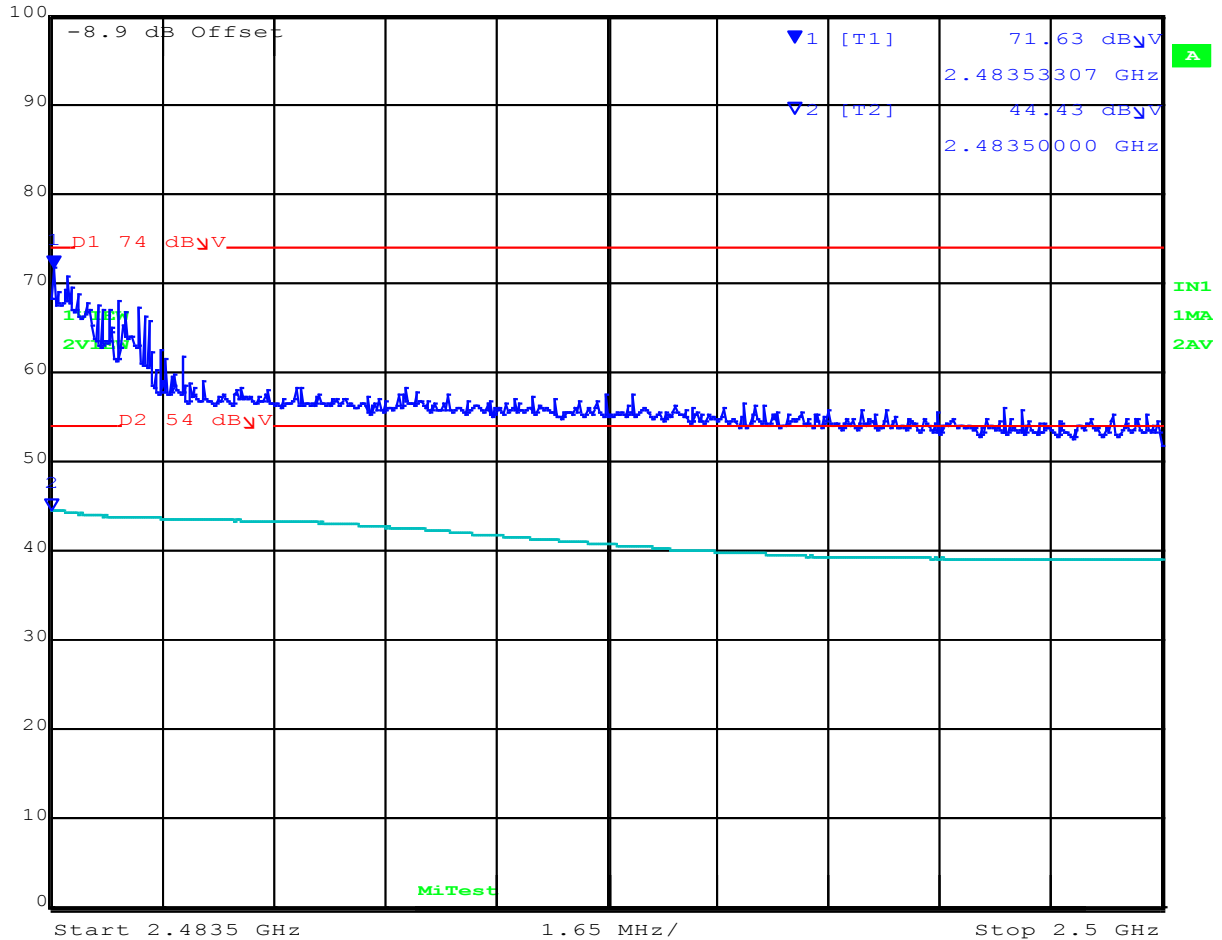


Date: 10.NOV.2015 20:30:20

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



External Antenna (WPANT30017-CA) - Radiated Band-Edge @ 2390 MHz - FSK

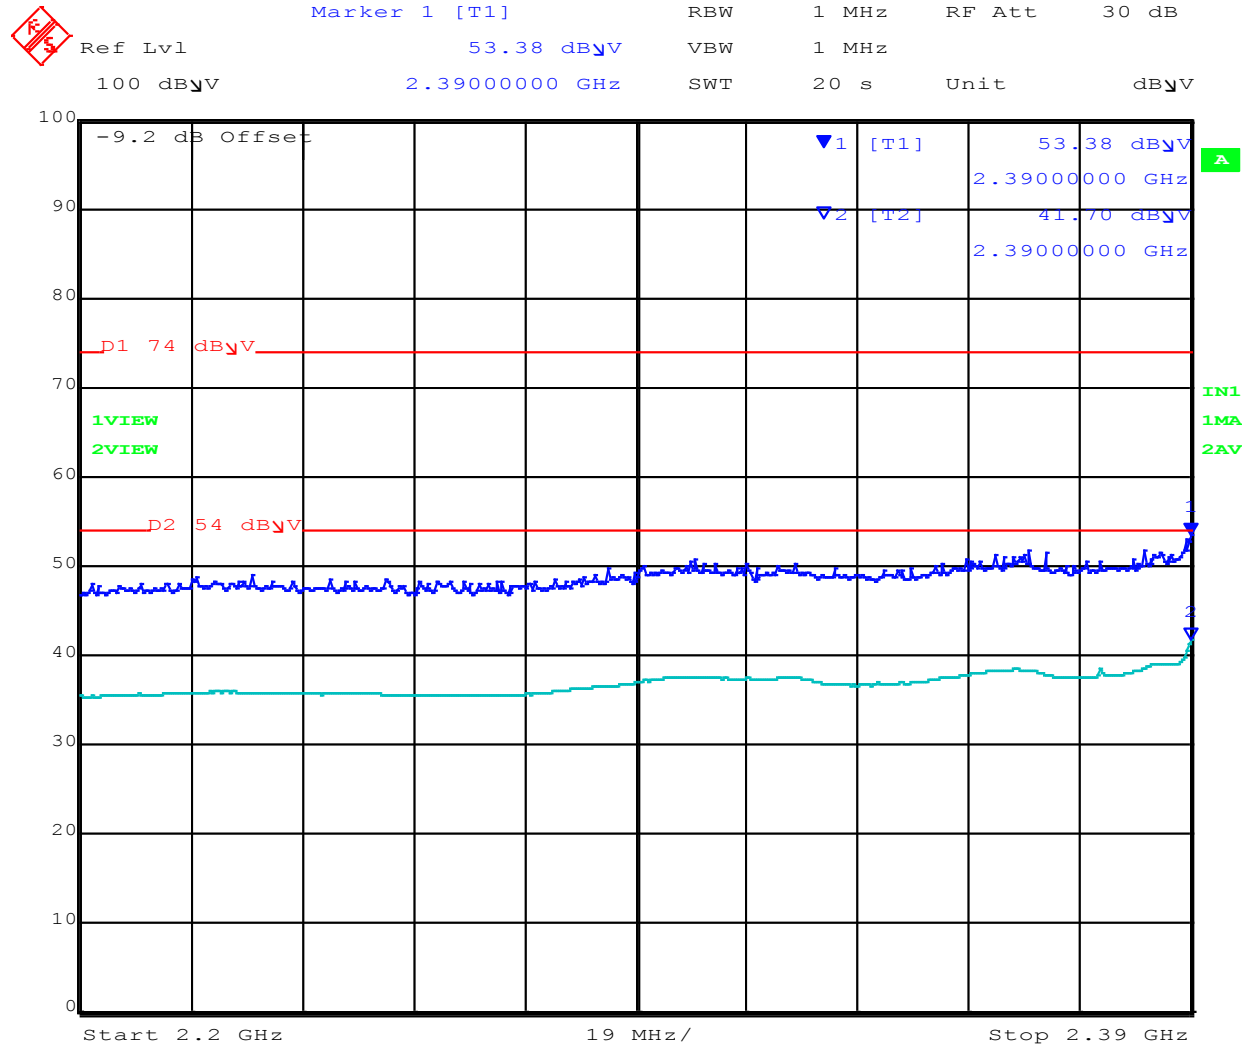


Date: 10.NOV.2015 21:20:41

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



External Antenna (WPANT30017-CA) - Radiated Band-Edge @ 2390 MHz – OFDM (600 KB)

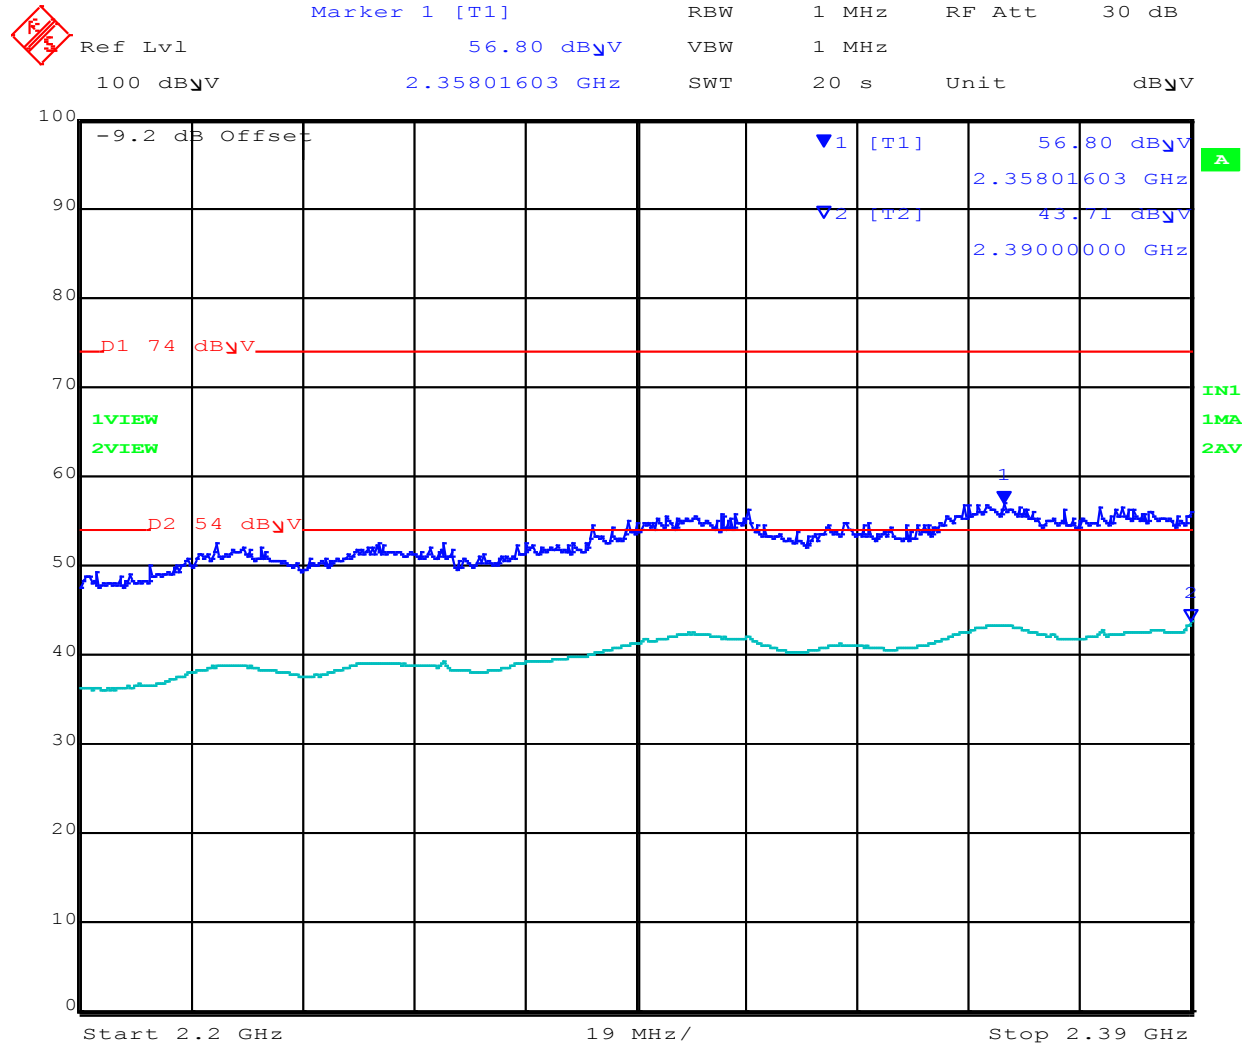


Date: 10.NOV.2015 21:17:28

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



External Antenna (WPANT30017-CA) - Radiated Band-Edge @ 2390 MHz – OFDM (2.4 MB)

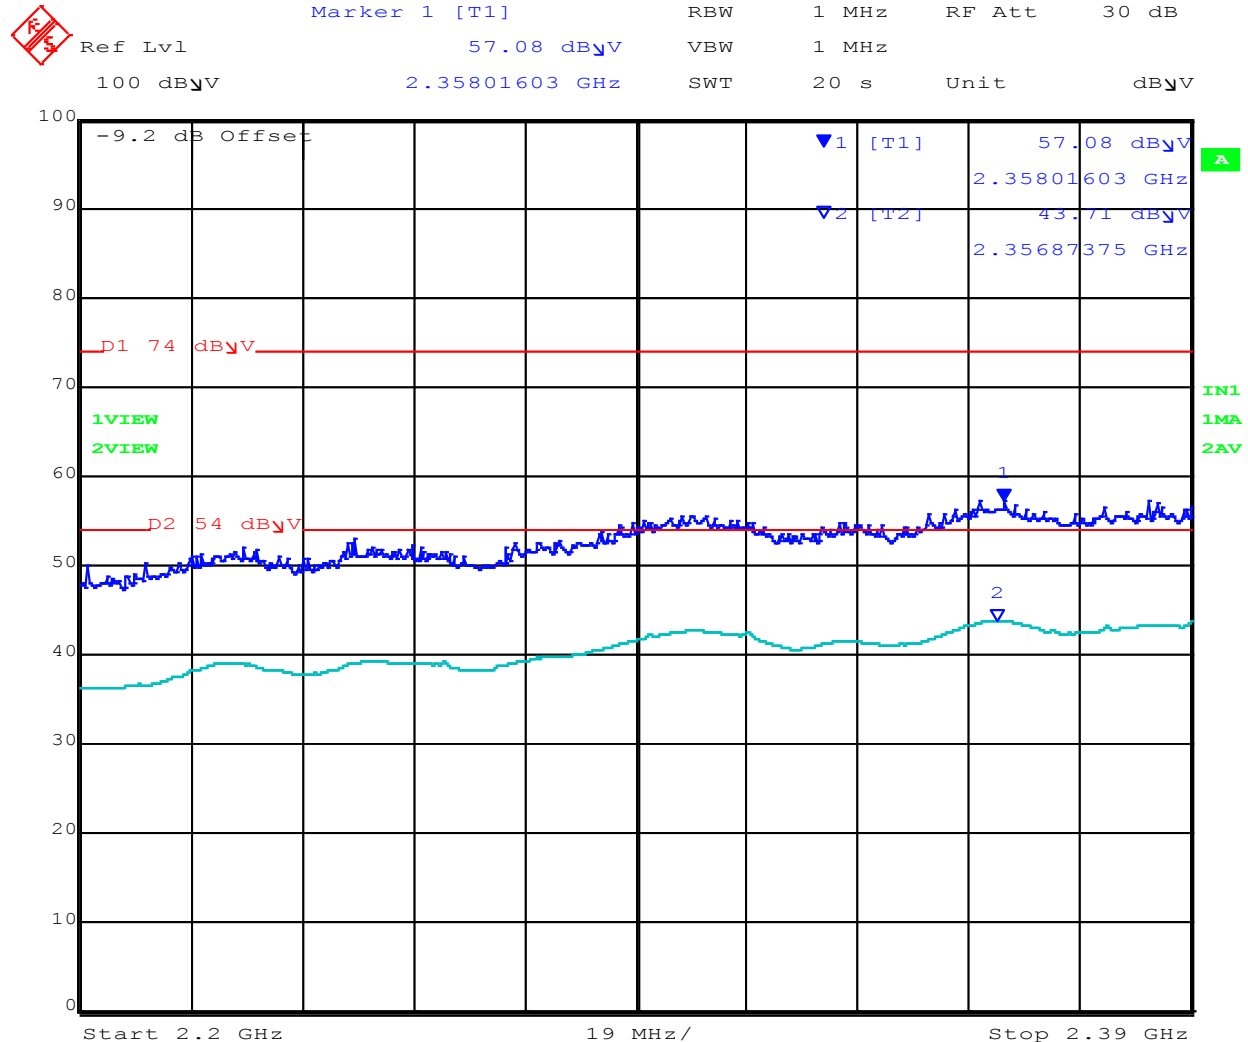


Date: 10.NOV.2015 21:15:18

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



External Antenna (WPANT30017-CA) - Radiated Band-Edge @ 2483.5 MHz – OFDM (2.4 MB)

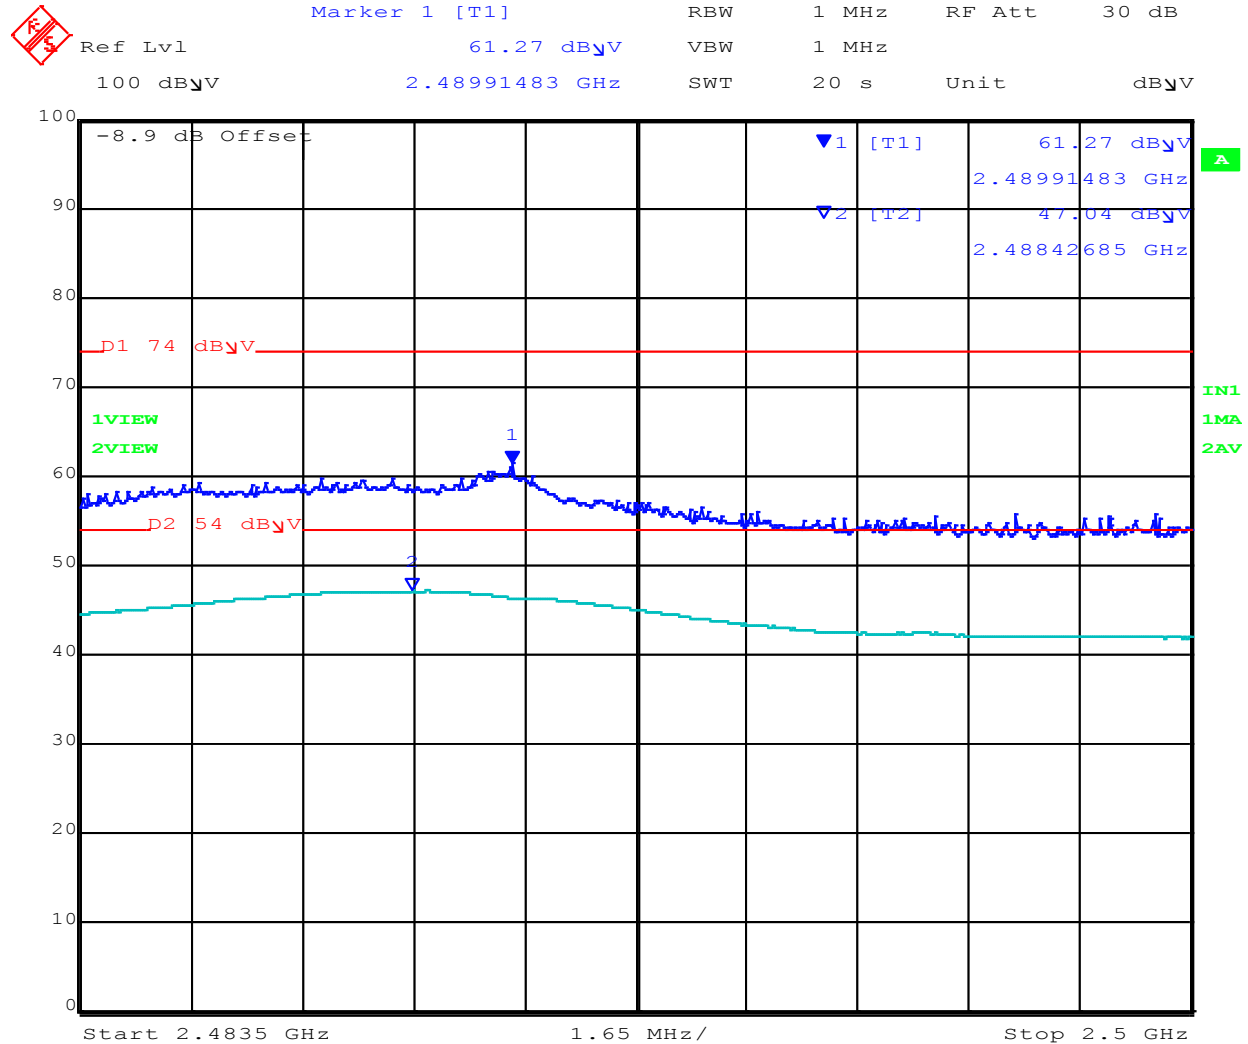

Date: 10.NOV.2015 21:08:32

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.7.3. Digital Emissions (0.03 - 1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209
Industry Canada RSS-Gen §8.9

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength
R = Measured Receiver Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 83 of 145

Integral Antenna 30-1000 MHz



Variant: NA, Test Freq: 0.00 MHz, Antenna: Integral, Power Setting: NA, Duty Cycle (%): NA

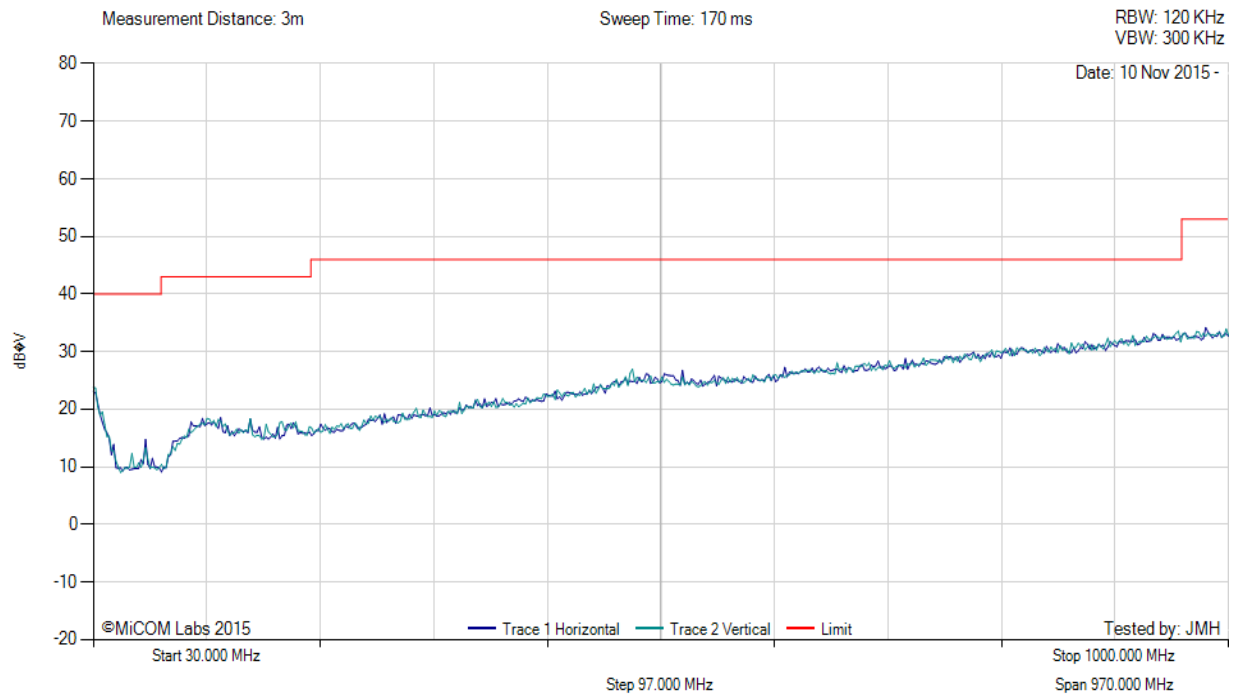

There are no emissions found within 6dB of the limit line.

Test Notes: EUT on Table at 80cm, powered by DC PS 4V, RCV Mode Integral antenna


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



External Antenna WPANT40010-C 30-1000 MHz



Variant: NA, Test Freq: 0.00 MHz, Antenna: WP-WPANT40010-C, Power Setting: 30 dBm, Duty Cycle (%): NA

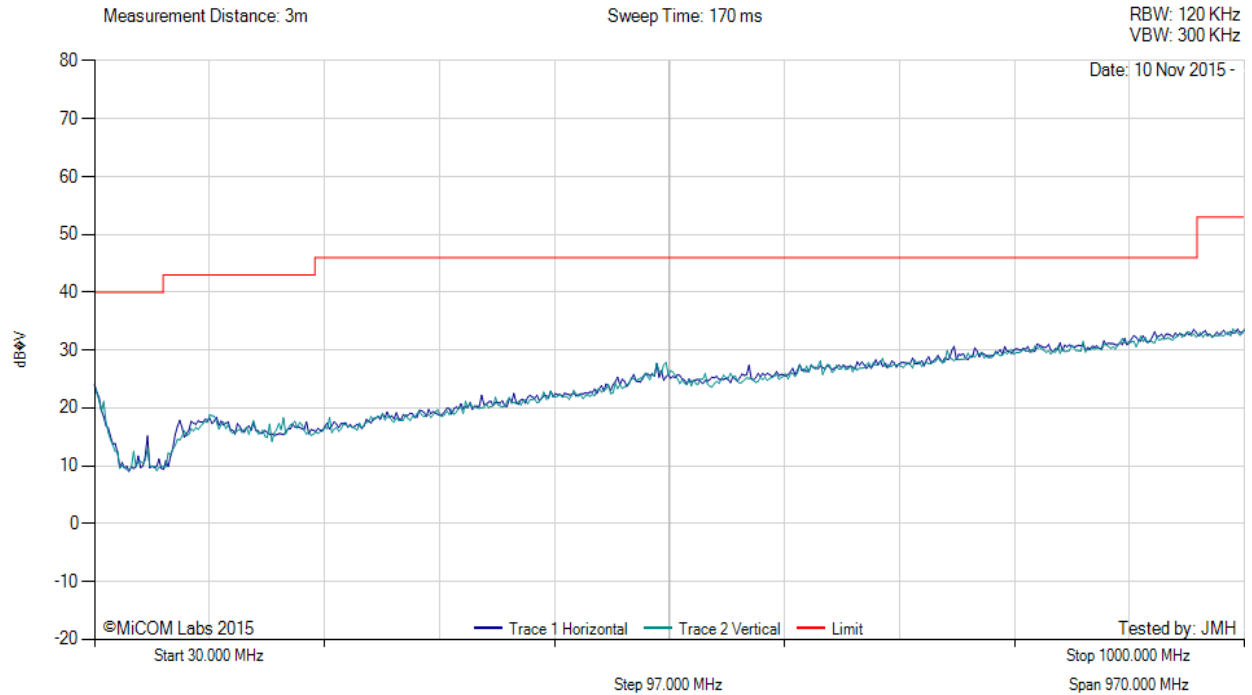

There are no emissions found within 6dB of the limit line.

Test Notes: EUT on table at 80cm powered by DC PS 4V. EUT in RCV mode with wrap antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 85 of 145

External Antenna WPANT30017-CA 30-1000 MHz



Variant: NA, Test Freq: 0.00 MHz, Antenna: External WP, WPANT30017-CA, Power Setting: NA, Duty Cycle (%): NA

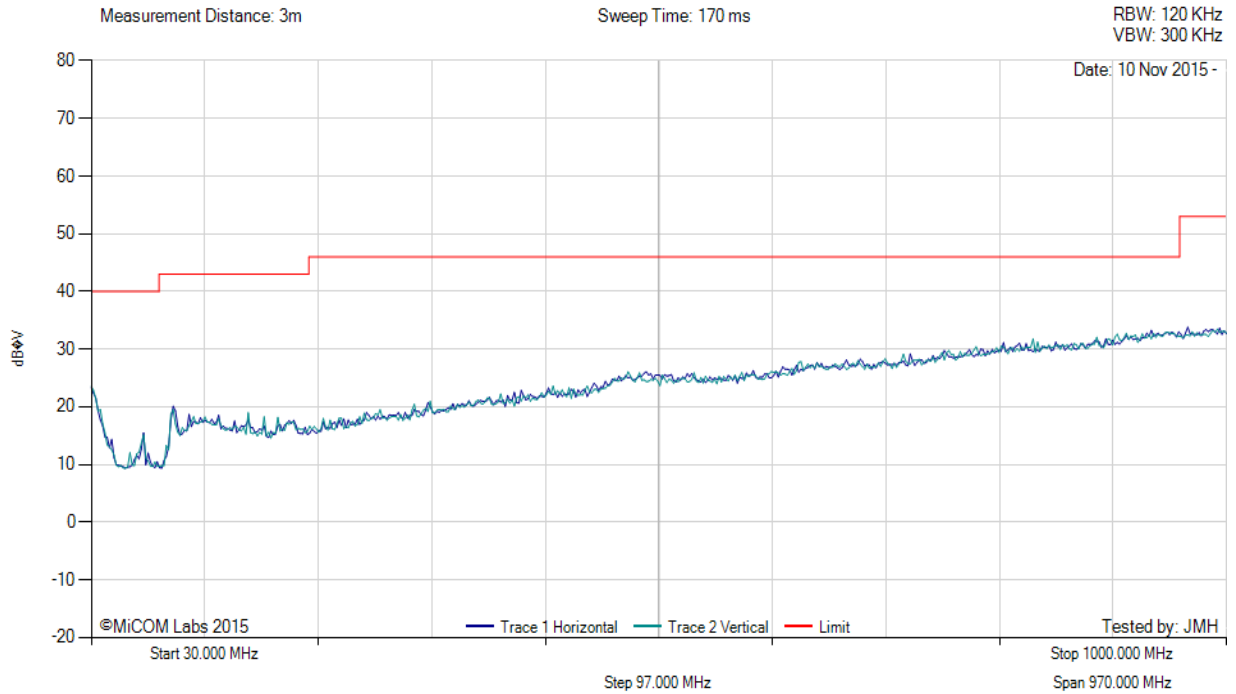

There are no emissions found within 6dB of the limit line.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz)


NOTE: Test not applicable EUT is dc powered

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §8.8

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

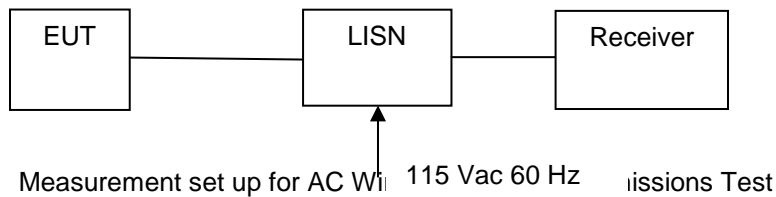

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)



Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

RSS-Gen §8.8

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits in Table 3.

§15.207 (a) and RSS-Gen §8.8 Limit Matrix

The lower limit applies at the boundary between frequency ranges

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

| | |
|-------------------------|---------------|
| Measurement uncertainty | ± 2.64 dB |
|-------------------------|---------------|



9.9. Power Spectral Density

| Conducted Test Conditions for Power Spectral Density | | | |
|--|--------------------------|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Power Spectral Density | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (e) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Power Spectral Density

The transmitter output was connected to a spectrum analyzer and the measured made in a 3 kHz resolution bandwidth using the analyzer auto-coupled sweep-time. A peak value was found over the full emission bandwidth and the spectrum downloaded for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (\hat{a}) and a link to this additional graphic is provided.

Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE:

It may be observed that the spectrum in some antenna port plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Supporting Information

Calculated Power = $A + 10 \log(1/x)$ dBm

A = Total Power Spectral Density [$10 \log_{10}(10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]

x = Duty Cycle

Limits Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 89 of 145

9.9.1. Modulation (DTS)

Equipment Configuration for Power Spectral Density - Peak

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | 1200 OFDM | Duty Cycle (%): | 99.00 |
| Data Rate: | 2400.00 Kbps | Antenna Gain (dBi): | 5.00 |
| Modulation: | DTS | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | CC |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured Power Spectral Density | | | | Amplitude Summation | Limit | Margin |
|----------------|---------------------------------|----|----|----|-----------------------|----------|--------|
| | Port(s) (dBm/3KHz) | | | | | | |
| MHz | a | b | c | d | dBm/3KHz | dBm/3KHz | dB |
| 2401.2 | 6.441 | -- | -- | -- | 6.441 | 8.0 | -1.6 |
| 2440.8 | 7.328 | -- | -- | -- | 7.328 | 8.0 | -0.7 |
| 2472.0 | 5.367 | -- | -- | -- | 5.367 | 8.0 | -2.6 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 90 of 145

A. APPENDIX - GRAPHICAL IMAGES

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 91 of 145

A.1. 20 dB & 99% Bandwidth

20 dB & 99% BANDWIDTH



Variant: 2FSK, Channel: 2400.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

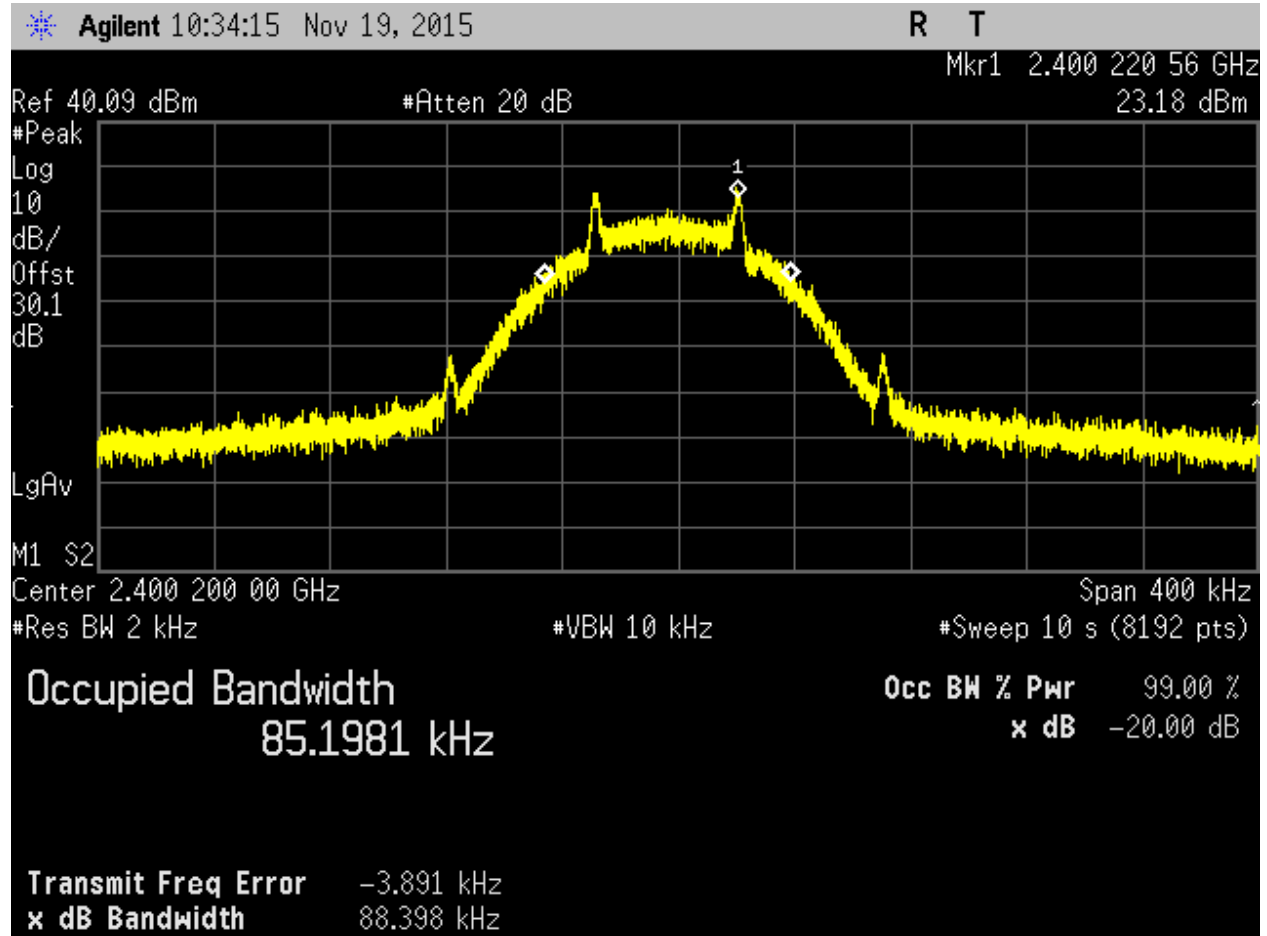

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|----------------------------|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | | Measured 20 dB Bandwidth: 0.085 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 92 of 145



20 dB & 99% BANDWIDTH

Variants: 2FSK, Channel: 2413.80 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

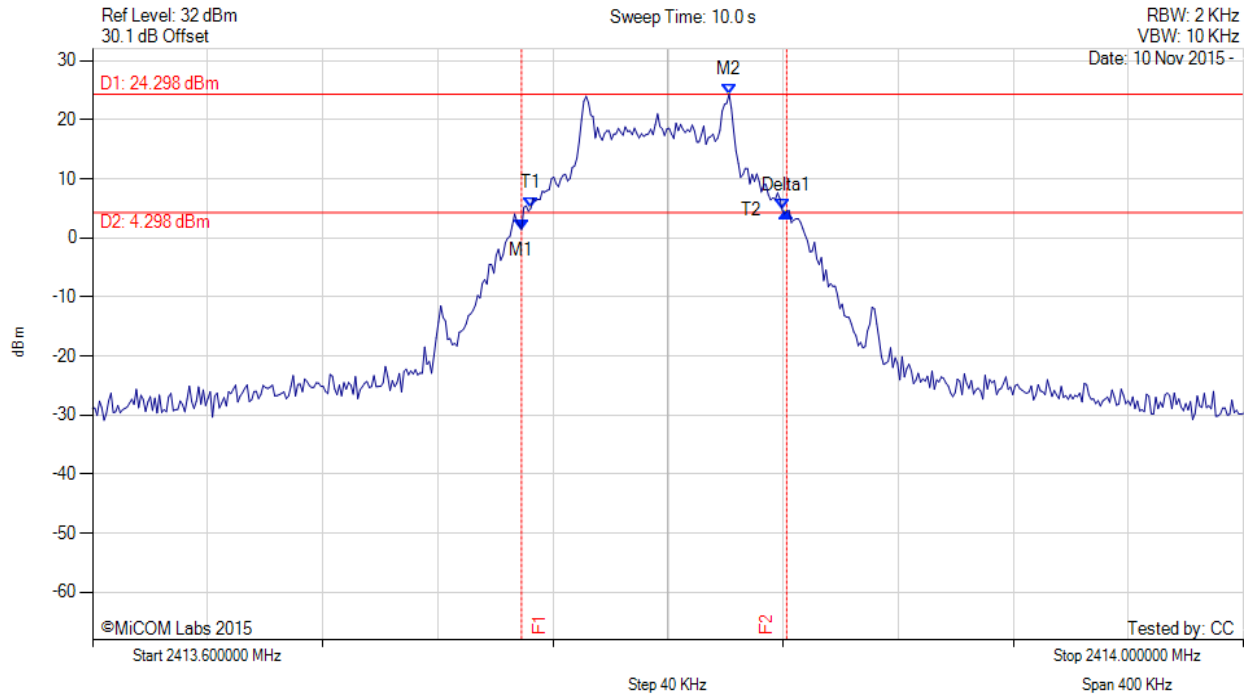

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 2413.749 MHz : 1.390 dBm M2 : 2413.821 MHz : 24.298 dBm Delta1 : 92 KHz : 3.069 dB T1 : 2413.752 MHz : 5.000 dBm T2 : 2413.840 MHz : 4.721 dBm OBW : 87 KHz | Measured 20 dB Bandwidth: 0.092 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



20 dB & 99% BANDWIDTH

Variant: 2FSK, Channel: 2427.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

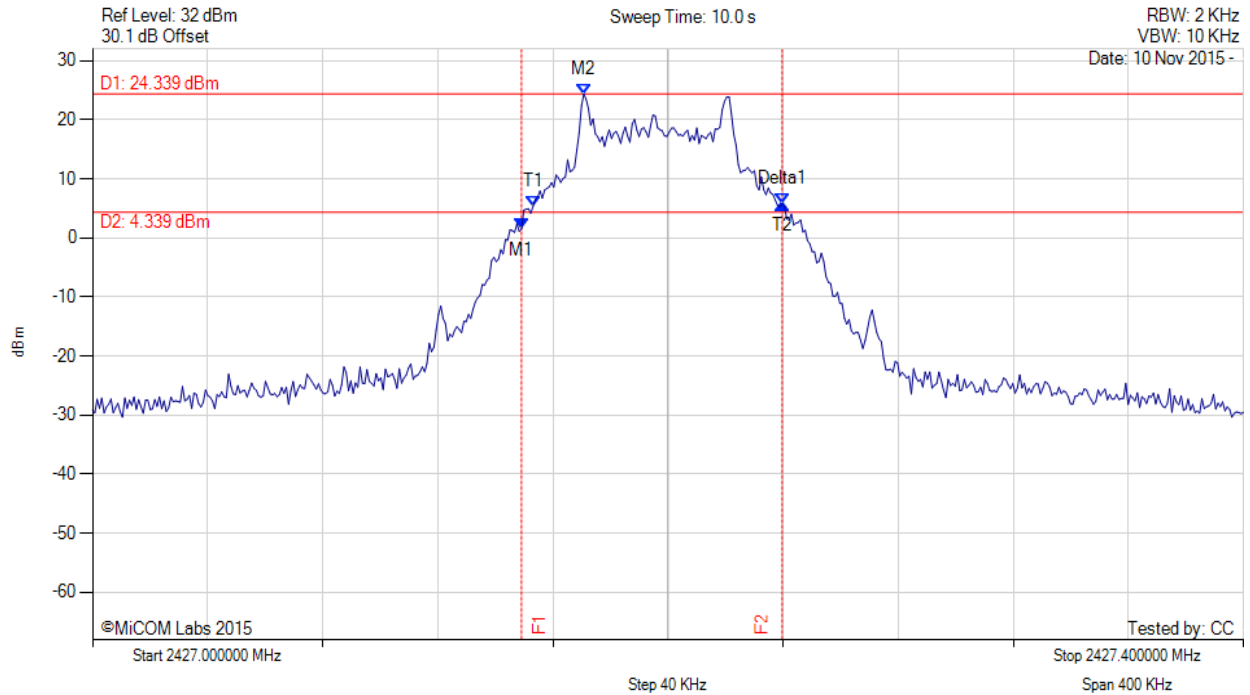

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 2427.149 MHz : 1.492 dBm M2 : 2427.171 MHz : 24.339 dBm Delta1 : 91 KHz : 4.283 dB T1 : 2427.153 MHz : 5.313 dBm T2 : 2427.240 MHz : 5.775 dBm OBW : 87 KHz | Measured 20 dB Bandwidth: 0.091 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 94 of 145

20 dB & 99% BANDWIDTH



Variant: 400 OFDM, Channel: 2400.40 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

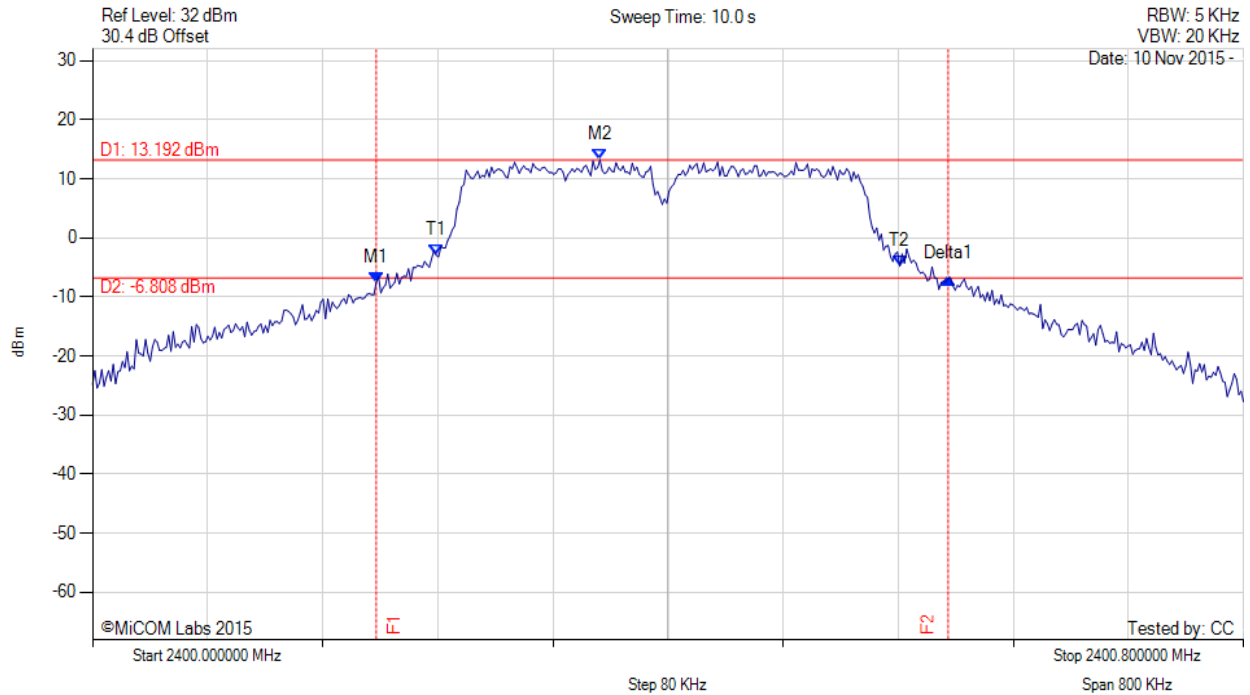

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 2400.197 MHz : -7.528 dBm M2 : 2400.353 MHz : 13.192 dBm Delta1 : 398 KHz : 0.671 dB T1 : 2400.239 MHz : -2.936 dBm T2 : 2400.561 MHz : -4.795 dBm OBW : 322 KHz | Measured 20 dB Bandwidth: 0.398 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



20 dB & 99% BANDWIDTH



Variant: 400 OFDM, Channel: 2440.00 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

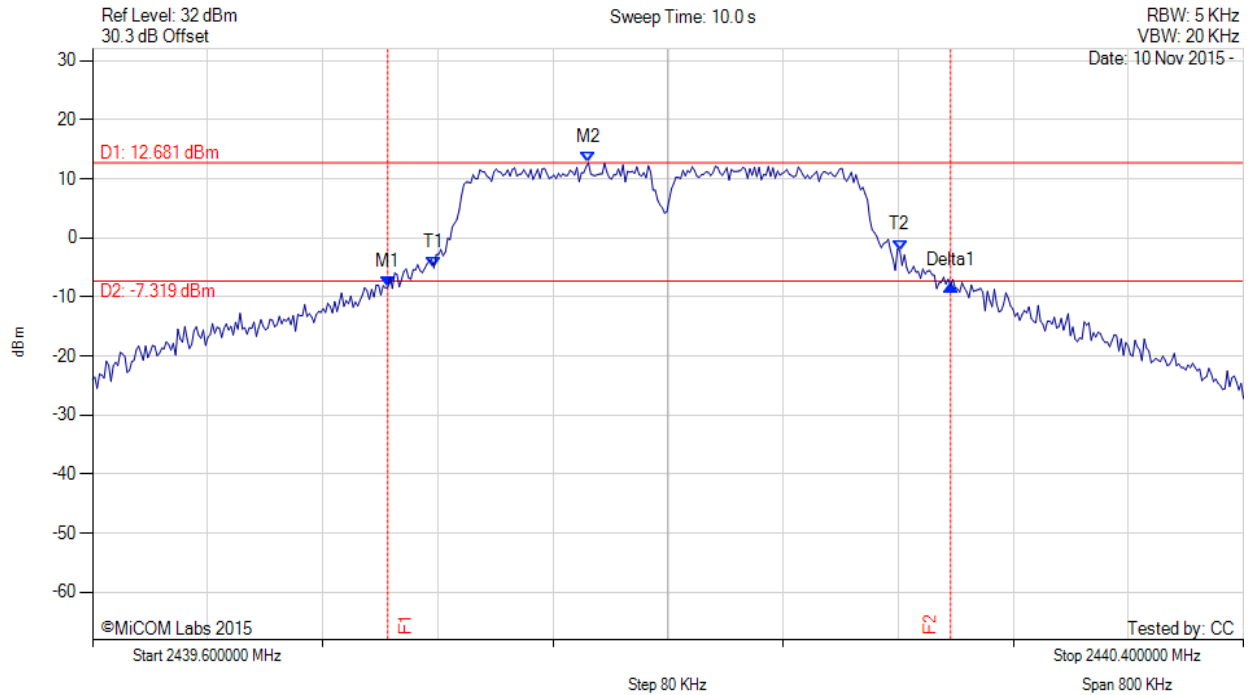

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 2439.805 MHz : -8.360 dBm M2 : 2439.945 MHz : 12.681 dBm Delta1 : 391 KHz : 0.311 dB T1 : 2439.837 MHz : -5.102 dBm T2 : 2440.161 MHz : -2.098 dBm OBW : 324 KHz | Measured 20 dB Bandwidth: 0.391 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



20 dB & 99% BANDWIDTH



Variant: 400 OFDM, Channel: 2454.40 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

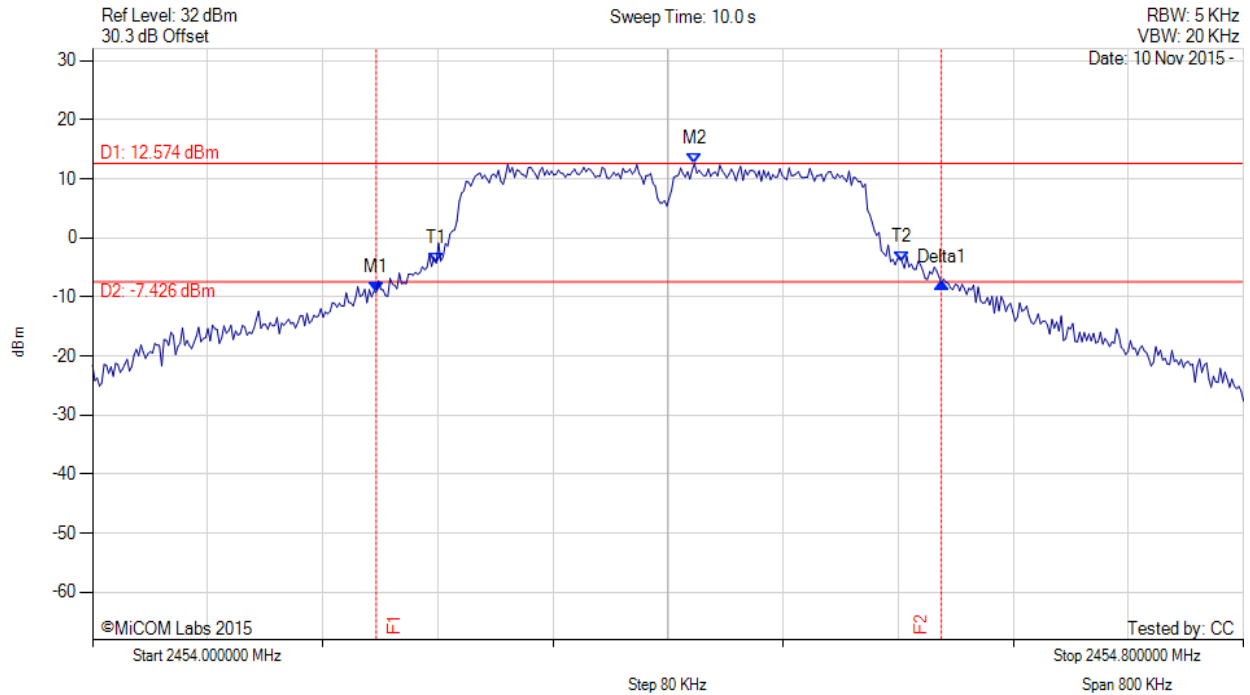

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 2454.197 MHz : -9.208 dBm M2 : 2454.418 MHz : 12.574 dBm Delta1 : 393 KHz : 1.550 dB T1 : 2454.239 MHz : -4.272 dBm T2 : 2454.563 MHz : -4.087 dBm OBW : 324 KHz | Measured 20 dB Bandwidth: 0.393 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 97 of 145

20 dB & 99% BANDWIDTH



Variant: OQPSK, Channel: 2400.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

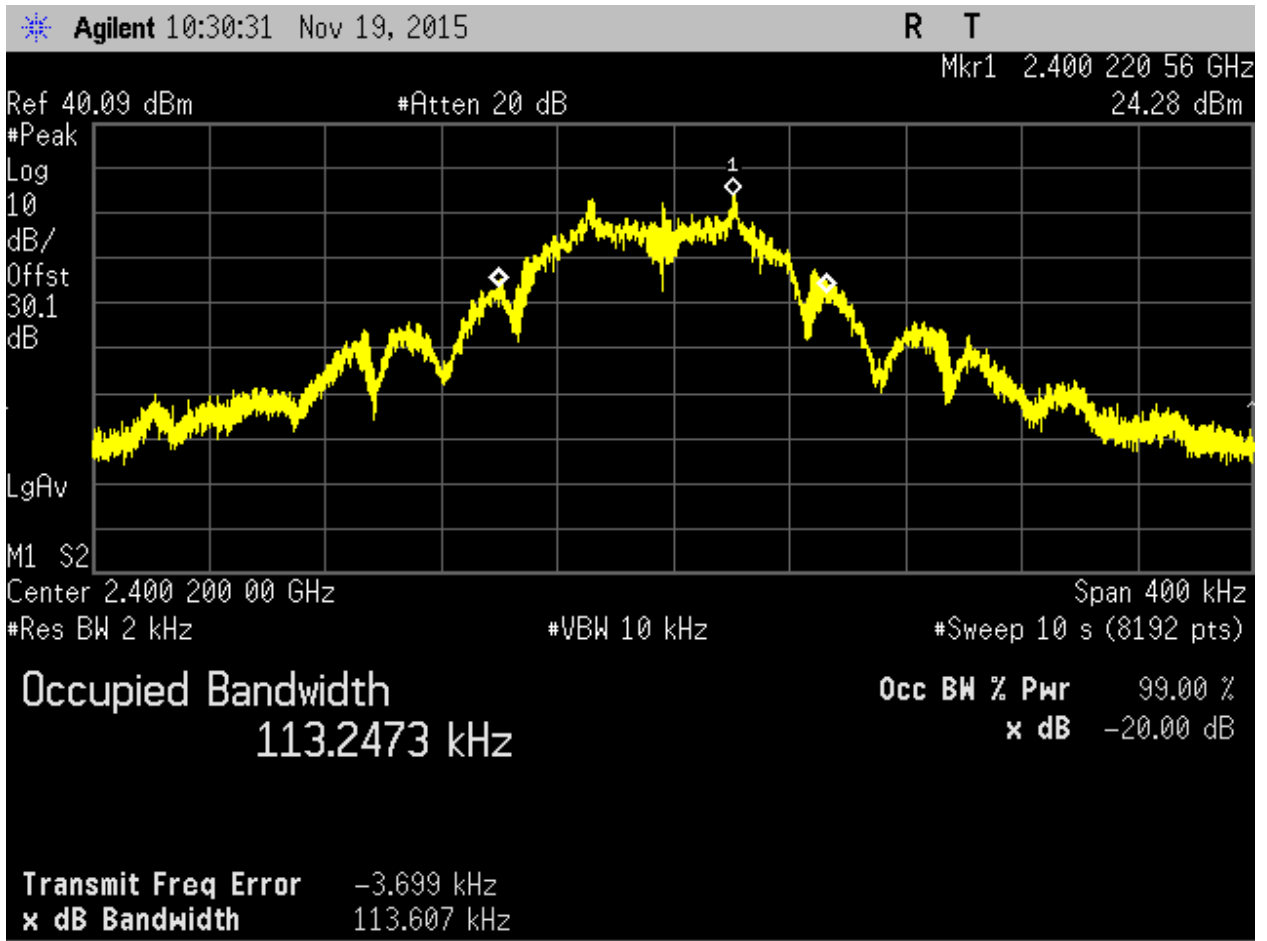

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|----------------------------|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | | Measured 20 dB Bandwidth: 0.113 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



20 dB & 99% BANDWIDTH

Variant: OQPSK, Channel: 2413.80 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

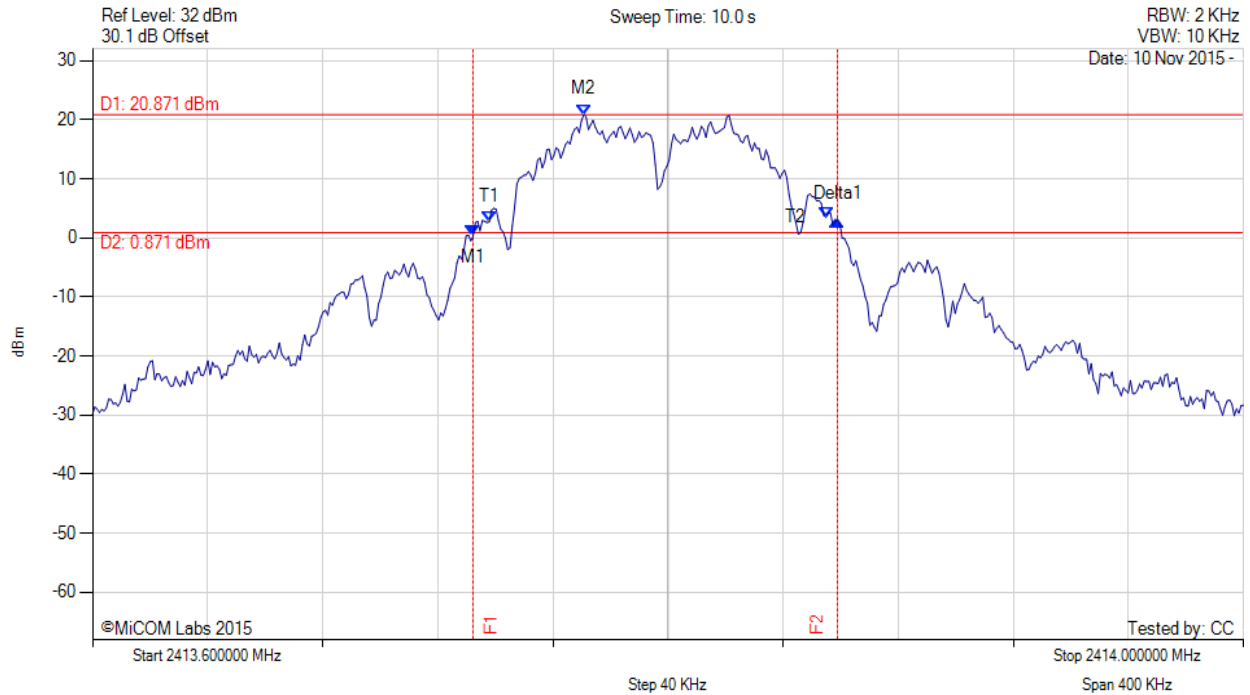

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 2413.732 MHz : 0.296 dBm M2 : 2413.771 MHz : 20.871 dBm Delta1 : 127 KHz : 2.762 dB T1 : 2413.738 MHz : 2.734 dBm T2 : 2413.855 MHz : 3.495 dBm OBW : 117 KHz | Measured 20 dB Bandwidth: 0.127 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 99 of 145



20 dB & 99% BANDWIDTH

Variant: OQPSK, Channel: 2427.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

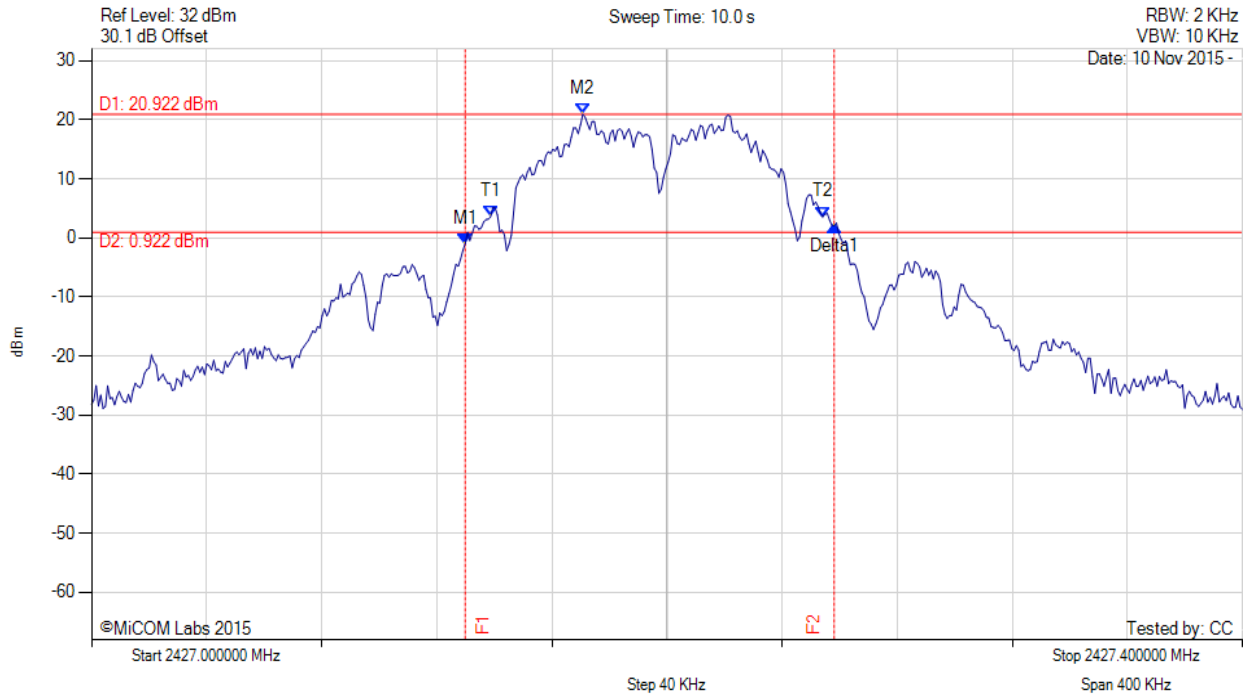

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 2427.130 MHz : -0.973 dBm M2 : 2427.171 MHz : 20.922 dBm Delta1 : 128 KHz : 3.047 dB T1 : 2427.139 MHz : 3.566 dBm T2 : 2427.254 MHz : 3.538 dBm OBW : 115 KHz | Measured 20 dB Bandwidth: 0.128 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.2. 6 dB & 99% Bandwidth



6 dB & 99% BANDWIDTH

Variant: 1200 OFDM, Channel: 2401.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

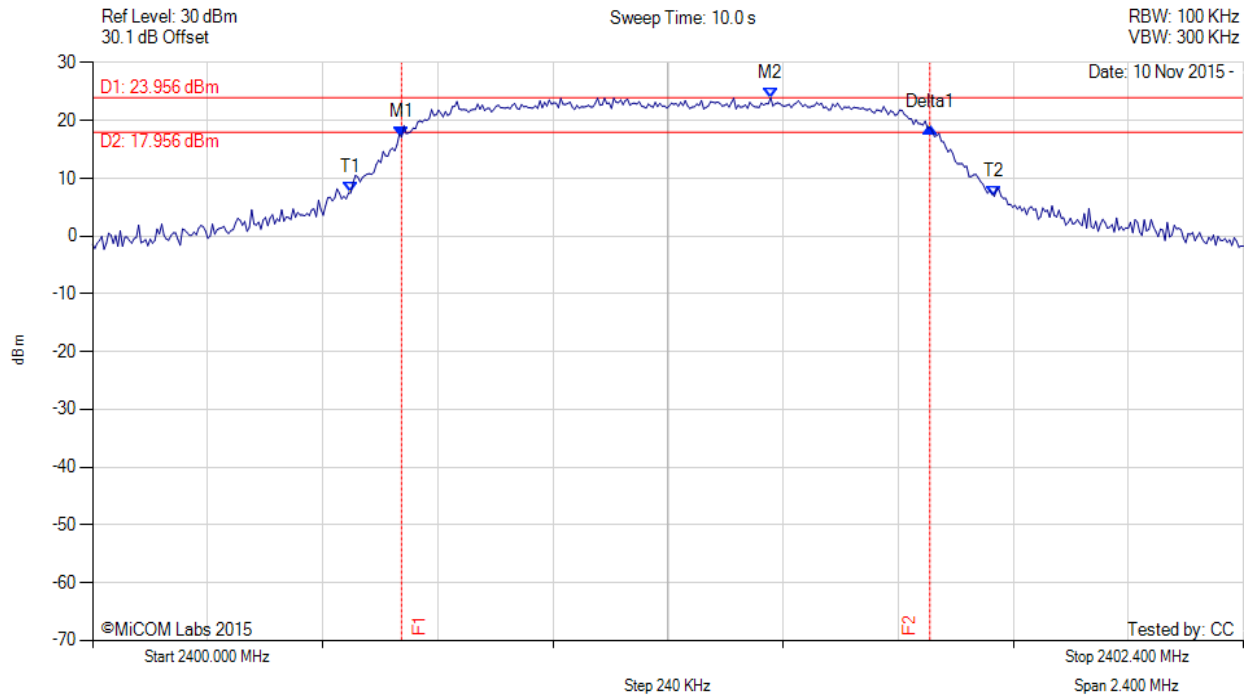

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 2400.644 MHz : 17.092 dBm M2 : 2401.414 MHz : 23.956 dBm Delta1 : 1.101 MHz : 1.714 dB T1 : 2400.539 MHz : 7.511 dBm T2 : 2401.881 MHz : 6.872 dBm OBW : 1.342 MHz | Measured 6 dB Bandwidth: 1.101 MHz Limit: ≥ 500.0 kHz Margin: -0.60 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 1200 OFDM, Channel: 2440.80 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

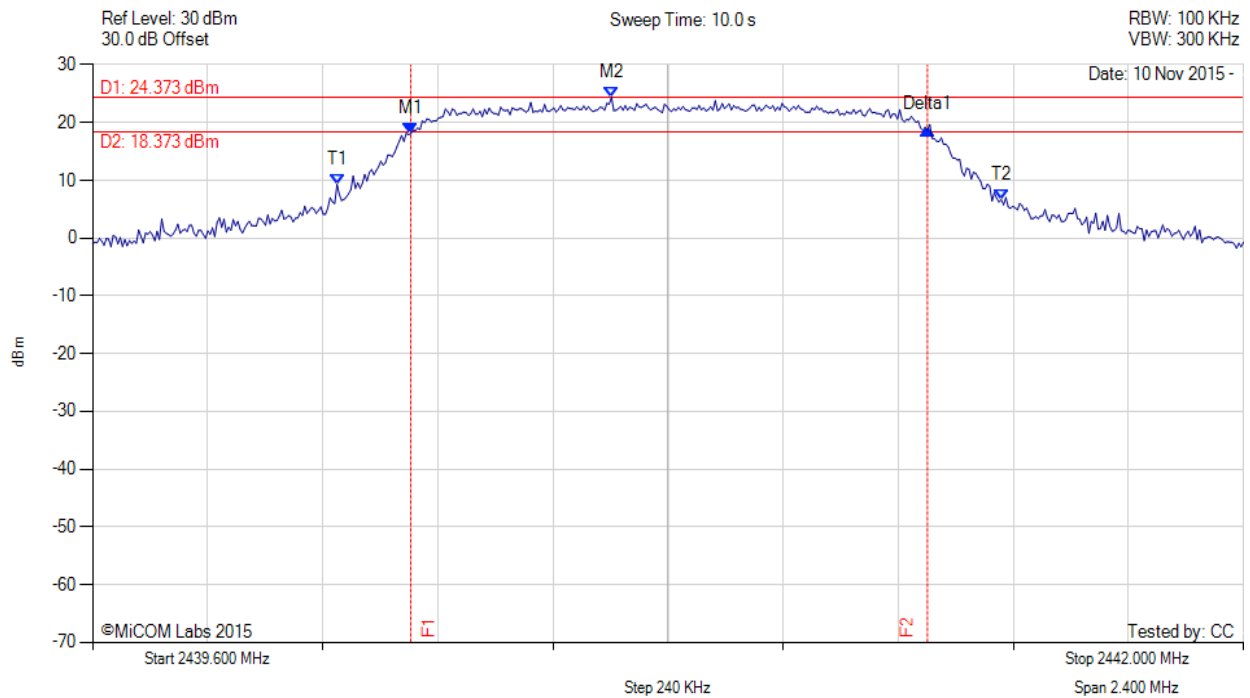

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 2440.264 MHz : 18.054 dBm M2 : 2440.682 MHz : 24.373 dBm Delta1 : 1.077 MHz : 0.696 dB T1 : 2440.110 MHz : 9.292 dBm T2 : 2441.495 MHz : 6.649 dBm OBW : 1.385 MHz | Measured 6 dB Bandwidth: 1.077 MHz Limit: ≥500.0 kHz Margin: -0.58 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH

Variant: 1200 OFDM, Channel: 2472.00 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

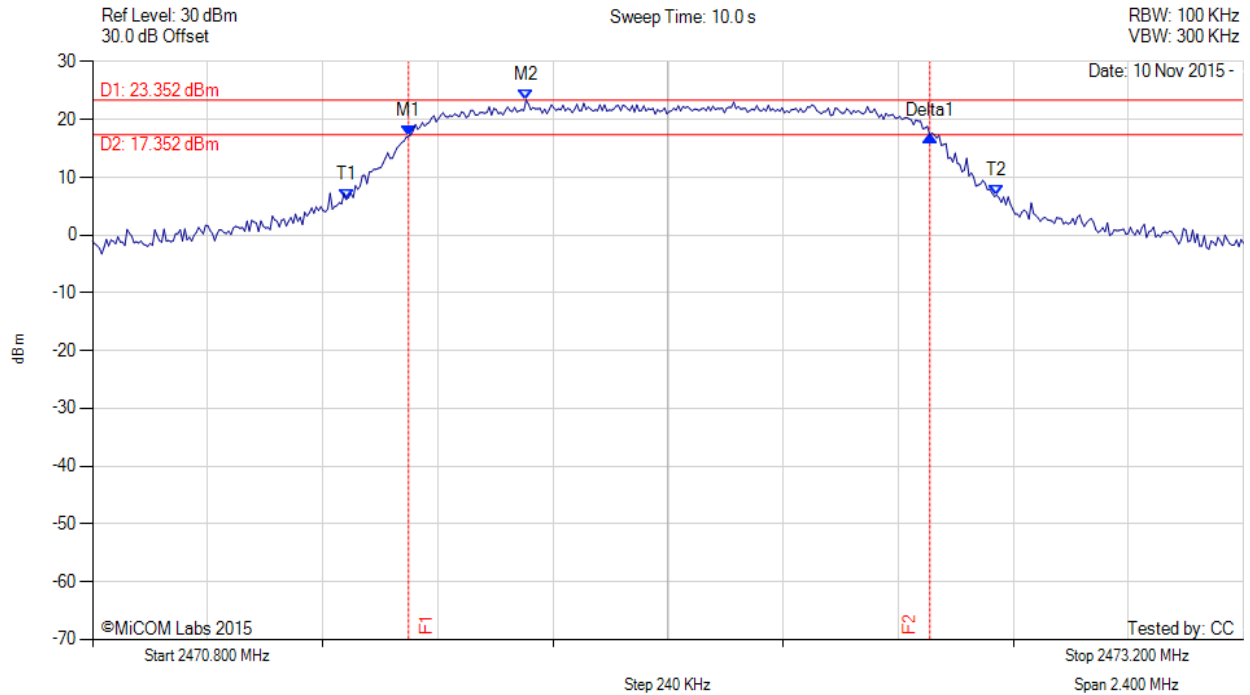

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 2471.459 MHz : 17.080 dBm M2 : 2471.704 MHz : 23.352 dBm Delta1 : 1.087 MHz : 0.171 dB T1 : 2471.329 MHz : 6.177 dBm T2 : 2472.685 MHz : 6.886 dBm OBW : 1.356 MHz | Measured 6 dB Bandwidth: 1.087 MHz Limit: ≥500.0 kHz Margin: -0.59 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 103 of 145

A.3. Number of Channels



Hopping 2400.00 – 2420.00

Variant: OQPSK, Channel: Hopping, Chain a, Temp: Ambient, Voltage: 4 Vdc

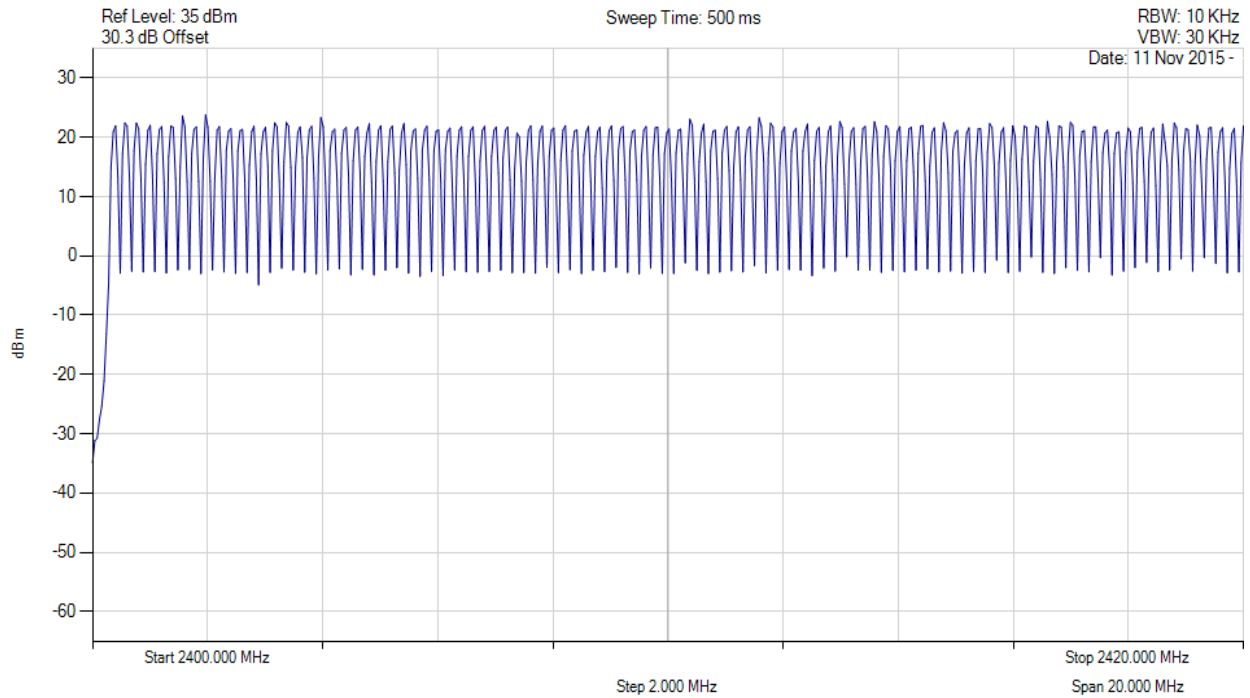

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|--|----------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEWS | | Channel Frequency: Hopping Number of Hops: 99 |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 104 of 145



Hopping 2420.00 – 2430.00

Variant: OQPSK, Channel: Hopping, Chain a, Temp: Ambient, Voltage: 4 Vdc

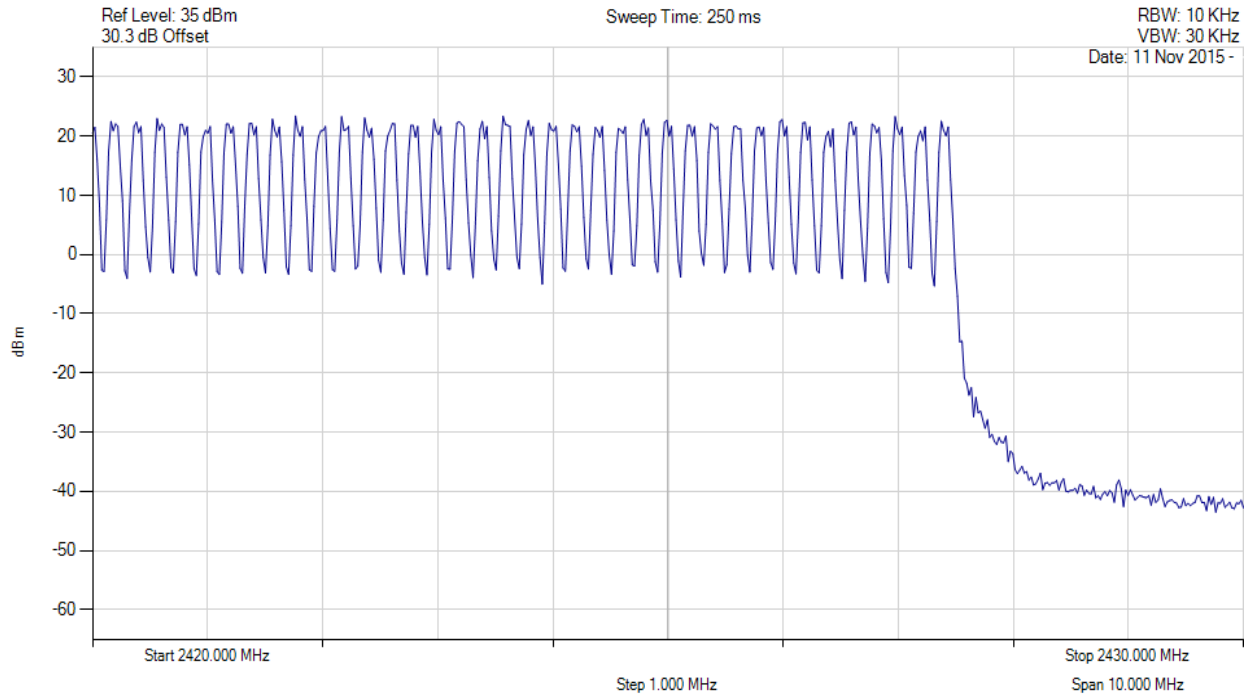

| Analyser Setup | Marker: Frequency: Amplitude | Test Results |
|---|------------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 40 Trace Mode = VIEW | | Channel Frequency: Hopping Number of Hops: 37 |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 105 of 145



Number of Hopping Channels

Variant: OQPSK, Channel: Hopping, Chain a, Temp: Ambient, Voltage: 4 Vdc

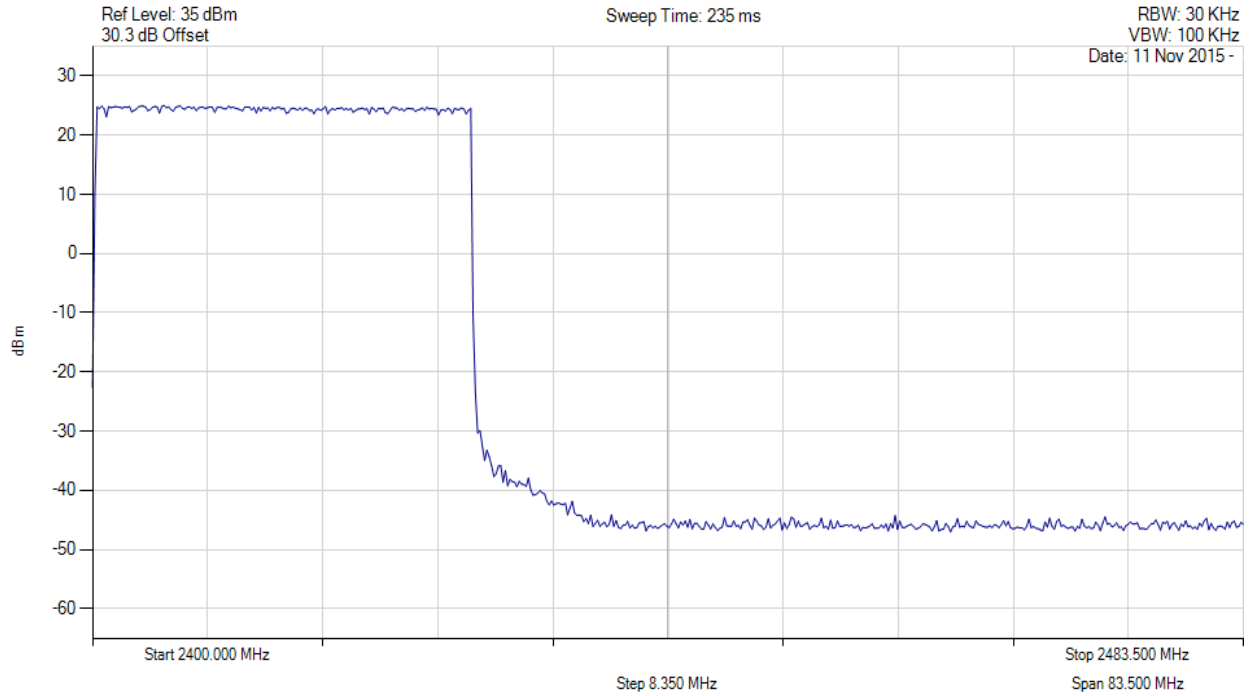

| Analyser Setup | Marker: Frequency: Amplitude | Test Results |
|---|------------------------------|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 40 Trace Mode = VIEW | | Channel Frequency: Hopping Number of Hops: 136 |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 106 of 145



Hopping 2400.00 – 2410.00 MHz

Variant: OFDM, Channel: Hopping, Chain a, Temp: Ambient, Voltage: 4 Vdc

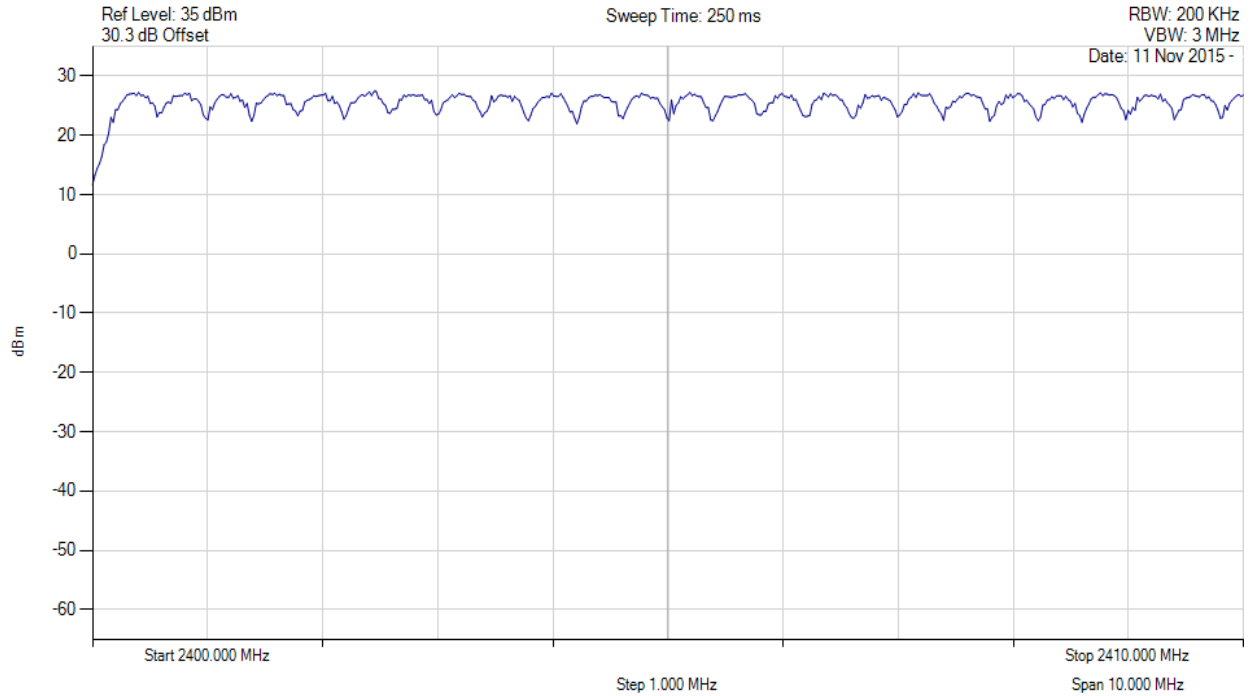

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|----------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | | Channel Frequency: Hopping Number of Hops: 25 |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 107 of 145



Hopping 2410.00 – 2420.00 MHz

Variant: OFDM, Channel: Hopping, Chain a, Temp: Ambient, Voltage: 4 Vdc

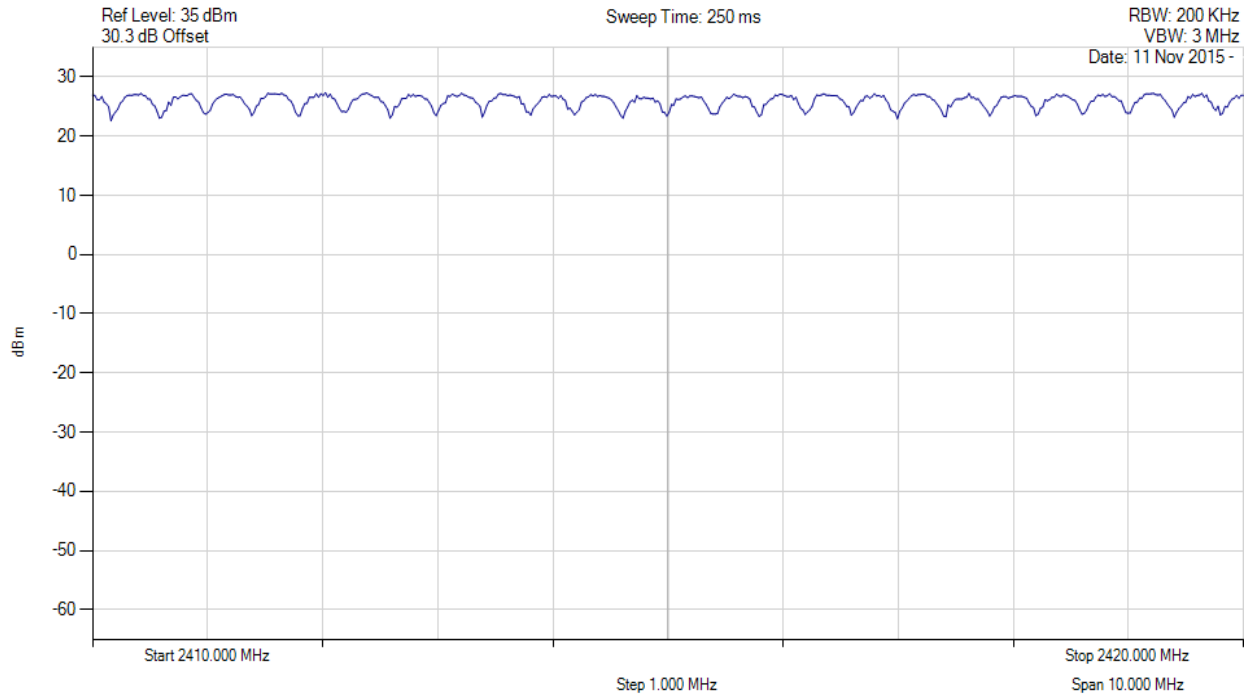

| Analyser Setup | Marker: Frequency: Amplitude | Test Results |
|---|------------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | | Channel Frequency: Hopping Number of Hops: 25 |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 108 of 145



Hopping 2420.00 - 2430.00 MHz

Variant: OFDM, Channel: Hopping, Chain a, Temp: ambient, Voltage: 4 Vdc

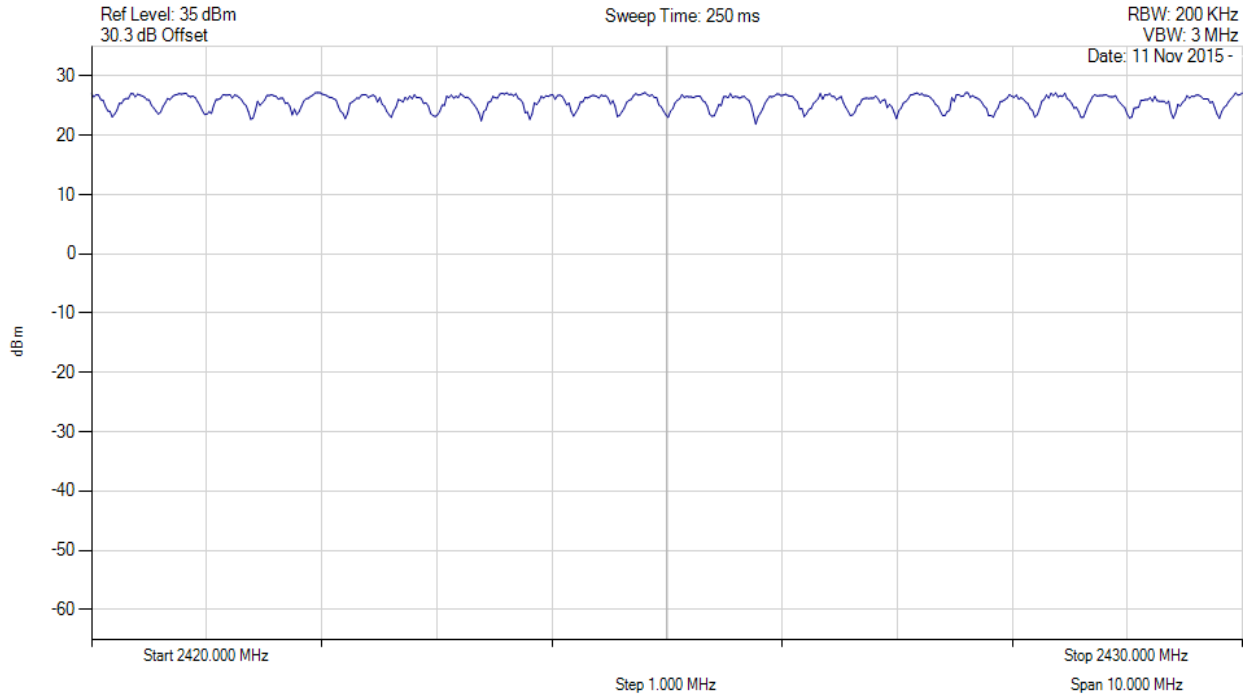

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|----------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | | Channel Frequency: Hopping Number of Hops: 25 |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 109 of 145



Hopping 2430.00 - 2440.00 MHz

Variant: OFDM, Channel: Hopping, Chain a, Temp: ambient, Voltage: 4 Vdc

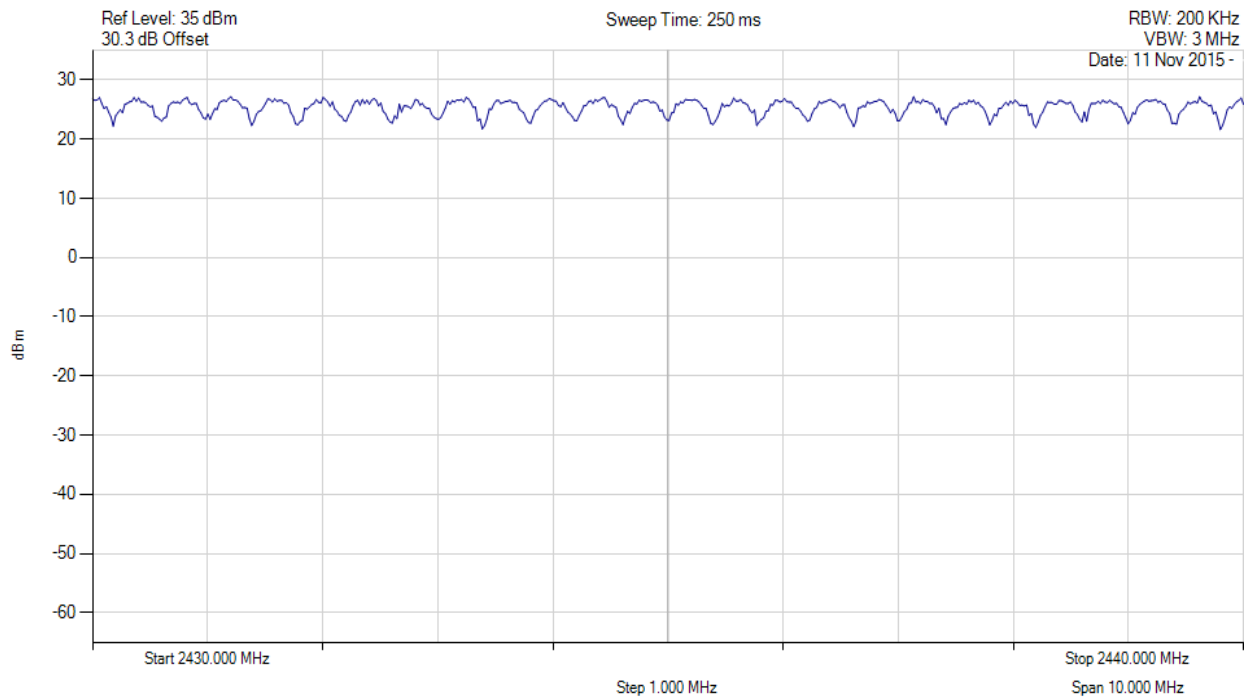

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|----------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | | Channel Frequency: Hopping Number of Hops: 25 |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 110 of 145



Hopping 2440.00 - 2450.00 MHz

Variant: OFDM, Channel: Hopping, Chain a, Temp: ambient, Voltage: 4 Vdc

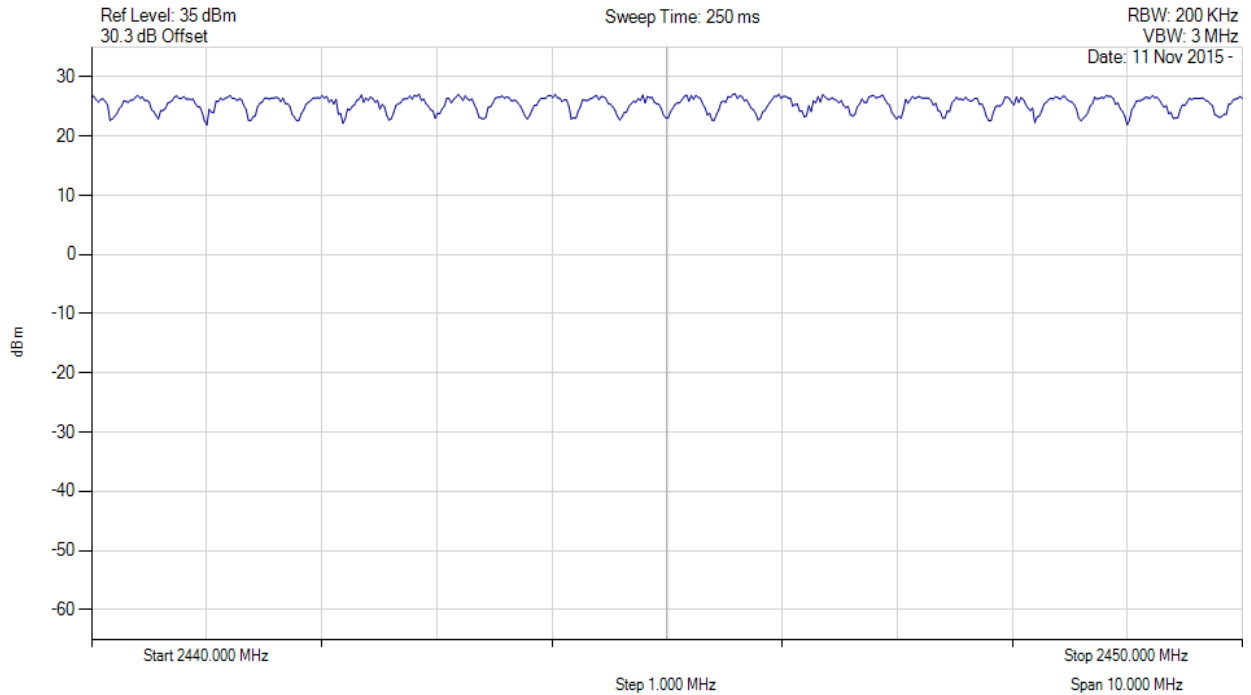

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|----------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | | Channel Frequency: Hopping Number of Hops: 25 |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 111 of 145



Hopping 2450.00 - 2460.00 MHz

Variant: OFDM, Channel: Hopping, Chain a, Temp: ambient, Voltage: 4 Vdc

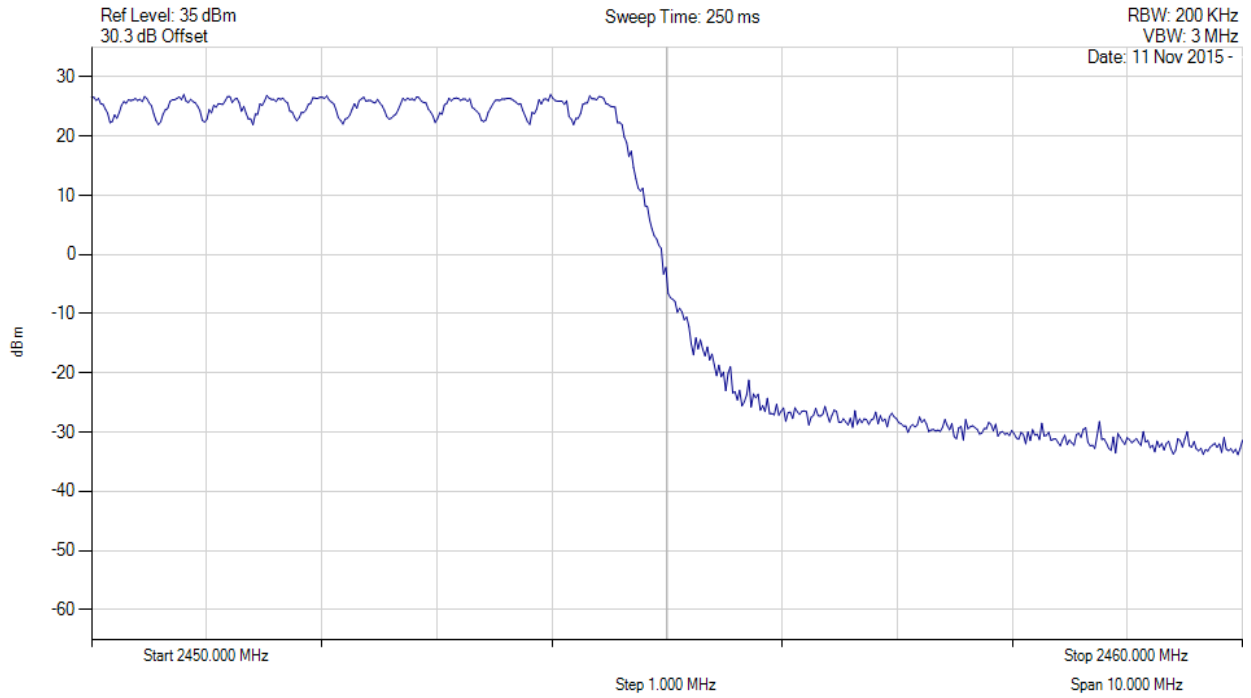

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|----------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | | Channel Frequency: Hopping Number of Hops: 11 |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Number of Hopping Channels

Variant: OFDM, Channel: Hopping, Chain a, Temp: Ambient, Voltage: 4 Vdc

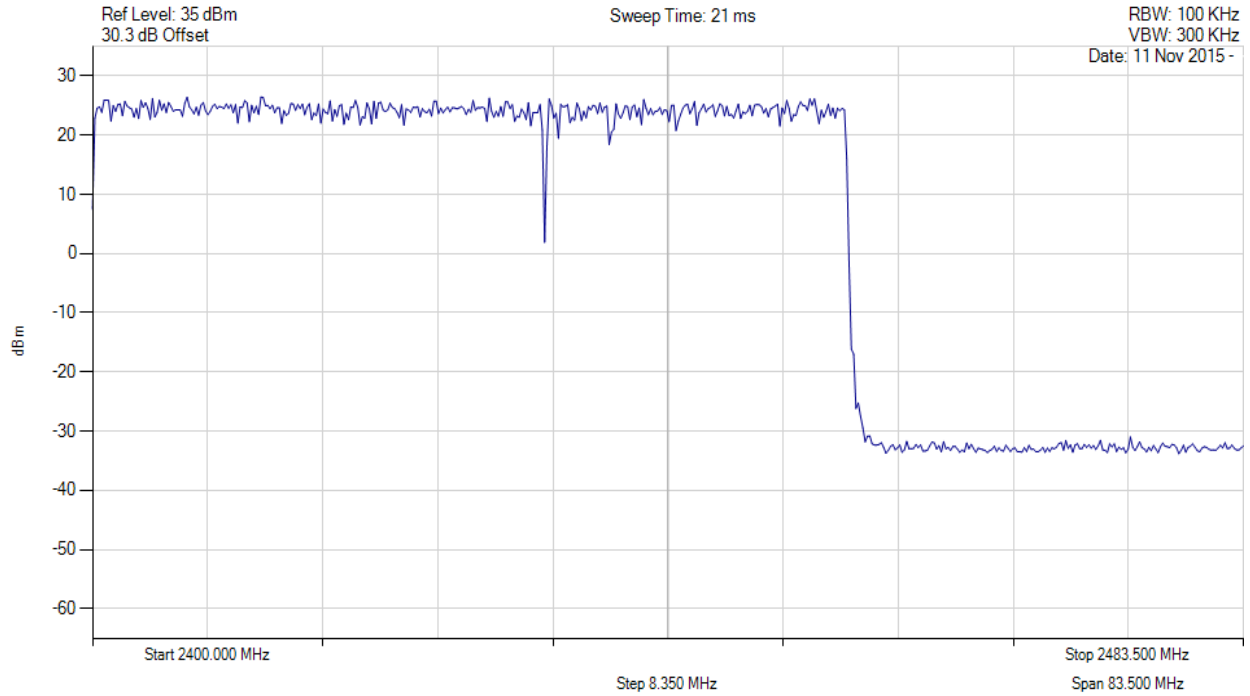


| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|----------------------------|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 40 Trace Mode = VIEW | | Channel Frequency: Hopping Number of Hops: 136 |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.4. Channel Spacing

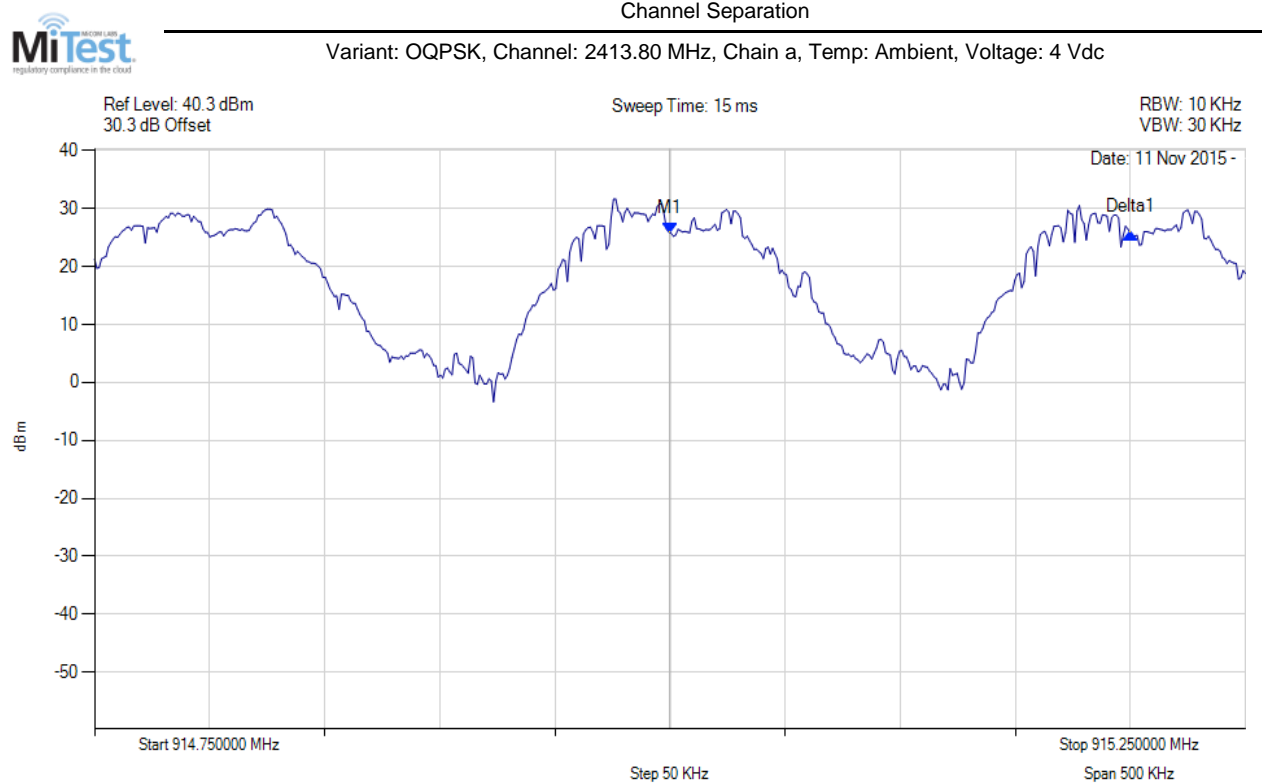

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2413.800 MHz : 18.053 dBm Delta1 : 200 KHz : 2.377 dB | Channel Frequency: 2413.80 MHz Channel Separation: 0.200 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 114 of 145

Channel Separation



Variat: OFDM, Channel:2440.00 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

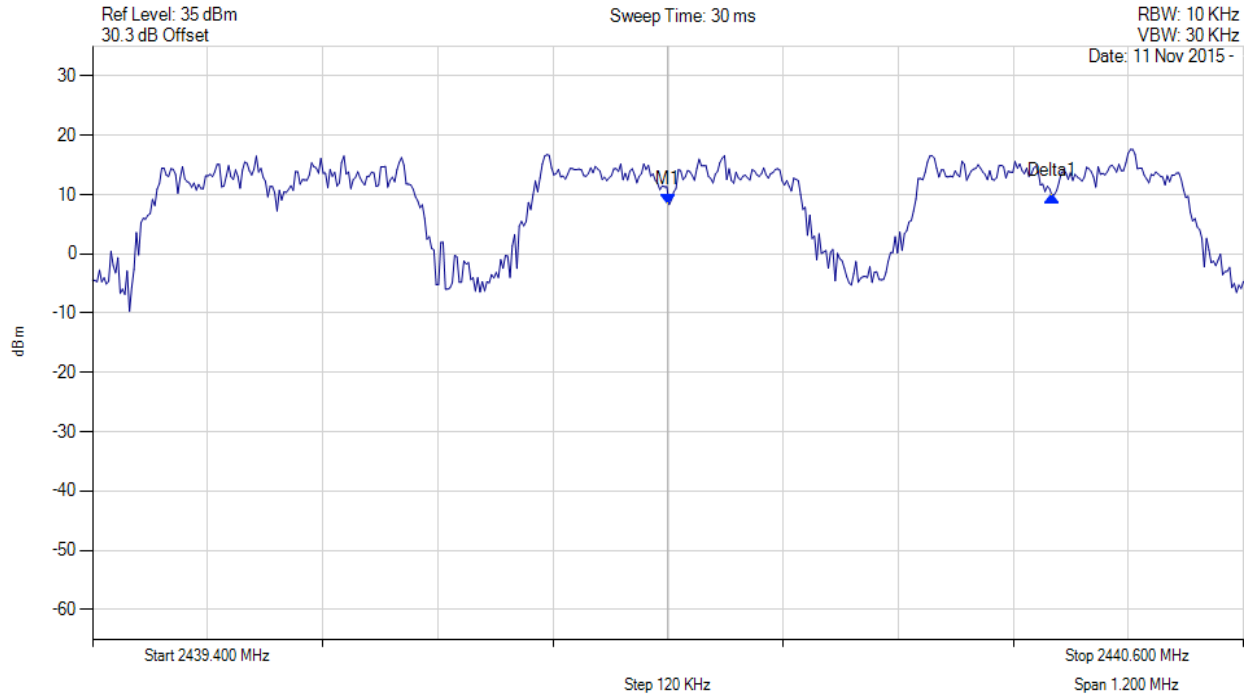

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2440.000 MHz : 8.323 dBm Delta1 : 400 KHz : 1.474 dB | Channel Frequency: 2440.00 MHz Channel Separation: 0.400 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.5. Dwell Time & Channel Occupancy



Dwell Time

Variant: OQPSK, , Channel: 2413.80 MHz, Chain a, Temp: ambient, Voltage: 4 Vdc

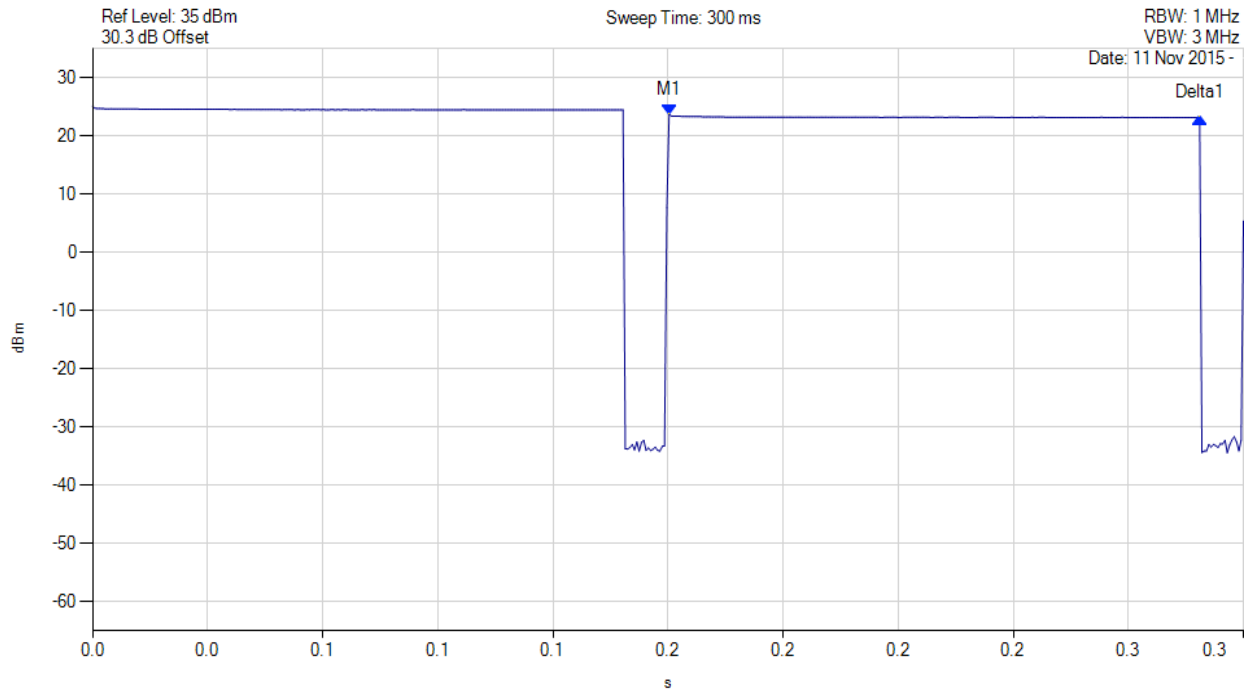

| Analyser Setup | Marker:Time:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1(2413.80 MHz) : 0.150 s : 23.648 dBm Delta1(2413.80 MHz) : 0.138 s : -0.576 dB | Channel Frequency: 2413.80 MHz Dwell Time: 0.138 s |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 116 of 145



Dwell Time

Variants: OFDM, Channel: 2440.00 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

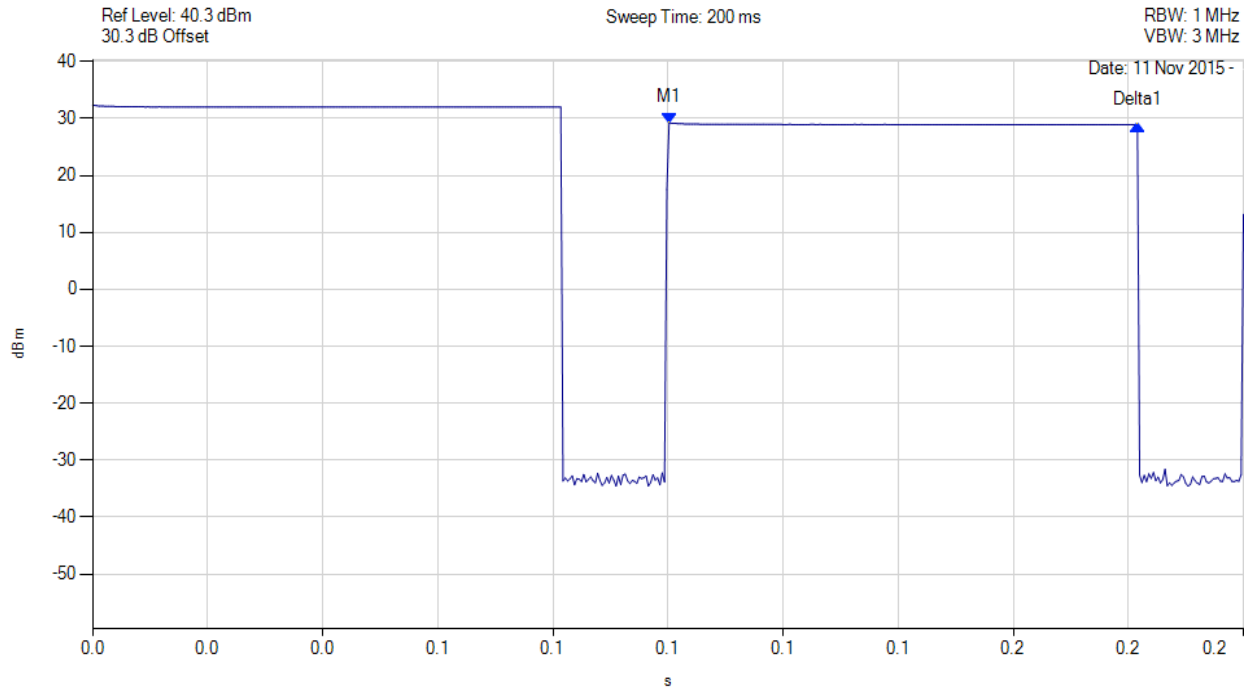

| Analyser Setup | Marker:Time:Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1(2440.00 MHz) : 0.060 s : 26.489 dBm Delta1(2440.00 MHz) : 0.015 s : 0.069 dB | Channel Frequency: 2440.00 MHz Dwell Time: 0.015 s |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Channel Occupancy



Variant: OQPSK, , Channel: 915.00 MHz, Chain a, Temp: ambient, Voltage: 4 Vdc

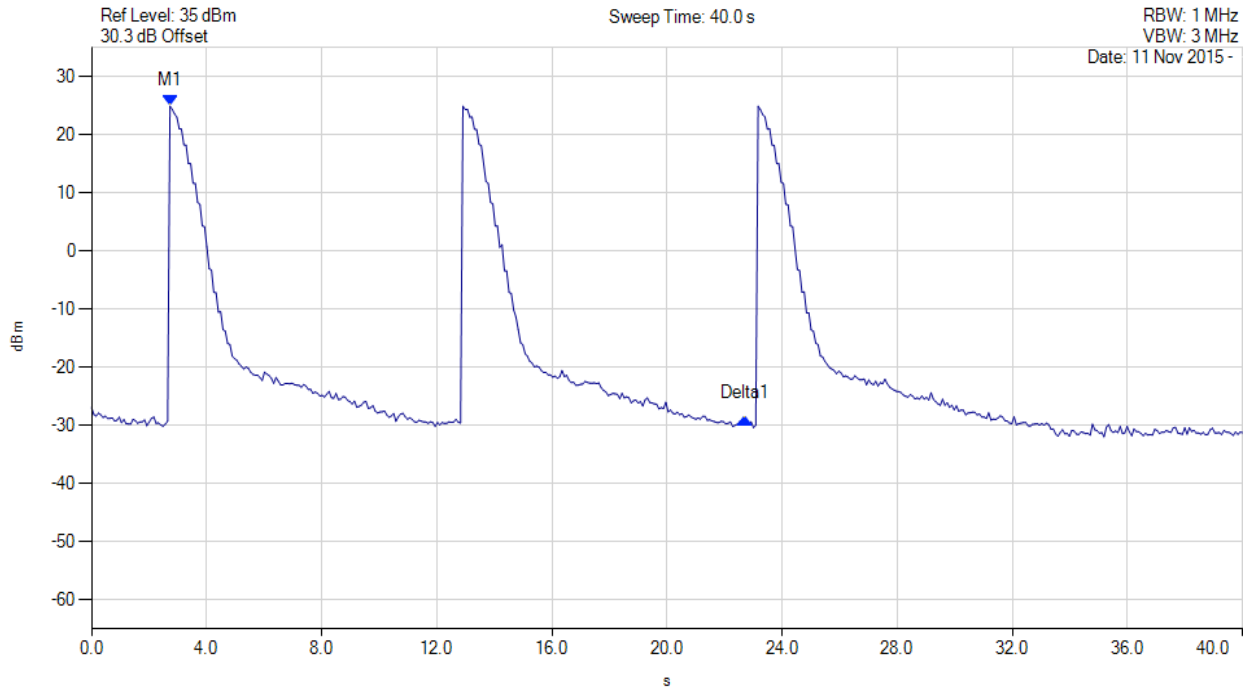

| Analyser Setup | Marker:Time:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1(2413.80 MHz) : 2.725 s : 24.904 dBm Delta1(2413.80 MHz) : 20.000 s : -53.742 dB | Channel Frequency: 2413.80 MHz Dwell Time: 138 ms Occupancy: 276 ms Limit: 400ms/20s |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Channel Occupancy



Variant: OFDM, Channel: 2440.00 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

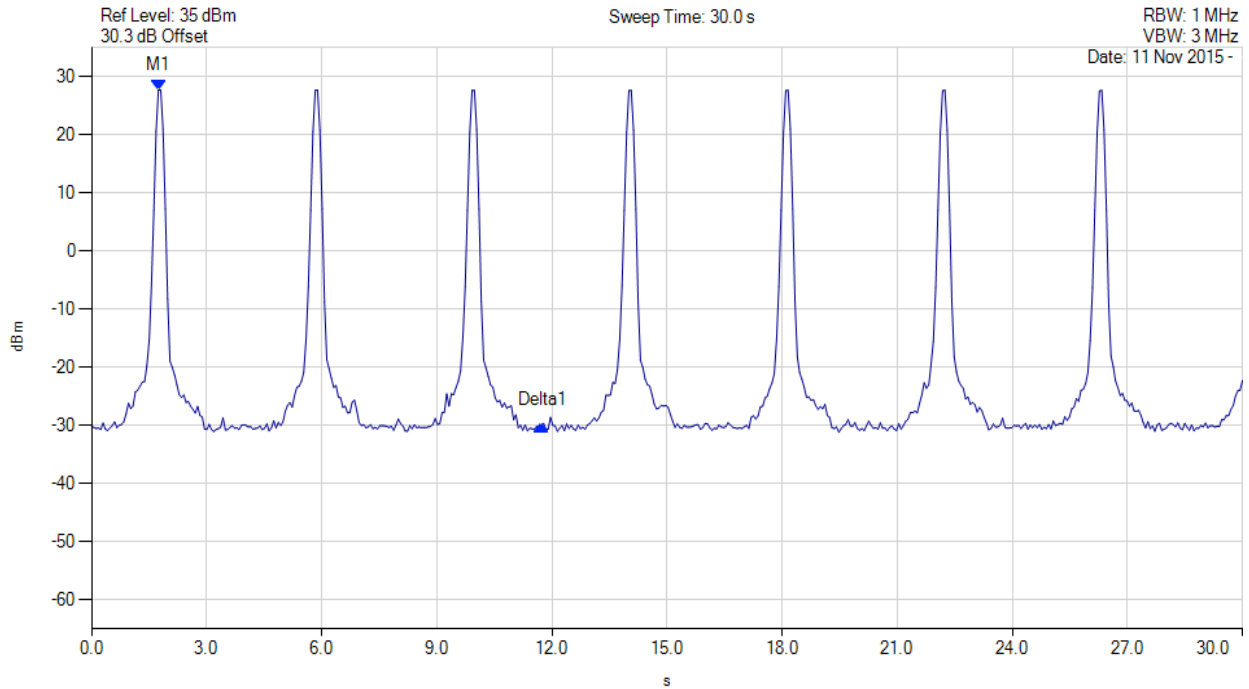

| Analyser Setup | Marker:Time:Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1(2440.00 MHz) : 1.743 s : 27.656 dBm Delta1(2440.00 MHz) : 10.000 s : -57.665 dB | Channel Frequency: 2440.00 MHz Dwell Time: 15.00 ms Occupancy: 45.00 ms Limit: 400ms/10s |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.6. Emissions

A.6.1. Conducted Emissions

A.6.1.1. Conducted Spurious Emissions

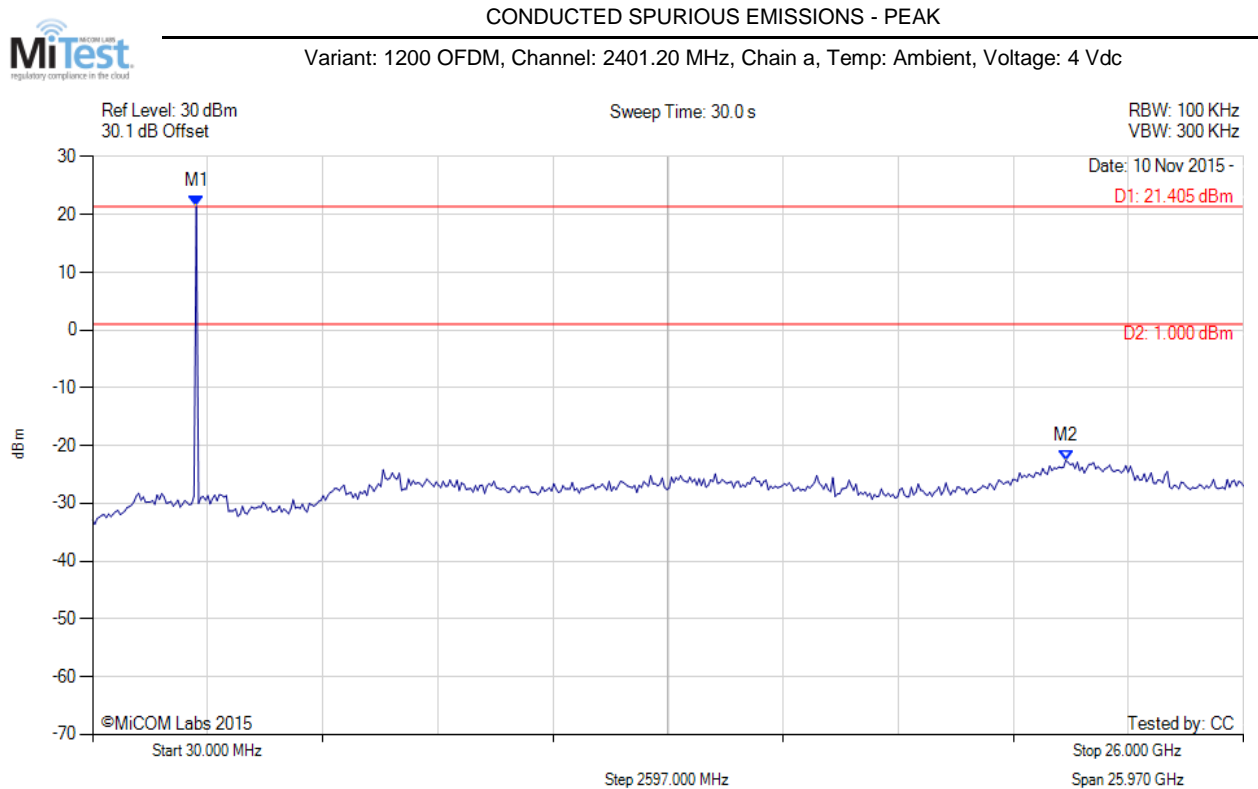

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2371.984 MHz : 21.405 dBm M2 : 21.993 GHz : -22.521 dBm | Limit: 1.00 dBm Margin: -23.52 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 120 of 145

CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: 1200 OFDM, Channel: 2440.80 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

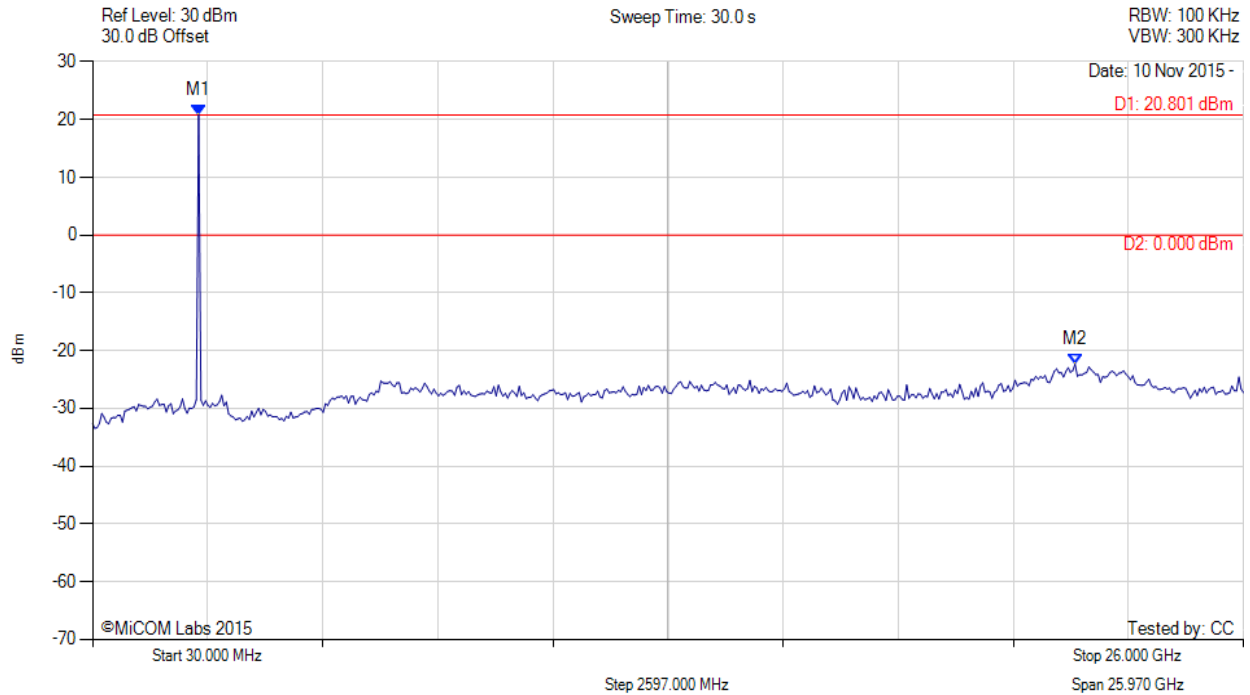

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2424.028 MHz : 20.801 dBm M2 : 22.201 GHz : -22.324 dBm | Limit: 0.00 dBm Margin: -22.32 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 121 of 145

CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: 1200 OFDM, Channel: 2472.00 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

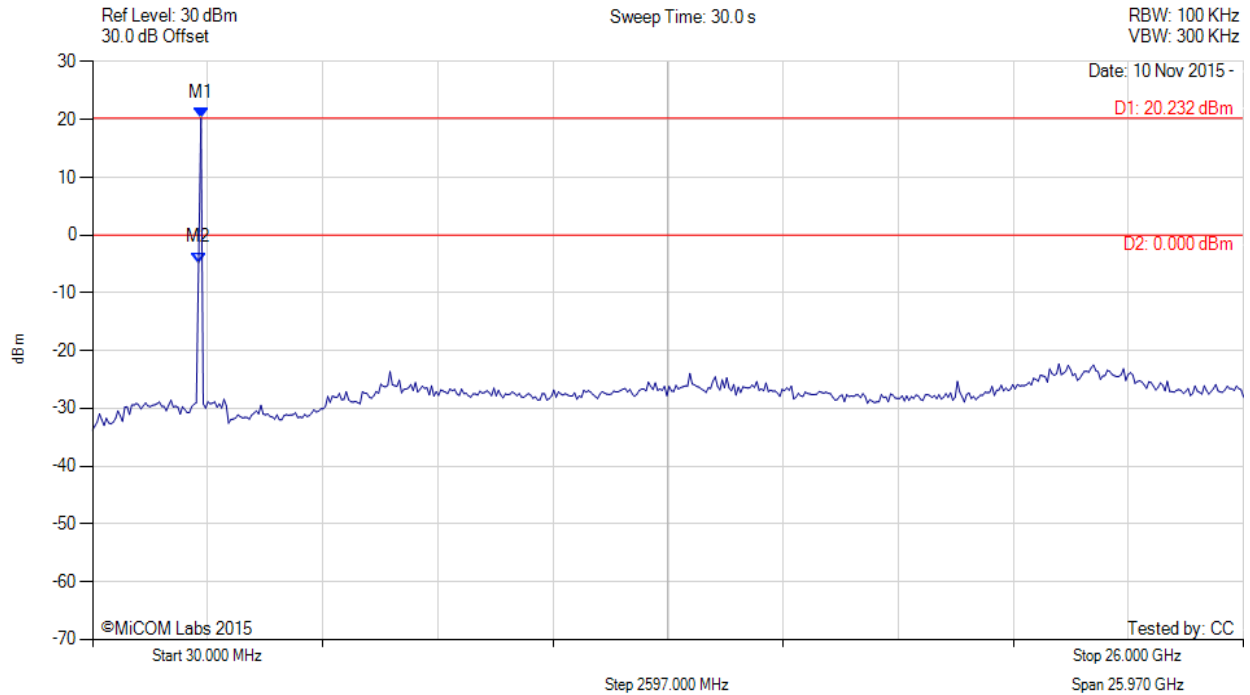

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2476.072 MHz : 20.232 dBm M2 : 2424.028 MHz : -4.771 dBm | Limit: 0.00 dBm Margin: -4.77 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 122 of 145



CONDUCTED SPURIOUS EMISSIONS - PEAK

Variant: 2FSK, Channel: 2400.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

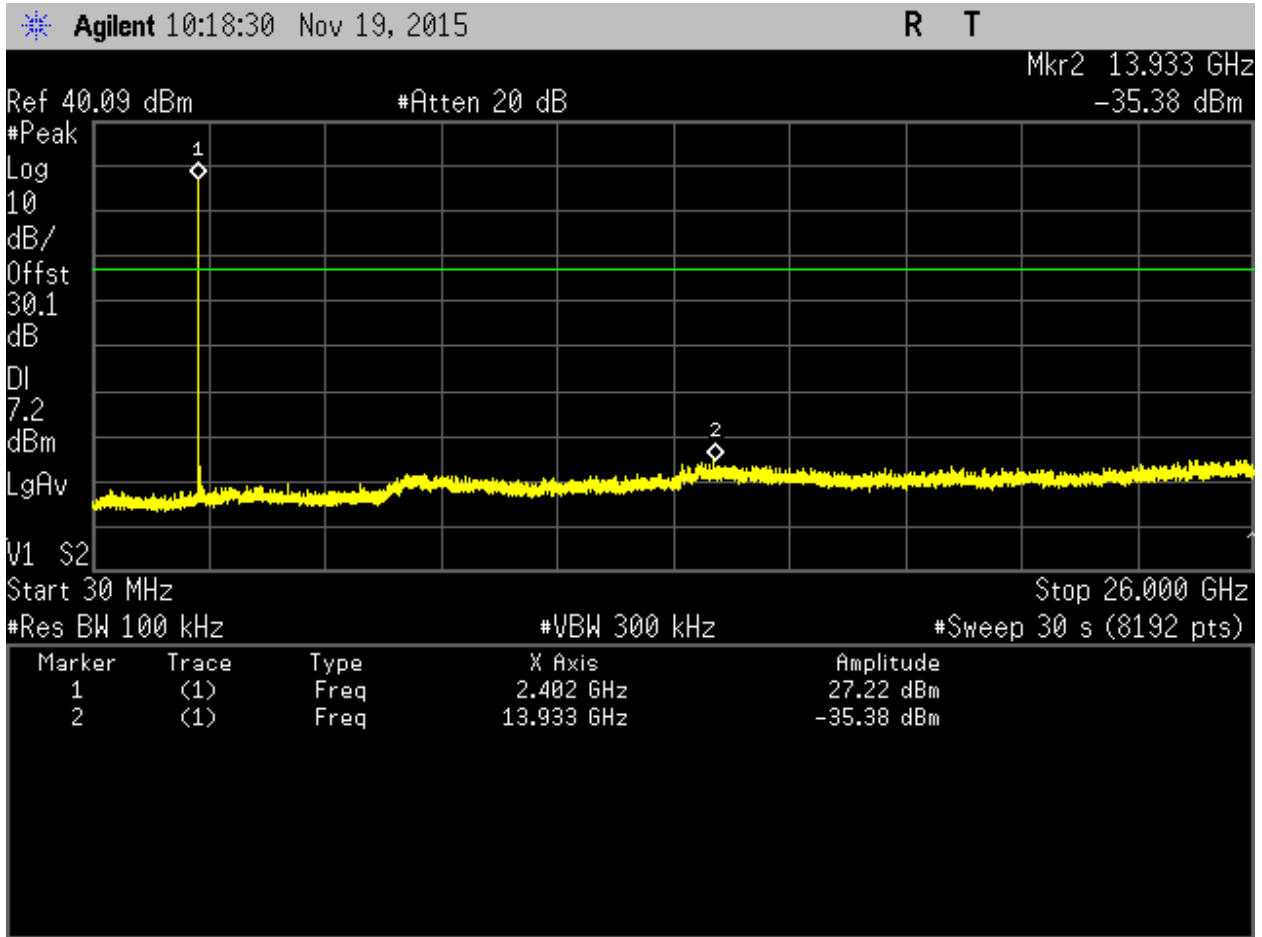

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2402.00 MHz : 27.220 dBm M2 : 13.933 GHz : -35.380 dBm | Limit: 7.22 dBm Margin: -42.60 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 123 of 145

CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: 2FSK, Channel: 2413.80 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

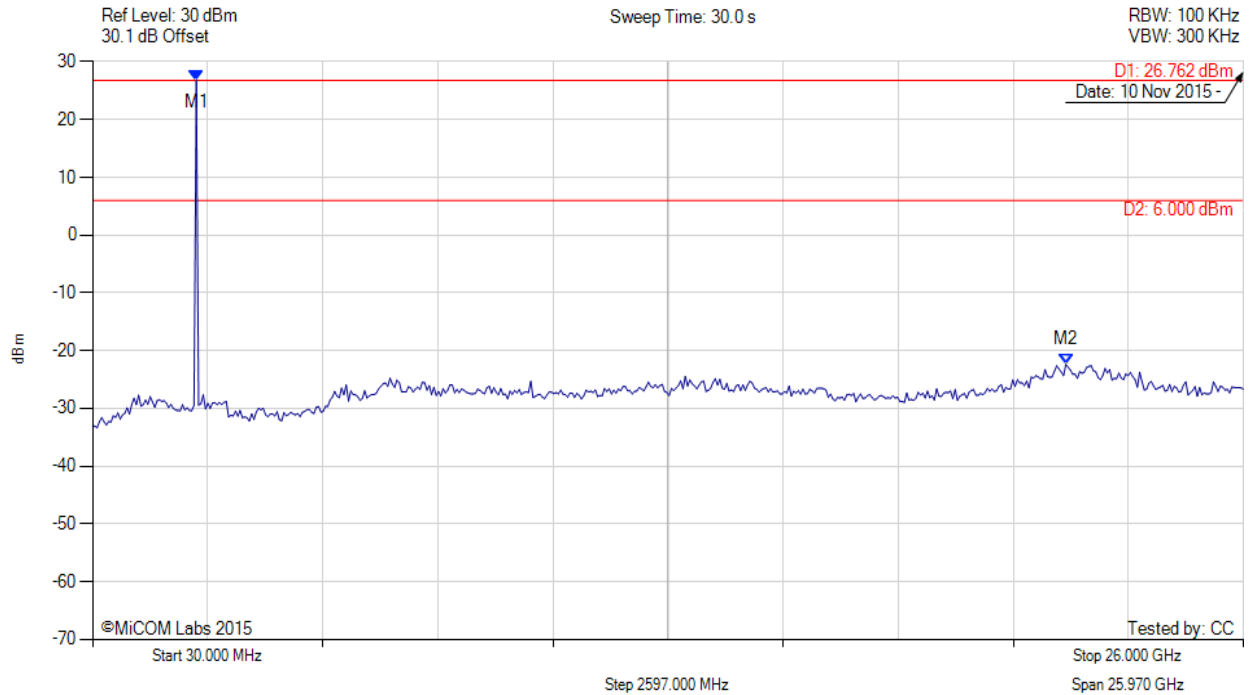

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2371.984 MHz : 26.762 dBm M2 : 21.993 GHz : -22.377 dBm | Limit: 6.00 dBm Margin: -28.38 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 124 of 145

CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: 2FSK, Channel: 2427.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

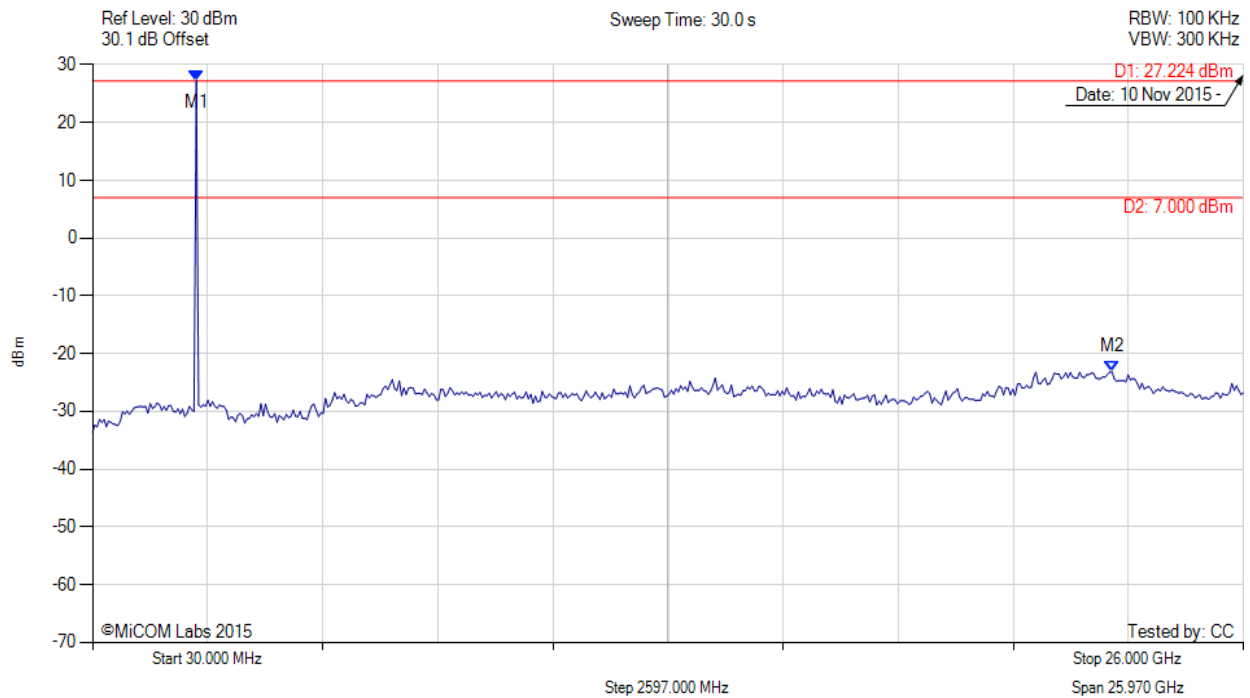

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2371.984 MHz : 27.224 dBm M2 : 23.033 GHz : -23.160 dBm | Limit: 7.00 dBm Margin: -30.16 dB |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: 400 OFDM, Channel: 2400.40 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

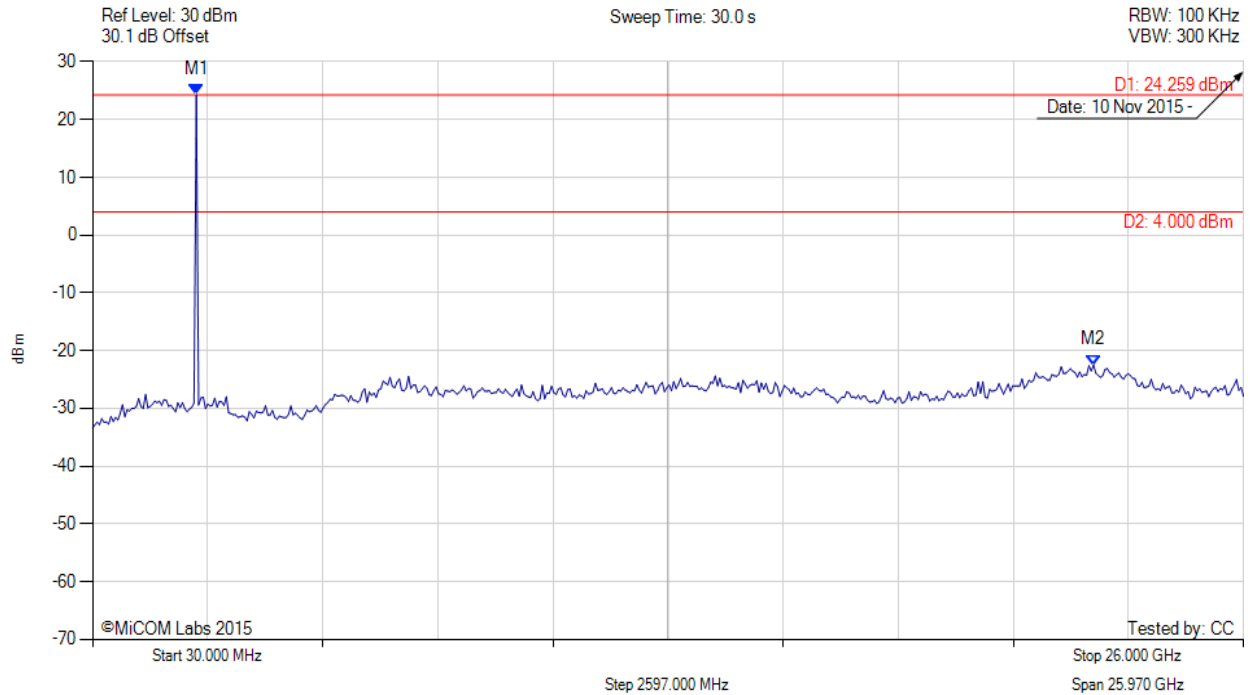

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2371.984 MHz : 24.259 dBm M2 : 22.617 GHz : -22.509 dBm | Limit: 4.00 dBm Margin: -26.51 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 126 of 145

CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: 400 OFDM, Channel: 2440.00 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

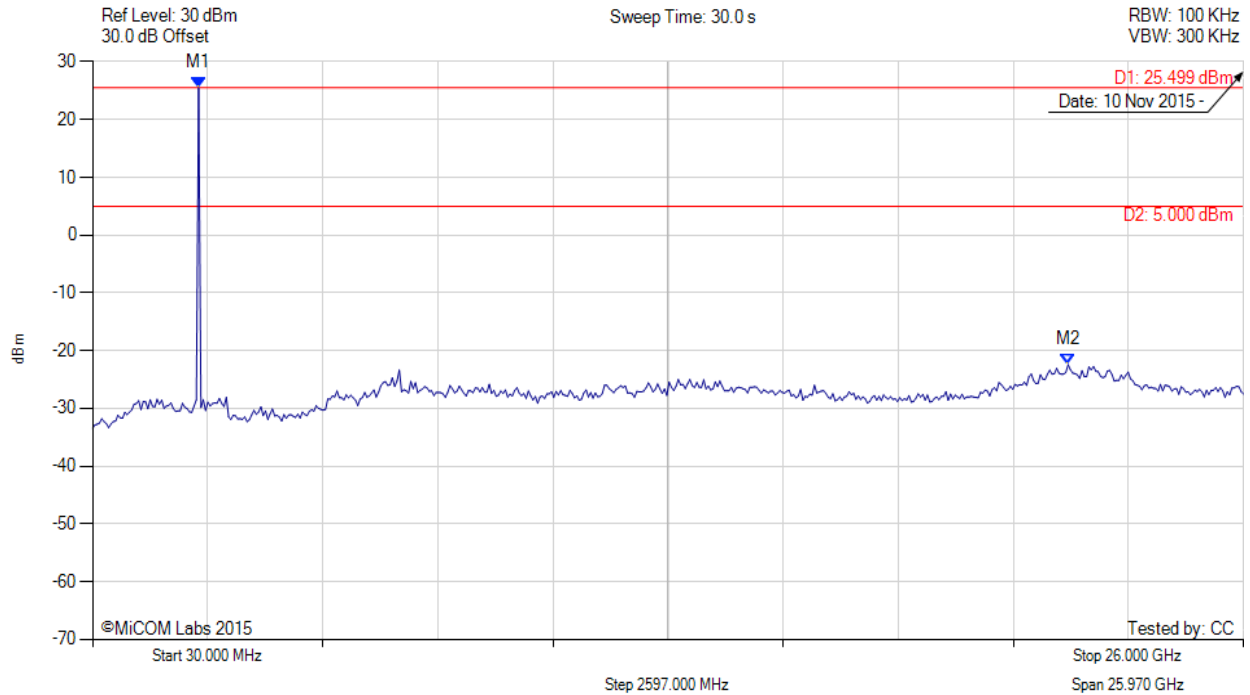

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2424.028 MHz : 25.499 dBm M2 : 22.045 GHz : -22.426 dBm | Limit: 5.00 dBm Margin: -27.43 dB |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: 400 OFDM, Channel: 2454.40 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

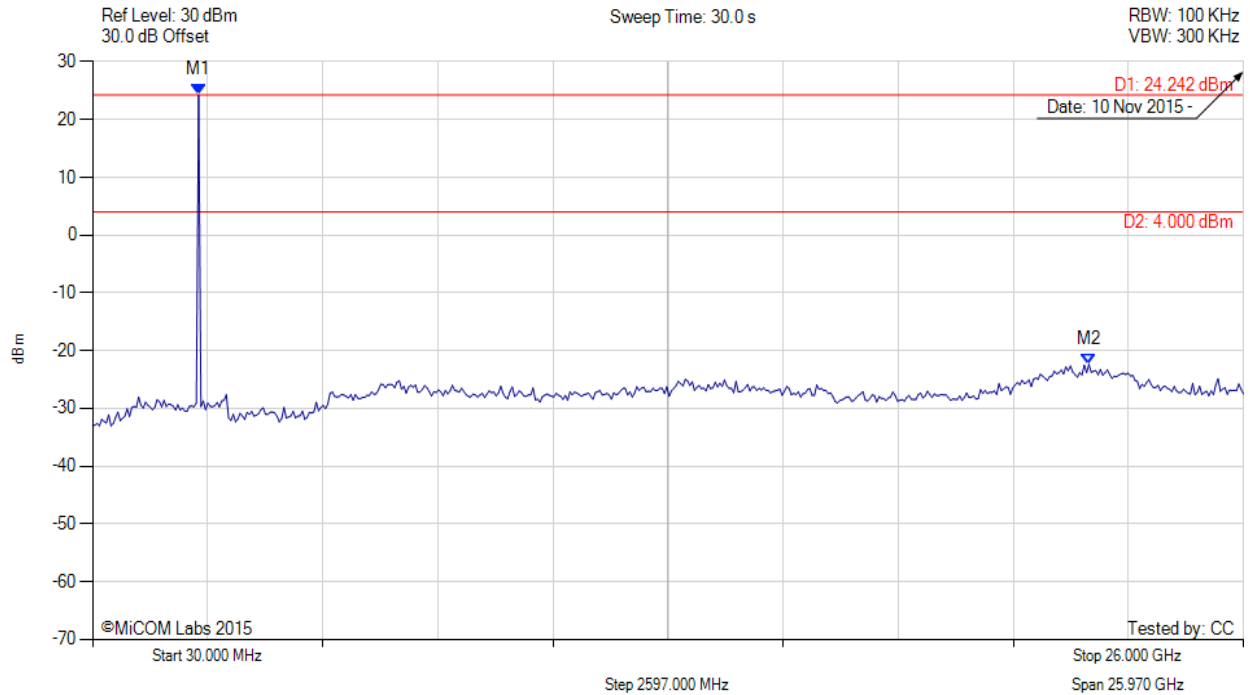

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2424.028 MHz : 24.242 dBm M2 : 22.513 GHz : -22.393 dBm | Limit: 4.00 dBm Margin: -26.39 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 128 of 145

CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: OQPSK, Channel: 2400.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

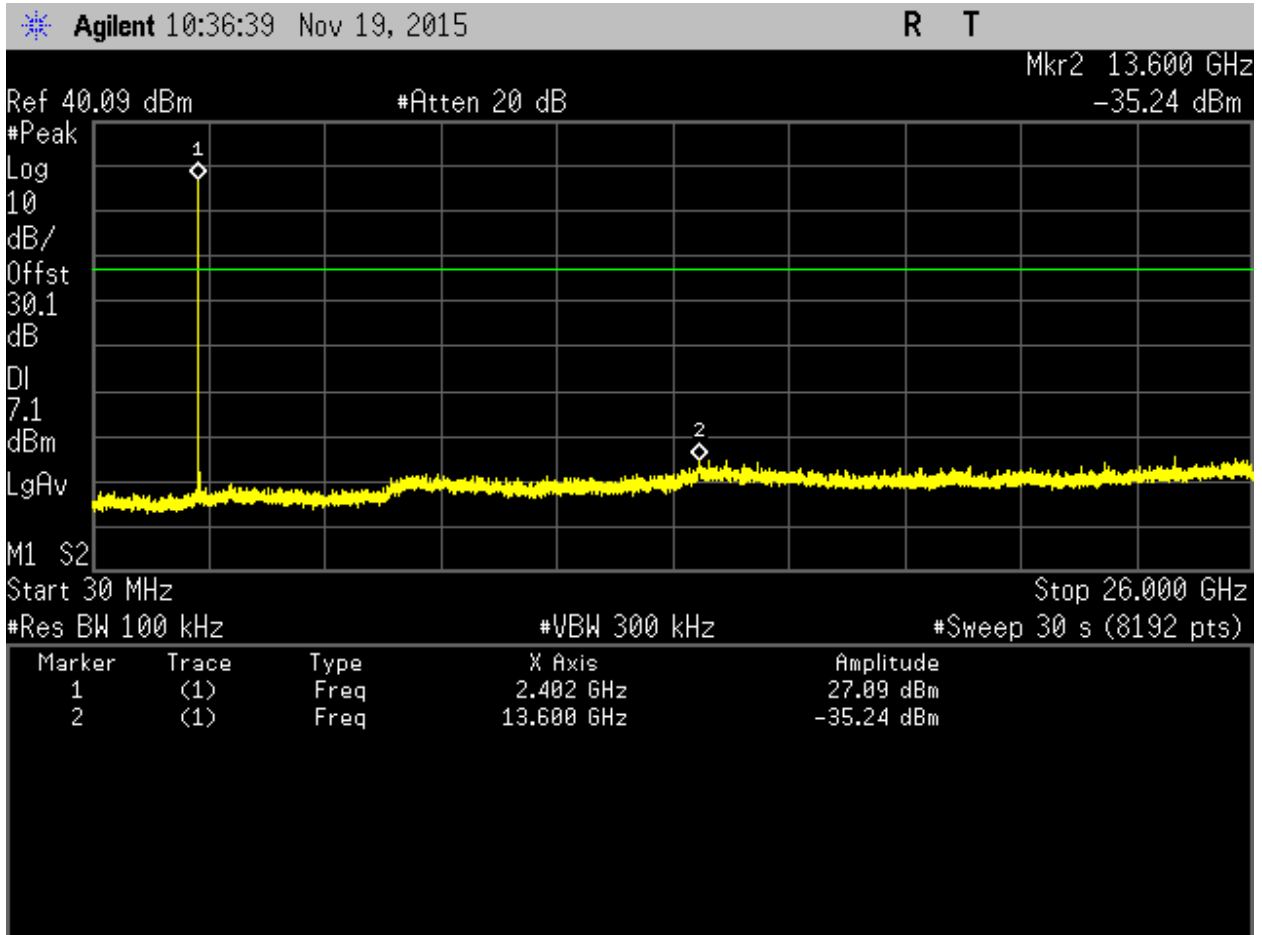

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2402.00 MHz : 27.090 dBm M2 : 16.600 GHz : -35.24 dBm | Limit: 7.00 dBm Margin: -42.31 dB |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: OQPSK, Channel: 2413.80 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

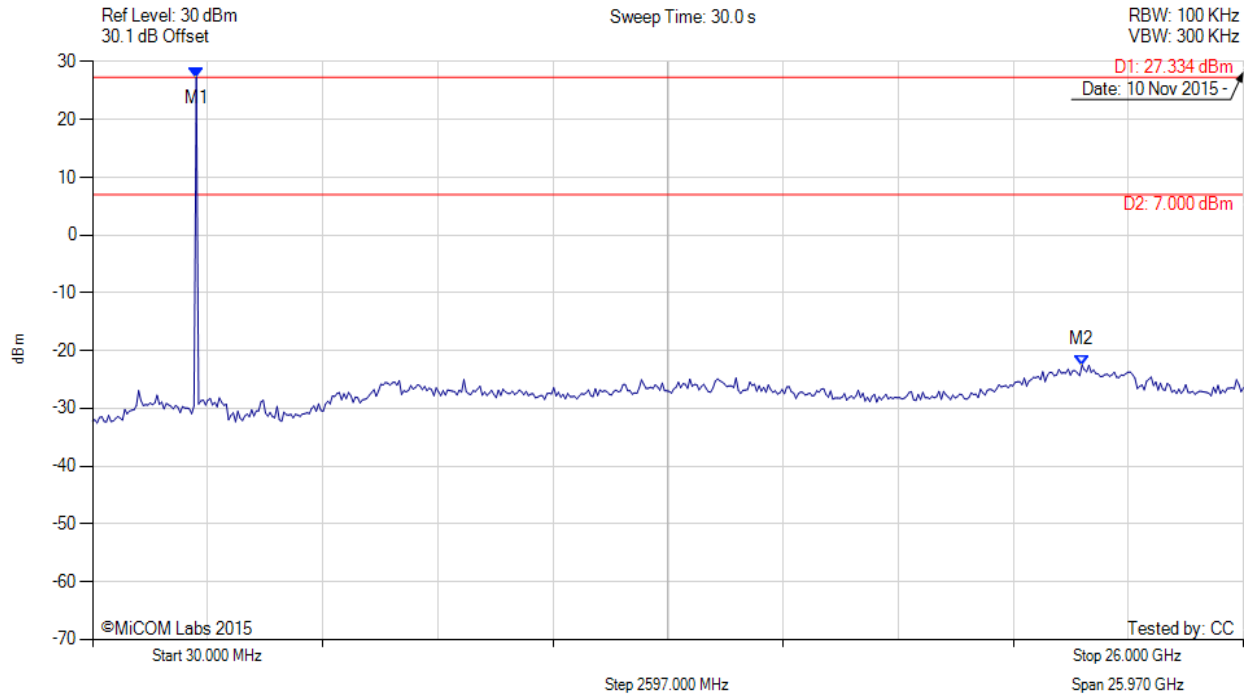

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2371.984 MHz : 27.334 dBm M2 : 22.357 GHz : -22.507 dBm | Limit: 7.00 dBm Margin: -29.51 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 130 of 145

CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: OQPSK, Channel: 2427.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

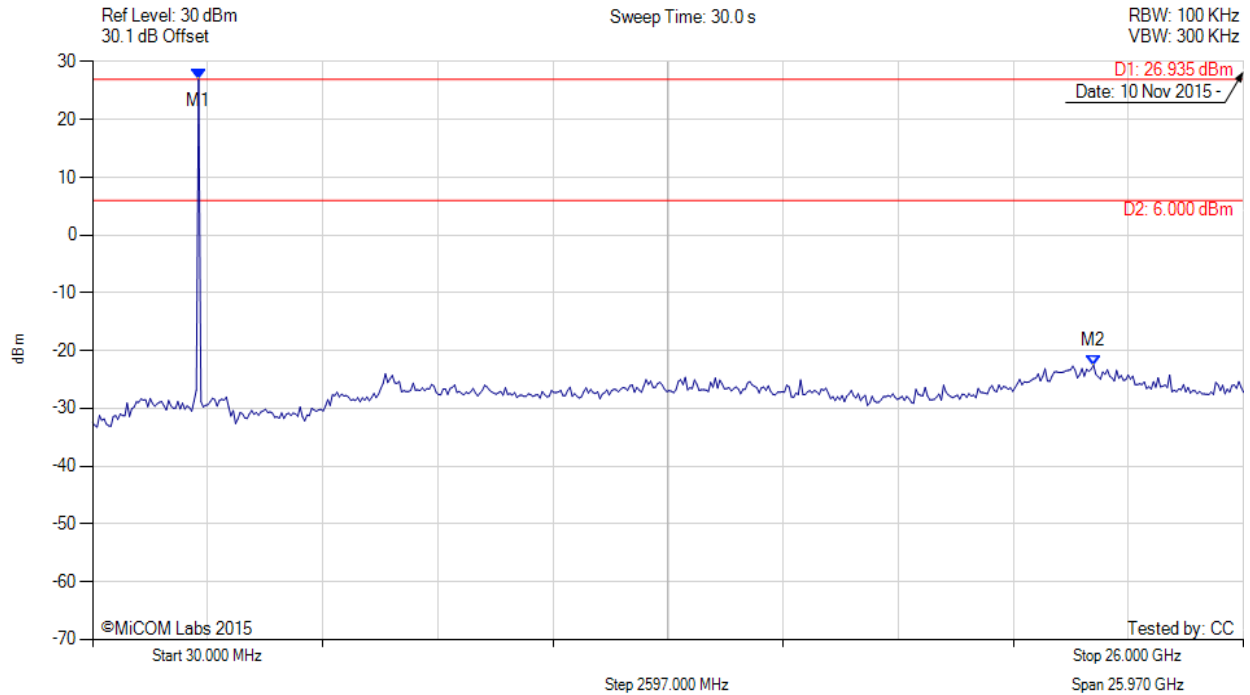

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2424.028 MHz : 26.935 dBm M2 : 22.617 GHz : -22.534 dBm | Limit: 6.00 dBm Margin: -28.53 dB |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.6.1.2. Conducted Band-Edge Emissions

A.6.1.2.1. Conducted Low Band-Edge Emissions

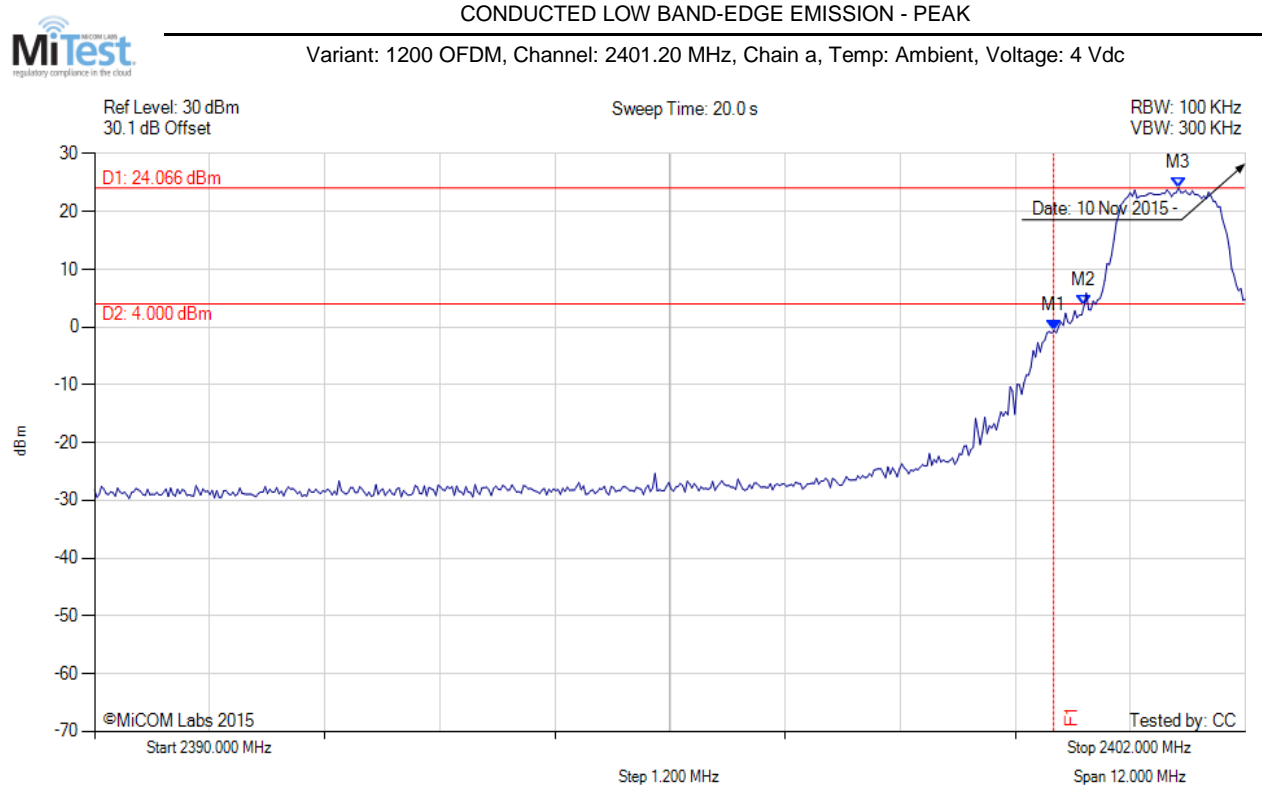

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2400.000 MHz : -0.602 dBm M2 : 2400.317 MHz : 3.702 dBm M3 : 2401.303 MHz : 24.066 dBm | Channel Frequency: 2401.20 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 132 of 145

CONDUCTED LOW BAND-EDGE EMISSION - PEAK



Variant: 2FSK, Channel: 2400.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

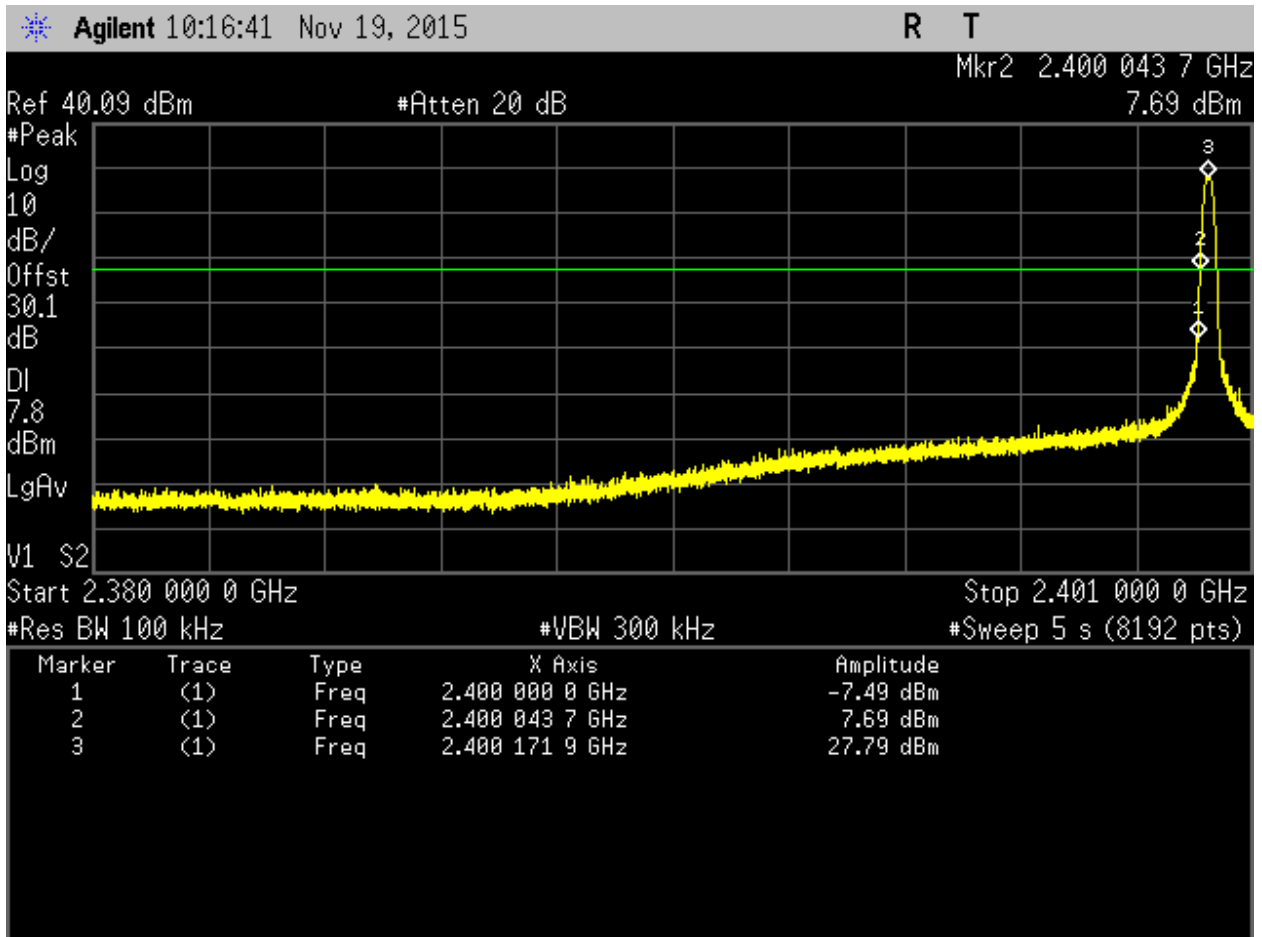

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2400.000 MHz : -7.490 dBm M2 : 2400.043 MHz : 7.692 dBm M3 : 2400.171 MHz : 27.790 dBm | Channel Frequency: 2400.20 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED LOW BAND-EDGE EMISSION - PEAK



Variants: 400 OFDM, Channel: 2400.40 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

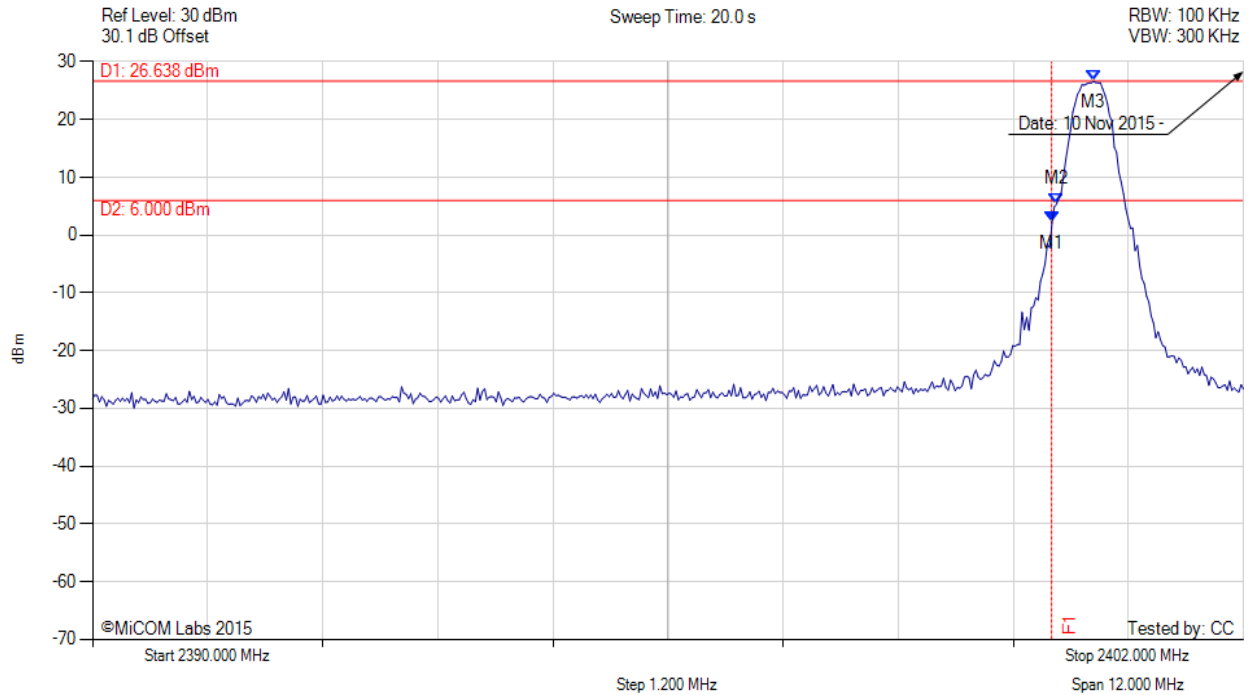

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2400.000 MHz : 2.227 dBm M2 : 2400.052 MHz : 5.388 dBm M3 : 2400.437 MHz : 26.638 dBm | Channel Frequency: 2400.40 MHz |


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED LOW BAND-EDGE EMISSION - PEAK

Variant: OQPSK, Channel: 2400.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

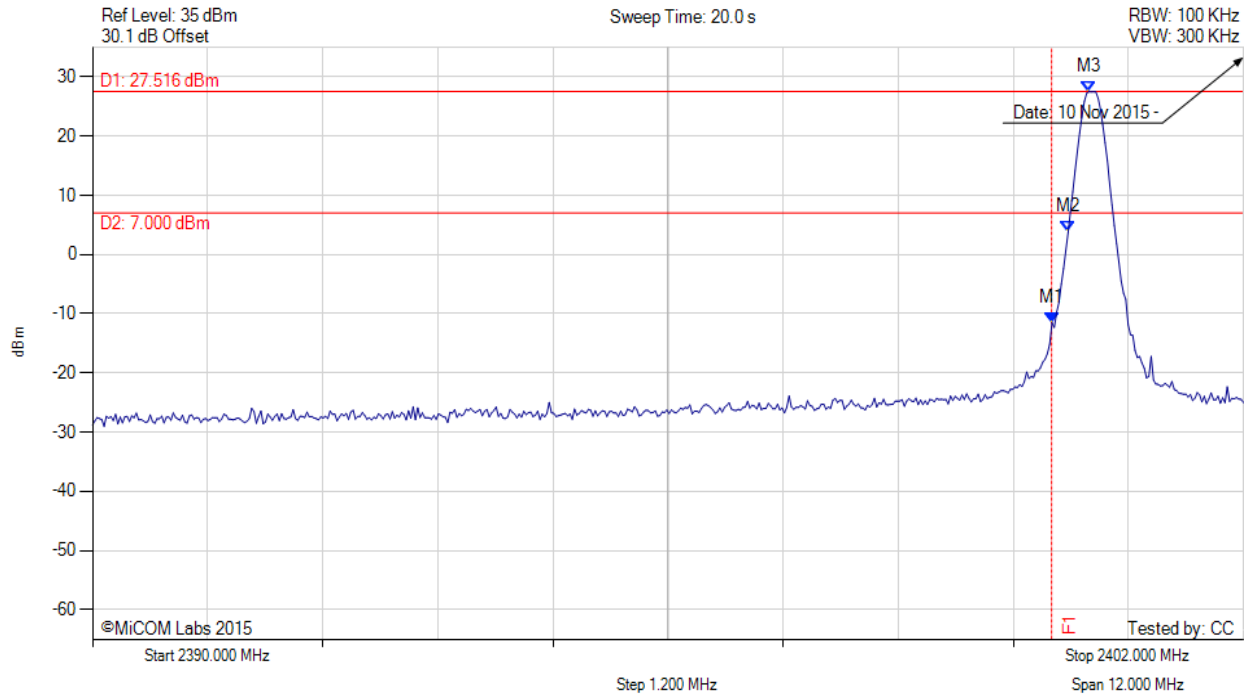

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2400.000 MHz : -1.03 dBm M2 : 2400.030 MHz : 7.01 dBm M3 : 2400.171 MHz : 27.16 dBm | Channel Frequency: 2400.20 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.6.1.2.2. Conducted High Band-Edge Emissions



CONDUCTED HIGH BAND-EDGE EMISSION - PEAK

Variant: 1200 OFDM, Channel: 2472.00 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

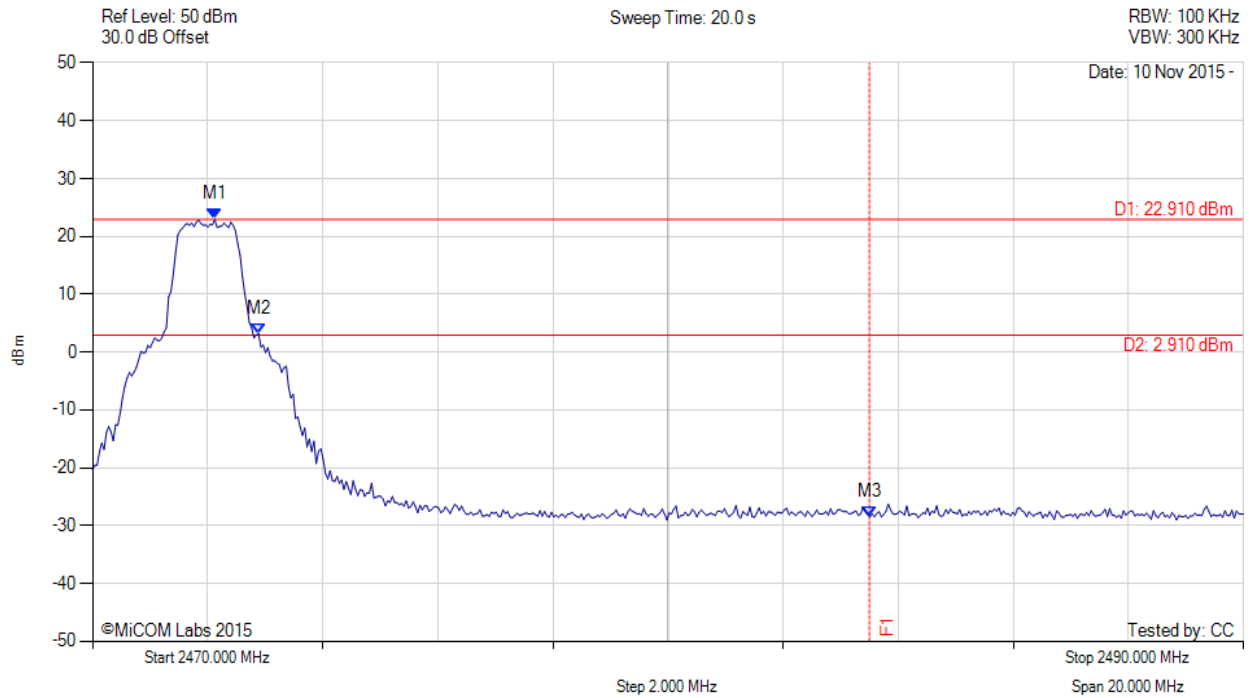

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2472.124 MHz : 22.915 dBm M2 : 2472.886 MHz : 3.210 dBm M3 : 2483.500 MHz : -28.496 dBm | Channel Frequency: 2472.00 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 136 of 145

CONDUCTED HIGH BAND-EDGE EMISSION - PEAK



Variat: 2FSK, Channel: 2427.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

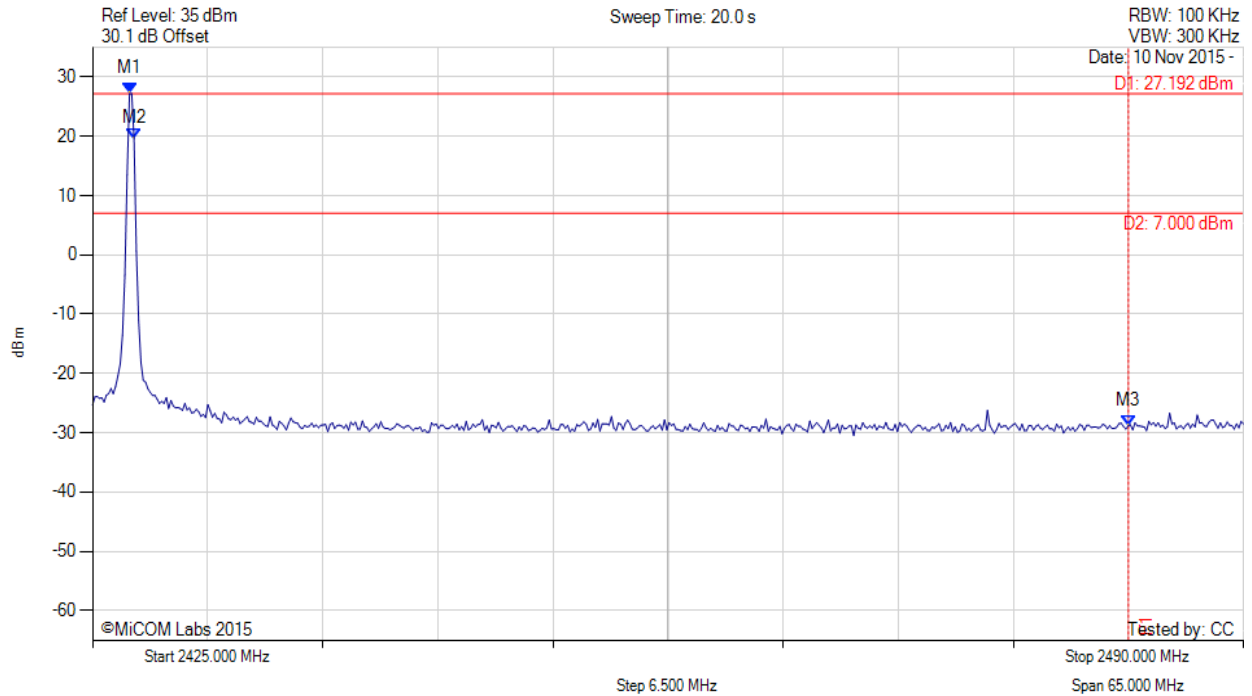

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2427.084 MHz : 27.192 dBm M2 : 2427.345 MHz : 19.605 dBm M3 : 2483.500 MHz : -28.839 dBm | Channel Frequency: 2427.20 MHz |

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED HIGH BAND-EDGE EMISSION - PEAK



Variant: 400 OFDM, Channel: 2454.40 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

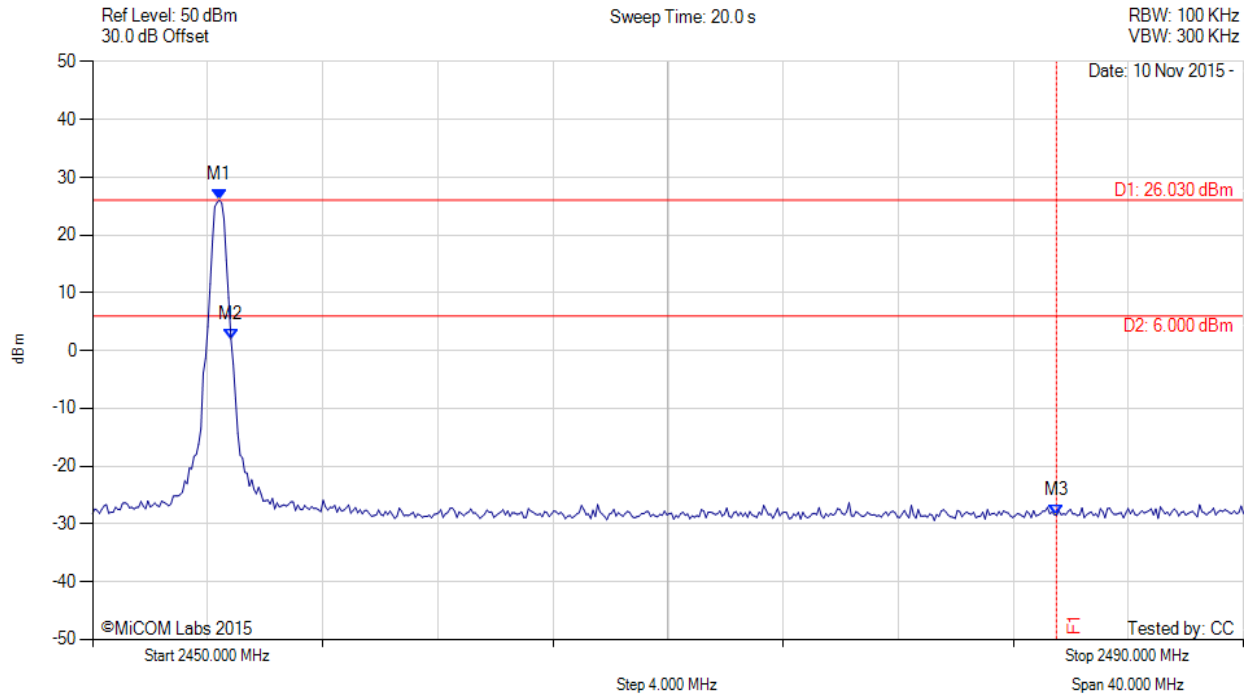

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2454.409 MHz : 26.028 dBm M2 : 2454.810 MHz : 2.006 dBm M3 : 2483.500 MHz : -28.490 dBm | Channel Frequency: 2454.40 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 138 of 145

CONDUCTED HIGH BAND-EDGE EMISSION - PEAK



Variant: OQPSK, Channel: 2427.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

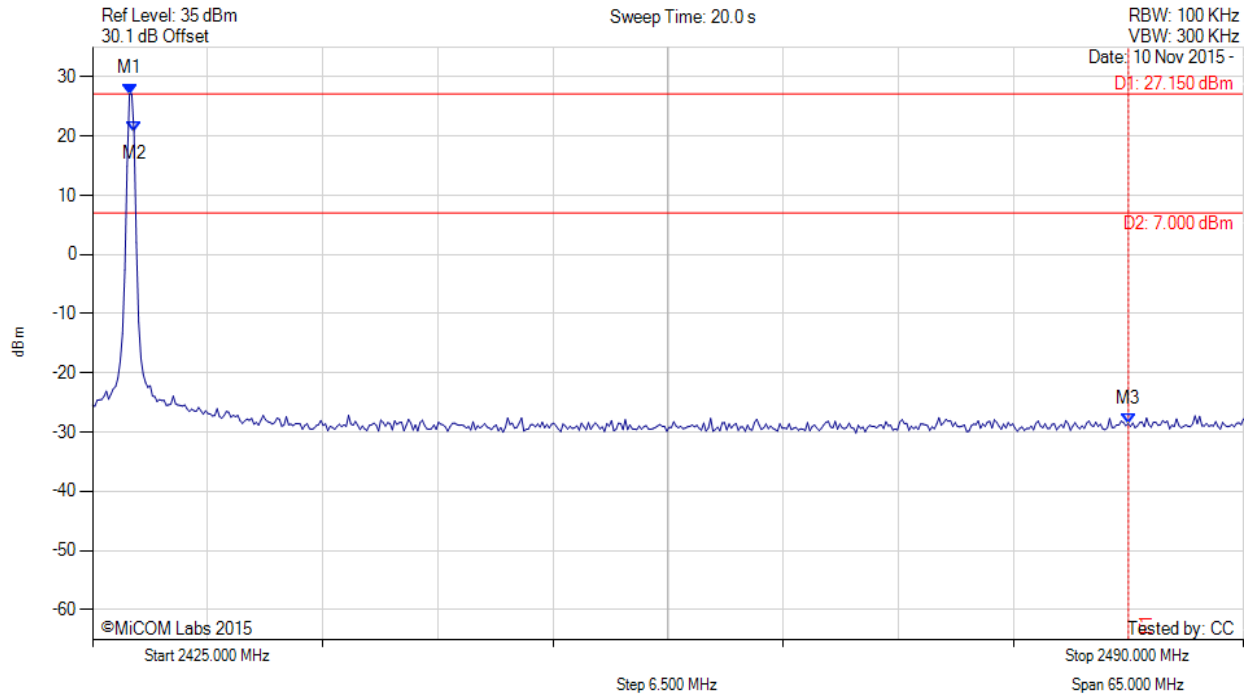

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2427.084 MHz : 27.150 dBm M2 : 2427.345 MHz : 20.684 dBm M3 : 2483.500 MHz : -28.559 dBm | Channel Frequency: 2427.20 MHz |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.7. Power Spectral Density



POWER SPECTRAL DENSITY - PEAK

Variant: 1200 OFDM, Channel: 2401.20 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

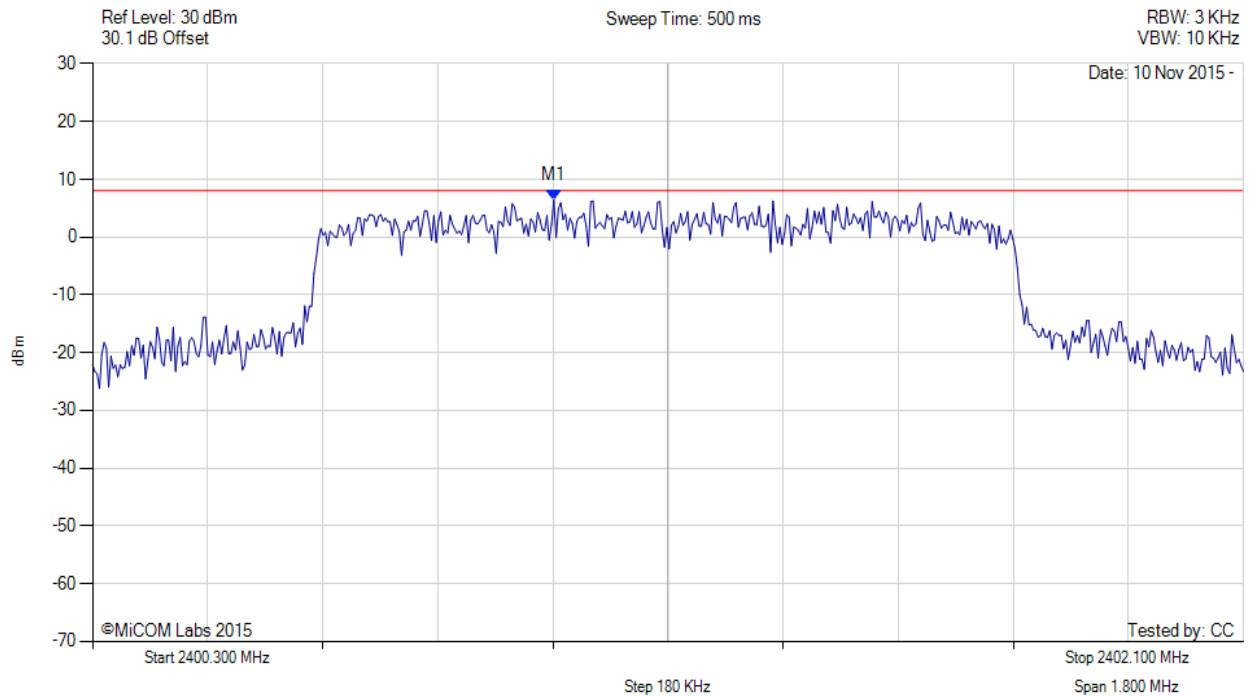

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2401.021 MHz : 6.441 dBm | Limit: ≤ 8.000 dBm Margin: -1.56 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 140 of 145

POWER SPECTRAL DENSITY - PEAK



Variant: 1200 OFDM, Channel: 2401.20 MHz, SUM, Temp: Ambient, Voltage: 4 Vdc

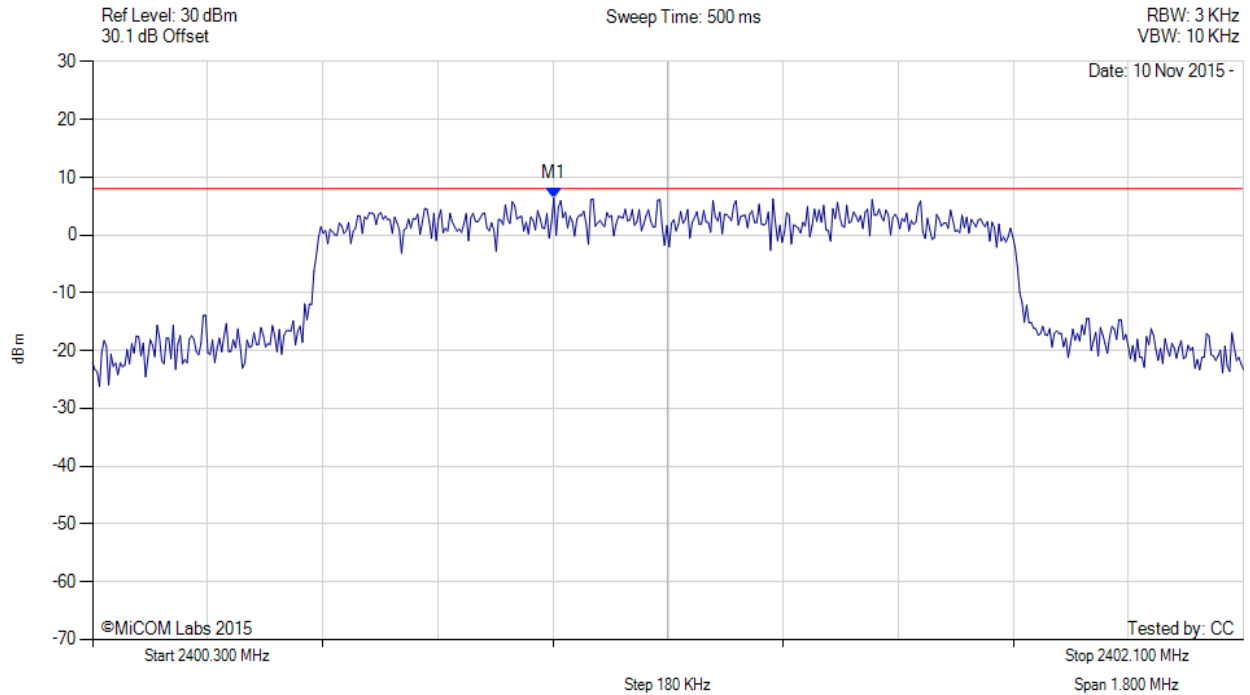

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2401.021 MHz : 6.441 dBm | Limit: ≤ 8.0 dBm Margin: -1.6 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 141 of 145

POWER SPECTRAL DENSITY - PEAK



Variant: 1200 OFDM, Channel: 2440.80 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

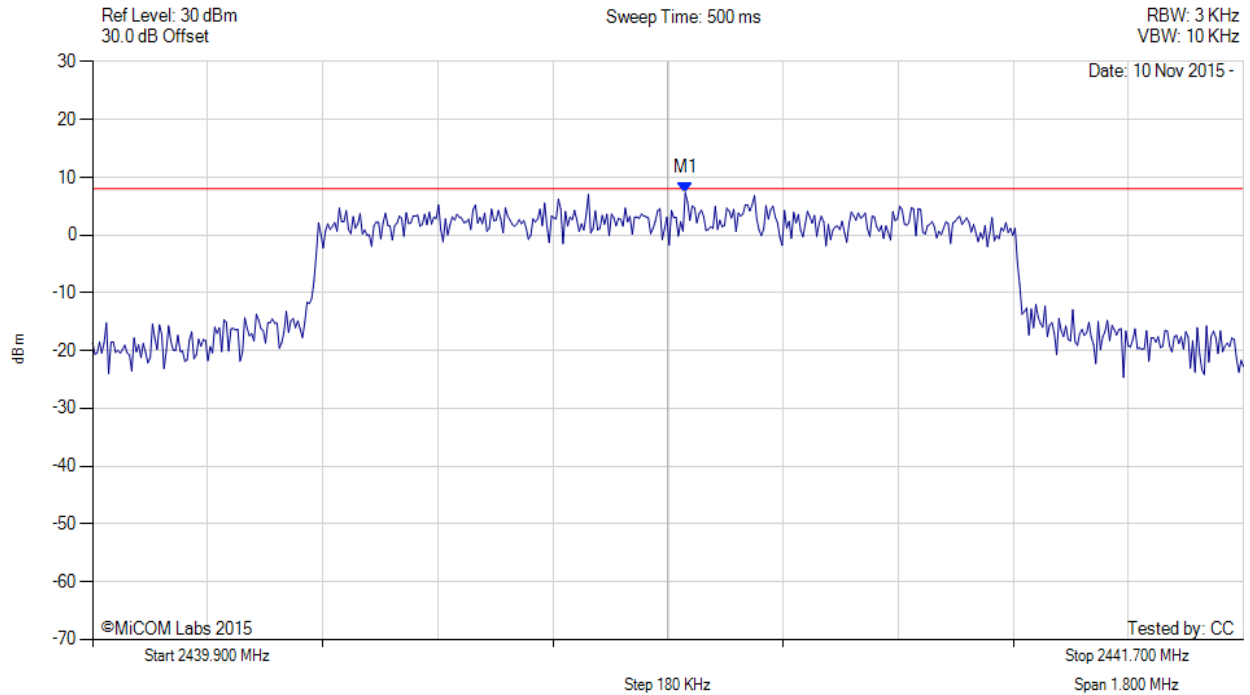

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2440.827 MHz : 7.328 dBm | Limit: ≤ 8.000 dBm Margin: -0.67 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 142 of 145

POWER SPECTRAL DENSITY - PEAK



Variant: 1200 OFDM, Channel: 2440.80 MHz, SUM, Temp: Ambient, Voltage: 4 Vdc

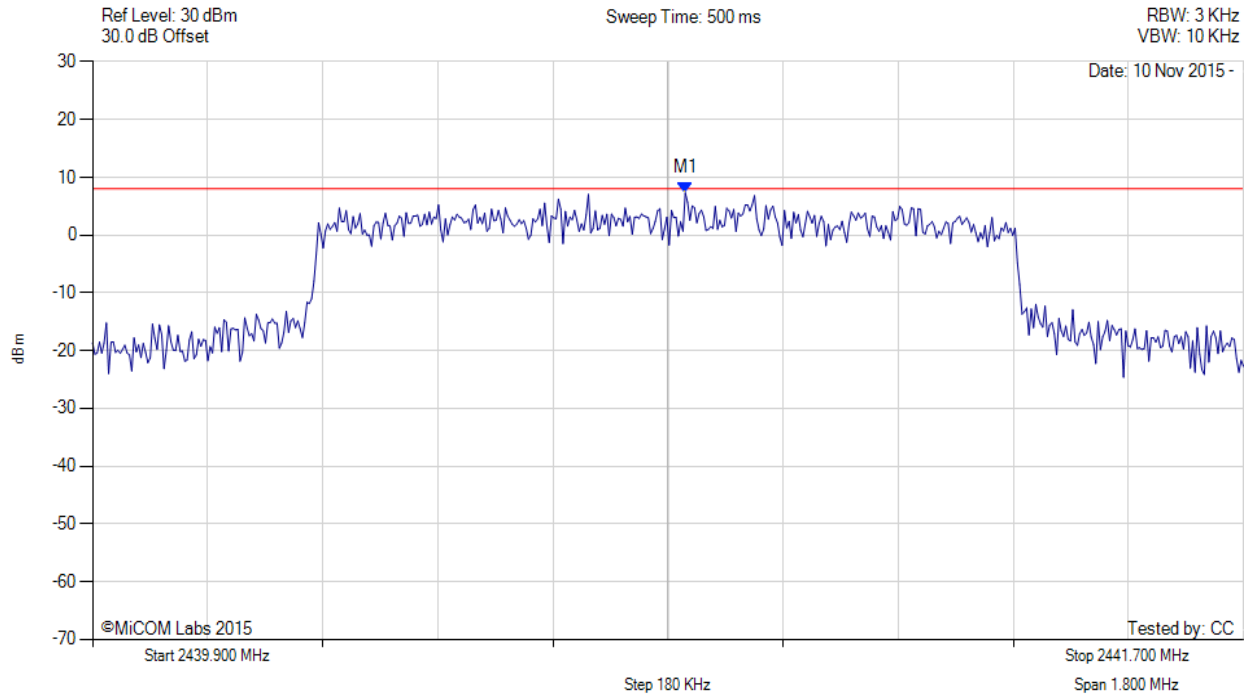

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2440.827 MHz : 7.328 dBm | Limit: ≤ 8.0 dBm Margin: -0.7 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 143 of 145

POWER SPECTRAL DENSITY - PEAK



Variant: 1200 OFDM, Channel: 2472.00 MHz, Chain a, Temp: Ambient, Voltage: 4 Vdc

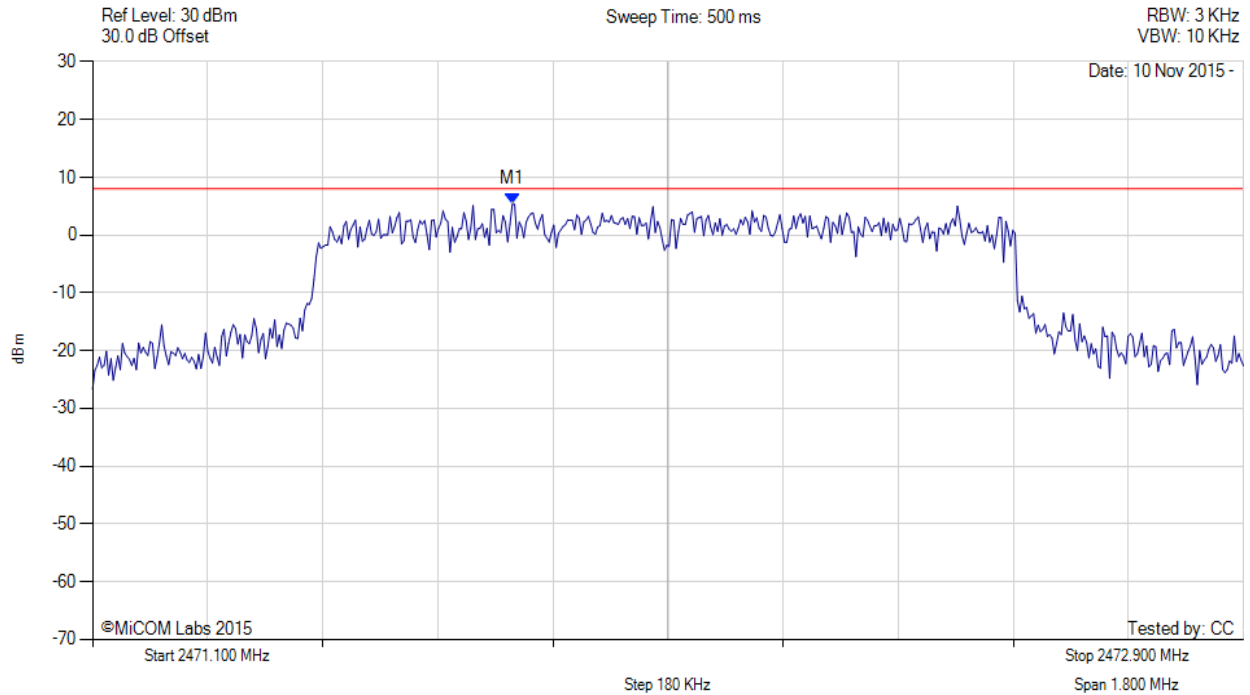

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2471.757 MHz : 5.367 dBm | Limit: ≤ 8.000 dBm Margin: -2.63 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks NIC 511-0303
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247
Serial #: SSNT108-U7 Rev A
Issue Date: 10th December 2015
Page: 144 of 145

POWER SPECTRAL DENSITY - PEAK



Variant: 1200 OFDM, Channel: 2472.00 MHz, SUM, Temp: Ambient, Voltage: 4 Vdc

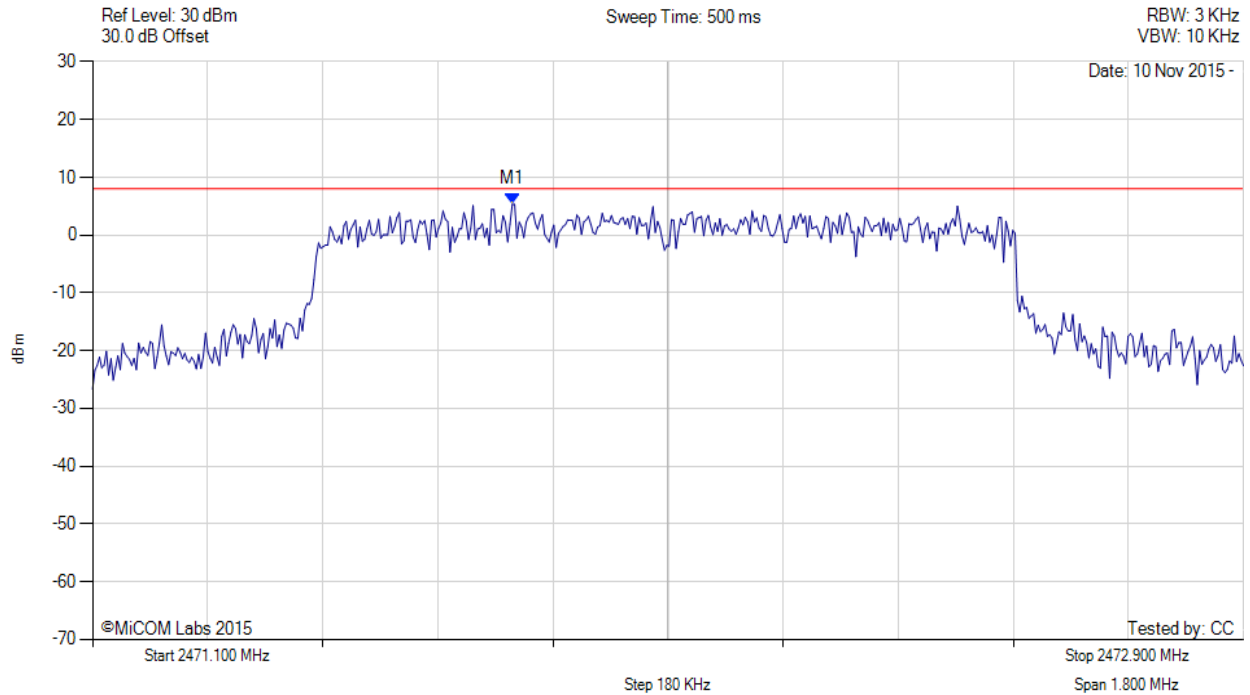

| Analyser Setup | Marker:Frequency:Amplitude | Test Results |
|---|-------------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW | M1 : 2471.757 MHz : 5.367 dBm | Limit: ≤ 8.0 dBm Margin: -2.6 dB |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com