Company: Silver Spring Networks

Test of: NIC 510 To: FCC 15.247 RSS 247 (DTS)

Report No.: SSNT113-U2\_Master Rev B

#### CONDUCTED TEST REPORT





# Test of: Silver Spring Networks NIC 511-0303

to

# To: FCC CFR 47 Part 15 Subpart C 15.247 & IC RSS 247 (DTS)

# Test Report Serial No.: SSNT113-U2\_Master Rev B

# This report supersedes: NONE

This document is the Master document controlling Addendum reports as listed below. This Master document combined with the Addendums demonstrate compliance with the standard

| Master Document Number | Addendum Reports  |
|------------------------|---|
| SSNT113-U2_Master      | SSNT113-U2_Conducted<br>SSNT113-U2 Radiated   |
| Applican               |   |
| Product Function       | <ol> <li>Plug-in radio device, will communicate<br/>over 900 MHz and/or 2.4 GHz mesh<br/>network. 2.4 GHz HAN pairing with<br/>other Zigbee devices.</li> </ol> |
| Issue Date             | e: 12th August 2016   |

## This Test Report is Issued Under the Authority of:

## MiCOM Labs, Inc.

575 Boulder Court Pleasanton California 94566 USA Phone: +1 (925) 462-0304 Fax: +1 (925) 462-0306 www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title:Silver Spring Networks NIC 511-0303To:FCC 15.247 & RSS 247 (DTS)Serial #:SSNT113-U2\_Master Rev BIssue Date:12<sup>th</sup> August 2016Page:3 of 22

# **Table of Contents**

| 1. ACCREDITATION, LISTINGS & RECOGNITION     | 4  |
|--|----|
| 1.1. TESTING ACCREDITATION                   |    |
| 1.2. RECOGNITION                             |    |
| 1.3. PRODUCT CERTIFICATION                   | 6  |
| 2. DOCUMENT HISTORY                          | 7  |
| 3. TEST RESULT CERTIFICATE                   |    |
| 4. REFERENCES AND MEASUREMENT UNCERTAINTY    | 9  |
| 4.1. Normative References                    | 9  |
| 4.2. Test and Uncertainty Procedure          | 10 |
| 5. PRODUCT DETAILS AND TEST CONFIGURATIONS   | 11 |
| 5.1. Technical Details                       |    |
| 5.2. Scope Of Test Program                   | 12 |
| 5.3. Equipment Model(s) and Serial Number(s) | 14 |
| 5.4. Antenna Details                         |    |
| 5.5. Cabling and I/O Ports                   | 14 |
| 5.6. Test Configurations                     | 15 |
| 5.7. Equipment Modifications                 | 15 |
| 5.8. Deviations from the Test Standard       |    |
| 6. TEST SUMMARY                              |    |
| 7. TEST EQUIPMENT CONFIGURATION(S)           |    |
| 7.1. Conducted                               |    |
| 7.2. Radiated Emissions                      |    |
| 8.1. AC Wireline Emission                    | 21 |



 Title:
 Silver Spring Networks NIC 511-0303

 To:
 FCC 15.247 & RSS 247 (DTS)

 Serial #:
 SSNT113-U2\_Master Rev B


 Issue Date:
 12<sup>th</sup> August 2016

 Page:
 4 of 22

# 1. ACCREDITATION, LISTINGS & RECOGNITION

## 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) <u>www.a2la.org</u> test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <u>http://www.a2la.org/scopepdf/2381-01.pdf</u>

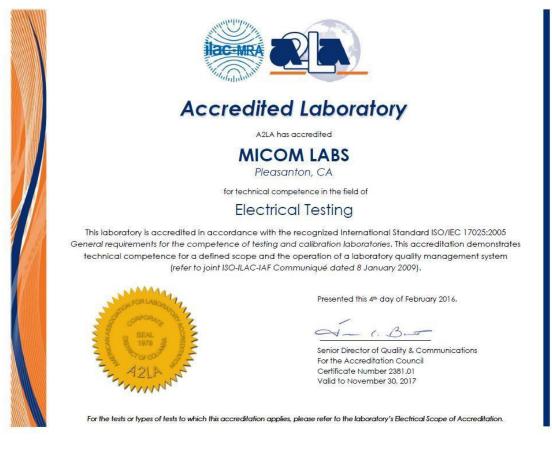



## 1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

| Country   | Recognition Body  | Status | Phase      | Identification No.                      |  |
|-----------|---|--------|------------|---|--|
| USA       | Federal Communications<br>Commission (FCC)  | ТСВ    | -          | US0159<br>Listing #: 102167             |  |
| Canada    | Industry Canada (IC)  | FCB    | APEC MRA 2 | US0159<br>Listing #: 4143A-2<br>4143A-3 |  |
| Japan     | MIC (Ministry of Internal<br>Affairs and Communication)   | CAB    | APEC MRA 2 | RCB 210                                 |  |
|           | VCCI  |        |            | A-0012                                  |  |
| Europe    | European Commission   | NB     | EU MRA     | NB 2280                                 |  |
| Australia | Australian Communications<br>and Media Authority (ACMA)   | CAB    | APEC MRA 1 |   |  |
| Hong Kong | Office of the<br>Telecommunication Authority<br>(OFTA)  | САВ    | APEC MRA 1 |   |  |
| Korea     | Ministry of Information and<br>Communication Radio<br>Research Laboratory (RRL)                           | САВ    | APEC MRA 1 |   |  |
| Singapore | Infocomm Development<br>Authority (IDA)   | CAB    | APEC MRA 1 | US0159                                  |  |
| Taiwan    | National Communications<br>Commission (NCC)<br>Bureau of Standards,<br>Metrology and Inspection<br>(BSMI) | САВ    | APEC MRA 1 |   |  |
| Vietnam   | Ministry of Communication (MIC)   | CAB    | APEC MRA 1 |   |  |

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification



 Title:
 Silver Spring Networks NIC 511-0303

 To:
 FCC 15.247 & RSS 247 (DTS)

 Serial #:
 SSNT113-U2\_Master Rev B

 Issue Date:
 12<sup>th</sup> August 2016

 Page:
 6 of 22

## 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) <u>www.a2la.org</u> test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <u>http://www.a2la.org/scopepdf/2381-02.pdf</u>



# Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 Requirements for bodies certifying products, processes and services. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.



Presented this 4<sup>th</sup> day of February 2016.

C.

Senior Director of Quality & Communications For the Accreditation Council Certificate Number 2381.02 Valid to November 30, 2017

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation

United States of America – Telecommunication Certification Body (TCB)

Industry Canada – Certification Body, CAB Identifier – US0159

Europe - Notified Body (NB), NB Identifier - 2280

Japan – Recognized Certification Body (RCB), RCB Identifier - 210



# 2. DOCUMENT HISTORY

| Document History                 |  |  |  |  |  |  |
|----------------------------------|--|--|--|--|--|--|
| Revision Date Comments           |  |  |  |  |  |  |
| Draft 20 <sup>th</sup> July 2016 |  |  |  |  |  |  |
|                                  |  |  |  |  |  |  |

| Released Document History |          |                              |  |  |  |  |
|---------------------------|----------|------------------------------|--|--|--|--|
| Document                  | Revision | Date                         | Comments   |  |  |  |
| Master                    | Rev A    | 9th August 2016              | Initial release                                      |  |  |  |
| Conducted Addendum        | Rev A    | 9th August 2016              | Initial release                                      |  |  |  |
| Radiated Addendum         | Rev A    | 9th August 2016              | Initial release                                      |  |  |  |
|                           |          |                              |  |  |  |  |
| Master                    | Rev B    | 12 <sup>th</sup> August 2016 | P 11 Table 5.1 Change to the declared nominal power. |  |  |  |
| Conducted Addendum        | Rev A    | 9th August 2016              | Initial release                                      |  |  |  |
| Radiated Addendum         | Rev A    | 9th August 2016              | Initial release                                      |  |  |  |
|                           |          |                              |  |  |  |  |
|                           |          |                              |  |  |  |  |

In the above table the latest report revision will replace all earlier versions.



Title:Silver Spring Networks NIC 511-0303To:FCC 15.247 & RSS 247 (DTS)Serial #:SSNT113-U2\_Master Rev BIssue Date:12<sup>th</sup> August 2016Page:8 of 22

# 3. TEST RESULT CERTIFICATE

| Manufacturer:      | Silver Spring Networks<br>230 W Tasman Dr<br>San Jose<br>California 95134 USA   | Tested By: | MiCOM Labs, Inc.<br>575 Boulder Court<br>Pleasanton<br>California 94566 USA |
|--------------------|---|------------|---|
| Model:             | NIC 511-0303  | Telephone: | +1 925 462 0304   |
| Type Of Equipment: | Type Of Equipment:Plug-in radio device, will<br>communicate over 900 MHz and/or<br>2.4 GHz mesh network.Fax2.4 GHz mesh network.2.4 GHz<br>HAN pairing with other Zigbee<br>devices.Fax |            | +1 925 462 0306   |
| S/N's:             | 00:13:50:07:00:00:08:81   |            |   |
| Test Date(s):      | 14 <sup>th</sup> July to 1 <sup>st</sup> August 2016  | Website:   | www.micomlabs.com   |
|                    |   |            |   |

| STANDARD(S)  | TEST RESULTS       |
|--|--------------------|
| FCC CFR 47 Part 15 Subpart C 15.247 & IC RSS 247 (DTS) | EQUIPMENT COMPLIES |

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

#### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.

2. Details of test methods used have been recorded and kept on file by the laboratory.

3. Test results apply only to the item(s) tested.

#### Approved & Released for MiCOM Labs, Inc. by:

Graeme Grieve Quality Manager MiCOM Labs, Inc.



Gordon Hurst President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



 Title:
 Silver Spring Networks NIC 511-0303

 To:
 FCC 15.247 & RSS 247 (DTS)

 Serial #:
 SSNT113-U2\_Master Rev B

 Issue Date:
 12<sup>th</sup> August 2016

 Page:
 9 of 22

## 4. <u>REFERENCES AND MEASUREMENT UNCERTAINTY</u>

## 4.1. Normative References

| REF. | PUBLICATION               | YEAR               | TITLE  |
|------|---------------------------|--------------------|--|
| I    | KDB 662911 D01<br>& D02   | Oct 31 2013        | Guidance for measurement of output emission of devices<br>that employ single transmitter with multiple outputs or<br>systems with multiple transmitters operating<br>simultaneously in the same frequency band |
| П    | KDB 558074 D01<br>v03r05  | 8th April 2016     | Guidance for performing compliance measurements on<br>Digital Transmission Systems (DTS) operating under<br>section 15.247.  |
| Ш    | A2LA                      | June 2015          | R105 - Requirement's When Making Reference to A2LA Accreditation Status  |
| IV   | ANSI C63.10               | 2013               | American National Standard for Testing Unlicensed<br>Wireless Devices  |
| v    | ANSI C63.4                | 2014               | American National Standards for Methods of<br>Measurement of Radio-Noise Emissions from Low-<br>Voltage Electrical and Electronic Equipment in the Range<br>of 9 kHz to 40 GHz                                 |
| VI   | CISPR 22                  | 2008               | Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement   |
| VII  | ETSI TR 100 028           | 2001-12            | Parts 1 and 2 Electromagnetic compatibility and Radio<br>Spectrum Matters (ERM); Uncertainties in the<br>measurement of mobile radio equipment characteristics   |
| VIII | FCC 47 CFR Part<br>15.247 | 2014               | Radio Frequency Devices; Subpart C – Intentional Radiators   |
| IX   | ICES-003                  | lssue 6 Jan 2016   | Spectrum Management and Telecommunications;<br>Interference-Causing Equipment Standard. Information<br>Technology Equipment (Including Digital Apparatus) –<br>Limits and methods of measurement.              |
| х    | M 3003                    | Edition 3 Nov.2012 | Expression of Uncertainty and Confidence in<br>Measurements  |
| XI   | RSS-247 Issue 1           | May 2015           | Digital Transmission Systems (DTSs), Frequency<br>Hopping System (FHSs) and Licence-Exempt Local Area<br>Network (LE-LEN) Devices  |
| XII  | RSS-Gen Issue 4           | November 2014      | General Requirements and Information for the<br>Certification of Radiocommunication Equipment  |
| XIII | KDB 644545 D03<br>v01     | August 14th 2014   | Guidance for IEEE 802.11ac New Rules   |
| XIV  | FCC 47 CFR Part<br>2.1033 | 2014               | FCC requirements and rules regarding photographs and test setup diagrams.  |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### 4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.



 Title:
 Silver Spring Networks NIC 511-0303

 To:
 FCC 15.247 & RSS 247 (DTS)

 Serial #:
 SSNT113-U2\_Master Rev B

 Issue Date:
 12<sup>th</sup> August 2016

 Page:
 11 of 22

# 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

## 5.1. Technical Details

|                                       | Description  |
|---------------------------------------|--|
| Purpose:                              | Test of the Silver Spring Networks NIC511-0303 to FCC CFR 47   |
|                                       | Part 15 Subpart C 15.247 (DTS) and Industry Canada RSS-247.  |
|                                       | Radio Frequency Devices; Subpart C – Intentional Radiators   |
| Applicant:                            | Silver Spring Networks   |
|                                       | 230 W Tasman Dr<br>San Jose California 95134 USA   |
| Manufacturer:                         |  |
| Laboratory performing the tests:      |  |
| Laboratory performing the tests.      | 575 Boulder Court  |
|                                       | Pleasanton California 94566 USA  |
| Test report reference number:         |  |
| Date EUT received:                    | 14 <sup>th</sup> July 2016   |
| Standard(s) applied:                  | FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247   |
| Dates of test (from - to):            | 14 <sup>th</sup> July to 1 <sup>st</sup> August 2016   |
| No of Units Tested:                   | 1  |
| Type of Equipment:                    | Network Interface Card (NIC)   |
| Product Family Name:                  | NIC 510  |
| Model(s):                             | NIC 511-0303, NIC 511-0302, NIC 511-0301   |
| Location for use:                     | Both   |
| Declared Frequency Range(s):          |  |
| Primary function of equipment:        | Plug-in radio device, will communicate over 900 MHz and/or 2.4 GHz mesh network. 2.4 GHz HAN pairing with other Zigbee |
|                                       | devices.   |
| Secondary function of equipment:      | None Provided  |
| Type of Modulation:                   | DSSS   |
| EUT Modes of Operation:               | OQPSK  |
| Declared Nominal Output Power (Peak): | 2400 - 2483.5 MHz:: +27 dBm  |
| Transmit/Receive Operation:           | Transceiver - Half Duplex  |
| Rated Input Voltage and Current:      | DC only (Battery operated / external supply) 4Vdc  |
| Operating Temperature Range:          | Declared Range -40°C to +85°C  |
| ITU Emission Designator:              | 2M20F1D  |
| Equipment Dimensions:                 | 114.5mm x 101.6mm x 19mm   |
|                                       | 140 grams  |
| Hardware Rev:                         | 173-0730-00: NIC 511-0303  |
|                                       | 173-0729-00: NIC 511-0302  |
|                                       | 173-0728-00: NIC 511-0301  |
| Software Rev:                         | 4.0.1  |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### 5.2. Scope Of Test Program

#### Silver Spring Networks NIC 510-0303

The scope of the test program was to test the Silver Spring Networks NIC 511-0303, Network Interface Card (NIC) configurations in the frequency ranges 2400 - 2483.5 MHz; for compliance against the following specification:

#### FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Radio Frequency Devices; Subpart C – Intentional Radiators

#### IC RSS 247 (DTS)

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

The following product description was supplied by Silver Spring Networks.

#### NIC 510

The Silver Spring Networks (SSNI) Network Interface Card, or NIC 511, is based on SSN's 5th Generation radio platform. NIC 511 may be configured for energy meters and other devices to be used in SSN Smart Energy Networks (SEN). The NIC 511 family incorporates a 902-928MHz frequency hopping mesh radio, a 902-928 MHz DSSS radio, a 2.4GHz ISM band frequency hopping mesh radio, and a 2.4GHz DSSS radio. The NIC 511 family supports basic meter types including single-phase meters and three-phase meters.


This report is intended to cover the NIC 510 family of products which includes the NIC 511-0303 and represents a worse case configuration of the product family.

NIC 510 products include the following model numbers/configurations:

NIC 511-0303 - 900+2.4,INT/EXT ANT,HW1 NIC 511-0302 - 900+2.4,EXT ANT,HW1 NIC 511-0301 - 900+2.4,INT ANT,HW1



#### Silver Spring Networks NIC 511-0303

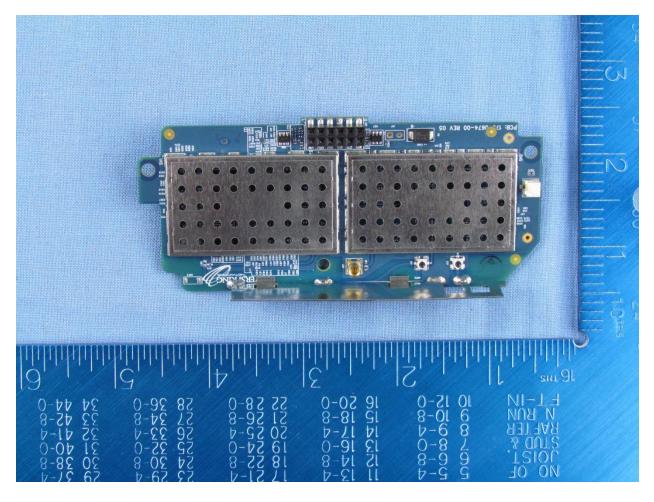



## 5.3. Equipment Model(s) and Serial Number(s)

| Туре                 | Description                        | Manufacturer              | Model        | Serial no.       | Delivery Date |
|----------------------|------------------------------------|---------------------------|--------------|------------------|---------------|
| EUT                  | Network<br>Interface Card<br>(NIC) | Silver Spring<br>Networks | NIC 511-0303 | 0013500700000881 |               |
| Support<br>Equipment | Laptop                             | Apple                     | MacBookPro   |                  |               |

## 5.4. Antenna Details

| Туре                           | Manufacturer      | Model             | Family         | Gain<br>(dBi) | BF Gain | Dir BW | X-Pol | Frequency<br>Band (MHz) |
|--------------------------------|-------------------|-------------------|----------------|---------------|---------|--------|-------|-------------------------|
| integral                       | Tai Sheng<br>Chen | 155-0010-00       | F-Type         | 5.0           | -       | 360    | -     | 2400 - 2483.5           |
| external                       | WP                | WPANT30017-<br>CA | OMNI           | 4.5           | -       | 360    | -     | 2400 - 2483.5           |
| external                       | WP                | WPANT40020-<br>SA | Wrap<br>Around | 3.5           | -       | 360    | -     | 2400 - 2483.5           |
| BF Gain - Beamforming Gain     |                   |                   |                |               |         |        |       |                         |
| Dir BW - Directional BeamWidth |                   |                   |                |               |         |        |       |                         |
| X-Pol - Cross Polarization     |                   |                   |                |               |         |        |       |                         |

## 5.5. Cabling and I/O Ports

\*None



## 5.6. Test Configurations

Results for the following configurations are provided in this report:

| Operational<br>Mode(s) | Data Rate with<br>Highest Power | Channel Frequency<br>(MHz)<br>Low Mid High |        |        |  |  |  |
|------------------------|---------------------------------|--|--------|--------|--|--|--|
| (DSSS)                 | kbps                            |  |        |        |  |  |  |
| 2400 - 2483.5 MHz      |                                 |  |        |        |  |  |  |
| OQPSK                  | 250.0                           | 2405.0                                     | 2440.0 | 2480.0 |  |  |  |

### 5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance: 1. NONE

## 5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program: 1. NONE



# 6. TEST SUMMARY

| List of Measurements                           |  |          |  |
|--|--|----------|--|
| Test Header                                    | Result                                   | Comments |  |
| Conducted Testing                              | See Report SSNT113-U2_Conducted Addendum |          |  |
| 15.247(a)(2) 6 dB & 99% Bandwidth              | Complies                                 |          |  |
| 15.247(b), 15.31(e) Conducted Output Power     | Complies                                 |          |  |
| 15.247(d) Conducted Emissions                  | Complies                                 |          |  |
| (1) Conducted Spurious Emissions               | Complies                                 |          |  |
| (2) Conducted Band-Edge Emissions              | Complies                                 |          |  |
| 15.247(e) Power Spectral Density               | Complies                                 |          |  |
| Radiated Testing                               | See Report SSNT113-U2_Radiated Addendum  |          |  |
| (b)(2) Radiated Spurious & Band-Edge Emissions | Complies                                 |          |  |
| Integral                                       | Complies                                 |          |  |
| Digital Emissions                              | See Report SSNT113-U2_Radiated Addendum  |          |  |
| 15.209 Digital Emissions                       | Complies                                 |          |  |
| AC Wireline Emissions                          | Test not applicable, EUT is dc powered   |          |  |
| 15.207 AC Wireline Emissions                   | N/A                                      |          |  |




# 7. TEST EQUIPMENT CONFIGURATION(S)

## 7.1. Conducted

Conducted RF Emission Test Set-up(s)

The following tests were performed using the conducted test set-up shown in the diagram below.

- 1. 6 dB & 99% BANDWIDTH
- 2. Peak Output Power
- 3. Power Spectral Density
- 4. Conducted Spurious Emissions
- 5. Conducted Spurious Band-Edge Emissions

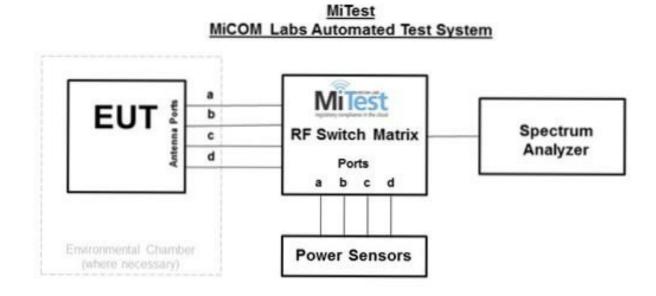

## **Conducted Test Measurement Setup**

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



Title:Silver Spring Networks NIC 511-0303To:FCC 15.247 & RSS 247 (DTS)Serial #:SSNT113-U2\_Master Rev BIssue Date:12<sup>th</sup> August 2016Page:18 of 22

| Asset#         | Description  | Manufacturer            | Model#                  | Serial#       | Calibration<br>Due Date |
|----------------|--|-------------------------|-------------------------|---------------|-------------------------|
| 127            | Power Supply   | HP                      | 6674A                   | US36370530    | Cal when<br>used        |
| 158            | Barometer/Thermometer                                | Control<br>Company      | 4196                    | E2846         | 01 Dec 2016             |
| 248            | Resistance<br>Thermometer                            | Thermotronics           | GR2105-02               | 9340 #1       | 21 Oct 2016             |
| 287            | Rohde & Schwarz 40<br>GHz Receiver                   | Rhode &<br>Schwarz      | ESIB40                  | 100201        | 27 Aug 2016             |
| 376            | USB 10MHz - 18GHz<br>Average Power Sensor            | Agilent                 | U2000A                  | MY51440005    | 23 Oct 2016             |
| 378            | Rohde & Schwarz 40<br>GHz Receiver with<br>Generator | Rhode &<br>Schwarz      | ESIB40                  | 100107/040    | 04 Aug 2016             |
| 381            | 4x4 RF Switch Box                                    | MiCOM Labs              | MiTest RF<br>Switch Box | MIC002        | 18 Nov 2016             |
| 419            | Laptop with Labview<br>Software                      | Lenova                  | W520                    | TS02          | Not Required            |
| 420            | USB to GPIB Interface                                | National<br>Instruments | GPIB-USB HS             | 1346738       | Not Required            |
| 440            | USB Wideband Power<br>Sensor                         | Boonton                 | 55006                   | 9178          | 25 Sep 2016             |
| 441            | USB Wideband Power<br>Sensor                         | Boonton                 | 55006                   | 9179          | 25 Sep 2016             |
| 442            | USB Wideband Power<br>Sensor                         | Boonton                 | 55006                   | 9181          | 25 Sep 2016             |
| 445            | PoE Injector   | D-Link                  | DPE-101GL               | QTAH1E2000625 | Not Required            |
| 460            | Dell Computer  | Dell                    | Optiplex330             | BC944G1       | Not Required            |
| 461            | Spectrum Analyzer                                    | Agilent                 | E4440A                  | MY46185537    | 13 Aug 2016             |
| 74             | Environmental Chamber<br>Chamber 3                   | Tenney                  | TTC                     | 12808-1       | 30 Sep 2016             |
| RF#2<br>GPIB#1 | GPIB cable to Power<br>Supply                        | HP                      | GPIB                    | None          | Not Required            |
| RF#2<br>SMA#1  | EUT to Mitest box port 1                             | Flexco                  | SMA Cable<br>port1      | None          | 18 Nov 2016             |
| RF#2<br>SMA#2  | EUT to Mitest box port 2                             | Flexco                  | SMA Cable<br>port2      | None          | 18 Nov 2016             |
| RF#2<br>SMA#3  | EUT to Mitest box port 3                             | Flexco                  | SMA Cable<br>port3      | None          | 18 Nov 2016             |
| RF#2<br>SMA#4  | EUT to Mitest box port 4                             | Flexco                  | SMA Cable<br>port4      | None          | 18 Nov 2016             |
| RF#2<br>SMA#SA | Mitest box to SA                                     | Flexco                  | SMA Cable<br>SA         | None          | 18 Nov 2016             |
| RF#2<br>USB#1  | USB Cable to Mitest<br>Box                           | Dynex                   | USB Cable               | None          | Not Required            |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




## 7.2. Radiated Emissions

The following tests were performed using the radiated test set-up shown in the diagram below.

- 1).. Radiated Spurious and Band-Edge Emissions;
- 2) Digital Emissions

#### **Radiated Emission Measurement Setup Pictorial Representation**

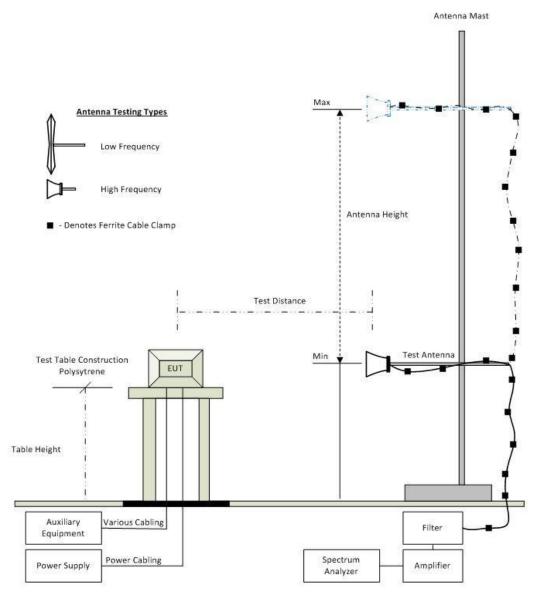

**Radiated Emission Test Setup** 

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title:Silver Spring Networks NIC 511-0303To:FCC 15.247 & RSS 247 (DTS)Serial #:SSNT113-U2\_Master Rev BIssue Date:12<sup>th</sup> August 2016Page:20 of 22

| Asset# | Description                                       | Manufacturer            | Model#  | Serial#     | Calibration<br>Due Date |
|--------|---|-------------------------|---|-------------|-------------------------|
| 158    | Barometer/Thermometer                             | Control<br>Company      | 4196  | E2846       | 01 Dec 2016             |
| 170    | Video System Controller for Semi Anechoic Chamber | Panasonic               | WV-CY101  | 04R08507    | Not Required            |
| 287    | Rohde & Schwarz 40 GHz<br>Receiver                | Rhode &<br>Schwarz      | ESIB40  | 100201      | 27 Aug 2016             |
| 338    | Sunol 30 to 3000 MHz<br>Antenna                   | Sunol                   | JB3   | A052907     | 15 Aug 2016             |
| 396    | 2.4 GHz Notch Filter                              | Microtronics            | BRM50701  | 001         | 18 Aug 2016             |
| 397    | Amp 10 - 2500MHz                                  | MiCOM Labs              | Amp 10 - 2500<br>MHz                                | NA          | 9 June 2017             |
| 399    | ETS 1-18 GHz Horn<br>Antenna                      | ETS                     | 3117  | 00154575    | 10 Oct 2016             |
| 406    | Amplifier for Radiated<br>Emissions               | MiCOM Labs              | 40dB 1 to<br>18GHz Amp                              | 0406        | 9 June 2017             |
| 410    | Desktop Computer                                  | Dell                    | Inspiron 620  | WS38        | Not Required            |
| 411    | Mast/Turntable Controller                         | Sunol Sciences          | SC98V   | 060199-1D   | Not Required            |
| 412    | USB to GPIB Interface                             | National<br>Instruments | GPIB-USB HS   | 11B8DC2     | Not Required            |
| 413    | Mast Controller                                   | Sunol Science           | TWR95-4   | 030801-3    | Not Required            |
| 415    | Turntable Controller                              | Sunol Sciences          | Turntable<br>Controller                             | None        | Not Required            |
| 447    | Rad Emissions Test<br>Software                    | MiCOM                   | Rad<br>Emissions<br>Test Software<br>Version 1.0.73 | 447         | Not Required            |
| 462    | Schwarzbeck cable from<br>Antenna to Amplifier.   | Schwarzbeck             | AK 9513   | 462         | 31 May 2017             |
| 463    | Schwarzbeck cable from<br>Amplifier to Bulkhead.  | Schwarzbeck             | AK 9513   | 463         | 31 May 2017             |
| 464    | Schwarzbeck cable from<br>Bulkhead to Receiver    | Schwarzbeck             | AK 9513   | 464         | 31 May 2017             |
| 465    | Low Pass Filter DC-1000<br>MHz                    | Mini-Circuits           | NLP-1200+   | VUU01901402 | 2 June 2017             |
| 480    | Cable - Bulkhead to Amp                           | SRC Haverhill           | 157-157-<br>3050360                                 | 480         | 2 June 2017             |
| 481    | Cable - Bulkhead to<br>Receiver                   | SRC Haverhill           | 151-151-<br>3050787                                 | 481         | 2 June 2017             |
| 482    | Cable - Amp to Antenna                            | SRC Haverhill           | 157-157-<br>3051574                                 | 482         | 2 June 2017             |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




## 7.3. AC Wireline Emission

The following tests were performed using the conducted test set-up shown in the diagram below.

1. AC Wireline Conducted Emissions

#### **Conducted Test Set-Up Pictorial Representation**

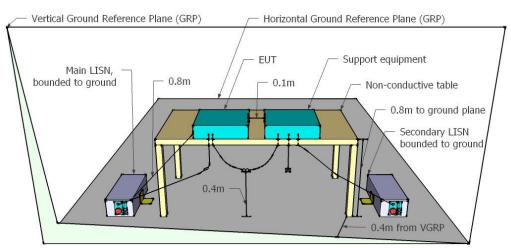

| Asset#         | Description  | Manufacturer              | Model#       | Serial#     | Calibration<br>Due Date |
|----------------|--|---------------------------|--------------|-------------|-------------------------|
| 158            | Barometer/Thermometer                                | Control<br>Company        | 4196         | E2846       | 01 Dec 2016             |
| 184            | Pulse Limiter  | Rhode &<br>Schwarz        | ESH3Z2       | 357.8810.52 | 27 Oct 2016             |
| 190            | LISN (two-line V-<br>network)                        | Rhode &<br>Schwarz        | ESH3Z5       | 836679/006  | 29 Oct 2016             |
| 193            | Receiver 20 Hz to 7<br>GHz                           | Rhode &<br>Schwarz        | ESI 7        | 838496/007  | 17 July 2016            |
| 287            | Rohde & Schwarz 40<br>GHz Receiver                   | Rhode &<br>Schwarz        | ESIB40       | 100201      | 27 Aug 2016             |
| 307            | BNC-CABLE  | Megaphase                 | 1689 1GVT4   | 15F50B002   | 27 Oct 2016             |
| 316            | Dell desktop computer workstation with Vasona        | Dell                      | Desktop      | WS04        | Not Required            |
| 372            | AC Variable PS                                       | California<br>Instruments | 1251P        | L06951      | Cal when used           |
| 378            | Rohde & Schwarz 40<br>GHz Receiver with<br>Generator | Rhode &<br>Schwarz        | ESIB40       | 100107/040  | 04 Aug 2016             |
| 388            | LISN (3 Phase) 9kHz -<br>30MHz                       | Rohde &<br>Schwarz        | ESH2-Z5      | 892107/022  | 30 Oct 2016             |
| ADAPT<br>SMA#1 | SMA Cable  | Megaphase                 | SMA Cable #1 | None        | Cal when used           |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court Pleasanton, California 94566, USA Tel: +1 (925) 462 0304 Fax: +1 (925) 462 0306 www.micomlabs.com