

Company: Silver Spring Networks

Test of: MicroAP 5

To: FCC CFR 47 Part 15.247 (FHSS) &
IC RSS-247 (900 – 928.0 MHz)

Report No.: SSNT135–U4_Radiated Rev A

RADIATED TEST REPORT



Master Document Number	Addendum Reports
SSNT135-U4_Master	SSNT135-U4_Conducted
	SSNT135-U4_Radiated

This report is only valid in conjunction with the reports listed in the above table. Together these reports address the requirements for the type of device operating under the standard as listed.

RADIATED TEST REPORT



Test of: Silver Spring Networks MicroAP 5

To: FCC CFR 47 Part 15.247 (FHSS) &
IC RSS-247 (900 – 928.0 MHz)

Test Report Serial No.: SSNT135 –U4_Radiated Rev A

This report supersedes: NONE

Applicant: Silver Spring Networks
230 W Tasman Drive
San Jose, California 95134
USA

Plug in Radio Device

Issue Date: 1st February 2017

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 3 of 70

Table of Contents

1. TEST RESULTS	4
1.1. Emissions	4
1.1.1. <i>Radiated Emissions</i>	4
1.1.1.1. TX Spurious & Restricted Band Emissions (1 – 18 GHz)	7
1.1.1.2. TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)	25
1.1.1.3. Digital Emissions (0.03 - 1 GHz)	34
A. APPENDIX - GRAPHICAL IMAGES	39
A.1. Emissions	40
A.1.1. <i>Radiated Emissions</i>	40
A.1.1.1. TX Spurious & Restricted Band Emissions	40
A.1.2. <i>Digital Emissions (0.03 - 1 GHz)</i>	67

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



1. TEST RESULTS

Note: There are 8 different antenna models available for use with this equipment. The 3 antenna models tested are the highest gain of each antenna type representing the worst case in terms of emissions. Radiated Emissions testing was performed with the radio operating in the mode that exhibits the worst case emissions.

1.1. Emissions

1.1.1. Radiated Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions ([Restricted Bands](#))

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Limits for [Restricted Bands](#)
Peak emission: 74 dBuV/m
Average emission: 54 dBuV/m

Field Strength Calculation
The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.
FS = R + AF + CORR - FO

where:
FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss or Waveguide Loss

Example:
Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 5 of 70

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:
Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m

48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 6 of 70

- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).
- (e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 7 of 70

1.1.1.1. TX Spurious & Restricted Band Emissions (1 – 18 GHz)

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	Tai Sheng Chen 155-0010-00	Variant:	100 kbps FSK
Antenna Gain (dBi):	2.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	902.30	Data Rate:	100.00 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	1804.54	54.43	2.45	-13.63	43.25	Peak (NRB)	Horizontal	151	0	74.0	-30.8	Pass
Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 8 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	Tai Sheng Chen 155-0010-00	Variant:	100 kbps FSK
Antenna Gain (dBi):	2.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	915.20	Data Rate:	100 kbps
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2745.69	59.32	2.84	-11.35	50.81	Max Peak	Horizontal	153	76	74.0	-23.2	Pass
#2	2745.69	56.06	2.84	-11.35	47.55	Max Avg	Horizontal	153	76	54.0	-6.5	Pass
#3	6776.61	49.20	4.09	-7.83	45.46	Peak (NRB)	Horizontal	148	151	--	--	Pass
#4	9508.52	47.28	5.20	-5.91	46.57	Peak (NRB)	Horizontal	148	68	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 9 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	Tai Sheng Chen 155-0010-00	Variant:	100 kbps FSK
Antenna Gain (dBi):	2.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	926.90	Data Rate:	100 kbps
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2780.61	75.40	2.84	-11.33	66.91	Max Peak	Horizontal	184	349	74.0	-7.1	Pass
#2	2780.61	57.10	2.84	-11.33	48.61	Max Avg	Horizontal	184	349	54.0	-5.4	Pass
#3	6688.43	48.93	4.07	-7.98	45.02	Peak (NRB)	Vertical	161	256	--	--	Pass
#4	9575.51	47.76	5.24	-5.97	47.03	Peak (NRB)	Vertical	161	256	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 10 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	Tai Sheng Chen 155-0010-00	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	2.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	902.20	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2706.63	50.59	2.86	-11.38	42.07	Max Peak	Horizontal	114	291	74.0	-31.9	Pass
#2	2706.63	37.21	2.86	-11.38	28.69	Max Avg	Horizontal	114	291	54.0	-25.3	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 11 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions			
---	--	--	--

Antenna:	Tai Sheng Chen 155-0010-00	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	2.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	915.00	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

There are no emissions found within 6dB of the limit line.

[Click here to view measurement data...](#)

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 12 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions			
---	--	--	--

Antenna:	Tai Sheng Chen 155-0010-00	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	2.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	927.80	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

There are no emissions found within 6dB of the limit line.

[Click here to view measurement data...](#)

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 13 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	WP WPANT30104-S1C	Variant:	100 kbps FSK
Antenna Gain (dBi):	6.0	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	902.30	Data Rate:	100 kbps
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5143.67	49.40	3.70	-11.59	41.51	Max Peak	Vertical	169	40	74.0	-32.5	Pass
#2	5143.67	36.29	3.70	-11.59	28.40	Max Avg	Vertical	169	40	54.0	-25.6	Pass
#3	8811.59	47.81	4.96	-7.14	45.63	Peak (NRB)	Horizontal	151	144	--	--	Pass
#4	9996.03	47.49	5.36	-5.19	47.66	Peak (NRB)	Horizontal	148	128	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 14 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	WP WPANT30104-S1C	Variant:	100 kbps FSK
Antenna Gain (dBi):	6.0	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	915.20	Data Rate:	100 kbps
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	4508.35	50.66	3.51	-11.57	42.60	Max Peak	Vertical	153	78	74.0	-31.4	Pass
#2	4508.35	36.95	3.51	-11.57	28.89	Max Avg	Vertical	153	78	54.0	-25.1	Pass
#3	8931.51	47.00	5.04	-6.79	45.25	Peak (NRB)	Horizontal	100	14	--	--	Pass
#4	9671.06	46.62	5.24	-6.14	45.72	Peak (NRB)	Vertical	200	179	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 15 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	WP WPANT30104-S1C	Variant:	100 kbps FSK
Antenna Gain (dBi):	6.0	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	926.90	Data Rate:	100 kbps
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	7489.88	48.09	4.37	-7.10	45.36	Max Peak	Horizontal	122	74	74.0	-28.6	Pass
#2	7489.88	34.60	4.37	-7.10	31.87	Max Avg	Horizontal	122	74	54.0	-22.1	Pass
#3	8984.57	47.36	5.01	-6.81	45.56	Peak (NRB)	Vertical	100	360	--	--	Pass
#4	9544.73	48.02	5.23	-5.94	47.31	Peak (NRB)	Vertical	151	0	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 16 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions			
---	--	--	--

Antenna:	WP WPANT30104-S1C	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	6.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	902.20	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	JMH

Test Measurement Results

There are no emissions found within 6dB of the limit line.

[Click here to view measurement data...](#)

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 17 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions			
---	--	--	--

Antenna:	WP WPANT30104-S1C	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	6.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	915.00	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	JMH

Test Measurement Results

There are no emissions found within 6dB of the limit line.

[Click here to view measurement data...](#)

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 18 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions			
---	--	--	--

Antenna:	WP WPANT30104-S1C	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	6.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	927.80	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	JMH

Test Measurement Results

There are no emissions found within 6dB of the limit line.

[Click here to view measurement data...](#)

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 19 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	WP WPANT40010-C	Variant:	100 kbps FSK
Antenna Gain (dBi):	1.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	902.30	Data Rate:	100.00 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	1804.68	67.40	2.45	-13.63	56.22	Peak (NRB)	Horizontal	151	136	74.0	-17.8	Pass
Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 20 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	WP WPANT40010-C	Variant:	100 kbps FSK
Antenna Gain (dBi):	1.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	915.20	Data Rate:	100.00 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	1830.42	69.66	2.45	-13.54	58.57	Peak (NRB)	Horizontal	100	11	74.0	-15.4	Pass
#2	2745.58	56.87	2.84	-11.35	48.36	Max Peak	Vertical	185	68	74.0	-25.6	Pass
#3	2745.58	52.08	2.84	-11.35	43.57	Max Avg	Vertical	185	68	54.0	-10.4	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 21 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	WP WPANT40010-C	Variant:	100 kbps FSK
Antenna Gain (dBi):	1.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	926.90	Data Rate:	100.00 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1853.85	70.33	2.48	-13.43	59.38	Peak (NRB)	Horizontal	151	360	74.0	-14.6	Pass
#2	2780.82	58.80	2.84	-11.33	50.31	Max Peak	Vertical	182	64	74.0	-23.7	Pass
#3	2780.82	54.76	2.84	-11.33	46.27	Max Avg	Vertical	182	64	54.0	-7.7	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 22 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	WP WPANT40010-C	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	1.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	902.20	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1830.00	68.47	2.45	-13.54	57.38	Peak (NRB)	Horizontal	100	0	74.0	-16.6	Pass
#2	2745.10	57.37	2.84	-11.35	48.86	Max Peak	Horizontal	139	306	74.0	-25.1	Pass
#3	2745.10	52.52	2.84	-11.35	44.01	Max Avg	Horizontal	139	306	54.0	-10.0	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 23 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	WP WPANT40010-C	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	1.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	915.00	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1830.02	69.93	2.45	-13.54	58.84	Peak (NRB)	Horizontal	151	32	--	--	Pass
#2	2745.14	57.62	2.84	-11.35	49.11	Max Peak	Horizontal	193	329	74.0	-24.9	Pass
#3	2745.14	53.48	2.84	-11.35	44.97	Max Avg	Horizontal	193	329	54.0	-9.0	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 24 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	WP WPANT40010-C	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	1.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	927.80	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1855.62	67.07	2.49	-13.41	56.15	Peak (NRB)	Horizontal	151	32	--	--	Pass
#2	2783.69	56.73	2.85	-11.33	48.25	Max Peak	Vertical	157	102	74.0	-25.8	Pass
#3	2783.69	51.24	2.85	-11.33	42.76	Max Avg	Vertical	157	102	54.0	-11.2	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 25 of 70

1.1.1.2. TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Antenna:	Tai Sheng Chen 155-0010-00	Variant:	100 kbps FSK
Antenna Gain (dBi):	2.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	902.30	Data Rate:	100.00 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	838.30	46.87	6.20	-8.49	44.58	Peak (NRB)	Horizontal	100	0	--	--	Pass
#2	850.32	45.19	6.26	-8.29	43.16	Peak (NRB)	Horizontal	100	72	--	--	Pass
#3	902.21	39.32	6.34	-7.79	37.87	Fundamental	Vertical	100	78	--	--	Pass
#4	954.29	47.22	6.47	-7.06	46.63	Peak (NRB)	Vertical	100	0	--	--	Pass
#5	966.23	47.18	6.49	-7.03	46.64	MaxQP	Vertical	153	7	53.0	-6.4	Pass
Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.												

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 26 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Antenna:	Tai Sheng Chen 155-0010-00	Variant:	100 kbps FSK
Antenna Gain (dBi):	2.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	915.20	Data Rate:	100.00 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	846.77	47.22	6.27	-8.35	45.14	Peak (NRB)	Horizontal	100	189	--	--	Pass
#2	858.88	48.75	6.24	-8.21	46.78	Peak (NRB)	Horizontal	100	139	--	--	Pass
#3	910.81	47.18	6.36	-7.67	45.87	Fundamental	Horizontal	100	43	--	--	Pass
#4	988.81	47.07	6.54	-6.65	46.96	MaxQP	Vertical	100	23	53.0	-6.0	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 27 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Antenna:	Tai Sheng Chen 155-0010-00	Variant:	100 kbps FSK
Antenna Gain (dBi):	2.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	926.90	Data Rate:	100.00 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	848.90	45.19	6.26	-8.31	43.14	Peak (NRB)	Vertical	100	25	--	--	Pass
#2	862.93	43.08	6.25	-8.19	41.14	Peak (NRB)	Vertical	100	25	--	--	Pass
#3	926.92	69.85	6.43	-7.51	68.77	Fundamental	Horizontal	100	25	--	--	Pass
#4	960.00	38.33	6.49	-7.15	37.67	MaxQP	Horizontal	100	135	46.0	-8.3	Pass
Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.												

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 28 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Antenna:	WP WPANT30104-S1C	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	6.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	902.20	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	30.00	28.80	3.42	-9.72	22.50	Peak (NRB)	Vertical	100	60	--	--	Pass
#2	37.78	28.36	3.48	-16.06	15.78	Peak (Scan)	Vertical	100	60	40.0	-24.2	Pass
#3	45.55	31.92	3.54	-21.45	14.01	Peak (NRB)	Vertical	100	60	--	--	Pass
#4	72.77	29.81	3.73	-23.08	10.46	Peak (NRB)	Vertical	100	60	--	--	Pass
#5	774.15	48.99	6.05	-9.20	45.84	Peak (NRB)	Vertical	100	121	--	--	Pass
#6	838.32	48.01	6.20	-8.49	45.72	Peak (NRB)	Vertical	100	121	--	--	Pass
#7	850.20	50.37	6.26	-8.29	48.34	Peak (NRB)	Vertical	100	121	--	--	Pass
#8	902.21	48.89	6.34	-7.79	47.44	Fundamental	Vertical	100	121	--	--	Pass
#9	954.21	47.74	6.47	-7.06	47.15	Peak (NRB)	Vertical	100	121	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 29 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Antenna:	WP WPANT30104-S1C	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	6.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	915.00	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	35.83	29.06	3.47	-14.37	18.16	Peak (NRB)	Vertical	100	28	--	--	Pass
#2	160.24	45.11	6.24	-8.21	43.14	Peak (NRB)	Horizontal	100	39	--	--	Pass
#3	782.83	48.13	6.05	-9.08	45.10	Peak (NRB)	Vertical	100	28	--	--	Pass
#4	858.80	48.47	6.24	-8.21	46.50	Peak (NRB)	Vertical	100	39	--	--	Pass
#5	910.81	42.83	6.36	-7.67	41.52	Fundamental	Vertical	100	39	--	--	Pass
#6	962.79	47.84	6.48	-7.09	47.23	MaxQP	Vertical	135	97	53.0	-5.8	Pass
Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.												

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 30 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Antenna:	WP WPANT30104-S1C	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	6.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	927.80	Data Rate:	6.25 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	30.00	28.58	3.42	-9.72	22.28	Peak (NRB)	Vertical	100	47	--	--	Pass
#2	33.89	32.10	3.45	-12.88	22.67	Peak (NRB)	Vertical	100	47	--	--	Pass
#3	849.80	49.73	6.26	-8.29	47.70	Peak (NRB)	Vertical	100	47	--	--	Pass
#4	863.83	48.64	6.25	-8.18	46.71	Peak (NRB)	Vertical	100	47	--	--	Pass
#5	927.80	82.53	6.43	-7.44	81.52	Fundamental	Vertical	100	47	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 31 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Antenna:	WP WPANT40010-C	Variant:	100 kbps FSK
Antenna Gain (dBi):	1.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	902.30	Data Rate:	100.00 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	33.74	52.94	3.45	-12.88	43.51	Peak (NRB)	Vertical	100	17	--	--	Pass
#2	49.52	31.07	3.57	-23.14	11.50	Peak (NRB)	Vertical	100	151	--	--	Pass
#3	824.25	36.69	6.17	-8.35	34.51	Peak (NRB)	Horizontal	100	151	--	--	Pass
#4	824.25	40.06	6.17	-8.35	37.88	Peak (NRB)	Horizontal	100	124	--	--	Pass
#5	850.32	47.93	6.26	-8.29	45.90	Peak (NRB)	Horizontal	100	151	--	--	Pass
#6	902.37	40.15	6.34	-7.79	38.70	Fundamental	Horizontal	100	85	--	--	Pass
#7	954.37	46.65	6.47	-7.06	46.06	Peak (NRB)	Horizontal	100	0	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 32 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Antenna:	WP WPANT40010-C	Variant:	100 kbps FSK
Antenna Gain (dBi):	1.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	915.20	Data Rate:	100.00 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	63.06	31.13	3.66	-23.71	11.08	Peak (NRB)	Vertical	100	85	--	--	Pass
#2	837.26	52.09	6.20	-8.48	49.81	Peak (NRB)	Horizontal	100	85	--	--	Pass
#3	851.29	49.72	6.26	-8.29	47.69	Peak (NRB)	Horizontal	100	85	--	--	Pass
#4	863.17	49.91	6.25	-8.19	47.97	Peak (NRB)	Horizontal	100	85	--	--	Pass
#5	915.25	40.88	6.39	-7.75	39.52	Fundamental	Horizontal	100	1	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 33 of 70

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Antenna:	WP WPANT40010-C	Variant:	100 kbps FSK
Antenna Gain (dBi):	1.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	926.90	Data Rate:	100.00 KBit/s
Power Setting:	29	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	61.60	75.61	3.66	-23.92	55.35	Peak (NRB)	Vertical	100	1	--	--	Pass
#2	848.82	53.52	6.26	-8.31	51.47	Peak (NRB)	Horizontal	100	32	--	--	Pass
#3	862.85	52.82	6.25	-8.19	50.88	Peak (NRB)	Horizontal	100	32	--	--	Pass
#4	926.92	71.27	6.43	-7.51	70.19	Fundamental	Vertical	100	32	--	--	Pass
#5	959.00	41.53	6.49	-7.13	40.89	Peak (NRB)	Vertical	100	32	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 34 of 70

1.1.1.3. Digital Emissions (0.03 - 1 GHz)

Radiated Test Conditions for Radiated Digital Emissions (0.03 – 1 GHz)			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Digital Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Digital Emissions (0.03 – 1 GHz)

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dBmV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are done as:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100\text{mV/m}$$

$$48 \text{ dBmV/m} = 250\text{mV/m}$$

Limits for Radiated Digital Emissions (0.03 – 1 GHz)

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 35 of 70

Frequency (MHz)	Field Strength		Measurement Distance (m)
	$\mu\text{V/m}$ (microvolts/meter)	$\text{dB}\mu\text{V/m}$ (dB microvolts/meter)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F(kHz)	--	30
1.705-30.0	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46.0	3
Above 960	500	54.0	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241. (b) In the emission table above, the tighter limit applies at the band edges. (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. (e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part. (f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device. (g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 36 of 70

Equipment Configuration for Digital Emissions (0.03 - 1 GHz)

Antenna:	Tai Sheng Chen 155-0010-00	Variant:	100 kbps FSK
Antenna Gain (dBi):	2.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	Not Applicable
Channel Frequency (MHz):	915.20	Data Rate:	100.00 KBit/s
Power Setting:	Not Applicable	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	862.93	43.04	6.25	-8.19	41.10	MaxQP	Horizontal	102	141	46.0	-4.9	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 37 of 70

Equipment Configuration for Digital Emissions (0.03 - 1 GHz)

Antenna:	WP WPANT30104-S1C	Variant:	6.25 kbps OQPSK
Antenna Gain (dBi):	6.00	Modulation:	OQPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	Not Applicable
Channel Frequency (MHz):	915.00	Data Rate:	6.25 KBit/s
Power Setting:	Not Applicable	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	39.72	24.73	3.50	-17.56	10.67	MaxQP	Vertical	388	1	40.0	-29.3	Pass
Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.												

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 38 of 70

Equipment Configuration for Digital Emissions (0.03 - 1 GHz)

Antenna:	WP WPANT40010-C	Variant:	100 kbps FSK
Antenna Gain (dBi):	1.00	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	Not Applicable
Channel Frequency (MHz):	902.30	Data Rate:	100.00 KBit/s
Power Setting:	Not Applicable	Tested By:	OC

Test Measurement Results

30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	855.69	43.52	6.24	-8.27	41.49	MaxQP	Horizontal	100	27	46.0	-4.5	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

Note: The configuration tested represents the worst case in terms of emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 39 of 70

A. APPENDIX - GRAPHICAL IMAGES

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 40 of 70

A.1. Emissions

A.1.1. Radiated Emissions

A.1.1.1. TX Spurious & Restricted Band Emissions

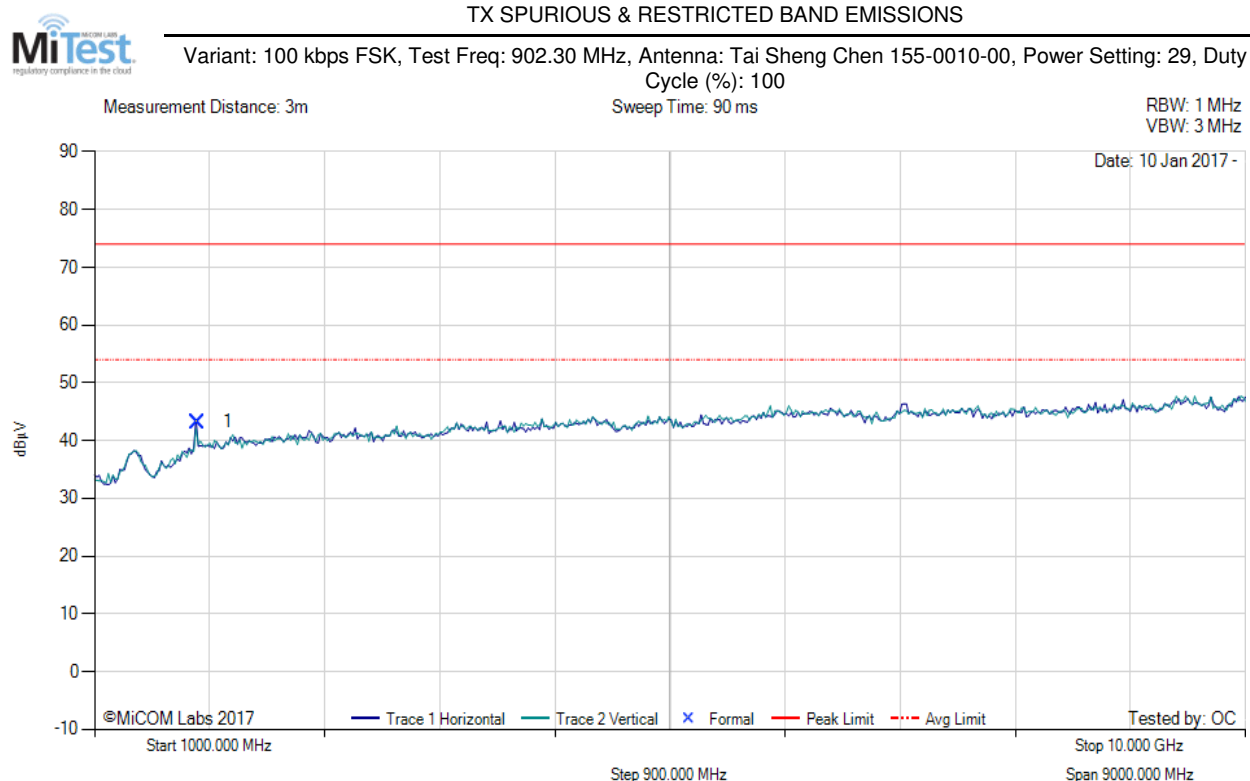

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1804.54	54.43	2.45	-13.63	43.25	Peak (NRB)	Horizontal	151	0	74.0	-30.8	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 41 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 100 kbps FSK, Test Freq: 915.20 MHz, Antenna: Tai Sheng Chen 155-0010-00, Power Setting: 29, Duty Cycle (%): 100


Measurement Distance: 3m

Sweep Time: 90 ms

RBW: 1 MHz

VBW: 3 MHz

Date: 04 Jan 2017 -

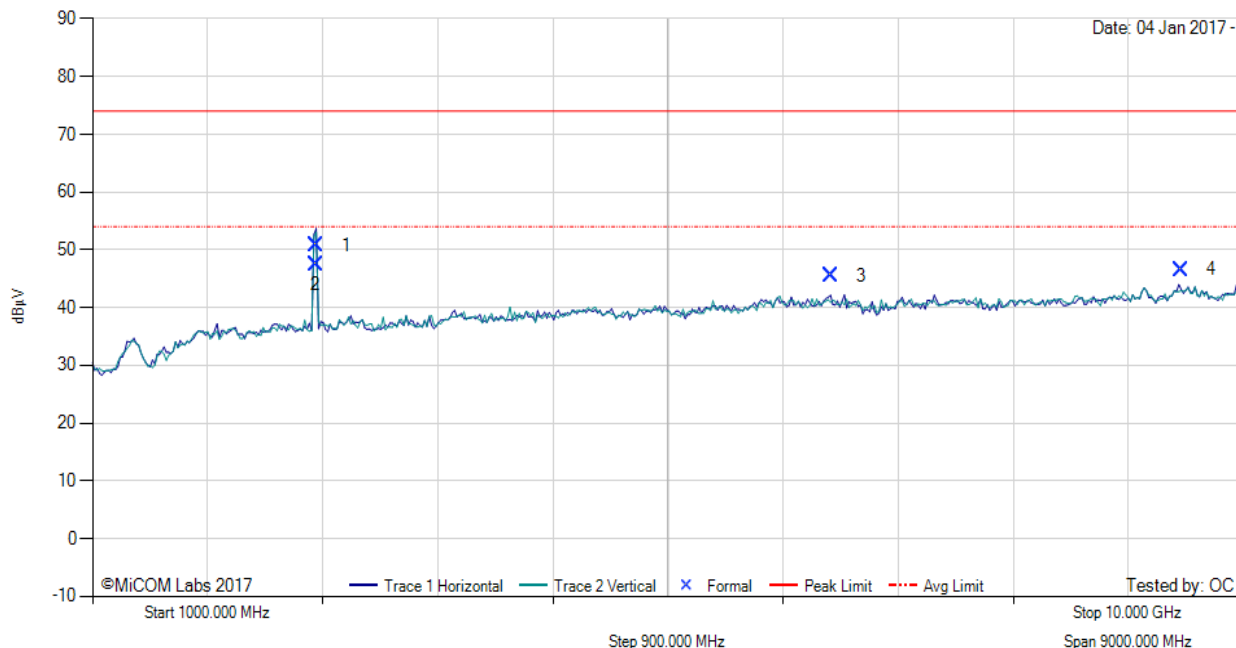

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2745.69	59.32	2.84	-11.35	50.81	Max Peak	Horizontal	153	76	74.0	-23.2	Pass
2	2745.69	56.06	2.84	-11.35	47.55	Max Avg	Horizontal	153	76	54.0	-6.5	Pass
3	6776.61	49.20	4.09	-7.83	45.46	Peak (NRB)	Horizontal	148	151	--	--	Pass
4	9508.52	47.28	5.20	-5.91	46.57	Peak (NRB)	Horizontal	148	68	--	--	Pass
Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.												

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 42 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 100 kbps FSK, Test Freq: 926.90 MHz, Antenna: Tai Sheng Chen 155-0010-00, Power Setting: 29, Duty Cycle (%): 100

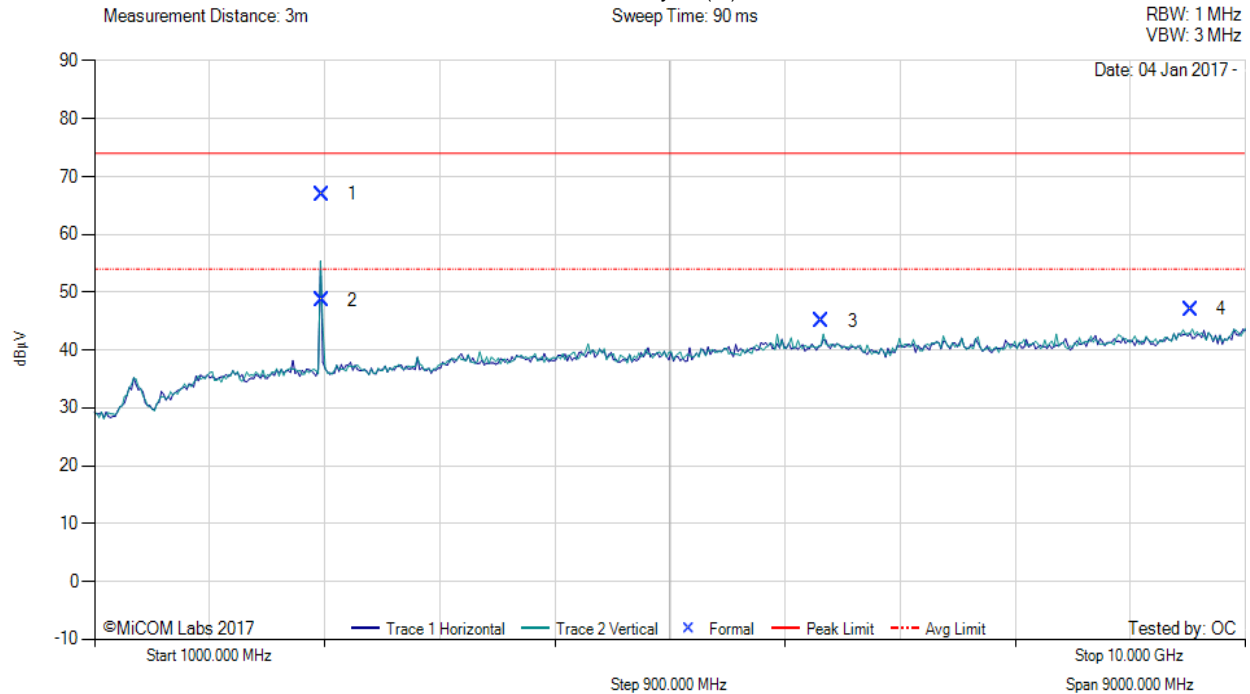

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2780.61	75.40	2.84	-11.33	66.91	Max Peak	Horizontal	184	349	74.0	-7.1	Pass
2	2780.61	57.10	2.84	-11.33	48.61	Max Avg	Horizontal	184	349	54.0	-5.4	Pass
3	6688.43	48.93	4.07	-7.98	45.02	Peak (NRB)	Vertical	161	256	--	--	Pass
4	9575.51	47.76	5.24	-5.97	47.03	Peak (NRB)	Vertical	161	256	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 43 of 70



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variation: 100 kbps FSK, Test Freq: 902.30 MHz, Antenna: Tai Sheng Chen 155-0010-00, Power Setting: 29, Duty Cycle (%): 100

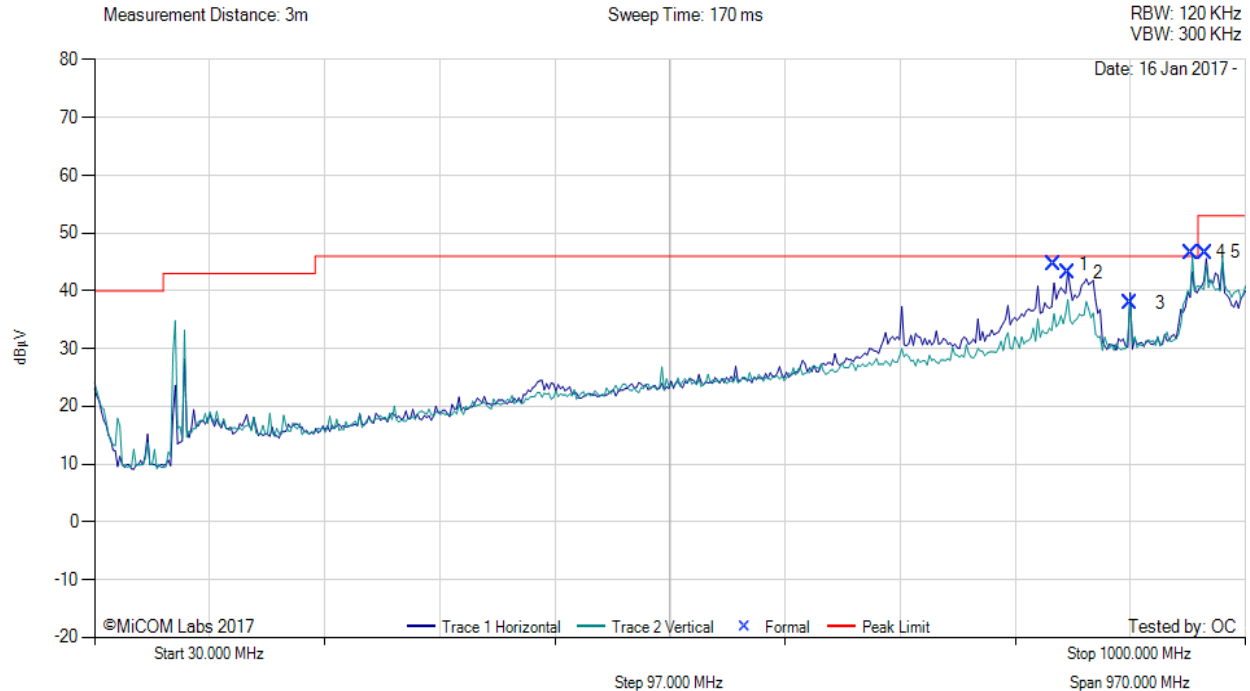

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	838.30	46.87	6.20	-8.49	44.58	Peak (NRB)	Horizontal	100	0	--	--	Pass
2	850.32	45.19	6.26	-8.29	43.16	Peak (NRB)	Horizontal	100	72	--	--	Pass
3	902.21	39.32	6.34	-7.79	37.87	Fundamental	Vertical	100	78	46.0	-8.1	Pass
4	954.29	47.22	6.47	-7.06	46.63	Peak (NRB)	Vertical	100	0	--	--	Pass
5	966.23	47.18	6.49	-7.03	46.64	MaxQP	Vertical	153	7	53.0	-6.4	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

The above plot shows peak emissions.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 44 of 70



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)


Variant: 100 kbps FSK, Test Freq: 915.20 MHz, Antenna: Tai Sheng Chen 155-0010-00, Power Setting: 29, Duty Cycle (%): 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz
VBW: 300 KHz

Date: 16 Jan 2017 -

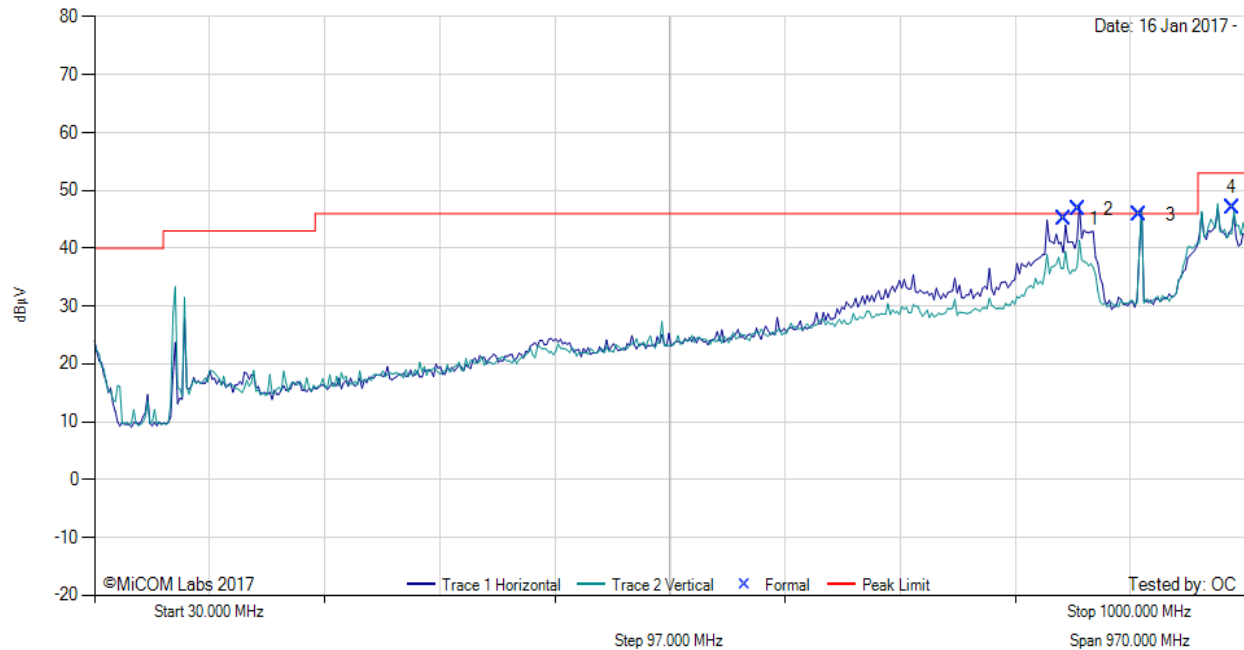

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	846.77	47.22	6.27	-8.35	45.14	Peak (NRB)	Horizontal	100	189	--	--	Pass
2	858.88	48.75	6.24	-8.21	46.78	Peak (NRB)	Horizontal	100	139	--	--	Pass
3	910.81	47.18	6.36	-7.67	45.87	Fundamental	Horizontal	100	43	--	--	Pass
4	988.81	47.07	6.54	-6.65	46.96	MaxQP	Vertical	100	23	53.0	-6.0	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 45 of 70



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variation: 100 kbps FSK, Test Freq: 926.90 MHz, Antenna: Tai Sheng Chen 155-0010-00, Power Setting: 29, Duty Cycle (%): 100

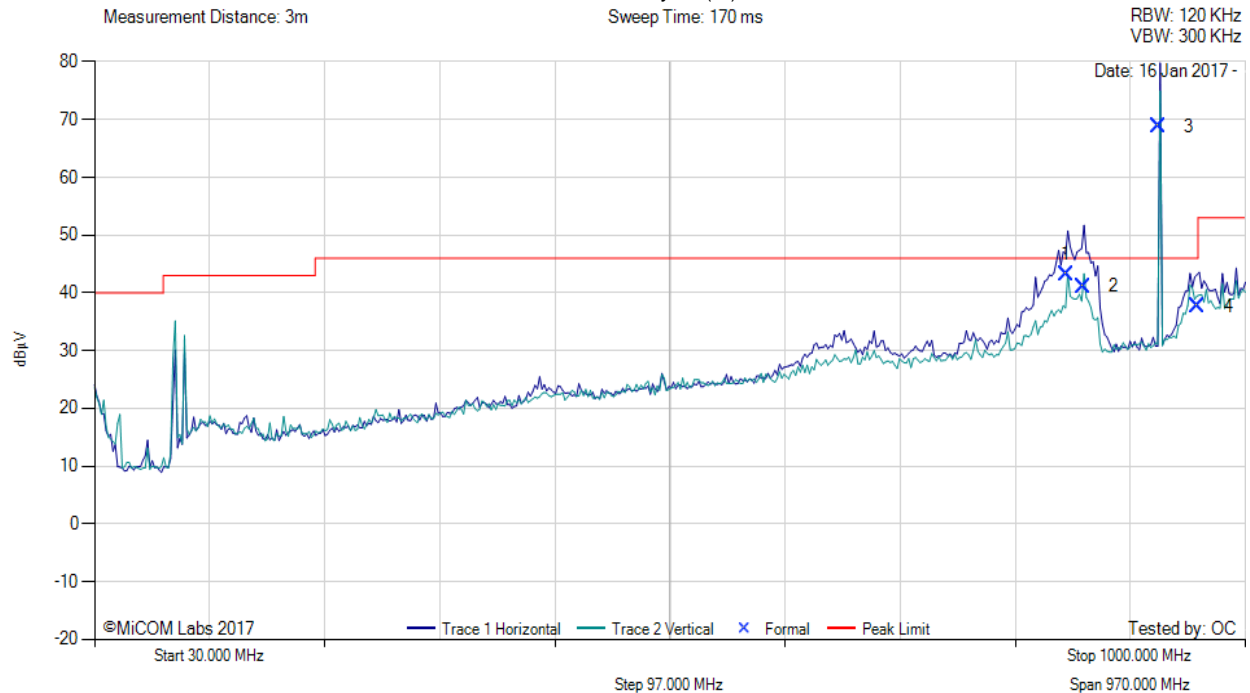

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	848.90	45.19	6.26	-8.31	43.14	Peak (NRB)	Vertical	100	25	--	--	Pass
2	862.93	43.08	6.25	-8.19	41.14	Peak (NRB)	Vertical	100	25	--	--	Pass
3	926.92	69.85	6.43	-7.51	68.77	Fundamental	Horizontal	100	25	--	--	Pass
4	960.00	38.33	6.49	-7.15	37.67	MaxQP	Horizontal	100	135	46.0	-8.3	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)


The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 6.25 kbps OQPSK, Test Freq: 902.20 MHz, Antenna: Tai Sheng Chen 155-0010-00, Power Setting: 29, Duty Cycle (%): 100

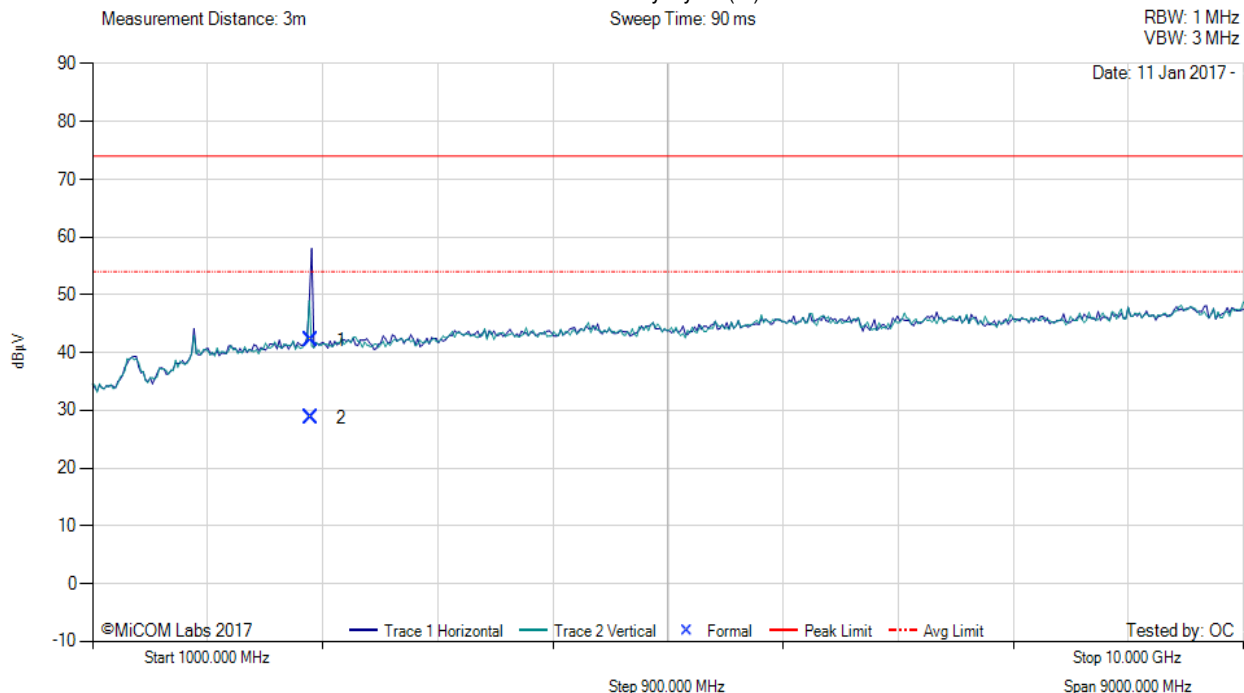

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2706.63	50.59	2.86	-11.38	42.07	Max Peak	Horizontal	114	291	74.0	-31.9	Pass
2	2706.63	37.21	2.86	-11.38	28.69	Max Avg	Horizontal	114	291	54.0	-25.3	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 47 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 6.25 kbps OQPSK, Test Freq: 915.00 MHz, Antenna: Tai Sheng Chen 155-0010-00, Power Setting: 29, Duty Cycle (%): 100

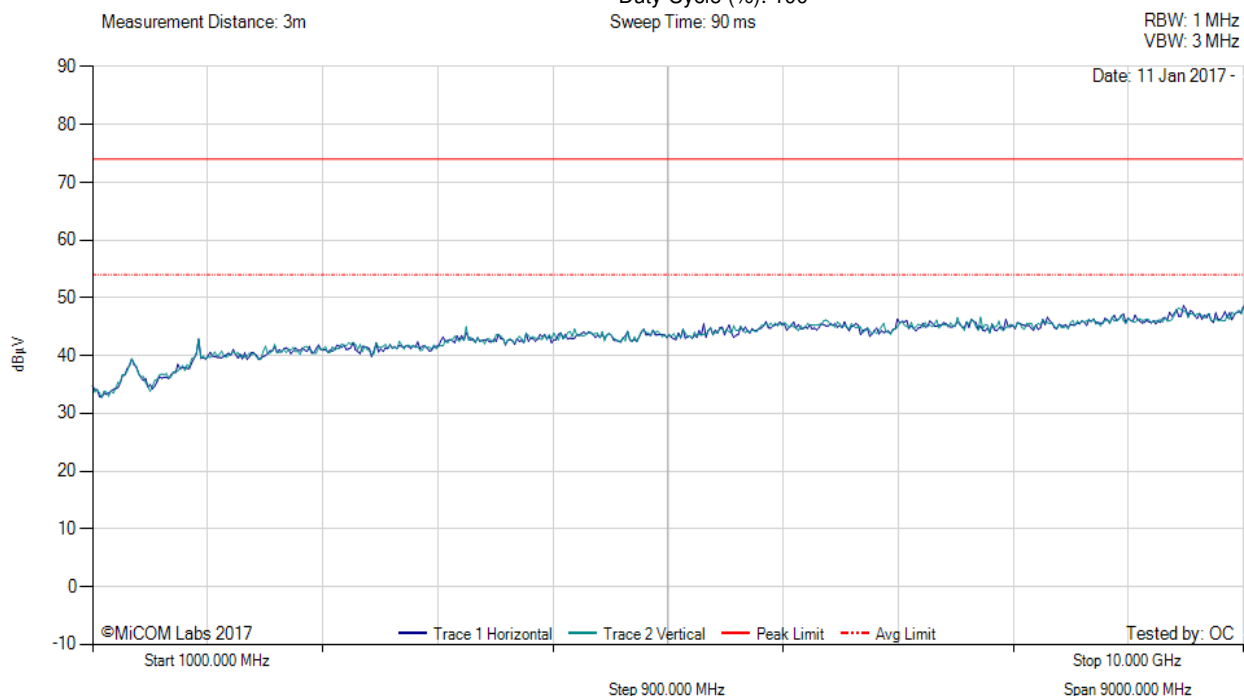

There are no emissions found within 6dB of the limit line.

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 48 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS


Variant: 6.25 kbps OQPSK, Test Freq: 927.80 MHz, Antenna: Tai Sheng Chen 155-0010-00, Power Setting: 29, Duty Cycle (%): 100

Measurement Distance: 3m

Sweep Time: 90 ms

RBW: 1 MHz
VBW: 3 MHz

Date: 11 Jan 2017 -

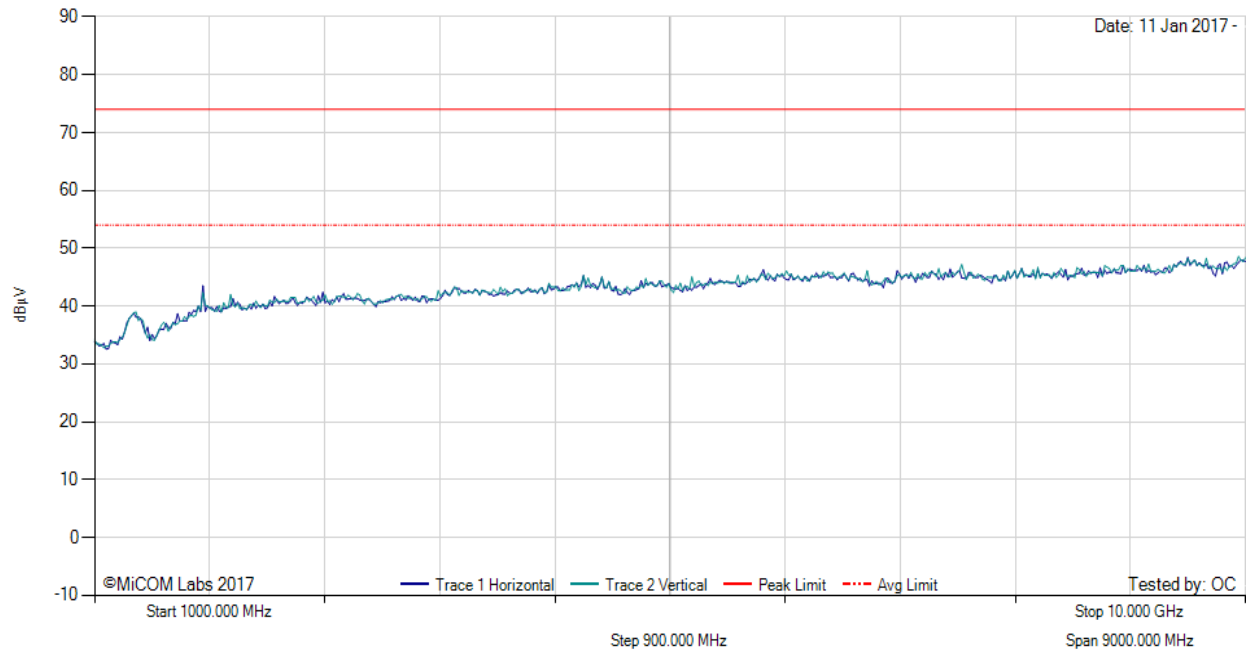

There are no emissions found within 6dB of the limit line.

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 49 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 100 kbps FSK, Test Freq: 902.30 MHz, Antenna: WP WPANT30104-S1C, Power Setting: 29, Duty Cycle (%): 100

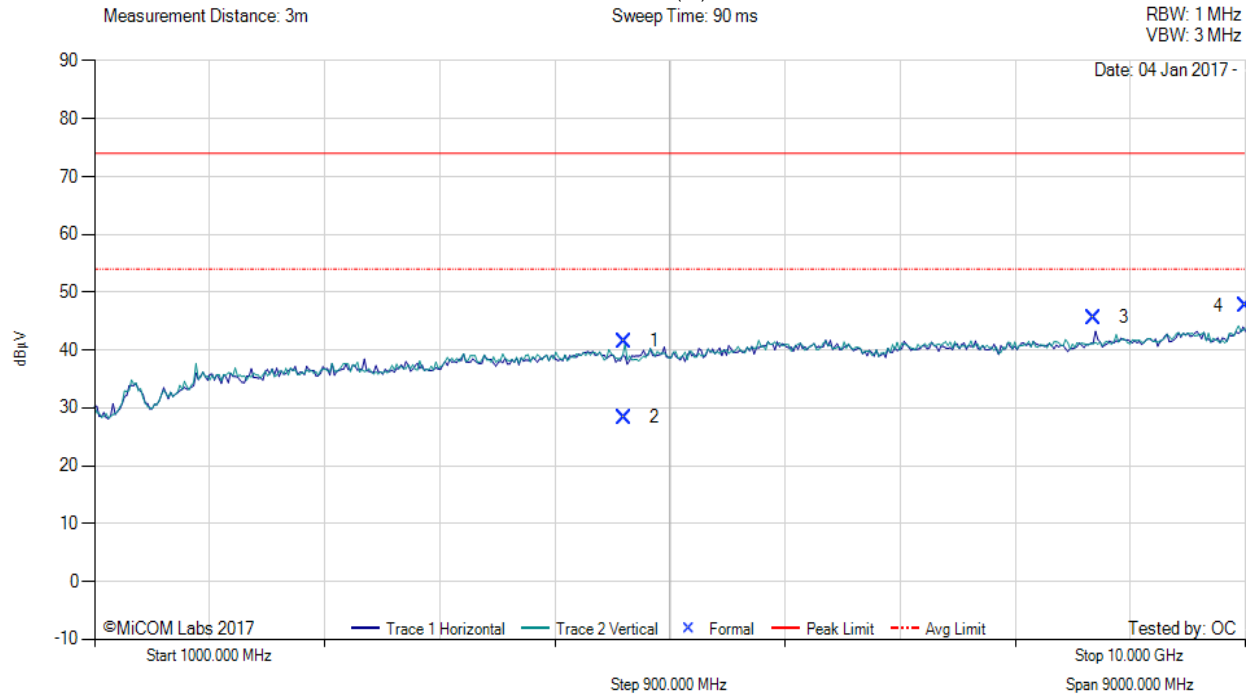

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5143.67	49.40	3.70	-11.59	41.51	Max Peak	Vertical	169	40	74.0	-32.5	Pass
2	5143.67	36.29	3.70	-11.59	28.40	Max Avg	Vertical	169	40	54.0	-25.6	Pass
3	8811.59	47.81	4.96	-7.14	45.63	Peak (NRB)	Horizontal	151	144	--	--	Pass
4	9996.03	47.49	5.36	-5.19	47.66	Peak (NRB)	Horizontal	148	128	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 50 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 100 kbps FSK, Test Freq: 915.20 MHz, Antenna: WP WPANT30104-S1C, Power Setting: 29, Duty Cycle (%): 100

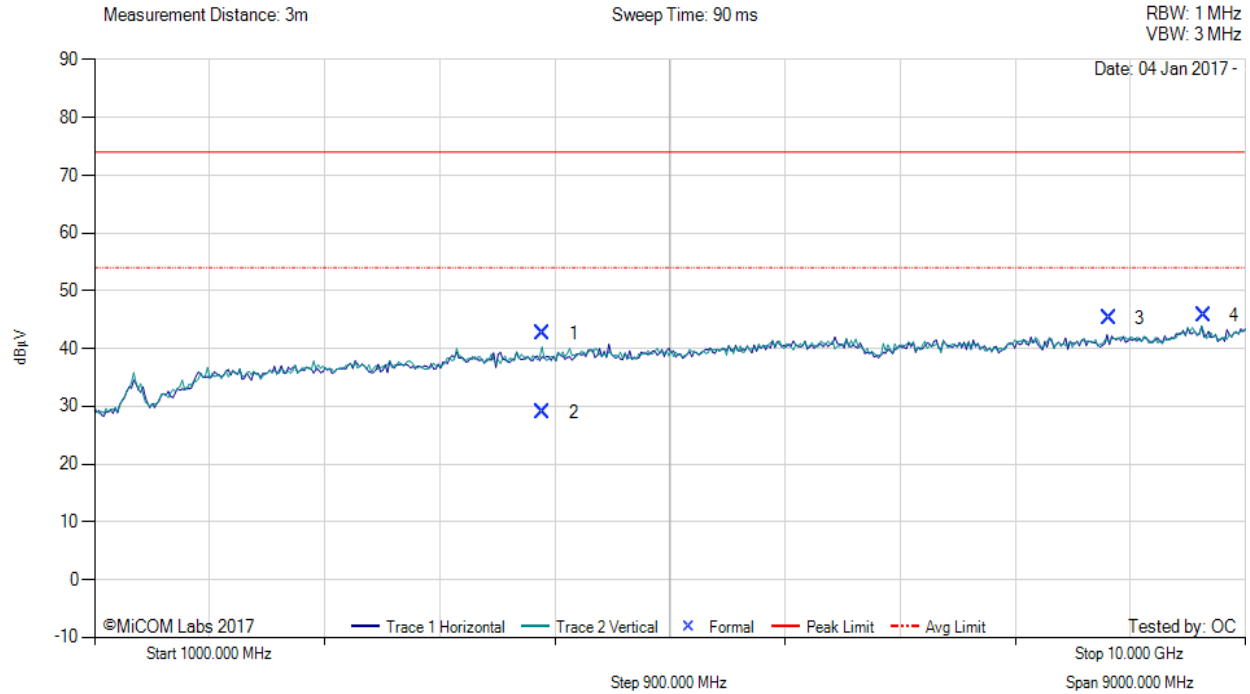

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	4508.35	50.66	3.51	-11.57	42.60	Max Peak	Vertical	153	78	74.0	-31.4	Pass
2	4508.35	36.95	3.51	-11.57	28.89	Max Avg	Vertical	153	78	54.0	-25.1	Pass
3	8931.51	47.00	5.04	-6.79	45.25	Peak (NRB)	Horizontal	100	14	--	--	Pass
4	9671.06	46.62	5.24	-6.14	45.72	Peak (NRB)	Vertical	200	179	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 51 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 100 kbps FSK, Test Freq: 926.90 MHz, Antenna: WP WPANT30104-S1C, Power Setting: 29, Duty Cycle (%): 100

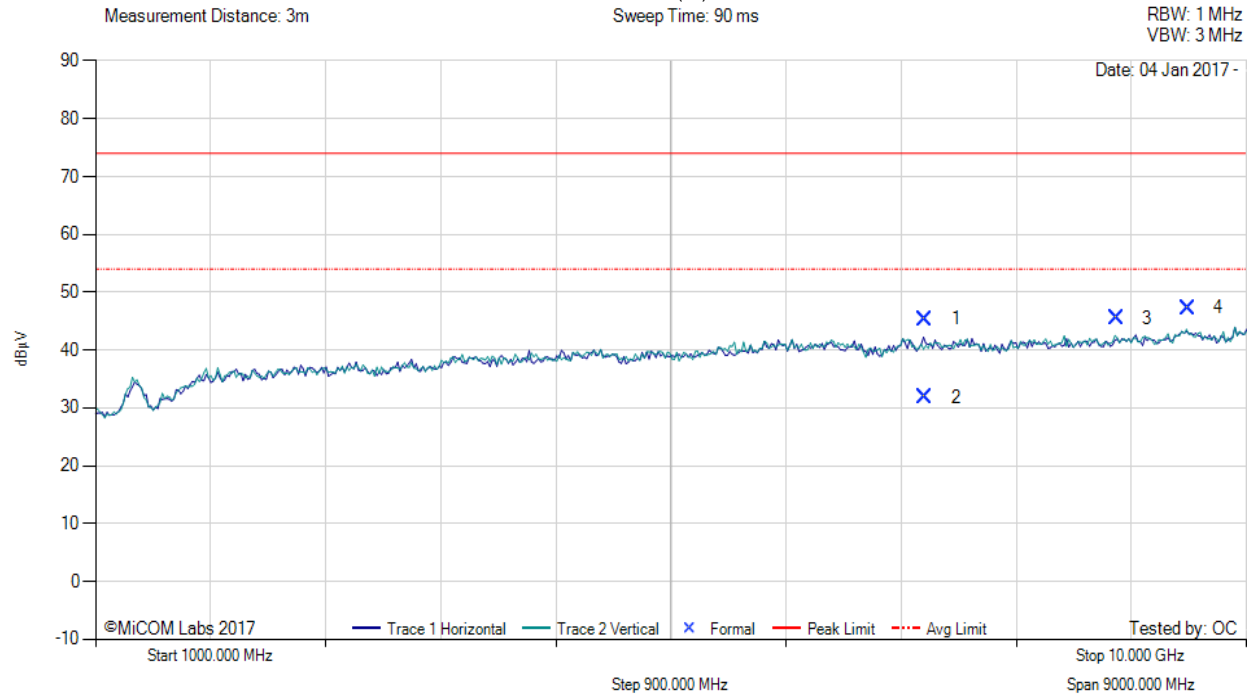

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	7489.88	48.09	4.37	-7.10	45.36	Max Peak	Horizontal	122	74	74.0	-28.6	Pass
2	7489.88	34.60	4.37	-7.10	31.87	Max Avg	Horizontal	122	74	54.0	-22.1	Pass
3	8984.57	47.36	5.01	-6.81	45.56	Peak (NRB)	Vertical	100	360	--	--	Pass
4	9544.73	48.02	5.23	-5.94	47.31	Peak (NRB)	Vertical	151	0	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 52 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 6.25 kbps OQPSK, Test Freq: 902.20 MHz, Antenna: WP WPANT30104-S1C, Power Setting: 29, Duty Cycle (%): 100

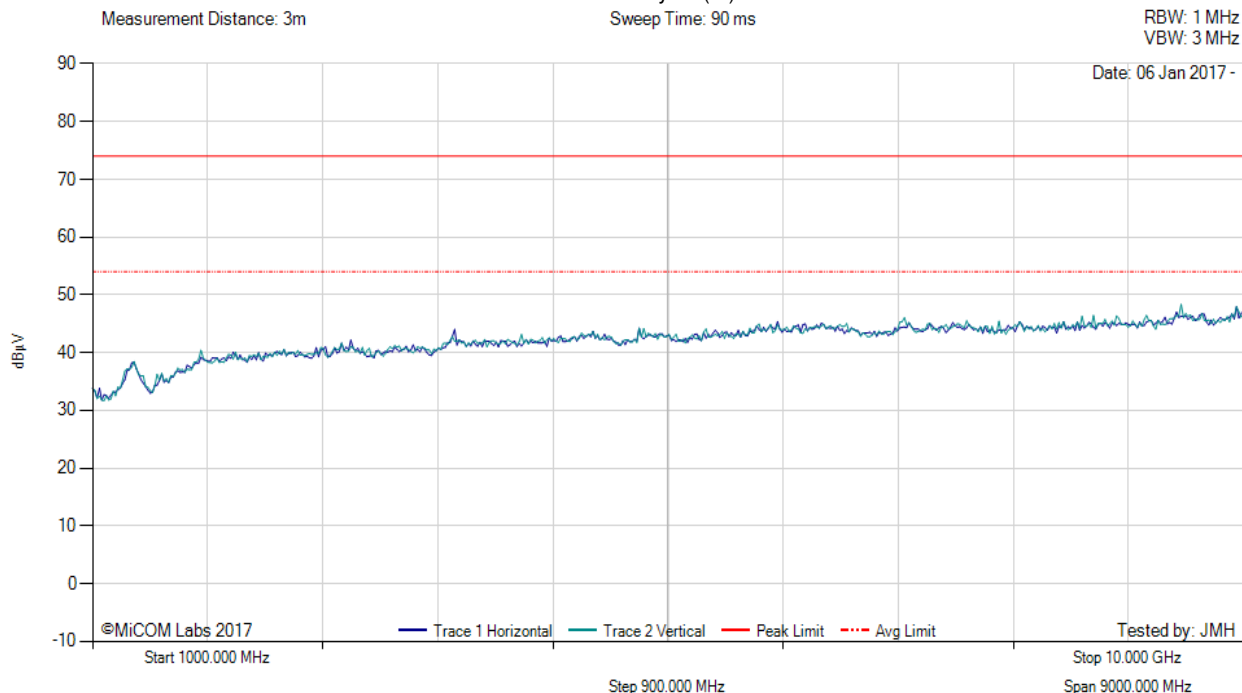

There are no emissions found within 6dB of the limit line.

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 53 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 6.25 kbps OQPSK, Test Freq: 915.00 MHz, Antenna: WP WPANT30104-S1C, Power Setting: 29, Duty Cycle (%): 100

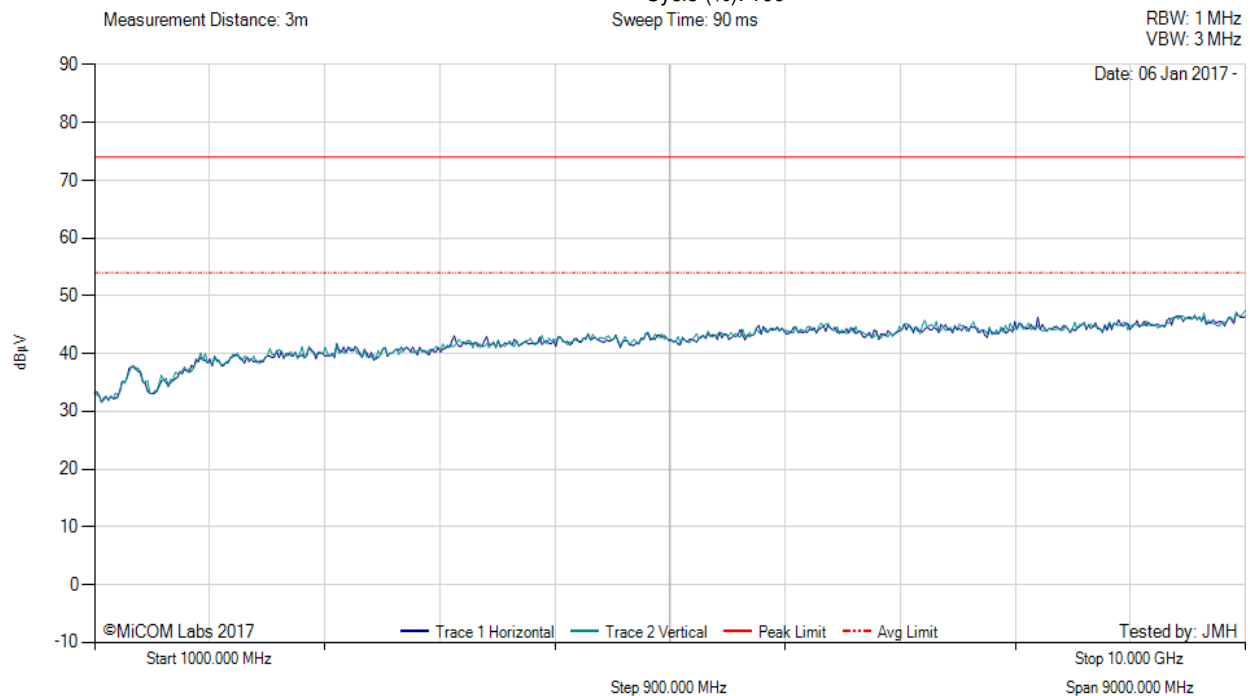

There are no emissions found within 6dB of the limit line.

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 54 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS


Variant: 6.25 kbps OQPSK, Test Freq: 927.80 MHz, Antenna: WP WPANT30104-S1C, Power Setting: 29, Duty Cycle (%): 100

Measurement Distance: 3m

Sweep Time: 90 ms

RBW: 1 MHz
VBW: 3 MHz

Date: 06 Jan 2017 -

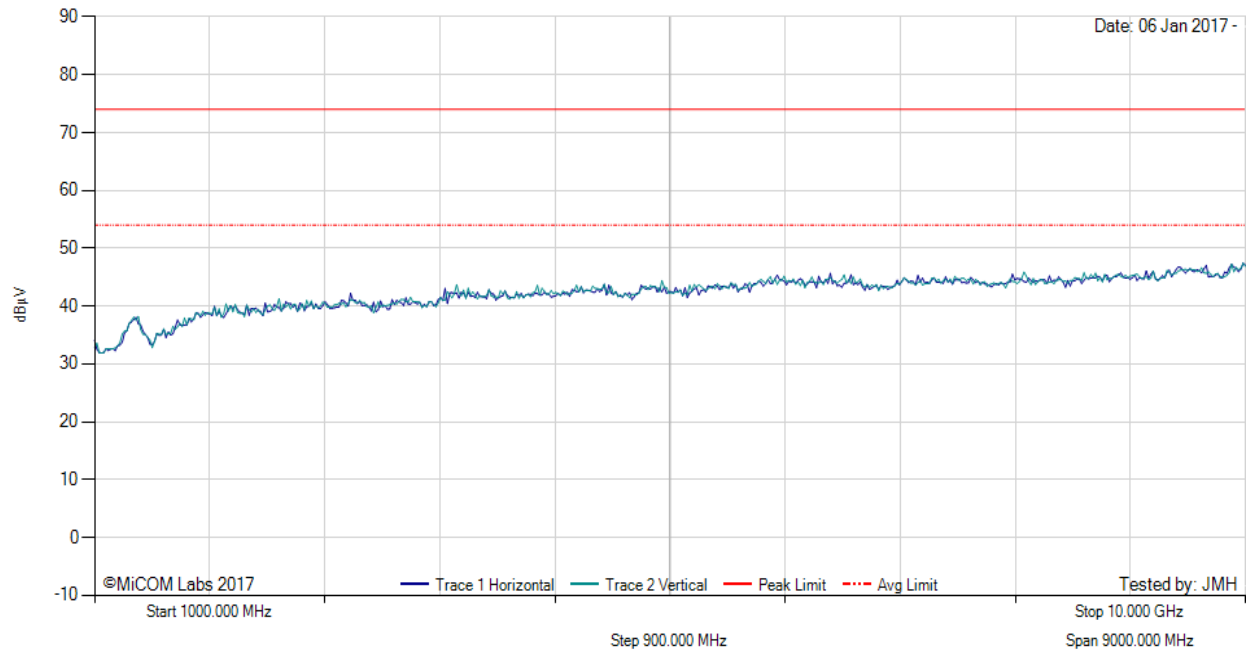

There are no emissions found within 6dB of the limit line.

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 55 of 70



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variant: 6.25 kbps OQPSK, Test Freq: 902.20 MHz, Antenna: WP WPANT30104-S1C, Power Setting: 29, Duty Cycle (%): 100

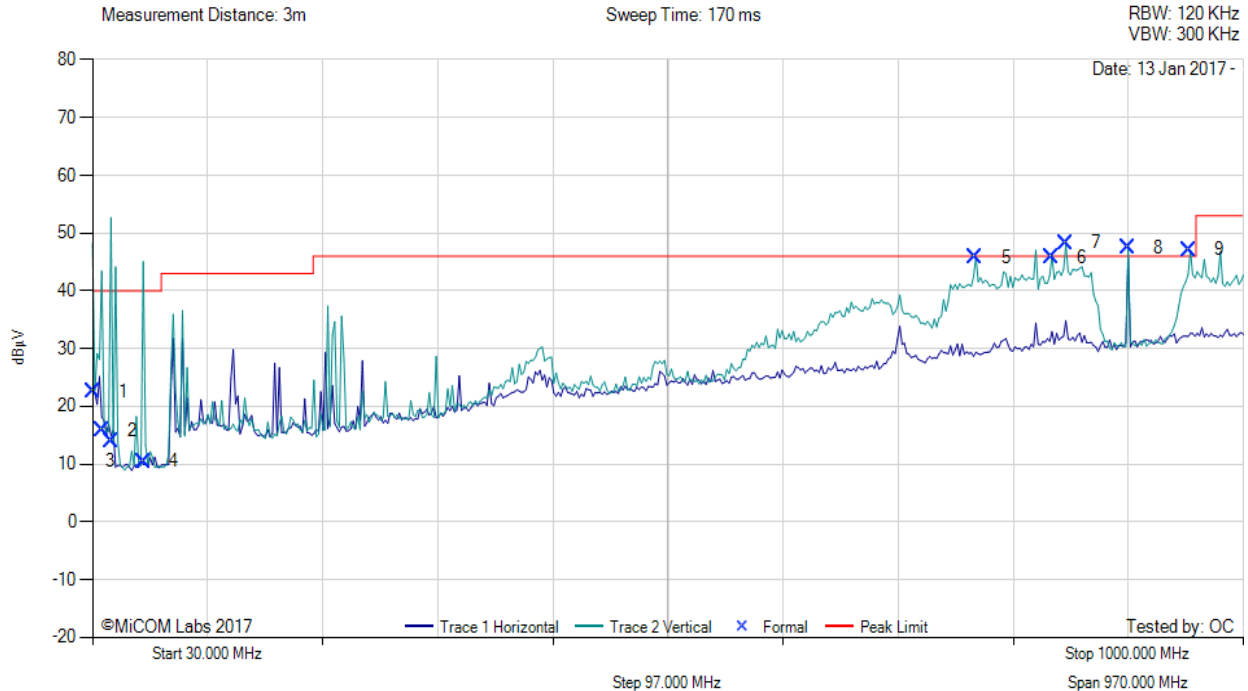

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	30.00	28.80	3.42	-9.72	22.50	Peak (NRB)	Vertical	100	60	--	--	Pass
2	37.78	28.36	3.48	-16.06	15.78	Peak (Scan)	Vertical	100	60	40.0	-24.2	Pass
3	45.55	31.92	3.54	-21.45	14.01	Peak (NRB)	Vertical	100	60	--	--	Pass
4	72.77	29.81	3.73	-23.08	10.46	Peak (NRB)	Vertical	100	60	--	--	Pass
5	774.15	48.99	6.05	-9.20	45.84	Peak (NRB)	Vertical	100	121	--	--	Pass
6	838.32	48.01	6.20	-8.49	45.72	Peak (NRB)	Vertical	100	121	--	--	Pass
7	850.20	50.37	6.26	-8.29	48.34	Peak (NRB)	Vertical	100	121	--	--	Pass
8	902.21	48.89	6.34	-7.79	47.44	Fundamental	Vertical	100	121	--	--	Pass
9	954.21	47.74	6.47	-7.06	47.15	Peak (NRB)	Vertical	100	121	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 56 of 70



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)


Variant: 6.25 kbps OQPSK, Test Freq: 915.00 MHz, Antenna: WP WPANT30104-S1C, Power Setting: 29, Duty Cycle (%): 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz
VBW: 300 KHz

Date: 13 Jan 2017 -

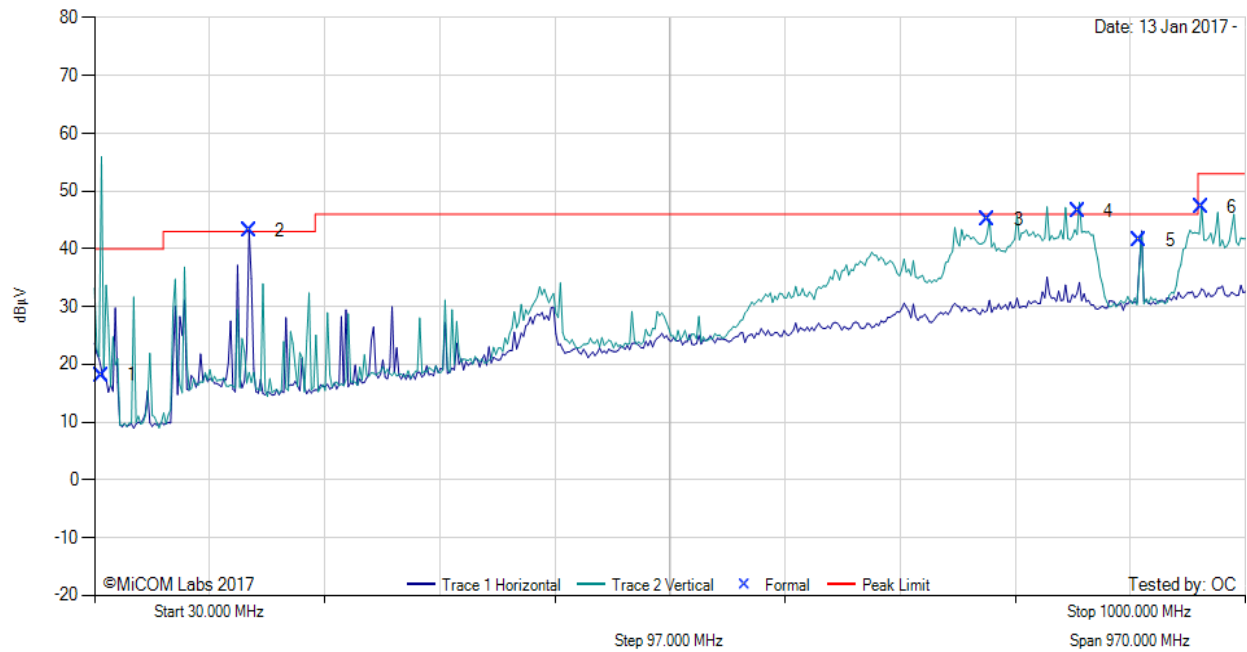

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	35.83	29.06	3.47	-14.37	18.16	Peak (NRB)	Vertical	100	28	--	--	Pass
2	160.24	45.11	6.24	-8.21	43.14	Peak (NRB)	Horizontal	100	39	--	--	Pass
3	782.83	48.13	6.05	-9.08	45.10	Peak (NRB)	Vertical	100	28	--	--	Pass
4	858.80	48.47	6.24	-8.21	46.50	Peak (NRB)	Vertical	100	39	--	--	Pass
5	910.81	42.83	6.36	-7.67	41.52	Fundamental	Vertical	100	39	--	--	Pass
6	962.79	47.84	6.48	-7.09	47.23	MaxQP	Vertical	135	97	53.0	-5.8	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 57 of 70



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variant: 6.25 kbps OQPSK, Test Freq: 927.80 MHz, Antenna: WP WPANT30104-S1C, Power Setting: 29, Duty Cycle (%): 100

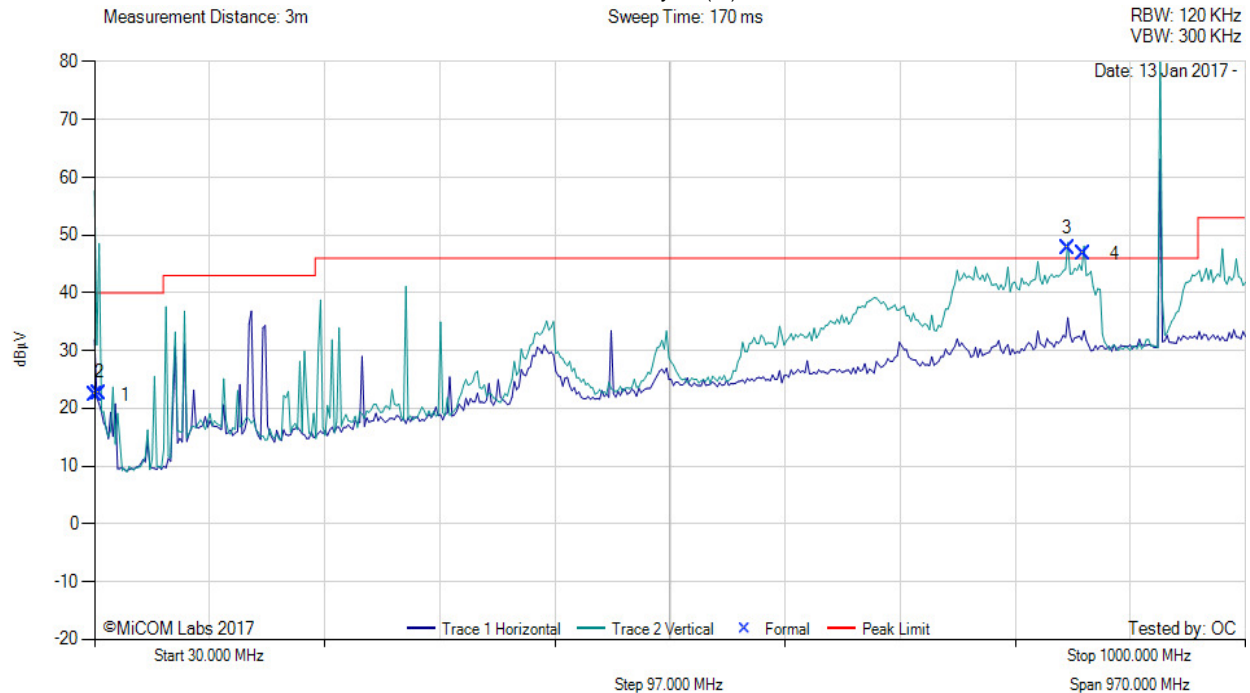

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	30.00	28.58	3.42	-9.72	22.28	Peak (NRB)	Vertical	100	47	--	--	Pass
2	33.89	32.10	3.45	-12.88	22.67	Peak (NRB)	Vertical	100	47	--	--	Pass
3	849.80	49.73	6.26	-8.29	47.70	Peak (NRB)	Vertical	100	47	--	--	Pass
4	863.83	48.64	6.25	-8.18	46.71	Peak (NRB)	Vertical	100	47	--	--	Pass
5	927.80	82.53	6.43	-7.44	81.52	Fundamental	Vertical	100	47	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 58 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 100 kbps FSK, Test Freq: 902.30 MHz, Antenna: WP WPANT40010-C, Power Setting: 29, Duty Cycle (%): 100

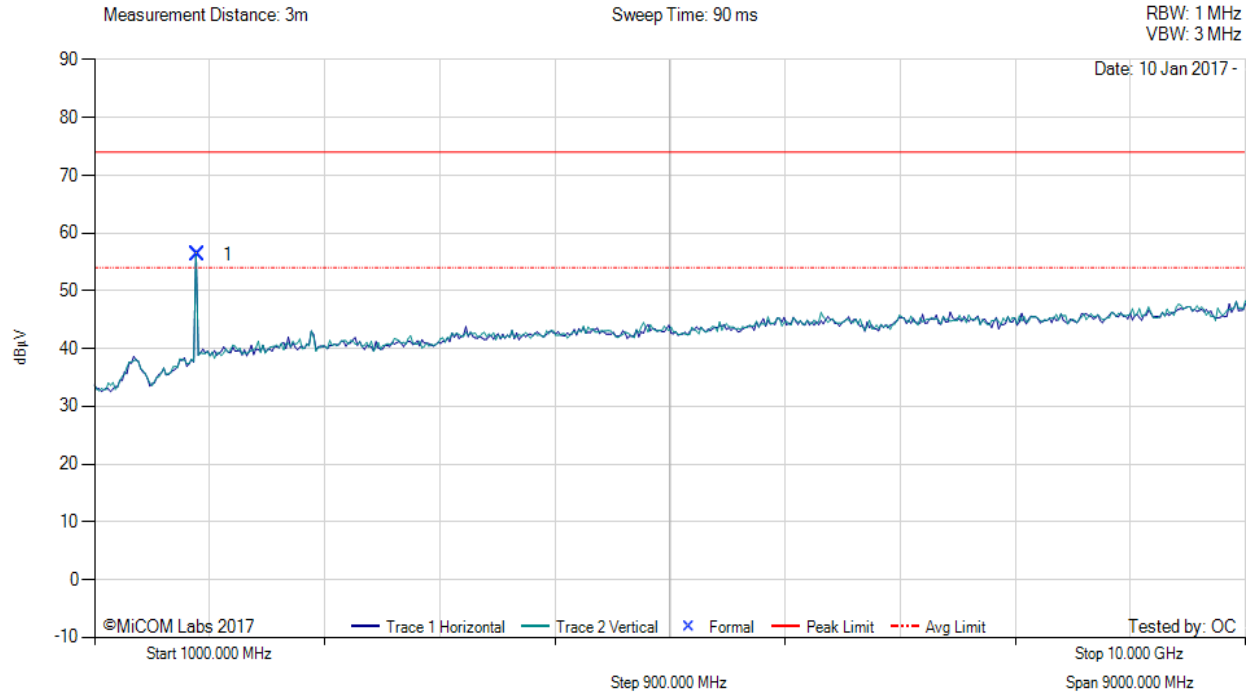

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1804.68	67.40	2.45	-13.63	56.22	Peak (NRB)	Horizontal	151	136	74.0	-17.8	Pass
Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.												

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 59 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 100 kbps FSK, Test Freq: 915.20 MHz, Antenna: WP WPANT40010-C, Power Setting: 29, Duty Cycle (%): 100

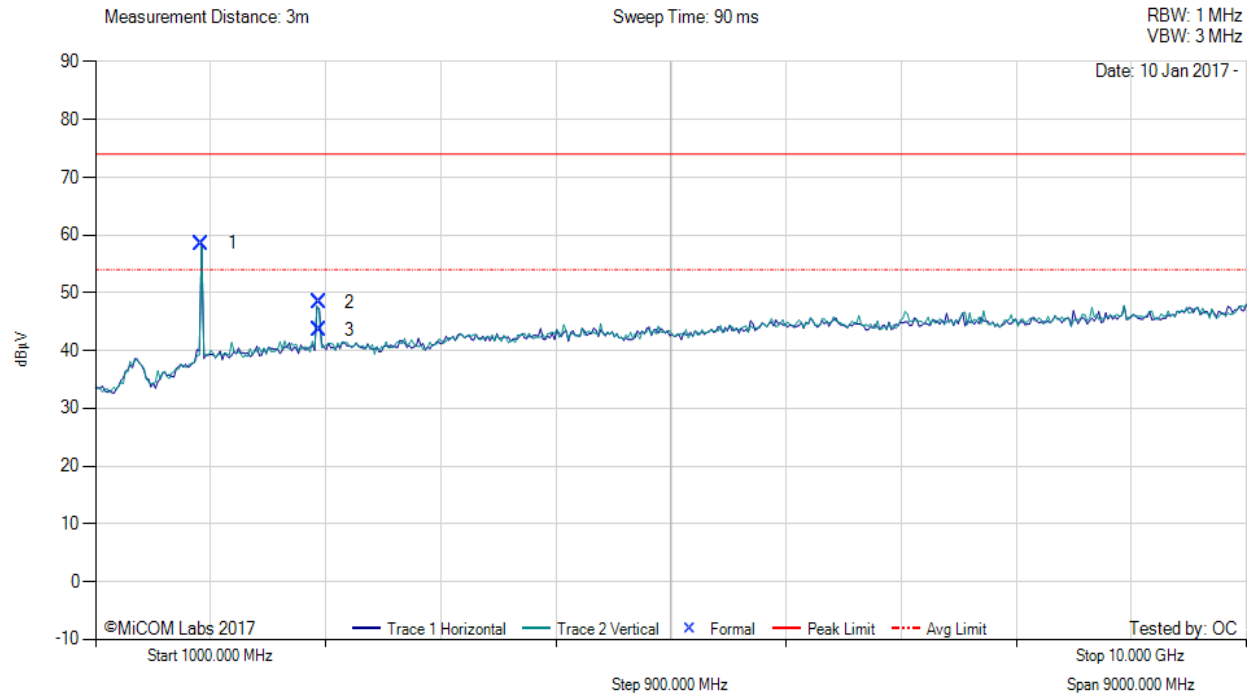

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1830.42	69.66	2.45	-13.54	58.57	Peak (NRB)	Horizontal	100	11	--	--	Pass
2	2745.58	56.87	2.84	-11.35	48.36	Max Peak	Vertical	185	68	74.0	-25.6	Pass
3	2745.58	52.08	2.84	-11.35	43.57	Max Avg	Vertical	185	68	54.0	-10.4	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 60 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 100 kbps FSK, Test Freq: 926.90 MHz, Antenna: WP WPANT40010-C, Power Setting: 29, Duty Cycle (%): 100

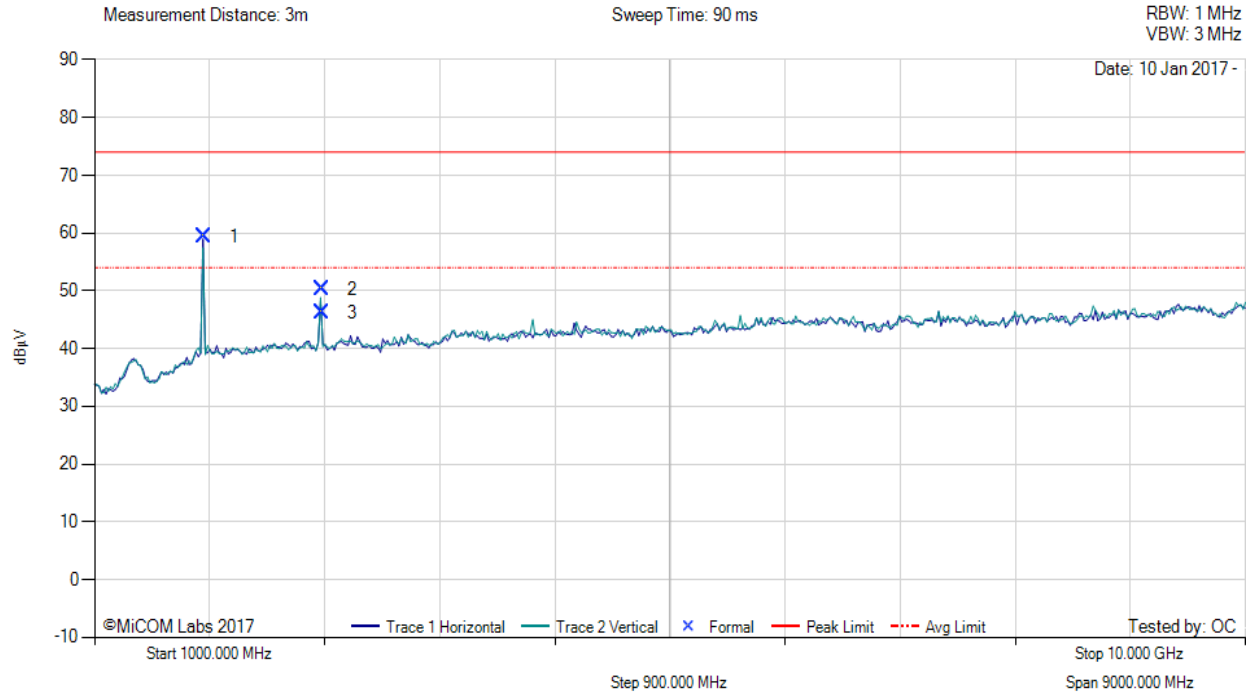

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1853.85	70.33	2.48	-13.43	59.38	Peak (NRB)	Horizontal	151	360	--	--	Pass
2	2780.82	58.80	2.84	-11.33	50.31	Max Peak	Vertical	182	64	74.0	-23.7	Pass
3	2780.82	54.76	2.84	-11.33	46.27	Max Avg	Vertical	182	64	54.0	-7.7	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 61 of 70



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variant: 100 kbps FSK, Test Freq: 902.30 MHz, Antenna: WP WPANT40010-C, Power Setting: 29, Duty Cycle (%): 100

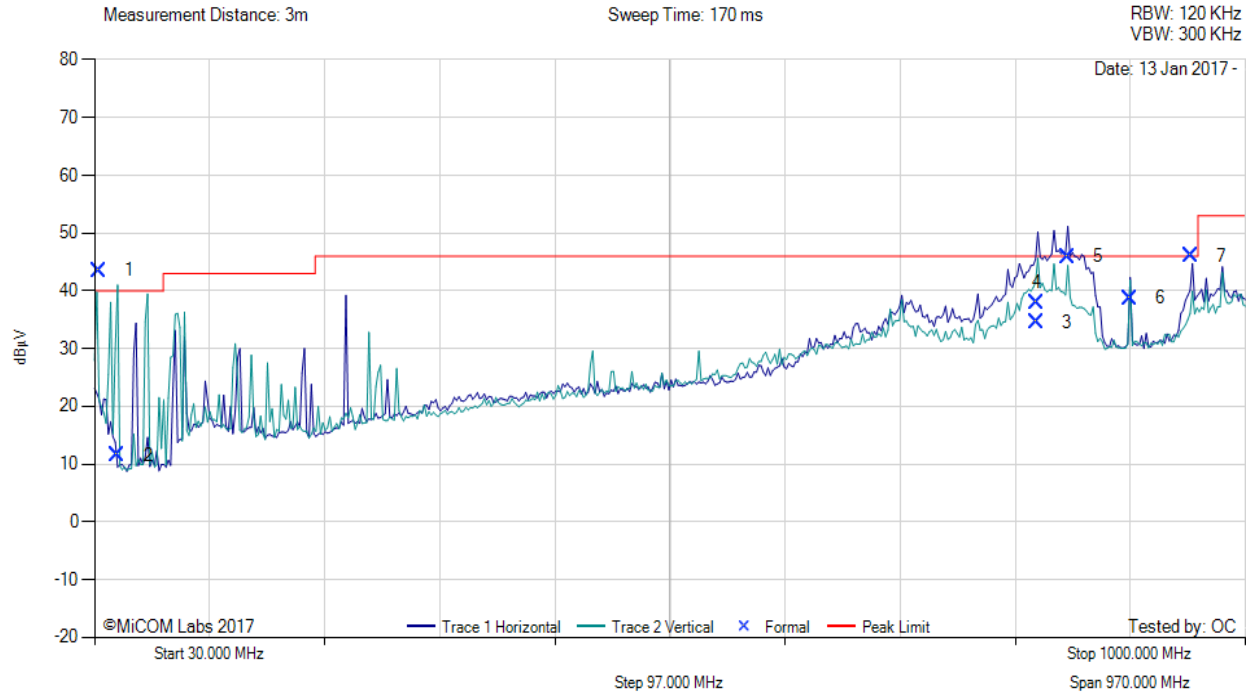

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	33.74	52.94	3.45	-12.88	43.51	Peak (NRB)	Vertical	100	17	--	--	Pass
2	49.52	31.07	3.57	-23.14	11.50	Peak (NRB)	Vertical	100	151	--	--	Pass
3	824.25	36.69	6.17	-8.35	34.51	Peak (NRB)	Horizontal	100	151	--	--	Pass
4	824.25	40.06	6.17	-8.35	37.88	Peak (NRB)	Horizontal	100	124	--	--	Pass
5	850.32	47.93	6.26	-8.29	45.90	Peak (NRB)	Horizontal	100	151	--	--	Pass
6	902.37	40.15	6.34	-7.79	38.70	Fundamental	Horizontal	100	85	--	--	Pass
7	954.37	46.65	6.47	-7.06	46.06	Peak (NRB)	Horizontal	100	0	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 62 of 70



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variant: 100 kbps FSK, Test Freq: 915.20 MHz, Antenna: WP WPANT40010-C, Power Setting: 29, Duty Cycle (%): 100

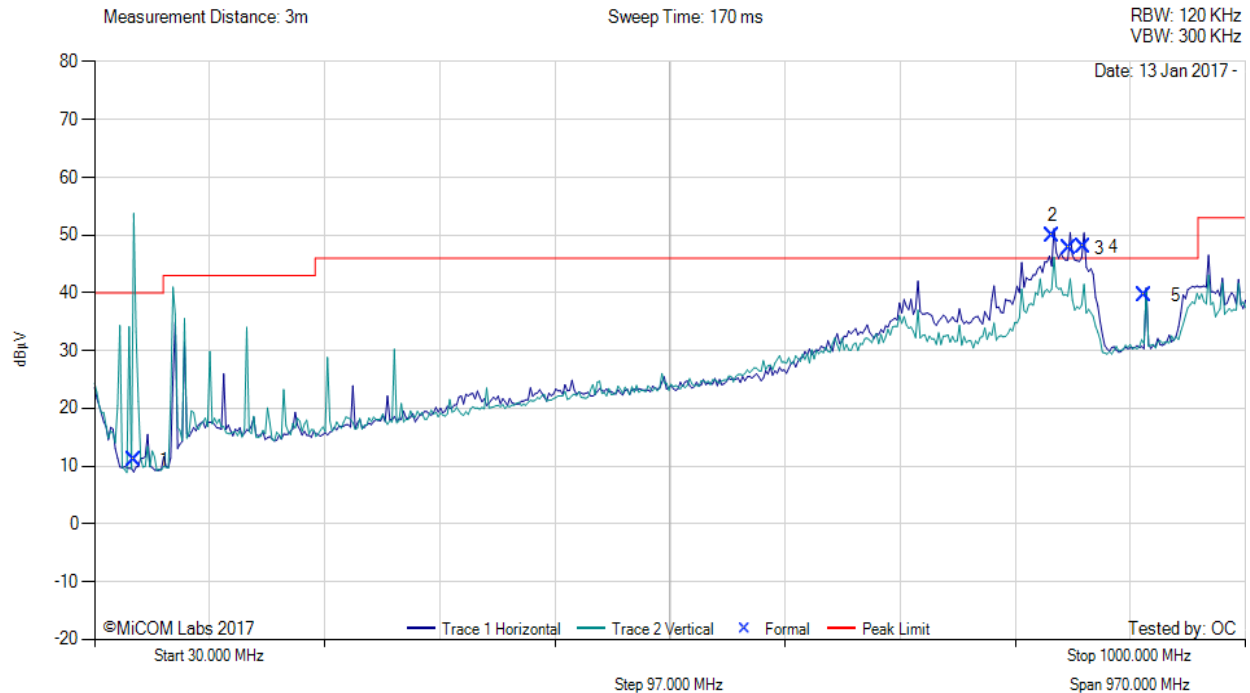

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	63.06	31.13	3.66	-23.71	11.08	Peak (NRB)	Vertical	100	85	--	--	Pass
2	837.26	52.09	6.20	-8.48	49.81	Peak (NRB)	Horizontal	100	85	--	--	Pass
3	851.29	49.72	6.26	-8.29	47.69	Peak (NRB)	Horizontal	100	85	--	--	Pass
4	863.17	49.91	6.25	-8.19	47.97	Peak (NRB)	Horizontal	100	85	--	--	Pass
5	915.25	40.88	6.39	-7.75	39.52	Fundamental	Horizontal	100	1	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 63 of 70



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variant: 100 kbps FSK, Test Freq: 926.90 MHz, Antenna: WP WPANT40010-C, Power Setting: 29, Duty Cycle (%): 100

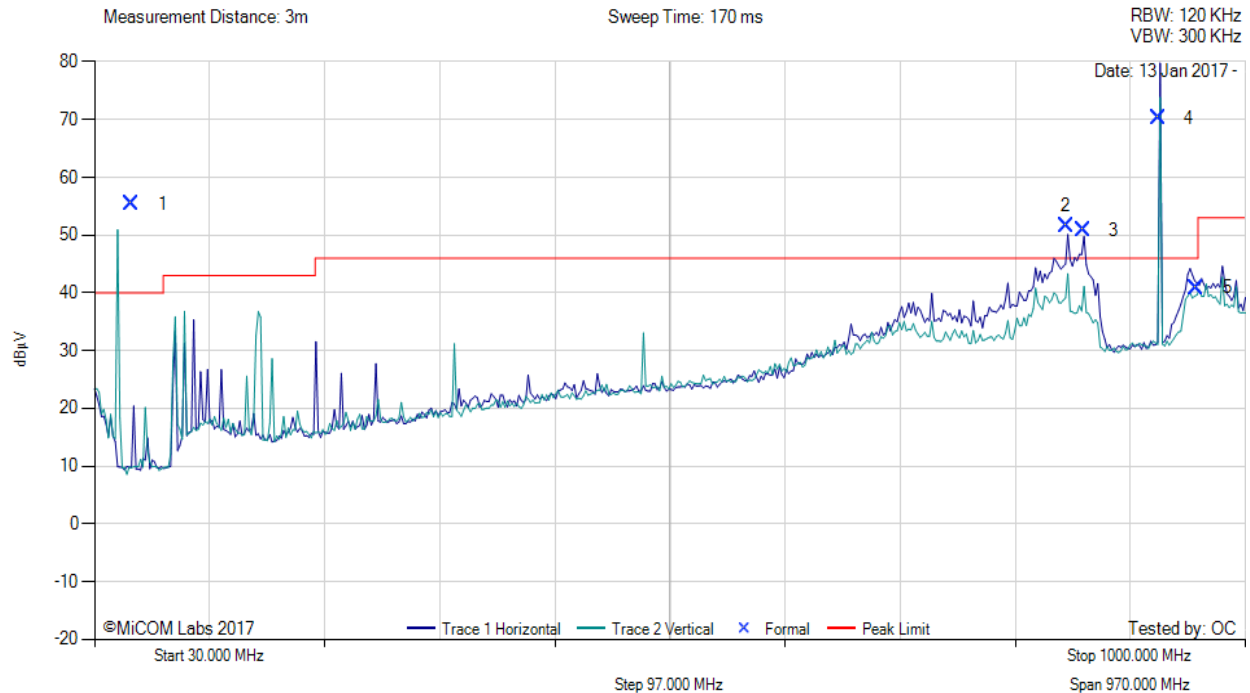

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	61.60	75.61	3.66	-23.92	55.35	Peak (NRB)	Vertical	100	1	--	--	Pass
2	848.82	53.52	6.26	-8.31	51.47	Peak (NRB)	Horizontal	100	32	--	--	Pass
3	862.85	52.82	6.25	-8.19	50.88	Peak (NRB)	Horizontal	100	32	--	--	Pass
4	926.92	71.27	6.43	-7.51	70.19	Fundamental	Vertical	100	32	--	--	Pass
5	959.00	41.53	6.49	-7.13	40.89	Peak (NRB)	Vertical	100	32	--	--	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 64 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 6.25 kbps OQPSK, Test Freq: 902.20 MHz, Antenna: WP WPANT40010-C, Power Setting: 29, Duty Cycle (%): 100

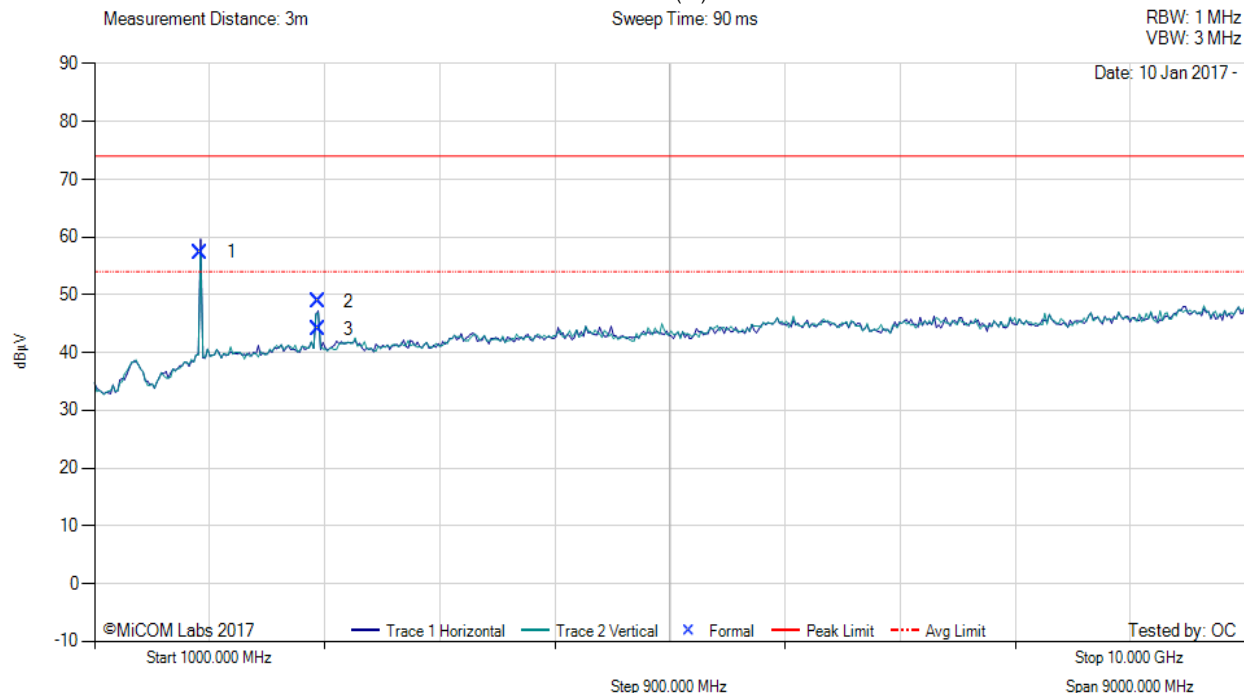

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1830.00	68.47	2.45	-13.54	57.38	Peak (NRB)	Horizontal	100	0	74.0	-16.6	Pass
2	2745.10	57.37	2.84	-11.35	48.86	Max Peak	Horizontal	139	306	74.0	-25.1	Pass
3	2745.10	52.52	2.84	-11.35	44.01	Max Avg	Horizontal	139	306	54.0	-10.0	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 65 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 6.25 kbps OQPSK, Test Freq: 915.00 MHz, Antenna: WP WPANT40010-C, Power Setting: 29, Duty Cycle (%): 100

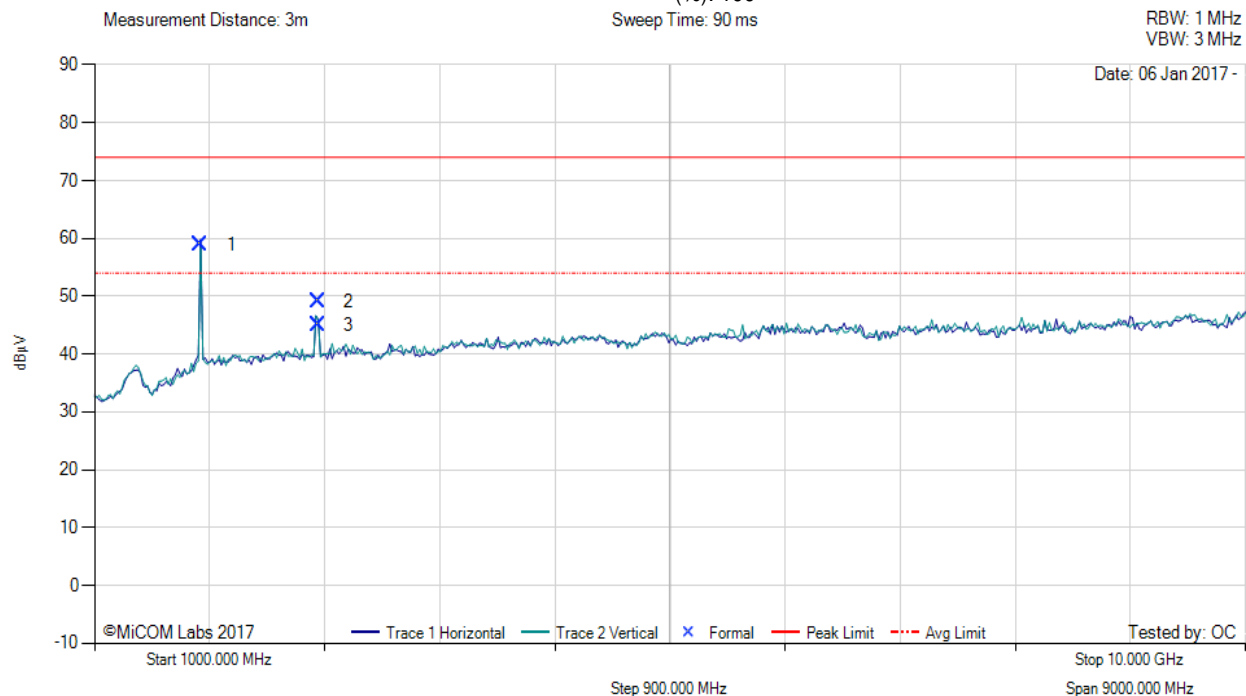

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1830.02	69.93	2.45	-13.54	58.84	Peak (NRB)	Horizontal	151	32	--	--	Pass
2	2745.14	57.62	2.84	-11.35	49.11	Max Peak	Horizontal	193	329	74.0	-24.9	Pass
3	2745.14	53.48	2.84	-11.35	44.97	Max Avg	Horizontal	193	329	54.0	-9.0	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 66 of 70



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 6.25 kbps OQPSK, Test Freq: 927.80 MHz, Antenna: WP WPANT40010-C, Power Setting: 29, Duty Cycle (%): 100

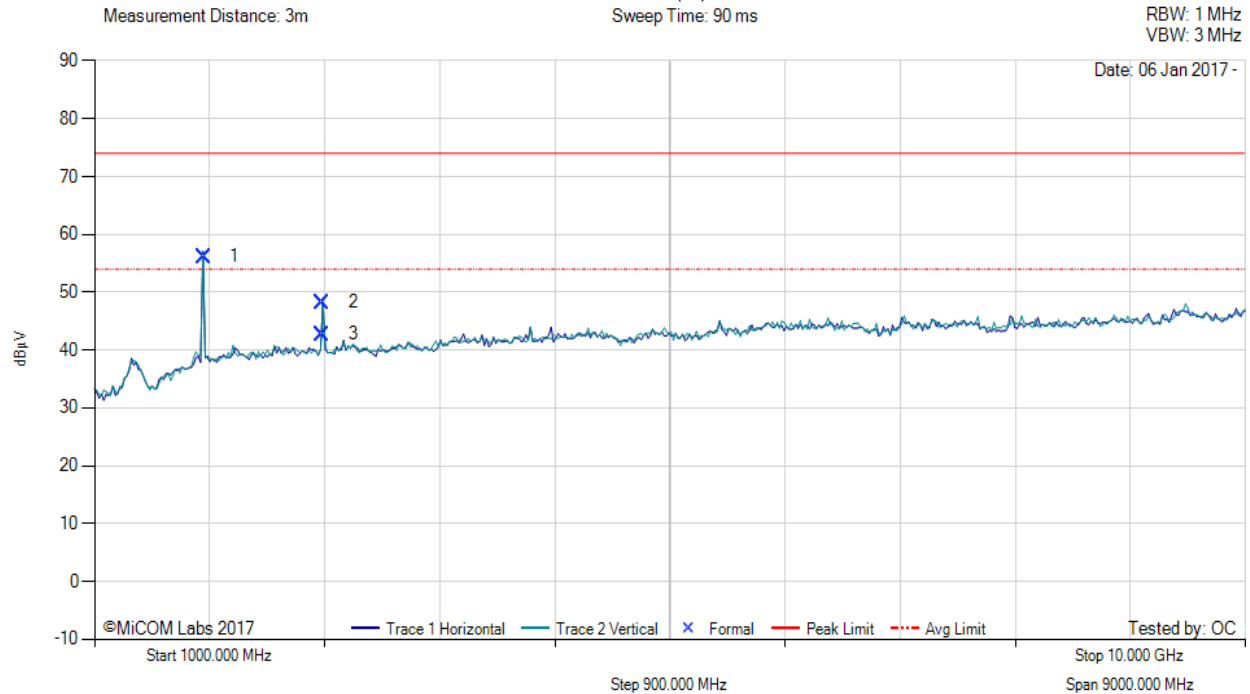

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1855.62	67.07	2.49	-13.41	56.15	Peak (NRB)	Horizontal	151	32	--	--	Pass
2	2783.69	56.73	2.85	-11.33	48.25	Max Peak	Vertical	157	102	74.0	-25.8	Pass
3	2783.69	51.24	2.85	-11.33	42.76	Max Avg	Vertical	157	102	54.0	-11.2	Pass

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 67 of 70

A.1.2. Digital Emissions (0.03 - 1 GHz)



Digital Emissions (0.03 - 1 GHz)

Variant: 100 kbps FSK, Test Freq: 915.20 MHz, Antenna: Tai Sheng Chen 155-0010-00, Duty Cycle (%): 100

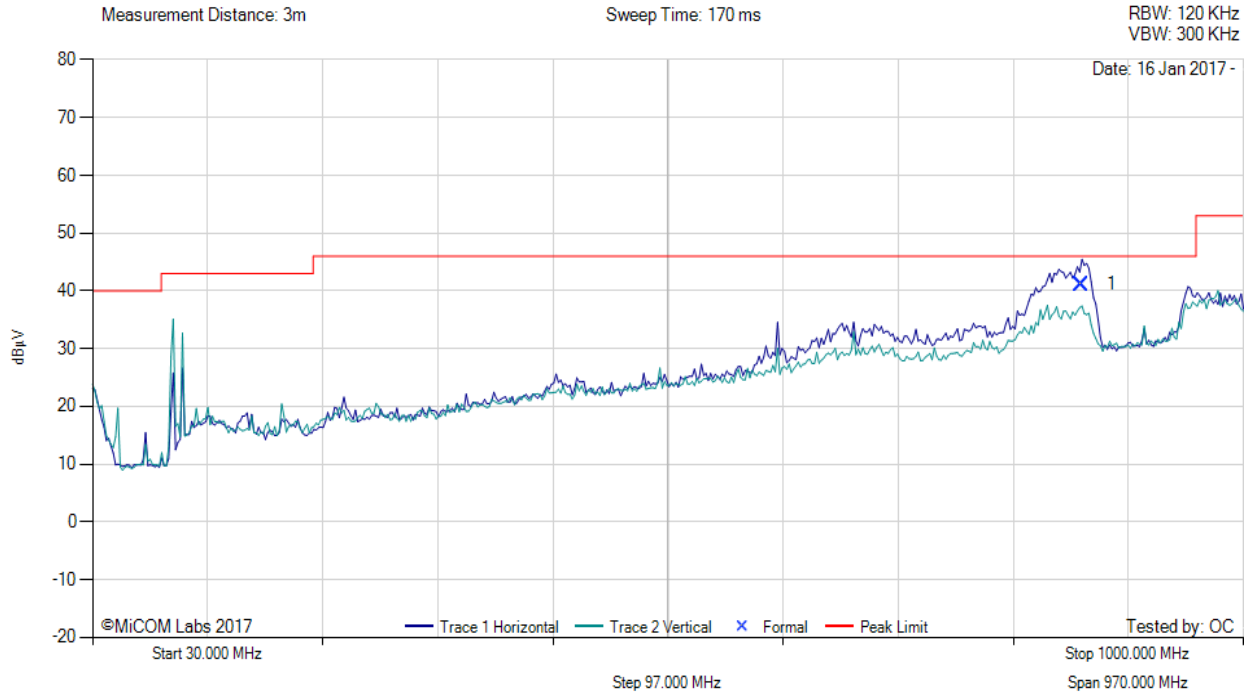

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	862.93	43.04	6.25	-8.19	41.10	MaxQP	Horizontal	102	141	46.0	-4.9	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 68 of 70



Digital Emissions (0.03 - 1 GHz)

Variant: 6.25 kbps OQPSK, Test Freq: 915.00 MHz, Antenna: WP WPANT30104-S1C



30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	39.72	24.73	3.50	-17.56	10.67	MaxQP	Vertical	388	1	40.0	-29.3	Pass
Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.												

[back to matrix](#)

The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Silver Spring Networks MicroAP 5
To: FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247
Serial #: SSNT135-U4_Radiated Rev A
Issue Date: 1st February 2017
Page: 69 of 70



Digital Emissions (0.03 - 1 GHz)

Variant: 100 kbps FSK, Test Freq: 902.30 MHz, Antenna: WP WPANT40010-C



30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	855.69	43.52	6.24	-8.27	41.49	MaxQP	Horizontal	100	27	46.0	-4.5	Pass
Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.												

[back to matrix](#)

The above plot shows peak emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com