



Company: Itron Networked Solutions, Inc.

Test of: NIC 531-0601

To: FCC 15.247 & ISED RSS-247 (900 MHz DSSS)

Report No.: ITRO18-U3 Rev A

COMPLETE TEST REPORT

FROM



Test of: Itron Networked Solutions, Inc. NIC 531-0601

To: FCC 15.247 & ISED RSS-247

Test Report Serial No.: ITRO18-U3 Rev A

This report supersedes: NONE

Applicant: Itron Networked Solutions, Inc.
230 West Tasman Drive
San Jose, California 95134
USA

Product Function: Plug in radio device, mesh network

Issue Date: 29th April 2019

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

| | |
|--|-----------|
| 1. ACCREDITATION, LISTINGS & RECOGNITION | 4 |
| 1.1. TESTING ACCREDITATION | 4 |
| 1.2. RECOGNITION | 5 |
| 1.3. PRODUCT CERTIFICATION | 6 |
| 2. DOCUMENT HISTORY | 7 |
| 3. TEST RESULT CERTIFICATE | 8 |
| 4. REFERENCES AND MEASUREMENT UNCERTAINTY | 9 |
| 4.1. Normative References | 9 |
| 4.2. Test and Uncertainty Procedure | 10 |
| 5. PRODUCT DETAILS AND TEST CONFIGURATIONS | 11 |
| 5.1. Technical Details | 11 |
| 5.2. Scope Of Test Program | 12 |
| 5.3. Equipment Model(s) and Serial Number(s)..... | 13 |
| 5.4. Antenna Details | 13 |
| 5.5. Cabling and I/O Ports | 13 |
| 5.6. Test Configurations | 14 |
| 5.7. Equipment Modifications | 14 |
| 5.8. Deviations from the Test Standard | 14 |
| 6. TEST SUMMARY | 15 |
| 7. TEST EQUIPMENT CONFIGURATION(S)..... | 16 |
| 7.1. Conducted RF Emission Test Setup with Environmental Chamber | 16 |
| 7.2. Radiated Emissions 3M Chamber..... | 18 |
| 8. MEASUREMENT AND PRESENTATION OF TEST DATA | 21 |
| 9. TEST RESULTS..... | 22 |
| 9.1. 6 dB & 99% Bandwidth | 22 |
| 9.2. Conducted Output Power..... | 24 |
| 9.3. Power Spectral Density | 27 |
| 9.4. Emissions | 29 |
| 9.4.1. <i>Conducted Emissions</i> | 29 |
| 9.4.1.1. Conducted Spurious Emissions | 29 |
| 9.4.1.2. Conducted Band-Edge Emissions | 31 |
| 9.4.2. <i>Radiated Emissions</i> | 33 |
| 9.4.2.3. TX Spurious & Restricted Band Emissions | 36 |
| 9.4.3. <i>Digital Emissions (0.03 - 1 GHz)</i> | 39 |
| A. APPENDIX - GRAPHICAL IMAGES..... | 44 |
| A.1. 6 dB & 99% Bandwidth | 45 |
| A.2. Power Spectral Density | 48 |
| A.3. Emissions..... | 54 |
| A.3.1. <i>Conducted Emissions</i> | 54 |
| A.3.1.1. Conducted Spurious Emissions | 54 |
| A.3.1.2. Conducted Band-Edge Emissions..... | 57 |
| A.3.2. <i>Radiated Emissions</i> | 59 |
| A.3.2.3. TX Spurious & Restricted Band Emissions | 59 |
| A.3.3. <i>Digital Emissions (0.03 - 1 GHz)</i> | 62 |

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



Accredited Laboratory

A2LA has accredited

MiCOM LABS

Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 14th day of May 2018.



President and CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2019

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

| Country | Recognition Body | Status | Phase | Identification No. |
|-----------|--|--------|------------|---|
| USA | Federal Communications Commission (FCC) | TCB | - | US0159 Listing #: 102167 |
| Canada | Industry Canada (IC) | FCB | APEC MRA 2 | US0159 Listing #: 4143A-2 4143A-3 |
| Japan | MIC (Ministry of Internal Affairs and Communication) | CAB | APEC MRA 2 | RCB 210 |
| | VCCI | -- | -- | A-0012 |
| Europe | European Commission | NB | EU MRA | NB 2280 |
| Australia | Australian Communications and Media Authority (ACMA) | CAB | APEC MRA 1 | US0159 |
| Hong Kong | Office of the Telecommunication Authority (OFTA) | CAB | APEC MRA 1 | |
| Korea | Ministry of Information and Communication Radio Research Laboratory (RRL) | CAB | APEC MRA 1 | |
| Singapore | Infocomm Development Authority (IDA) | CAB | APEC MRA 1 | |
| Taiwan | National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI) | CAB | APEC MRA 1 | |
| Vietnam | Ministry of Communication (MIC) | CAB | APEC MRA 1 | |

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



Accredited Product Certification Body

A2LA has accredited
MiCOM LABS
Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 Requirements for bodies certifying products, processes and services. This product certification body also meets the A2LA R322 – Specific Requirements – Notified Body Accreditation Requirements and A2LA R308 - Specific Requirements - ISO-IEC 17065 - Telecommunication Certification Body Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.

Presented this 14th day of May 2018





President and CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2019

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

2. DOCUMENT HISTORY

| Document History | | |
|------------------|-----------------------------|-----------------------------------|
| Revision | Date | Comments |
| Draft | 17th April 2019 | Draft report for client review. |
| Draft 2 | 24th April 2019 | Draft 2 report for client review. |
| Rev A | 29 th April 2019 | Initial release |
| . | | |
| . | | |
| . | | |
| . | | |

In the above table the latest report revision will replace all earlier versions.

3. TEST RESULT CERTIFICATE

| | |
|--|---|
| Manufacturer: Itron Networked Solutions, Inc. 230 West Tasman Drive San Jose California 95134, USA | Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA |
| Model: NIC 531-0601 | Telephone: +1 925 462 0304 |
| Type Of Equipment: Plug in radio device, mesh network | Fax: +1 925 462 0306 |
| S/N's: 00:13:50:07:00:00:1A:CA | |
| Test Date(s): 25 th March 2019 | Website: www.micomlabs.com |

| STANDARD(S) | TEST RESULTS |
|--|--------------------|
| FCC 15.247 & ISED RSS-247 (900 MHz DSSS) | EQUIPMENT COMPLIES |


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



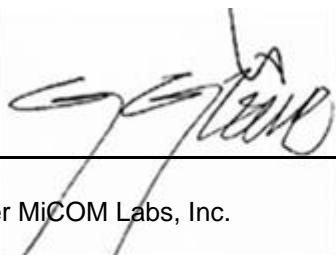

Graeme Grieve
Quality Manager MiCOM Labs, Inc.

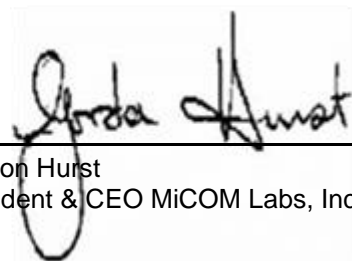

Gordon Hurst
President & CEO MiCOM Labs, Inc.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

| REF. | PUBLICATION | YEAR | TITLE |
|------|------------------------|--------------------------------------|---|
| I | KDB 662911 D01 & D02 | Oct 31 2013 | Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band |
| II | KDB 558074 D01 v05 | 29th August 2018 | Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC Rules. |
| III | A2LA | August 2018 | R105 - Requirement's When Making Reference to A2LA Accreditation Status |
| IV | ANSI C63.10 | 2013 | American National Standard for Testing Unlicensed Wireless Devices |
| V | ANSI C63.4 | 2014 | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| VI | CISPR 32 | 2015 | Electromagnetic compatibility of multimedia equipment - Emission requirements |
| VII | ETSI TR 100 028 | 2001-12 | Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics |
| VIII | FCC 47 CFR Part 15.247 | 2016 | Radio Frequency Devices; Subpart C – Intentional Radiators |
| IX | ICES-003 | Issue 6 Jan 2016; Updated April 2017 | Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement. |
| X | M 3003 | Edition 3 Nov.2012 | Expression of Uncertainty and Confidence in Measurements |
| XI | RSS-247 Issue 2 | Feb 2017 | Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices |
| XII | RSS-Gen Issue 5 | April 2018 | General Requirements for Compliance of Radio Apparatus |
| XIII | FCC 47 CFR Part 2.1033 | 2016 | FCC requirements and rules regarding photographs and test setup diagrams. |
| XIV | KDB 789033 D02 V02r01 | 14th December, 2017 | Guidelines For Compliance Testing Of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E |

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

| Details | Description |
|--------------------------------------|---|
| Purpose: | Test of the Itron Networked Solutions, Inc. NIC 531-0601 to FCC 15.247; Radio Frequency Devices; Subpart C – Intentional Radiators: & ISED RSS-247; Digital Transmission Systems (DTSs), Frequency Hopping System (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices. |
| Applicant: | Itron Networked Solutions, Inc. 230 West Tasman Drive San Jose California 95134, USA |
| Manufacturer: | Itron Networked Solutions, Inc. |
| Laboratory performing the tests: | MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA |
| Test report reference number: | ITRO18-U3 Rev A |
| Date EUT received: | 25th March 2019 |
| Standard(s) applied: | FCC 15.247 & ISED RSS-247 |
| Dates of test (from - to): | 25th March 2019 |
| No of Units Tested: | 2 |
| Product Family Name: | NIC 531-0601 |
| Model(s): | NIC 531-0601, NIC 531-0601-12, NIC 531-0601-13 |
| Location for use: | Both |
| Declared Frequency Range(s): | 902 - 928 MHz |
| Type of Modulation: | DTS |
| EUT Modes of Operation: | 902 - 928 MHz: 2400 kbps/OFDM1: |
| Declared Nominal Output Power (dBm): | 902 - 928 MHz: 2400 kbps/OFDM1: 29.89 |
| Transmit/Receive Operation: | Transceiver – Half Duplex |
| Rated Input Voltage and Current: | 24 VDC |
| Operating Temperature Range: | -40 to +85°C |
| ITU Emission Designator: | OFDM: 1M36G7D |
| Equipment Dimensions: | 4.2in X 0.75in 3.75in |
| Weight: | 0.2 Lb |
| Hardware Rev: | 173-0972-00 |
| Software Rev: | 4.6.0 |

5.2. Scope Of Test Program

Itron Networked Solutions, Inc. NIC 531-0601

The scope of the test program was to test the Itron Networked Solutions, Inc. NIC 531-0601 DSSS configurations in the frequency ranges 902 - 928 MHz for compliance against the following specification:

FCC 15.247 & ISED RSS-247

Radio Frequency Devices; Subpart C – Intentional Radiators

FCC CFR 47 Part 15.247 (DSSS); Radio Frequency Devices; Subpart C – Intentional Radiators

Industry Canada RSS-247

Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices

The following product description was provided by Itron Inc.

NIC 531-0601 is a plug-in radio device, will communicate over mesh and HAN networks. The NIC 531-0601 may be integrated into Itron Centron II meters and may support standard and extended last gasp (ELG).

NIC 531-0601 products include the following model numbers/configurations:

NIC 531-0601: 900+2.4, INT ANT, HW1
NIC 531-0601-12: 900+2.4, INT ANT, HW1, 15s ELG
NIC 531-0601-13: 900+2.4, INT ANT, HW1, 75s ELG

5.3. Equipment Model(s) and Serial Number(s)

| Equipment | Equipment Type | Manufacturer | Model | Serial Number |
|-----------------|----------------|--------------------------------|----------------|-------------------------|
| NIC 531-0601 | EUT | Itron Networked Solutions, Inc | NIC 531-0601 | 00:13:50:07:00:00:1A:CA |
| Laptop Computer | Support | Dell | Latitude E6410 | N/A |

5.4. Antenna Details

| Type | Manufacturer | Model | Family | Gain (dBi) | BF Gain | Dir BW | X-Pol | Frequency Band (MHz) |
|----------|-----------------|-------------|--------|------------|---------|--------|-------|----------------------|
| integral | Tai Sheng Cheng | 155-0184-00 | f type | 1.0 | - | 360 | - | 902 - 928 |
| integral | Tai Sheng Cheng | 155-0184-00 | f type | 0.0 | - | 360 | - | 2400 - 2483.5 |

BF Gain - Beamforming Gain
 Dir BW - Directional BeamWidth
 X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

NONE

5.6. Test Configurations

Results for the following configurations are provided in this report:

| Operational Mode | Data Rate with Highest Power kbp/s | Channel Frequency (MHz) | | |
|--------------------|------------------------------------|-------------------------|-------|-------|
| | | Low | Mid | High |
| 900-930 MHz | | | | |
| OFDM1 | 2400 | 903.2 | 914.0 | 926.0 |

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE


6. TEST SUMMARY

List of Measurements

| Test Header | Result | Data Link |
|---|----------|---------------------------|
| 6 dB & 99% Bandwidth | Complies | View Data |
| Conducted Output Power | Complies | View Data |
| Power Spectral Density | Complies | View Data |
| Emissions | Complies | - |
| (1) Conducted Emissions | Complies | - |
| (i) Conducted Spurious Emissions | Complies | View Data |
| (ii) Conducted Band-Edge Emissions | Complies | View Data |
| (2) Radiated Emissions | Complies | View Data |
| (i) TX Spurious & Restricted Band Emissions | Complies | View Data |
| (3) Digital Emissions (0.03 - 1 GHz) | Complies | View Data |

7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Conducted RF Emission Test Setup with Environmental Chamber

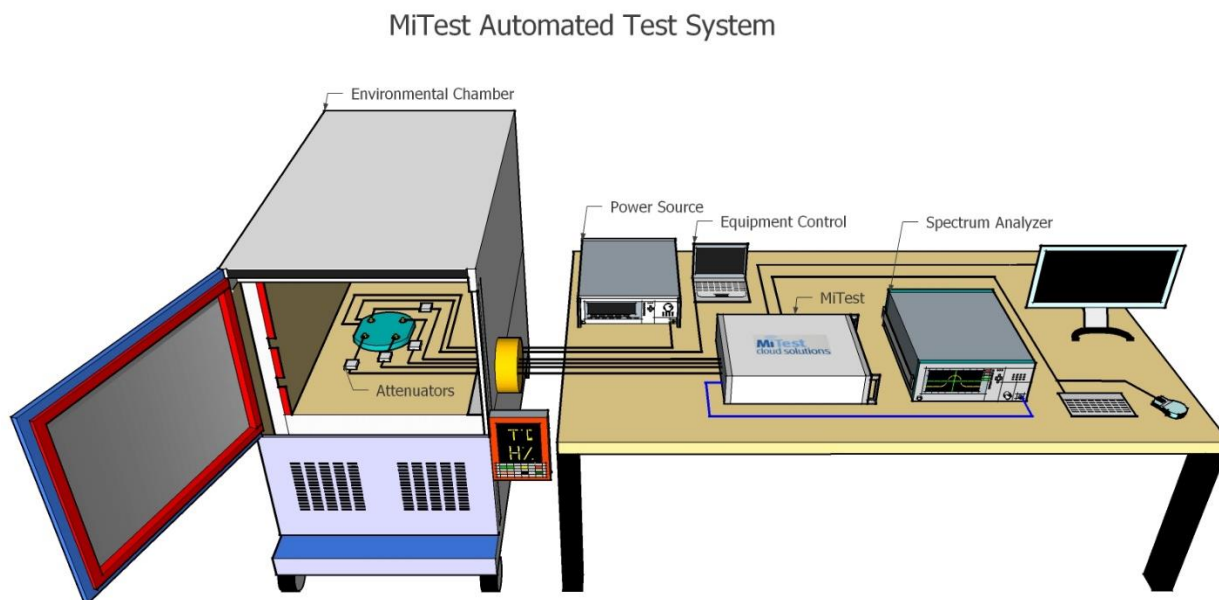

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.


| Asset# | Description | Manufacturer | Model# | Serial# | Calibration Due Date |
|--------|--|--------------------|-----------------|-------------|----------------------|
| #3 SA | MiTest Box to SA | Fairview Microwave | SCA1814-0101-72 | #3 SA | 20 Jul 2019 |
| #3P1 | EUT to MiTest box port 1 | Fairview Microwave | SCA1814-0101-72 | #3P1 | 20 Jul 2019 |
| #3P2 | EUT to MiTest box port 2 | Fairview Microwave | SCA1814-0101-72 | #3P2 | 20 Jul 2019 |
| #3P3 | EUT to MiTest box port 3 | Fairview Microwave | SCA1814-0101-72 | #3P3 | 20 Jul 2019 |
| #3P4 | EUT to MiTest box port 4 | Fairview Microwave | SCA1812-0101-72 | #3P4 | 20 Jul 2019 |
| 249 | Resistance Thermometer | Thermotronics | GR2105-02 | 9340 #2 | 30 Oct 2019 |
| 361 | Desktop for RF#1, Labview Software installed | Dell | Vostro 220 | WS RF#1 | Not Required |
| 378 | Rohde & Schwarz 40 GHz Receiver with Generator | Rhode & Schwarz | ESIB40 | 100107/040 | 12 Oct 2019 |
| 398 | MiTest RF Conducted Test Software | MiCOM | MiTest ATS | Version 4.1 | Not Required |

| | | | | | |
|-----|------------------------------------|----------------------|------------------|---------------|---------------|
| 405 | DC Power Supply 0-60V | Agilent | 6654A | MY4001826 | Cal when used |
| 408 | USB to GPIB interface | National Instruments | GPIB-USB HS | 14C0DE9 | Not Required |
| 436 | USB Wideband Power Sensor | Boonton | 55006 | 8731 | 14 Sep 2019 |
| 440 | USB Wideband Power Sensor | Boonton | 55006 | 9178 | 22 Sep 2019 |
| 441 | USB Wideband Power Sensor | Boonton | 55006 | 9179 | 20 Sep 2019 |
| 442 | USB Wideband Power Sensor | Boonton | 55006 | 9181 | 6 Oct 2019 |
| 445 | PoE Injector | D-Link | DPE-101GL | QTAH1E2000625 | Not Required |
| 461 | Spectrum Analyzer | Agilent | E4440A | MY46185537 | 20 Sep 2019 |
| 510 | Barometer/Thermometer | Control Company | 68000-49 | 170871375 | 11 Dec 2019 |
| 515 | MiTest Cloud Solutions RF Test Box | MiCOM | 2nd Gen with DFS | 515 | 20 Jul 2019 |
| 75 | Environmental Chamber | Thermatron | SE-300-2-2 | 27946 | 24 Feb 2020 |


7.2. Radiated Emissions 3M Chamber

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions below 1GHz. Radiated Emissions above 1GHz.

Radiated Emissions Below 1GHz Test Setup

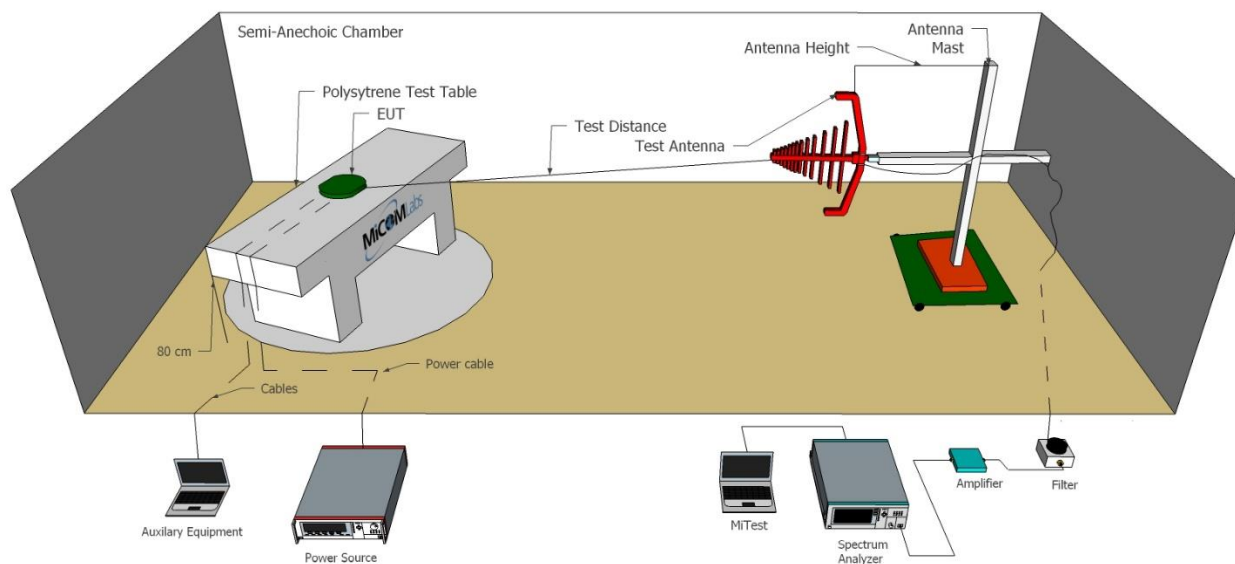

Radiated Emissions Above 1GHz Test Setup

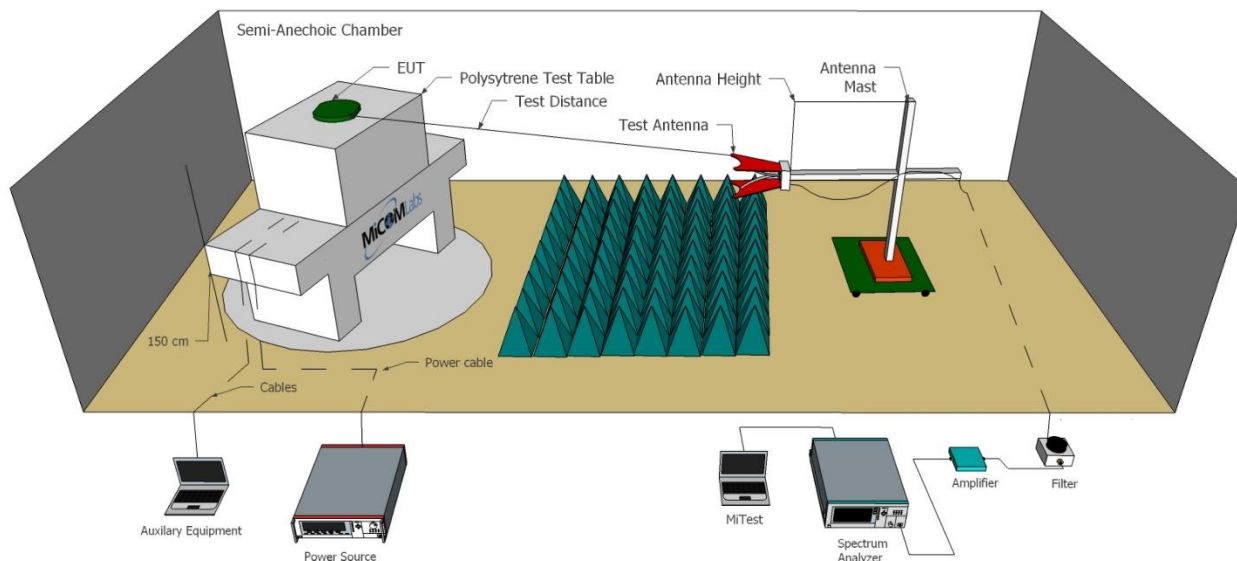

full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

A

| Asset# | Description | Manufacturer | Model# | Serial# | Calibration Due Date |
|--------|---|----------------------|---|-------------|----------------------|
| 170 | Video System Controller for Semi Anechoic Chamber | Panasonic | WV-CU101 | 04R08507 | Not Required |
| 298 | 3M Radiated Emissions Chamber Maintenance Check | MiCOM | 3M Chamber | 298 | 21 Jun 2019 |
| 338 | Sunol 30 to 3000 MHz Antenna | Sunol | JB3 | A052907 | 4 Apr 2020 |
| 341 | 900MHz Notch Filter | EWT | EWT-14-0199 | H1 | 8 Oct 2019 |
| 346 | 1.6 TO 10GHz High Pass Filter | EWT | EWT-57-0112 | H1 | 8 Oct 2019 |
| 373 | 26III RMS Multimeter | Fluke | Fluke 26 series III | 76080720 | 21 Sep 2019 |
| 378 | Rohde & Schwarz 40 GHz Receiver with Generator | Rhode & Schwarz | ESIB40 | 100107/040 | 12 Oct 2019 |
| 397 | Amp 10 - 2500MHz | MiCOM Labs | Amp 10 - 2500 MHz | NA | 12 Jun 2019 |
| 399 | ETS 1-18 GHz Horn Antenna | ETS | 3117 | 00154575 | 12 Oct 2019 |
| 406 | Amplifier for Radiated Emissions | MiCOM Labs | 40dB 1 to 18GHz Amp | 0406 | 12 Jun 2019 |
| 410 | Desktop Computer | Dell | Inspiron 620 | WS38 | Not Required |
| 411 | Mast/Turntable Controller | Sunol Sciences | SC98V | 060199-1D | Not Required |
| 412 | USB to GPIB Interface | National Instruments | GPIB-USB HS | 11B8DC2 | Not Required |
| 413 | Mast Controller | Sunol Science | TWR95-4 | 030801-3 | Not Required |
| 414 | DC Power Supply 0-60V | HP | 6274 | 1029A01285 | Cal when used |
| 415 | Turntable Controller | Sunol Sciences | Turntable Controller | None | Not Required |
| 447 | MiTest Rad Emissions Test Software | MiCOM | Rad Emissions Test Software Version 1.0 | 447 | Not Required |
| 462 | Schwarzbeck cable from Antenna to Amplifier. | Schwarzbeck | AK 9513 | 462 | 9 Oct 2019 |
| 463 | Schwarzbeck cable from Amplifier to Bulkhead. | Schwarzbeck | AK 9513 | 463 | 9 Oct 2019 |
| 464 | Schwarzbeck cable from Bulkhead to Receiver | Schwarzbeck | AK 9513 | 464 | 9 Oct 2019 |
| 465 | Low Pass Filter DC-1000 MHz | Mini-Circuits | NLP-1200+ | VUU01901402 | 9 Oct 2019 |
| 480 | Cable - Bulkhead to Amp | SRC Haverhill | 157-3050360 | 480 | 24 Aug 2019 |
| 481 | Cable - Bulkhead to Receiver | SRC Haverhill | 151-3050787 | 481 | 24 Aug 2019 |
| 510 | Barometer/Thermometer | Control Company | 68000-49 | 170871375 | 11 Dec 2019 |
| 518 | Cable - Amp to Antenna | SRC Haverhill | 157-3051574 | 518 | 24 Aug 2019 |

| | | | | | |
|----------|------------------------------|-----------------|--------------|-------------|---------------|
| 87 | Uninterruptible Power Supply | Falcon Electric | ED2000-1/2LC | F3471 02/01 | Cal when used |
| VLF-1700 | Low pass filter DC-1700 MHz | Mini Circuits | VLF-1700 | None | 8 Oct 2019 |

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

9. TEST RESULTS

9.1. 6 dB & 99% Bandwidth

| Conducted Test Conditions for 6 dB and 99% Bandwidth | | | |
|--|---|----------------------------|-------------|
| Standard: | FCC CFR 47: 15.247 (a)(2) IC RSS-247:5.2 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | 6 dB and 99 % Bandwidth | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(2) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |
| <p>Test Procedure for 6 dB and 99% Bandwidth Measurement The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.</p> <p>Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.</p> <p>Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.</p> <p>Limits for 6 dB and 99% Bandwidth (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (2) Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.</p> | | | |

Equipment Configuration for 6 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | OFDM1 | Duty Cycle (%): | 99 |
| Data Rate: | 2400.00 KBit/s | Antenna Gain (dBi): | Not Applicable |
| Modulation: | OFDM1 | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured 6 dB Bandwidth (MHz) | | | | 6 dB Bandwidth (MHz) | | Limit | Lowest Margin |
|----------------|-------------------------------|---|---|---|----------------------|--------|--------|---------------|
| | Port(s) | | | | Highest | Lowest | | |
| | MHz | a | b | c | | | d | KHz |
| 903.2 | 1.092 | | | | 1.092 | 1.092 | ≥500.0 | -0.59 |
| 914.0 | 1.087 | | | | 1.087 | 1.087 | ≥500.0 | -0.59 |
| 926.0 | 1.111 | | | | 1.111 | 1.111 | ≥500.0 | -0.61 |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | Maximum 99% Bandwidth (MHz) | | |
|----------------|------------------------------|---|---|---|-----------------------------|--|--|
| | Port(s) | | | | | | |
| | MHz | a | b | c | d | | |
| 903.2 | 1.265 | | | | 1.265 | | |
| 914.0 | 1.303 | | | | 1.303 | | |
| 926.0 | 1.356 | | | | 1.356 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

9.2. Conducted Output Power

| Conducted Test Conditions for Fundamental Emission Output Power | | | |
|--|--|----------------------------|-------------|
| Standard: | FCC CFR 47: 15.247 (b) & (c) IC RSS-247:5.4 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Output Power | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (b) & (c) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |
| <p>Test Procedure for Fundamental Emission Output Power Measurement In the case of average power measurements an average power sensor was utilized.</p> <p>For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.</p> <p>Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.</p> <p>Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.</p> <p>Supporting Information Calculated Power = A + G + Y + 10 log (1/x) dBm</p> <p>A = Total Power [$10 \cdot \text{Log}_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$] G = Antenna Gain Y = Beamforming Gain x = Duty Cycle (average power measurements only)</p> <p>Limits for Fundamental Emission Output Power (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:</p> <p>(3) For systems using digital modulation in the 902-928 MHz and 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.</p> <p>(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>(c) Operation with directional antenna gains greater than 6 dBi. (1) Fixed point-to-point operation: (i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>(iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.</p> | | | |

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of $10 \log$ (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

Equipment Configuration for Peak Output Power

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | OFDM1 | Duty Cycle (%): | 99.0 |
| Data Rate: | 2400.00 KBit/s | Antenna Gain (dBi): | 1.00 |
| Modulation: | OFDM1 | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency MHz | Measured Output Power (dBm) | | | | Calculated Total Power Σ Port(s) dBm | Limit dBm | Margin dB | EUT Power Setting |
|-----------------------|-----------------------------|---|---|---|--|--------------|--------------|-------------------|
| | a | b | c | d | | | | |
| 903.2 | 24.90 | | | | 24.90 | 30.00 | -5.10 | 21.00 |
| 914.0 | 26.24 | | | | 26.24 | 30.00 | -3.76 | 21.00 |
| 926.0 | 27.70 | | | | 27.70 | 30.00 | -2.30 | 21.00 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ±1.33 dB |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

9.3. Power Spectral Density

| Conducted Test Conditions for Power Spectral Density | | | |
|--|--|----------------------------|-------------|
| Standard: | FCC CFR 47: 15.247 (e) IC RSS-247:5.2 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Power Spectral Density | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (e) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Power Spectral Density

The transmitter output was connected to a spectrum analyzer and the measured made in a 3 kHz resolution bandwidth using the analyzer auto-coupled sweep-time. A peak value was found over the full emission bandwidth and the spectrum downloaded for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (â) and a link to this additional graphic is provided.

Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE:

It may be observed that the spectrum in some antenna port plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Supporting Information

Calculated Power = A + 10 log (1/x) dBm

A = Total Power Spectral Density [10 Log₁₀ (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]

x = Duty Cycle

Limits Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Equipment Configuration for Power Spectral Density - Peak

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | OFDM1 | Duty Cycle (%): | 99.0 |
| Data Rate: | 2400.00 KBit/s | Antenna Gain (dBi): | 1.00 |
| Modulation: | OFDM1 | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured Power Spectral Density | | | | Amplitude Summation | Limit | Margin |
|----------------|---------------------------------|---|---|---|-----------------------|----------|--------|
| | Port(s) (dBm/3KHz) | | | | | | |
| MHz | a | b | c | d | dBm/3KHz | dBm/3KHz | dB |
| 903.2 | 6.099 | | | | 6.099 | 8.0 | -1.9 |
| 914.0 | 6.403 | | | | 6.403 | 8.0 | -1.6 |
| 926.0 | 6.965 | | | | 6.965 | 8.0 | -1.0 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the links in the above matrix to view the graphical image (plot).

9.4. Emissions

9.4.1. Conducted Emissions

9.4.1.1. Conducted Spurious Emissions

| Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions | | | |
|--|---|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 (d) IC RSS-247:5.5 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Max Unwanted Emission Levels | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (d) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Equipment Configuration for Conducted Spurious Emissions - Peak

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | OFDM1 | Duty Cycle (%): | 99 |
| Data Rate: | 2400.00 KBit/s | Antenna Gain (dBi): | Not Applicable |
| Modulation: | OFDM1 | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Frequency Range | Conducted Spurious Emissions - Peak (dBm) | | | | | | | |
|----------------|-----------------|---|-------|--------|-------|--------|-------|--------|-------|
| | | Port a | | Port b | | Port c | | Port d | |
| MHz | MHz | SE | Limit | SE | Limit | SE | Limit | SE | Limit |
| 903.2 | 30.0 - 10000.0 | -42.168 | 1.88 | | | | | | |
| 914.0 | 30.0 - 10000.0 | -41.809 | 2.09 | | | | | | |
| 926.0 | 30.0 - 10000.0 | -41.277 | 2.48 | | | | | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

9.4.1.2. Conducted Band-Edge Emissions

| Equipment Configuration for Conducted Low Band-Edge Emissions - Peak | | | |
|--|----------------|-----------------------------------|----------------|
| Variant: | OFDM1 | Duty Cycle (%): | 99.0 |
| Data Rate: | 2400.00 KBit/s | Antenna Gain (dBi): | Not Applicable |
| Modulation: | OFDM1 | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Channel Frequency: | 903.2 MHz | | | | | |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------------|
| Band-Edge Frequency: | 902.0 MHz | | | | | |
| Test Frequency Range: | 850.0 - 915.0 MHz | | | | | |
| Port(s) | Band-Edge Markers and Limit | | | Revised Limit | | Margin (MHz) |
| | M1 Amplitude (dBm) | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | |
| a | -7.82 | 3.25 | 902.50 | | | -0.500 |

| Traceability to Industry Recognized Test Methodologies | |
|--|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted High Band-Edge Emissions - Peak

| | | | |
|--------------------------------|----------------|-----------------------------------|----------------|
| Variant: | OFDM1 | Duty Cycle (%): | 99.0 |
| Data Rate: | 2400.00 KBit/s | Antenna Gain (dBi): | Not Applicable |
| Modulation: | OFDM1 | Beam Forming Gain (Y)(dB): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Channel Frequency: | 926.0 MHz | | | | | |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------------|
| Band-Edge Frequency: | 928.0 MHz | | | | | |
| Test Frequency Range: | 915.0 - 978.0 MHz | | | | | |
| Port(s) | Band-Edge Markers and Limit | | | Revised Limit | | Margin (MHz) |
| | M3 Amplitude (dBm) | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | |
| a | -22.74 | 3.97 | 926.70 | | | -1.300 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2. Radiated Emissions

| Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands) | | | |
|---|---|----------------------------|-------------|
| Standard: | FCC CFR 47: Part 15.205 ISED RSS-GEN:8.9, 8.10 | Ambient Temp. (°C): | 20.0 - 24.5 |
| Test Heading: | Radiated Spurious and Band-Edge Emissions | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.205, 15.209 | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Limits for Restricted Bands

Peak emission: 74 dBuV/m
Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL - AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss or Waveguide Loss

Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| Frequency Band | | | |
|-------------------|---------------------|---------------|-------------|
| MHz | MHz | MHz | GHz |
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | Above 38.6 |
| 13.36-13.41 | | | |

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this

section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

9.4.2.3. TX Spurious & Restricted Band Emissions

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|-----------------------------|------------------------|----------------|
| Antenna: | Tai Sheng Cheng 155-0184-00 | Variant: | OFDM1 |
| Antenna Gain (dBi): | 1.00 | Modulation: | OFDM1 |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 903.20 | Data Rate: | 2400.00 MBit/s |
| Power Setting: | 30 | Tested By: | JMH |

Test Measurement Results

1000.00 - 10000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 1806.44 | 64.84 | -1.55 | -14.43 | 48.86 | Peak (NRB) | Horizontal | 151 | 47 | -- | -- | Pass |
| #2 | 6322.02 | 59.64 | -2.91 | -9.22 | 47.51 | Peak (NRB) | Vertical | 200 | 178 | -- | -- | Pass |

Test Notes: EUT powered by DC 24 V

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|-----------------------------|------------------------|----------------|
| Antenna: | Tai Sheng Cheng 155-0184-00 | Variant: | OFDM1 |
| Antenna Gain (dBi): | 1.00 | Modulation: | OFDM1 |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 914.00 | Data Rate: | 2400.00 MBit/s |
| Power Setting: | 30 | Tested By: | JMH |

Test Measurement Results

1000.00 - 10000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|--------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 1828.43 | 63.25 | -1.52 | -14.05 | 47.68 | Peak (NRB) | Horizontal | 100 | 51 | -- | -- | Pass |

Test Notes: EUT powered by DC 24 V

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|-----------------------------|------------------------|----------------|
| Antenna: | Tai Sheng Cheng 155-0184-00 | Variant: | OFDM1 |
| Antenna Gain (dBi): | 1.00 | Modulation: | OFDM1 |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 926.00 | Data Rate: | 2400.00 MBit/s |
| Power Setting: | 30 | Tested By: | JMH |

Test Measurement Results

1000.00 - 10000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|--------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 1852.94 | 60.44 | -1.56 | -13.81 | 45.07 | Peak (NRB) | Horizontal | 200 | 180 | -- | -- | Pass |

Test Notes: EUT powered by DC 24 V

Note: click the links in the above matrix to view the graphical image (plot).

9.4.3. Digital Emissions (0.03 - 1 GHz)

| Radiated Test Conditions for Radiated Digital Emissions (0.03 – 1 GHz) | | | |
|--|---|----------------------------|-------------|
| Standard: | FCC CFR 47:15.209, ICES-003: 6.2 RSS-GEN: 7 | Ambient Temp. (°C): | 20.0 - 24.5 |
| Test Heading: | Digital Emissions | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.209 | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Radiated Digital Emissions (0.03 – 1 GHz)

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dBmV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are done as:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100\text{mV/m}$$

$$48 \text{ dBmV/m} = 250\text{mV/m}$$

Limits for Radiated Digital Emissions (0.03 – 1 GHz)

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength | | Measurement Distance (m) |
|-----------------|------------------------------------|---|--------------------------|
| | $\mu\text{V/m}$ (microvolts/meter) | $\text{dB}\mu\text{V/m}$ (dB microvolts/meter) | |
| 0.009-0.490 | 2400/F(kHz) | -- | 300 |
| 0.490-1.705 | 24000/F(kHz) | -- | 30 |
| 1.705-30.0 | 30 | 29.5 | 30 |
| 30-88 | 100** | 40 | 3 |
| 88-216 | 150** | 43.5 | 3 |
| 216-960 | 200** | 46.0 | 3 |
| Above 960 | 500 | 54.0 | 3 |

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241. (b) In the emission table above, the tighter limit applies at the band edges. (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. (e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part. (f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device. (g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

Equipment Configuration for Radiated Digital Emissions

| | | | |
|---------------------------------|-----------------------------|------------------------|----------------|
| Antenna: | Tai Sheng Cheng 155-0184-00 | Variant: | OFDM1 |
| Antenna Gain (dBi): | 1.00 | Modulation: | OFDM1 |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 902.30 | Data Rate: | 2400.00 KBit/s |
| Power Setting: | 30 | Tested By: | JMH |

Test Measurement Results

| 30.00 - 1000.00 MHz | | | | | | | | | | | | |
|---------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1 | 118.29 | 48.96 | 4.09 | -14.80 | 38.25 | MaxQP | Vertical | 104 | 147 | 43.0 | -4.8 | Pass |
| #2 | 879.26 | 40.05 | 6.59 | -5.30 | 41.34 | MaxQP | Vertical | 124 | 0 | 46.0 | -4.7 | Pass |
| #3 | 902.91 | 49.19 | 6.65 | -5.10 | 50.74 | Fundamental | Vertical | 100 | 0 | -- | -- | |
| #4 | 971.05 | 47.20 | 6.85 | -4.00 | 50.05 | MaxQP | Vertical | 101 | 0 | 53.0 | -3.0 | Pass |
| #5 | 973.23 | 47.45 | 6.89 | -4.00 | 50.34 | MaxQP | Vertical | 100 | 5 | 53.0 | -2.7 | Pass |
| #6 | 976.05 | 46.65 | 6.87 | -4.00 | 49.52 | MaxQP | Vertical | 101 | 276 | 53.0 | -3.5 | Pass |
| #7 | 978.18 | 47.25 | 6.87 | -3.90 | 50.22 | MaxQP | Vertical | 100 | 2 | 53.0 | -2.8 | Pass |
| #8 | 982.38 | 46.68 | 6.88 | -3.80 | 49.76 | MaxQP | Vertical | 103 | 18 | 53.0 | -3.2 | Pass |
| #9 | 986.58 | 47.11 | 6.87 | -3.90 | 50.08 | MaxQP | Vertical | 101 | 354 | 53.0 | -2.9 | Pass |
| #10 | 992.64 | 45.35 | 6.90 | -3.70 | 48.55 | MaxQP | Vertical | 112 | 343 | 53.0 | -4.5 | Pass |
| #11 | 996.73 | 45.02 | 6.93 | -3.80 | 48.15 | MaxQP | Vertical | 106 | 16 | 53.0 | -4.9 | Pass |

Test Notes: EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Radiated Digital Emissions

| | | | |
|---------------------------------|-----------------------------|------------------------|----------------|
| Antenna: | Tai Sheng Cheng 155-0184-00 | Variant: | 2400 kbps OFDM |
| Antenna Gain (dBi): | 1.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 914.00 | Data Rate: | 2400.00 MBit/s |
| Power Setting: | 30 | Tested By: | JMH |

Test Measurement Results

30.00 - 1000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|--------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 118.07 | 48.49 | 4.09 | -14.80 | 37.78 | MaxQP | Vertical | 99 | 155 | 43.0 | -5.2 | Pass |
| #2 | 880.16 | 40.29 | 6.59 | -5.20 | 41.68 | MaxQP | Vertical | 115 | 1 | 46.0 | -4.3 | Pass |
| #3 | 914.08 | 43.91 | 6.67 | -4.70 | 45.88 | Fundamental | Vertical | 100 | 0 | -- | -- | |
| #4 | 967.63 | 45.55 | 6.85 | -4.30 | 48.10 | MaxQP | Vertical | 107 | 21 | 53.0 | -4.9 | Pass |
| #5 | 973.31 | 46.48 | 6.89 | -4.00 | 49.37 | MaxQP | Vertical | 100 | 337 | 53.0 | -3.6 | Pass |
| #6 | 985.47 | 46.19 | 6.86 | -3.80 | 49.25 | MaxQP | Vertical | 101 | 6 | 53.0 | -3.8 | Pass |
| #7 | 995.01 | 45.40 | 6.93 | -3.60 | 48.73 | MaxQP | Vertical | 101 | 327 | 53.0 | -4.3 | Pass |

Test Notes: EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Radiated Digital Emissions

| | | | |
|---------------------------------|-----------------------------|------------------------|----------------|
| Antenna: | Tai Sheng Cheng 155-0184-00 | Variant: | 2400 kbps OFDM |
| Antenna Gain (dBi): | 1.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 926.00 | Data Rate: | 2400.00 MBit/s |
| Power Setting: | 30 | Tested By: | JMH |

Test Measurement Results

30.00 - 1000.00 MHz


| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|--------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 117.70 | 49.19 | 4.09 | -14.90 | 38.38 | MaxQP | Vertical | 99 | 154 | 43.0 | -4.6 | Pass |
| #2 | 880.46 | 40.10 | 6.59 | -5.20 | 41.49 | MaxQP | Vertical | 115 | 356 | 46.0 | -4.5 | Pass |
| #3 | 926.25 | 44.75 | 6.72 | -4.60 | 46.87 | Fundamental | Vertical | 100 | 0 | -- | -- | |
| #4 | 969.62 | 46.28 | 6.85 | -4.10 | 49.03 | MaxQP | Vertical | 106 | 207 | 53.0 | -4.0 | Pass |
| #5 | 973.63 | 46.23 | 6.89 | -4.00 | 49.12 | MaxQP | Vertical | 106 | 3 | 53.0 | -3.9 | Pass |
| #6 | 980.44 | 46.72 | 6.89 | -3.90 | 49.71 | MaxQP | Vertical | 101 | 350 | 53.0 | -3.3 | Pass |
| #7 | 990.86 | 46.11 | 6.89 | -3.60 | 49.40 | MaxQP | Vertical | 101 | 352 | 53.0 | -3.6 | Pass |

Test Notes: EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

Note: click the links in the above matrix to view the graphical image (plot).

A. APPENDIX - GRAPHICAL IMAGES

A.1. 6 dB & 99% Bandwidth

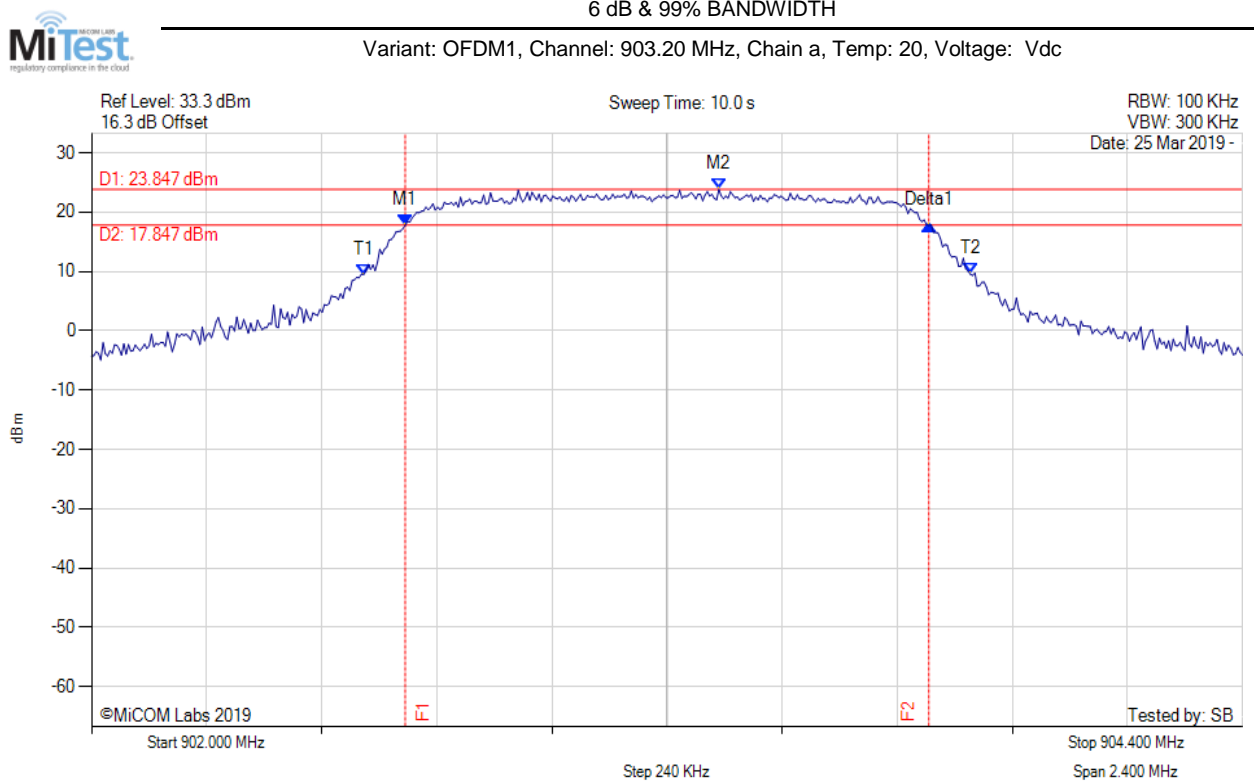


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 902.654 MHz : 17.778 dBm M2 : 903.308 MHz : 23.847 dBm Delta1 : 1.092 MHz : -0.014 dB T1 : 902.568 MHz : 9.515 dBm T2 : 903.832 MHz : 9.572 dBm OBW : 1.265 MHz | Measured 6 dB Bandwidth: 1.092 MHz Limit: ≥500.0 kHz Margin: -0.59 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: OFDM1, Channel: 914.00 MHz, Chain a, Temp: 20, Voltage: Vdc

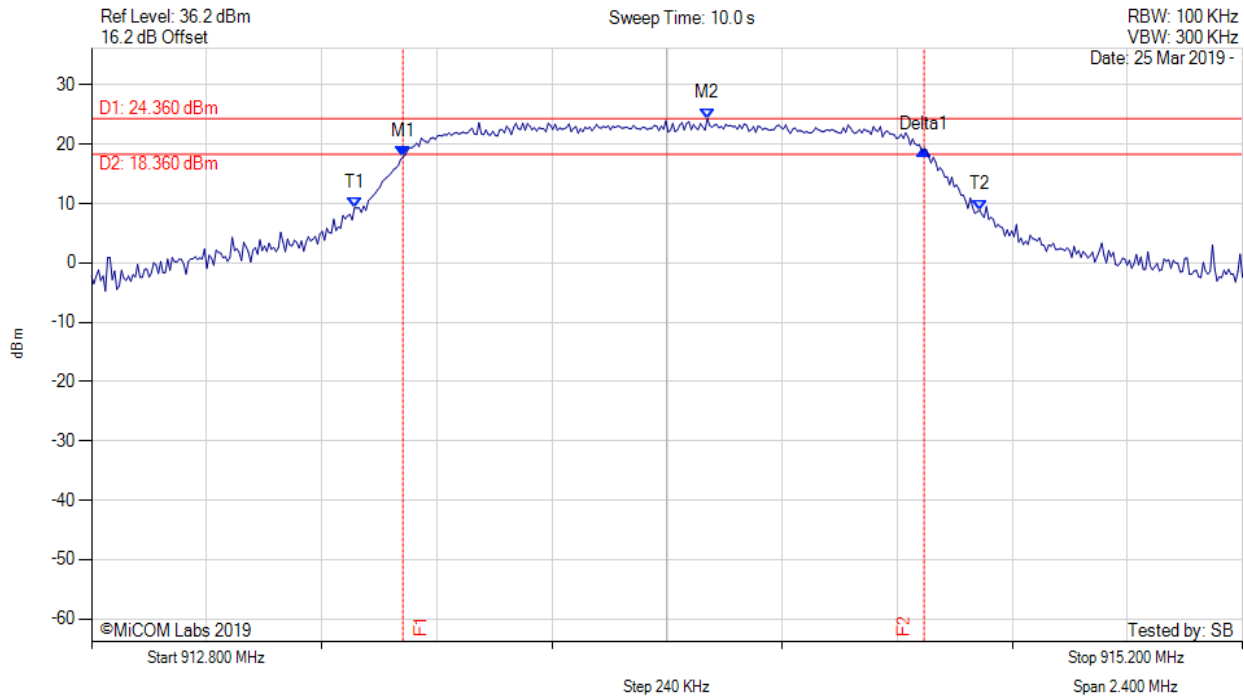


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 913.449 MHz : 17.841 dBm M2 : 914.084 MHz : 24.358 dBm Delta1 : 1.087 MHz : 1.281 dB T1 : 913.348 MHz : 9.281 dBm T2 : 914.652 MHz : 8.934 dBm OBW : 1.303 MHz | Measured 6 dB Bandwidth: 1.087 MHz Limit: ≥ 500.0 kHz Margin: -0.59 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH




Variant: OFDM1, Channel: 926.00 MHz, Chain a, Temp: 20, Voltage: Vdc

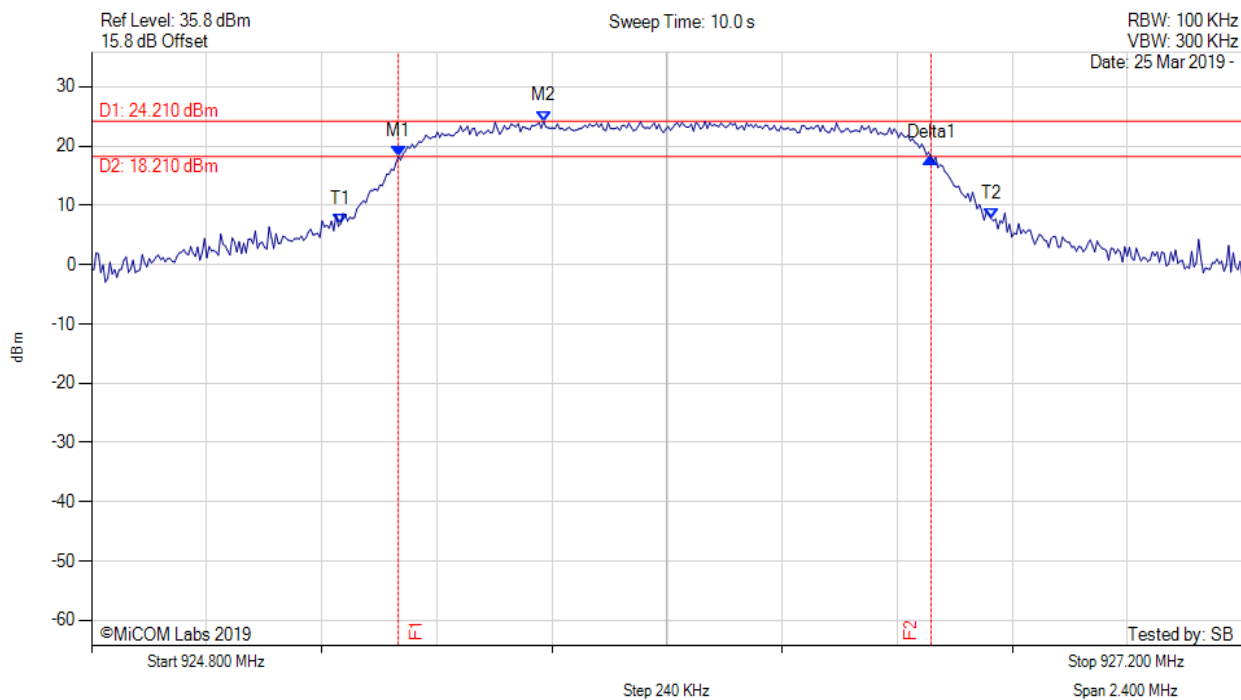

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 925.440 MHz : 18.216 dBm M2 : 925.743 MHz : 24.208 dBm Delta1 : 1.111 MHz : -0.279 dB T1 : 925.319 MHz : 6.880 dBm T2 : 926.676 MHz : 7.820 dBm OBW : 1.356 MHz | Measured 6 dB Bandwidth: 1.111 MHz Limit: ≥ 500.0 kHz Margin: -0.61 MHz |

[back to matrix](#)

A.2. Power Spectral Density

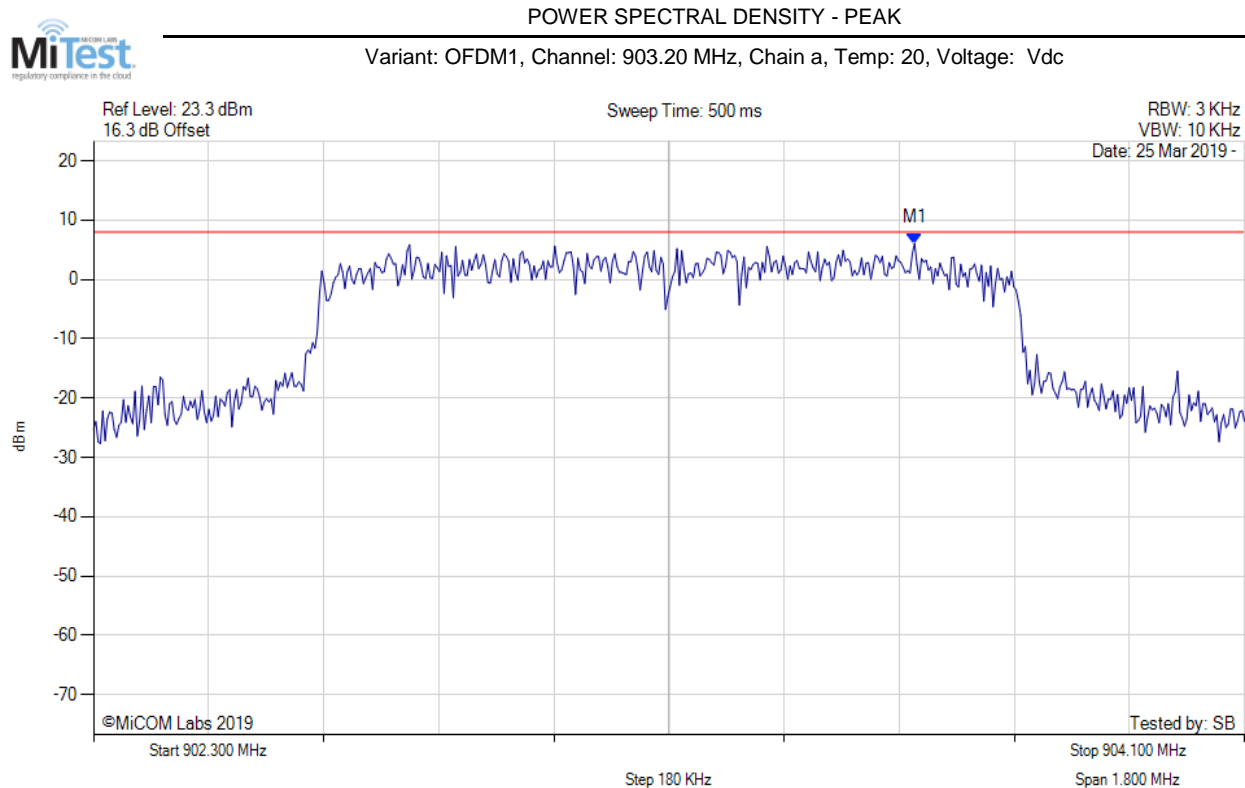


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|------------------------------|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 903.584 MHz : 6.099 dBm | Limit: ≤ 8.000 dBm Margin: -1.90 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - PEAK



Variant: OFDM1, Channel: 903.20 MHz, SUM, Temp: 20, Voltage: Vdc

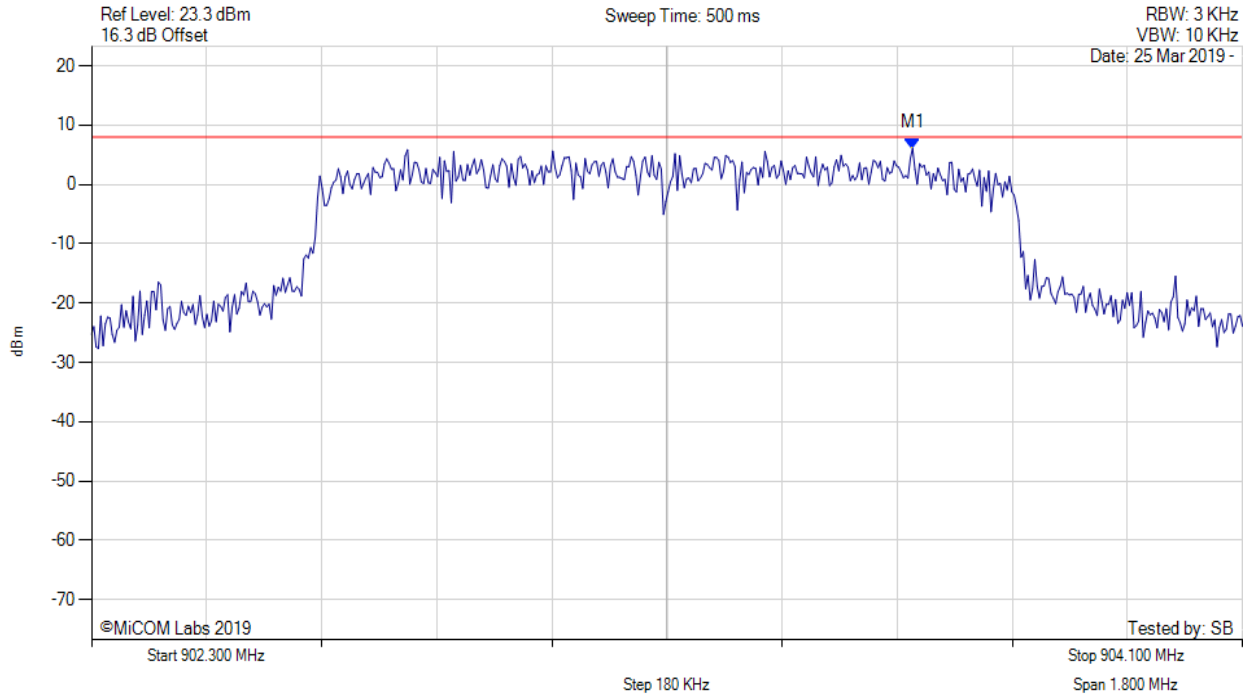


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|------------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 903.584 MHz : 6.099 dBm | Limit: ≤ 8.0 dBm Margin: -1.9 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - PEAK



Variant: OFDM1, Channel: 914.00 MHz, Chain a, Temp: 20, Voltage: Vdc

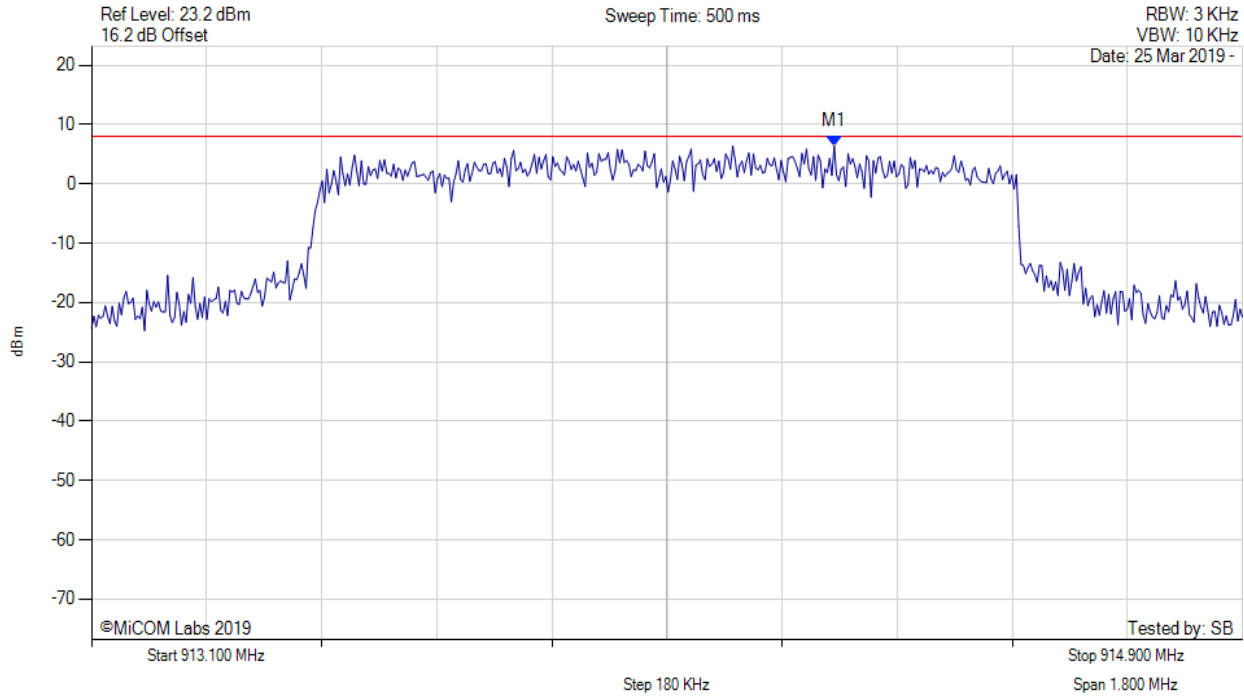


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|------------------------------|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 914.262 MHz : 6.403 dBm | Limit: ≤ 8.000 dBm Margin: -1.60 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - PEAK



Variant: OFDM1, Channel: 914.00 MHz, SUM, Temp: 20, Voltage: Vdc

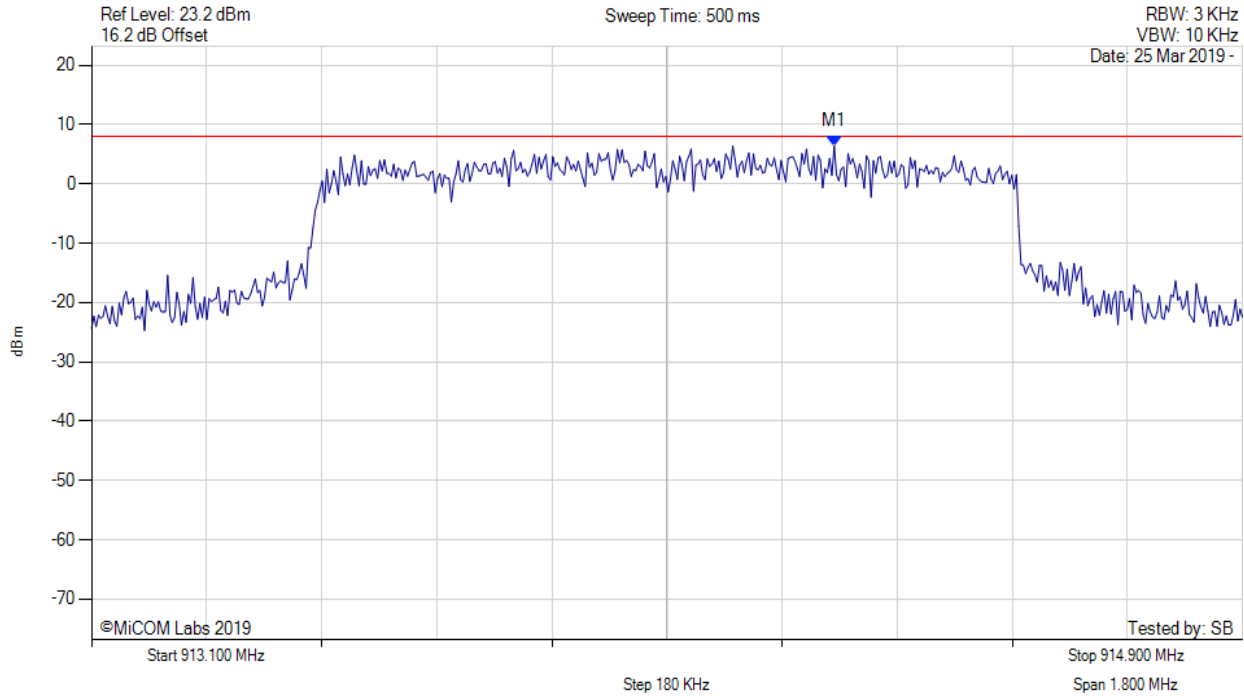


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|------------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 914.262 MHz : 6.403 dBm | Limit: ≤ 8.0 dBm Margin: -1.6 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - PEAK



Variant: OFDM1, Channel: 926.00 MHz, Chain a, Temp: 20, Voltage: Vdc

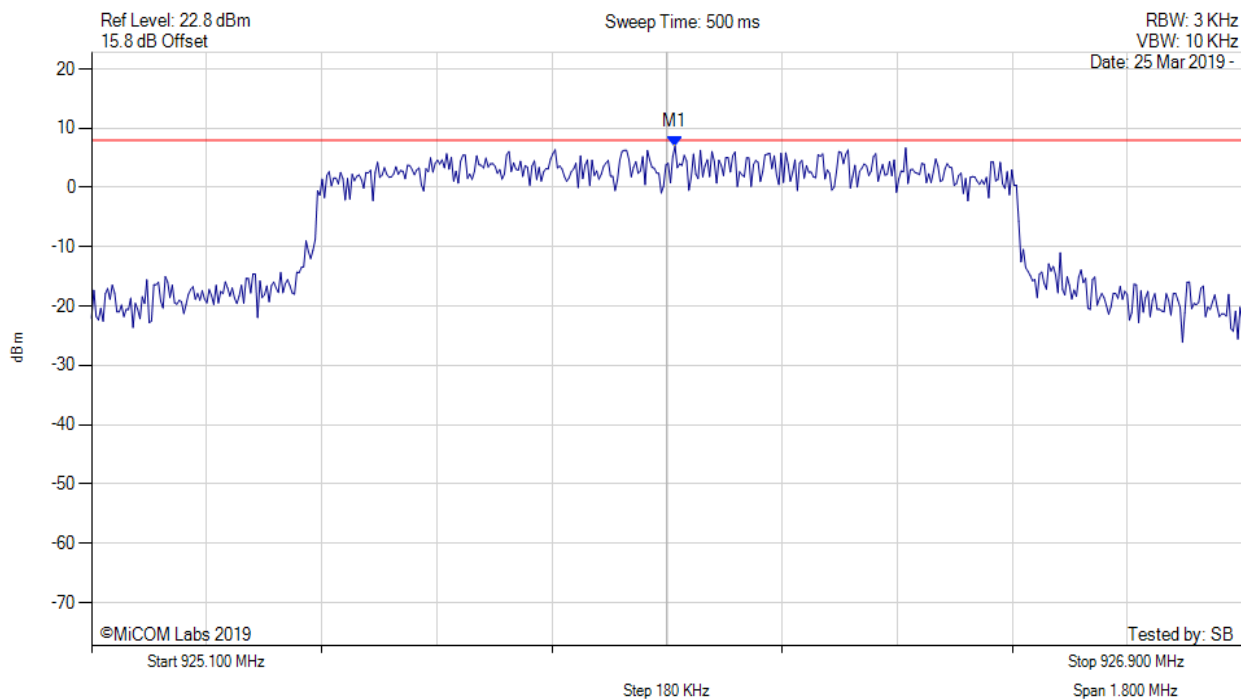


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|------------------------------|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 926.013 MHz : 6.965 dBm | Limit: ≤ 8.000 dBm Margin: -1.04 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - PEAK



Variant: OFDM1, Channel: 926.00 MHz, SUM, Temp: 20, Voltage: Vdc

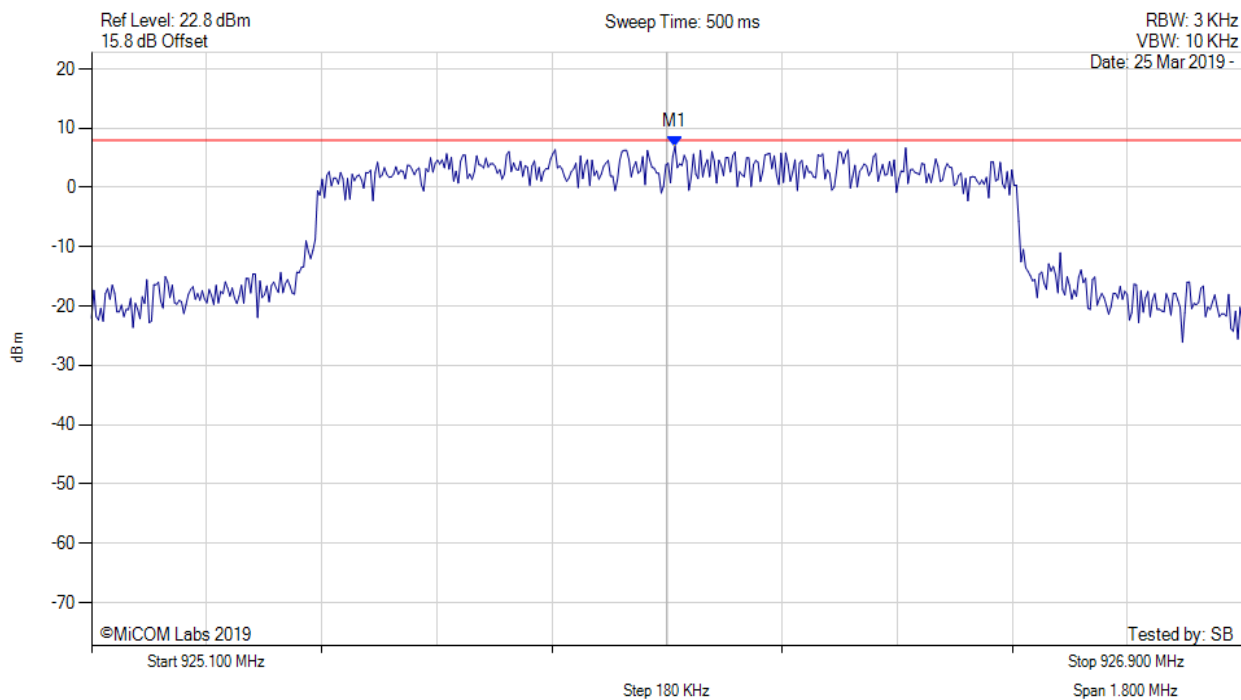


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|------------------------------|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 926.013 MHz : 6.965 dBm | Limit: ≤ 8.0 dBm Margin: -1.0 dB |

[back to matrix](#)

A.3. Emissions

A.3.1. Conducted Emissions

A.3.1.1. Conducted Spurious Emissions

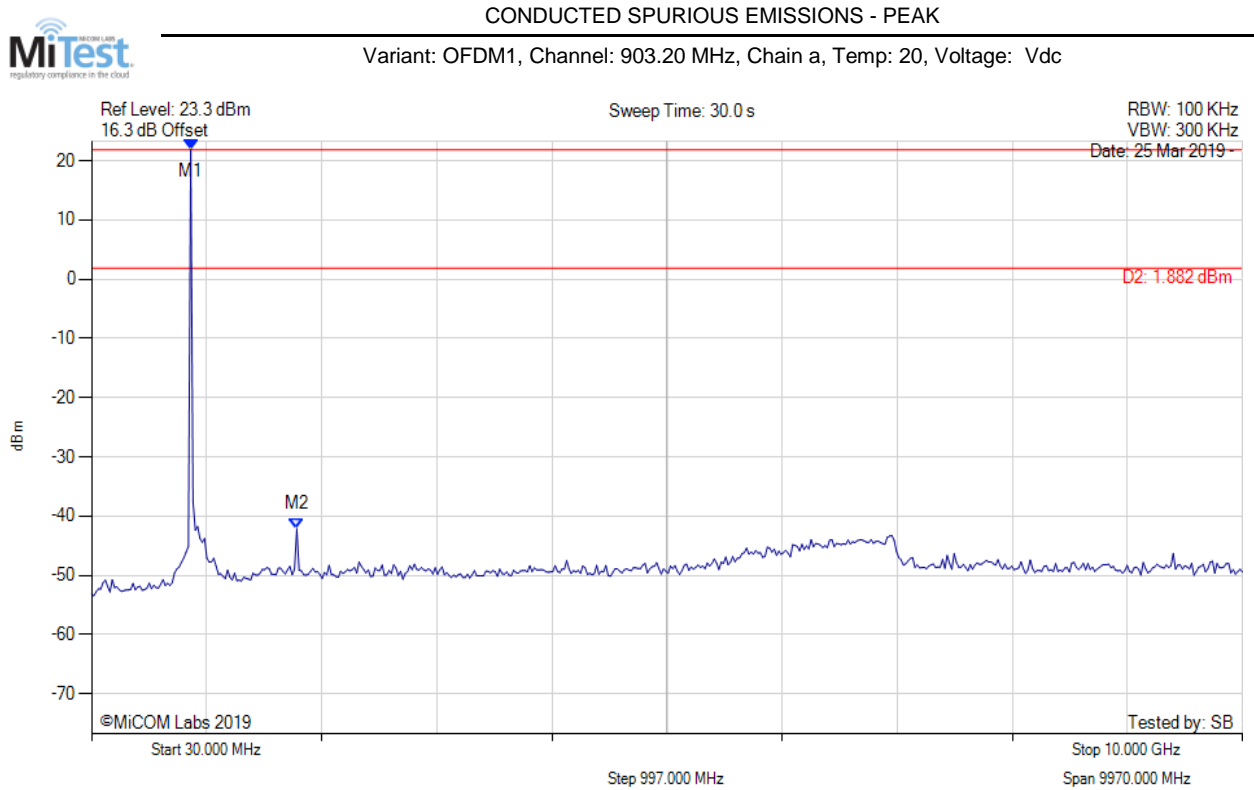


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 889.138 MHz : 21.882 dBm M2 : 1808.216 MHz : -42.168 dBm | Limit: 1.88 dBm Margin: -44.05 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: OFDM1, Channel: 914.00 MHz, Chain a, Temp: 20, Voltage: Vdc

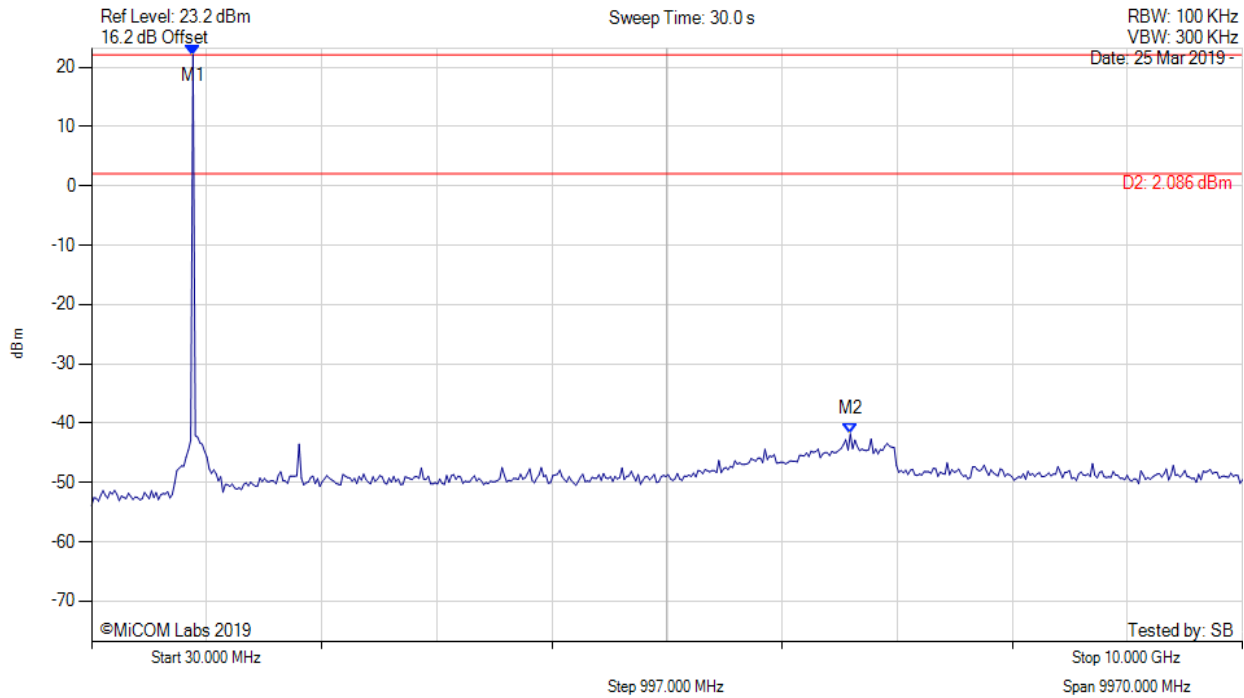


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|--------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 909.118 MHz : 22.086 dBm M2 : 6603.407 MHz : -41.809 dBm | Limit: 2.09 dBm Margin: -43.90 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - PEAK



Variant: OFDM1, Channel: 926.00 MHz, Chain a, Temp: 20, Voltage: Vdc

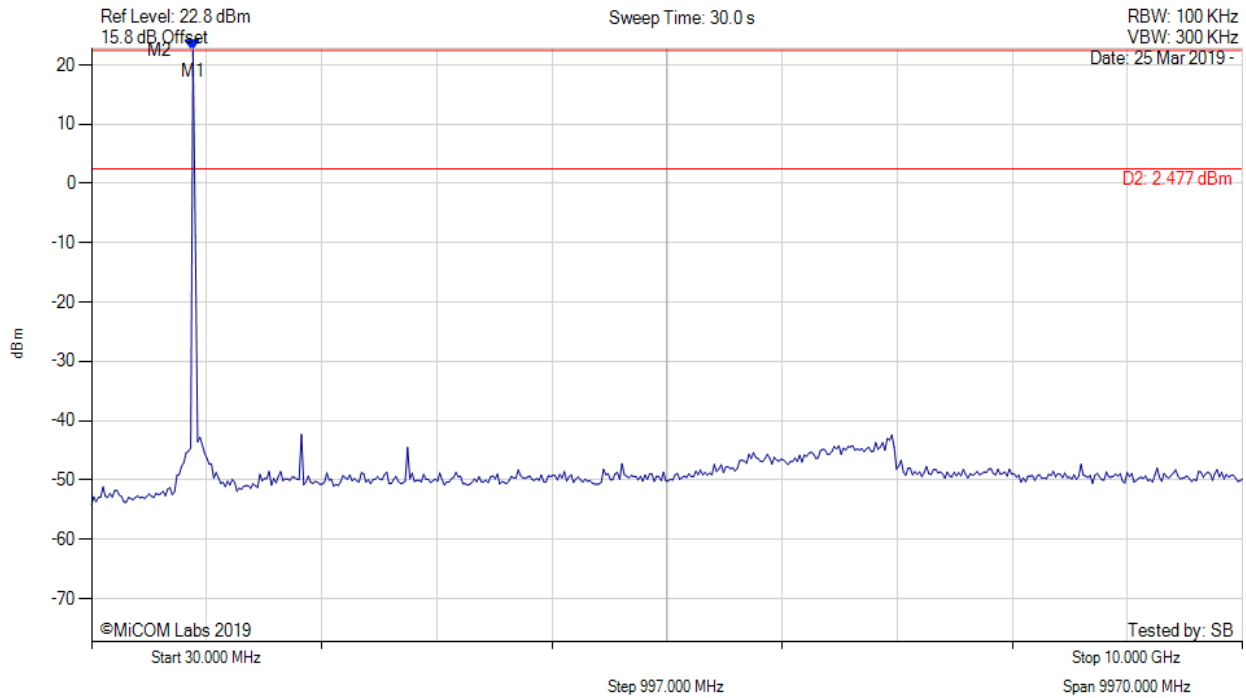

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|-------------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 909.118 MHz : 22.477 dBm M2 : 909.118 MHz : 22.477 dBm | Limit: 2.48 dBm Margin: 20.00 dB |


[back to matrix](#)

A.3.1.2. Conducted Band-Edge Emissions



CONDUCTED LOW BAND-EDGE EMISSION - PEAK

Variant: OFDM1, Channel: 903.20 MHz, Chain a, Temp: 20, Voltage: Vdc

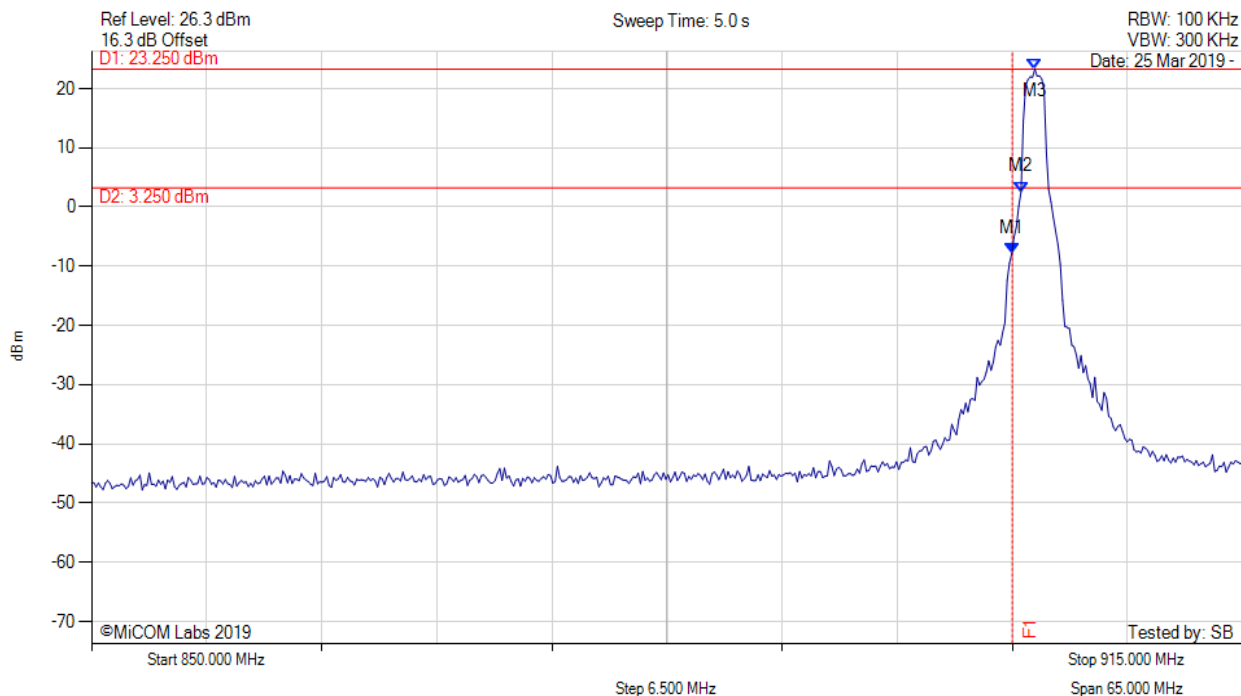


| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|--|-------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD | M1 : 902.000 MHz : -7.820 dBm M2 : 902.495 MHz : 2.548 dBm M3 : 903.277 MHz : 23.251 dBm | Channel Frequency: 903.20 MHz |

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSION - PEAK



Variant: OFDM1, Channel: 926.00 MHz, Chain a, Temp: 20, Voltage: Vdc

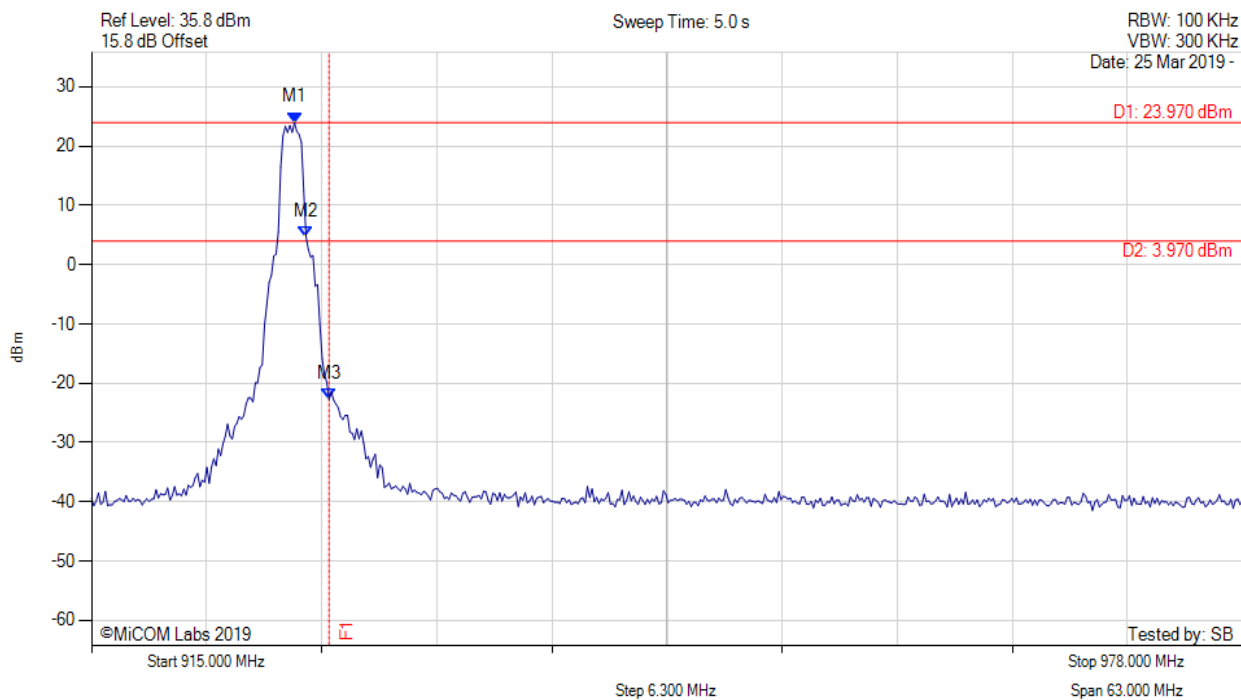

| Analyzer Setup | Marker:Frequency:Amplitude | Test Results |
|---|---|-------------------------------|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD | M1 : 926.110 MHz : 23.966 dBm M2 : 926.741 MHz : 4.667 dBm M3 : 928.000 MHz : -22.743 dBm | Channel Frequency: 926.00 MHz |

[back to matrix](#)


A.3.2. Radiated Emissions

A.3.2.3. TX Spurious & Restricted Band Emissions



TX SPURIOUS & RESTRICTED BAND EMISSIONS

OFDM1, Test Freq: 903.20 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Power Setting: 30, Duty Cycle (%): 99

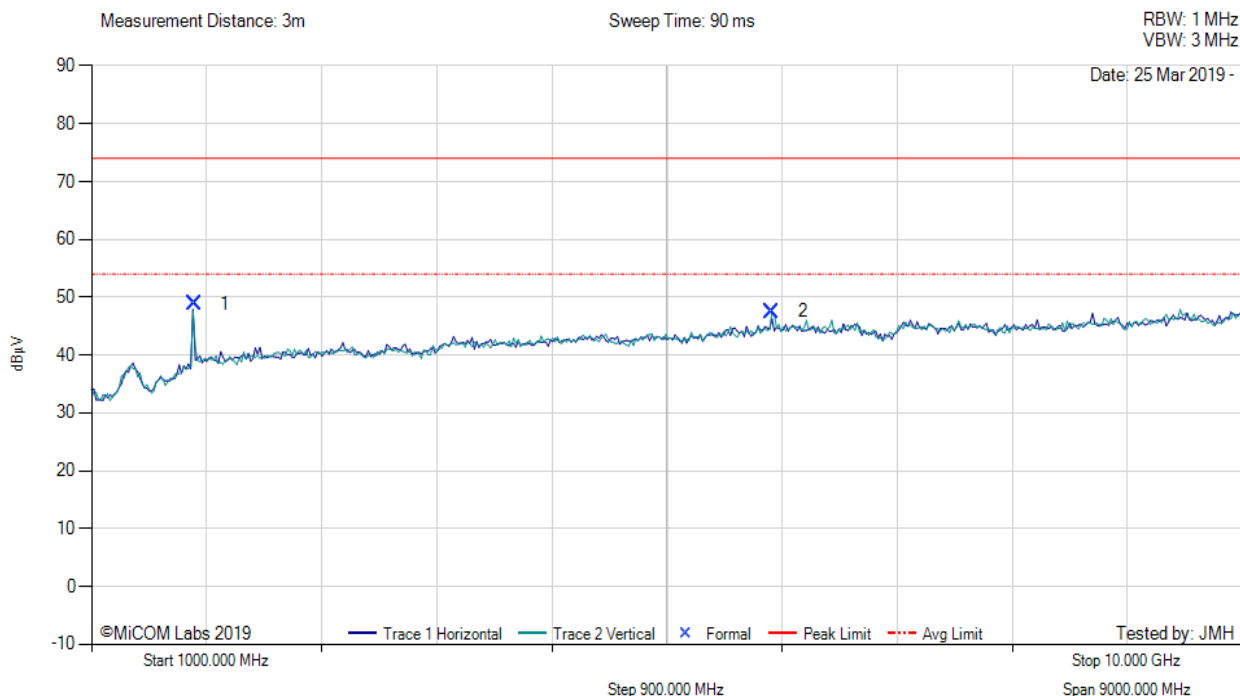

| 1000.00 - 10000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 1806.44 | 64.84 | -1.55 | -14.43 | 48.86 | Peak (NRB) | Horizontal | 151 | 47 | -- | -- | Pass |
| 2 | 6322.02 | 59.64 | -2.91 | -9.22 | 47.51 | Peak (NRB) | Vertical | 200 | 178 | -- | -- | Pass |


Test Notes: EUT powered by DC 24 V

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

OFDM1, Test Freq: 914.00 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Power Setting: 30, Duty Cycle (%): 99

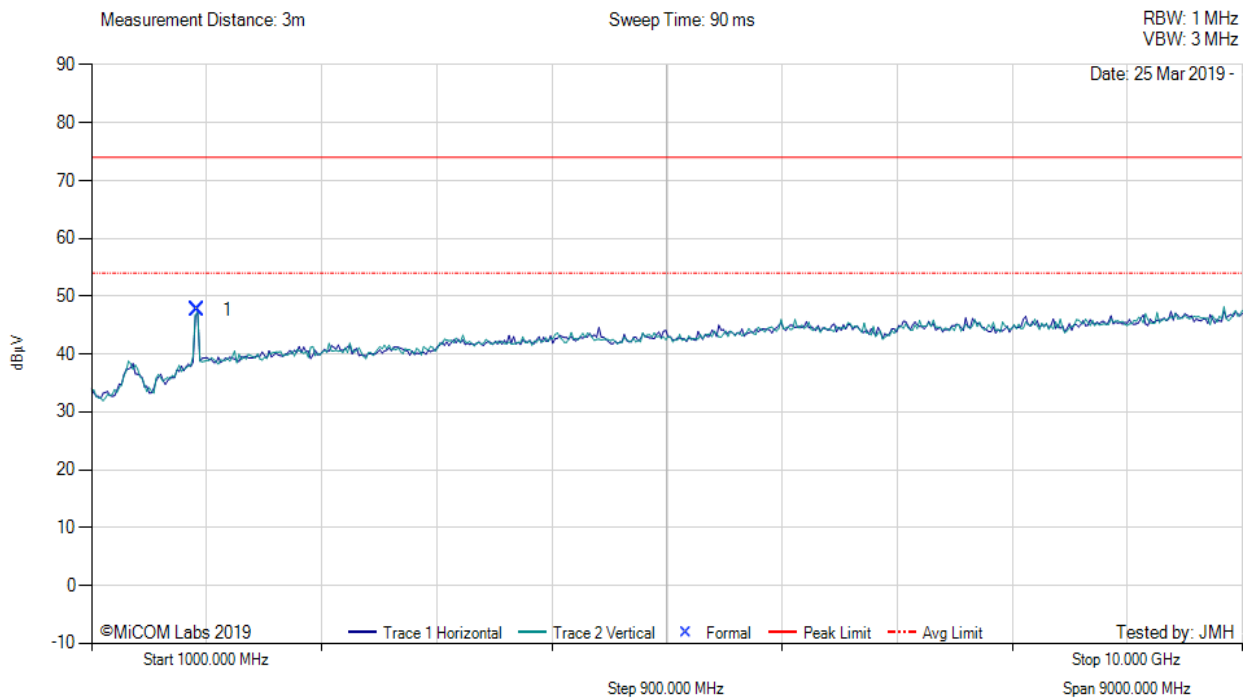

| 1000.00 - 10000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 1828.43 | 63.25 | -1.52 | -14.05 | 47.68 | Peak (NRB) | Horizontal | 100 | 51 | -- | -- | Pass |


Test Notes: EUT powered by DC 24 V

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

OFDM1, Test Freq: 926.00 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Power Setting: 30, Duty Cycle (%): 99

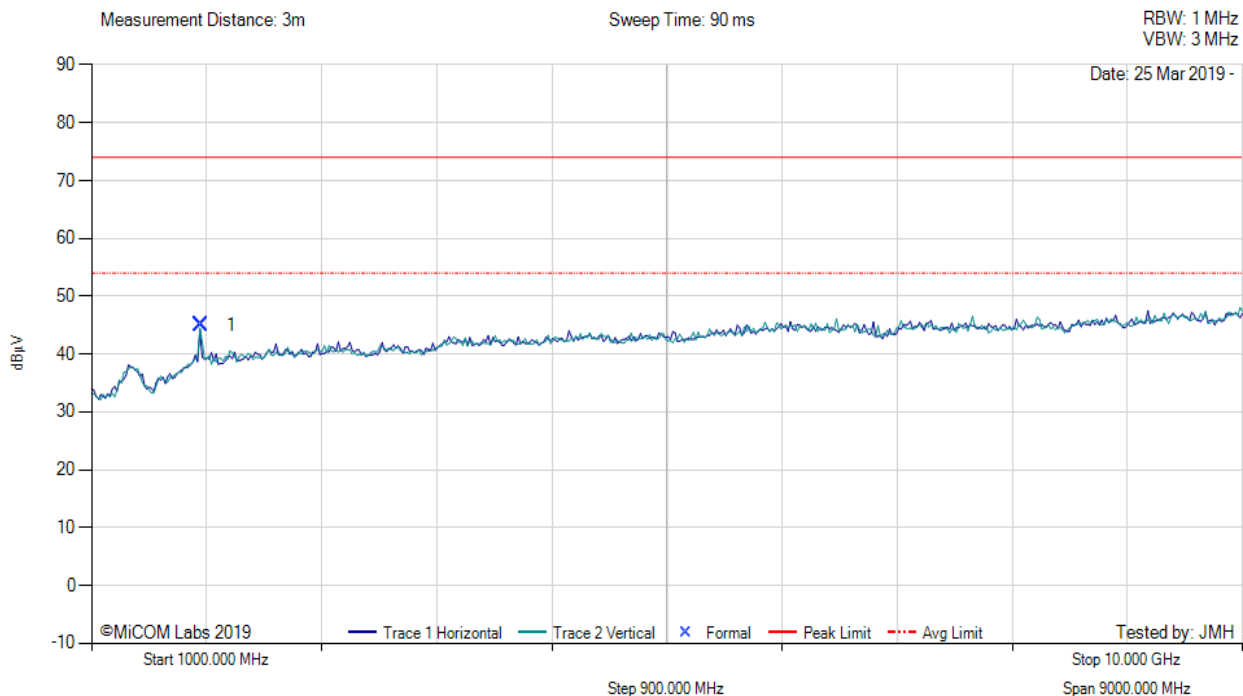


| 1000.00 - 10000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 1852.94 | 60.44 | -1.56 | -13.81 | 45.07 | Peak (NRB) | Horizontal | 200 | 180 | -- | -- | Pass |

Test Notes: EUT powered by DC 24 V

[back to matrix](#)

A.3.3. Digital Emissions (0.03 - 1 GHz)

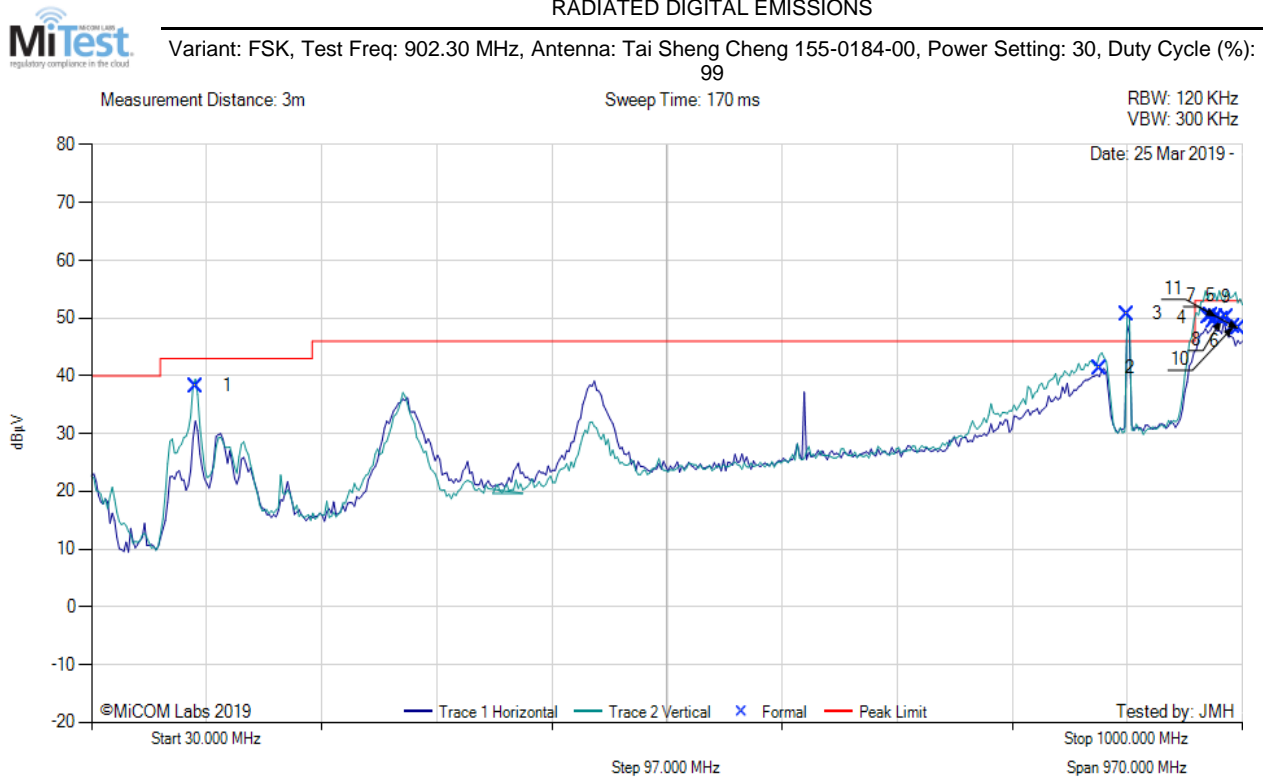

| 30.00 - 1000.00 MHz | | | | | | | | | | | | |
|---------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 118.29 | 48.96 | 4.09 | -14.80 | 38.25 | MaxQP | Vertical | 104 | 147 | 43.0 | -4.8 | Pass |
| 2 | 879.26 | 40.05 | 6.59 | -5.30 | 41.34 | MaxQP | Vertical | 124 | 0 | 46.0 | -4.7 | Pass |
| 3 | 902.91 | 49.19 | 6.65 | -5.10 | 50.74 | Fundamental | Vertical | 100 | 0 | -- | -- | |
| 4 | 971.05 | 47.20 | 6.85 | -4.00 | 50.05 | MaxQP | Vertical | 101 | 0 | 53.0 | -3.0 | Pass |
| 5 | 973.23 | 47.45 | 6.89 | -4.00 | 50.34 | MaxQP | Vertical | 100 | 5 | 53.0 | -2.7 | Pass |
| 6 | 976.05 | 46.65 | 6.87 | -4.00 | 49.52 | MaxQP | Vertical | 101 | 276 | 53.0 | -3.5 | Pass |
| 7 | 978.18 | 47.25 | 6.87 | -3.90 | 50.22 | MaxQP | Vertical | 100 | 2 | 53.0 | -2.8 | Pass |
| 8 | 982.38 | 46.68 | 6.88 | -3.80 | 49.76 | MaxQP | Vertical | 103 | 18 | 53.0 | -3.2 | Pass |
| 9 | 986.58 | 47.11 | 6.87 | -3.90 | 50.08 | MaxQP | Vertical | 101 | 354 | 53.0 | -2.9 | Pass |
| 10 | 992.64 | 45.35 | 6.90 | -3.70 | 48.55 | MaxQP | Vertical | 112 | 343 | 53.0 | -4.5 | Pass |
| 11 | 996.73 | 45.02 | 6.93 | -3.80 | 48.15 | MaxQP | Vertical | 106 | 16 | 53.0 | -4.9 | Pass |

Test Notes: EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

[back to matrix](#)

RADIATED DIGITAL EMISSIONS




Variant: 2400 kbps OFDM, Test Freq: 914.00 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Power Setting: 30, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz
VBW: 300 KHz

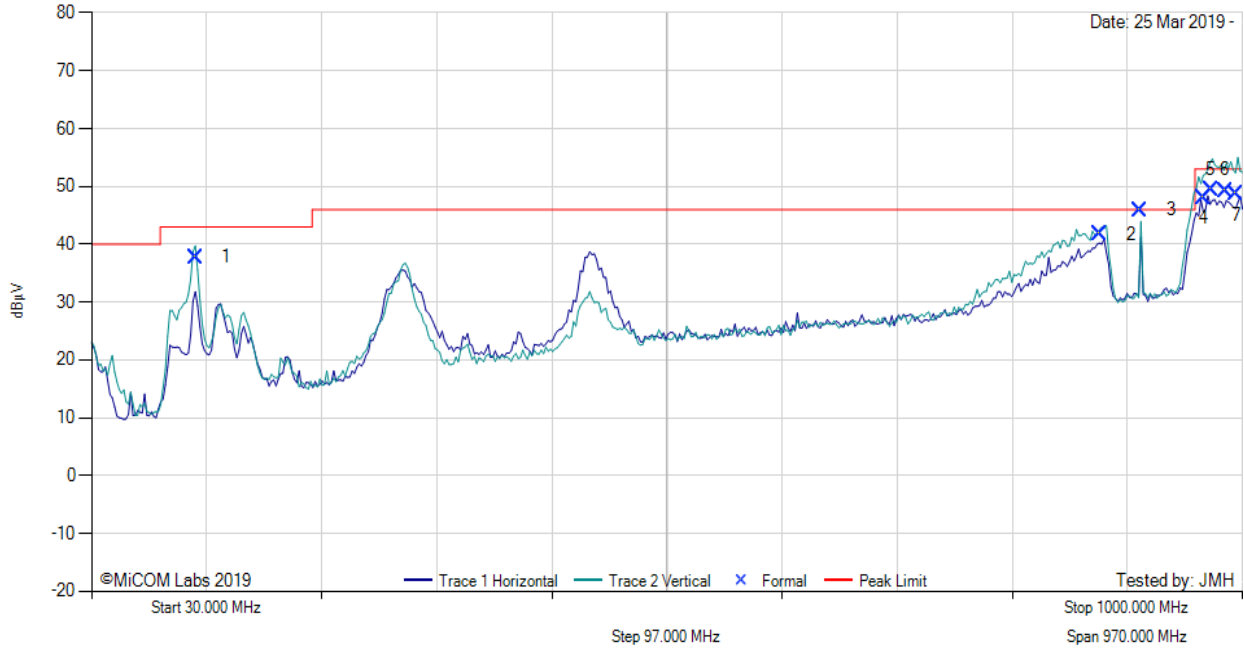

30.00 - 1000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 118.07 | 48.49 | 4.09 | -14.80 | 37.78 | MaxQP | Vertical | 99 | 155 | 43.0 | -5.2 | Pass |
| 2 | 880.16 | 40.29 | 6.59 | -5.20 | 41.68 | MaxQP | Vertical | 115 | 1 | 46.0 | -4.3 | Pass |
| 3 | 914.08 | 43.91 | 6.67 | -4.70 | 45.88 | Fundamental | Vertical | 100 | 0 | -- | -- | |
| 4 | 967.63 | 45.55 | 6.85 | -4.30 | 48.10 | MaxQP | Vertical | 107 | 21 | 53.0 | -4.9 | Pass |
| 5 | 973.31 | 46.48 | 6.89 | -4.00 | 49.37 | MaxQP | Vertical | 100 | 337 | 53.0 | -3.6 | Pass |
| 6 | 985.47 | 46.19 | 6.86 | -3.80 | 49.25 | MaxQP | Vertical | 101 | 6 | 53.0 | -3.8 | Pass |
| 7 | 995.01 | 45.40 | 6.93 | -3.60 | 48.73 | MaxQP | Vertical | 101 | 327 | 53.0 | -4.3 | Pass |

Test Notes: EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

[back to matrix](#)

RADIATED DIGITAL EMISSIONS




Variant: 2400 kbps OFDM, Test Freq: 926.00 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Power Setting: 30, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz
VBW: 300 KHz

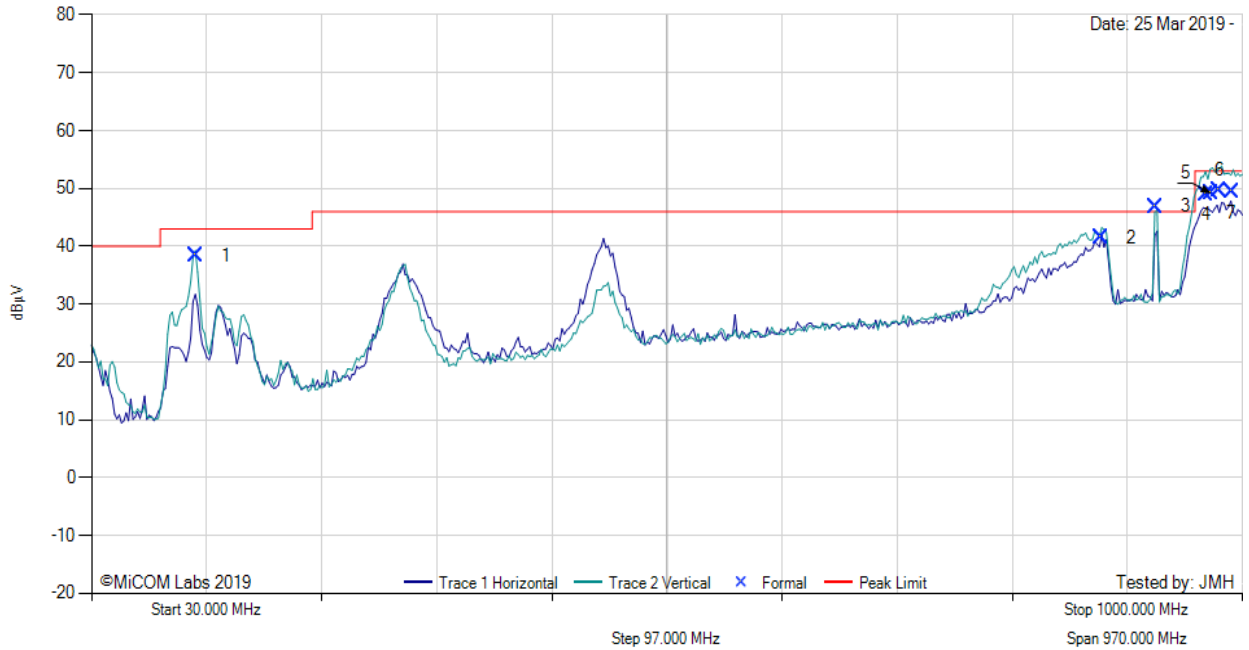

30.00 - 1000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 117.70 | 49.19 | 4.09 | -14.90 | 38.38 | MaxQP | Vertical | 99 | 154 | 43.0 | -4.6 | Pass |
| 2 | 880.46 | 40.10 | 6.59 | -5.20 | 41.49 | MaxQP | Vertical | 115 | 356 | 46.0 | -4.5 | Pass |
| 3 | 926.25 | 44.75 | 6.72 | -4.60 | 46.87 | Fundamental | Vertical | 100 | 0 | -- | -- | |
| 4 | 969.62 | 46.28 | 6.85 | -4.10 | 49.03 | MaxQP | Vertical | 106 | 207 | 53.0 | -4.0 | Pass |
| 5 | 973.63 | 46.23 | 6.89 | -4.00 | 49.12 | MaxQP | Vertical | 106 | 3 | 53.0 | -3.9 | Pass |
| 6 | 980.44 | 46.72 | 6.89 | -3.90 | 49.71 | MaxQP | Vertical | 101 | 350 | 53.0 | -3.3 | Pass |
| 7 | 990.86 | 46.11 | 6.89 | -3.60 | 49.40 | MaxQP | Vertical | 101 | 352 | 53.0 | -3.6 | Pass |

Test Notes: EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com