



## **REGULATORY COMPLIANCE TEST REPORT**

**FCC: CFR 47 FCC 15.247 (900 MHz FHSS)  
ISED: RSS-247 Issue 2**

**Report No.: ITRO29-U2 Rev A**

Company: Itron Networked Solutions, Inc

Model Name: NIC 531-0601

## REGULATORY COMPLIANCE TEST REPORT

**Company:** Itron Networked Solutions, Inc

**Model Name:** NIC 531-0601

**To:** FCC 15.247 & ISED RSS-247

Test Report Serial No.: ITRO29-U2 Rev A

This report supersedes: ITRO18-U2 Rev A

**Applicant:** Itron Networked Solutions, Inc.  
230 West Tasman Drive  
San Jose, California 95134  
USA

**Product Function:** Plug in radio device, mesh network

**Issue Date:** 19<sup>th</sup> May 2020

### **This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**

## Table of Contents

<b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>4</b>
1.1. TESTING ACCREDITATION .....	4
1.2. RECOGNITION .....	5
1.3. PRODUCT CERTIFICATION .....	6
<b>2. DOCUMENT HISTORY .....</b>	<b>7</b>
<b>3. TEST RESULT CERTIFICATE .....</b>	<b>8</b>
<b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
4.1. Normative References .....	9
4.2. Test and Uncertainty Procedure .....	10
<b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>11</b>
5.1. Technical Details .....	11
5.2. Scope Of Test Program .....	12
5.3. Equipment Model(s) and Serial Number(s).....	13
5.4. Antenna Details .....	13
5.5. Cabling and I/O Ports .....	13
5.6. Test Configurations .....	13
5.7. Equipment Modifications .....	14
5.8. Deviations from the Test Standard .....	14
<b>6. TEST SUMMARY .....</b>	<b>15</b>
<b>7. TEST EQUIPMENT CONFIGURATION(S).....</b>	<b>16</b>
7.1. Conducted RF Emission Test Setup with Environmental Chamber .....	16
7.2. Radiated Emissions 3M Chamber.....	18
<b>8. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>21</b>
<b>9. TEST RESULTS .....</b>	<b>22</b>
9.1. 20 dB & 99% Bandwidth .....	22
9.2. Frequency Hopping Tests .....	31
9.2.1. Number of Hopping Channels .....	32
9.2.2. Channel Separation.....	35
9.2.3. Channel Occupancy & Dwell Time .....	38
9.3. Output Power .....	41
9.4. Emissions .....	51
9.4.1. Conducted Emissions.....	51
9.4.1.1. Conducted Unwanted Spurious Emissions .....	52
9.4.1.2. Conducted Band-Edge Emissions .....	55
9.4.2. Radiated Emissions.....	67
9.4.2.3. TX Spurious & Restricted Band Emissions .....	70
9.4.3. Digital Emissions (0.03 - 1 GHz) .....	73
<b>A. APPENDIX - GRAPHICAL IMAGES .....</b>	<b>78</b>
A.1. 20 dB & 99% Bandwidth .....	79
A.2. Frequency Hopping Tests.....	103
A.2.1. Number of Hopping Channels.....	103
A.2.2. Channel Separation .....	112
A.2.3. Dwell Time.....	115
A.2.4. Channel Occupancy.....	118
A.3. Emissions.....	121
A.3.1. Conducted Emissions .....	121
A.3.1.1. Conducted Unwanted Spurious Emissions .....	121
A.3.1.2. Conducted Band-Edge Emissions.....	130
A.3.2. Radiated Emissions .....	142
A.3.2.3. TX Spurious & Restricted Band Emissions .....	142
A.3.3. Digital Emissions (0.03 - 1 GHz).....	145

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



## 1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 agreements with Canada, Europe and Japan, our international recognition includes Conformity Assessment Body designation under Phase 1 agreements with APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Firm Designation #: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 ISED #: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA 2	NB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

### MRA Phase

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification



### 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

## 2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	19 <sup>th</sup> May 2020	Client requested to extend the frequency range of the NIC 531-0601 device. No hardware or physical changes were made to the device in order to extend the frequency range.  Initial frequency range: 902.3 - 926.8 MHz New frequency range: 902.3 - 927.6 MHz  Due to the margin when the device was initially tested only mode 150Kbp/s FSK @ 927.6MHz was exercised
Rev A	20 <sup>th</sup> May 2020	Updated Release
Initial Test Report Release: ITRO18-U2		
Rev A	25 <sup>th</sup> April 2019	Initial Release

In the above table the latest report revision will replace all earlier versions.

### 3. TEST RESULT CERTIFICATE

<b>Manufacturer:</b> Itron Networked Solutions, Inc. 230 West Tasman Drive San Jose California 95134, USA	<b>Tested By:</b> MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
<b>Model:</b> NIC 531-0601	<b>Telephone:</b> +1 925 462 0304 <b>Fax:</b> +1 925 462 0306
<b>Equipment Type:</b> Plug in radio device, mesh network	
<b>S/N's:</b> 00:13:50:07:00:00:1A:CA 00:13:50:07:00:00:19:82 (927.6 MHz)	
<b>Test Date(s):</b> 29 <sup>th</sup> March 2019 Updated 19 <sup>th</sup> May 2020 (927.6 MHz)	<b>Website:</b> www.micomlabs.com


STANDARD(S)	TEST RESULTS
FCC 15.247 & ISED RSS-247 (900 MHz FHSS)	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


**Notes:**

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**



Graeme Grieve  
Quality Manager MiCOM Labs, Inc.



Gordon Hurst  
President & CEO MiCOM Labs, Inc.



## 4. REFERENCES AND MEASUREMENT UNCERTAINTY

### 4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 558074 D01 v05	24th August 2018	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC Rules.
II	A2LA	August 2018	R105 - Requirement's When Making Reference to A2LA Accreditation Status
III	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
IV	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
V	CISPR 32	2015	Electromagnetic compatibility of multimedia equipment - Emission requirements
VI	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VII	FCC 47 CFR Part 15, Subpart B	2014	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES, SubPart B; Unintentional Radiators
VIII	FCC 47 CFR Part 15.247	2016	Radio Frequency Devices; Subpart C – Intentional Radiators
IX	FCC Public Notice DA 00-705	March 2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
X	ICES-003	Issue 6 Jan 2016; Updated April 2017	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
XI	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XII	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XIII	RSS-Gen Issue 5	April 2018	General Requirements for Compliance of Radio Apparatus
XIV	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.

## **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

Details	Description
Purpose:	Test of the Itron Networked Solutions, Inc. NIC 531-0601 to FCC 15.247 & ISED RSS-247. Radio Frequency Devices; Subpart C – Intentional Radiators: & ISED RSS-247; Digital Transmission Systems (DTSS), Frequency Hopping System (FHSS) and Licence-Exempt Local Area Network (LE-LEN) Devices.
Applicant:	Itron Networked Solutions, Inc. 230 West Tasman Drive San Jose California 95134, USA
Manufacturer:	Itron Networked Solutions, Inc.
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	ITRO29-U2 Draft
Date EUT received:	16 <sup>th</sup> May 2020
Standard(s) applied:	FCC 15.247 & ISED RSS-247
Dates of test (from - to):	19 <sup>th</sup> May 2020
No of Units Tested:	2
Product Family Name:	NIC 531-0601
Model(s):	NIC 531-0601, NIC 531-0601-12, NIC 531-0601-13
Location for use:	Both
Declared Frequency Range(s):	902 - 928 MHz
Type of Modulation:	FHSS
EUT Modes of Operation:	902 - 928 MHz: 50 kbps/FSK; 100 kbps/FSK; 150 kbps/FSK; 150 kbps/GFSK; 200 kbps/GFSK; 300 kbps/GFSK; 6.25 kbps/OQPSK; 600kbps/OFDM3
Declared Nominal Output Power:	902 - 928 MHz: 30 dBm.
Transmit/Receive Operation:	Transceiver – Half Duplex
Rated Input Voltage and Current:	24 VDC
Operating Temperature Range:	-40 to +85°C
ITU Emission Designator:	FSK 117KF1D FSK 162KF1D OQPSK 115KF1D
Equipment Dimensions:	4.2in X 0.75in x 3.75in
Weight:	0.2 lb
Hardware Rev:	173-0972-00
Software Rev:	4.6.0

## **5.2. Scope Of Test Program**

### **Itron Networked Solutions, Inc NIC 531-0601**

The scope of the test program was to test the Itron Networked Solutions, Inc NIC 531-0601 FHSS configurations in the frequency ranges 902 - 928 MHz for compliance against the following specification:

**FCC CFR 47 Part 15.247 (FHSS);** Radio Frequency Devices; Subpart C – Intentional Radiators

### **Industry Canada RSS-247**

Digital Transmission Systems (DTs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices

The EUT supports the following modes of operation:-

- 100 kbps/FSK
- 50 kbps/FSK
- 150 kbps/FSK
- 150 kbps/GFSK
- 200 kbps/GFSK
- 300 kbps/GFSK
- 6.25 kbps/OQPSK
- 600 kbps/OFDM

Only the lowest and highest data rates were tested to cover extreme ranges of the device.

### **The following product description was provided by Itron Inc.**

NIC 531-0601 is a plug-in radio device, will communicate over mesh and HAN networks. The NIC 531-0601 may be integrated into Itron Centron II meters and may support standard and extended last gasp (ELG).

NIC 531-0601 products include the following model numbers/configurations:

- NIC 531-0601: 900+2.4, INT ANT, HW1
- NIC 531-0601-12: 900+2.4, INT ANT, HW1, 15s ELG
- NIC 531-0601-13: 900+2.4, INT ANT, HW1, 75s ELG

### 5.3. Equipment Model(s) and Serial Number(s)

Equipment	Equipment Type	Manufacturer	Model	Serial Number
NIC 531-0601	EUT	Itron Networked Solutions, Inc	NIC 531-0601	00:13:50:07:00:00:1A:CA
Laptop Computer	Support	Dell	Latitude E6410	N/A

### 5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Tai Sheng Cheng	155-0184-00	f type	1.0	-	360	-	902 - 928
integral	Tai Sheng Cheng	155-0184-00	f type	0.0	-	360	-	2400 - 2483.5

BF Gain - Beamforming Gain  
 Dir BW - Directional BeamWidth  
 X-Pol - Cross Polarization

### 5.5. Cabling and I/O Ports

NONE

### 5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power KBit/s	Channel Frequency (MHz)		
		Low	Mid	High
<b>902 - 928 MHz</b>				
FSK	100	902.3	915.2	926.9
FSK	50	902.4	915.2	926.8
FSK	150	902.4	915.2	927.6
GFSK	150	902.3	915.2	926.9
GFSK	200	902.3	915.2	926.9
GFSK	300	902.4	915.2	926.8
OQPSK	6.25	902.4	915.2	926.8
OFDM	600	902.4	915.2	926.8



### **5.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

### **5.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE


## 6. TEST SUMMARY

### List of Measurements

Test Header	Result	Data Link
20 dB & 99% Bandwidth	Complies	<a href="#">View Data</a>
Frequency Hopping Tests	Complies	-
Number of Hopping Channels	Complies	<a href="#">View Data</a>
Channel Separation	Complies	<a href="#">View Data</a>
Dwell Time	Complies	<a href="#">View Data</a>
Channel Occupancy	Complies	<a href="#">View Data</a>
Output Power	Complies	<a href="#">View Data</a>
Emissions	Complies	-
(1) Conducted Emissions	Complies	-
(i) Conducted Unwanted Spurious Emissions	Complies	<a href="#">View Data</a>
(ii) Conducted Band-Edge Emissions	Complies	<a href="#">View Data</a>
(2) Radiated Emissions	Complies	-
(i) TX Spurious & Restricted Band Emissions	Complies	<a href="#">View Data</a>
(3) Digital Emissions (0.03 - 1 GHz)	Complies	<a href="#">View Data</a>

## 7. TEST EQUIPMENT CONFIGURATION(S)

### 7.1. Conducted RF Emission Test Setup with Environmental Chamber

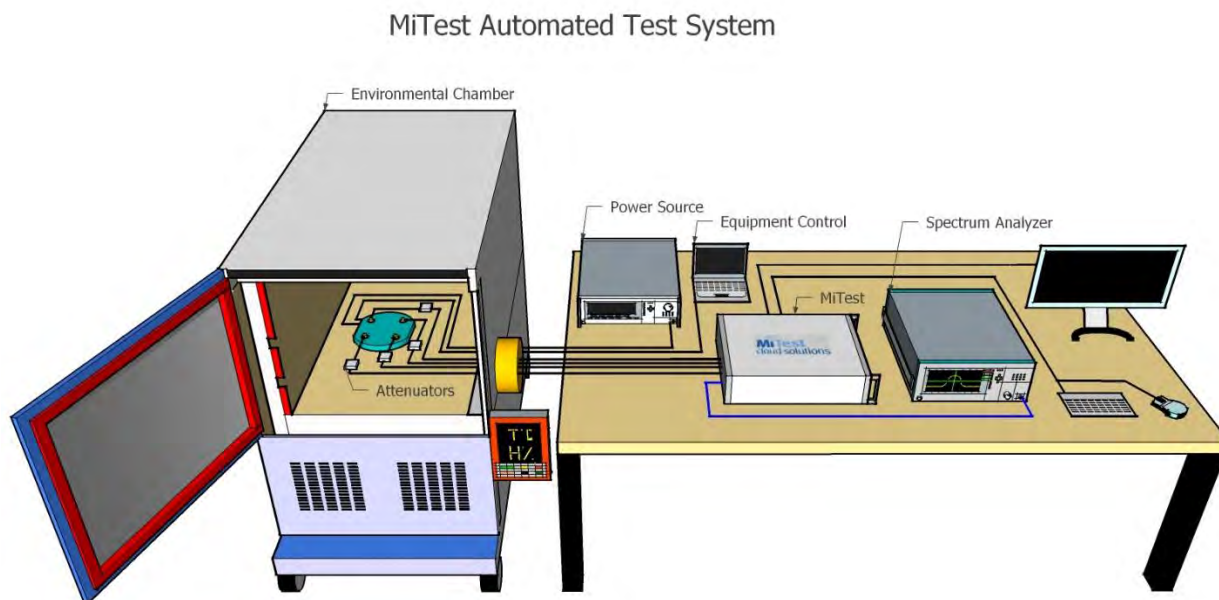

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.


Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	9 Sep 2020
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	9 Sep 2020
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	9 Sep 2020
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	9 Sep 2020
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	9 Sep 2020
249	Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	30 Oct 2020
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2020
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	12 Oct 2020
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.1	Not Required

405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
440	USB Wideband Power Sensor	Boonton	55006	9178	22 Sep 2020
441	USB Wideband Power Sensor	Boonton	55006	9179	20 Sep 2020
442	USB Wideband Power Sensor	Boonton	55006	9181	19 Sep 2020
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	20 Sep 2020
510	Barometer/Thermometer	Control Company	68000-49	170871375	20 Dec 2020
515	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen with DFS	515	9 Sep 2020
534	Power Sensor 50 GHz - 70dBm to +20dBm	R&S	NRP50SN	1419.0093K02-100888-SB	26 Feb 2021
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	20 Feb 2021


## 7.2. Radiated Emissions 3M Chamber

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions below 1GHz. Radiated Emissions above 1GHz.

Radiated Emissions Below 1GHz Test Setup

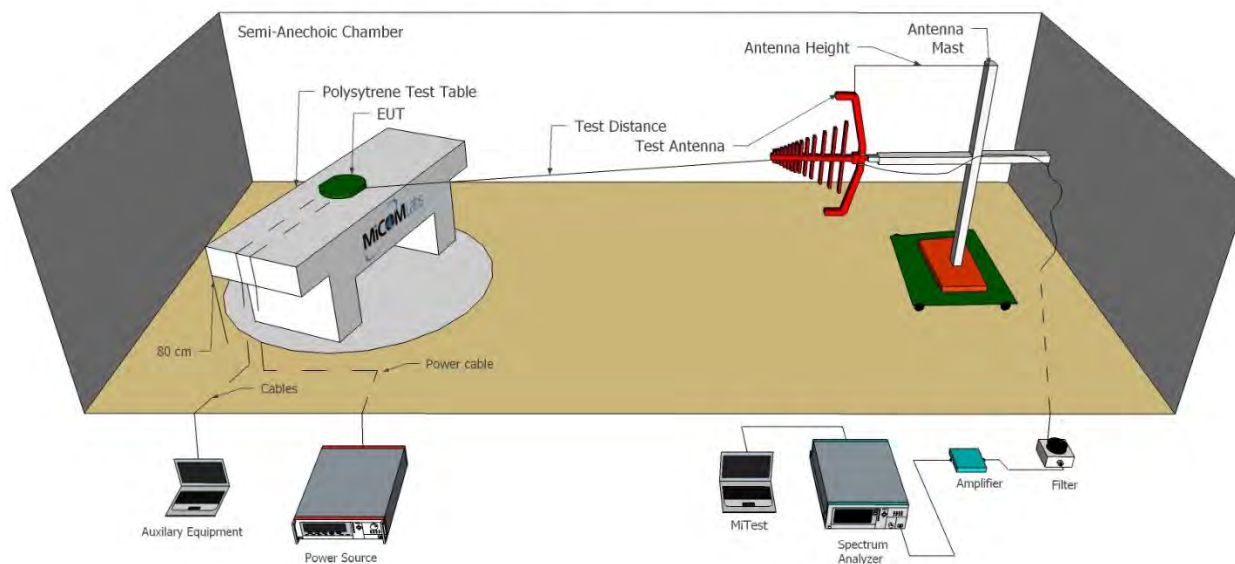

Radiated Emissions Above 1GHz Test Setup

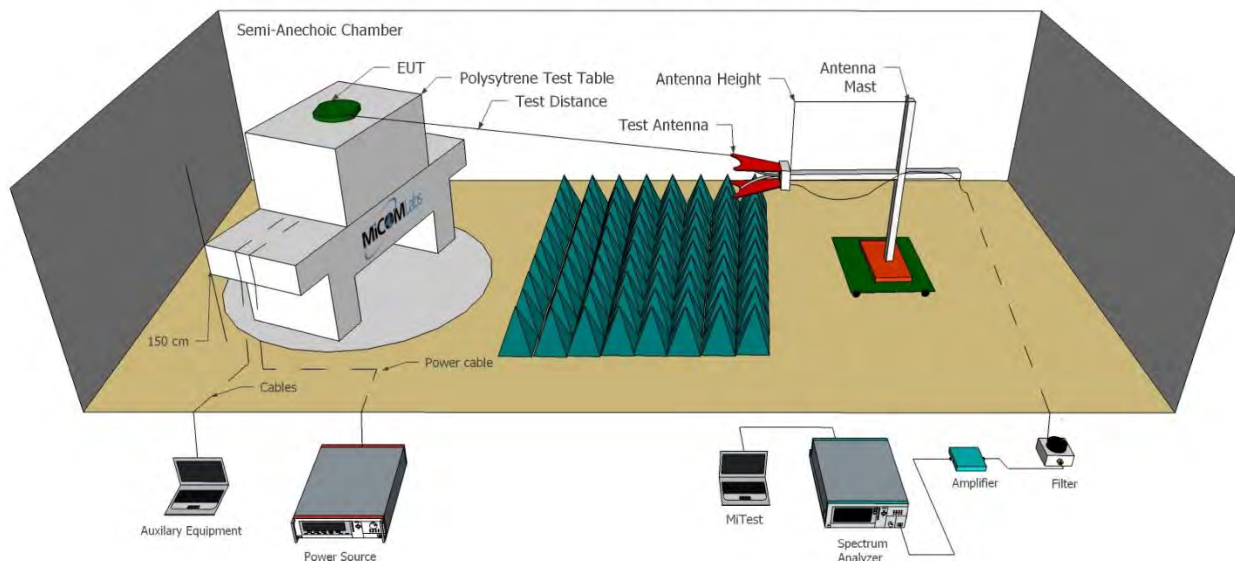

full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

A



Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2020
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	26 Nov 2020
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	29 Nov 2020
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	4 Apr 2021
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	3 Sep 2020
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	3 Sep 2020
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	21 Sep 2020
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	3 Sep 2020
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	12 Oct 2020
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	3 Sep 2020
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	6 Sep 2020
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	12 Oct 2020
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	9 Sep 2020
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	5 Sep 2020
463	Schwarzbeck cable from	Schwarzbeck	AK 9513	463	5 Sep 2020

	Amplifier to Bulkhead.				
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	9 Sep 2020
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	3 Sep 2020
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	9 Sep 2020
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	9 Sep 2020
510	Barometer/Thermometer	Control Company	68000-49	170871375	20 Dec 2020
518	Cable - Amp to Antenna	SRC Haverhill	157-3051574	518	9 Sep 2020
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	4 Oct 2020

## 8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

## 9. TEST RESULTS

### 9.1. 20 dB & 99% Bandwidth

Conducted Test Conditions for 20 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.247 ISED RSS-247:5.1	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	20 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(1)(i)/(ii)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for 20 dB and 99% Bandwidth Measurement

The bandwidth at 20 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### Limits for 20 dB and 99% Bandwidth

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

**Equipment Configuration for 20 dB 99% Bandwidth**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	100.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	a	b	c	d				
902.3	<a href="#">0.130</a>	--	--	--	0.130	0.130	0.5	-0.37
915.2	<a href="#">0.129</a>	--	--	--	0.129	0.129	0.5	-0.37
926.9	<a href="#">0.127</a>	--	--	--	0.127	0.127	0.5	-0.37

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
	a	b	c	d			
902.3	<a href="#">0.116</a>	--	--	--	0.116		
915.2	<a href="#">0.117</a>	--	--	--	0.117		
926.9	<a href="#">0.115</a>	--	--	--	0.115		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).



**Equipment Configuration for 20 dB 99% Bandwidth**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	MHz
902.4	<a href="#">0.180</a>	--	--	--	0.180	0.180	0.5	-0.32
915.2	<a href="#">0.180</a>	--	--	--	0.180	0.180	0.5	-0.32
927.6	<a href="#">0.184</a>	--	--	--	0.184	0.184	0.5	-0.28

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for 20 dB 99% Bandwidth**

<b>Variant:</b>	OQPSK	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.25 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OQPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	MHz
902.4	<a href="#">0.123</a>				0.123	0.123	0.5	-0.38
915.0	<a href="#">0.128</a>				0.128	0.128	0.5	-0.37
926.8	<a href="#">0.125</a>				0.125	0.125	0.5	-0.38

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
	MHz	a	b	c	d		
902.4	<a href="#">0.114</a>	--	--	--	0.114		
915.0	<a href="#">0.115</a>	--	--	--	0.115		
926.8	<a href="#">0.114</a>	--	--	--	0.114		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for 20 dB 99% Bandwidth**

<b>Variant:</b>	2FSK	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	50.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	2FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	MHz
902.4	<a href="#">0.084</a>	--	--	--	0.084	0.084	0.5	-0.416
915.2	<a href="#">0.087</a>	--	--	--	0.087	0.087	0.5	-0.413
926.8	<a href="#">0.084</a>	--	--	--	0.084	0.084	0.5	-0.416

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for 20 dB 99% Bandwidth**

<b>Variant:</b>	GFSK	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	GFSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	MHz
902.3	<a href="#">0.179</a>	--	--	--	0.179	0.179	0.5	-0.321
915.2	<a href="#">0.182</a>	--	--	--	0.182	0.182	0.5	-0.318
926.9	<a href="#">0.181</a>	--	--	--	0.181	0.181	0.5	-0.319

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for 20 dB 99% Bandwidth**

<b>Variant:</b>	GFSK	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	200.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	GFSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	MHz
902.3	<a href="#">0.232</a>	--	--	--	0.232	0.232	0.5	-0.268
915.2	<a href="#">0.238</a>	--	--	--	0.238	0.238	0.5	-0.262
926.9	<a href="#">0.232</a>	--	--	--	0.232	0.232	0.5	-0.268

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).



**Equipment Configuration for 20 dB 99% Bandwidth**

<b>Variant:</b>	GFSK	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	300.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	GFSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit MHz	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
902.4	<a href="#">0.367</a>	--	--	--	0.367	0.367	0.5	-0.133
915.2	<a href="#">0.360</a>	--	--	--	0.360	0.360	0.5	-0.140
926.8	<a href="#">0.363</a>	--	--	--	0.363	0.363	0.5	-0.137

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for 20 dB 99% Bandwidth**

<b>Variant:</b>	OFDM3	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	600.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM3	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	MHz
902.4	<a href="#">0.335</a>	--	--	--	0.335	0.335	0.5	-0.165
915.2	<a href="#">0.332</a>	--	--	--	0.332	0.332	0.5	-0.168
926.8	<a href="#">0.366</a>	--	--	--	0.366	0.366	0.5	-0.134

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

## 9.2. Frequency Hopping Tests

Conducted Test Conditions for Frequency Hopping Measurements			
<b>Standard:</b>	FCC CFR 47:15.247 (a)(1)(i)/(iii) ISED RSS-247:5.1	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Frequency Hopping Tests	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(1)(i)/(ii)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References, FCC Public Notice DA 00-705		

### Test Procedure for Frequency Hopping Measurements

These tests cover the following measurements:

- i) channel separation
- ii) channel occupancy
- iii) dwell time
- iv) number of hopping frequencies

Frequency hopping testing was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency or hopping mode.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

### Limits for Frequency Hopping Measurements

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 9.2.1. Number of Hopping Channels

<b>Equipment Configuration for Number of Hopping Channels</b>
---

<b>Variant:</b>	FSK	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	100.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

<b>Test Measurement Results</b>
---------------------------------

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	<a href="#">26</a>	--	--
910.0-920.1	<a href="#">34</a>	--	--
920.0-928.0	<a href="#">23</a>	--	--
<b>Total number of Hops</b>	<b>83</b>	<b>50</b>	<b>Pass</b>

<b>Traceability to Industry Recognized Test Methodologies</b>
---

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Number of Hopping Channels**

<b>Variant:</b>	FSK	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	<a href="#">20</a>	--	--
910.0-920.0	<a href="#">25</a>	--	--
920.0-928.0	<a href="#">20</a>	--	--
<b>Total number of Hops</b>	<b>65</b>	<b>50</b>	<b>Pass</b>

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).



**Equipment Configuration for Number of Hopping Channels**

<b>Variant:</b>	OQPSK	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	6.25 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OQPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	<a href="#">37</a>	--	--
910.0-920.0	<a href="#">50</a>	--	--
920.0-928.0	<a href="#">36</a>	--	--
<b>Total number of Hops</b>	<b>123</b>	<b>50</b>	<b>Pass</b>

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

### 9.2.2. Channel Separation

<b>Equipment Configuration for Channel Separation</b>
---

<b>Variant:</b>	FSK	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	100.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

<b>Test Measurement Results</b>
---------------------------------

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.2	<a href="#">0.300</a>	0.127	Pass

<b>Traceability to Industry Recognized Test Methodologies</b>
---

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

<b>Equipment Configuration for Channel Separation</b>
---

<b>Variant:</b>	FSK	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

<b>Test Measurement Results</b>
---------------------------------

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.2	<a href="#">0.400</a>	0.180	Pass

<b>Traceability to Industry Recognized Test Methodologies</b>
---

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Channel Separation**

<b>Variant:</b>	OQPSK	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	6.25 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OQPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.0	<a href="#">0.400</a>	0.125	Pass

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

### 9.2.3. Channel Occupancy & Dwell Time

<b>Equipment Configuration for Channel Occupancy</b>
--

<b>Variant:</b> FSK	<b>Antenna:</b> Not Applicable
<b>Data Rate:</b> 100.00 KBit/s	<b>Antenna Gain (dBi):</b> Not Applicable
<b>Modulation:</b> FSK	<b>Beam Forming Gain (Y)(dB):</b> Not Applicable
<b>Duty Cycle (%):</b> 99.0	<b>Tested By:</b> SB
<b>Engineering Test Notes:</b>	

<b>Test Measurement Results</b>
---------------------------------

Channel Frequency(MHz)	Dwell Time (Single Burst) (S)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
915.20	<a href="#">0.101</a>	<a href="#">201.040</a>	20.00	400.000	Pass

<b>Traceability to Industry Recognized Test Methodologies</b>
---

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Channel Occupancy**

<b>Variant:</b>	FSK	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Channel Frequency(MHz)	Dwell Time (Single Burst) (S)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
915.20	<a href="#">0.055</a>	<a href="#">165.330</a>	20.00	400.000	Pass

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).



**Equipment Configuration for Channel Occupancy**

<b>Variant:</b>	OQPSK	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	6.25 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OQPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Channel Frequency(MHz)	Dwell Time (Single Burst) (S)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
915.00	<a href="#">0.136</a>	<a href="#">136.170</a>	20.00	400.000	Pass

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

### 9.3. Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
<b>Standard:</b>	FCC CFR 47: 15.247 (a)(1), (b)(1)/(2)/(3) ISED RSS-247:5.4	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(1), (b)(1)/(2)/(3)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Fundamental Emission Output Power Measurement

In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions, nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed ( $\Sigma$ ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information

Calculated Power = A + G + Y + 10 log (1/x) dBm

A = Total Power [ $10 \cdot \text{Log}_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$ ]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

#### Limits for Fundamental Emission Output Power

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for frequency hopping systems:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time

intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

**Equipment Configuration for Output Power Peak**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	100.00 KBit/s	<b>Antenna Gain (dBi):</b>	1.00
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured Output Power (dBm) Port(s)				Calculated Total Power $\Sigma$ Port(s) dBm	Limit dBm	Margin dB
	a	b	c	d			
902.3	29.61	--	--	--	29.61	30.00	-0.39
915.2	29.88	--	--	--	29.88	30.00	-0.12
926.9	29.09	--	--	--	29.09	30.00	-0.91

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

EUT power settings are held on file.

**Equipment Configuration for Output Power Peak**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	1.00
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power $\Sigma$ Port(s)	Limit	Margin
	Port(s)						
MHz	a	b	c	d	dBm	dBm	dB
902.4	29.62	--	--	--	29.62	30.00	-0.38
915.2	29.55	--	--	--	29.55	30.00	-0.45
927.6	29.79	--	--	--	29.79	30.00	-0.21

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

EUT power settings are held on file.

**Equipment Configuration for Output Power Peak**

<b>Variant:</b>	OQPSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.25 KBit/s	<b>Antenna Gain (dBi):</b>	1.00
<b>Modulation:</b>	OQPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power $\Sigma$ Port(s)	Limit	Margin
	Port(s)						
MHz	a	b	c	d	dBm	dBm	dB
902.4	29.83	--	--	--	29.83	30.00	-0.17
915.0	29.37	--	--	--	29.37	30.00	-0.63
926.8	29.60	--	--	--	29.60	30.00	-0.40

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

EUT power settings are held on file.



**Equipment Configuration for Output Power Peak**

<b>Variant:</b>	2FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	50.00 KBit/s	<b>Antenna Gain (dBi):</b>	1.00
<b>Modulation:</b>	2FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured Output Power (dBm) Port(s)				Calculated Total Power $\Sigma$ Port(s) dBm	Limit dBm	Margin dB
	a	b	c	d			
902.4	29.48	--	--	--	29.48	30	-0.52
915.2	29.55	--	--	--	29.55	30	-0.45
926.8	29.27	--	--	--	29.27	30	-0.73

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

EUT power settings are held on file.

**Equipment Configuration for Output Power Peak**

<b>Variant:</b>	GFSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	1.00
<b>Modulation:</b>	GFSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power $\Sigma$ Port(s)	Limit	Margin
	Port(s)						
MHz	a	b	c	d	dBm	dBm	dB
902.3	29.73	--	--	--	29.73	30	-0.27
915.2	29.56	--	--	--	29.56	30	-0.44
926.9	29.48	--	--	--	29.48	30	-0.52

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

EUT power settings are held on file.

**Equipment Configuration for Output Power Peak**

<b>Variant:</b>	GFSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	200.00 KBit/s	<b>Antenna Gain (dBi):</b>	1.00
<b>Modulation:</b>	GFSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power $\Sigma$ Port(s)	Limit	Margin
	Port(s)						
MHz	a	b	c	d	dBm	dBm	dB
902.3	29.53	--	--	--	29.53	30	-0.47
915.2	29.36	--	--	--	29.36	30	-0.64
926.9	29.59	--	--	--	29.59	30	-0.41

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

EUT power settings are held on file.

**Equipment Configuration for Output Power Peak**

<b>Variant:</b>	GFSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	300.00 KBit/s	<b>Antenna Gain (dBi):</b>	1.00
<b>Modulation:</b>	GFSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power $\Sigma$ Port(s)	Limit	Margin
	Port(s)						
MHz	a	b	c	d	dBm	dBm	dB
902.4	29.54	--	--	--	29.54	30	-0.46
915.2	29.78	--	--	--	29.78	30	-0.22
926.8	29.39	--	--	--	29.39	30	-0.61

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

EUT power settings are held on file.

**Equipment Configuration for Output Power Peak**

<b>Variant:</b>	OFDM3	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	600.00 KBit/s	<b>Antenna Gain (dBi):</b>	1.00
<b>Modulation:</b>	OFDM3	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power $\Sigma$ Port(s)	Limit	Margin
	Port(s)						
MHz	a	b	c	d	dBm	dBm	dB
902.4	29.17	--	--	--	29.17	30	-0.83
915.2	29.33	--	--	--	29.33	30	-0.67
926.8	29.19	--	--	--	29.19	30	-0.81

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

EUT power settings are held on file.

## 9.4. Emissions

### 9.4.1. Conducted Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Standard:</b>	FCC CFR 47:15.247 (d) ISED RSS-247:5.5	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Transmitter Conducted Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (d)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



### 9.4.1.1. Conducted Unwanted Spurious Emissions

Equipment Configuration for Unwanted Emissions Peak			
<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	100.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
902.3	30.0 - 10000.0	<a href="#">-32.622</a>	8.26	--	--	--	--	--	--
915.2	30.0 - 10000.0	<a href="#">-32.661</a>	8.46	--	--	--	--	--	--
926.9	30.0 - 10000.0	<a href="#">-33.600</a>	5.05	--	--	--	--	--	--

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Unwanted Emissions Peak**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
902.4	30.0 - 10000.0	<a href="#">-32.769</a>	7.59	--	--	--	--	--	--
915.2	30.0 - 10000.0	<a href="#">-33.029</a>	6.79	--	--	--	--	--	--
927.6	30.0 - 10000.0	<a href="#">-32.113</a>	6.93	--	--	--	--	--	--

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Unwanted Emissions Peak**

<b>Variant:</b>	OQPSK	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.25 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OQPSK	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
<a href="#">902.4</a>	30.0 - 10000.0	<a href="#">-32.927</a>	7.92	--	--	--	--	--	--
<a href="#">915.0</a>	30.0 - 10000.0	<a href="#">-32.960</a>	6.71	--	--	--	--	--	--
<a href="#">926.8</a>	30.0 - 10000.0	<a href="#">-33.132</a>	5.50	--	--	--	--	--	--

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

### 9.4.1.2. Conducted Band-Edge Emissions

#### Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	100.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	902.3 MHz					
<b>Band-Edge Frequency:</b>	902.0 MHz					
<b>Test Frequency Range:</b>	875.0 - 905.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	<a href="#">-11.75</a>	4.97	902.10	--	--	-0.100

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	902.4 MHz					
<b>Band-Edge Frequency:</b>	902.0 MHz					
<b>Test Frequency Range:</b>	875.0 - 905.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-18.38</a>	8.77	902.20	--	--	-0.200

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak**

<b>Variant:</b>	OQPSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.25 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OQPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	902.4 MHz					
<b>Band-Edge Frequency:</b>	902.0 MHz					
<b>Test Frequency Range:</b>	875.0 - 905.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-29.17</a>	8.58	902.60	--	--	-0.600

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).



**Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	100.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	902.3 MHz					
<b>Band-Edge Frequency:</b>	902.0 MHz					
<b>Test Frequency Range:</b>	875.0 - 905.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-8.72</a>	8.47	902.10	--	--	-0.100

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	902.4 MHz					
<b>Band-Edge Frequency:</b>	902.0 MHz					
<b>Test Frequency Range:</b>	875.0 - 905.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-18.59</a>	7.85	902.20	--	--	-0.200

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak**

<b>Variant:</b>	OQPSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.25 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OQPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	902.4 MHz					
<b>Band-Edge Frequency:</b>	902.0 MHz					
<b>Test Frequency Range:</b>	875.0 - 905.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-19.11</a>	8.22	902.20	--	--	-0.200

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	100.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	926.9 MHz					
<b>Band-Edge Frequency:</b>	928.0 MHz					
<b>Test Frequency Range:</b>	925.0 - 950.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-36.30</a>	6.12	927.10	--	--	-0.900

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	927.6 MHz					
<b>Band-Edge Frequency:</b>	928.0 MHz					
<b>Test Frequency Range:</b>	925.0 - 950.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	<a href="#">-20.326</a>	9.650	927.54	--	--	-0.246

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak**

<b>Variant:</b>	OQPSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.25 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OQPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	926.8 MHz					
<b>Band-Edge Frequency:</b>	928.0 MHz					
<b>Test Frequency Range:</b>	925.0 - 950.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-32.04</a>	8.57	927.00	--	--	-1.000

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).



**Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	100.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	927.6 MHz					
<b>Band-Edge Frequency:</b>	928.0 MHz					
<b>Test Frequency Range:</b>	925.0 - 950.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-21.960</a>	2.380	927.704	--	--	-0.296

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak**

<b>Variant:</b>	FSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	150.00 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	926.8 MHz					
<b>Band-Edge Frequency:</b>	928.0 MHz					
<b>Test Frequency Range:</b>	925.0 - 950.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	<a href="#">-32.33</a>	6.18	927.00	--	--	-1.000

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak**

<b>Variant:</b>	OQPSK	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.25 KBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OQPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	926.8 MHz					
<b>Band-Edge Frequency:</b>	928.0 MHz					
<b>Test Frequency Range:</b>	925.0 - 950.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-31.64</a>	6.02	927.00	--	--	-1.000

**Traceability to Industry Recognized Test Methodologies**

<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
<b>Measurement Uncertainty:</b>	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

**9.4.2. Radiated Emissions**

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
<b>Standard:</b>	FCC CFR 47:15.247 FCC CFR 47: Part 15.205 ISED RSS-GEN:8.9, 8.10	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.205, 15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

**Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)**

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Limits for **Restricted Bands**

Peak emission: 74 dBuV/m  
 Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

- FS = Field Strength
- R = Measured Spectrum analyzer Input Amplitude
- AF = Antenna Factor
- CORR = Correction Factor = CL – AG + NFL
- CL = Cable Loss
- AG = Amplifier Gain
- FO = Distance Falloff Factor
- NFL = Notch Filter Loss or Waveguide Loss

Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

**Restricted Bands of Operation (15.205)**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).



### 9.4.2.3. TX Spurious & Restricted Band Emissions

#### Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	Tai Sheng Cheng 155-0184-00	<b>Variant:</b>	FSK
<b>Antenna Gain (dBi):</b>	1.00	<b>Modulation:</b>	FSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	902.30	<b>Data Rate:</b>	100.00 KBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	JMH

#### Test Measurement Results

##### 1000.00 - 10000.00 MHz

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB/m	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	1804.71	64.79	-1.55	-14.44	48.80	Peak (NRB)	Horizontal	200	77	--	--	Pass
#2	6316.09	66.56	-2.91	-9.12	54.53	Peak (NRB)	Vertical	200	212	--	--	Pass

Test Notes: EUT powered by DC 24 V

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

<b>Antenna:</b>	Tai Sheng Cheng 155-0184-00	<b>Variant:</b>	FSK
<b>Antenna Gain (dBi):</b>	1.00	<b>Modulation:</b>	FSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	915.20	<b>Data Rate:</b>	100.00 KBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	JMH

**Test Measurement Results**

**1000.00 - 10000.00 MHz**

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1830.41	62.98	-1.52	-14.03	47.43	Peak (NRB)	Horizontal	200	81	--	--	Pass
#2	2745.73	60.93	-1.91	-11.96	47.06	Max Peak	Horizontal	98	224	74.0	-26.9	Pass
#3	2745.73	54.87	-1.91	-11.96	41.00	Max Avg	Horizontal	98	224	54.0	-13.0	Pass
#4	6406.56	62.02	-2.96	-9.21	49.85	Peak (NRB)	Vertical	200	81	--	--	Pass

Test Notes: EUT powered by DC 24 V

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

<b>Antenna:</b>	Tai Sheng Cheng 155-0184-00	<b>Variant:</b>	100 kbps FSK
<b>Antenna Gain (dBi):</b>	1.00	<b>Modulation:</b>	FSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	927.6	<b>Data Rate:</b>	100.00 KBit/s
<b>Power Setting:</b>	30	<b>Tested By:</b>	JMH

**Test Measurement Results**

**1000.00 - 10000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	1854.36	62.21	-1.56	-13.81	46.84	Peak (NRB)	Horizontal	200	19	--	--	Pass
#2	2781.81	59.36	-1.89	-11.91	45.56	Max Peak	Horizontal	177	162	74	-28.44	Pass
#3	2781.81	52.77	-1.89	-11.91	38.97	Max Avg	Horizontal	177	162	54	-15.03	Pass
#4	3708.96	62.82	-2.2	-11.63	48.99	Max Peak	Vertical	134	98	74	-25.01	Pass
#5	3708.96	57.17	-2.2	-11.63	43.34	Max Avg	Vertical	134	98	54	-10.66	Pass
#6	4635.98	62.32	-2.49	-12.24	47.59	Max Peak	Vertical	179	155	74	-26.41	Pass
#7	4635.98	55.1	-2.49	-12.24	40.37	Max Avg	Vertical	179	155	54	-13.63	Pass
#8	6490.26	65.12	-2.95	-8.94	53.23	Peak (NRB)	Horizontal	200	282	--	--	Pass

Test Notes: EUT powered by DC 24 V

### 9.4.3. Digital Emissions (0.03 - 1 GHz)

Radiated Test Conditions for Radiated Digital Emissions (0.03 – 1 GHz)			
<b>Standard:</b>	FCC CFR 47:15.209, ICES-003: 6.2 RSS-GEN: 7	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Digital Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Radiated Digital Emissions (0.03 – 1 GHz)

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dBmV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are done as:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100\text{mV/m}$$

$$48 \text{ dBmV/m} = 250\text{mV/m}$$

**Limits for Radiated Digital Emissions (0.03 – 1 GHz)**

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength		Measurement Distance (m)
	µV/m (microvolts/meter)	dBµV/m (dB microvolts/meter)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F(kHz)	--	30
1.705-30.0	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46.0	3
Above 960	500	54.0	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241. (b) In the emission table above, the tighter limit applies at the band edges. (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. (e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part. (f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device. (g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

**Equipment Configuration for Radiated Digital Emissions**

<b>Antenna:</b>	Tai Sheng Cheng 155-0184-00	<b>Variant:</b>	FSK
<b>Antenna Gain (dBi):</b>	1.00	<b>Modulation:</b>	FSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	902.30	<b>Data Rate:</b>	100.00 KBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	JMH

**Test Measurement Results**

**30.00 - 1000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	112.75	53.43	4.06	-15.40	42.09	MaxQP	Vertical	99	138	43.0	-0.9	Pass
#2	291.54	46.84	4.80	-14.70	36.94	MaxQP	Horizontal	98	212	46.0	-9.1	Pass
#3	880.25	31.79	6.59	-5.20	33.18	MaxQP	Horizontal	98	209	46.0	-12.8	Pass
#4	902.29	54.55	6.65	-5.10	56.10	Fundamental	Horizontal	100	0	--	--	
#5	966.30	39.65	6.84	-4.00	42.49	MaxQP	Vertical	107	343	53.0	-10.5	Pass

Test Notes: EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload



**Equipment Configuration for Radiated Digital Emissions**

<b>Antenna:</b>	Tai Sheng Cheng 155-0184-00	<b>Variant:</b>	FSK
<b>Antenna Gain (dBi):</b>	1.00	<b>Modulation:</b>	FSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	915.20	<b>Data Rate:</b>	100.00 KBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	JMH

**Test Measurement Results**

**30.00 - 1000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	118.18	51.04	4.09	-14.80	40.33	MaxQP	Vertical	98	144	43.0	-2.7	Pass
#2	293.50	45.57	4.81	-14.60	35.78	MaxQP	Vertical	132	173	46.0	-10.2	Pass
#3	446.59	36.90	5.34	-11.20	31.04	MaxQP	Horizontal	101	176	46.0	-15.0	Pass
#4	915.18	48.13	6.67	-4.70	50.10	Fundamental	Vertical	100	0	--	--	
#5	979.17	38.00	6.88	-3.80	41.08	MaxQP	Vertical	105	281	53.0	-11.9	Pass

Test Notes: EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

**Equipment Configuration for Radiated Digital Emissions**

<b>Antenna:</b>	Tai Sheng Cheng 155-0184-00	<b>Variant:</b>	100 kbps FSK
<b>Antenna Gain (dBi):</b>	1.00	<b>Modulation:</b>	FSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	927.6	<b>Data Rate:</b>	100.00 KBit/s
<b>Power Setting:</b>	30	<b>Tested By:</b>	JMH

**Test Measurement Results**


**30.00 - 1000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	117.2	51.59	4.09	-14.8	40.88	MaxQP	Vertical	99	148	43	-2.12	Pass
#2	291.17	41.82	4.81	-14.6	32.03	MaxQP	Vertical	98	151	46	-13.97	Pass
#3	452.26	33.31	5.36	-11	27.67	MaxQP	Horizontal	194	171	46	-18.33	Pass
#4	875.52	36.3	6.58	-5.2	37.68	MaxQP	Vertical	124	13	46	-8.32	Pass
#5	927.94	53.3	6.72	-4.6	55.42	Fundamental	Vertical	100	0	--	--	
#6	976.85	36.63	6.87	-3.9	39.6	MaxQP	Vertical	103	310	53	-13.4	Pass

Test Notes: EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

## **A. APPENDIX - GRAPHICAL IMAGES**

### A.1. 20 dB & 99% Bandwidth

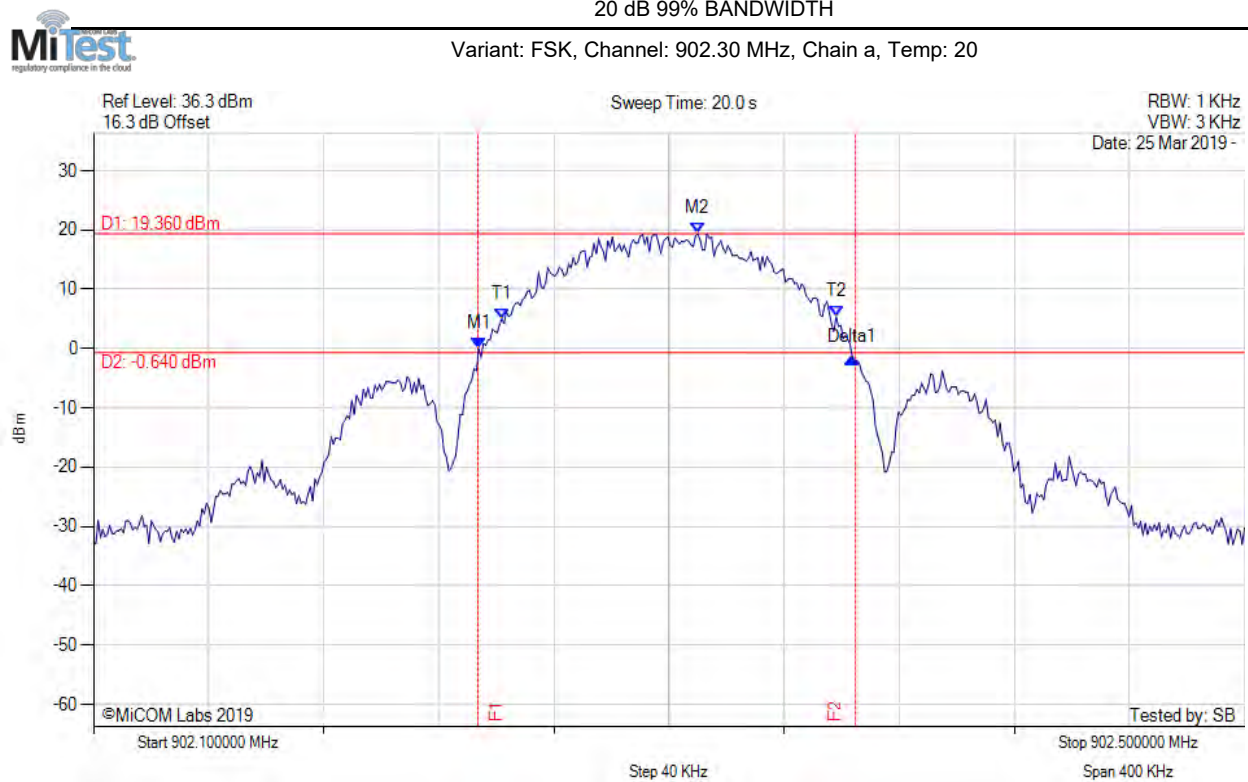


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.234 MHz : 0.000 dBm M2 : 902.310 MHz : 19.363 dBm Delta1 : 130 KHz : -1.460 dB T1 : 902.242 MHz : 5.007 dBm T2 : 902.358 MHz : 5.365 dBm OBW : 116 KHz	Measured 20 dB Bandwidth: 0.130 MHz Limit: 0.5 kHz Margin: 0.37 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

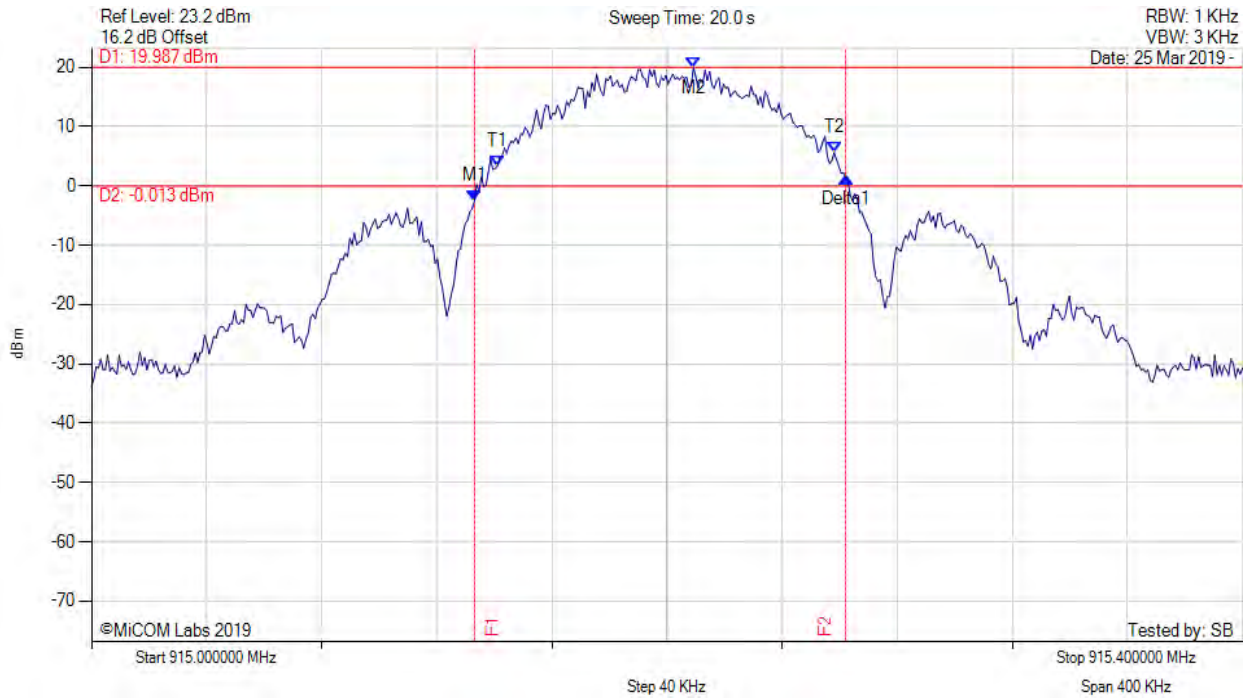


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 915.133 MHz : -2.614 dBm M2 : 915.209 MHz : 19.987 dBm Delta1 : 129 KHz : 3.980 dB T1 : 915.141 MHz : 3.310 dBm T2 : 915.258 MHz : 5.616 dBm OBW : 117 KHz	Measured 20 dB Bandwidth: 0.129 MHz Limit: 0.5 kHz Margin: 0.37 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: FSK, Channel: 926.90 MHz, Chain a, Temp: 20

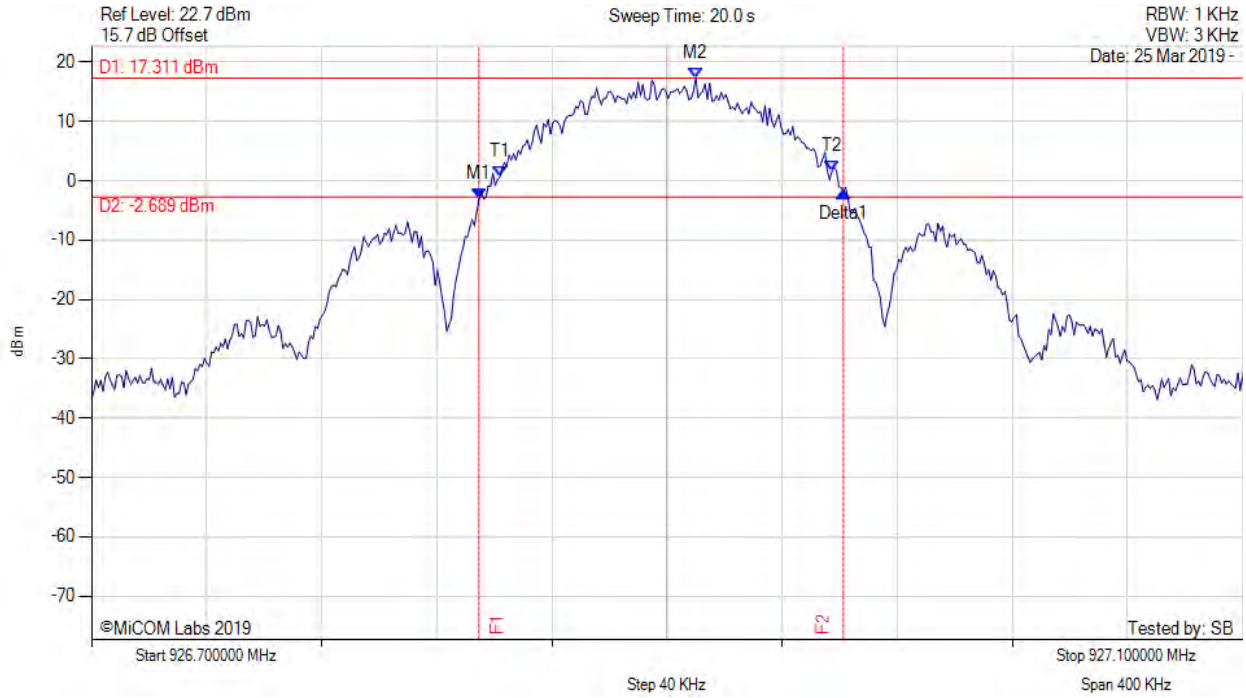

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 926.835 MHz : -3.021 dBm M2 : 926.910 MHz : 17.311 dBm Delta1 : 127 KHz : 1.171 dB T1 : 926.842 MHz : 0.681 dBm T2 : 926.957 MHz : 1.602 dBm OBW : 115 KHz	Measured 20 dB Bandwidth: 0.127 MHz Limit: 0.5 kHz Margin: 0.37 MHz


[back to matrix](#)



20 dB 99% BANDWIDTH



Variant: FSK, Channel: 902.40 MHz, Chain a, Temp: 20

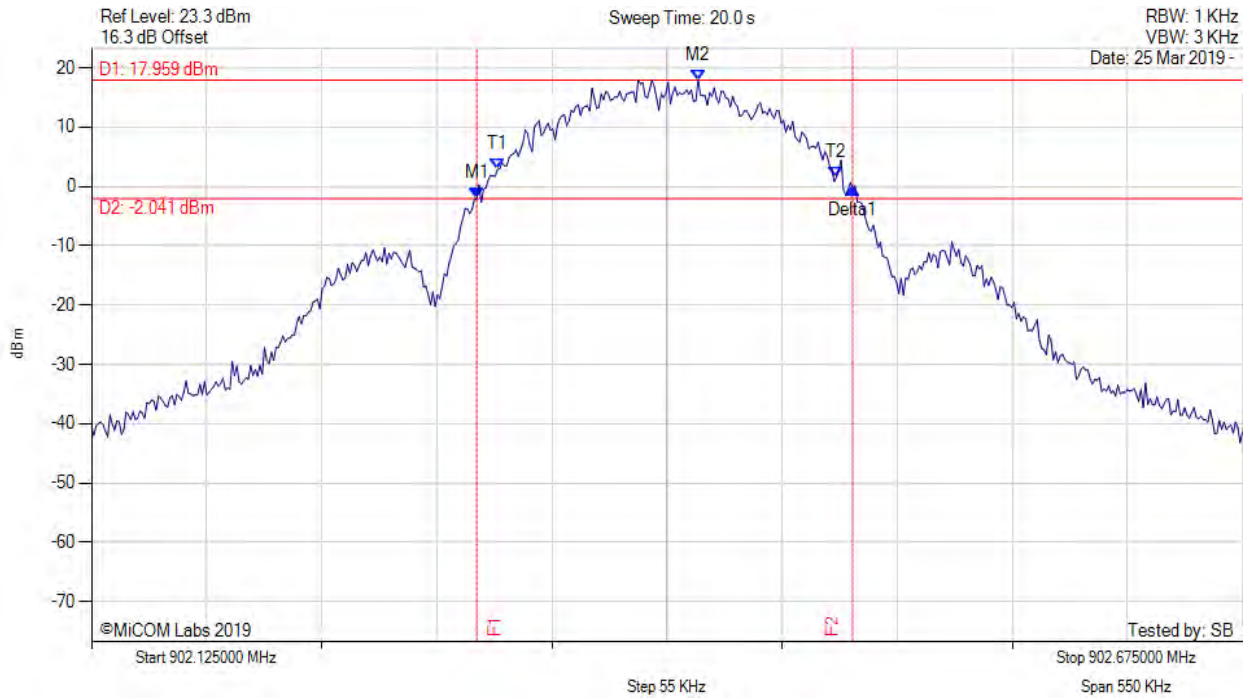

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 902.309 MHz : -2.045 dBm M2 : 902.415 MHz : 17.959 dBm Delta1 : 180 KHz : 1.725 dB T1 : 902.319 MHz : 2.849 dBm T2 : 902.481 MHz : 1.596 dBm OBW : 162 KHz	Measured 20 dB Bandwidth: 0.180 MHz Limit: 0.5 kHz Margin: 0.32 MHz


[back to matrix](#)



20 dB 99% BANDWIDTH



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

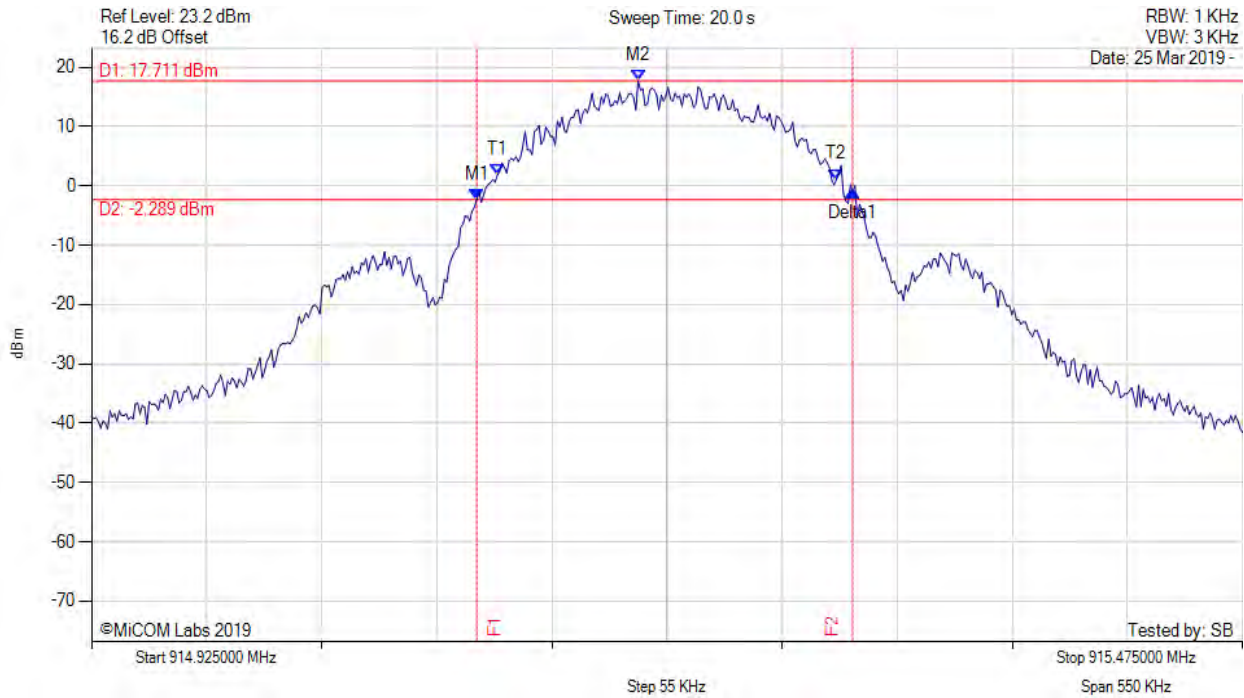


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 915.109 MHz : -2.303 dBm M2 : 915.186 MHz : 17.711 dBm Delta1 : 180 KHz : 1.373 dB T1 : 915.119 MHz : 1.850 dBm T2 : 915.281 MHz : 1.081 dBm OBW : 162 KHz	Measured 20 dB Bandwidth: 0.180 MHz Limit: 0.5 kHz Margin: 0.32 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: FSK, Channel: 927.680 MHz, Chain a, Temp: 20

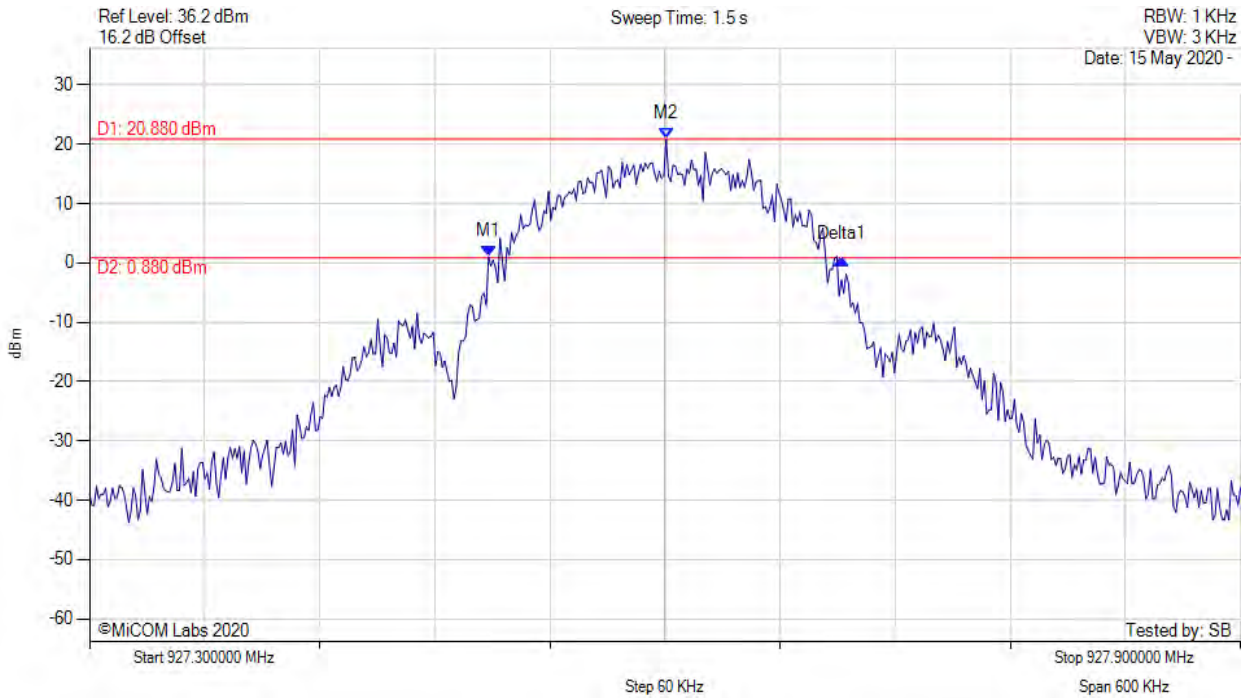


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 927.508 MHz : 1.060 dBm M2 : 927.601 MHz : 20.885 dBm Delta1 : 184 KHz : -0.511 dB	Channel Frequency: 927.60 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: OQPSK, Channel: 902.40 MHz, Chain a, Temp: 20

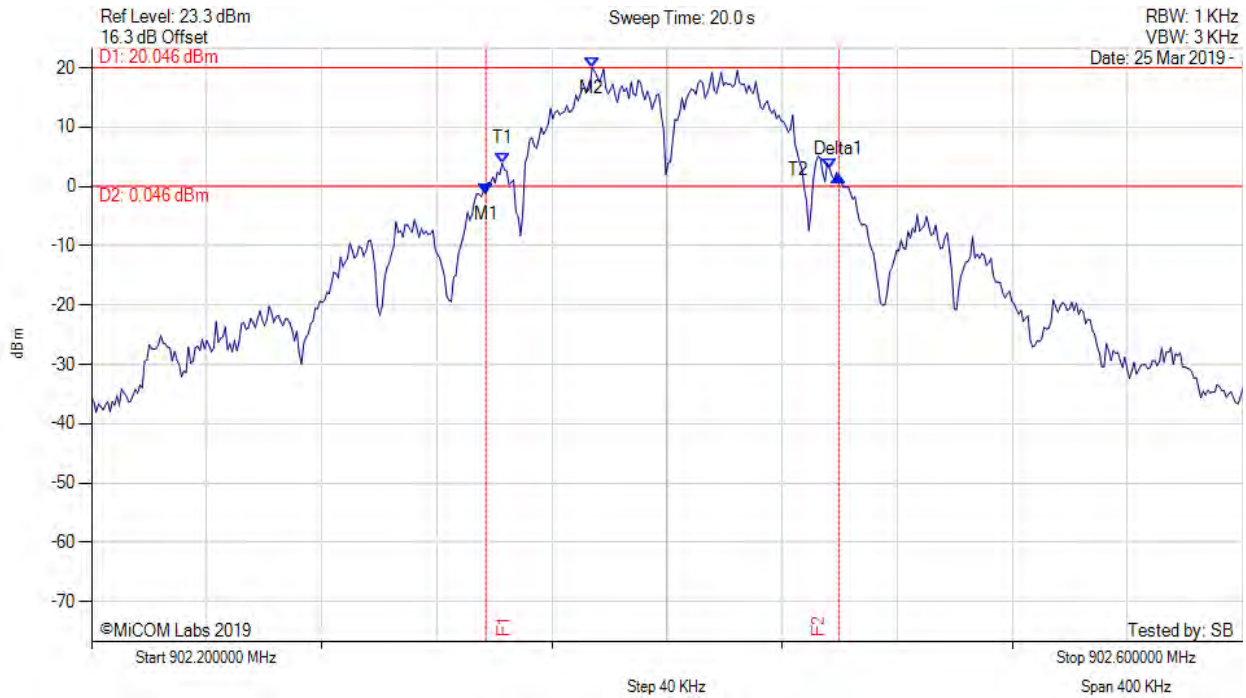


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 902.337 MHz : -1.229 dBm M2 : 902.374 MHz : 20.046 dBm Delta1 : 123 KHz : 3.122 dB T1 : 902.343 MHz : 3.906 dBm T2 : 902.457 MHz : 2.971 dBm OBW : 114 KHz	Measured 20 dB Bandwidth: 0.123 MHz Limit: 0.5 kHz Margin: 0.38 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: OQPSK, Channel: 915.00 MHz, Chain a, Temp: 20

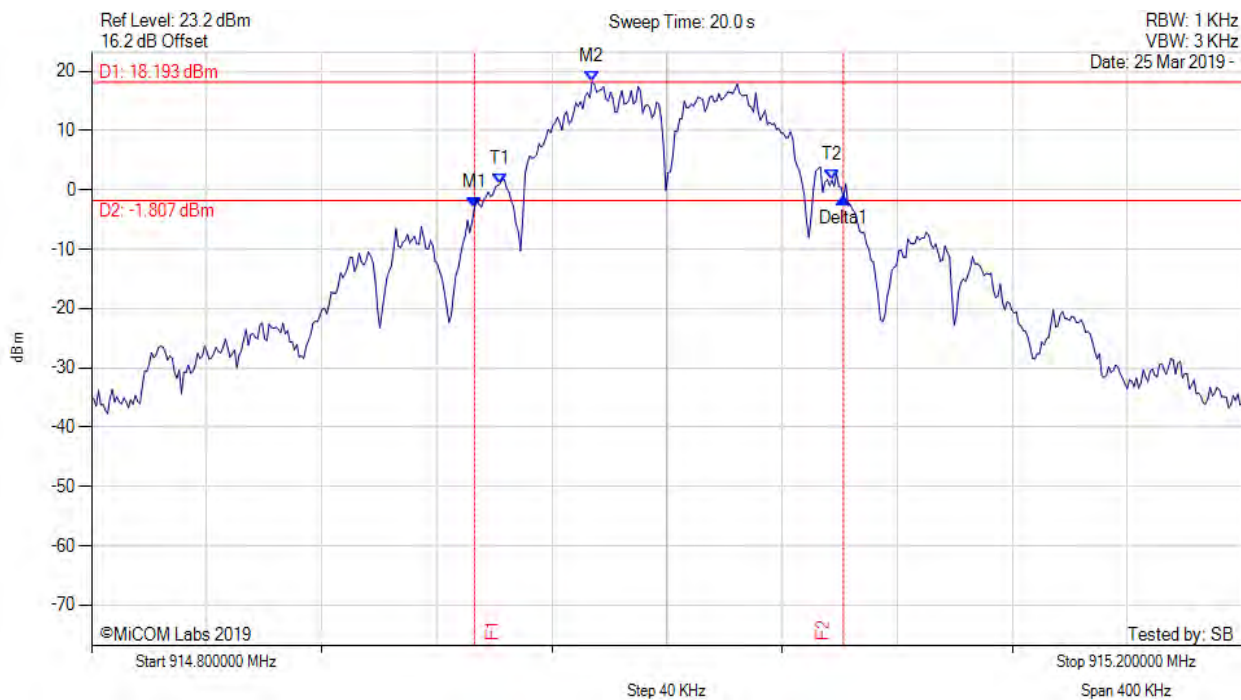

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 914.933 MHz : -3.096 dBm M2 : 914.974 MHz : 18.193 dBm Delta1 : 128 KHz : 1.780 dB T1 : 914.942 MHz : 0.989 dBm T2 : 915.057 MHz : 1.632 dBm OBW : 115 KHz	Measured 20 dB Bandwidth: 0.128 MHz Limit: 0.5 kHz Margin: 0.37 MHz


[back to matrix](#)



20 dB 99% BANDWIDTH



Variant: OQPSK, Channel: 926.80 MHz, Chain a, Temp: 20

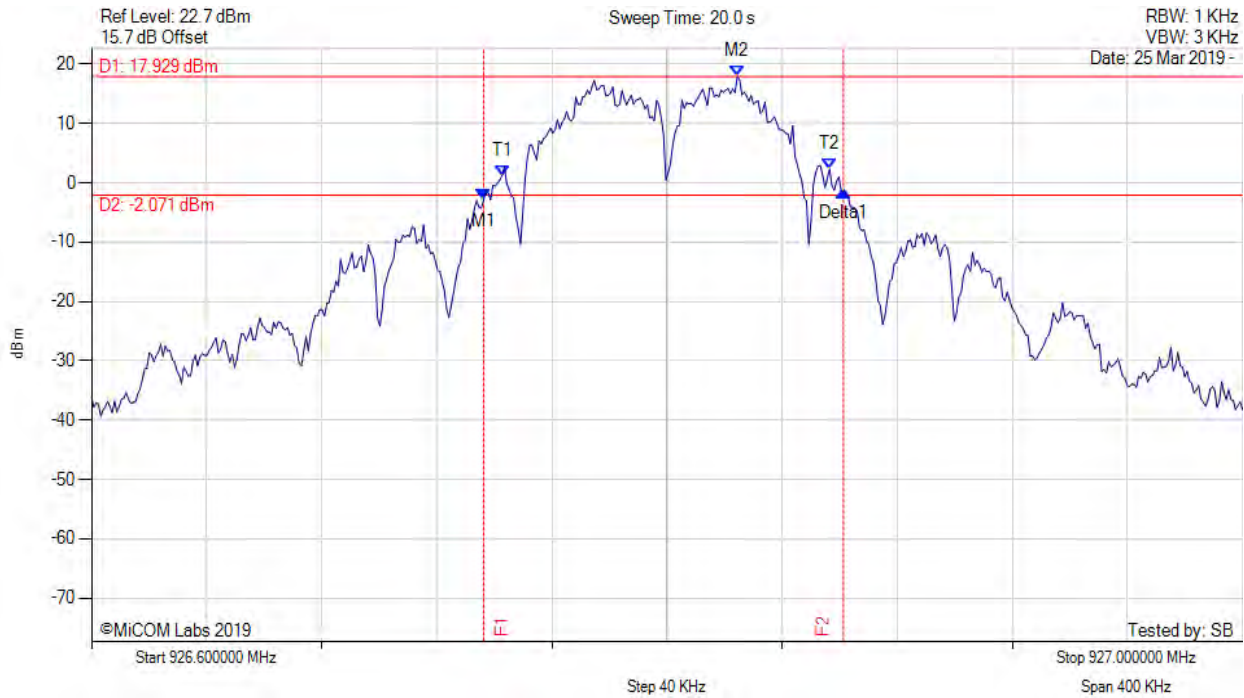


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 926.736 MHz : -2.866 dBm M2 : 926.824 MHz : 17.929 dBm Delta1 : 125 KHz : 1.430 dB T1 : 926.743 MHz : 1.207 dBm T2 : 926.857 MHz : 2.287 dBm OBW : 114 KHz	Measured 20 dB Bandwidth: 0.125 MHz Limit: 0.5 kHz Margin: 0.38 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variant: 2FSK, Channel: 902.40 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

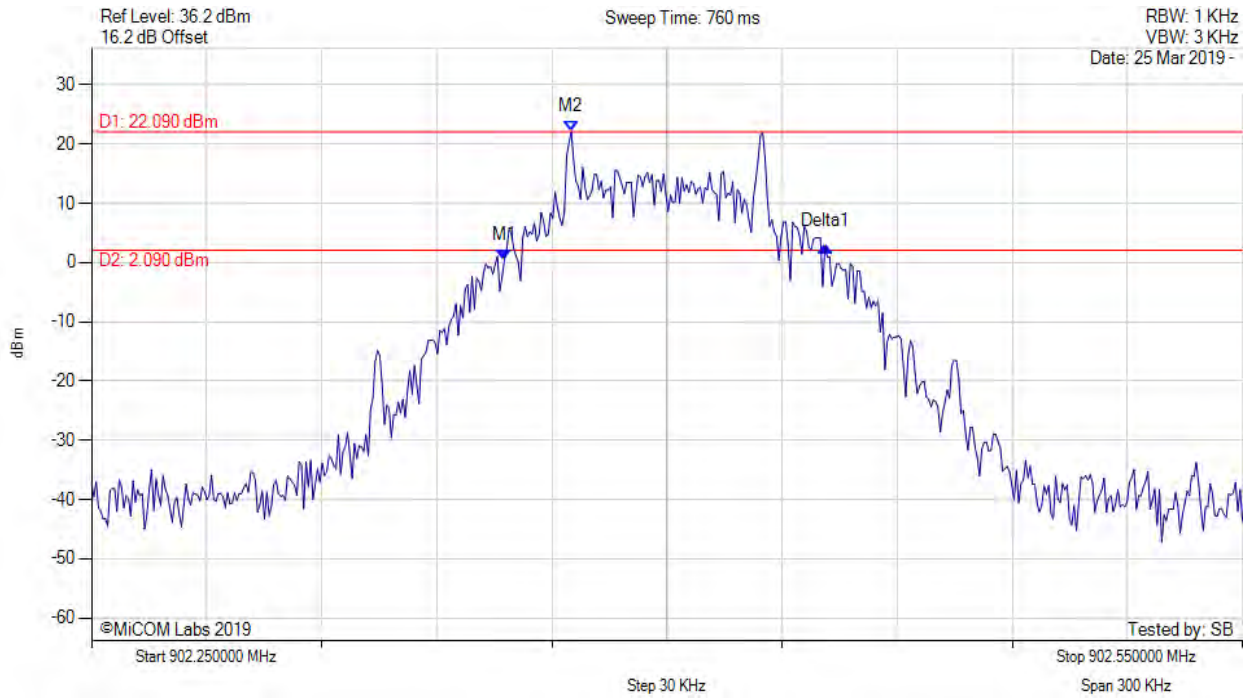


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 902.358 MHz : 0.477 dBm M2 : 902.375 MHz : 22.090 dBm Delta1 : 84 KHz : 2.184 dB	Channel Frequency: 902.40 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variant: 2FSK, Channel: 915.00 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

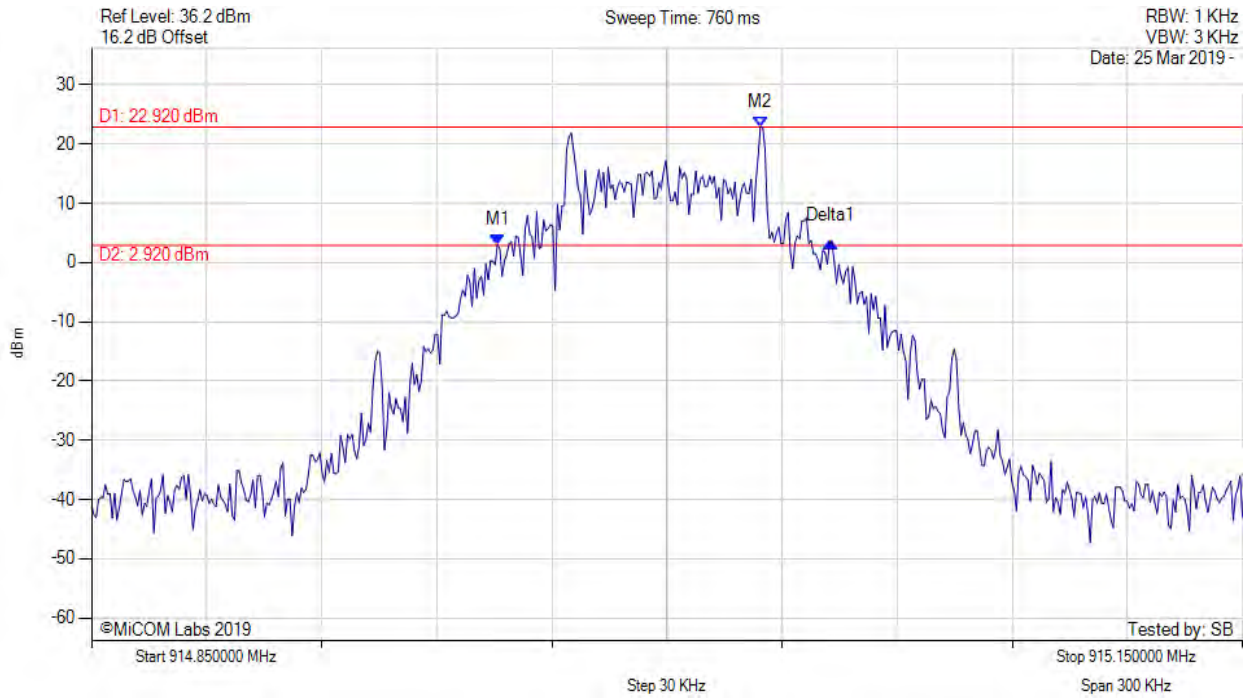

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 914.956 MHz : 3.076 dBm M2 : 915.024 MHz : 22.916 dBm Delta1 : 87 KHz : 0.480 dB	Channel Frequency: 915.00 MHz


[back to matrix](#)



20 dB BANDWIDTH



Variant: 2FSK, Channel: 926.80 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

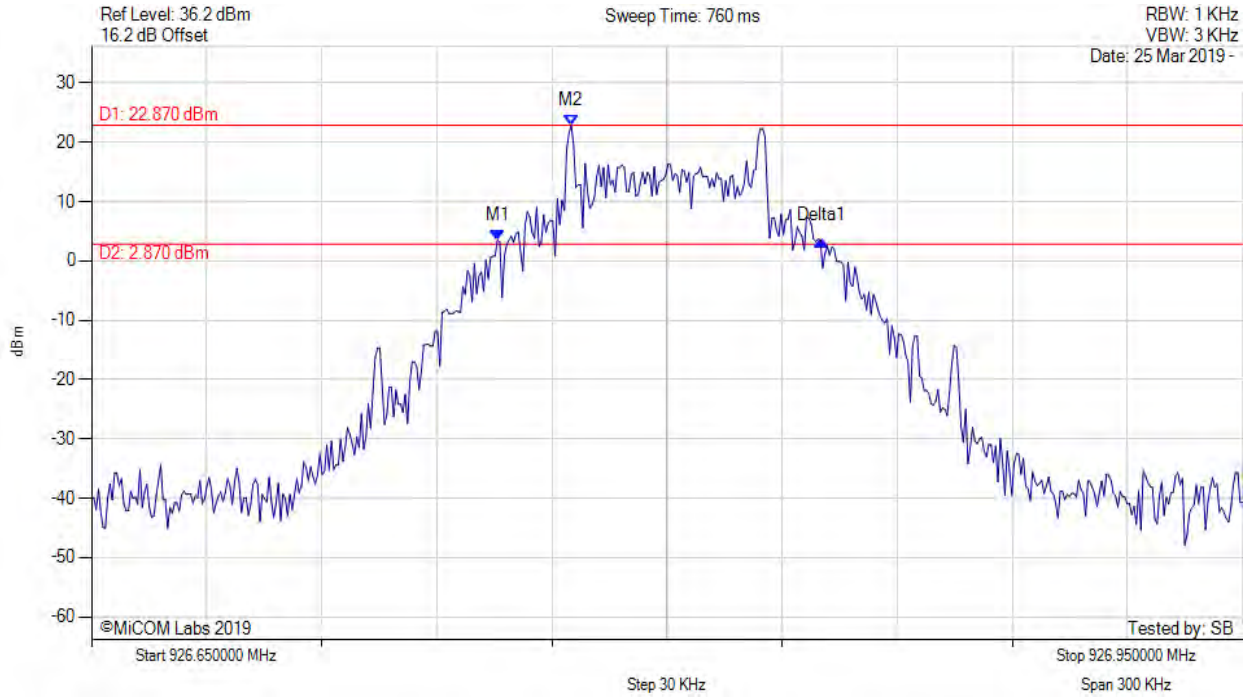


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 926.756 MHz : 3.536 dBm M2 : 926.775 MHz : 22.875 dBm Delta1 : 84 KHz : -0.102 dB	Channel Frequency: 926.80 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variation: GFSK, Channel: 902.30 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

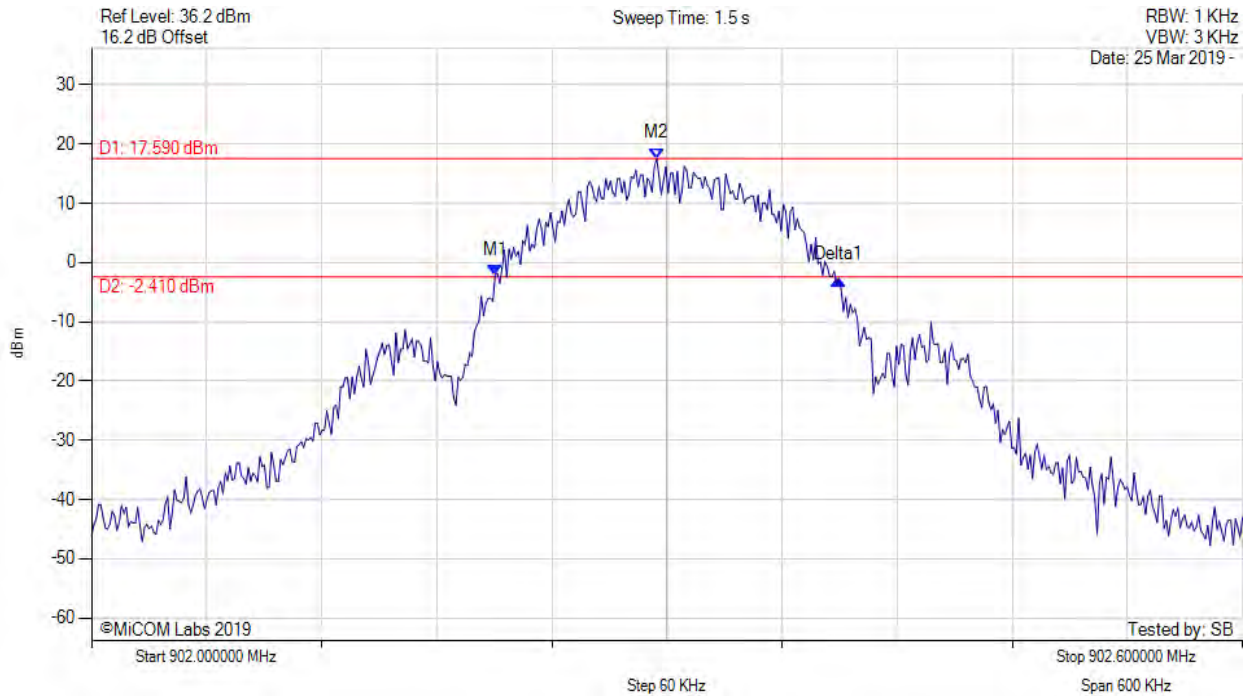


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 902.210 MHz : -2.108 dBm M2 : 902.295 MHz : 17.591 dBm Delta1 : 179 KHz : -0.750 dB	Channel Frequency: 902.30 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variant: GFSK, Channel: 915.20 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

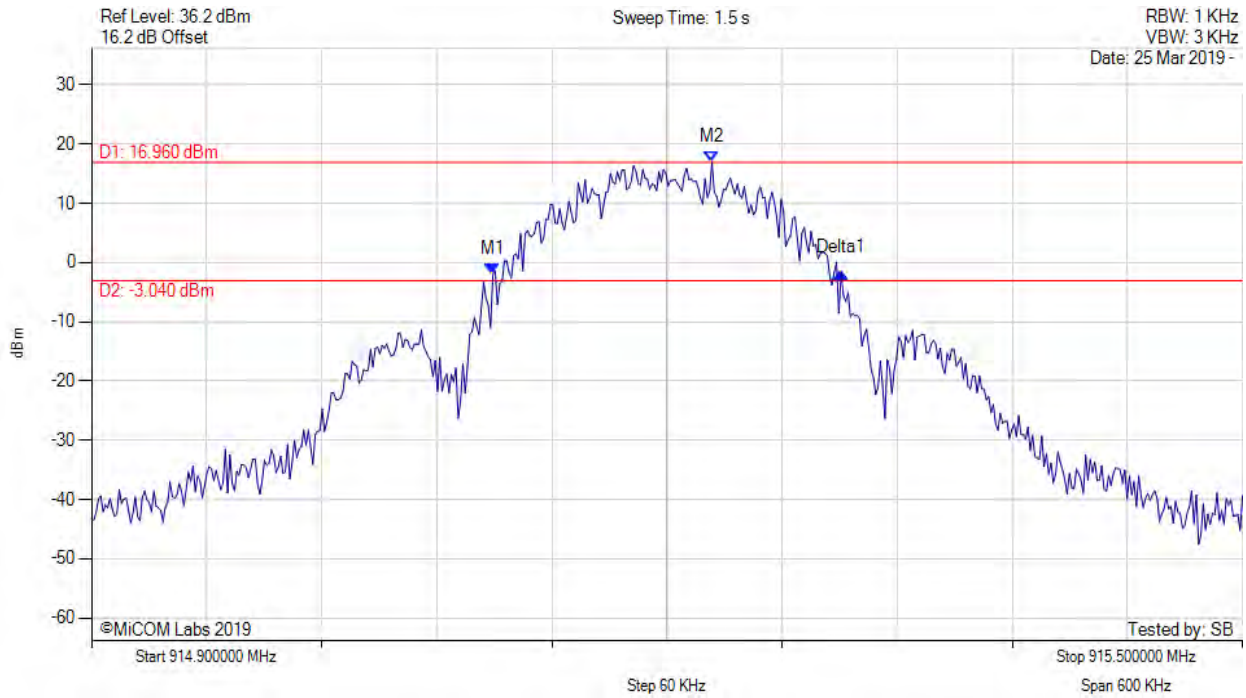


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 915.109 MHz : -2.006 dBm M2 : 915.223 MHz : 16.961 dBm Delta1 : 182 KHz : 0.234 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variant: GFSK, Channel: 926.90 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

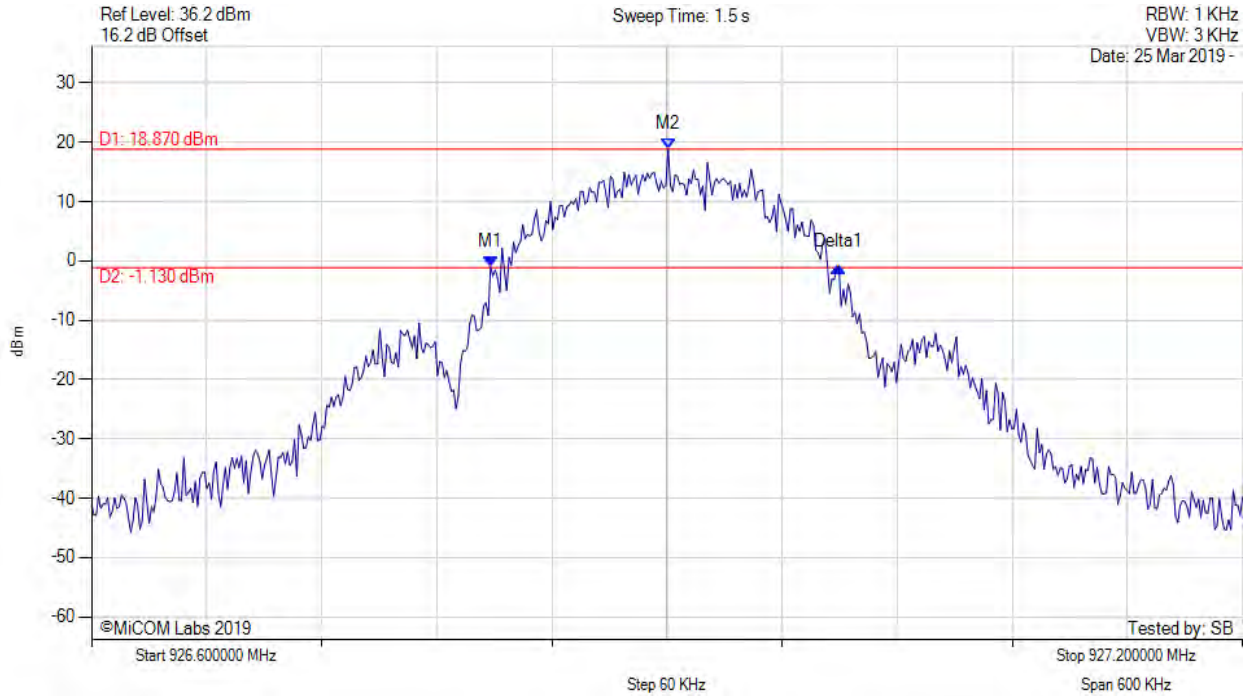


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 926.808 MHz : -0.940 dBm M2 : 926.901 MHz : 18.875 dBm Delta1 : 181 KHz : 0.035 dB	Channel Frequency: 926.90 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variant: GFSK, Channel: 902.30 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

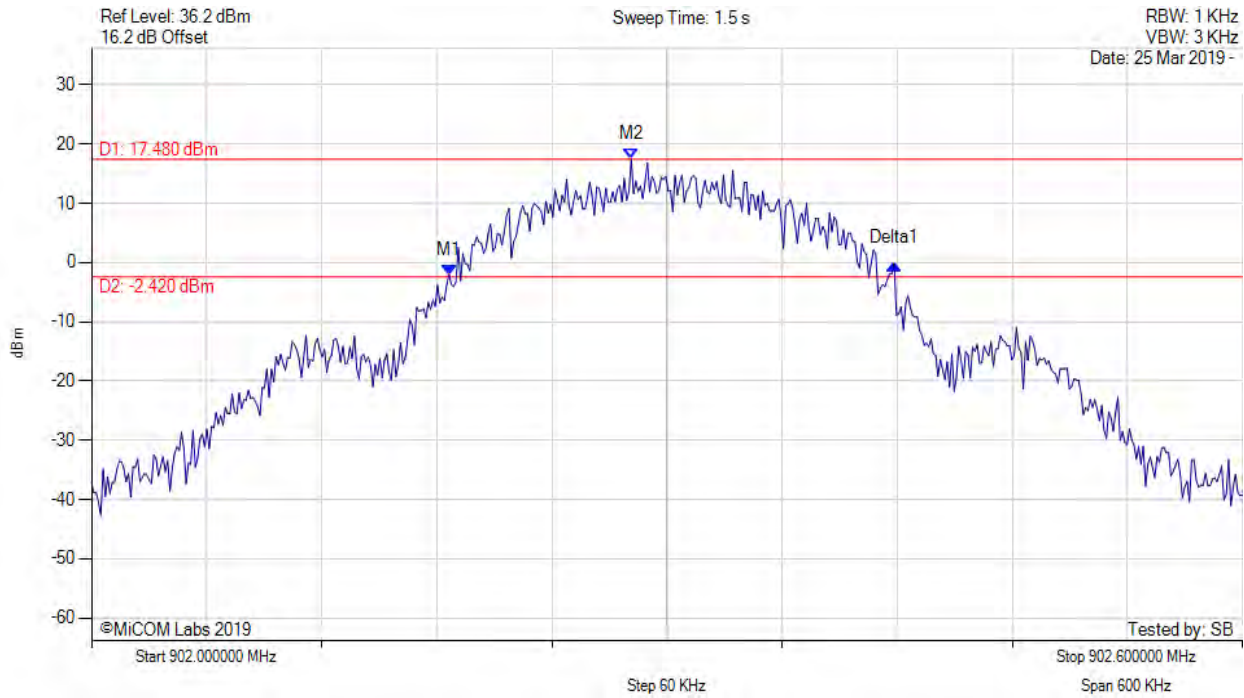

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 902.186 MHz : -2.061 dBm M2 : 902.281 MHz : 17.481 dBm Delta1 : 232 KHz : 1.897 dB	Channel Frequency: 902.30 MHz


[back to matrix](#)



20 dB BANDWIDTH



Variante: GFSK, Channel: 915.20 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

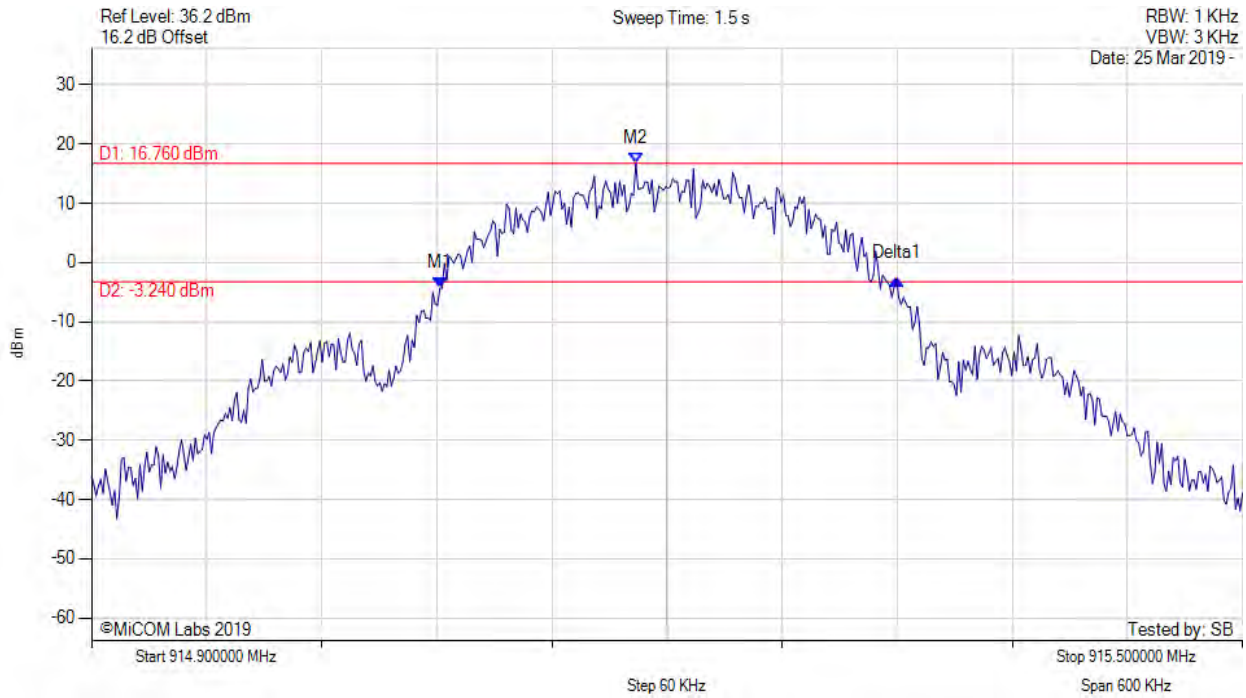


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 915.082 MHz : -4.314 dBm M2 : 915.184 MHz : 16.759 dBm Delta1 : 238 KHz : 1.576 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variant: GFSK, Channel: 926.90 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

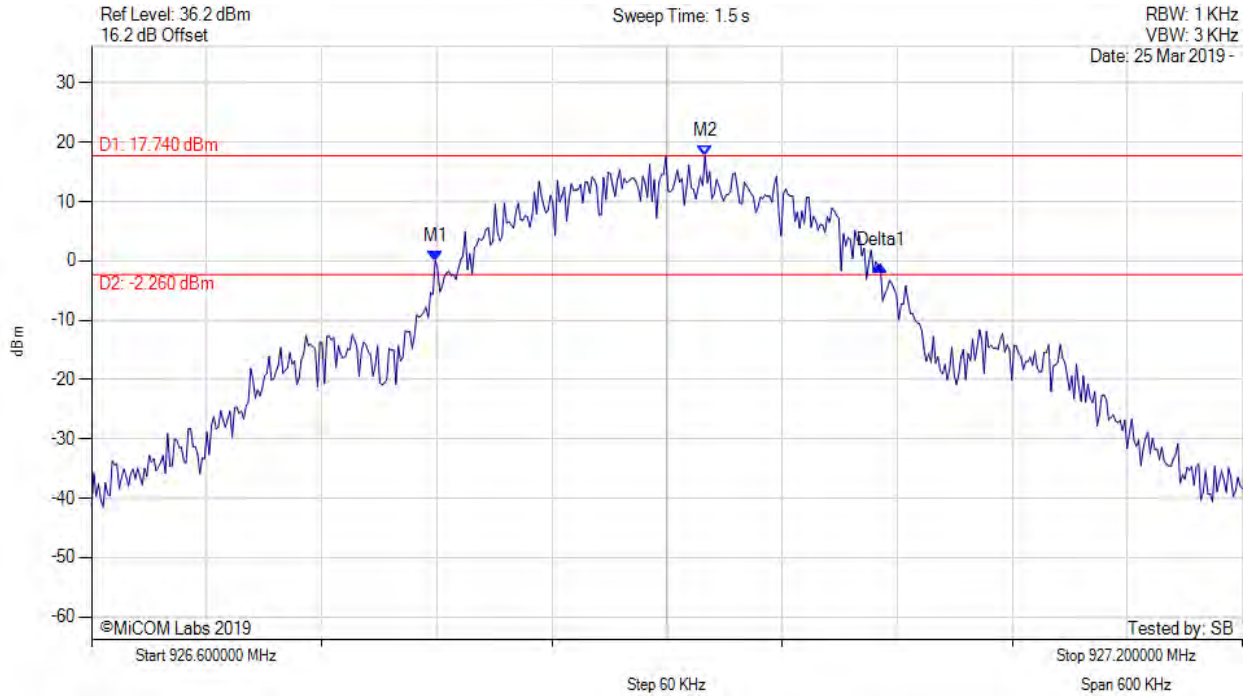

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 926.779 MHz : 0.036 dBm M2 : 926.920 MHz : 17.740 dBm Delta1 : 232 KHz : -0.700 dB	Channel Frequency: 926.90 MHz


[back to matrix](#)



20 dB BANDWIDTH



Variante: GFSK, Channel: 902.40 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

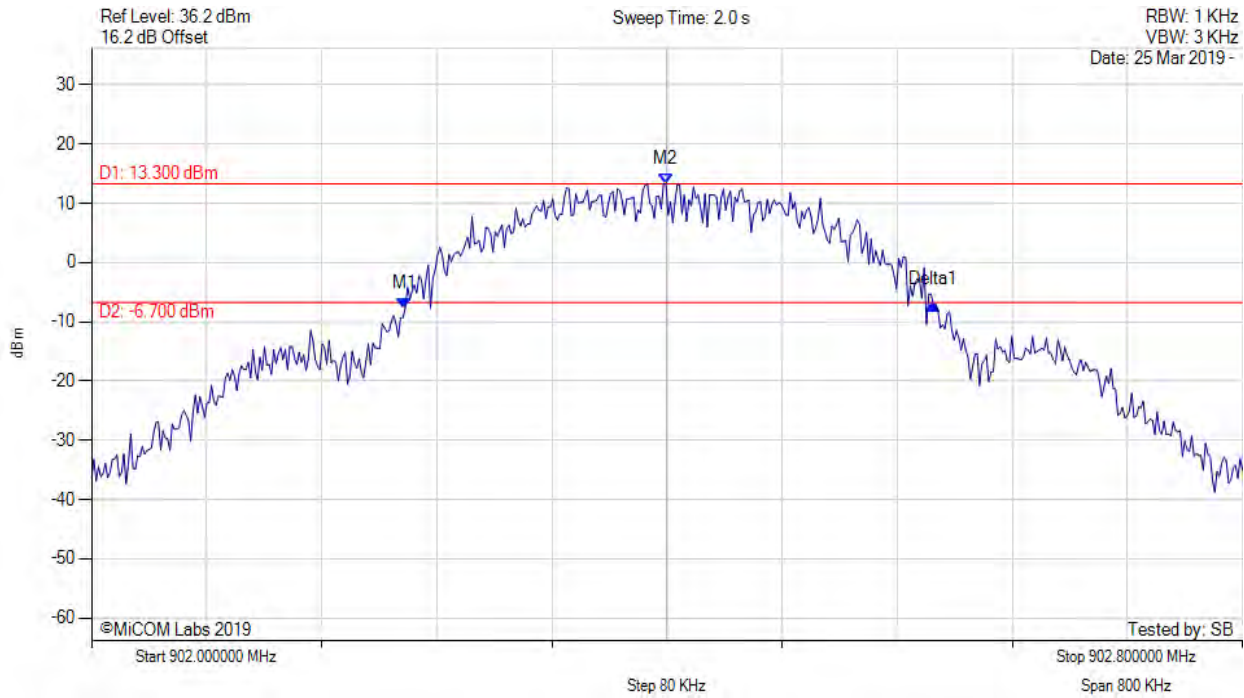


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 902.217 MHz : -7.806 dBm M2 : 902.399 MHz : 13.300 dBm Delta1 : 367 KHz : 0.661 dB	Channel Frequency: 902.40 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variant: GFSK, Channel: 915.20 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

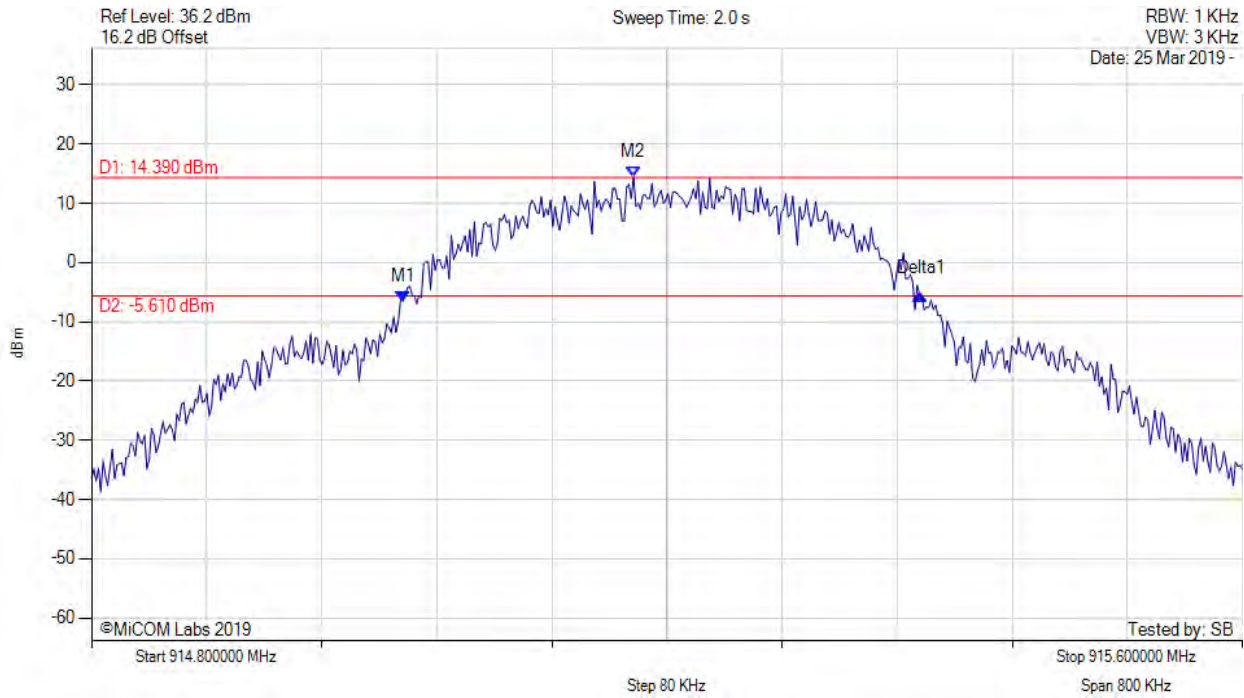


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 915.016 MHz : -6.523 dBm M2 : 915.177 MHz : 14.388 dBm Delta1 : 360 KHz : 1.208 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variant: GFSK, Channel: 926.80 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

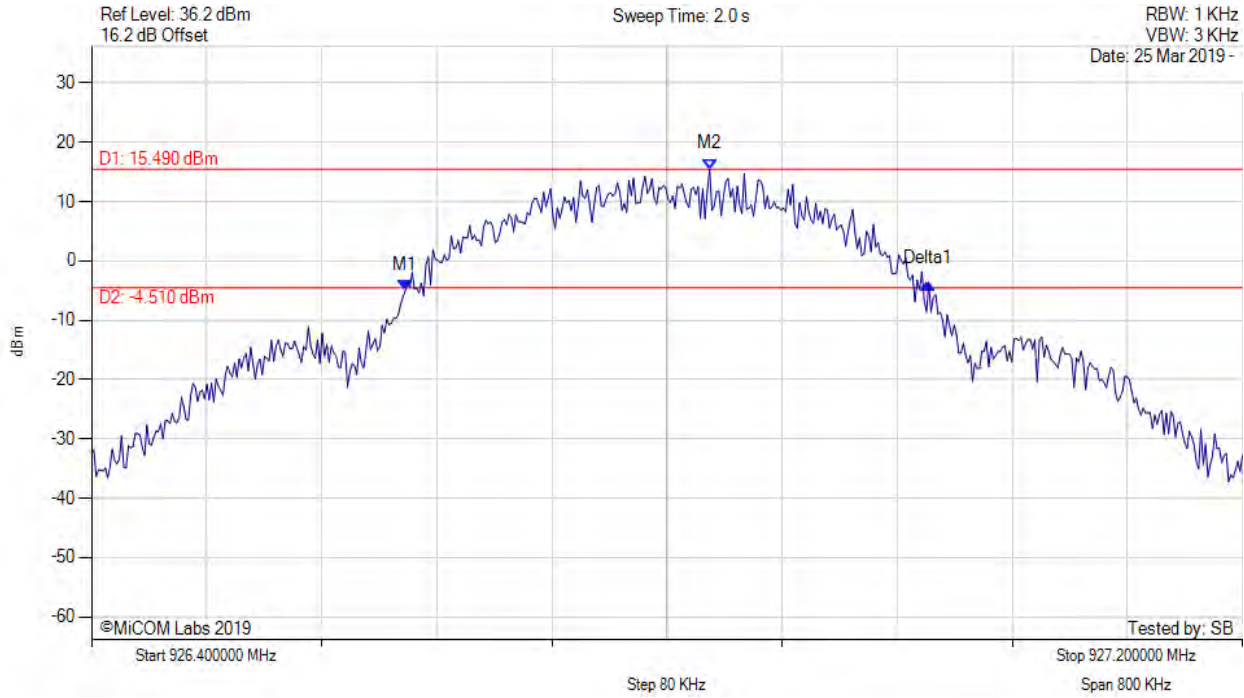


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 926.618 MHz : -5.032 dBm M2 : 926.830 MHz : 15.494 dBm Delta1 : 363 KHz : 1.192 dB	Channel Frequency: 926.80 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variant: OFDM3, Channel: 902.40 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

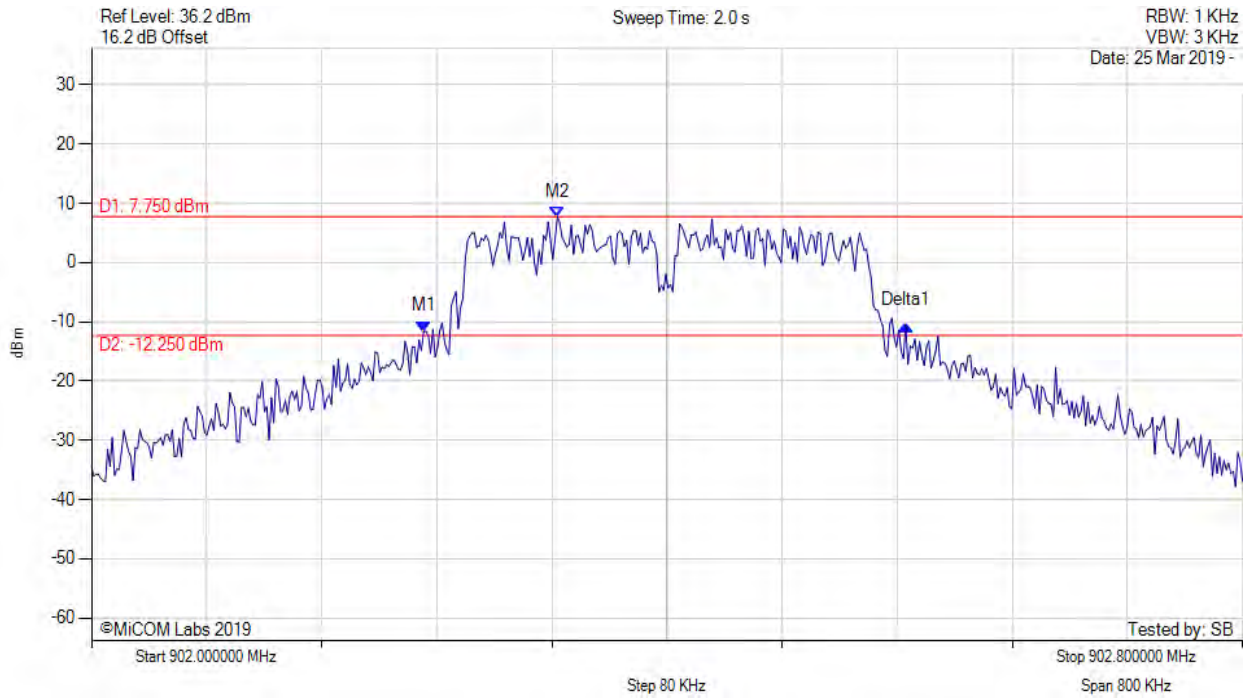


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 902.231 MHz : -11.609 dBm M2 : 902.324 MHz : 7.754 dBm Delta1 : 335 KHz : 0.986 dB	Channel Frequency: 902.40 MHz

[back to matrix](#)

20 dB BANDWIDTH



Variant: OFDM3, Channel: 915.20 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

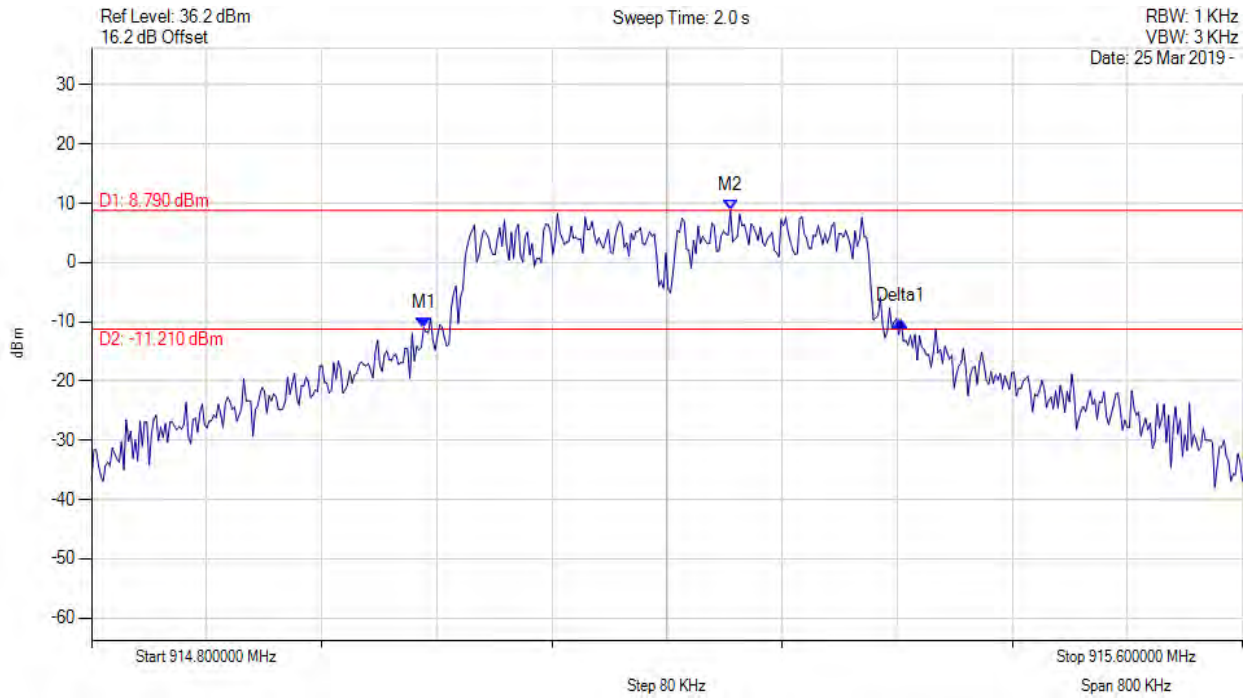

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 915.031 MHz : -11.032 dBm M2 : 915.244 MHz : 8.789 dBm Delta1 : 332 KHz : 1.121 dB	Channel Frequency: 915.20 MHz


[back to matrix](#)



20 dB BANDWIDTH



Variant: OFDM3, Channel: 926.80 MHz, Chain a, Temp: 25, Voltage: 24 Vdc

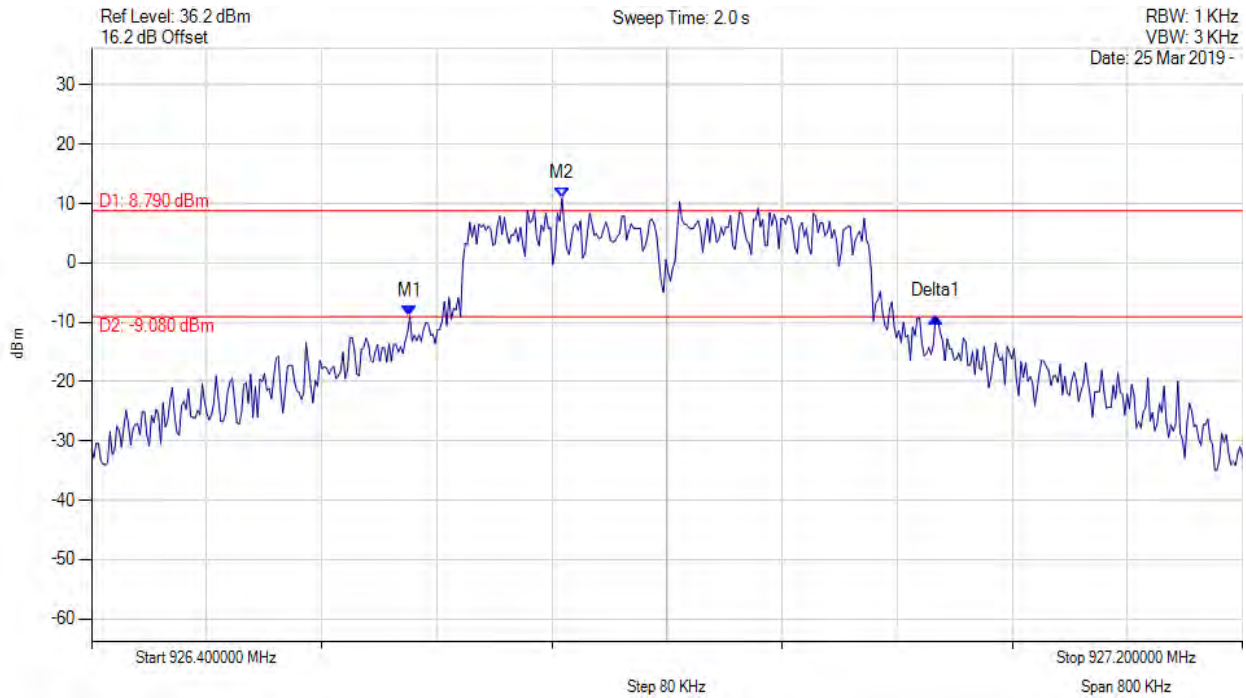


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = CLR/WRITE	M1 : 926.621 MHz : -8.982 dBm M2 : 926.727 MHz : 10.925 dBm Delta1 : 366 KHz : -0.059 dB	Channel Frequency: 926.80 MHz

[back to matrix](#)

## A.2. Frequency Hopping Tests

### A.2.1. Number of Hopping Channels

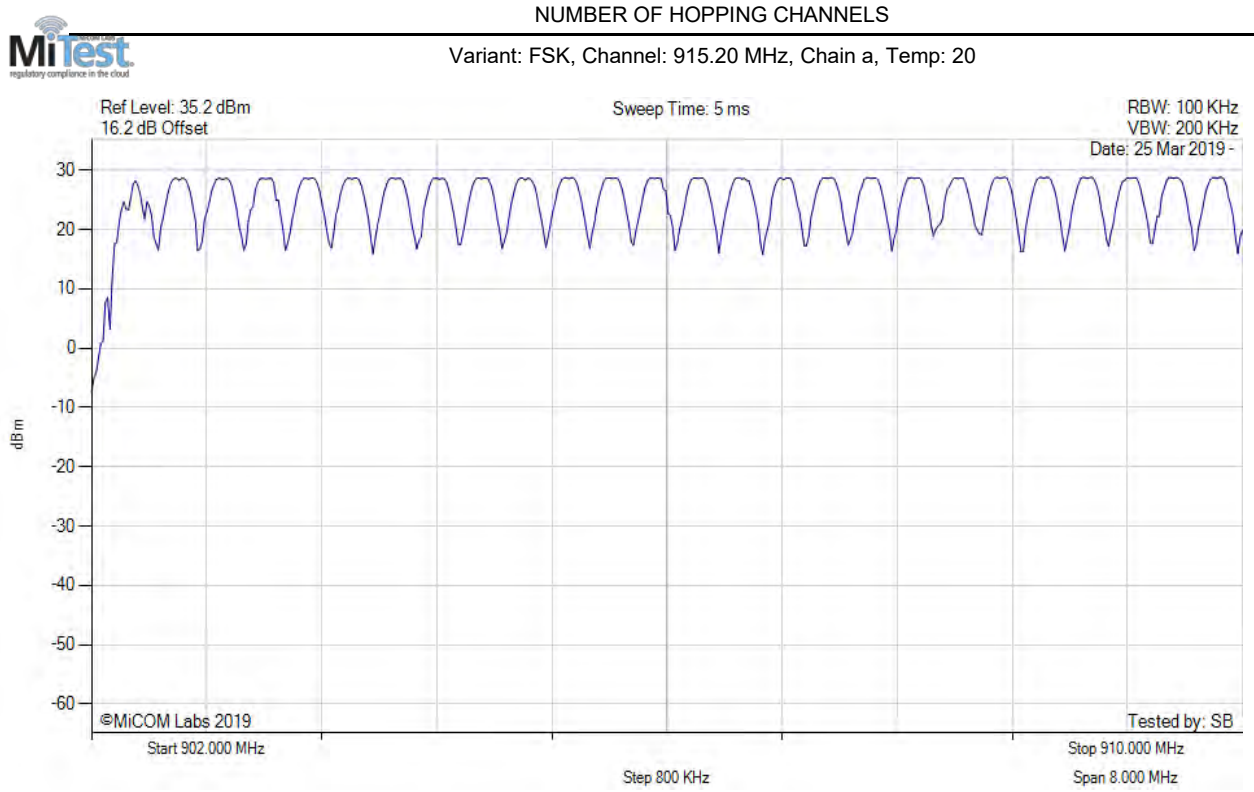

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz


[back to matrix](#)



NUMBER OF HOPPING CHANNELS



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

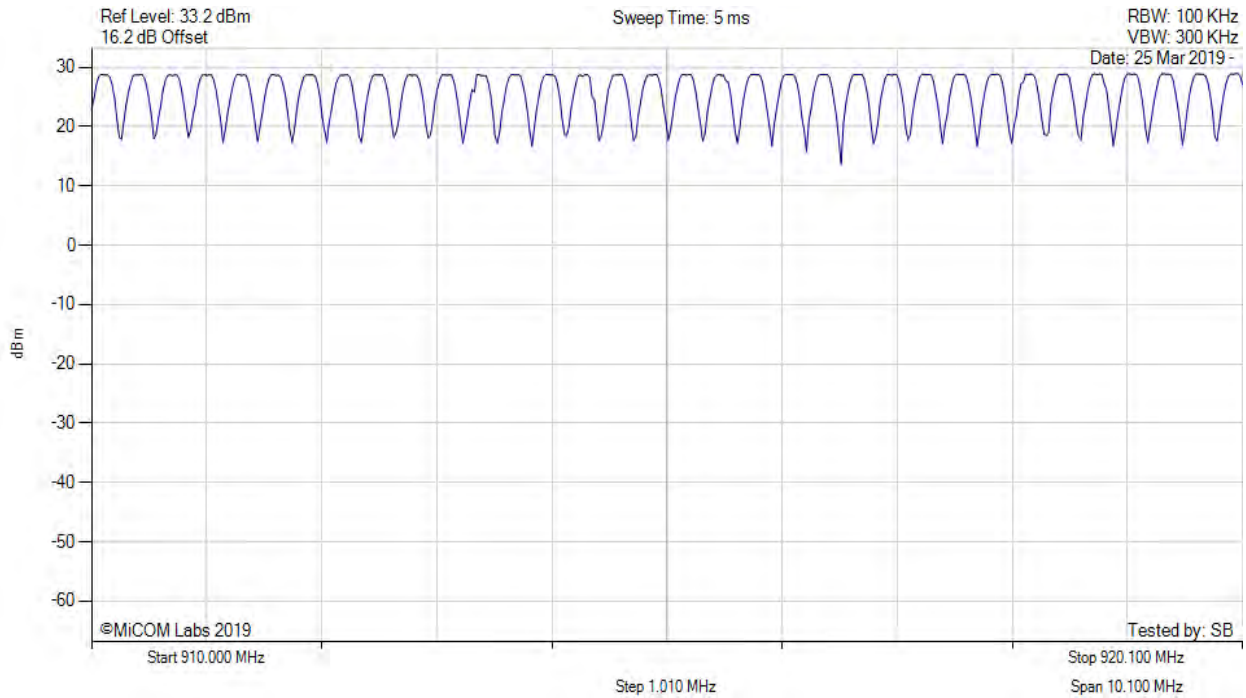


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

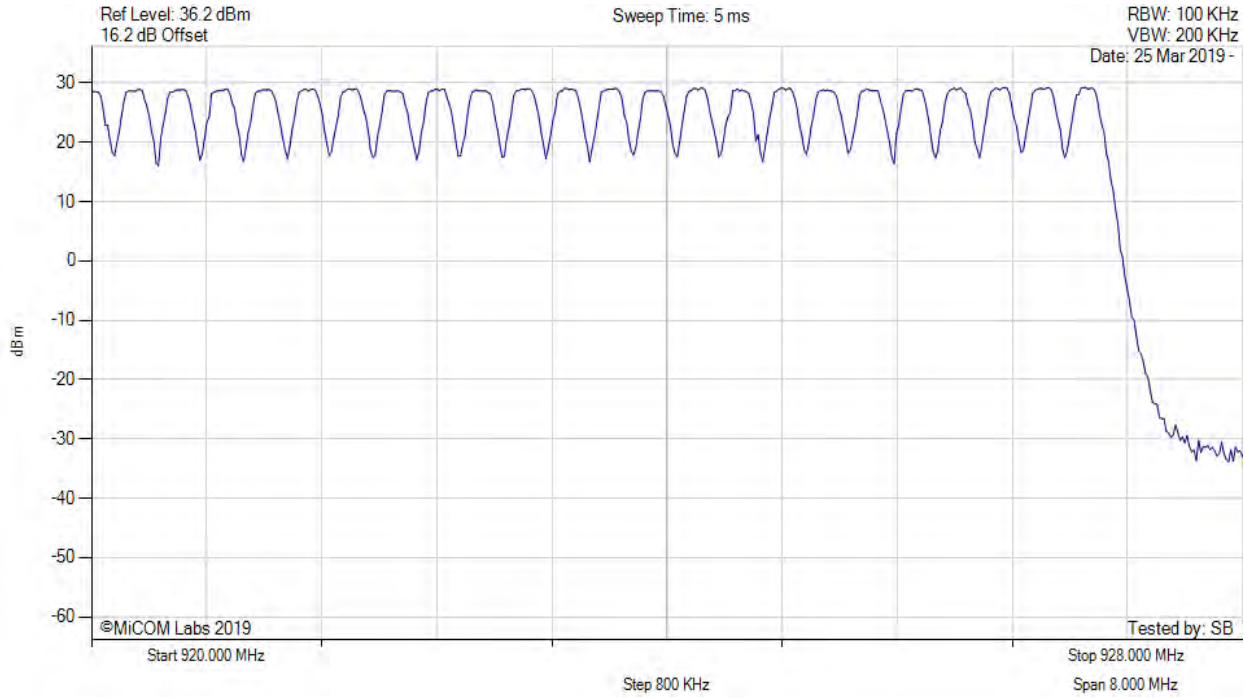


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

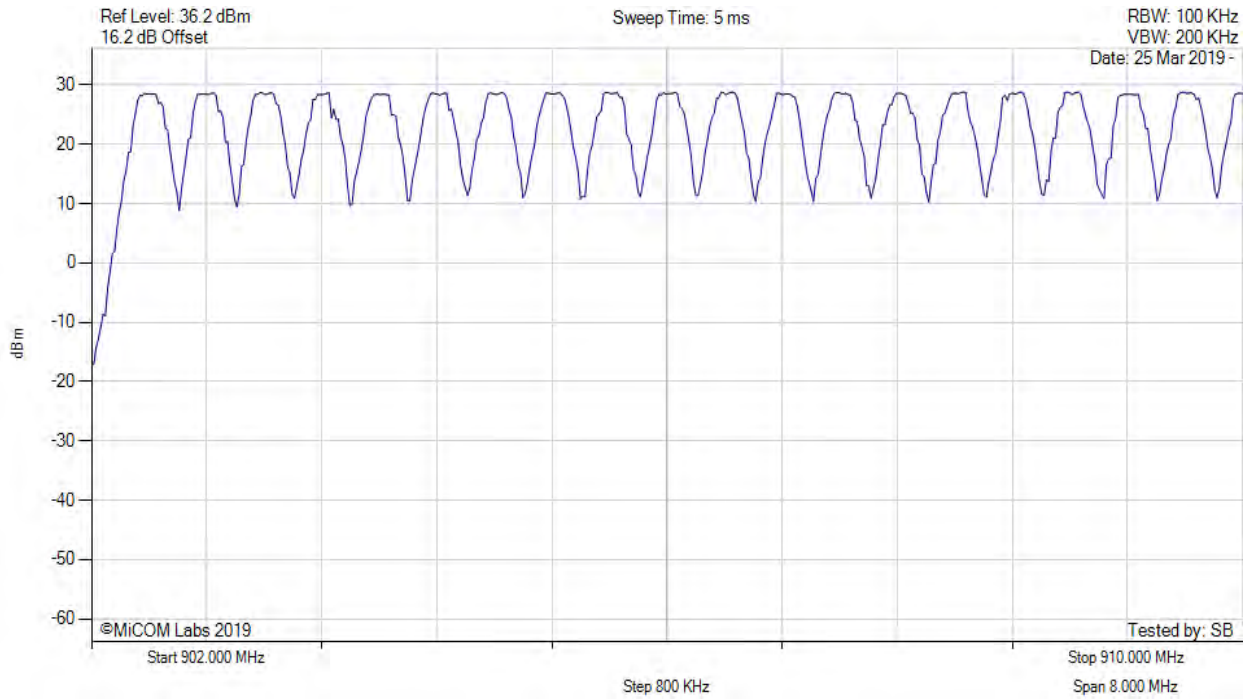


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

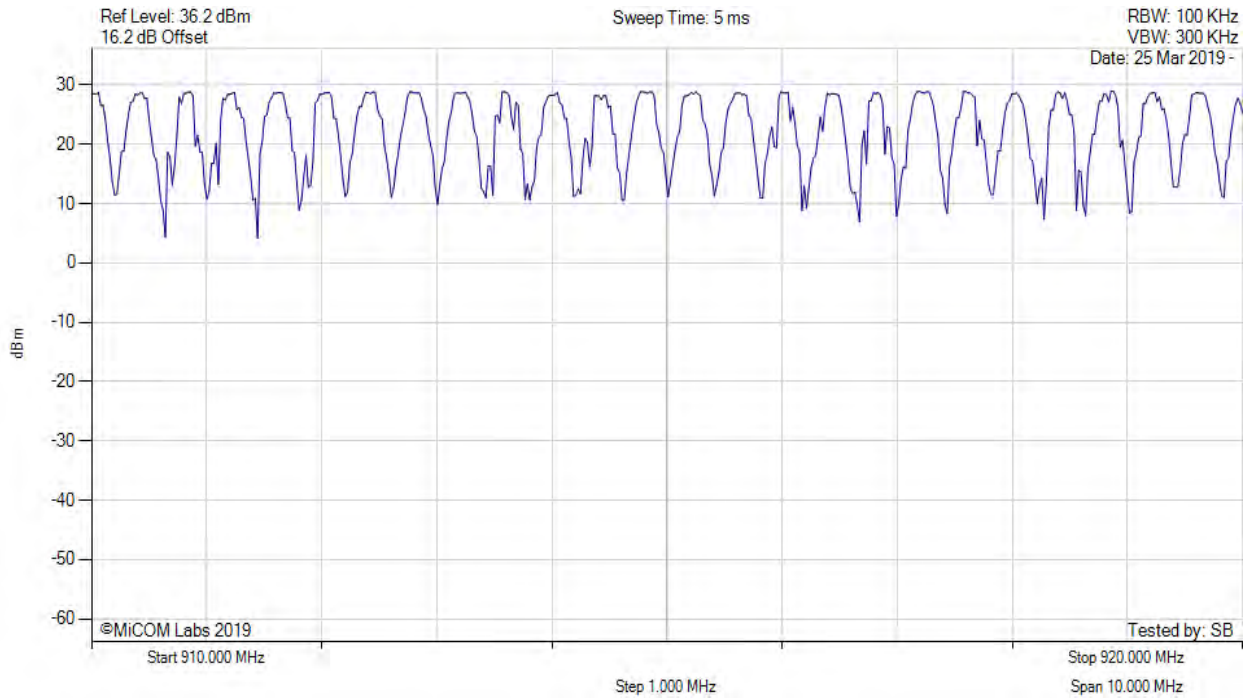


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

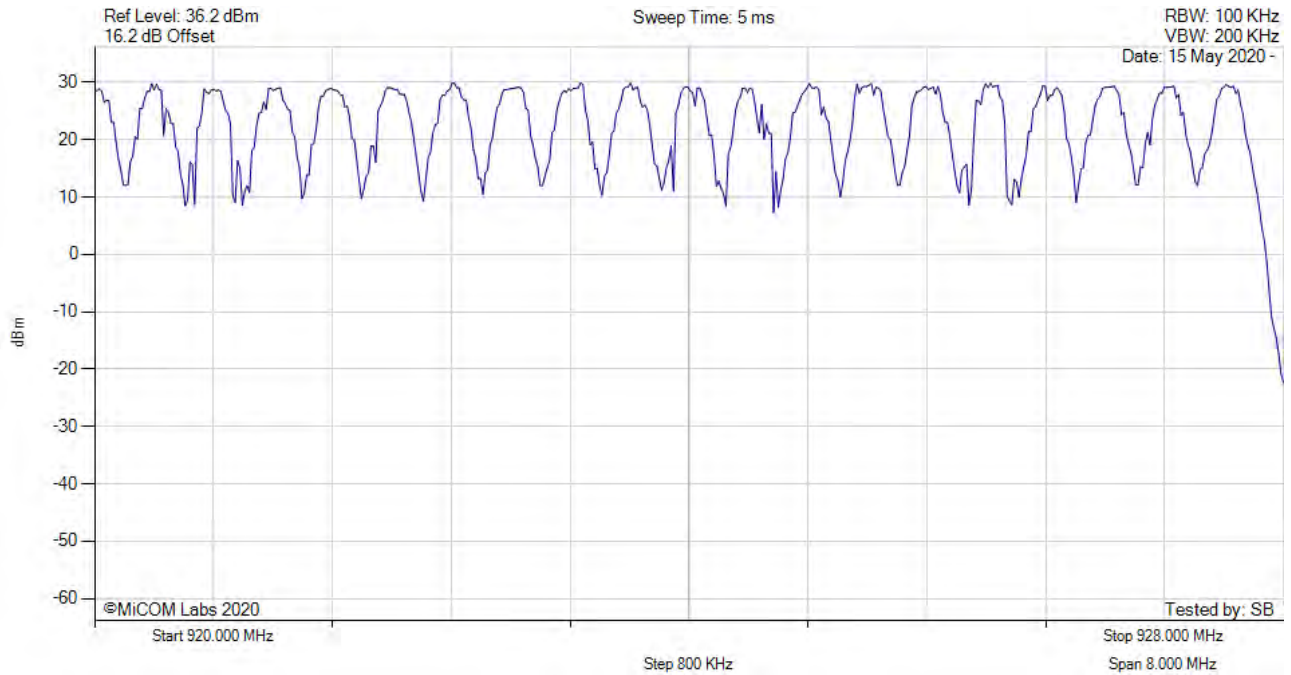

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz


[back to matrix](#)



NUMBER OF HOPPING CHANNELS



Variant: OQPSK, Channel: 915.00 MHz, Chain a, Temp: 20

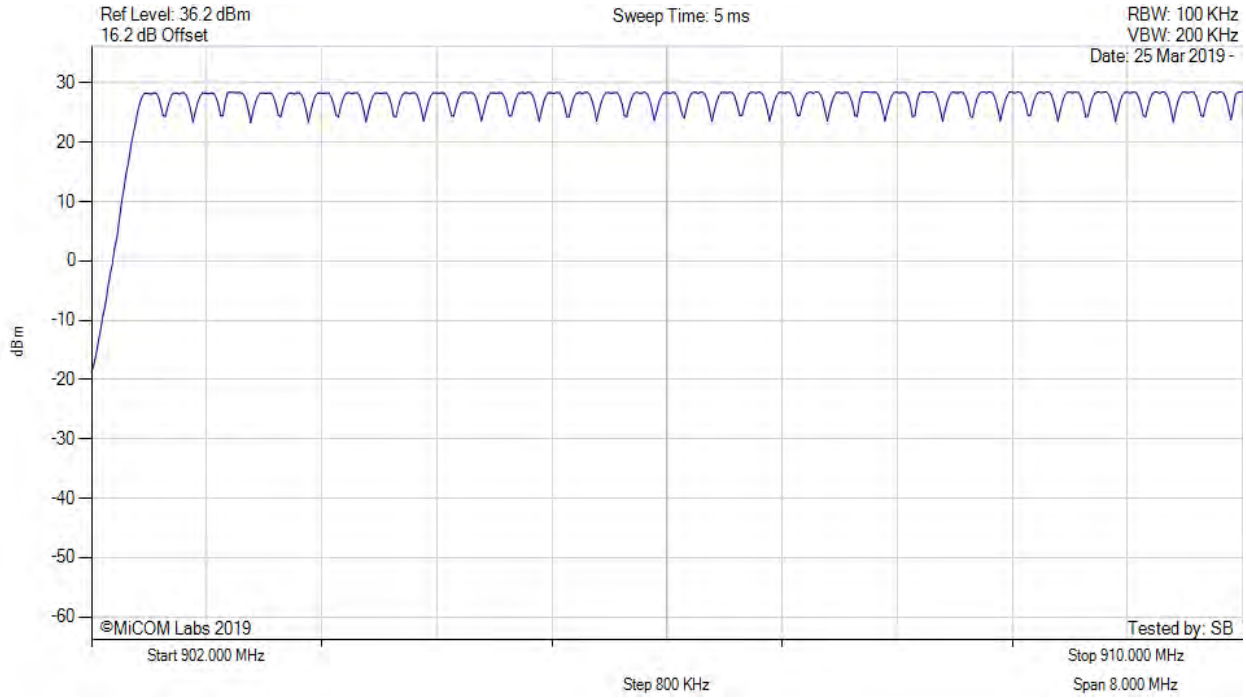


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: OQPSK, Channel: 915.00 MHz, Chain a, Temp: 20

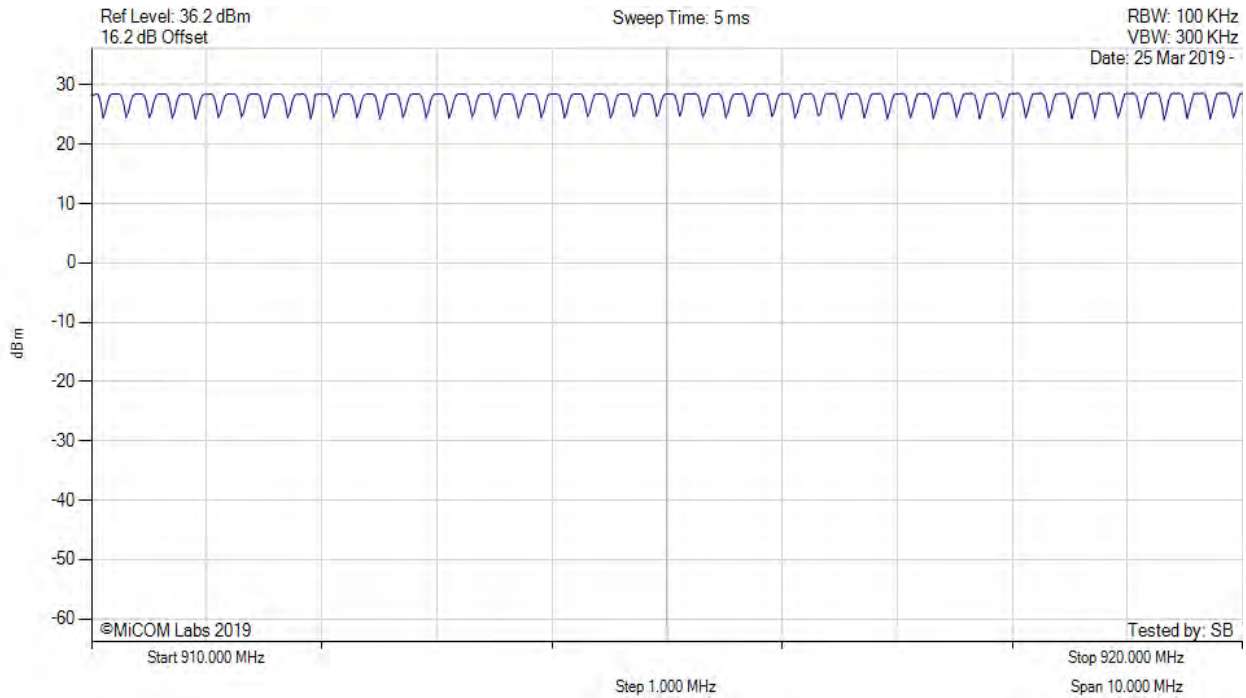

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz


[back to matrix](#)



NUMBER OF HOPPING CHANNELS



Variant: OQPSK, Channel: 915.00 MHz, Chain a, Temp: 20

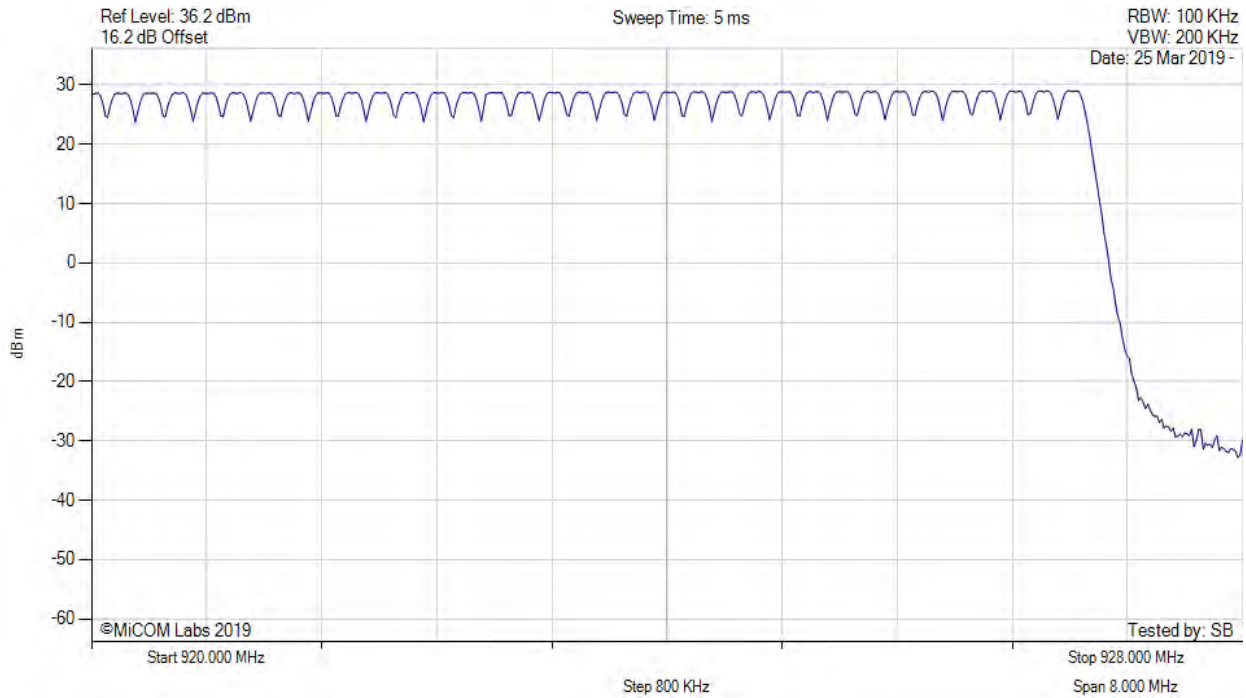

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz


[back to matrix](#)

### A.2.2. Channel Separation



#### CHANNEL SEPARATION

Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

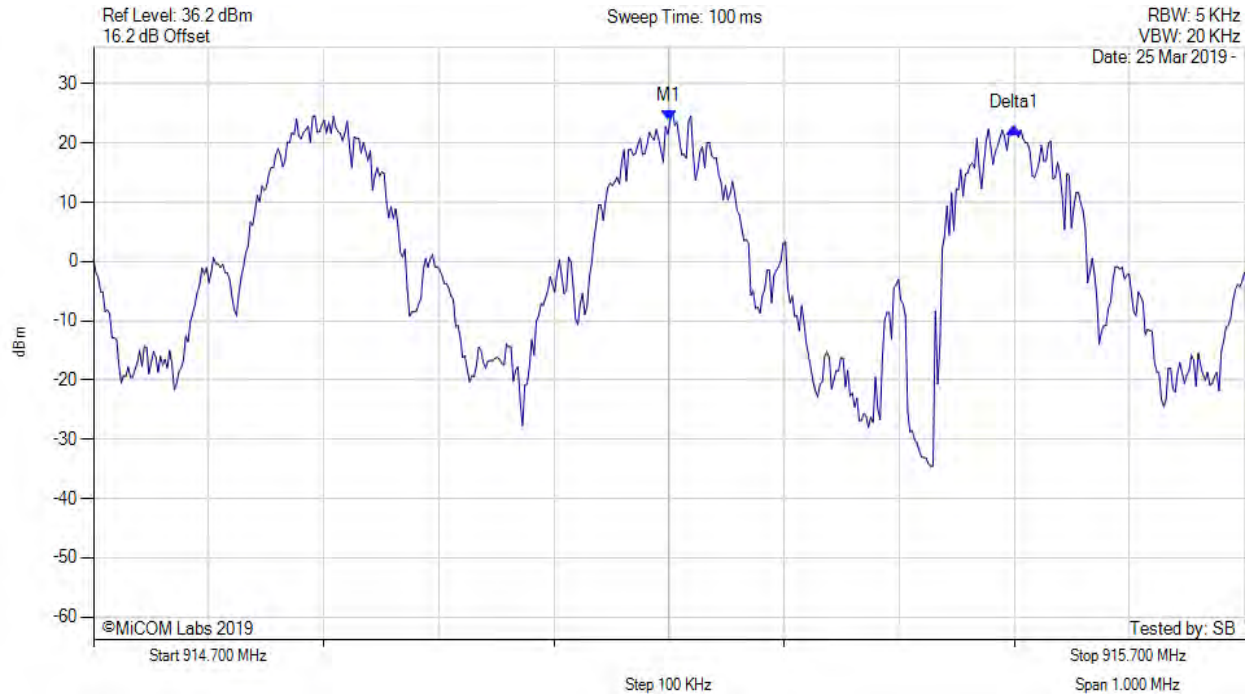


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 915.200 MHz : 23.737 dBm Delta1 : 300 KHz : -1.176 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

CHANNEL SEPARATION



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

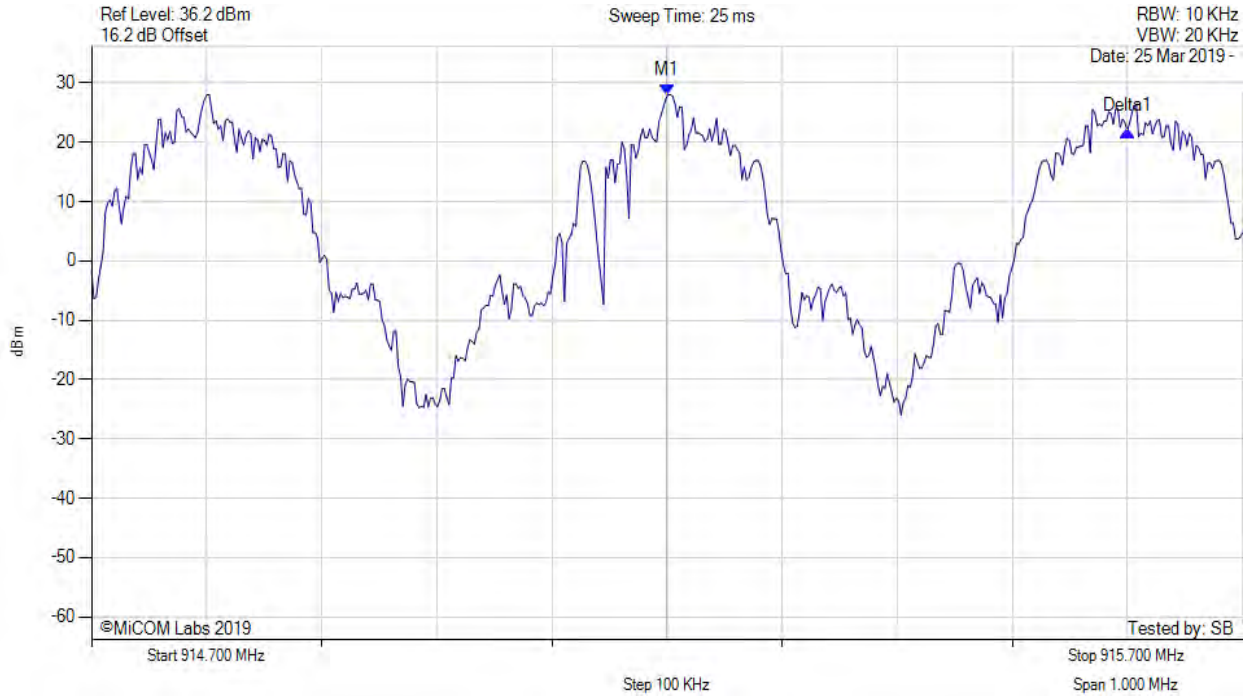


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 915.200 MHz : 28.037 dBm Delta1 : 400 KHz : -6.052 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

CHANNEL SEPARATION




Variant: OQPSK, Channel: 915.00 MHz, Chain a, Temp: 20

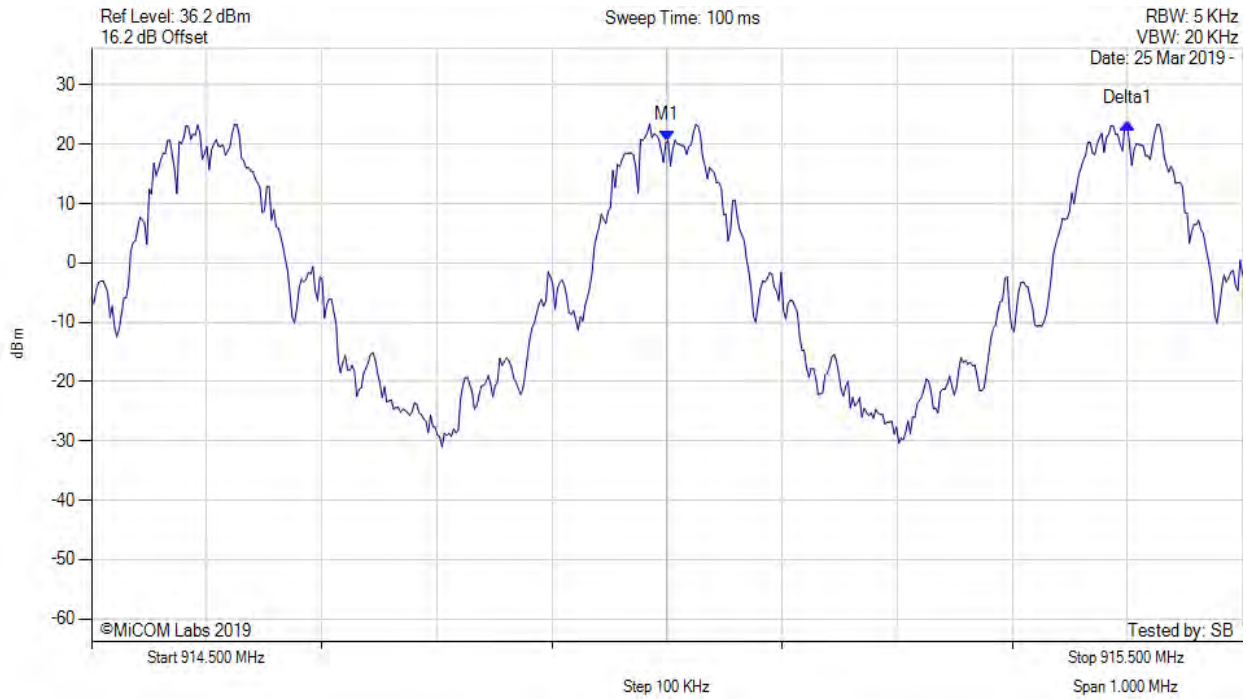

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 915.000 MHz : 20.617 dBm Delta1 : 400 KHz : 2.851 dB	Channel Frequency: 915.00 MHz

[back to matrix](#)

**A.2.3. Dwell Time**

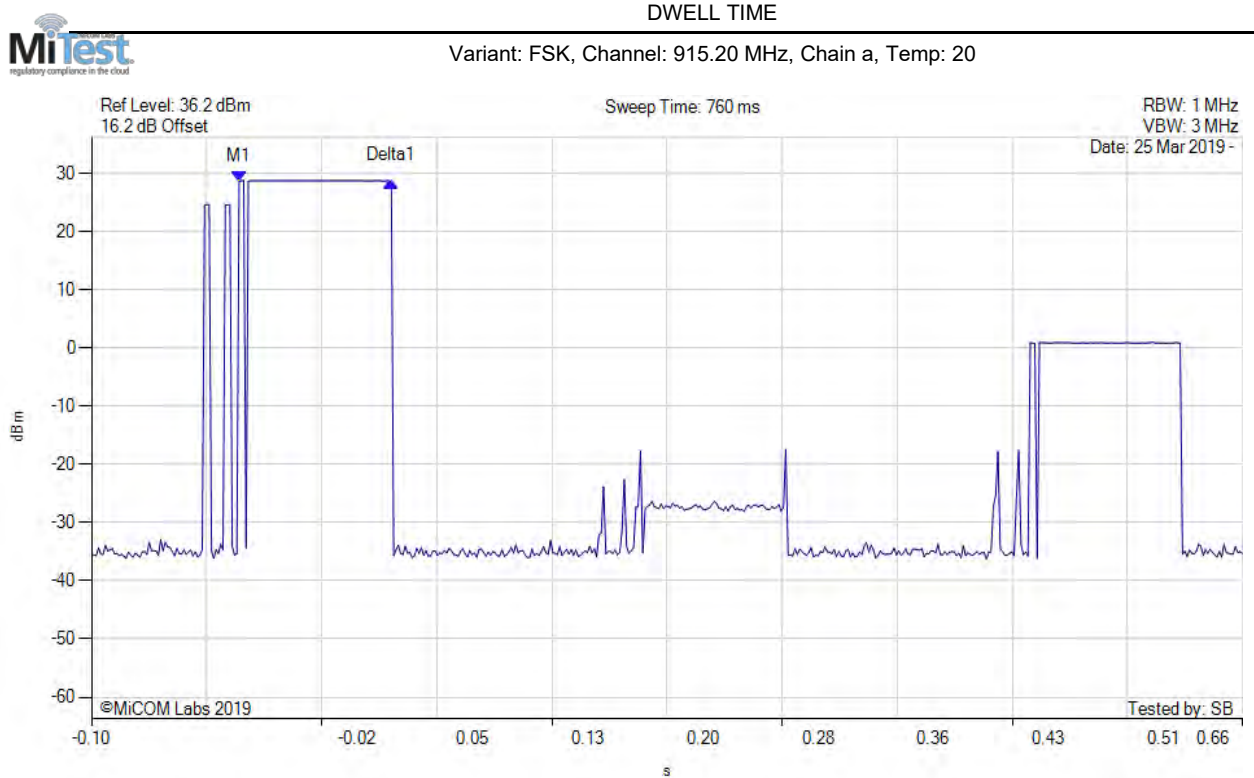

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.20 MHz) : -0.003 s : 28.604 dBm Delta1(915.20 MHz) : 0.101 s : 0.085 dB	Channel Frequency: 915.20 MHz


[back to matrix](#)



DWELL TIME



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

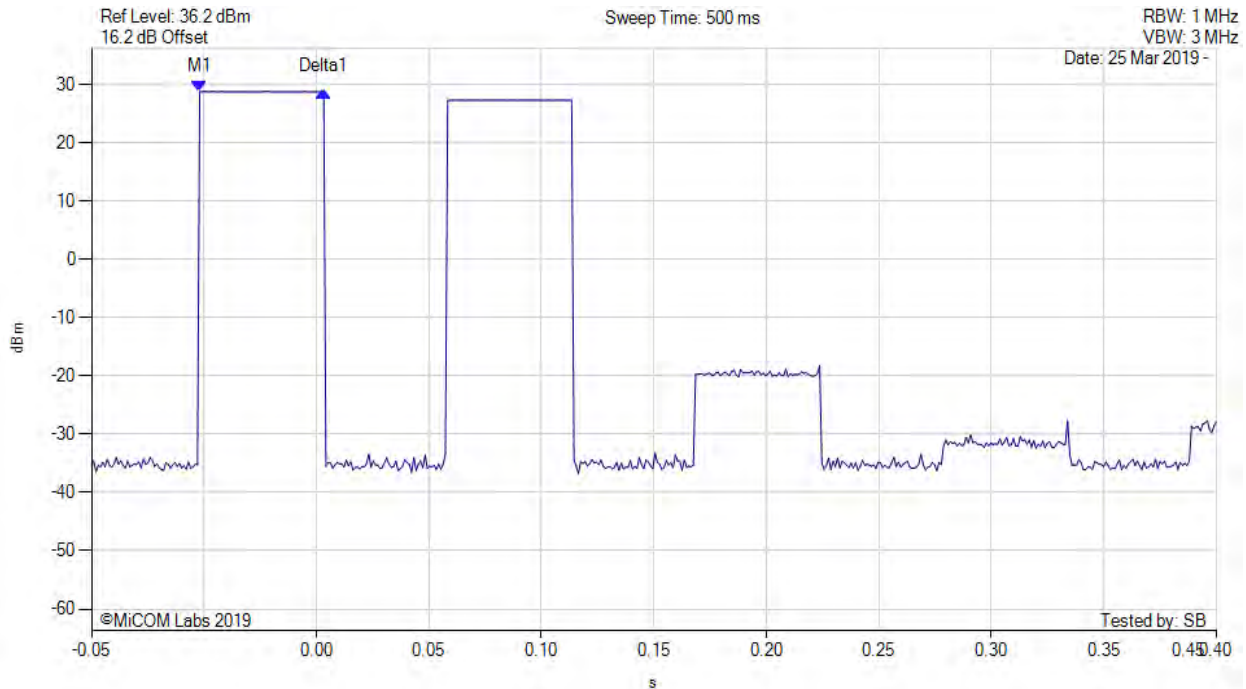

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.20 MHz) : -0.002 s : 28.742 dBm Delta1(915.20 MHz) : 0.055 s : 0.000 dB	Channel Frequency: 915.20 MHz


[back to matrix](#)



DWELL TIME



Variant: OQPSK, Channel: 915.00 MHz, Chain a, Temp: 20

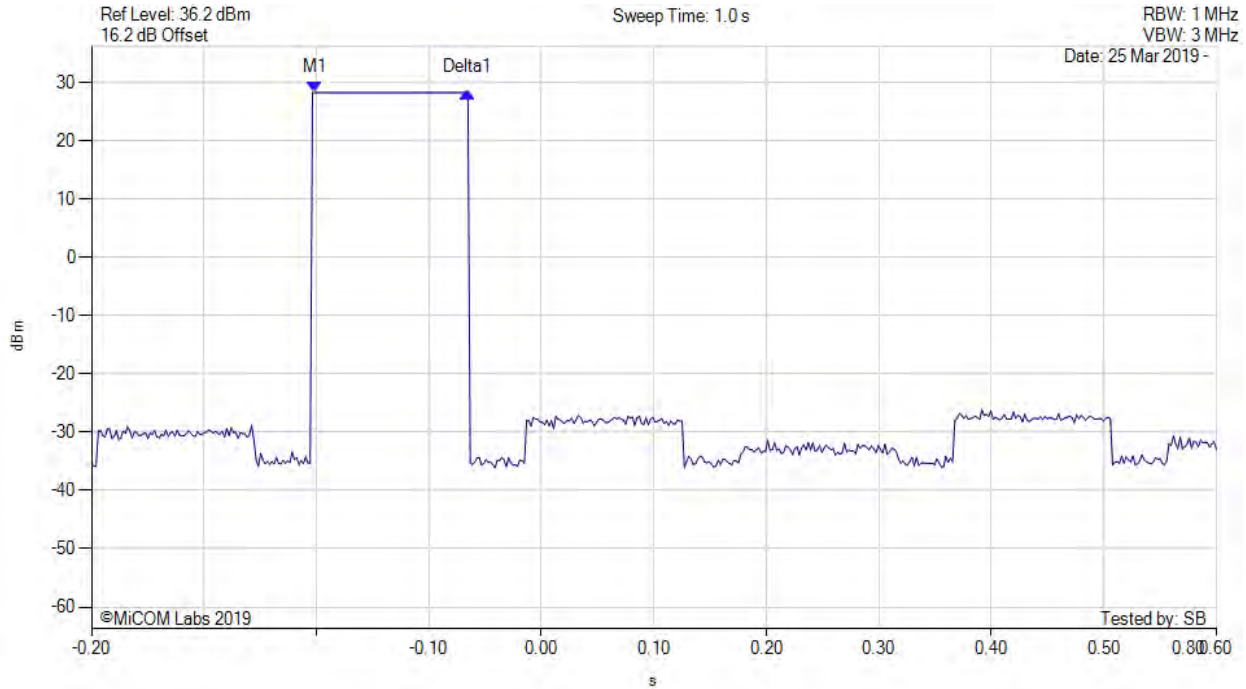

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.00 MHz) : -0.002 s : 28.260 dBm Delta1(915.00 MHz) : 0.136 s : 0.000 dB	Channel Frequency: 915.00 MHz


[back to matrix](#)

### A.2.4. Channel Occupancy



#### CHANNEL OCCUPANCY

Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

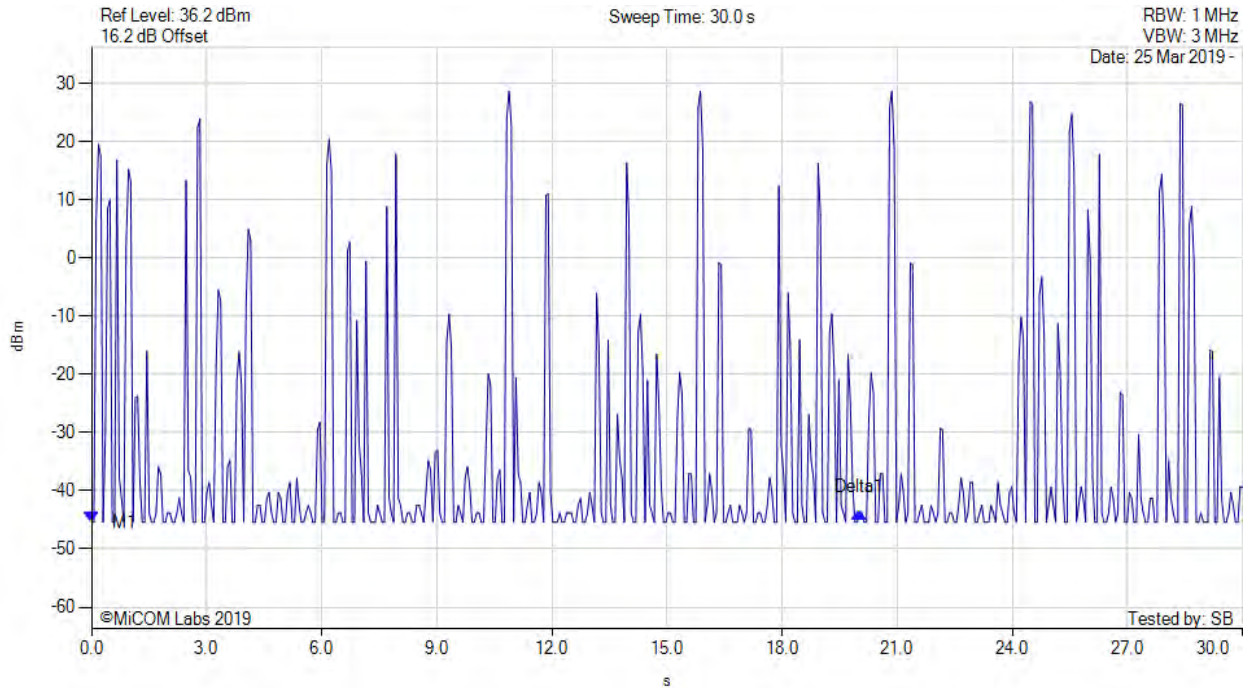


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.20 MHz) : 0.000 s : -45.386 dBm Delta1(915.20 MHz) : 20.000 s : 1.584 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

CHANNEL OCCUPANCY



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

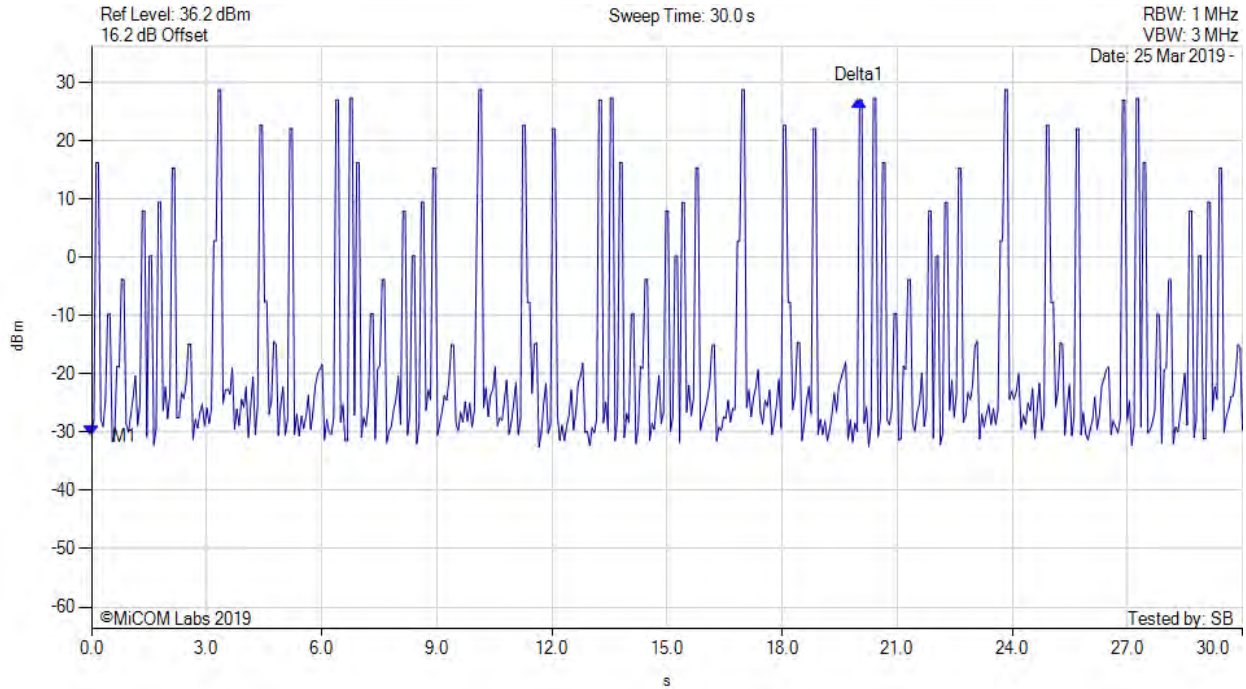


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.20 MHz) : 0.000 s : -30.651 dBm Delta1(915.20 MHz) : 20.000 s : 57.608 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

CHANNEL OCCUPANCY



Variant: OQPSK, Channel: 915.00 MHz, Chain a, Temp: 20

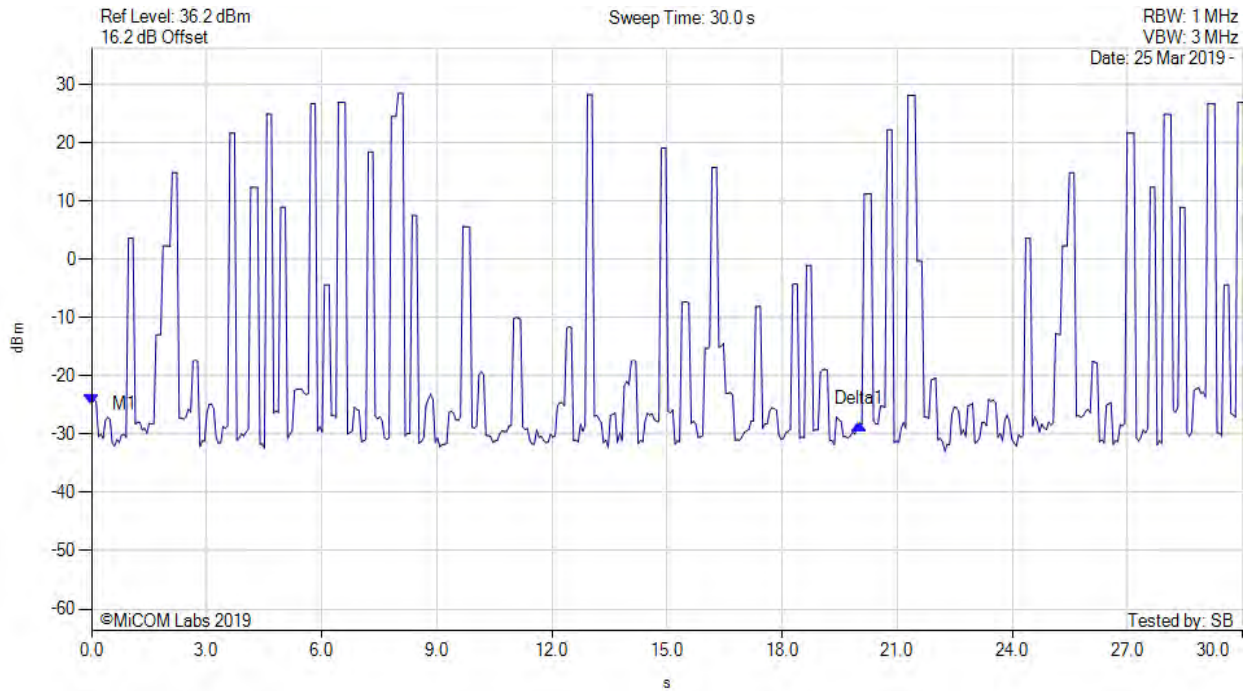

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.00 MHz) : 0.000 s : -24.814 dBm Delta1(915.00 MHz) : 20.000 s : -3.386 dB	Channel Frequency: 915.00 MHz


[back to matrix](#)



### A.3. Emissions

#### A.3.1. Conducted Emissions

##### A.3.1.1. Conducted Unwanted Spurious Emissions

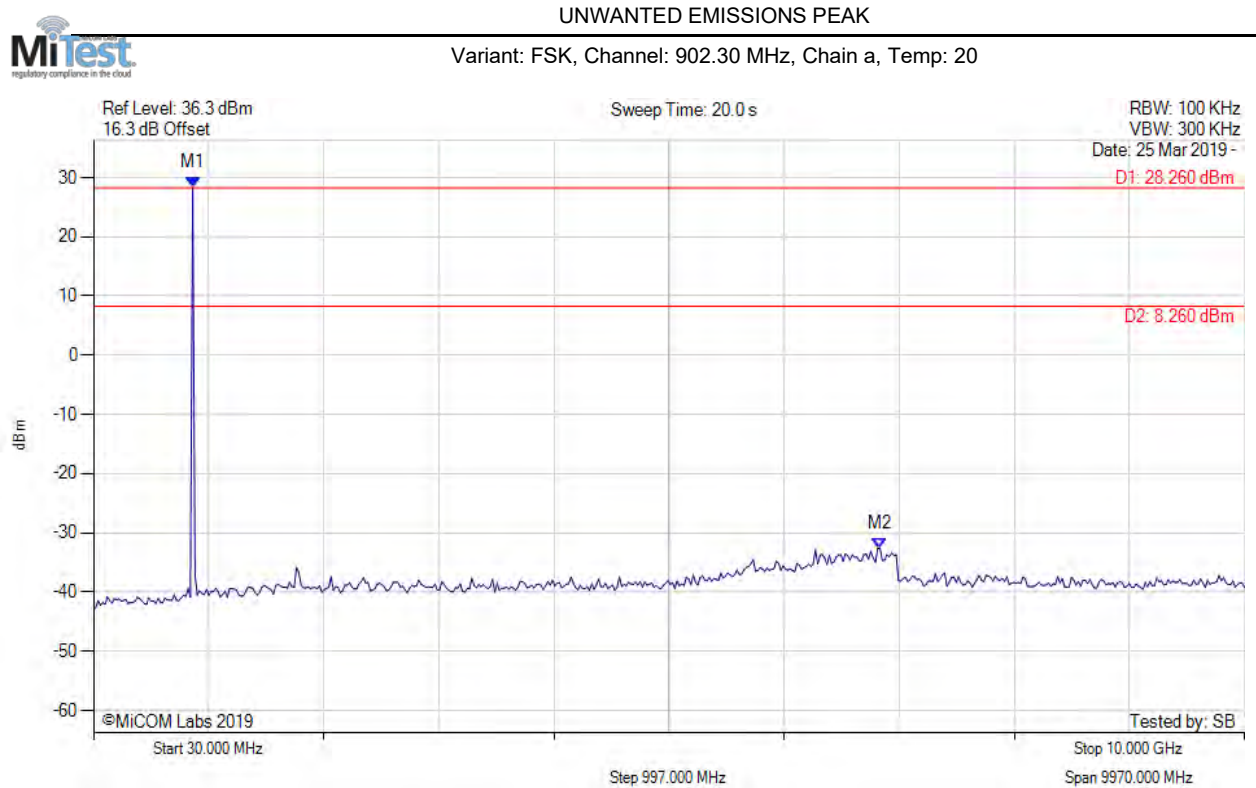


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 889.138 MHz : 28.263 dBm M2 : 6843.166 MHz : -32.622 dBm	Limit: 8.26 dBm Margin: -40.88 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

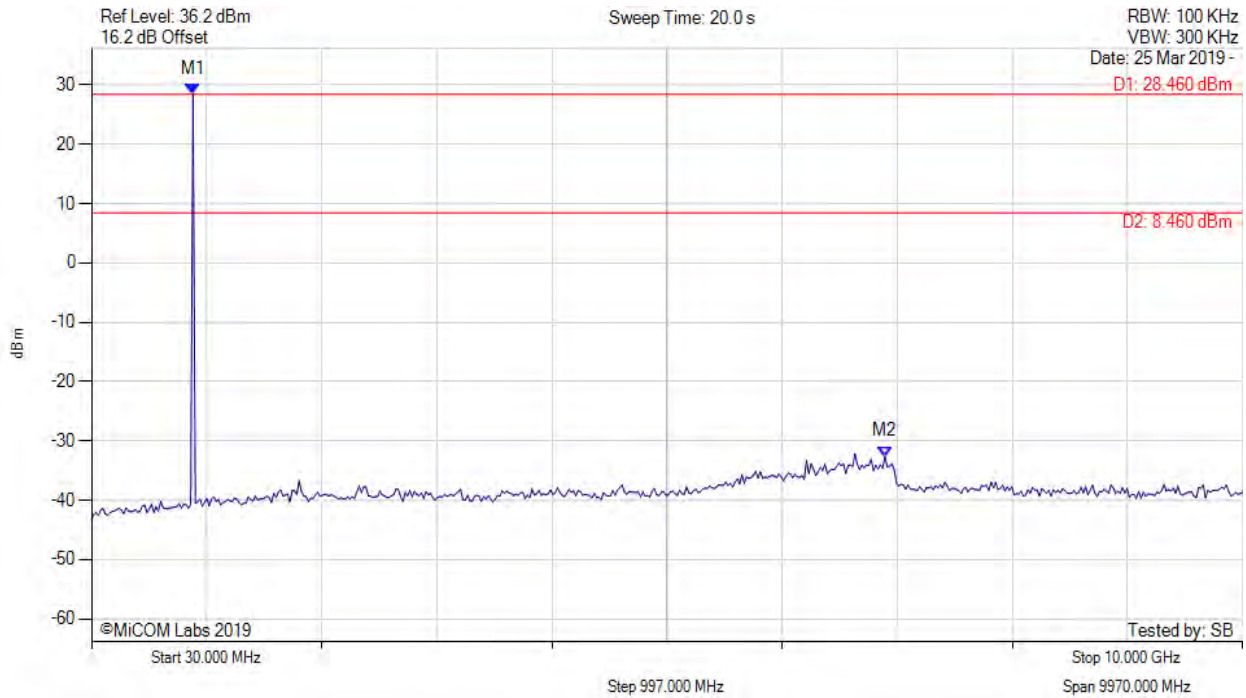

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 909.118 MHz : 28.464 dBm M2 : 6903.106 MHz : -32.661 dBm	Limit: 8.46 dBm Margin: -41.12 dB


[back to matrix](#)



UNWANTED EMISSIONS PEAK



Variant: FSK, Channel: 926.90 MHz, Chain a, Temp: 20

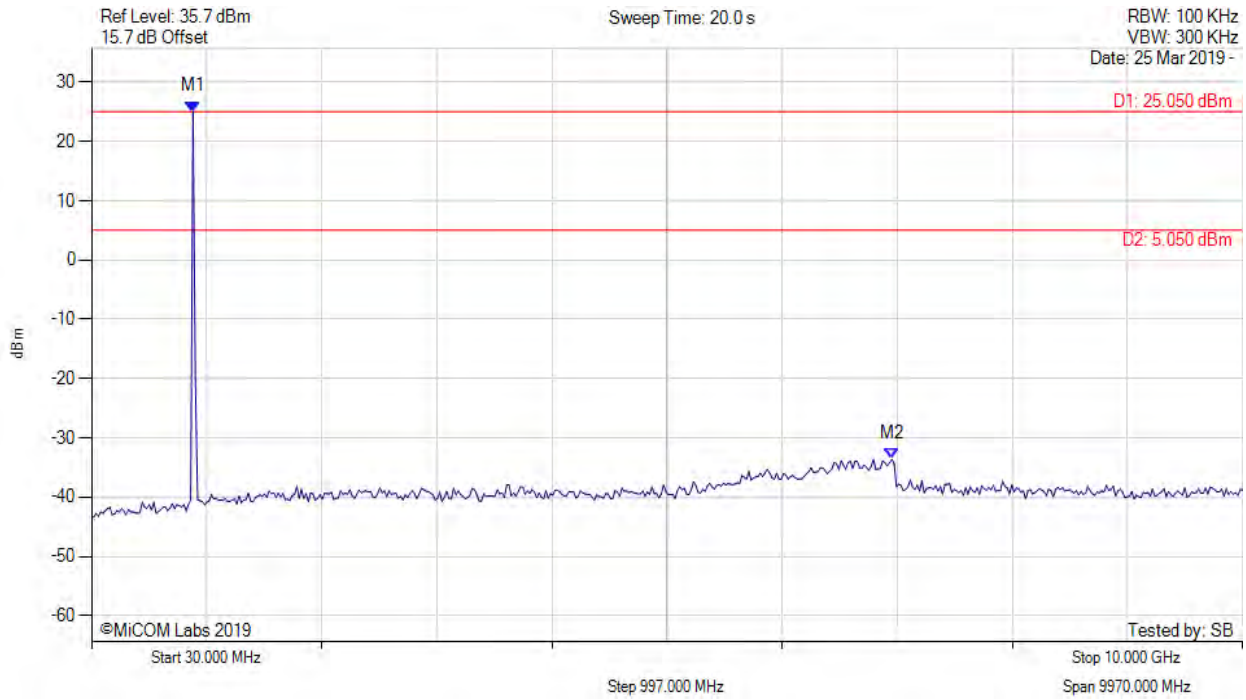


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 909.118 MHz : 25.045 dBm M2 : 6963.046 MHz : -33.600 dBm	Limit: 5.05 dBm Margin: -38.65 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: FSK, Channel: 902.40 MHz, Chain a, Temp: 20

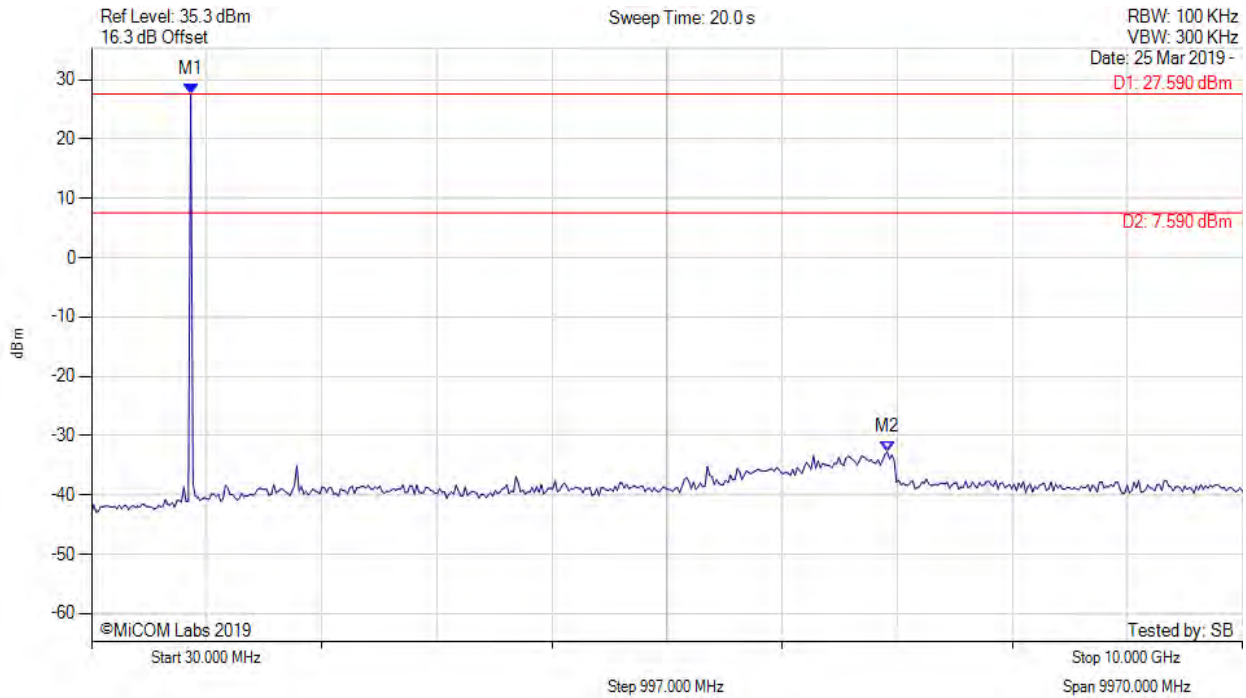


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 889.138 MHz : 27.592 dBm M2 : 6923.086 MHz : -32.769 dBm	Limit: 7.59 dBm Margin: -40.36 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: FSK, Channel: 915.20 MHz, Chain a, Temp: 20

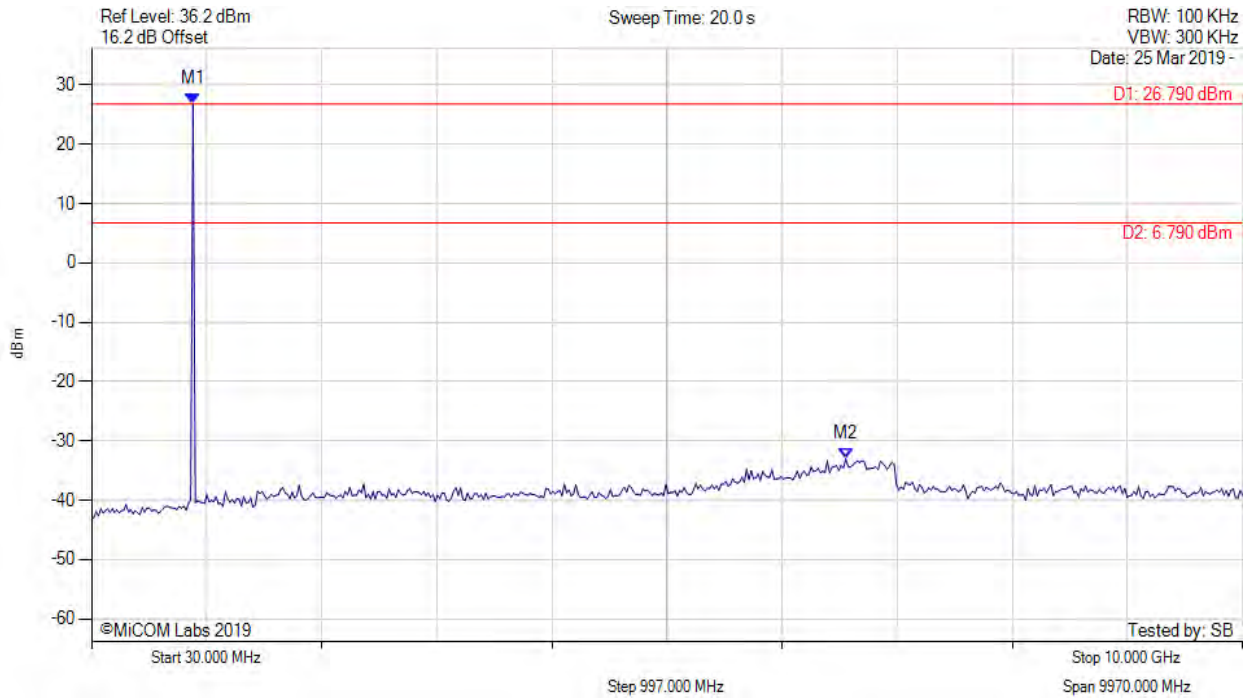


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 909.118 MHz : 26.790 dBm M2 : 6563.447 MHz : -33.029 dBm	Limit: 6.79 dBm Margin: -39.82 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: FSK, Channel: 927.6 MHz, Chain a, Temp: 20

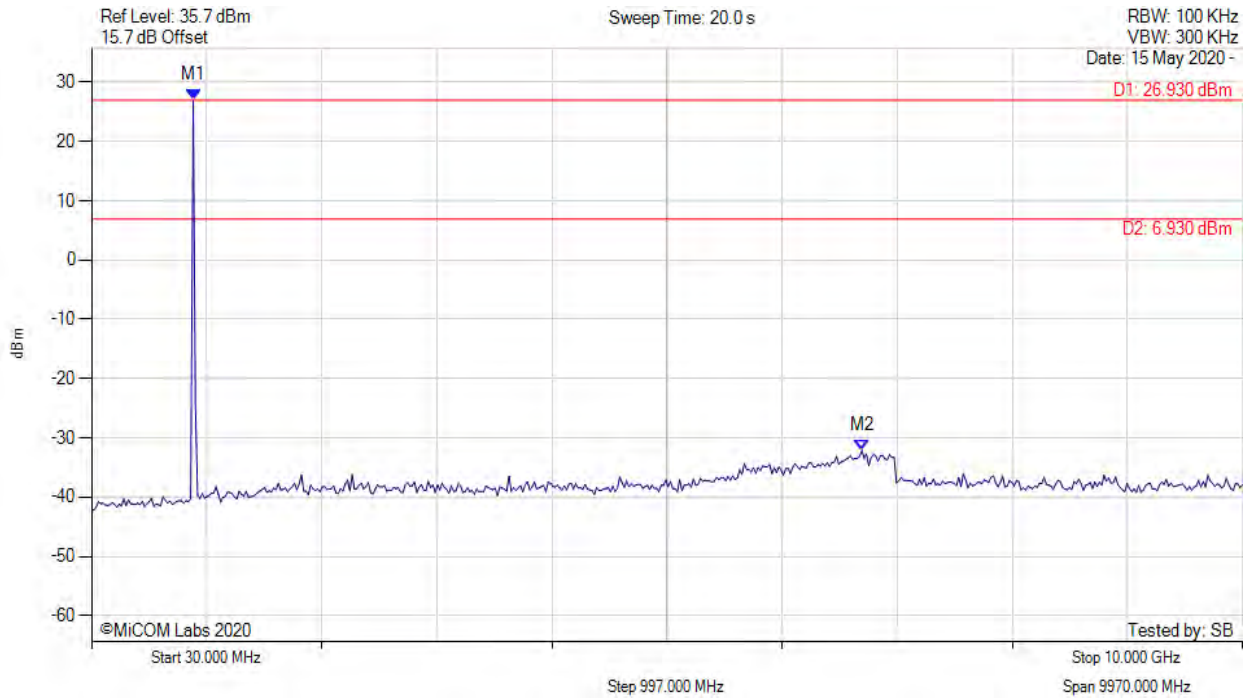


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 912.883 MHz : 26.936 dBm M2 : 6703.216 MHz : -32.113 dBm	Channel Frequency: 927.60 MHz

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: OQPSK, Channel: 902.40 MHz, Chain a, Temp: 20

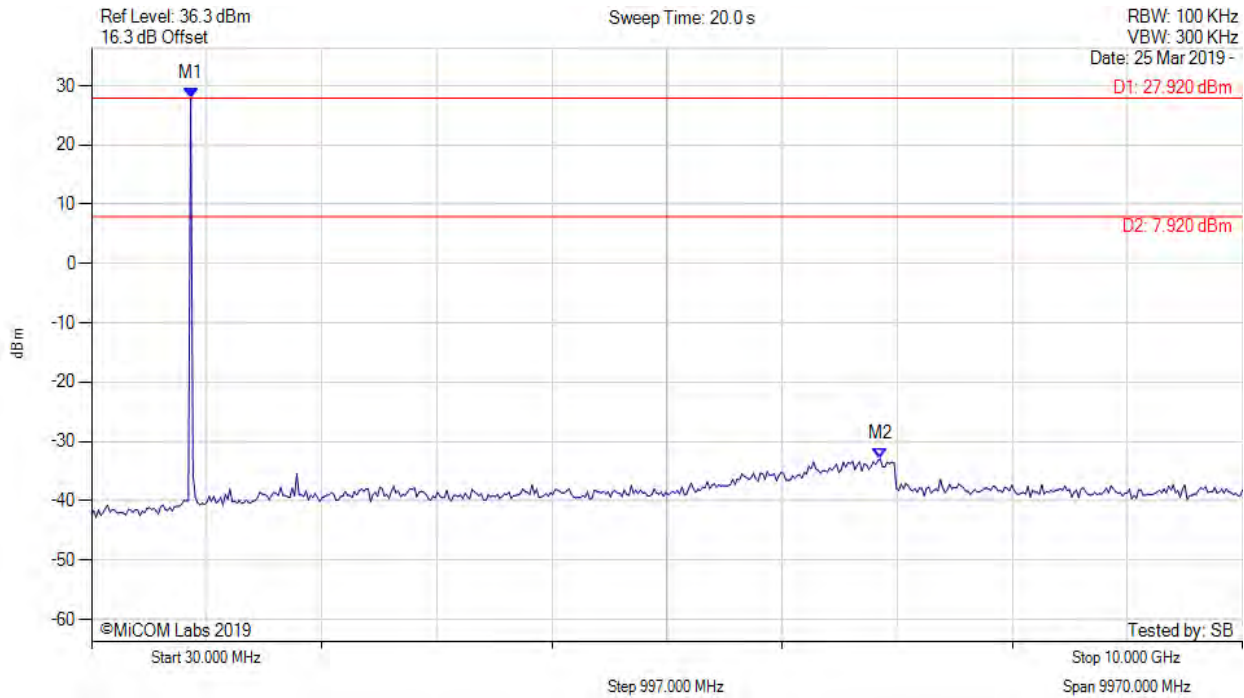

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 889.138 MHz : 27.921 dBm M2 : 6863.146 MHz : -32.927 dBm	Limit: 7.92 dBm Margin: -40.85 dB


[back to matrix](#)



UNWANTED EMISSIONS PEAK



Variant: OQPSK, Channel: 915.00 MHz, Chain a, Temp: 20

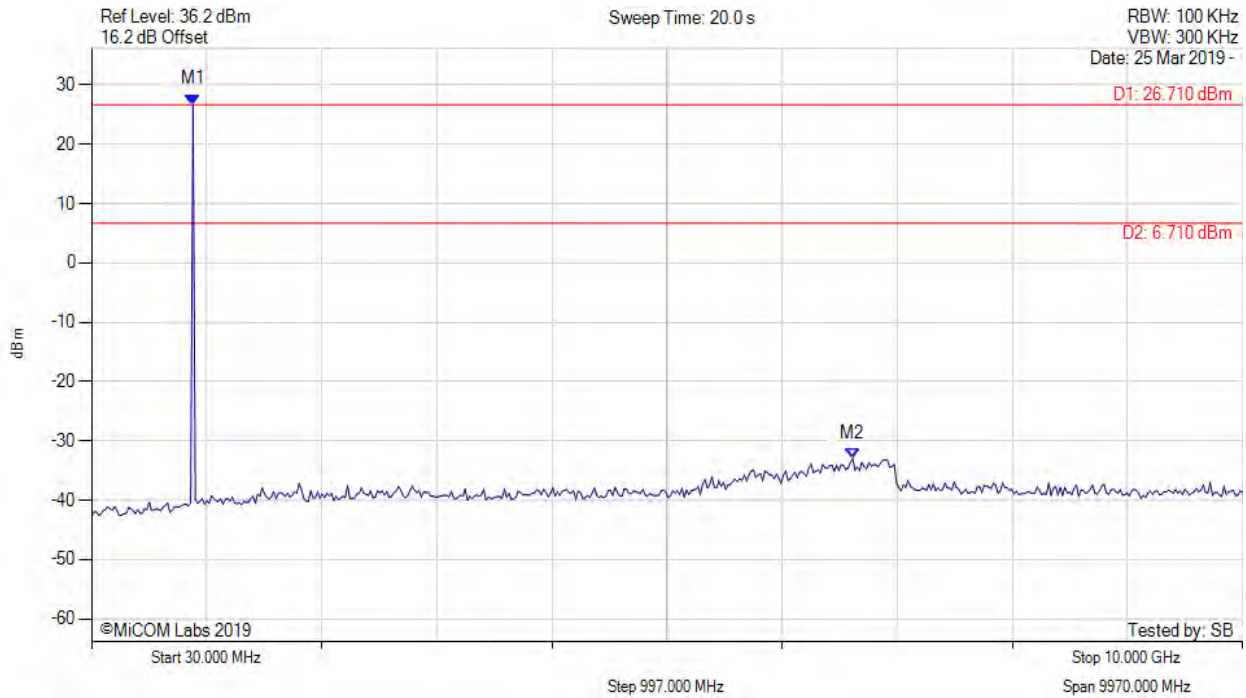

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 909.118 MHz : 26.709 dBm M2 : 6623.387 MHz : -32.960 dBm	Limit: 6.71 dBm Margin: -39.67 dB


[back to matrix](#)



UNWANTED EMISSIONS PEAK



Variant: OQPSK, Channel: 926.80 MHz, Chain a, Temp: 20

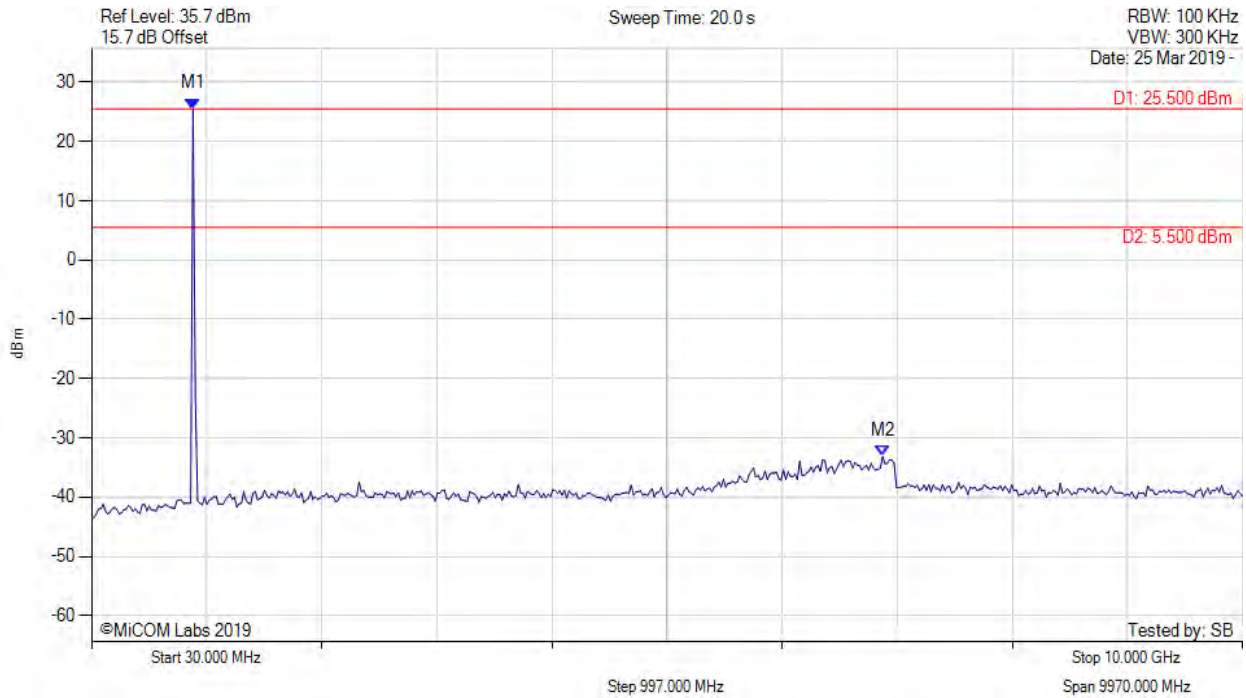

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 909.118 MHz : 25.497 dBm M2 : 6883.126 MHz : -33.132 dBm	Limit: 5.50 dBm Margin: -38.63 dB


[back to matrix](#)

### A.3.1.2. Conducted Band-Edge Emissions

#### CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: FSK, Channel: 902.30 MHz, Chain a, Temp: 20

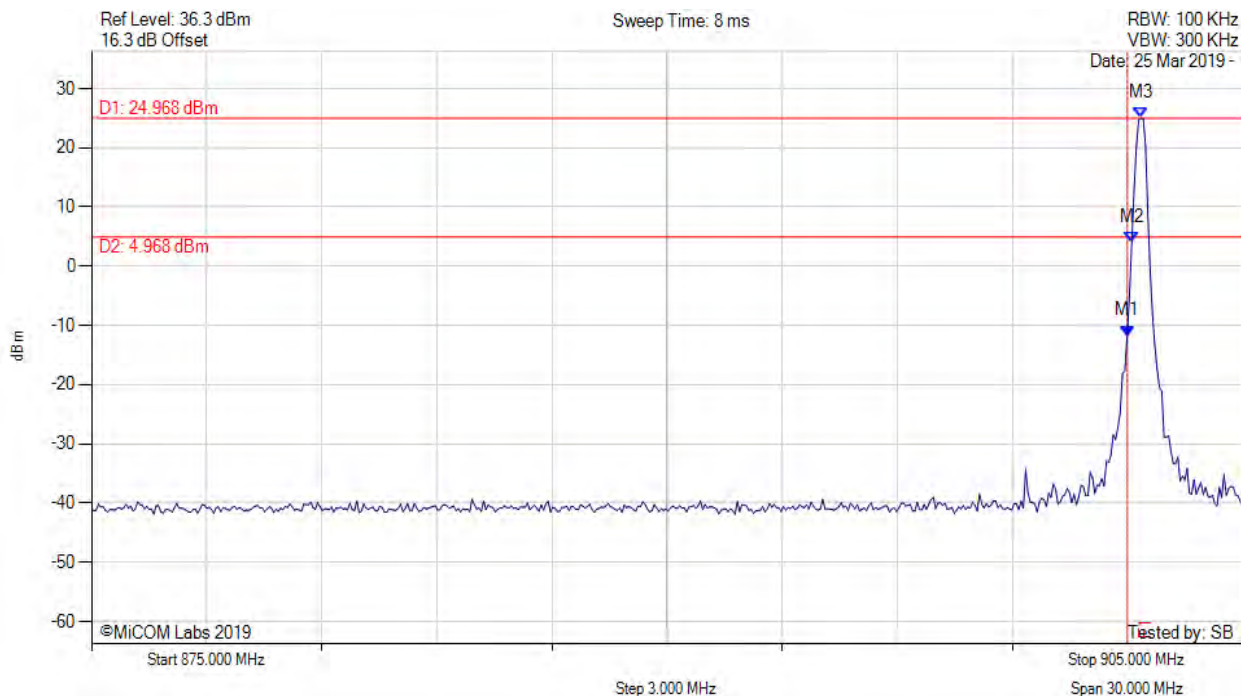


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -11.753 dBm M2 : 902.114 MHz : 4.045 dBm M3 : 902.355 MHz : 24.968 dBm	Channel Frequency: 902.30 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: FSK, Channel: 902.40 MHz, Chain a, Temp: 20

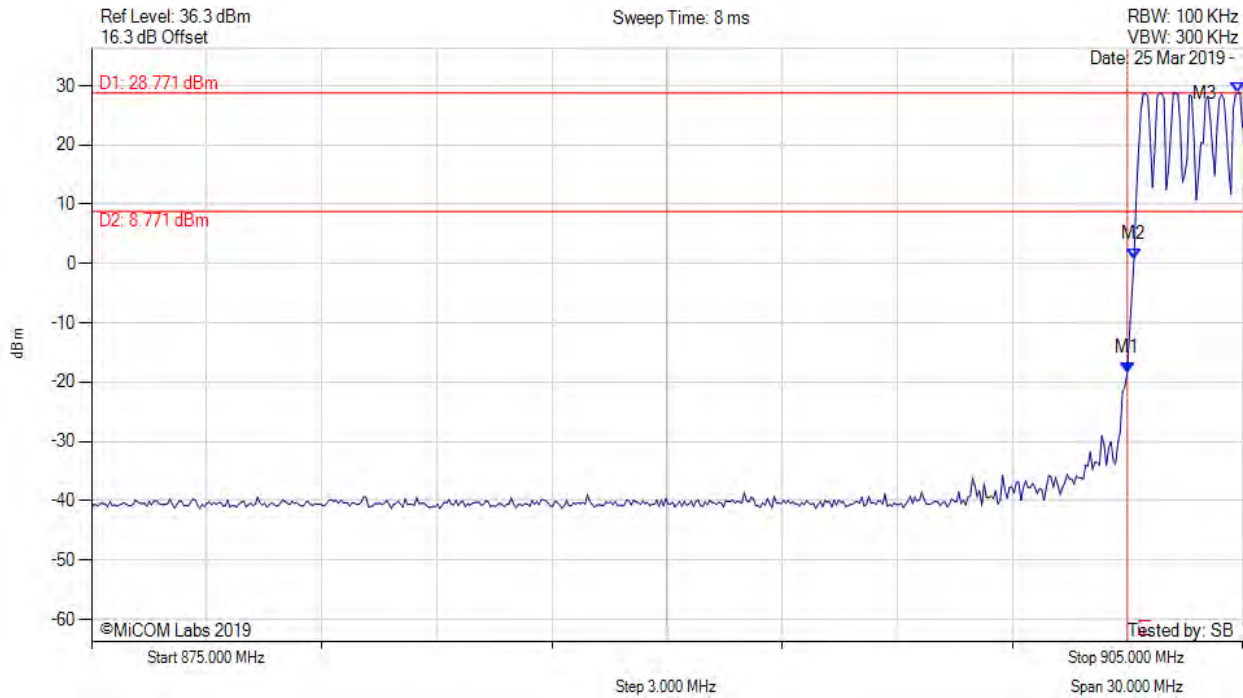


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -18.379 dBm M2 : 902.174 MHz : 0.795 dBm M3 : 904.880 MHz : 28.771 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: OQPSK, Channel: 902.40 MHz, Chain a, Temp: 20

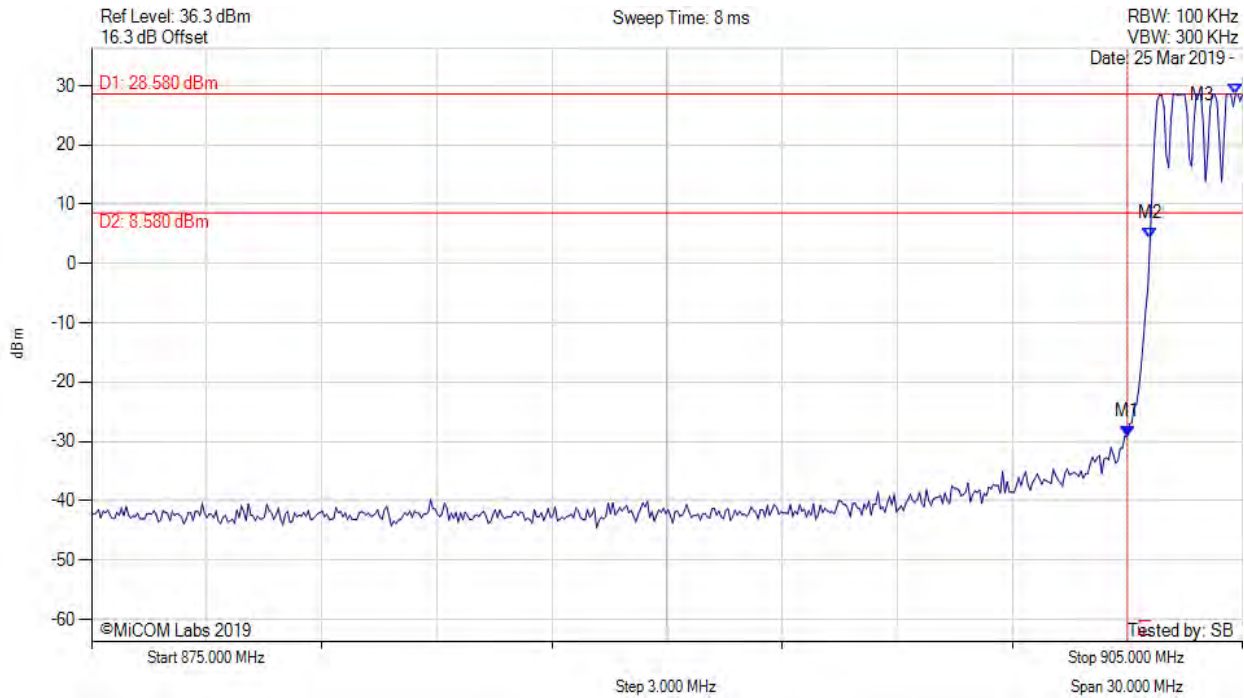


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -29.166 dBm M2 : 902.595 MHz : 4.244 dBm M3 : 904.820 MHz : 28.580 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variante: FSK, Channel: 902.30 MHz, Chain a, Temp: 20

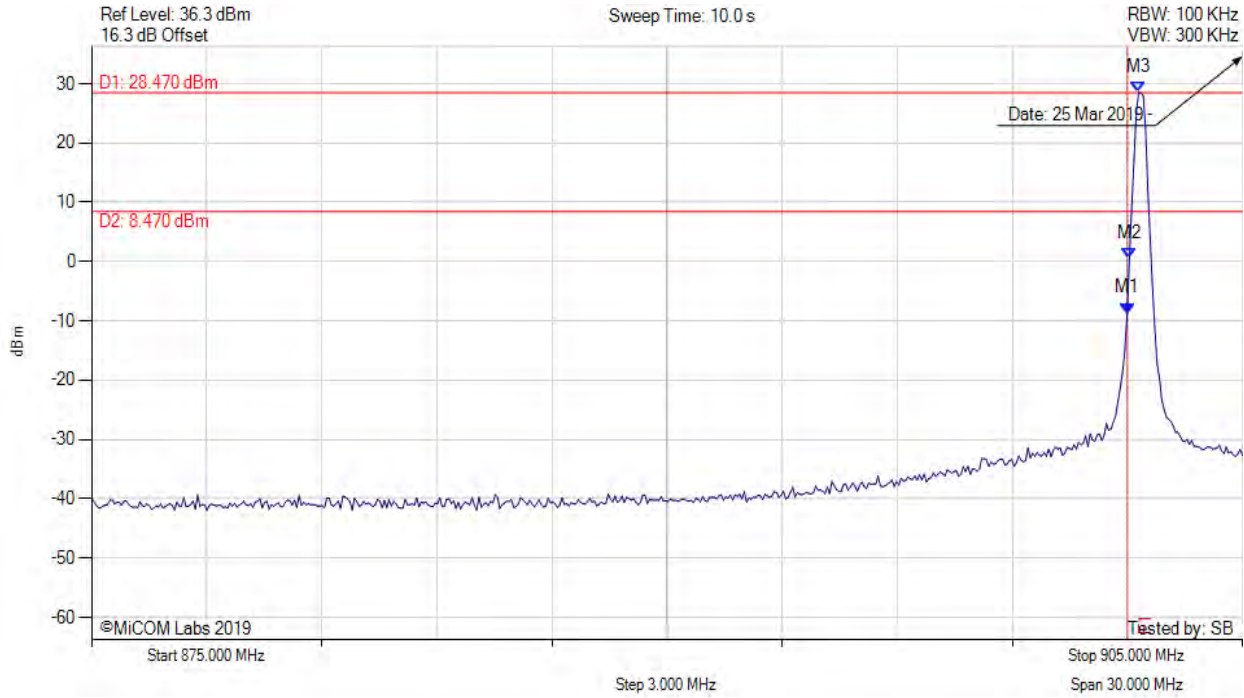

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.000 MHz : -8.723 dBm M2 : 902.054 MHz : 0.514 dBm M3 : 902.295 MHz : 28.470 dBm	Channel Frequency: 902.30 MHz


[back to matrix](#)



CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: FSK, Channel: 902.40 MHz, Chain a, Temp: 20

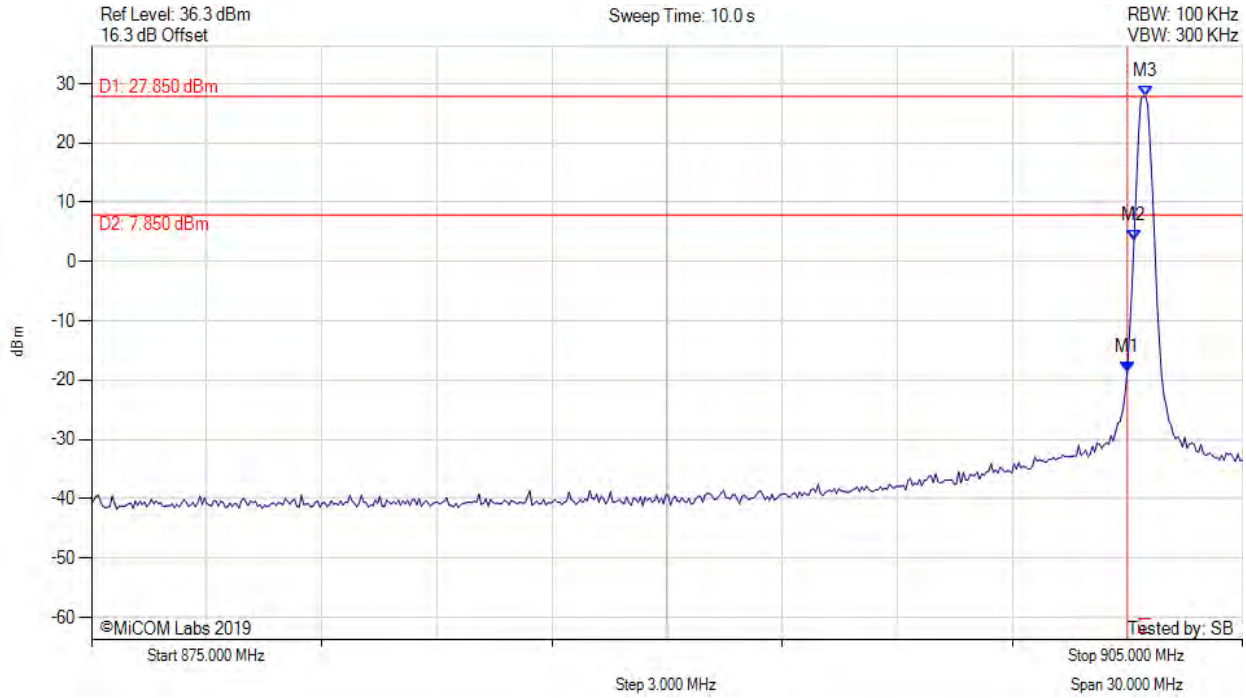

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.000 MHz : -18.591 dBm M2 : 902.174 MHz : 3.648 dBm M3 : 902.475 MHz : 27.850 dBm	Channel Frequency: 902.40 MHz


[back to matrix](#)



CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: OQPSK, Channel: 902.40 MHz, Chain a, Temp: 20

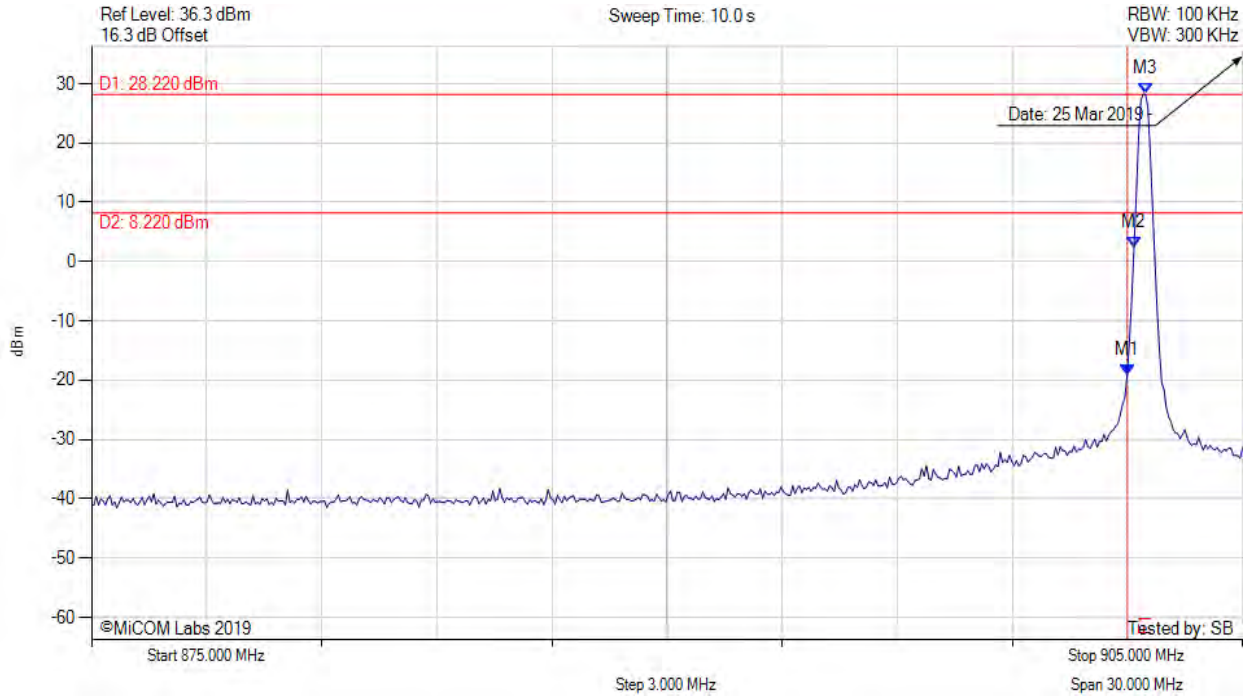


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.000 MHz : -19.111 dBm M2 : 902.174 MHz : 2.444 dBm M3 : 902.475 MHz : 28.222 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: FSK, Channel: 926.90 MHz, Chain a, Temp: 20

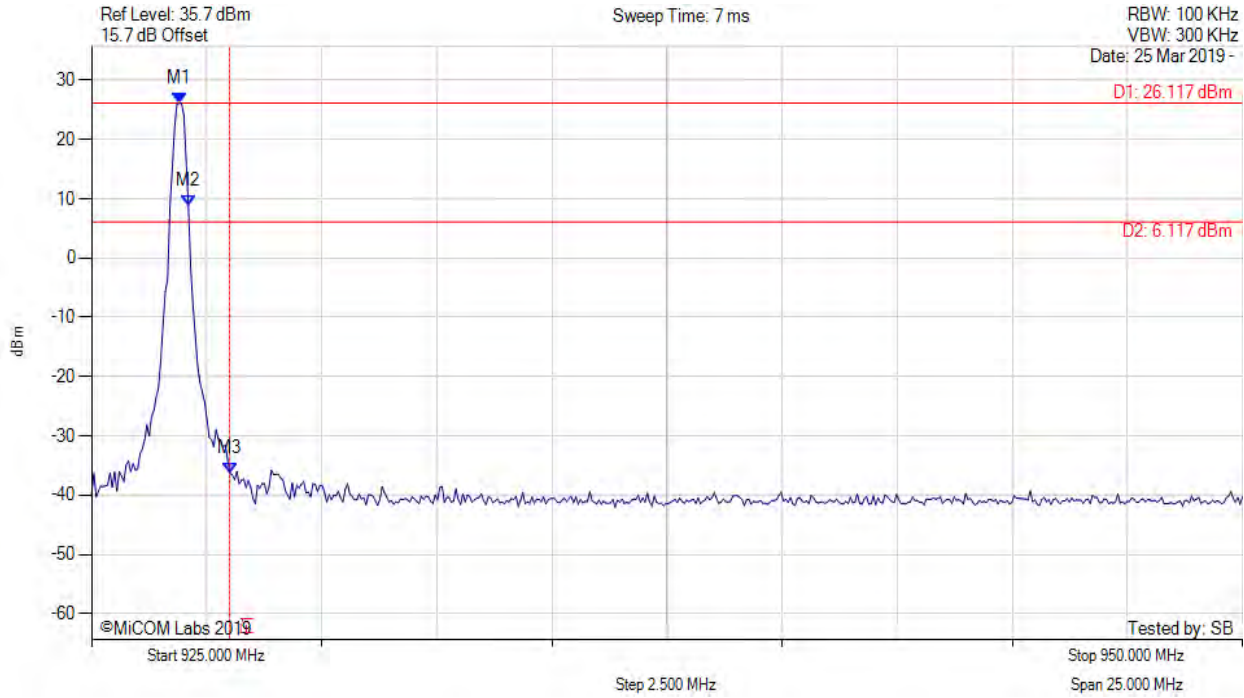


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.904 MHz : 26.117 dBm M2 : 927.104 MHz : 8.783 dBm M3 : 928.000 MHz : -36.297 dBm	Channel Frequency: 926.90 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: FSK, Channel: 926.80 MHz, Chain a, Temp: 20

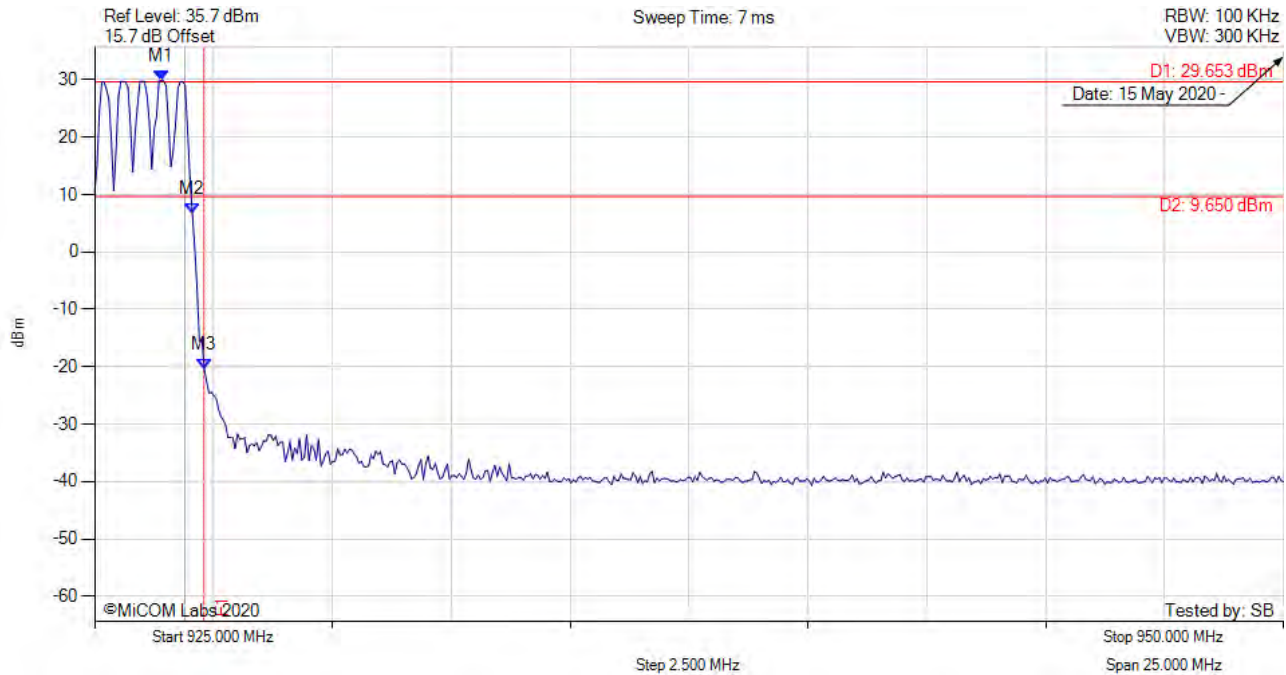


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 927.103 MHz : 29.800 dBm M2 : 927.754 MHz : 6.753 dBm M3 : 928.000 MHz : -20.326 dBm	Channel Frequency: 927.60 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: OQPSK, Channel: 926.80 MHz, Chain a, Temp: 20

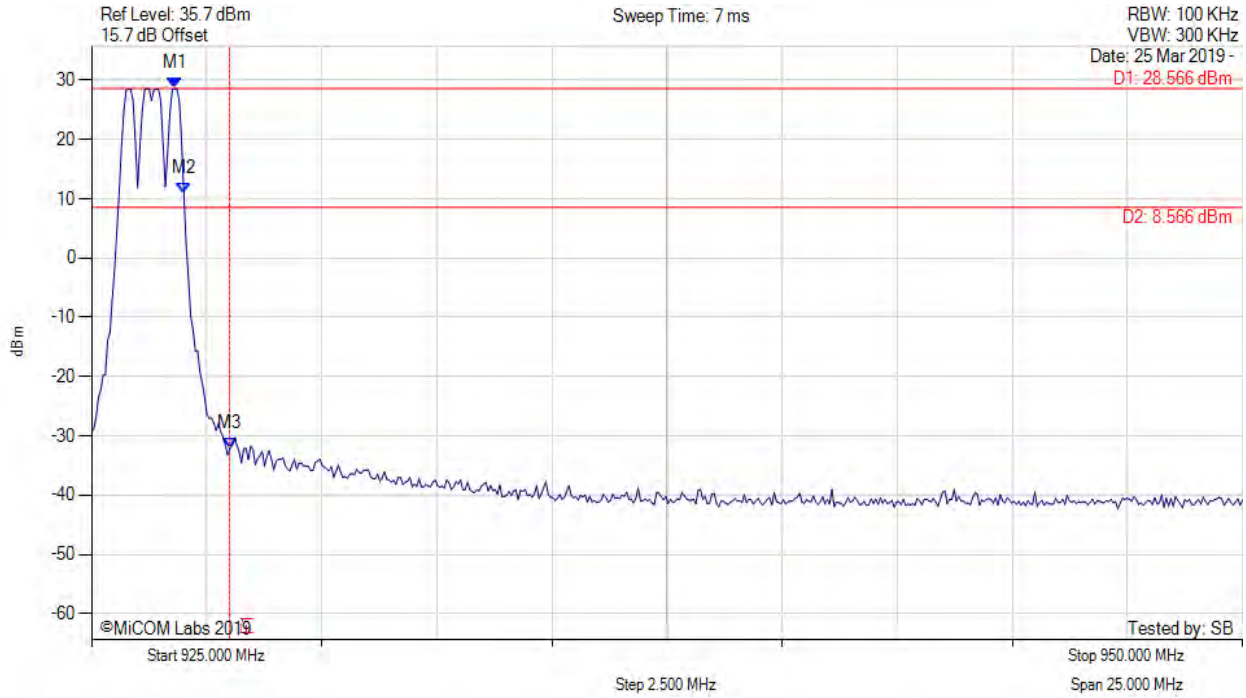


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.804 MHz : 28.566 dBm M2 : 927.004 MHz : 10.872 dBm M3 : 928.000 MHz : -32.040 dBm	Channel Frequency: 926.80 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: FSK, Channel: 926.90 MHz, Chain a, Temp: 20

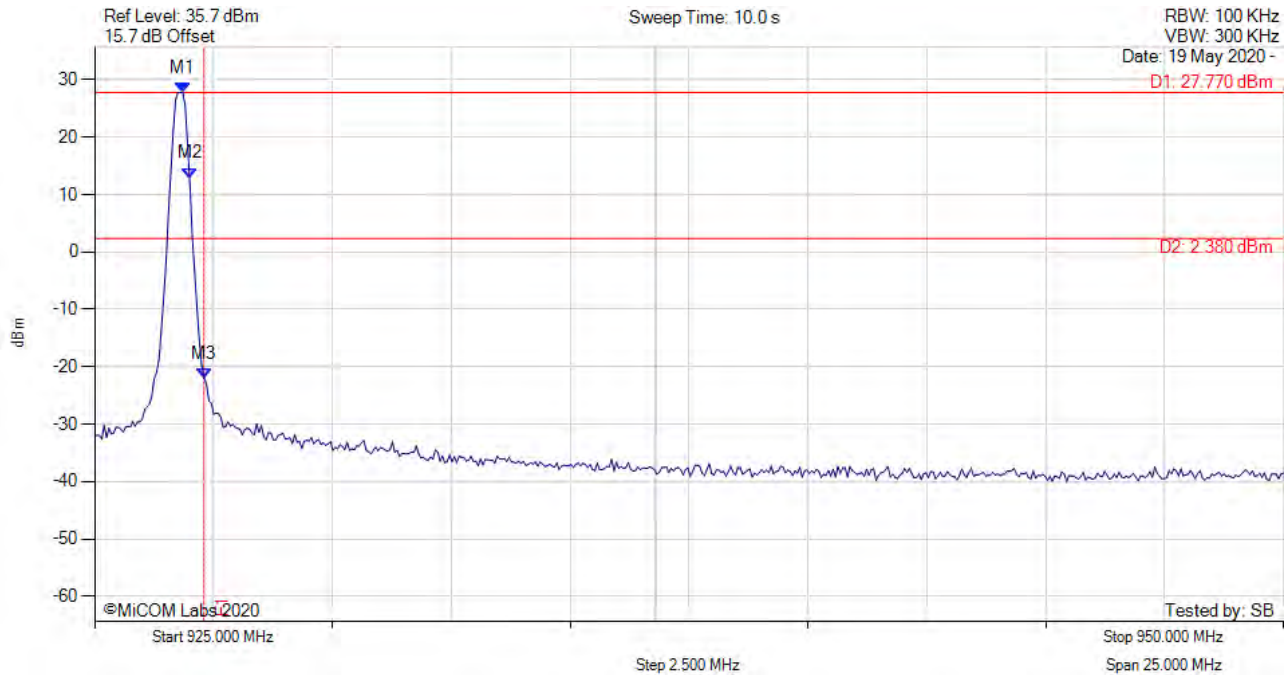

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 926.904 MHz : 25.416 dBm M2 : 927.104 MHz : 6.211 dBm M3 : 928.000 MHz : -32.420 dBm	Channel Frequency: 927.6 MHz


[back to matrix](#)



CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: FSK, Channel: 926.80 MHz, Chain a, Temp: 20

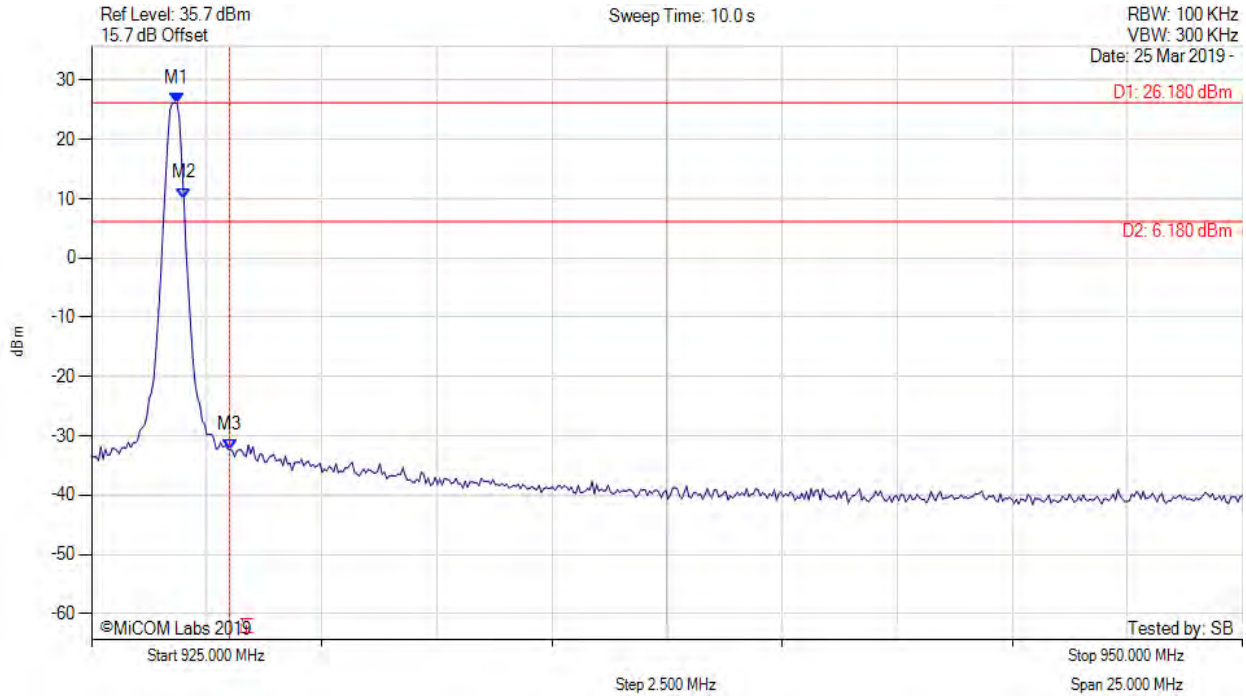

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 926.854 MHz : 26.176 dBm M2 : 927.004 MHz : 10.075 dBm M3 : 928.000 MHz : -32.329 dBm	Channel Frequency: 926.80 MHz


[back to matrix](#)



CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: OQPSK, Channel: 926.80 MHz, Chain a, Temp: 20

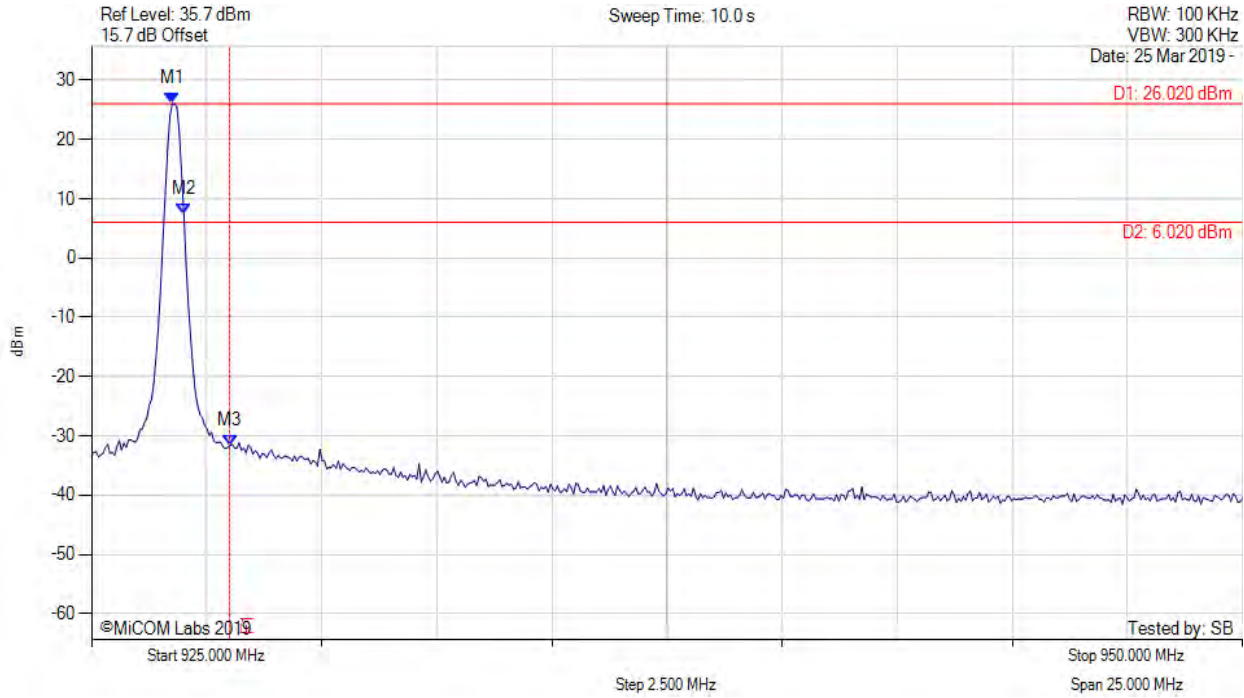

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 926.754 MHz : 26.019 dBm M2 : 927.004 MHz : 7.439 dBm M3 : 928.000 MHz : -31.637 dBm	Channel Frequency: 926.80 MHz

[back to matrix](#)


### A.3.2. Radiated Emissions

#### A.3.2.3. TX Spurious & Restricted Band Emissions



#### TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: FSK, Test Freq: 902.30 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Duty Cycle (%): 99

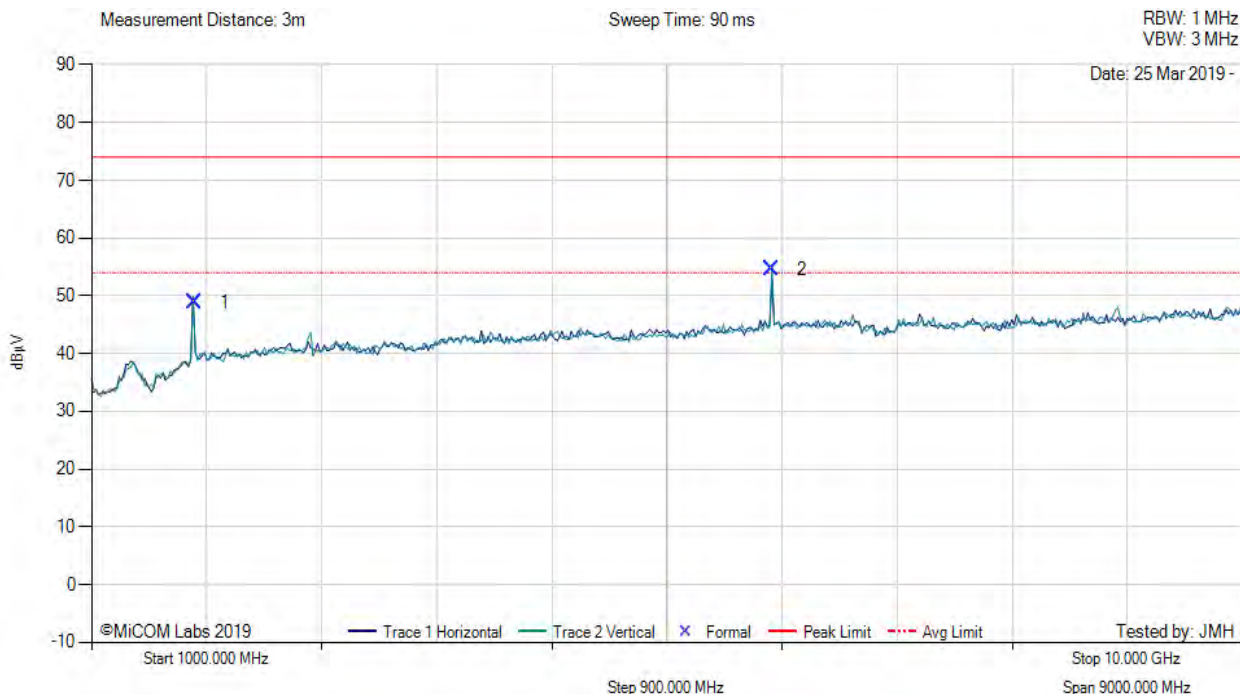

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1804.71	64.79	-1.55	-14.44	48.80	Peak (NRB)	Horizontal	200	77	--	--	Pass
2	6316.09	66.56	-2.91	-9.12	54.53	Peak (NRB)	Vertical	200	212	--	--	Pass


**Test Notes:** EUT powered by DC 24 V

[back to matrix](#)



**TX SPURIOUS & RESTRICTED BAND EMISSIONS**

Variant: FSK, Test Freq: 915.20 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Duty Cycle (%): 99

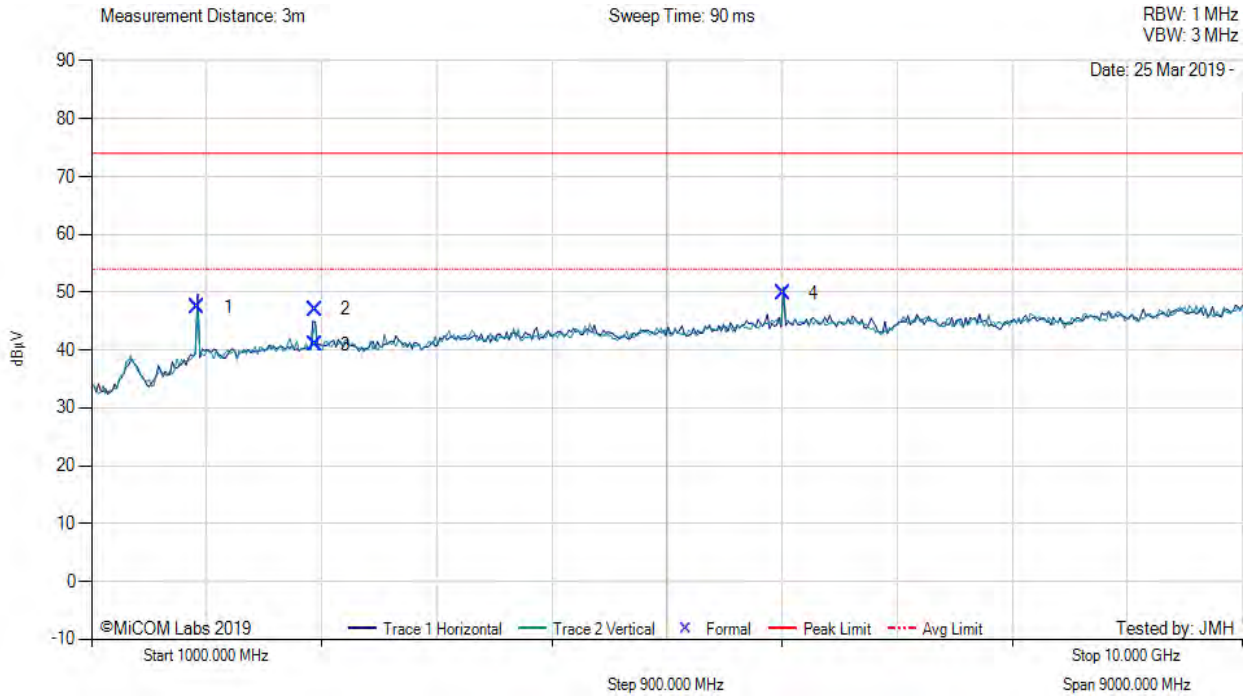

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1830.41	62.98	-1.52	-14.03	47.43	Peak (NRB)	Horizontal	200	81	--	--	Pass
2	2745.73	60.93	-1.91	-11.96	47.06	Max Peak	Horizontal	98	224	74.0	-26.9	Pass
3	2745.73	54.87	-1.91	-11.96	41.00	Max Avg	Horizontal	98	224	54.0	-13.0	Pass
4	6406.56	62.02	-2.96	-9.21	49.85	Peak (NRB)	Vertical	200	81	--	--	Pass

**Test Notes:** EUT powered by DC 24 V

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS




Variation: 100 kbps FSK, Test Freq: 927.6 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Power Setting: 30, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 90 ms

RBW: 1 MHz  
VBW: 3 MHz

Date: 18 May 2020 -

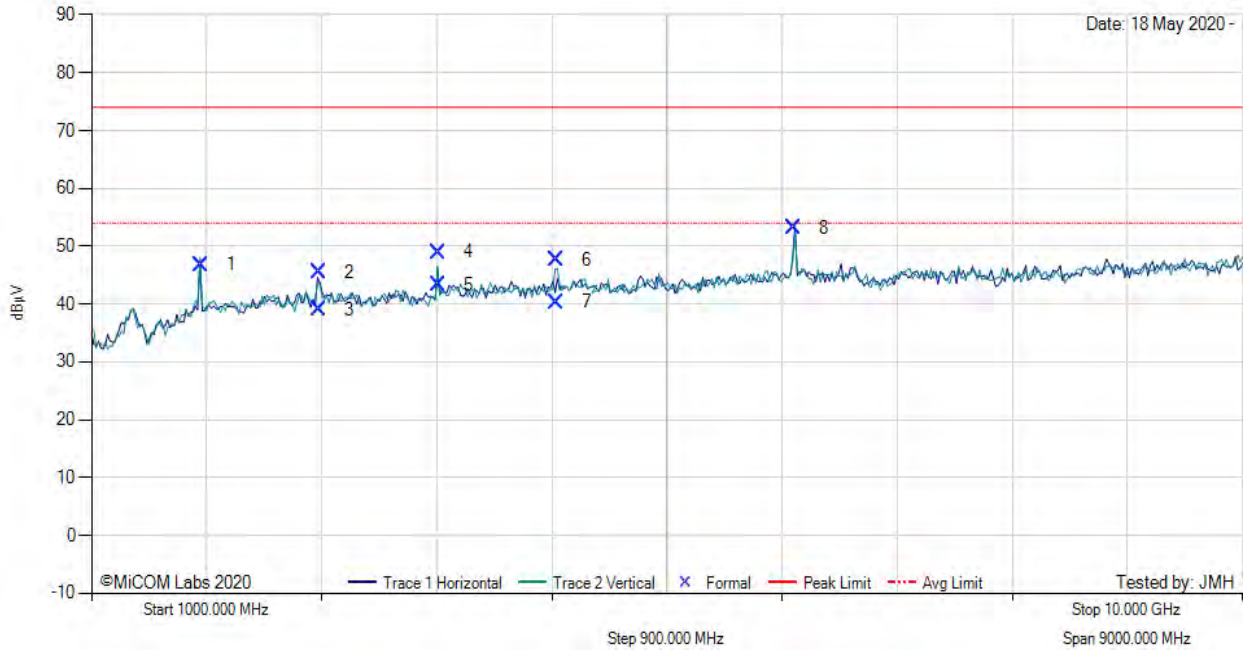

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1854.36	62.21	-1.56	-13.81	46.84	Peak (NRB)	Horizontal	200	19	--	--	Pass
2	2781.81	59.36	-1.89	-11.91	45.56	Max Peak	Horizontal	177	162	74	-28.44	Pass
3	2781.81	52.77	-1.89	-11.91	38.97	Max Avg	Horizontal	177	162	54	-15.03	Pass
4	3708.96	62.82	-2.2	-11.63	48.99	Max Peak	Vertical	134	98	74	-25.01	Pass
5	3708.96	57.17	-2.2	-11.63	43.34	Max Avg	Vertical	134	98	54	-10.66	Pass
6	4635.98	62.32	-2.49	-12.24	47.59	Max Peak	Vertical	179	155	74	-26.41	Pass
7	4635.98	55.1	-2.49	-12.24	40.37	Max Avg	Vertical	179	155	54	-13.63	Pass
8	6490.26	65.12	-2.95	-8.94	53.23	Peak (NRB)	Horizontal	200	282	--	--	Pass

**Test Notes:** EUT powered by DC 24 V

[back to matrix](#)




### A.3.3. Digital Emissions (0.03 - 1 GHz)



#### RADIATED DIGITAL EMISSIONS

Variant: FSK, Test Freq: 902.30 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Duty Cycle (%): 99

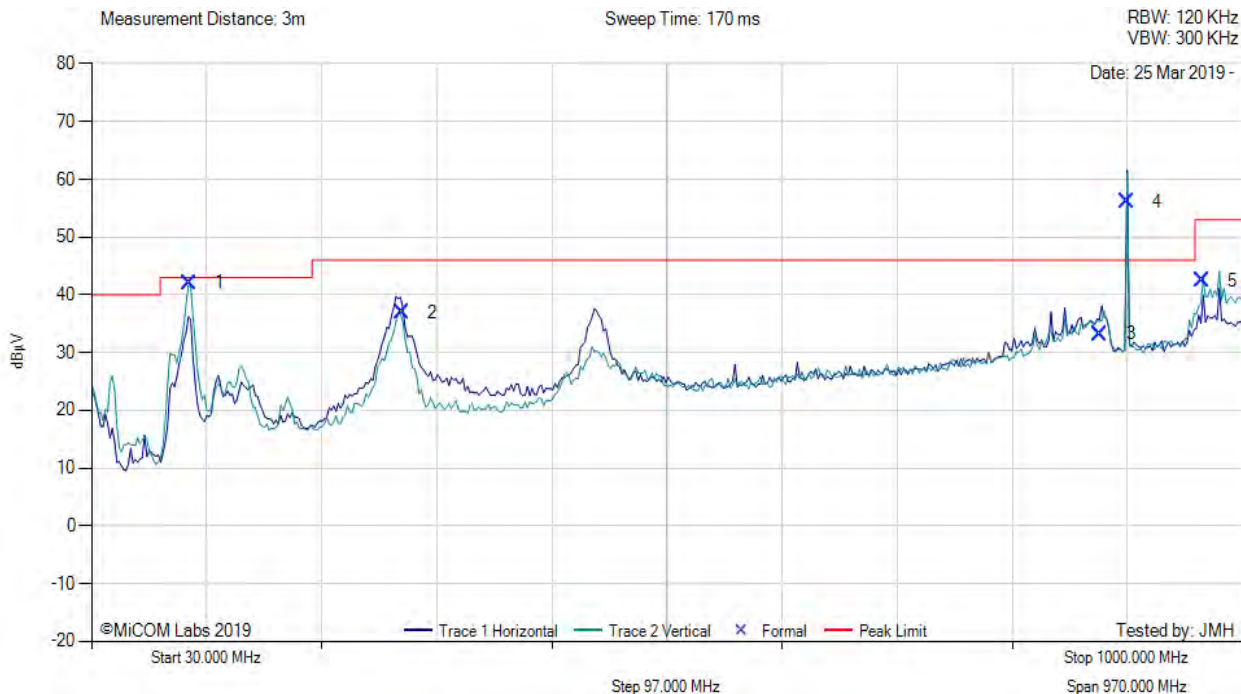

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	112.75	53.43	4.06	-15.40	42.09	MaxQP	Vertical	99	138	43.0	-0.9	Pass
2	291.54	46.84	4.80	-14.70	36.94	MaxQP	Horizontal	98	212	46.0	-9.1	Pass
3	880.25	31.79	6.59	-5.20	33.18	MaxQP	Horizontal	98	209	46.0	-12.8	Pass
4	902.29	54.55	6.65	-5.10	56.10	Fundamental	Horizontal	100	0	--	--	
5	966.30	39.65	6.84	-4.00	42.49	MaxQP	Vertical	107	343	53.0	-10.5	Pass


**Test Notes:** EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

[back to matrix](#)



**RADIATED DIGITAL EMISSIONS**

Variant: FSK, Test Freq: 915.20 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Duty Cycle (%): 99

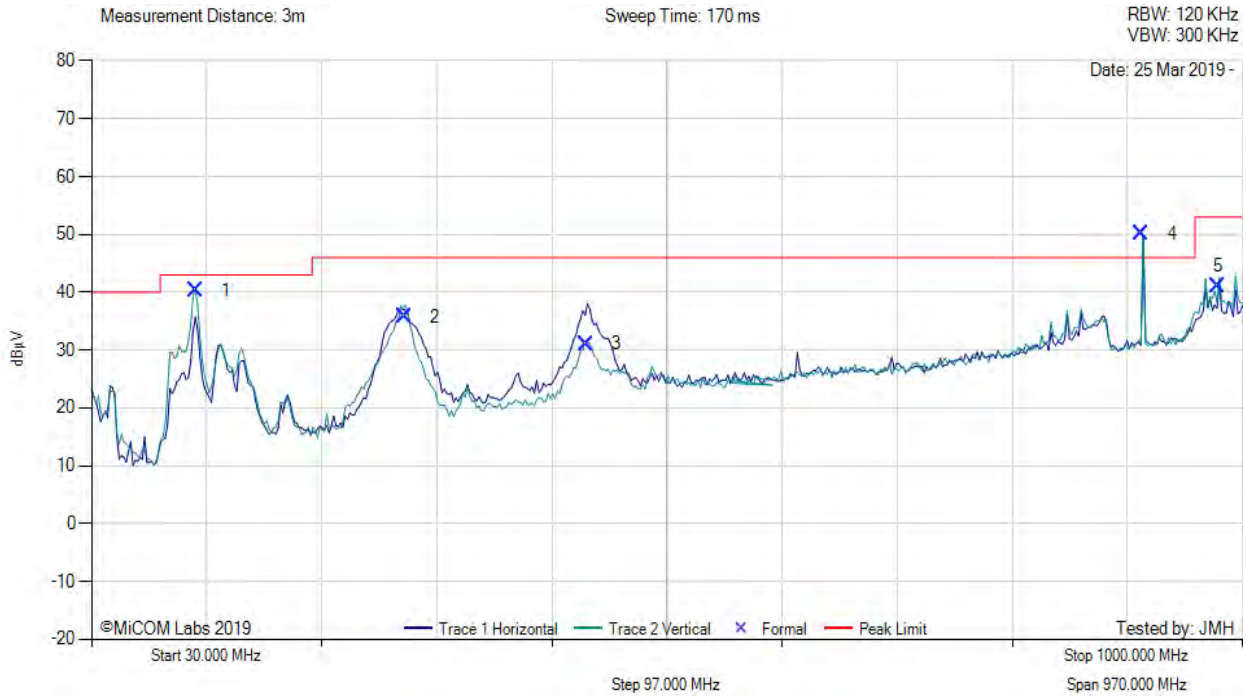

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	118.18	51.04	4.09	-14.80	40.33	MaxQP	Vertical	98	144	43.0	-2.7	Pass
2	293.50	45.57	4.81	-14.60	35.78	MaxQP	Vertical	132	173	46.0	-10.2	Pass
3	446.59	36.90	5.34	-11.20	31.04	MaxQP	Horizontal	101	176	46.0	-15.0	Pass
4	915.18	48.13	6.67	-4.70	50.10	Fundamental	Vertical	100	0	--	--	
5	979.17	38.00	6.88	-3.80	41.08	MaxQP	Vertical	105	281	53.0	-11.9	Pass

**Test Notes:** EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

[back to matrix](#)



RADIATED DIGITAL EMISSIONS




Variant: 100 kbps FSK, Test Freq: 927.6 MHz, Antenna: Tai Sheng Cheng 155-0184-00, Power Setting: 30, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz  
VBW: 300 KHz

Date: 18 May 2020 -

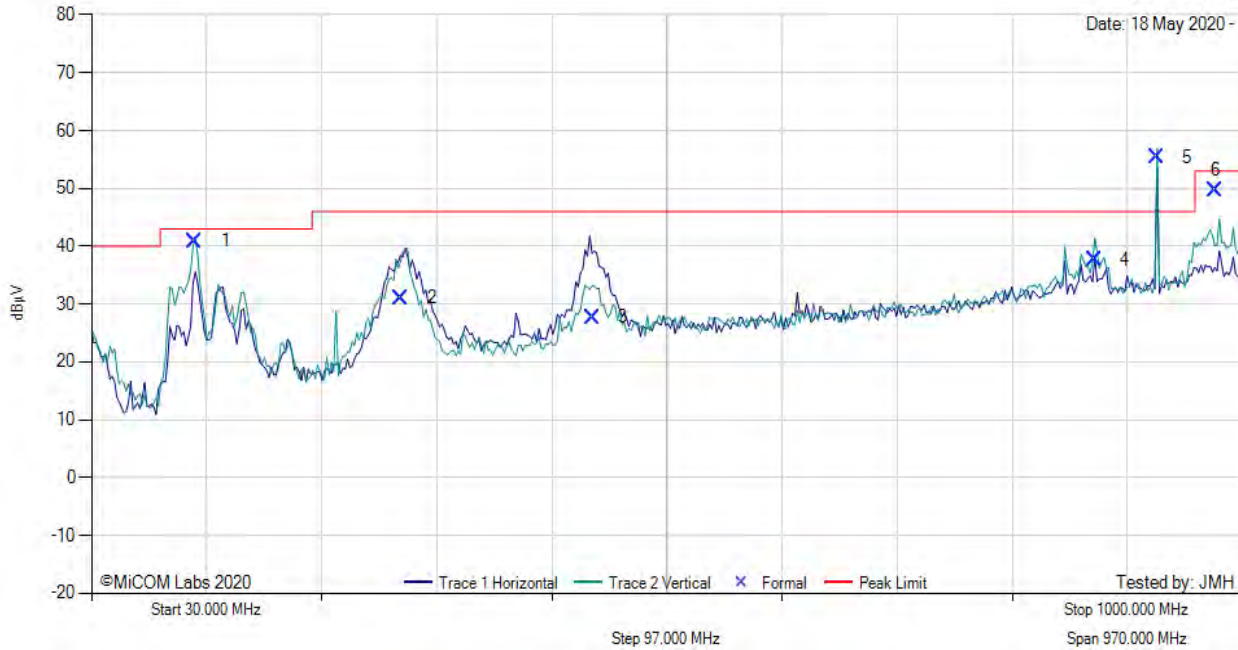

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	117.2	51.59	4.09	-14.8	40.88	MaxQP	Vertical	99	148	43	-2.12	Pass
2	291.17	41.82	4.81	-14.6	32.03	MaxQP	Vertical	98	151	46	-13.97	Pass
3	452.26	33.31	5.36	-11	27.67	MaxQP	Horizontal	194	171	46	-18.33	Pass
4	875.52	36.3	6.58	-5.2	37.68	MaxQP	Vertical	124	13	46	-8.32	Pass
5	927.94	53.3	6.72	-4.6	55.42	Fundamental	Vertical	100	0	--	--	
6	976.85	36.63	6.87	-3.9	39.6	MaxQP	Vertical	103	310	53	-13.4	Pass

**Test Notes:** EUT powered by DC 24 V. 900 MHz notch in front of amp to prevent overload

[back to matrix](#)



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)