



REGULATORY COMPLIANCE TEST REPORT

FCC 15.247 & ISED RSS-247

Report No.: ITRO15-U2 Rev A

Company: Itron Networked Solutions, Inc.

Test of: NIC 414

TEST REPORT

FROM



Test of: Itron Networked Solutions, Inc. NIC 414

To: FCC 15.247 & ISED RSS-247

Test Report Serial No.: ITRO15-U2 Rev A

This report supersedes: NONE

Applicant: Itron Networked Solutions, Inc.
230 West Tasman Drive
San Jose, California 95134
USA

Product Function: Plug in radio device, mesh network

Issue Date: 11th July 2019

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. TESTING ACCREDITATION	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s).....	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	13
5.6. Test Configurations	14
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S).....	16
7.1. Conducted RF Emission Test Setup with Environmental Chamber	16
7.2. Radiated Emissions 3M Chamber.....	18
8. MEASUREMENT AND PRESENTATION OF TEST DATA	20
9. TEST RESULTS.....	21
9.1. Conducted Output Power.....	21
9.2. Emissions	26
9.2.1. <i>Radiated Emissions</i>	26
9.2.1.1. TX Spurious & Restricted Band Emissions	29
9.2.1.2. Band Edge Emissions.....	38
9.2.2. <i>Digital Emissions (0.03 - 1 GHz)</i>	42

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	2 nd July 2019	Draft report for client review
Rev A	11 th July 2019	Initial release.

Dr

3. TEST RESULT CERTIFICATE

Manufacturer: Itron Networked Solutions, Inc. 230 West Tasman Drive San Jose California 95134, USA	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: NIC 414	Telephone: +1 925 462 0304
Type Of Equipment: Plug in radio device, mesh network	Fax: +1 925 462 0306
S/N's: MAC ID: 00:13:50:05:00:51:4A:0B	
Test Date(s): 4 th to 21 st June 2019	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 15.247 & ISSED RSS-247	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.



Approved & Released for MiCOM Labs, Inc. by:



Graeme Grieve
Quality Manager MiCOM Labs, Inc.



Gordon Hurst
President & CEO MiCOM Labs, Inc.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01 & D02	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 558074 D01 v05	29th August 2018	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC Rules.
III	A2LA	August 2018	R105 - Requirement's When Making Reference to A2LA Accreditation Status
IV	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
V	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VI	CISPR 32	2015	Electromagnetic compatibility of multimedia equipment - Emission requirements
VII	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VIII	FCC 47 CFR Part 15.247	2016	Radio Frequency Devices; Subpart C – Intentional Radiators
IX	ICES-003	Issue 6 Jan 2016; Updated April 2017	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
X	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XI	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XII	RSS-Gen Issue 5	April 2018	General Requirements for Compliance of Radio Apparatus
XIII	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.
XIV	KDB 789033 D02 V02r01	14th December, 2017	Guidelines For Compliance Testing Of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Itron Networked Solutions, Inc. NIC 414 to FCC 15.247; Radio Frequency Devices; Subpart C – Intentional Radiators: & ISSED RSS-247; Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices.
Applicant:	Itron Networked Solutions, Inc. 230 West Tasman Drive San Jose California 95134, USA
Manufacturer:	Itron Networked Solutions, Inc.
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	ITRO15-U2 Rev A
Date EUT received:	4th June 2019
Standard(s) applied:	FCC 15.247 & ISSED RSS-247
Dates of test (from - to):	4th to 21 st June 2019
No of Units Tested:	2
Product Family Name:	NIC 414
Model(s):	NIC 411-0702 & NIC 411-0703
Location for use:	Both
Declared Frequency Range(s):	902 - 928 MHz, 2400-2483.5 MHz
Type of Modulation:	DTS
EUT Modes of Operation:	902 - 928 MHz:GFSK, 2400-2483.5 MHz: DTS
Declared Nominal Output Power (dBm):	902 - 928 MHz: 30 dBm 2400-2483.5 MHz: 24 dBm
Transmit/Receive Operation:	Transceiver – Half Duplex
Rated Input Voltage and Current:	4 VDC
Operating Temperature Range:	-40 to +85°C
ITU Emission Designator:	900 MHz – 331KF1D, 2.4 GHz – 2M50G1D
Equipment Dimensions:	4.26 in (w) x 1.85 in (h) x 0.56 in (d)
Weight:	43 g
Hardware Rev:	C0.
Software Rev:	4.6.1

5.2. Scope Of Test Program

Itron Networked Solutions, Inc. NIC 414

The scope of the test program was to perform limited testing to the requirements of the FCC & ISED standards listed below comprising; -digital emissions; radiated emissions; and output power on the Itron Networked Solutions, Inc. NIC 414 in the frequency ranges 902 - 928 MHz & 2400 – 2483.5 MHz to establish that there are no changes in equipment performance as a result of a change in RF switch used in the product and to verify on going compliance.

FCC CFR 47 Part 15.247; Radio Frequency Devices; Subpart C – Intentional Radiators

Canada ISED RSS-247

Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices.

The following RF Switch information was supplied by the customer.

	Manufacturer	Type	Model
Original	CEL	SPDT RF Switch	UPG2009TB
Replacement	CEL	SPDT RF Switch	CG2409M2

5.3. Equipment Model(s) and Serial Number(s)

Equipment	Equipment Type	Manufacturer	Model	Serial Number
NIC 414	EUT	Itron Networked Solutions, Inc	NIC 414	MAC ID: 00:13:50:05:00:51:4A:0B
Laptop Computer	Support	Dell	Latitude E6410	N/A

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	INSI	N/A	f type	4	-	360	-	902 - 928
External	INSI	N/A	f type	1	-	360	-	902 - 928
integral	INSI	N/A	f type	4	-	360	-	2400 – 2483.5
External	INSI	N/A	f type	3.6	-	360	-	2400 – 2483.5

BF Gain - Beamforming Gain
 Dir BW - Directional BeamWidth
 X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

NONE

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode	Data Rate with Highest Power kbp/s	Channel Frequency (MHz)		
		Low	Mid	High
GFSK	400	902.3	914.0	926.9
HAN	200	2405	2440	2480
MESH	200	2400.8	2440	2472.8

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE


6. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
Conducted Output Power	Complies	View Data
Emissions	Complies	-
Radiated Emissions	Complies	View Data
(1) TX Spurious & Restricted Band Emissions	Complies	View Data
(2) Digital Emissions (0.03 - 1 GHz)	Complies	View Data

7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Conducted RF Emission Test Setup with Environmental Chamber

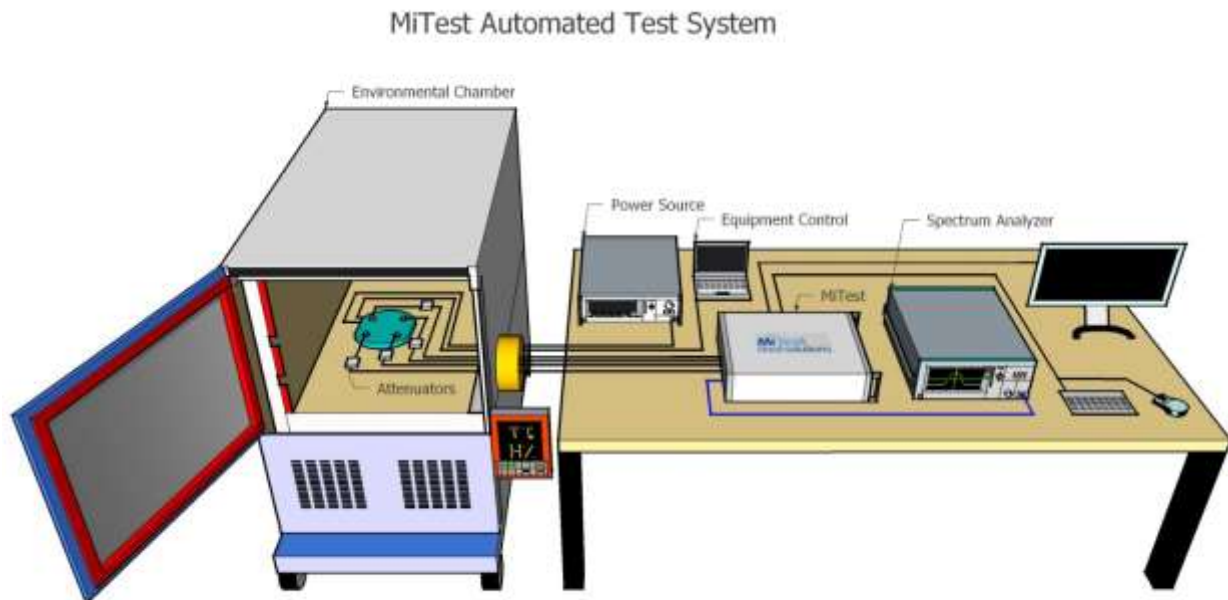

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.


Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	20 Jul 2019
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	20 Jul 2019
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	20 Jul 2019
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	20 Jul 2019
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	20 Jul 2019
249	Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	30 Oct 2019
361	Desktop for RF#1, Labview Software installed	Dell	Vostro 220	WS RF#1	Not Required
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	12 Oct 2019
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.1	Not Required

405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
436	USB Wideband Power Sensor	Boonton	55006	8731	14 Sep 2019
440	USB Wideband Power Sensor	Boonton	55006	9178	22 Sep 2019
441	USB Wideband Power Sensor	Boonton	55006	9179	20 Sep 2019
442	USB Wideband Power Sensor	Boonton	55006	9181	6 Oct 2019
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	20 Sep 2019
510	Barometer/Thermometer	Control Company	68000-49	170871375	11 Dec 2019
515	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen with DFS	515	20 Jul 2019
75	Environmental Chamber	Theratron	SE-300-2-2	27946	24 Feb 2020


7.2. Radiated Emissions 3M Chamber

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions below 1GHz. Radiated Emissions above 1GHz.

Radiated Emissions Below 1GHz Test Setup

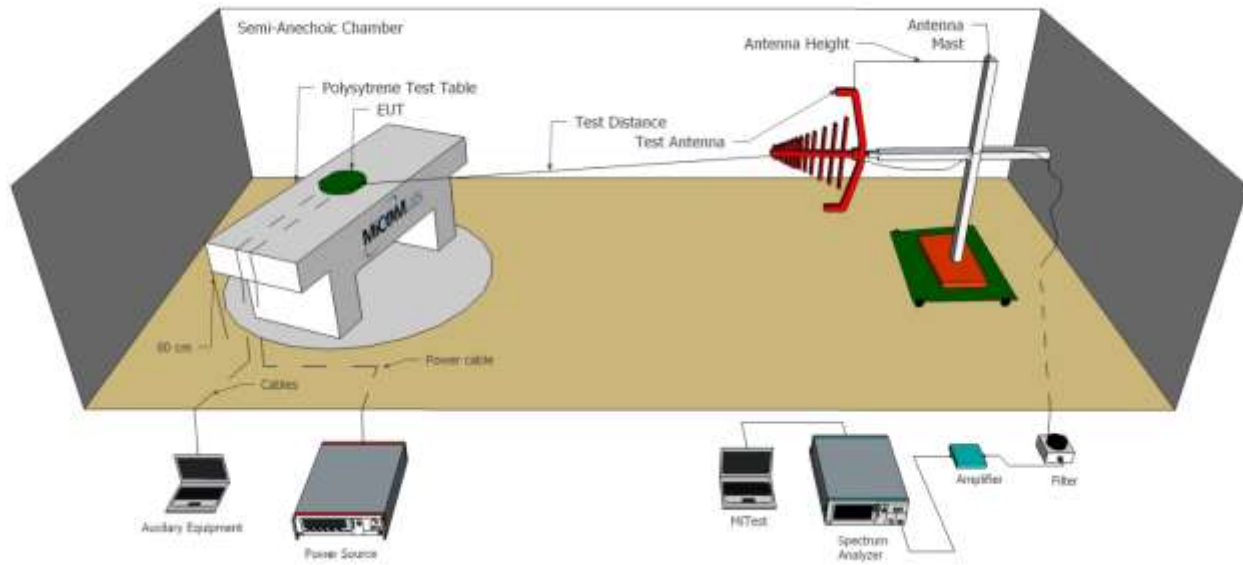

Radiated Emissions Above 1GHz Test Setup

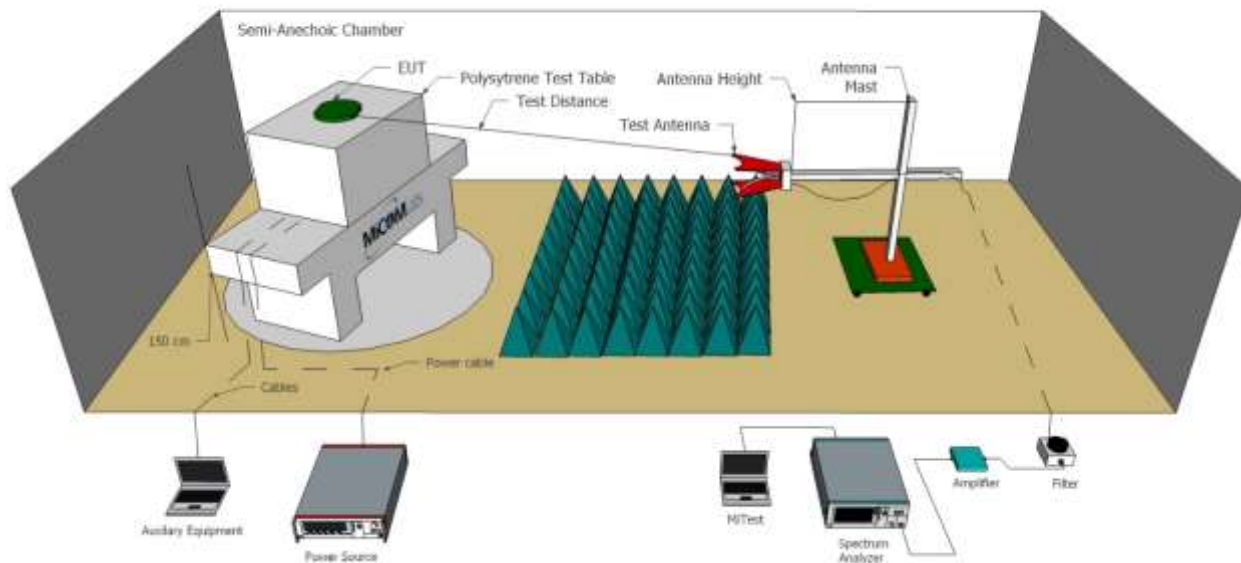

A

full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	4 Apr 2020
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	8 Oct 2019
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	8 Oct 2019
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	21 Sep 2019
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	12 Oct 2019
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	12 Sep 2019
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	12 Oct 2019
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	12 Sep 2019
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	9 Oct 2019
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	9 Oct 2019
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	9 Oct 2019
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	9 Oct 2019
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	24 Aug 2019
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	24 Aug 2019
510	Barometer/Thermometer	Control Company	68000-49	170871375	11 Dec 2019
518	Cable - Amp to Antenna	SRC Haverhill	157-3051574	518	24 Aug 2019
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
VLF-1700	Low pass filter DC-1700 MHz	Mini Circuits	VLF-1700	None	8 Oct 2019

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

9. TEST RESULTS

9.1. Conducted Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
Standard:	FCC CFR 47: 15.247 (b) & (c) IC RSS-247:5.4	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (b) & (c)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement
 In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.
 Supporting Information
 Calculated Power = A + G + Y + 10 log (1/x) dBm

A = Total Power [$10 \cdot \text{Log}_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]
 G = Antenna Gain
 Y = Beamforming Gain
 x = Duty Cycle (average power measurements only)

Limits for Fundamental Emission Output Power
 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:

(3) For systems using digital modulation in the 902-928 MHz and 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.
 (1) Fixed point-to-point operation:
 (i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
 (iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation

instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of $10 \log$ (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

Equipment Configuration for Peak Output Power

Variant:	GFSK	Duty Cycle (%):	99.0
Data Rate:	400.00 KBit/s	Antenna Gain (dBi):	4.00
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
902.3	27.10				27.10	30	-2.90	Max
914.0	26.80				26.80	30	-3.20	Max
926.9	27.13				27.13	30	-2.87	Max

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Peak Output Power

Variant:	HAN	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	4.00
Modulation:	HAN	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2405	21.90				21.90	30	-8.10	12
2440	21.83				21.83	30	-8.17	11
2480	10.51				10.51	30	-19.49	3

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Peak Output Power

Variant:	MESH	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	4.00
Modulation:	MESH	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Output Power (dBm)				Calculated Total Power Σ Port(s) dBm	Limit dBm	Margin dB	EUT Power Setting
	a	b	c	d				
2400.8	19.70				19.70	30	-10.30	11
2440.0	19.87				19.87	30	-10.13	11
2472.8	19.81				19.81	30	-10.19	11

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

9.2. Emissions

9.2.1. Radiated Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
Standard:	FCC CFR 47: Part 15.205 ISED RSS-GEN:8.9, 8.10	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Limits for Restricted Bands

Peak emission: 74 dBuV/m
Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss or Waveguide Loss

Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed

below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

9.2.1.1. TX Spurious & Restricted Band Emissions


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	Integral	Variant:	400KHz
Antenna Gain (dBi):	4.0	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	902.3	Data Rate:	100 Kbit/s
Power Setting:	Max	Tested By:	SB

Test Measurement Results



Test Freq: 902.30 MHz

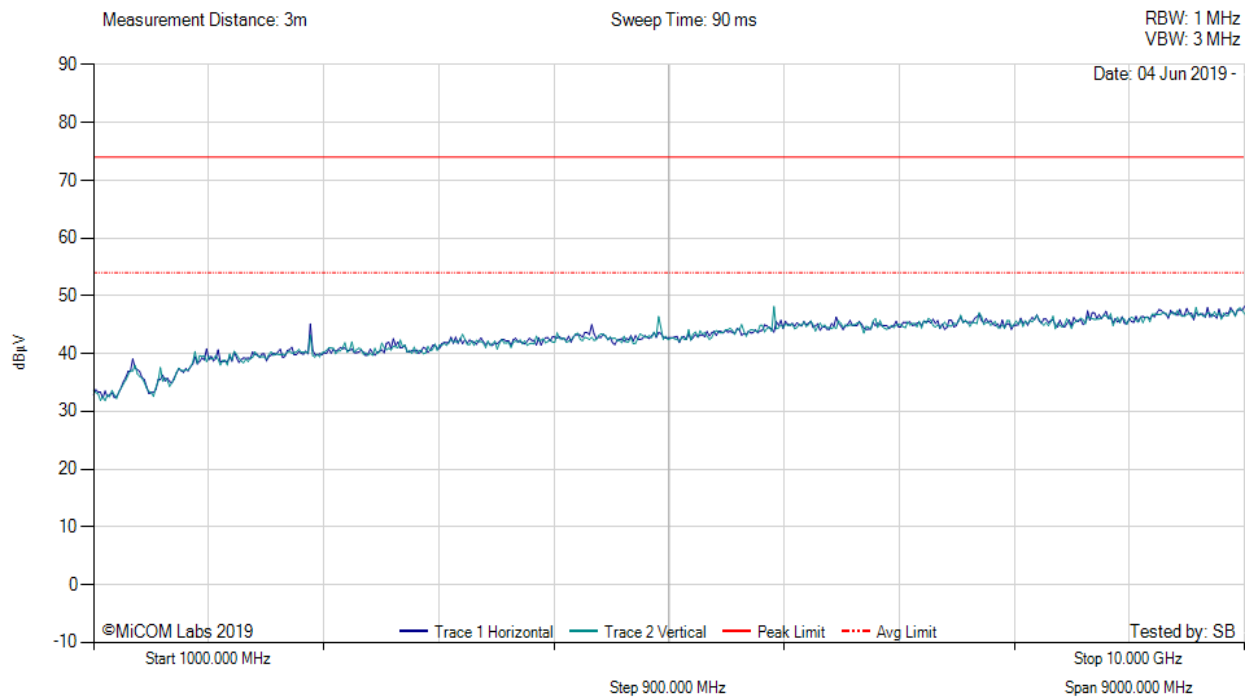

There are no emissions found within 6dB of the limit line.


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	Integral	Variant:	400KHz
Antenna Gain (dBi):	4.0	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	914.0	Data Rate:	100 Kbit/s
Power Setting:	Max	Tested By:	SB

Test Measurement Results



Test Freq: 915.20 MHz

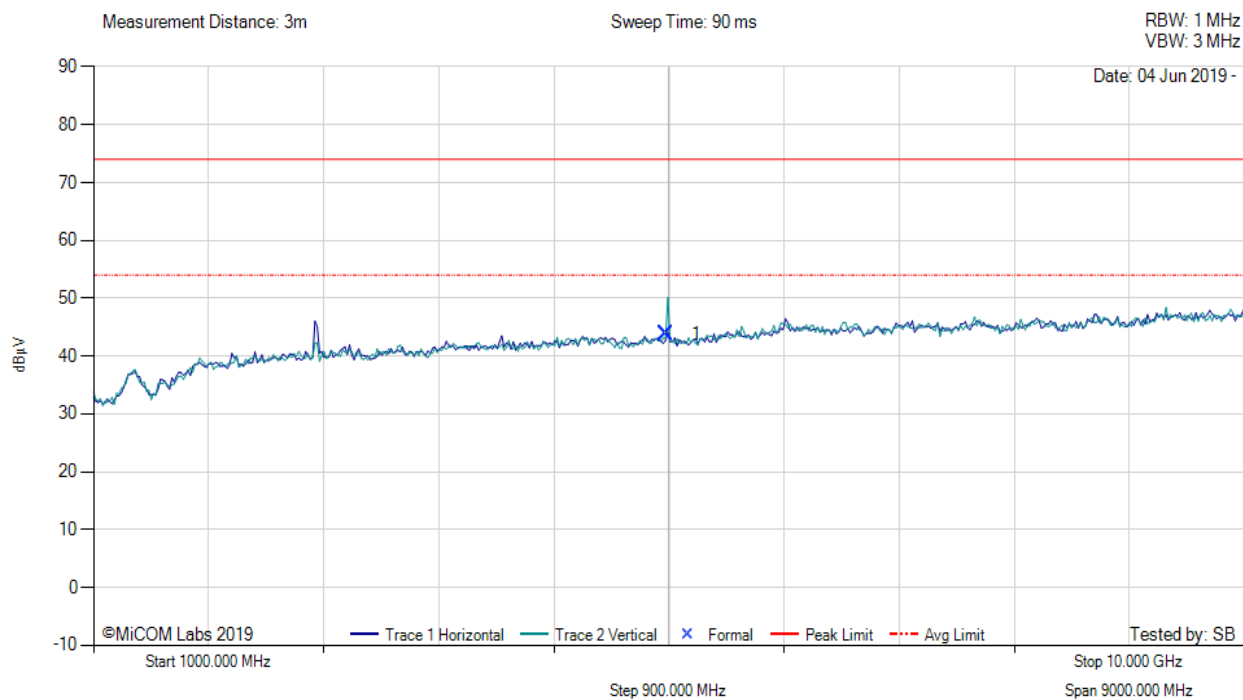

1000.00 - 10000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5478.80	58.01	-2.69	-11.56	43.76	Peak (NRB)	Vertical	200	0	--	--	Pass


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	Integral	Variant:	400KHz
Antenna Gain (dBi):	4.0	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	926.9	Data Rate:	100 Kbit/s
Power Setting:	Max	Tested By:	SB

Test Measurement Results



Test Freq: 926.9 MHz

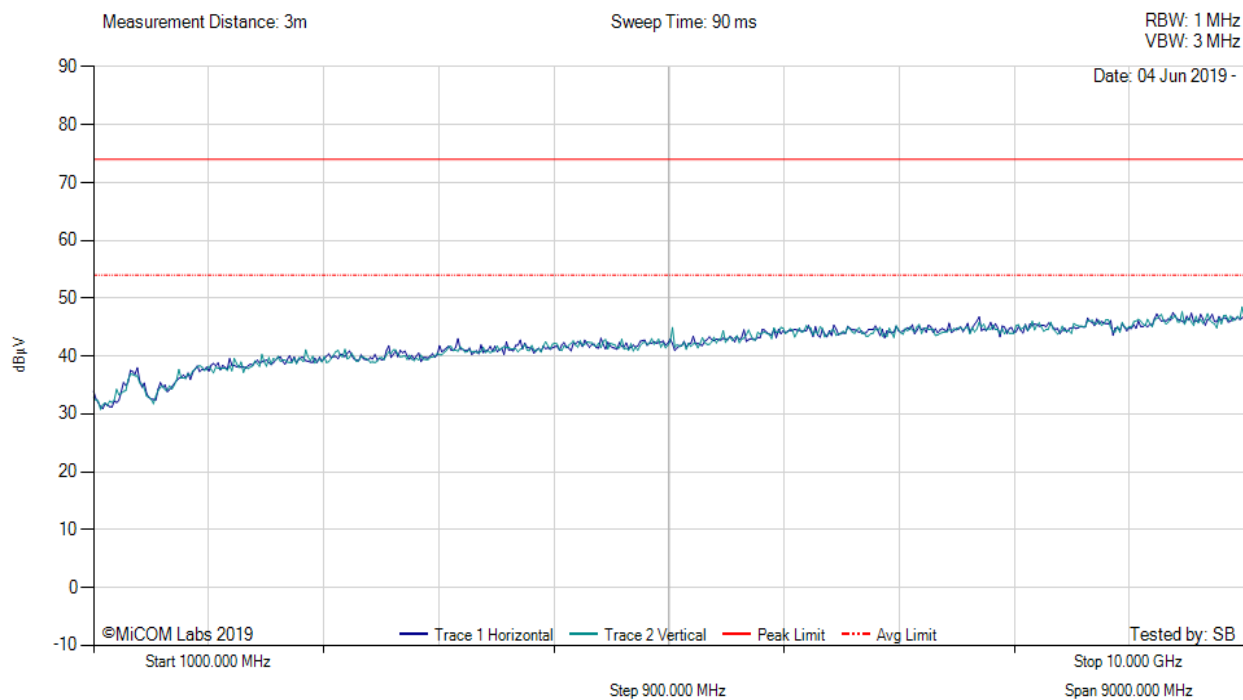

There are no emissions found within 6dB of the limit line.


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	External	Variant:	HAN
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2405.00	Data Rate:	200 Kbit/s
Power Setting:	12	Tested By:	JMH

Test Measurement Results



Variant: HAN, Test Freq: 2405.00 MHz, Power Setting: 12, Duty Cycle (%): 99

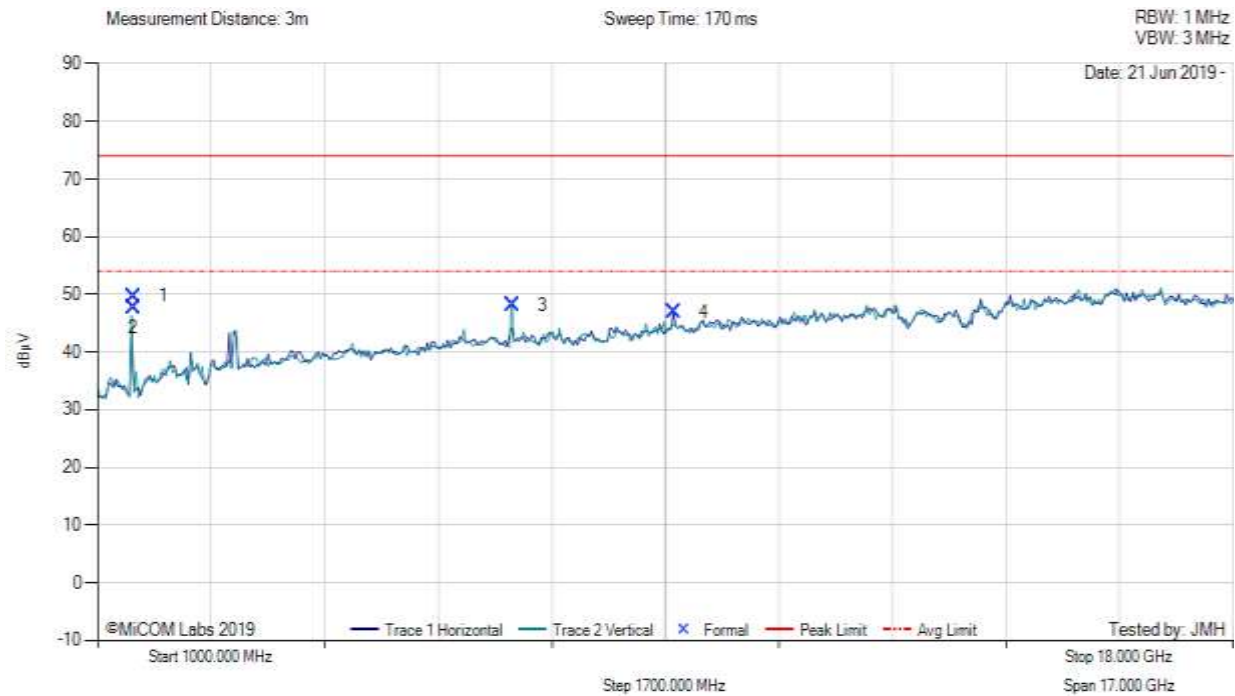

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1536.80	67.63	-1.40	-16.52	49.71	Max Peak	Vertical	98	1	74.0	-24.3	Pass
2	1536.80	65.71	-1.40	-16.52	47.79	Max Avg	Vertical	98	1	54.0	-6.2	Pass
3	7216.55	58.59	-3.02	-7.38	48.19	Peak (NRB)	Vertical	100	0	--	--	Pass
4	9621.95	57.23	-3.77	-6.49	46.97	Peak (NRB)	Horizontal	100	233	--	--	Pass

Test Notes: Powered by 4V AC/DC PS. 2.4G notch in front of amp to prevent overload


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	External	Variant:	HAN
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440.00	Data Rate:	200 Kbit/s
Power Setting:	11	Tested By:	JMH

Test Measurement Results



Variant: HAN, Test Freq: 2440.00 MHz, Power Setting: 11, Duty Cycle (%): 99

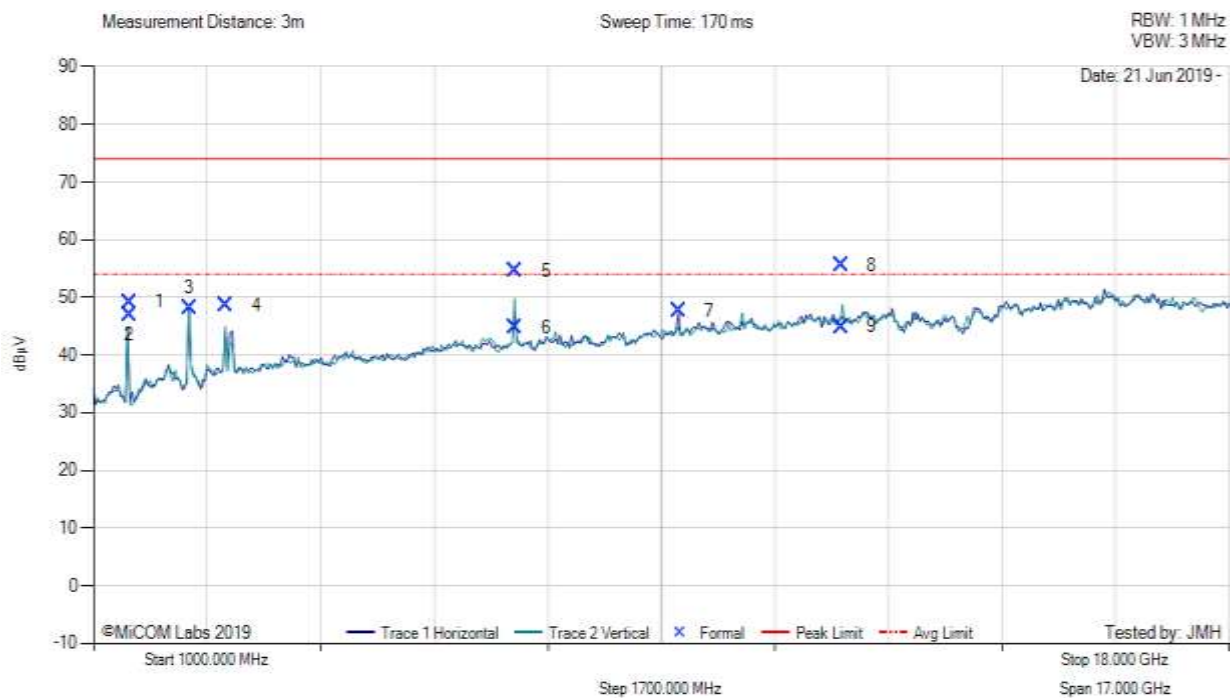

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1536.87	67.11	-1.40	-16.52	49.19	Max Peak	Vertical	154	358	74.0	-24.8	Pass
2	1536.87	64.97	-1.40	-16.52	47.05	Max Avg	Vertical	154	358	54.0	-7.0	Pass
3	2439.62	61.96	-1.79	-12.08	48.09	Fundamental	Horizontal	100	0	--	--	
4	2990.00	62.00	-1.99	-11.35	48.66	Peak (NRB)	Vertical	100	179	--	--	Pass
5	7318.50	65.50	-3.00	-7.86	54.64	Max Peak	Vertical	138	356	74.0	-19.4	Pass
6	7318.50	55.71	-3.00	-7.86	44.85	Max Avg	Vertical	138	356	54.0	-9.2	Pass
7	9762.11	57.18	-3.68	-5.91	47.59	Peak (NRB)	Horizontal	100	210	--	--	Pass
8	12197.58	64.55	-4.31	-4.73	55.51	Max Peak	Vertical	112	8	74.0	-18.5	Pass
9	12197.58	53.93	-4.31	-4.73	44.89	Max Avg	Vertical	112	8	54.0	-9.1	Pass

Test Notes: Powered by 4V AC/DC PS. 2.4G notch in front of amp to prevent overload


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	External	Variant:	HAN
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480.00	Data Rate:	200 Kbit/s
Power Setting:	3	Tested By:	JMH

Test Measurement Results



Variant: HAN, Test Freq: 2480.00 MHz, Power Setting: 3, Duty Cycle (%): 99

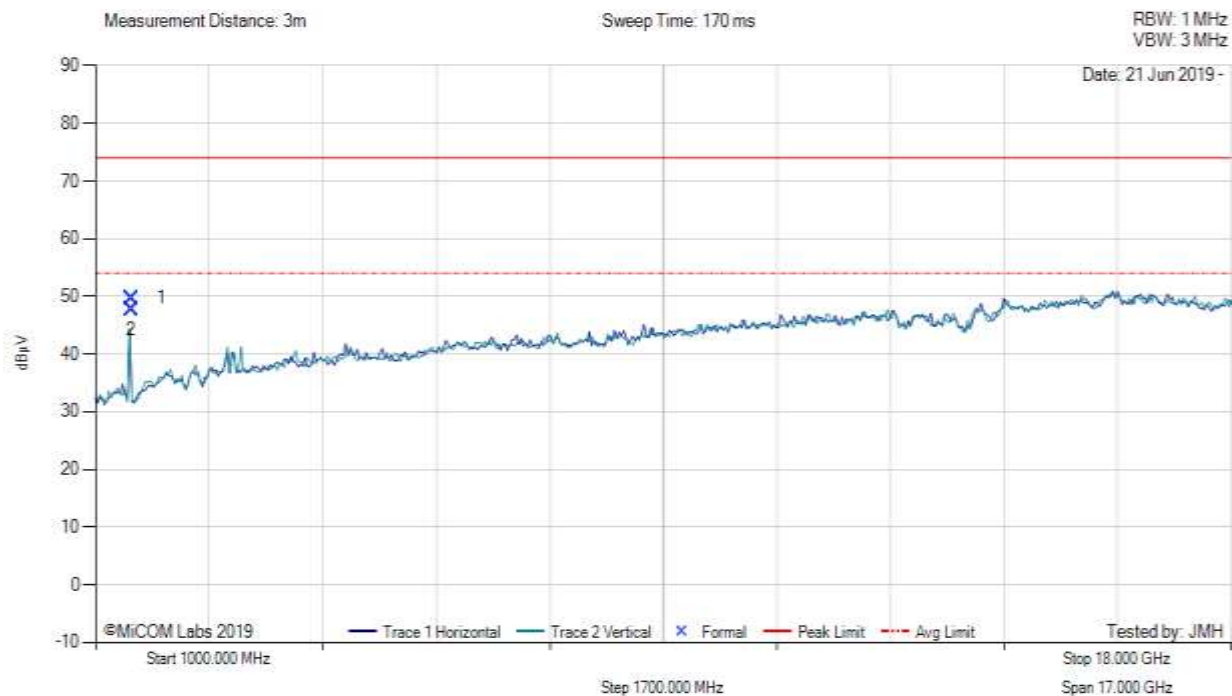

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1536.96	67.63	-1.40	-16.52	49.71	Max Peak	Vertical	109	306	74.0	-24.3	Pass
2	1536.96	65.68	-1.40	-16.52	47.76	Max Avg	Vertical	109	306	54.0	-6.2	Pass

Test Notes: Powered by 4V AC/DC PS. 2.4G notch in front of amp to prevent overload


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	External	Variant:	Mesh
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2400.80	Data Rate:	200 Kbit/s
Power Setting:	11	Tested By:	JMH

Test Measurement Results



Variant: Mesh, Test Freq: 2400.80 MHz, Power Setting: 11, Duty Cycle (%): 99

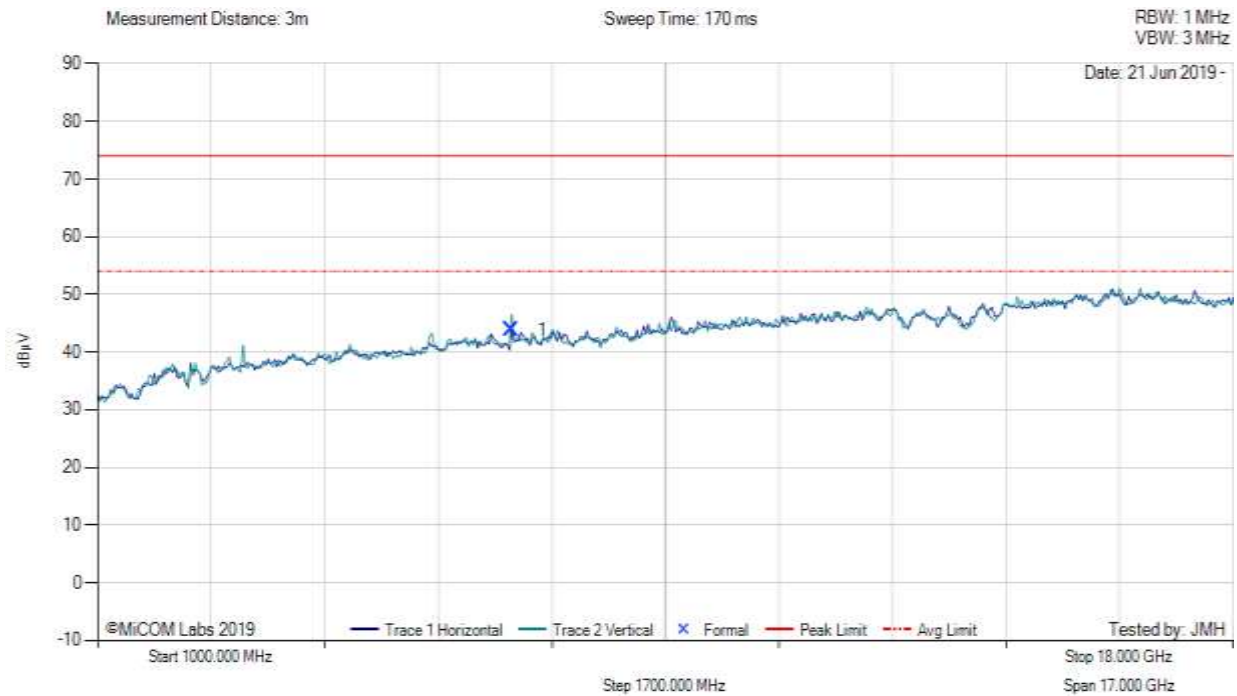

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	7202.33	54.16	-3.00	-7.38	43.78	Peak (NRB)	Vertical	100	211	--	--	Pass

Test Notes: Powered by 12V DC. 2.4G Notch in front of amp to prevent overload


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	External	Variant:	Mesh
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440.00	Data Rate:	200 Kbit/s
Power Setting:	11	Tested By:	JMH

Test Measurement Results



Variant: Mesh, Test Freq: 2440.00 MHz, Power Setting: 11, Duty Cycle (%): 99

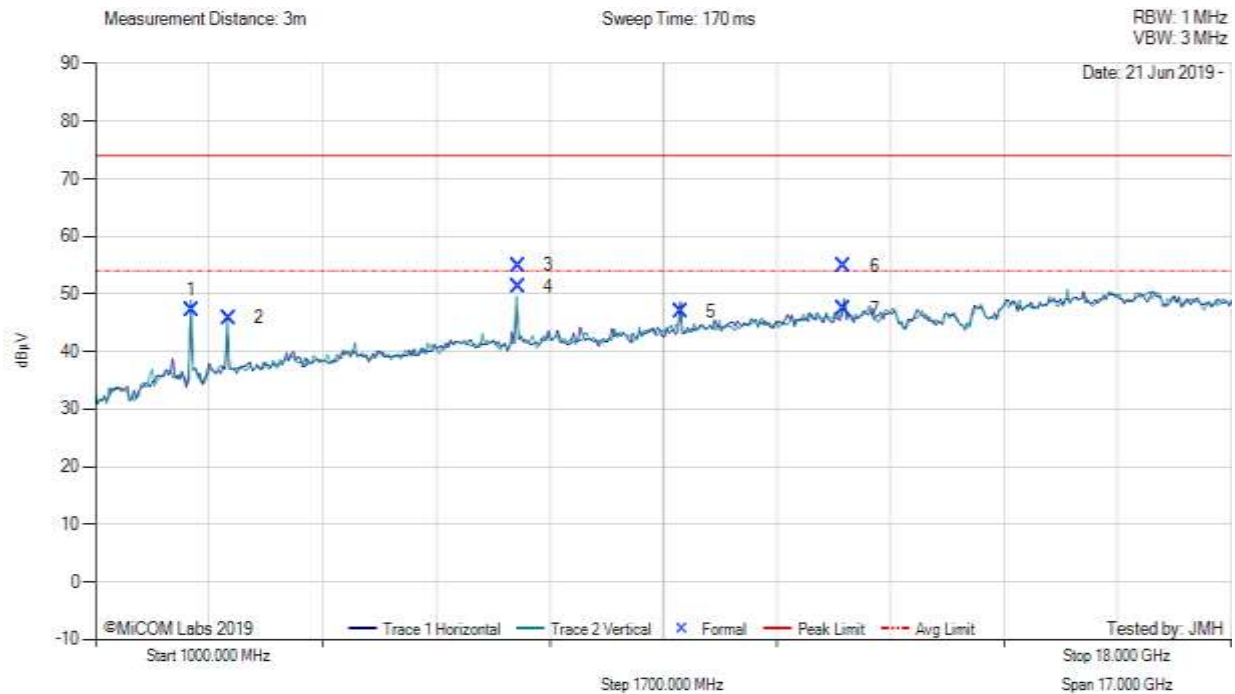

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2440.77	60.99	-1.79	-12.06	47.14	Fundamental	Vertical	100	0	--	--	--
2	2999.92	59.24	-1.98	-11.43	45.83	Peak (NRB)	Vertical	100	0	--	--	Pass
3	7322.37	65.79	-3.00	-7.87	54.92	Max Peak	Vertical	170	331	74.0	-19.1	Pass
4	7322.37	62.05	-3.00	-7.87	51.18	Max Avg	Vertical	170	331	54.0	-2.8	Pass
5	9763.02	56.50	-3.69	-5.90	46.91	Peak (NRB)	Horizontal	100	143	--	--	Pass
6	12203.78	63.94	-4.29	-4.75	54.90	Max Peak	Vertical	113	332	74.0	-19.1	Pass
7	12203.78	56.46	-4.29	-4.75	47.42	Max Avg	Vertical	113	332	54.0	-6.6	Pass

Test Notes: Powered by 12V DC. 2.4G Notch in front of amp to prevent overload


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	External	Variant:	Mesh
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2472.80	Data Rate:	200 Kbit/s
Power Setting:	11	Tested By:	JMH

Test Measurement Results



Variant: Mesh, Test Freq: 2472.80 MHz, Power Setting: 11, Duty Cycle (%): 99

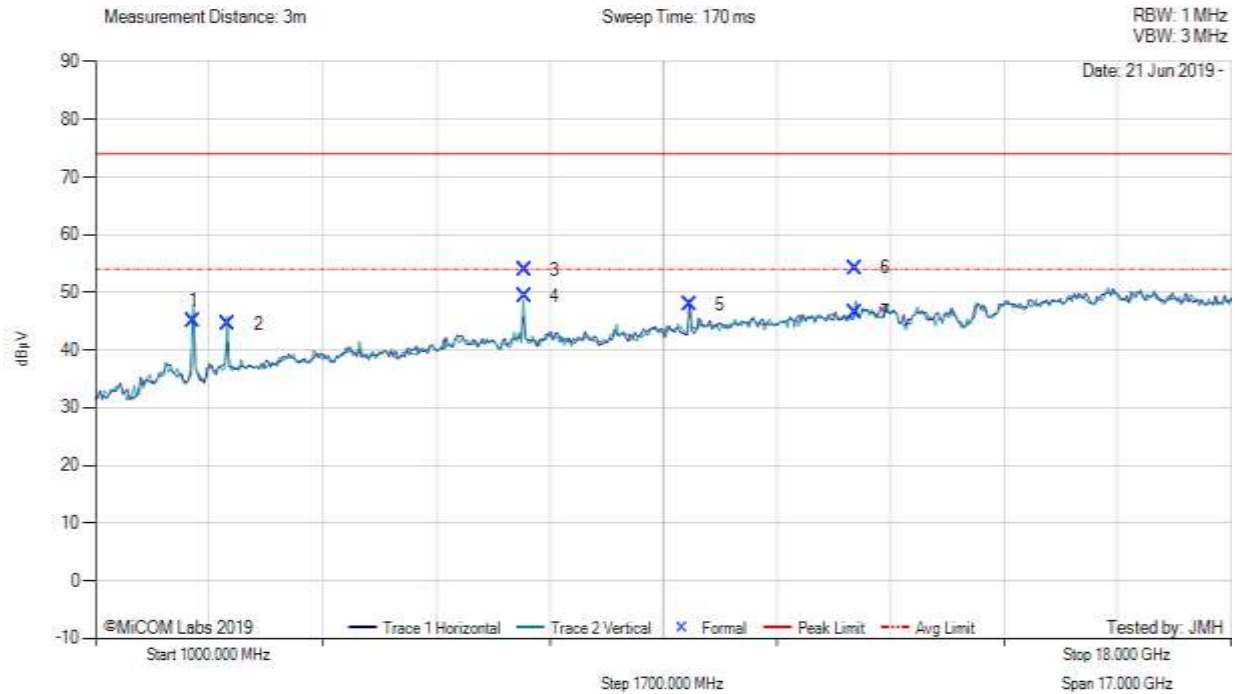

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2472.81	58.74	-1.77	-11.92	45.05	Fundamental	Horizontal	100	0	--	--	--
2	2990.44	57.92	-1.99	-11.35	44.58	Peak (NRB)	Vertical	100	0	--	--	Pass
3	7418.36	64.90	-3.07	-8.00	53.83	Max Peak	Vertical	138	336	74.0	-20.2	Pass
4	7418.36	60.42	-3.07	-8.00	49.35	Max Avg	Vertical	138	336	54.0	-4.7	Pass
5	9891.11	58.24	-3.65	-6.76	47.83	Peak (NRB)	Horizontal	100	182	--	--	Pass
6	12363.96	63.15	-4.04	-4.83	54.28	Max Peak	Vertical	101	217	74.0	-19.7	Pass
7	12363.96	55.42	-4.04	-4.83	46.55	Max Avg	Vertical	101	217	54.0	-7.5	Pass

Test Notes: Powered by AC/DC PS. 2.4G Notch in front of amp to prevent overloads

9.2.1.2. Band Edge Emissions


Equipment Configuration for 2390 MHz Radiated Band-Edge Emissions

Antenna:	External	Variant:	HAN
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2405.00	Data Rate:	200 Kbit/s
Power Setting:	12	Tested By:	JMH

Test Measurement Results



Variant: HAN, Test Freq: 2405.00 MHz, Power Setting: 12, Duty Cycle (%): 99

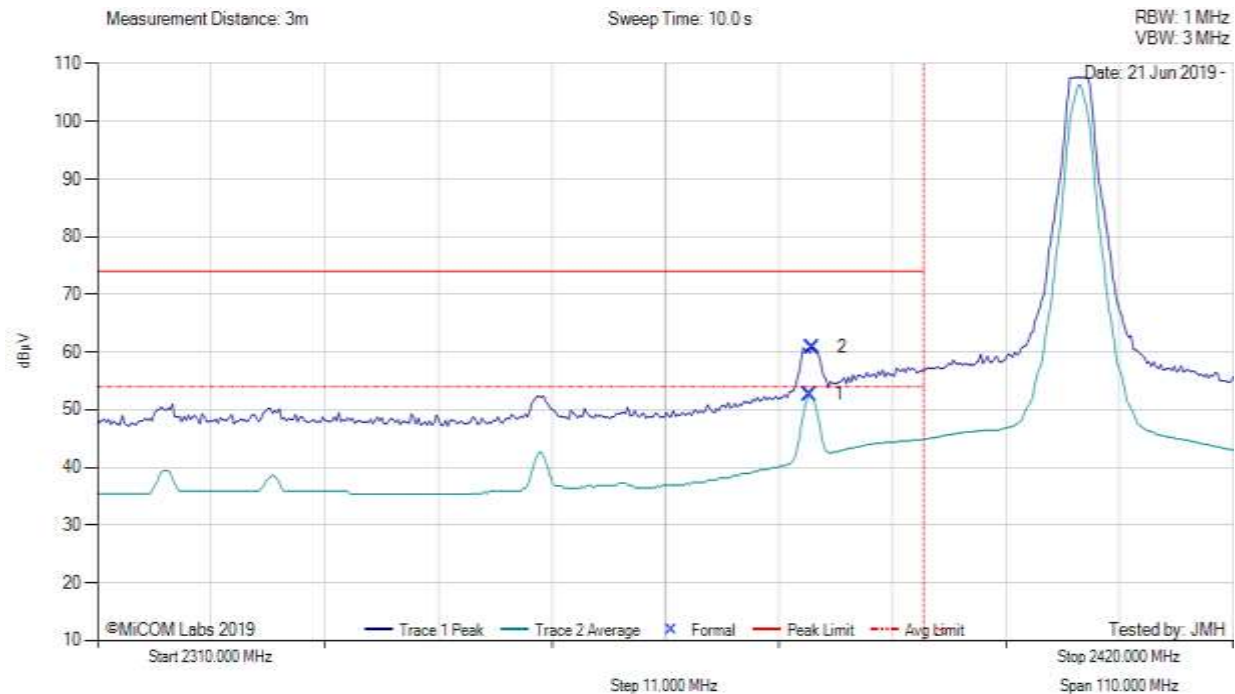

2310.00 - 2420.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2379.00	22.50	-1.75	31.90	52.65	Max Avg	Vertical	132	211	54.0	-1.4	Pass
2	2379.22	30.69	-1.75	31.90	60.84	Max Peak	Vertical	132	211	74.0	-13.2	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Powered by 4V AC/DC PS.


Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions

Antenna:	External	Variant:	HAN
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480.00	Data Rate:	200 Kbit/s
Power Setting:	3	Tested By:	JMH

Test Measurement Results



Variant: HAN, Test Freq: 2480.00 MHz, Power Setting: 3, Duty Cycle (%): 99

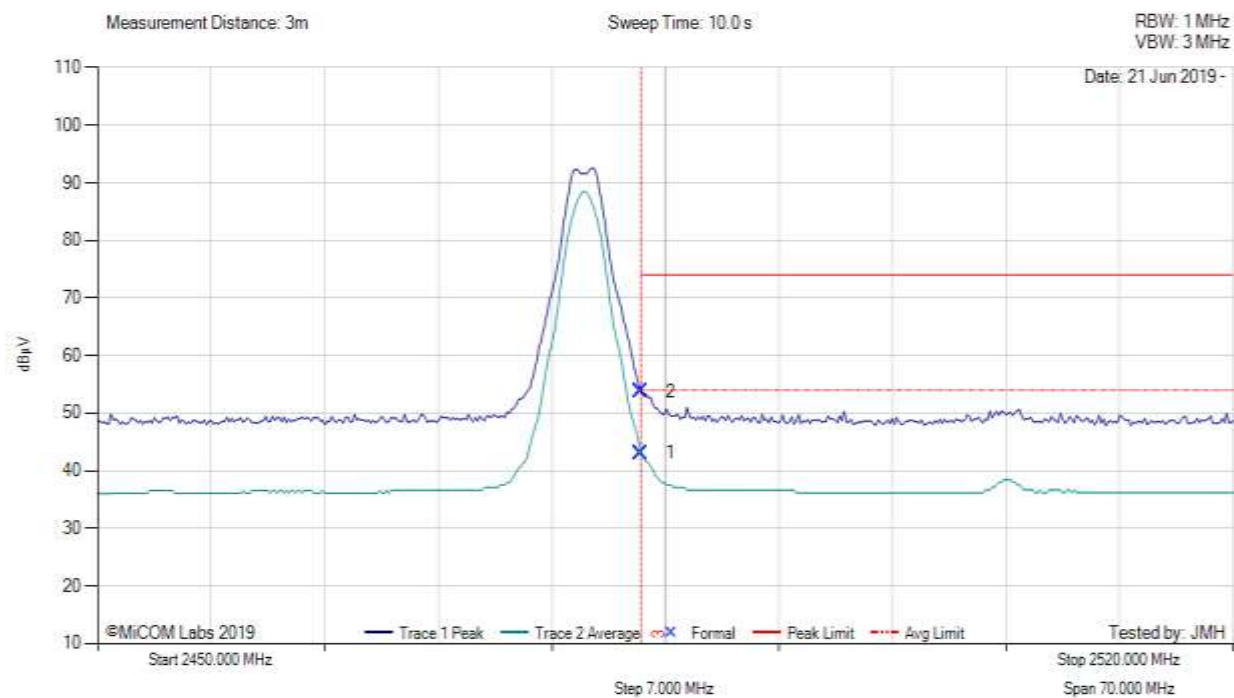

2450.00 - 2520.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2483.50	12.58	-1.78	32.33	43.13	Max Avg	Vertical	111	343	54.0	-10.9	Pass
2	2483.50	23.27	-1.78	32.33	53.82	Max Peak	Vertical	111	343	74.0	-20.2	Pass
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Powered by 4V AC/DC PS.


Equipment Configuration for 2390 MHz Radiated Band-Edge Emissions

Antenna:	External	Variant:	Mesh
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2400.80	Data Rate:	200 Kbit/s
Power Setting:	11	Tested By:	JMH

Test Measurement Results



Variant: Mesh, Test Freq: 2400.80 MHz, Power Setting: 11, Duty Cycle (%): 99

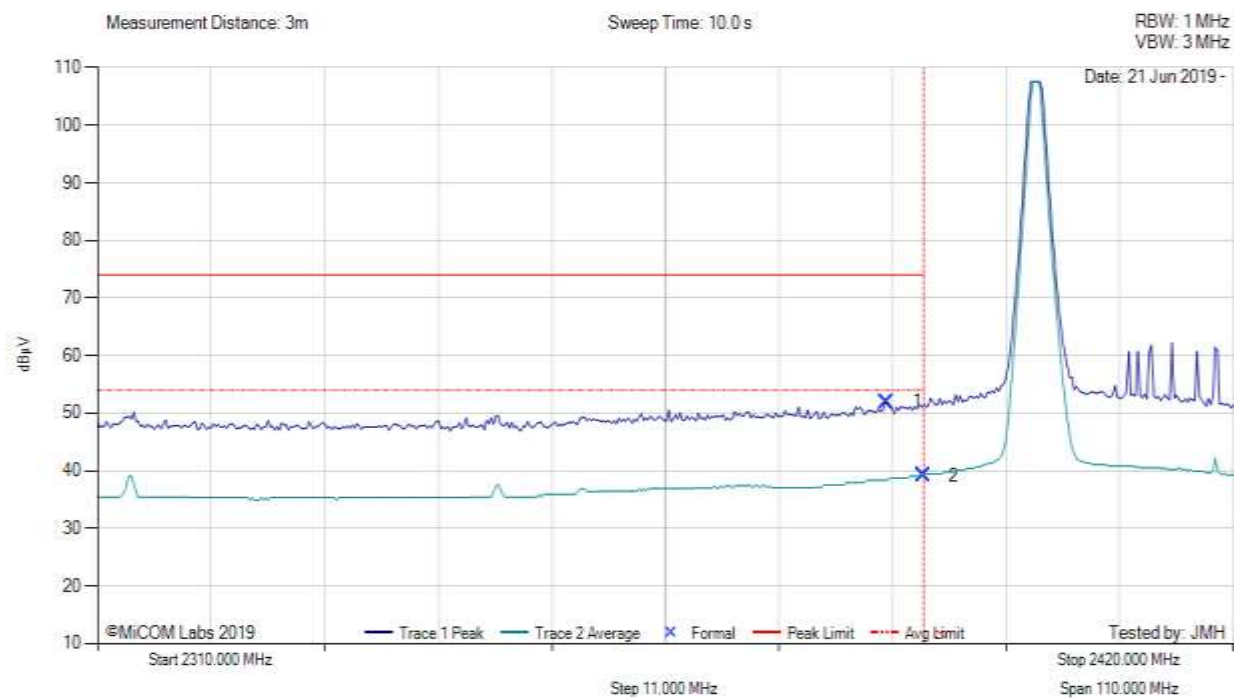

2310.00 - 2420.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2386.47	21.79	-1.77	31.94	51.96	Max Peak	Vertical	167	242	74.0	-22.0	Pass
2	2390.00	8.93	-1.77	31.96	39.12	Max Avg	Vertical	167	242	54.0	-14.9	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Powered by AC/DC PS.


Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions

Antenna:	External	Variant:	Mesh
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2472.80	Data Rate:	200 Kbit/s
Power Setting:	11	Tested By:	JMH

Test Measurement Results



Variant: Mesh, Test Freq: 2472.80 MHz, Power Setting: 11, Duty Cycle (%): 99

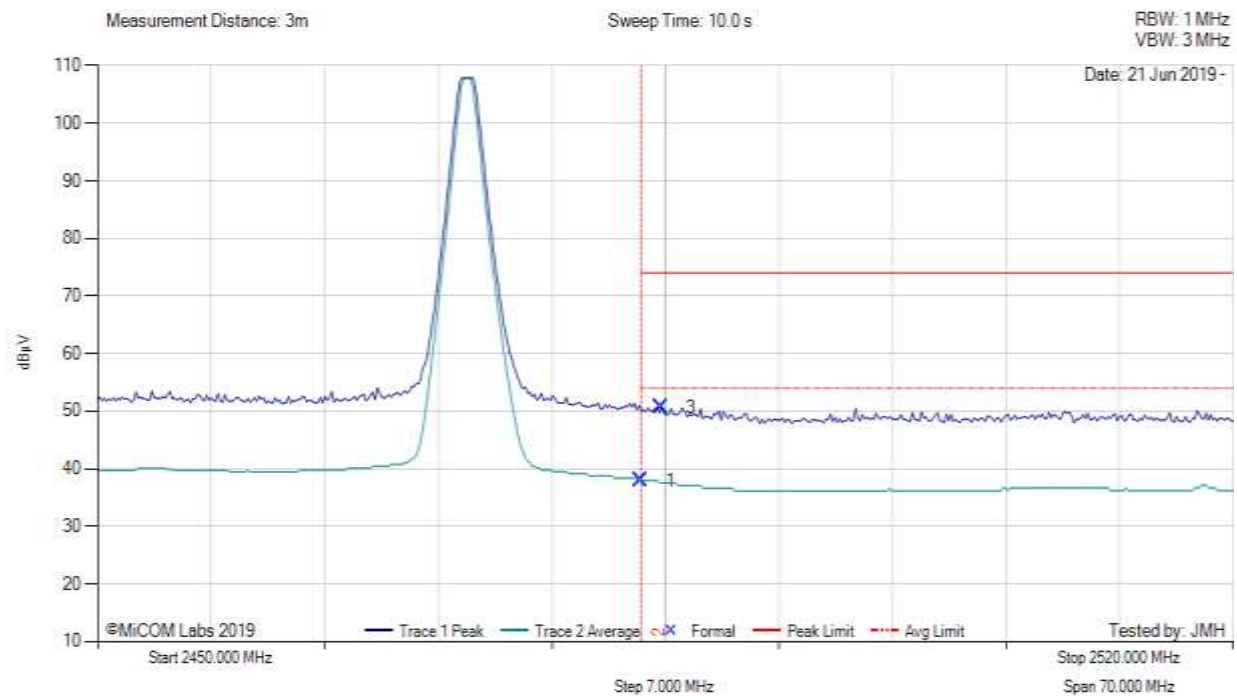

2450.00 - 2520.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2483.50	7.43	-1.78	32.33	37.98	Max Avg	Horizontal	187	221	54.0	-16.0	Pass
3	2484.76	20.08	-1.78	32.33	50.63	Max Peak	Horizontal	187	221	74.0	-23.4	Pass
2	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Powered by AC/DC PS.

9.2.2. Digital Emissions (0.03 - 1 GHz)

Radiated Test Conditions for Radiated Digital Emissions (0.03 – 1 GHz)			
Standard:	FCC CFR 47:15.209, ICES-003: 6.2 RSS-GEN: 7	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Digital Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Digital Emissions (0.03 – 1 GHz)

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dBmV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are done as:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100\text{mV/m}$$

$$48 \text{ dBmV/m} = 250\text{mV/m}$$

Limits for Radiated Digital Emissions (0.03 – 1 GHz)

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength		Measurement Distance (m)
	$\mu\text{V/m}$ (microvolts/meter)	$\text{dB}\mu\text{V/m}$ (dB microvolts/meter)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F(kHz)	--	30
1.705-30.0	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46.0	3
Above 960	500	54.0	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241. (b) In the emission table above, the tighter limit applies at the band edges. (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. (e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part. (f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device. (g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

Equipment Configuration for Radiated Digital Emissions

Antenna:	Not Applicable	Variant:	400KHz
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	915.20	Data Rate:	100 Kbit/s
Power Setting:	Max	Tested By:	SB

Test Measurement Results




Test Freq: 915.20 MHz

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz
VBW: 300 KHz

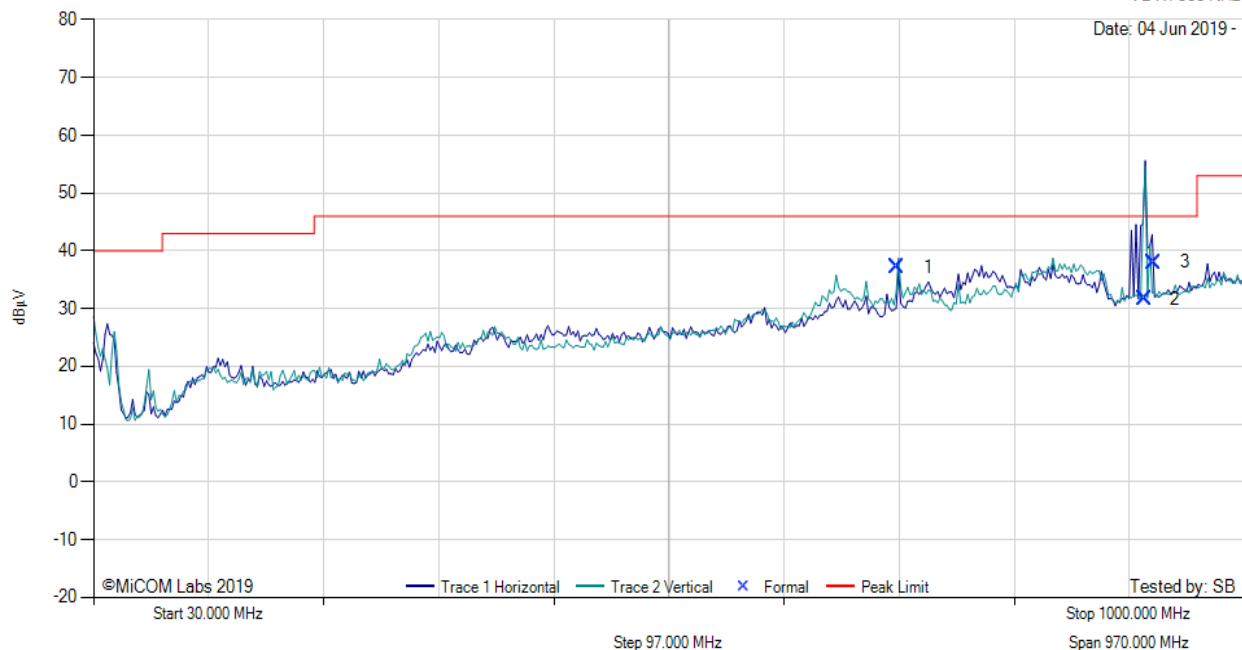

30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	707.48	38.01	6.14	-7.00	37.15	Peak (NRB)	Vertical	201	62	--	--	Pass
2	915.88	29.73	6.68	-4.80	31.61	Fundamental	Vertical	201	62	--	--	
3	915.88	36.10	6.71	-4.80	38.01	Fundamental	Vertical	201	62	--	--	


Equipment Configuration for Radiated Digital Emissions

Antenna:	Not Applicable	Variant:	Mesh
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2400.80	Data Rate:	200 Kbit/s
Power Setting:	11	Tested By:	JMH

Test Measurement Results



Variant: Mesh, Test Freq: 2400.80 MHz, Power Setting: 11, Duty Cycle (%): 99

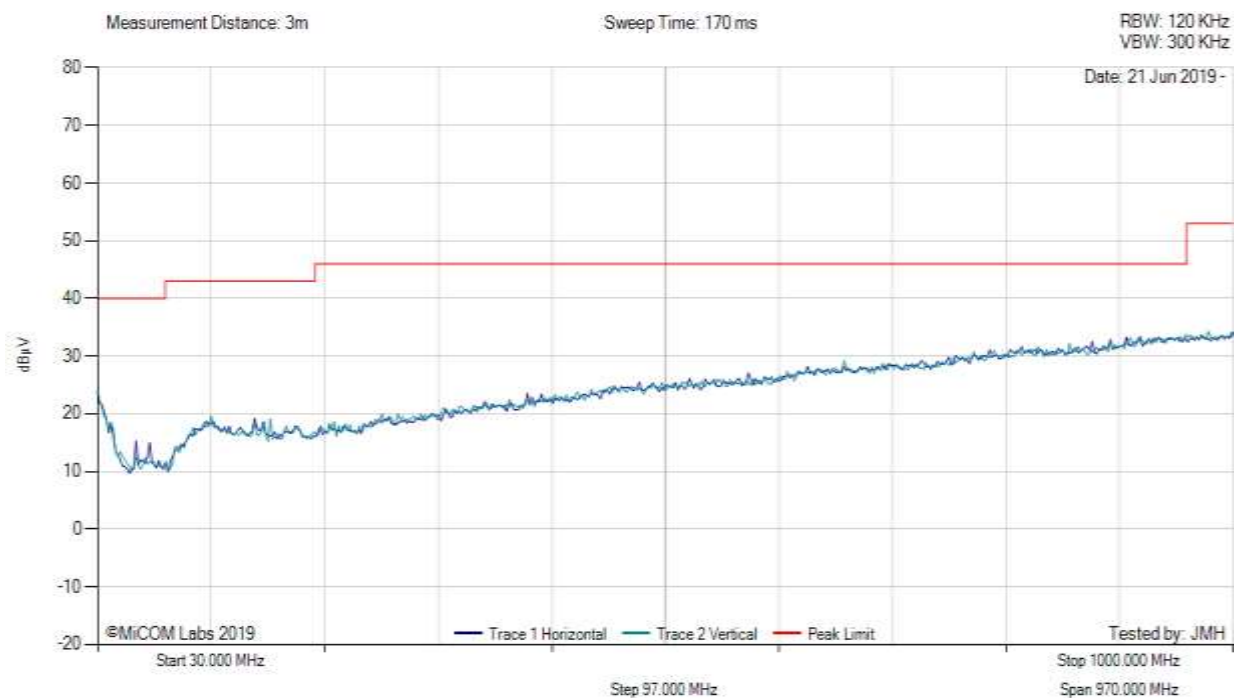

There are no emissions found within 6dB of the limit line.

Test Notes: Powered by AC/DC PS.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com