

APPLICATION CERTIFICATION  
On Behalf of  
Arts Digital Technology (HK) Limited

Wireless Microphone  
Model No.: KS717, EAKARW10

FCC ID: OWTKS717

Prepared for : Arts Digital Technology (HK) Limited  
Address : 1607A 16/F, Fo Tan Industrial Centre 26-28 Au Pui Wan  
Street Fo Tan, Shatin, Hong Kong

Prepared by : ACCURATE TECHNOLOGY CO., LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20121685  
Date of Test : July 23-August 4, 2012  
Date of Report : August 4, 2012

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	5
1.3. Measurement Uncertainty.....	5
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>6</b>
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4. CARRIER RADIATED POWER &amp; RADIATED SPURIOUS EMISSIONS.....</b>	<b>8</b>
4.1. Block Diagram of Test Setup.....	8
4.2. Test Requirement.....	9
4.3. Configuration of EUT on Measurement .....	9
4.4. Operating Condition of EUT .....	9
4.5. Test Procedure .....	10
4.6. Test Result: .....	11
<b>5. OCCUPIED BANDWIDTH .....</b>	<b>12</b>
5.1. Block Diagram of Test Setup.....	12
5.2. Test Requirement.....	13
5.3. EUT Configuration on Measurement .....	13
5.4. Operating Condition of EUT .....	13
5.5. Test procedure: .....	13
5.6. Measurement Result .....	14
<b>6. FREQUENCY STABILITY .....</b>	<b>16</b>
6.1. Test Requirement.....	16
6.2. EUT Configuration on Measurement .....	16
6.3. Operating Condition of EUT .....	16
6.4. Test Procedure .....	16
6.5. Measurement Result .....	17
<b>7. MODULATION CHARACTERISTICS.....</b>	<b>18</b>
7.1. Test requirement .....	18
7.2. EUT Configuration on Measurement .....	18
7.3. Operating Condition of EUT .....	18
7.4. Audio Frequency Response .....	19
7.5. Audio Low-Pass Filter Response.....	19
7.6. Modulation Limiting.....	20

## Test Report Certification

Applicant : Arts Digital Technology (HK) Limited  
 Manufacturer : SEATUNE ELECTRONICS CO., LTD  
 EUT Description : Wireless Microphone  
     (A) MODEL NO.: KS717, EAKARW10  
     (B) SERIAL NO.: N/A  
     (C) POWER SUPPLY: DC 9V (“6F22 battery” 1×)

Measurement Procedure Used:

**FCC PART 90.217 & 2.1047**  
**TIA 603C: 2004**

The device described above is tested by ACCURATE TECHNOLOGY CO., LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC PART 90.217 & 2.1047. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO., LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO., LTD.

Date of Test : July 23-August 4, 2012

Prepared by :

APPLE

(Engineer)

Approved & Authorized Signer :

Heung

(Manager)

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

EUT : Wireless Microphone  
Model Number : KS717, EAKARW10  
(Note: These samples are same except for the appearance is difference. So we prepare the KS717 for test.)

Power Supply : DC 9V (“6F22 battery” 1×)  
Trade Name : ADT, ADT Digital, AKAI, ELECTROHOME  
Operation Frequency : 171.905MHz

Applicant : Arts Digital Technology (HK) Limited  
Address : 1607A 16/F, Fo Tan Industrial Centre 26-28 Au Pui Wan Street Fo Tan, Shatin, Hong Kong

Manufacturer : SEATUNE ELECTRONICS CO., LTD  
Address : NO.27, SHUIKOU AVENUE, SHUIKOU TOWN, HUIZHOU CITY, GUANGDONG, CHINA

Date of sample received : July 23, 2012

Date of Test : July 23-August 4, 2012

## 1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC  
The Registration Number is 752051

Listed by Industry Canada  
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee  
for Laboratories  
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO., LTD  
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

## 1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2  
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2  
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2  
(Above 1GHz)

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated date	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 8, 2012	Jan. 7, 2013
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 8, 2012	Jan. 7, 2013
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 8, 2012	Jan. 7, 2013
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 8, 2012	Jan. 7, 2013
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 8, 2012	Jan. 7, 2013
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 8, 2012	Jan. 7, 2013
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 8, 2012	Jan. 7, 2013
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 8, 2012	Jan. 7, 2013
Spectrum Analyzer	R&S	FSL6	100611	May 20, 2012	May 19, 2013
RF Communication Test Set	HP	HP8920A	3438A05187	April 28, 2012	April 27, 2013
Audio analyzer	R&S	UPL	100026	December 21, 2011	December 20, 2012

### 3. SUMMARY OF TEST RESULTS

<b>Test</b>	<b>Test Requirement</b>	<b>Standard Paragraph</b>	<b>Result</b>
Output Power	FCC PART 90	Section 90.265(b)	PASS
Radiated Spurious Emission	FCC PART 90	Section 90.217	PASS
Occupied Bandwidth	FCC PART 90	Section 90.265(b)	PASS
Frequency Satiability	FCC PART 90	Section 90.265(b)	PASS
Modulation Characteristics	FCC PART 2	Section 2.1047	PASS

The Customer Requested EMC Tests for a Wireless Microphone.

## 4. CARRIER RADIATED POWER & RADIATED SPURIOUS EMISSIONS


### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Microphone)

#### 4.1.2. Semi-Anechoic Chamber Test Setup Diagram

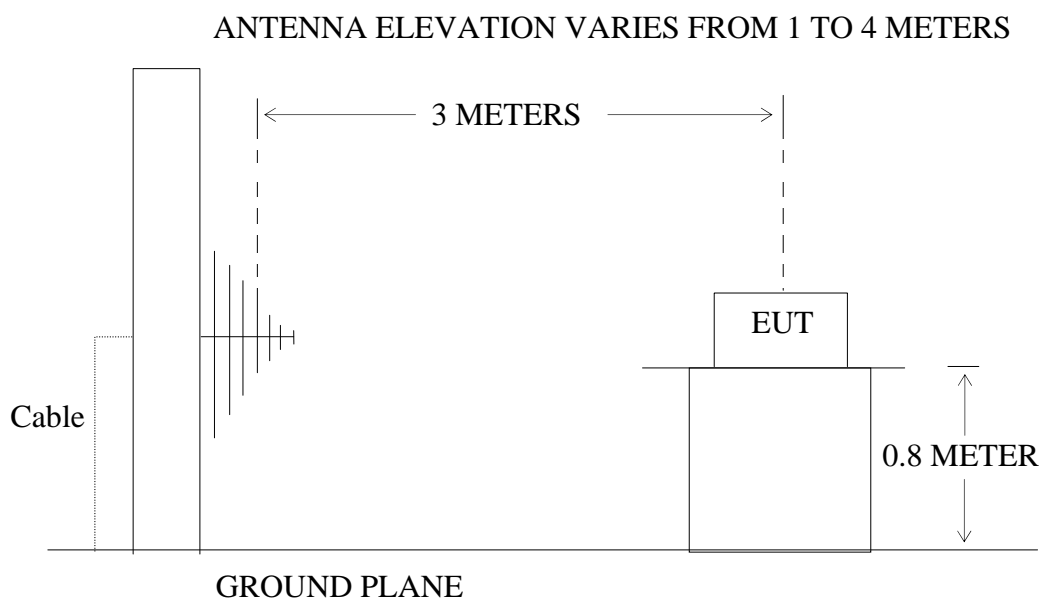

(EUT: Wireless Microphone)



## 4.2. Test Requirement

Test Requirement: FCC Part 90.217(a) & (e)

Test Method: TIA 603C

Test Date: July 28, 2012

Test Requirement:

90.217 (a) For equipment designed to operate with 25 KHz channel bandwidth, the sum of the bandwidth occupied by the emitted signal plus the bandwidth required for frequency stability shall be adjusted so that any emission appearing on a frequency 40KHz or more removed from the assigned frequency is attenuated at least 30dB below the unmodulated carrier

(e) Transmitters used for wireless microphone operations and operating on frequencies allocated for Federal use must comply with the requirements of §90.265(b).

## 4.3. Configuration of EUT on Measurement

### 4.3.1. Wireless Microphone (EUT)

Model Number : KS717

Serial Number : N/A

Manufacturer : SEATUNE ELECTRONICS CO., LTD

## 4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in TX mode measure it.

#### 4.5. Test Procedure

The procedure used was TIA Standard 603C. The receiver was scanned from 30MHZ to 2.0GHZ. when an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the horizontal and vertical polarities and performed a pre-test three orthogonal planes.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

An initial pre-scan was performed in the 3m chamber using the spectrum analyzer in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by bilog antenna with 2 orthogonal polarities

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the Carrier Radiated Power and spurious emissions were measured by the substitution.

## 4.6. Test Result:

**The unit does meet the FCC requirements.**

Carrier Frequency	Test Level (dBm)	Output power (mW)	Limit (mW)
171.905MHz	-29.51	0.001	50

Spurious Emission Frequency (MHz)	Factual Level (dBm)		Limits (dBm)	Margin (dBm)	
	Vertical	Horizontal		Vertical	Horizontal
227.0164	-61.30	-60.59	-59.51*	-1.79	-1.08
283.2637	-65.75	-68.11	-59.51	-6.24	-8.60

Note:

\*Spurious Emission Limits= Carrier power -30dB

Emissions attenuated more than 20 dB below the permissible value are not reported.

## 5. OCCUPIED BANDWIDTH


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Microphone)

#### 5.1.2. Semi-Anechoic Chamber Test Setup Diagram

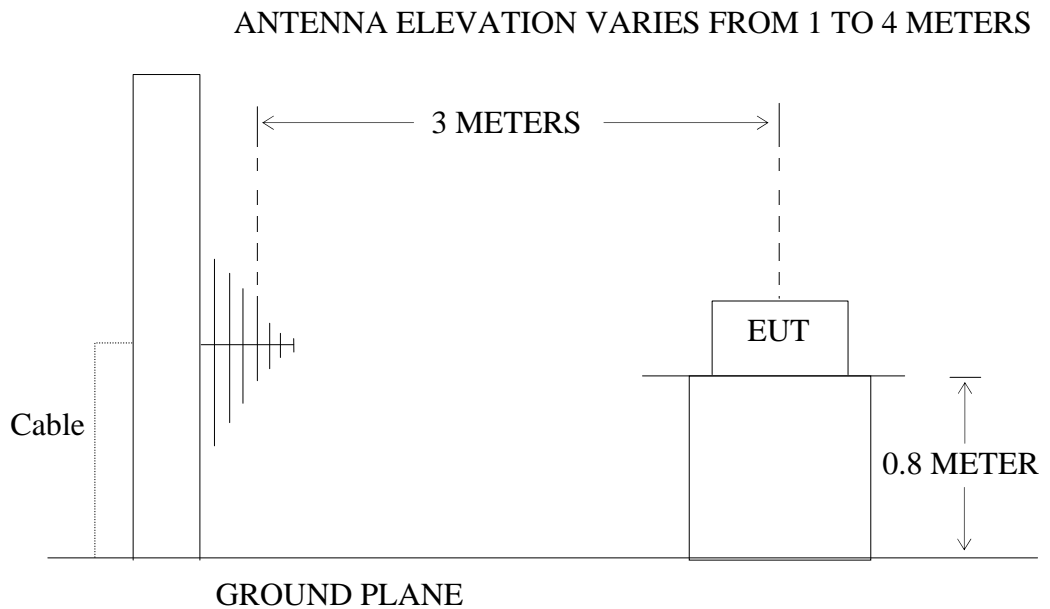

(EUT: Wireless Microphone)

## 5.2. Test Requirement

Test Requirement      FCC Part 90.265(b) & 90.210(c)  
 Test Method:          TIA 603C & FCC Part 2.1049  
 Test Date:              July 28, 2012

Requirements:        90.265(b)(1) The emission bandwidth shall not exceed 54 kHz. Equipment designed to operate with a 25 kHz channel bandwidth must meet the requirements of Emission Mask B or C, as applicable.  
 90.210(b) Emission Mask B. For transmitters that are equipped with an audio lowpass filter the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.

## 5.3. EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 5.3.1. Wireless Microphone (EUT)

Model Number      :    KS717  
 Serial Number      :    N/A  
 Manufacturer       :    SEATUNE ELECTRONICS CO., LTD

## 5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX mode measure it.


## 5.5. Test procedure:

Input 1000Hz signal to the microphone, find the 50% rated deviation, keep the level, tune the signal to 2500Hz, add the level 16dB, test this status the 20dB occupied bandwidth and record it.

## 5.6.Measurement Result

**The unit does meet the FCC requirements.**

Please refer the following curve and plots.

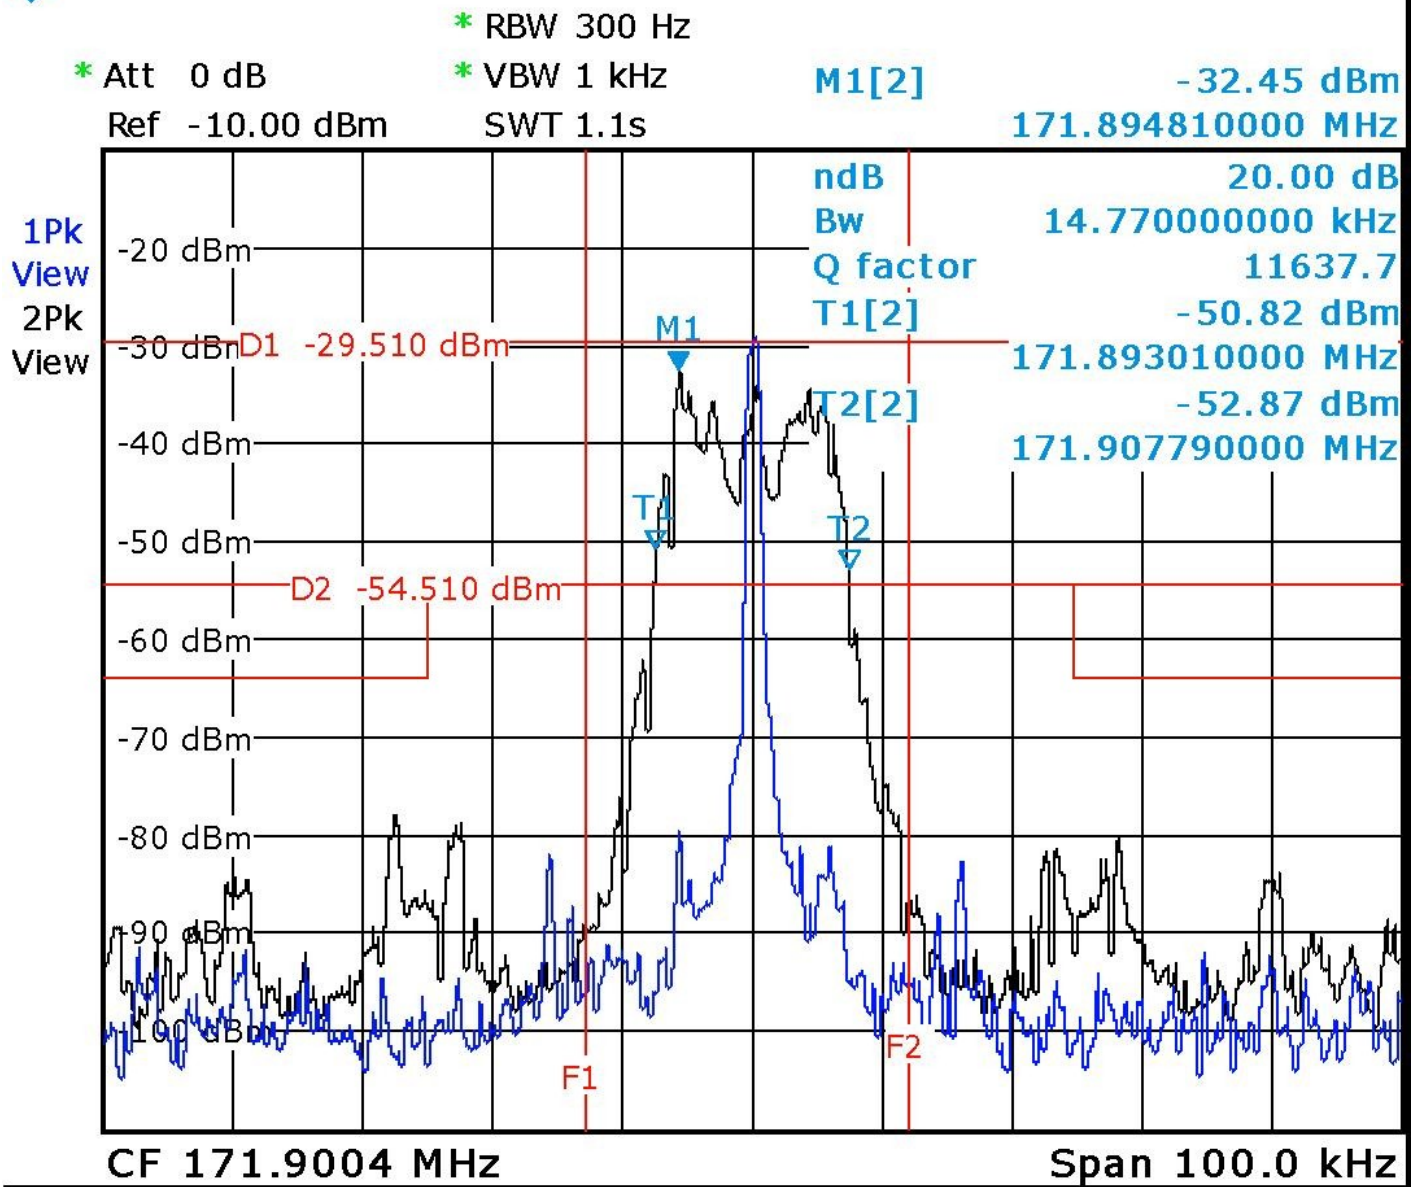

## 6. FREQUENCY STABILITY

### 6.1. Test Requirement

Test Requirement:	FCC 90.265(b)
Test Method :	TIA 603C & FCC Part 2.1055
Test Date:	July 28, 2012
Requirements:	90.265(b)(3) The frequency stability of wireless microphones shall limit the total emission to within +32.5 kHz of the assigned frequency.

### 6.2. EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.2.1. Wireless Microphone (EUT)

Model Number	:	KS717
Serial Number	:	N/A
Manufacturer	:	SEATUNE ELECTRONICS CO., LTD

### 6.3. Operating Condition of EUT

6.3.1. Turn on the power of all equipment.

6.3.2. Let the EUT work in TX mode measure it.

### 6.4. Test Procedure

#### **Frequency stability versus environmental temperature**

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feedthrough attenuators. The EUT was placed inside the temperature chamber. After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.

#### **Frequency Stability versus Input Voltage**

At room temperature ( $25 \pm 5^\circ \text{C}$ ), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.



## 6.5.Measurement Result

Assigned Frequency: 171.905 Limit: total emission within +/-32.5KHz of the assigned Frequency		
Environment Temperature °C	Power Supplied (Vdc)	Frequency measure with time elapsed total emission within KHz
50	9.0	-3.2
40	9.0	-2.9
30	9.0	-1.8
20	9.0	-1.5
10	9.0	-1.2
0	9.0	-0.5
-10	9.0	+0.8
-20	9.0	+1.3
-30	9.0	+1.5

Assigned Frequency: 171.905 Limit: total emission within +/-32.5KHz of the assigned Frequency		
Environment Temperature °C	Power Supplied (Vdc)	Frequency measure with time elapsed total emission Max KHz
20	9.0	-1.2
20	7.55	-2.6
20	7.2	-3.0
20	6.8	-3.6
20	6.5	-4.2

Battery end point: DC 6.5V

**The unit does meet the FCC requirements.**

## 7. MODULATION CHARACTERISTICS

### 7.1. Test requirement

Test requirement: FCC2.1047  
Test method: FCC2.1047  
Test Date: July 28, 2012

### 7.2. EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 7.2.1. Wireless Microphone (EUT)

Model Number : KS717  
Serial Number : N/A  
Manufacturer : SEATUNE ELECTRONICS CO., LTD

### 7.3. Operating Condition of EUT

7.3.1. Turn on the power of all equipment.

7.3.2. Let the EUT work in TX mode measure it.

## 7.4. Audio Frequency Response

### Test procedure:

The RF output of the transceiver was connected to the input of FSP 30 with FM deviation module through sufficient attenuation so as not to overload the meter or distort the reading. An audio signal generator was connect to the audio input of microphone. The audio signal input level was adjusted to obtain 20% of the maximum rated system deviation at 1 kHz, and recorded as  $DEV_{REF}$ . With the audio signal generator level unchanged, set the generator frequency between 100 Hz to 1500 Hz. The transmitter deviations ( $DEV_{FREQ}$ ) were measured and the audio frequency response was calculated ad  $20\log_{10}(DEV_{FREQ} / DEV_{REF})$

Test result:

0dB=12mV

### Audio Frequency Response

Frequency(Hz)	Audio Response(dB)
100	-1.16183849
300	-0.802771221
500	-0.601574488
1000	0
2000	2.588442583
5000	6.996811844
10000	-0.411488985
150000	-15.663012501

## 7.5. Audio Low-Pass Filter Response

An audio signal generator and FSP 30 with FM deviation module were connected to the input and output of the post limiter low pass filter respectively. The audio signal generator frequency was set between 1000 Hz and 15000Hz. The level corresponding to 1000Hz was recorded as  $LEV_{REF}$ . The audio frequency response ( $LEV_{FREQ}$ ) at test frequency was calculated as:  $LEV_{FREQ} - LEV_{REF}$

Test result:

### Audio Low-pass

Frequency(Hz)	Audio Low-pass(dB)
1000	0
2000	-0.20746519
5000	-7.95312532
10000	-7.84825917
15000	-25.88009517

## 7.6. Modulation Limiting

### Test Procedure:

With the same setup as above, at four different modulating frequencies (300Hz, 1KHz, 3 KHz, 15KHz) (one of which was the frequency of maximum response, here is 15KHz), the output level of the audio generator was varied and the FM deviation level was recorded.

### Test result:

Positive peak						
Modulation Limiting(dB)	A-ref(mV)	Peak Frequency Deviation (kHz)				
		300	1000	2000	3000	15000
-20		2.6	2.4	2.9	3.1	0.5
-10		4.8	4.9	6.3	7.0	1.9
-6		6.4	6.9	10.1	14.3	2.1
-3		6.9	11.7	30.9	18.2	3.1
0	7.60	14.6	14.9	16.9	12.4	9.8
3		18.2	24.4	23.5	36.7	3.0
6		21.6	28.7	19.0	38.7	0.5
10		35.6	31.9	1.8	33.3	1.1
20		59.8	37.7	11.1	8.1	2.2
Negative peak						
Modulation Limiting(dB)	A-ref(mV)	Peak Frequency Deviation (kHz)				
		300	1000	2000	3000	15000
-20		1.6	1.7	1.4	1.5	0.4
-10		3.9	4.6	4.7	5.0	0.5
-6		5.9	6.5	7.7	7.7	0.9
-3		10.2	10.8	8.7	10.9	1.3
0	7.60	13.6	19.2	11.1	36.4	2.1
3		24.7	31.1	11.8	11.4	6.7
6		30.6	31.1	27.1	37.2	4.2
10		44.6	33.7	18.1	15.7	0.8
20		70.3	62.9	10.1	13.5	8.8