

# FCC REPORT

**Applicant:** Targus International LLC

**Address of Applicant:** 1211 North Miller Street Anaheim, CA 92806 USA

**Equipment Under Test (EUT)**

Product Name: Wireless Charger

Model No.: APW002, APA756

Trade mark: Targus, iStore

**FCC ID:** OXM000097

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C

**Date of sample receipt:** 10 Sep., 2018

**Date of Test:** 10 Sep., to 18 Sep., 2018

**Date of report issue:** 18 Sep., 2018

**Test Result:** PASS\*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

| Version No. | Date          | Description |
|-------------|---------------|-------------|
| 00          | 18 Sep., 2018 | Original    |
|             |               |             |
|             |               |             |
|             |               |             |

**Tested By:**

*Mike OU*

**Date:**

18 Sep., 2018

**Test Engineer**

**Reviewed By:**

*Wimer Zhang*

**Date:**

18 Sep., 2018

**Project Engineer**

## 3 Contents

Page

|     |  |    |
|-----|--|----|
| 1   | COVER PAGE.....                        | 1  |
| 2   | VERSION .....                          | 2  |
| 3   | CONTENTS .....                         | 3  |
| 4   | TEST SUMMARY.....                      | 4  |
| 5   | GENERAL INFORMATION.....               | 5  |
| 5.1 | CLIENT INFORMATION.....                | 5  |
| 5.2 | GENERAL DESCRIPTION OF E.U.T.....      | 5  |
| 5.3 | TEST MODE .....                        | 5  |
| 5.4 | DESCRIPTION OF SUPPORT UNITS.....      | 5  |
| 5.5 | MEASUREMENT UNCERTAINTY.....           | 6  |
| 5.6 | LABORATORY FACILITY.....               | 6  |
| 5.7 | LABORATORY LOCATION .....              | 6  |
| 5.8 | TEST INSTRUMENTSLIST.....              | 7  |
| 6   | TEST RESULTS ANDMEASUREMENT DATA ..... | 8  |
| 6.1 | ANTENNA REQUIREMENT .....              | 8  |
| 6.2 | RADIATED EMISSION .....                | 9  |
| 6.3 | CONDUCTED EMISSION .....               | 16 |
| 6.4 | 20dB BANDWIDTH.....                    | 19 |
| 7   | TEST SETUP PHOTOS.....                 | 21 |
| 8   | EUT CONSTRUCTIONAL PHOTOS.....         | 23 |

## 4 Test Summary

| Test Item  | Section in CFR 47 | Result |
|--|-------------------|--------|
| Spurious emissions   | 15.209            | Pass   |
| 20dB Bandwidth   | 15.215(c)         | Pass   |
| Conducted Emission   | 15.207            | Pass   |
| <i>Remark:</i><br><i>Pass: The EUT complies with the essential requirements in the standard.</i> |                   |        |

Note: Test according to ANSI C63.4-2014 ; ANSI C63.10-2013

## 5 General Information

### 5.1 Client Information

|              |   |
|--------------|---|
| Applicant:   | Targus International LLC  |
| Address:     | 1211 North Miller Street Anaheim, CA 92806 USA  |
| Manufacturer | Targus International LLC  |
| Address:     | 1211 North Miller Street Anaheim, CA 92806 USA  |
| Factory:     | Shenzhen Senkaixin Technology Co. Ltd.  |
| Address:     | Nine 101 Hongqiaotou Hengzhao Industrial Zone, Songgang Street, Bao'an District, Shenzhen |

### 5.2 General Description of E.U.T.

|                                  |   |
|----------------------------------|---|
| Product Name:                    | Wireless Charger  |
| Model No.:                       | APW002, APA756  |
| Operation Frequency:             | 112.00kHz~140.46kHz   |
| Modulation type:                 | ASK   |
| Antenna Type:                    | Coil Antenna  |
| Power supply (Adapter):          | Mode.: DSA-18QFB FUS A<br>Input:100~240V, 50/60Hz, 0.8A<br>Output: 5V, 3A / 9V, 2A / 12V, 1.5A  |
| Power supply (Wireless Charger): | Input: 5V, 2A / 9V, 1.5A<br>Output: up to 10W   |
| Remark:                          | Model No.: APW002, APA756 were identical inside, the electrical circuit design, layout, components used and internal wiring identical, with only difference being model name, appearance and location of light leakage different. |

### 5.3 Test mode

|  |   |
|--|---|
| Transmitting mode:   | Keep the EUT in transmitting mode with modulation |
| <i>Remark: Test at input 5Vdc, 2A / 9Vdc, 1.5A , found input: 5V, output: 10W was worse case mode. So the report only reflects the worse mode.</i> |   |

### 5.4 Description of Support Units

| Manufacturer                  | Description                  | Model | S/N | FCC ID/DoC |
|-------------------------------|------------------------------|-------|-----|------------|
| Skytek                        | Wireless charging match load | N/A   | N/A | N/A        |
| HUAWEI TECHNOLOGIES CO., LTD. | USB Cable                    | N/A   | N/A | N/A        |

## 5.5 Measurement Uncertainty

| Parameter                           | Expanded Uncertainty (Confidence of 95%) |
|-------------------------------------|--|
| Conducted Emission (9kHz ~ 30MHz)   | ±2.22 dB                                 |
| Radiated Emission (9kHz ~ 30MHz)    | ±2.76 dB                                 |
| Radiated Emission (30MHz ~ 1000MHz) | ±4.28 dB                                 |
| Radiated Emission (1GHz ~ 18GHz)    | ±5.72 dB                                 |
| Radiated Emission (18GHz ~ 26.5GHz) | ±2.88 dB                                 |

## 5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

## 5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
 Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,  
 Bao'an District, Shenzhen, Guangdong, China  
 Tel: +86-755-23118282, Fax: +86-755-23116366  
 Email: info@ccis-cb.com, Website: http://www.ccis-cb.com


## 5.8 Test Instrumentslist

| Radiated Emission: |                 |               |            |                      |                          |
|--------------------|-----------------|---------------|------------|----------------------|--------------------------|
| Test Equipment     | Manufacturer    | Model No.     | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC             | SAEMC           | 9m*6m*6m      | 966        | 07-22-2017           | 07-21-2020               |
| BiConiLog Antenna  | SCHWARZBECK     | VULB9163      | 497        | 03-16-2018           | 03-15-2019               |
| Horn Antenna       | SCHWARZBECK     | BBHA9120D     | 916        | 03-16-2018           | 03-15-2019               |
| Loop Antenna       | SCHWARZBECK     | FMZB 1519 B   | 00044      | 02-25-2018           | 02-24-2019               |
| EMI Test Software  | AUDIX           | E3            | 6.110919b  | N/A                  | N/A                      |
| Pre-amplifier      | HP              | 8447D         | 2944A09358 | 03-07-2018           | 03-06-2019               |
| Pre-amplifier      | CD              | PAP-1G18      | 11804      | 03-07-2018           | 03-06-2019               |
| Spectrum analyzer  | Rohde & Schwarz | FSP30         | 101454     | 03-07-2018           | 03-06-2019               |
| EMI Test Receiver  | Rohde & Schwarz | ESRP7         | 101070     | 03-07-2018           | 03-06-2019               |
| Simulated Station  | Anritsu         | MT8820C       | 6201026545 | 03-07-2018           | 03-06-2019               |
| Cable              | ZDECL           | Z108-NJ-NJ-81 | 1608458    | 03-07-2018           | 03-06-2019               |
| Cable              | MICRO-COAX      | MFR64639      | K10742-5   | 03-07-2018           | 03-06-2019               |
| Cable              | SUHNER          | SUCOFLEX100   | 58193/4PE  | 03-07-2018           | 03-06-2019               |

| Conducted Emission: |                 |            |             |                      |                          |
|---------------------|-----------------|------------|-------------|----------------------|--------------------------|
| Test Equipment      | Manufacturer    | Model No.  | Serial No.  | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| EMI Test Receiver   | Rohde & Schwarz | ESCI       | 101189      | 03-07-2018           | 03-06-2019               |
| Pulse Limiter       | SCHWARZBECK     | OSRAM 2306 | 9731        | 03-07-2018           | 03-06-2019               |
| LISN                | CHASE           | MN2050D    | 1447        | 03-19-2018           | 03-18-2019               |
| LISN                | Rohde & Schwarz | ESH3-Z5    | 8438621/010 | 07-21-2018           | 07-20-2019               |
| Cable               | HP              | 10503A     | N/A         | 03-07-2018           | 03-06-2019               |
| EMI Test Software   | AUDIX           | E3         | 6.110919b   | N/A                  | N/A                      |


## 6 Test results and Measurement Data

### 6.1 Antenna requirement
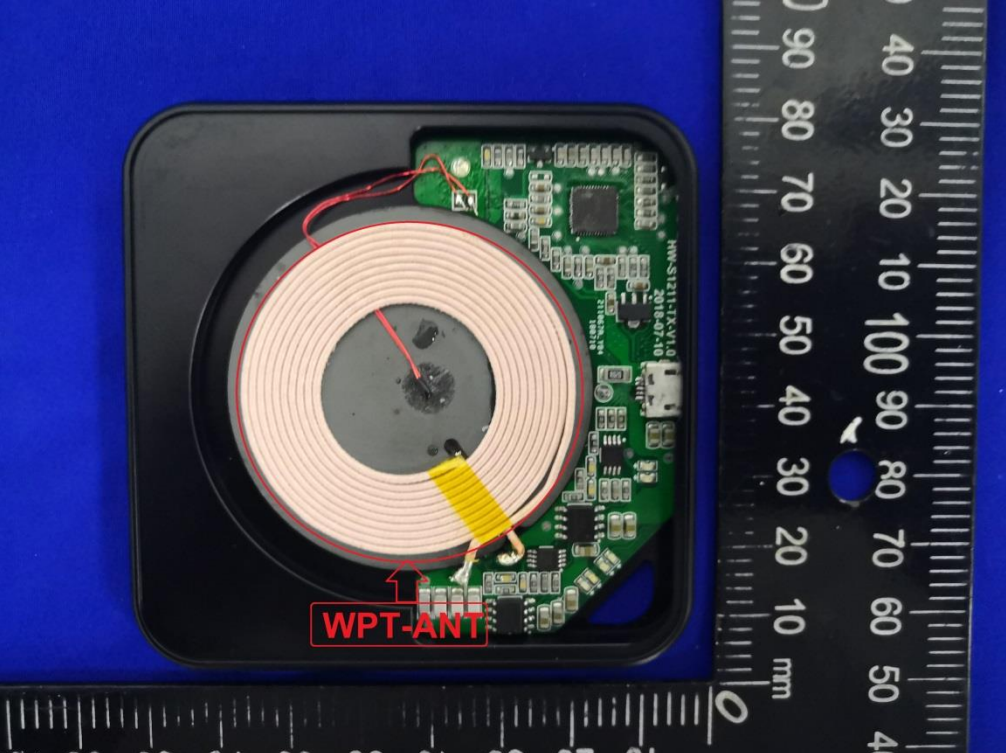
|  |                             |
|--|-----------------------------|
| <b>Standard requirement:</b>   | FCC Part15 C Section 15.203 |
| <p>15.203 requirement:<br/>         An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> |                             |
| <b>E.U.T Antenna:</b>  |                             |
|   |                             |



## 6.2 Radiated Emission
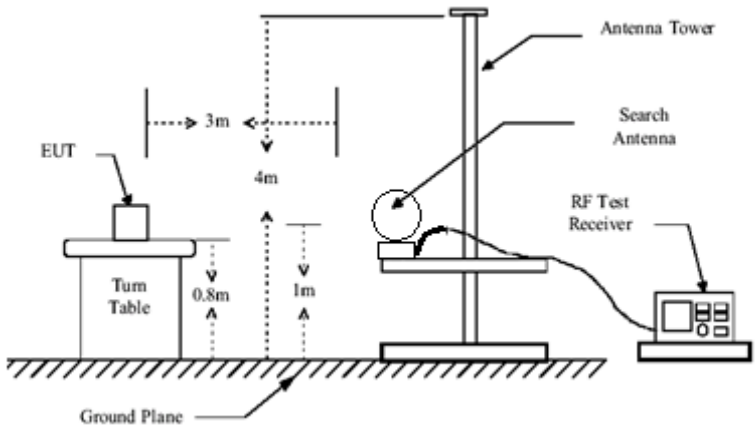
|                       |   |                  |        |              |                  |
|-----------------------|---|------------------|--------|--------------|------------------|
| Test Requirement:     | FCC Part15 C Section 15.209   |                  |        |              |                  |
| Test Method:          | ANSI C63.4-2014 ; ANSI C63.10-2013  |                  |        |              |                  |
| Test Frequency Range: | 9kHz to 1000MHz   |                  |        |              |                  |
| Test site:            | Measurement Distance: 3m(Semi-Anechoic Chamber)   |                  |        |              |                  |
| Receiver setup:       | Frequency   | Detector         | RBW    | VBW          | Remark           |
|                       | 9kHz-150kHz   | PK /AV           | 200Hz  | 600Hz        | PK /AV           |
|                       | 150kHz-30MHz  | PK/ AV /QP       | 9kHz   | 30kHz        | PK/ AV /QP       |
|                       | 30MHz-1GHz  | Quasi-peak       | 120kHz | 300kHz       | Quasi-peak Value |
|                       | Above 1GHz  | Peak             | 1MHz   | 3MHz         | Peak Value       |
| Limit:                | Frequency (MHz)   | Limit (uV/m @3m) |        | Distance (m) |                  |
|                       | 0.009-0.490   | 2400/F(kHz)      |        | 300          |                  |
|                       | 0.490-1.705   | 24000/F(kHz)     |        | 30           |                  |
|                       | 1.705-30  | 30               |        | 30           |                  |
|                       | 30-88   | 100              |        | 3            |                  |
|                       | 88-216  | 150              |        | 3            |                  |
|                       | 216-960   | 200              |        | 3            |                  |
|                       | Above 1GHz  | 500              |        | 3            |                  |
| Test Procedure:       | <p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> |                  |        |              |                  |
| Test setup:           | <p>9kHz-30MHz</p>  <p>30MHz-1GHz</p>  |                  |        |              |                  |

|                          |   |
|--------------------------|---|
|                          | <p>The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a Turn Table at a height of 0.8m from the Ground Plane. The Turn Table is positioned 3m horizontally from the base of the Antenna Tower. The Antenna Tower has a Search Antenna at a height of 4m from the Ground Plane. An RF Test Receiver is connected to the Search Antenna. The Ground Plane is indicated by a hatched line at the bottom.</p> |
| <p>Test Instruments:</p> | <p>Refer to section 5.9 for details</p>   |
| <p>Test mode:</p>        | <p>Refer to section 5.3 for details</p>   |
| <p>Test results:</p>     | <p>Pass</p>   |

**Measurement Data:**

**a) Fundamental field strength**


| Peak value        |                 |                   |                 |        |
|-------------------|-----------------|-------------------|-----------------|--------|
| Test Polarization | Frequency (kHz) | H-field@3m (dBμV) | Limit@3m (dBμV) | Result |
| Horizontal        | 129.23          | 63.35             | 125.37          | Pass   |
| Vertical          | 129.23          | 83.92             | 125.37          | Pass   |
| Average value     |                 |                   |                 |        |
| Test Polarization | Frequency (kHz) | H-field@3m (dBμV) | Limit@3m (dBμV) | Result |
| Horizontal        | 129.23          | 43.77             | 105.37          | Pass   |
| Vertical          | 129.23          | 62.24             | 105.37          | Pass   |

MID CH 129.23KHz

**b) Radiated spurious:**

**9kHz~30MHz**

Test Polarization: Horizontal

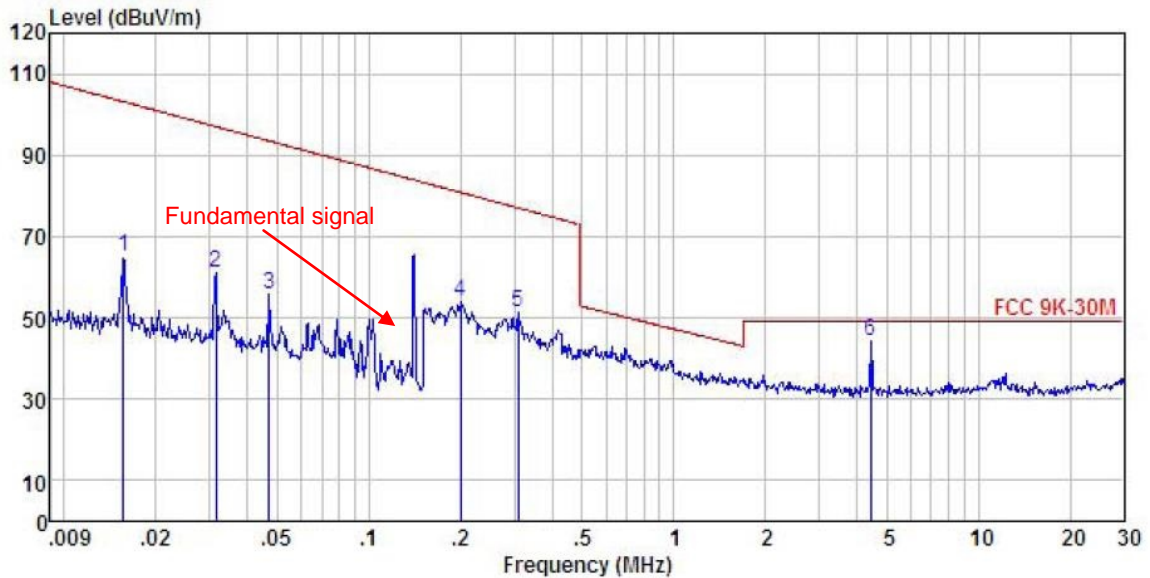


Site : 3m chamber  
 Condition : FCC 9K-30M 3m LOOP-FMZB 1519B HORIZONTAL  
 EUT : Wireless Charger  
 Model : APW002  
 Test mode : Charing mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25.5°C Humi:55% 101KPa  
 Test Engineer: Mike  
 REMARK :

|   | Freq  | Read Level | Antenna Factor | Cable Loss | Aux Factor | Preamp Factor | Level  | Limit Line | Over Limit | Remark |
|---|-------|------------|----------------|------------|------------|---------------|--------|------------|------------|--------|
|   | MHz   | dBuV       | dB/m           | dB         | dB         | dB            | dBuV/m | dBuV/m     | dB         |        |
| 1 | 0.016 | 39.62      | -25.86         | 0.05       | 51.50      | 0.00          | 65.31  |            |            | Peak   |
| 2 | 0.031 | 35.30      | -25.95         | 0.12       | 51.50      | 0.00          | 60.97  |            |            | Peak   |
| 3 | 0.047 | 30.24      | -25.99         | 0.17       | 51.50      | 0.00          | 55.92  |            |            | Peak   |
| 4 | 0.200 | 28.27      | -26.20         | 0.33       | 51.50      | 0.00          | 53.90  |            |            | Peak   |
| 5 | 0.309 | 25.74      | -26.25         | 0.36       | 51.50      | 0.00          | 51.35  |            |            | Peak   |
| 6 | 4.423 | 18.96      | -26.59         | 0.62       | 51.50      | 0.00          | 44.49  |            |            | Peak   |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test Polarization: Vertical

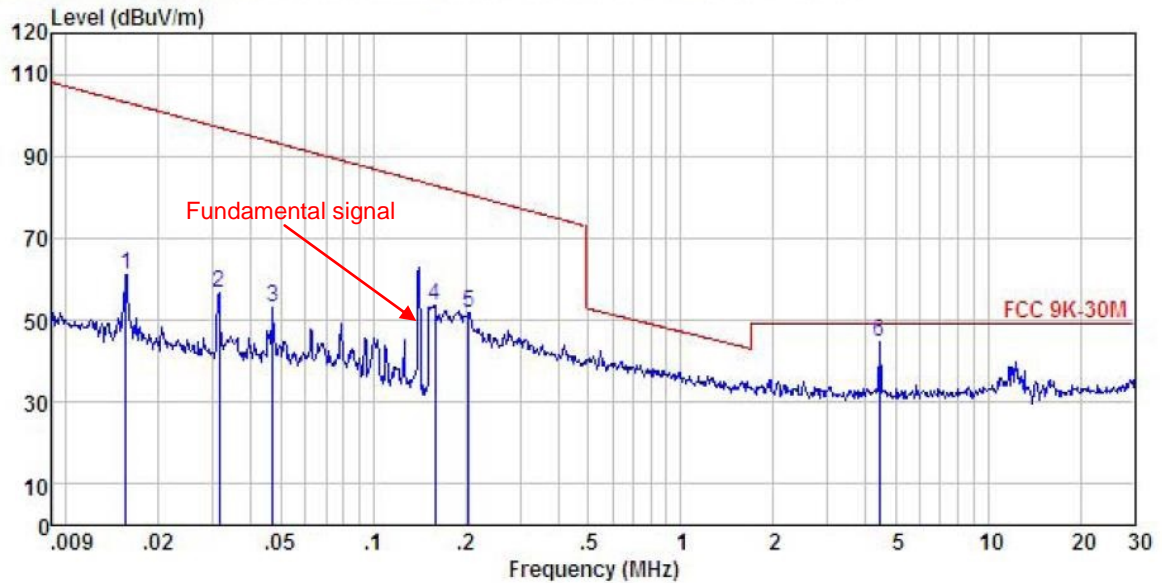

Site : 3m chamber  
 Condition : FCC 9K-30M 3m LOOP-FMZB 1519B VERTICAL  
 EUT : Wireless Charger  
 Model : APW002  
 Test mode : Charing mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25.5°C Humi:55% 101KPa  
 Test Engineer: Mike  
 REMARK :


|       | Read  | Antenna | Cable  | Aux    | Preamp | Limit  | Over   |        |
|-------|-------|---------|--------|--------|--------|--------|--------|--------|
| Freq  | Level | Factor  | Loss   | Factor | Factor | Line   | Limit  | Remark |
| ----- | ----- | -----   | -----  | -----  | -----  | -----  | -----  | -----  |
| MHz   | dBuV  | dB/m    | dB     | dB     | dB     | dBuV/m | dBuV/m | dB     |
| 1     | 0.016 | 35.63   | -25.86 | 0.05   | 51.50  | 0.00   | 61.32  | Peak   |
| 2     | 0.031 | 30.91   | -25.95 | 0.12   | 51.50  | 0.00   | 56.58  | Peak   |
| 3     | 0.047 | 27.30   | -25.99 | 0.17   | 51.50  | 0.00   | 52.98  | Peak   |
| 4     | 0.159 | 27.97   | -26.17 | 0.28   | 51.50  | 0.00   | 53.58  | Peak   |
| 5     | 0.204 | 26.36   | -26.20 | 0.33   | 51.50  | 0.00   | 51.99  | Peak   |
| 6     | 4.423 | 19.13   | -26.59 | 0.62   | 51.50  | 0.00   | 44.66  | Peak   |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

**30MHz~1000MHz**

Test Polarization: Horizontal

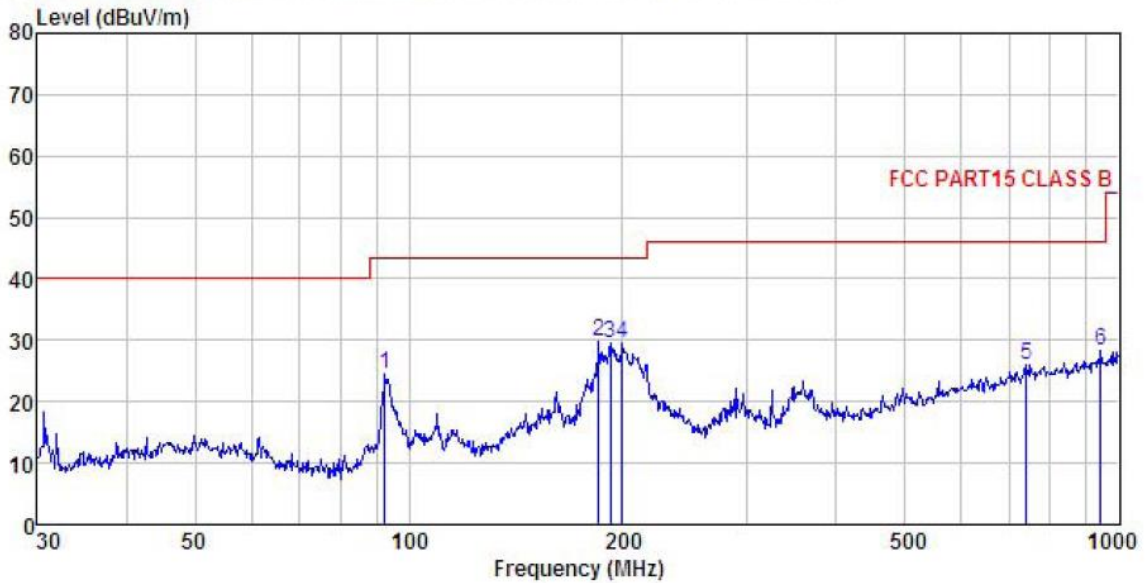

Site : 3m chamber  
 Condition : FCC PART15 CLASS B 3m VULB9163(30M2G) HORIZONTAL  
 EUT : Wireless Charger  
 Model : APW002  
 Test mode : Charging mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25.5°C Humi:55% 101KPa  
 Test Engineer: Mike  
 REMARK :


|   | Freq    | Read Level | Antenna Factor | Cable Loss | Aux Factor | Preamp Factor | Level  | Limit Line | Over Limit | Remark |
|---|---------|------------|----------------|------------|------------|---------------|--------|------------|------------|--------|
|   | MHz     | dBuV       | dB/m           | dB         | dB         | dB            | dBuV/m | dBuV/m     | dB         |        |
| 1 | 92.462  | 41.64      | 10.44          | 2.03       | 0.00       | 29.56         | 24.55  | 43.50      | -18.95     | QP     |
| 2 | 185.138 | 45.51      | 10.53          | 2.77       | 0.00       | 28.93         | 29.88  | 43.50      | -13.62     | QP     |
| 3 | 192.419 | 44.42      | 11.27          | 2.82       | 0.00       | 28.88         | 29.63  | 43.50      | -13.87     | QP     |
| 4 | 199.986 | 43.86      | 11.50          | 2.87       | 0.00       | 28.83         | 29.40  | 43.50      | -14.10     | QP     |
| 5 | 739.661 | 29.37      | 20.76          | 4.32       | 0.00       | 28.52         | 25.93  | 46.00      | -20.07     | QP     |
| 6 | 942.131 | 29.66      | 22.38          | 4.13       | 0.00       | 27.75         | 28.42  | 46.00      | -17.58     | QP     |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test Polarization: Vertical

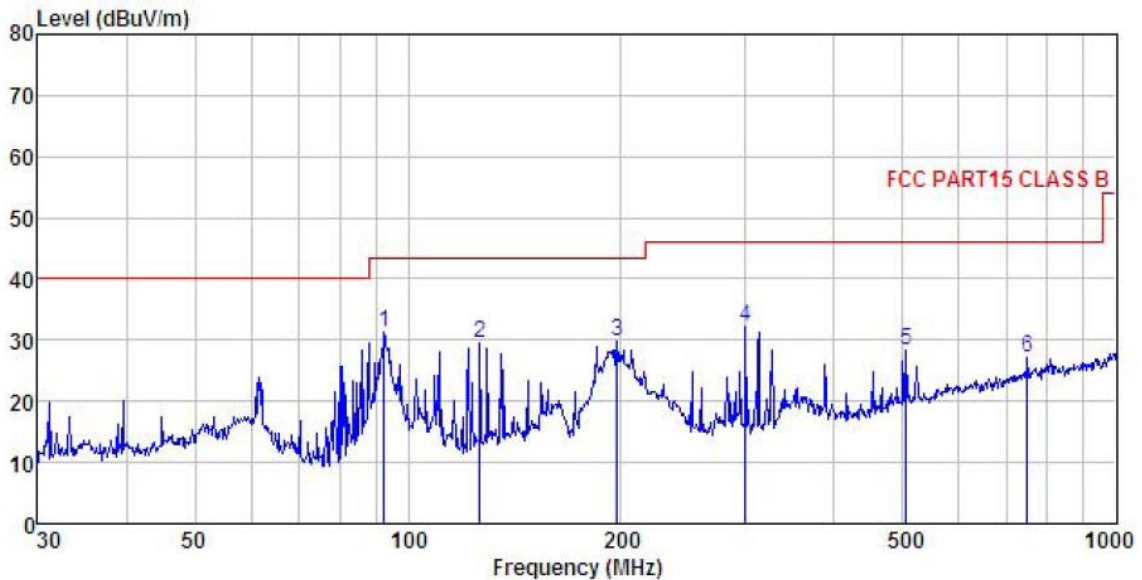

Site : 3m chamber  
 Condition : FCC PART15 CLASS B 3m VULB9163(30M2G) VERTICAL  
 EUT : Wireless Charger  
 Model : APW002  
 Test mode : Charing mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25.5°C Humi:55% 101KPa  
 Test Engineer: Mike  
 REMARK :

|   | Freq    | Read Level | Antenna Factor | Cable Loss | Aux Factor | Preamp Factor | Level  | Limit Line | Over Limit | Remark |
|---|---------|------------|----------------|------------|------------|---------------|--------|------------|------------|--------|
|   | MHz     | dBuV       | dB/m           | dB         | dB         | dB            | dBuV/m | dBuV/m     | dB         |        |
| 1 | 92.462  | 48.32      | 10.44          | 2.03       | 0.00       | 29.56         | 31.23  | 43.50      | -12.27     | QP     |
| 2 | 126.329 | 47.44      | 9.24           | 2.24       | 0.00       | 29.35         | 29.57  | 43.50      | -13.93     | QP     |
| 3 | 197.200 | 44.29      | 11.42          | 2.85       | 0.00       | 28.85         | 29.71  | 43.50      | -13.79     | QP     |
| 4 | 299.316 | 44.03      | 13.60          | 2.94       | 0.00       | 28.45         | 32.12  | 46.00      | -13.88     | QP     |
| 5 | 504.706 | 36.24      | 17.55          | 3.65       | 0.00       | 28.97         | 28.47  | 46.00      | -17.53     | QP     |
| 6 | 750.108 | 30.28      | 21.00          | 4.36       | 0.00       | 28.48         | 27.16  | 46.00      | -18.84     | QP     |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


## 6.3 Conducted Emission

|  |  |                    |                            |
|--|--|--------------------|----------------------------|
| Test Requirement:                                | FCC Part 15 B Section 15.207   |                    |                            |
| Test Method:                                     | ANSI C63.4-2014 ; ANSI C63.10-2013   |                    |                            |
| Test Frequency Range:                            | 150kHz to 30MHz  |                    |                            |
| Class / Severity:                                | Class B  |                    |                            |
| Receiver setup:                                  | RBW=9kHz, VBW=30kHz  |                    |                            |
| Limit:   | Frequency range (MHz)  | Limit (dB $\mu$ V) |                            |
|  |  | Quasi-peak         | Average                    |
|  | 0.15-0.5   | 66 to 56*          | 56 to 46*                  |
|  | 0.5-5  | 56                 | 46                         |
|  | 0.5-30   | 60                 | 50                         |
| * Decreases with the logarithm of the frequency. |  |                    |                            |
| Test setup:                                      | <p>Reference Plane</p> <p>LISN</p> <p>40cm</p> <p>80cm</p> <p>LISN</p> <p>AUX Equipment</p> <p>E.U.T.</p> <p>Test table/Insulation plane</p> <p>Filter</p> <p>AC power</p> <p>EMI Receiver</p> <p>Remark<br/> E.U.T: Equipment Under Test<br/> LISN: Line Impedance Stabilization Network<br/> Test table height=0.8m</p>  |                    |                            |
| Test procedure                                   | <ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.</li> </ol> |                    |                            |
| Test environment:                                | Temp.:   | 23 °C              | Humid.: 56% Press.: 101kPa |
| Test Instruments:                                | Refer to section 5.9 for details   |                    |                            |
| Test mode:                                       | Refer to section 5.3 for details   |                    |                            |
| Test results:                                    | Pass   |                    |                            |



**Measurement data:**

Test Phase: Line

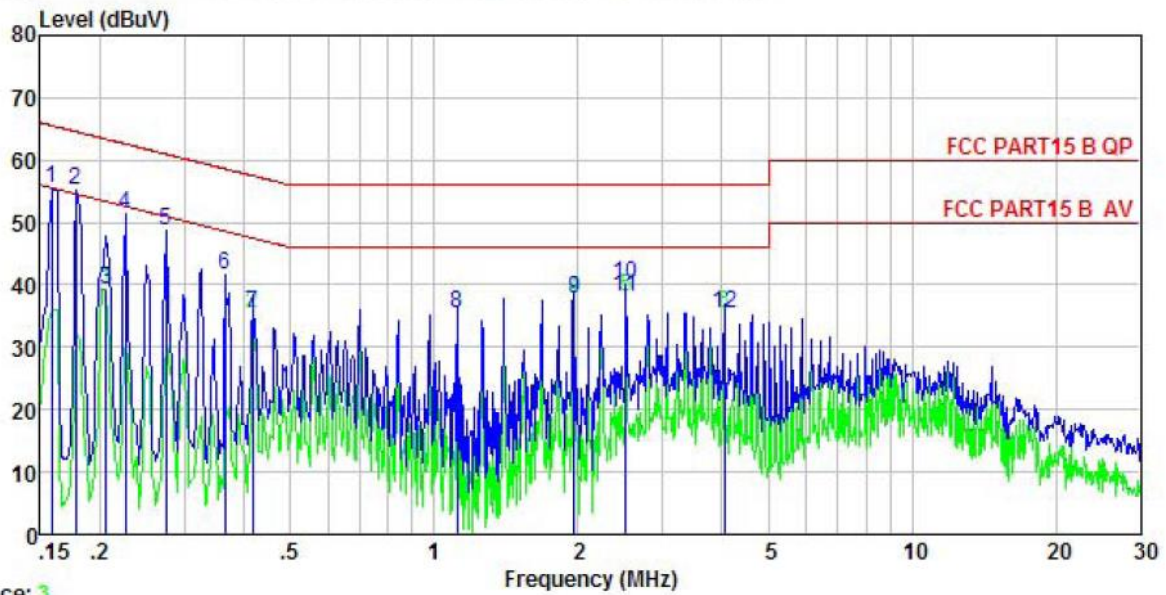


Trace: 3  
 Site : CCIS Shielding Room  
 Condition : FCC PART15 B QP LISN LINE  
 EUT : Wireless Charger  
 Model : APW002  
 Test mode : Charging Mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: Mike  
 Remark :

|    | Read Freq | Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark  |
|----|-----------|-------|-------------|------------|-------|------------|------------|---------|
|    | MHz       | dBuV  | dB          | dB         | dBuV  | dBuV       | dB         |         |
| 1  | 0.158     | 44.50 | 0.17        | 10.77      | 55.44 | 65.56      | -10.12     | QP      |
| 2  | 0.178     | 44.35 | 0.16        | 10.77      | 55.28 | 64.59      | -9.31      | QP      |
| 3  | 0.206     | 28.30 | 0.15        | 10.76      | 39.21 | 53.36      | -14.15     | Average |
| 4  | 0.226     | 40.36 | 0.14        | 10.75      | 51.25 | 62.61      | -11.36     | QP      |
| 5  | 0.274     | 37.91 | 0.13        | 10.74      | 48.78 | 60.98      | -12.20     | QP      |
| 6  | 0.365     | 30.70 | 0.12        | 10.73      | 41.55 | 58.61      | -17.06     | QP      |
| 7  | 0.417     | 24.58 | 0.12        | 10.73      | 35.43 | 47.51      | -12.08     | Average |
| 8  | 1.117     | 24.52 | 0.13        | 10.88      | 35.53 | 46.00      | -10.47     | Average |
| 9  | 1.959     | 26.77 | 0.14        | 10.96      | 37.87 | 46.00      | -8.13      | Average |
| 10 | 2.513     | 28.95 | 0.15        | 10.94      | 40.04 | 56.00      | -15.96     | QP      |
| 11 | 2.513     | 26.95 | 0.15        | 10.94      | 38.04 | 46.00      | -7.96      | Average |
| 12 | 4.049     | 24.41 | 0.18        | 10.89      | 35.48 | 46.00      | -10.52     | Average |

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Test Phase: Neutral

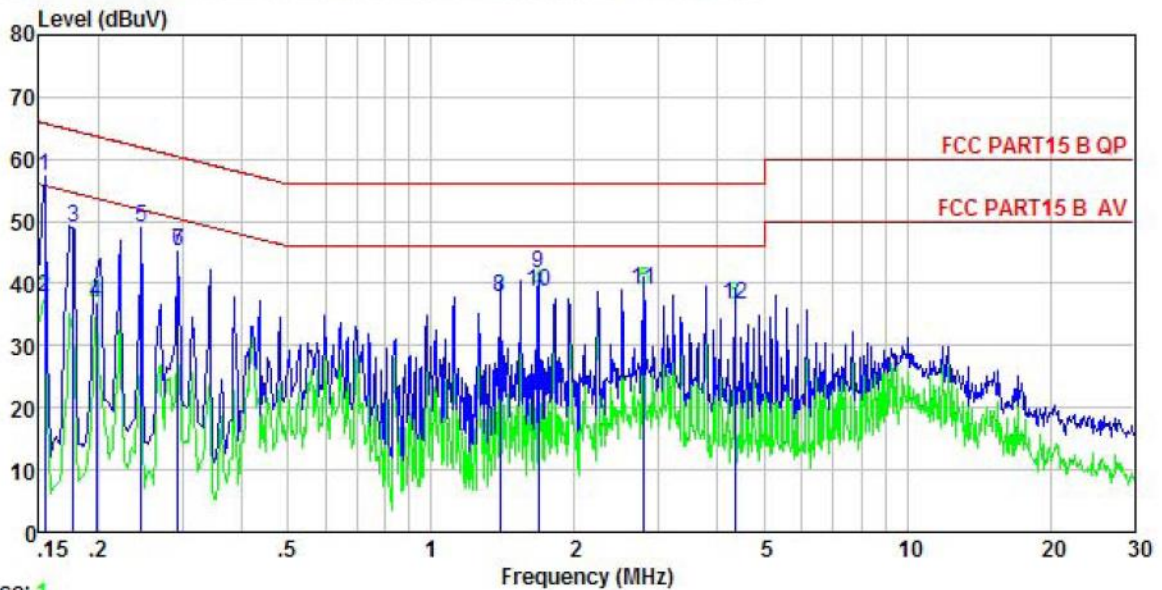


Trace: 1  
 Site : CCIS Shielding Room  
 Condition : FCC PART15 B QP LISN NEUTRAL  
 EUT : Wireless Charger  
 Model : APW002  
 Test mode : Charging Mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: Mike  
 Remark :

|      | Read  | LISN   | Cable | Limit | Over  |                |
|------|-------|--------|-------|-------|-------|----------------|
| Freq | Level | Factor | Loss  | Line  | Limit | Remark         |
| MHz  | dBuV  | dB     | dB    | dBuV  | dBuV  | dB             |
| 1    | 45.48 | 0.98   | 10.78 | 57.24 | 65.78 | -8.54 QP       |
| 2    | 26.05 | 0.98   | 10.78 | 37.81 | 55.78 | -17.97 Average |
| 3    | 37.17 | 0.95   | 10.77 | 48.89 | 64.64 | -15.75 QP      |
| 4    | 25.20 | 0.92   | 10.76 | 36.88 | 53.71 | -16.83 Average |
| 5    | 37.18 | 0.95   | 10.75 | 48.88 | 61.91 | -13.03 QP      |
| 6    | 33.44 | 0.97   | 10.74 | 45.15 | 60.41 | -15.26 QP      |
| 7    | 33.44 | 0.97   | 10.74 | 45.15 | 60.41 | -15.26 QP      |
| 8    | 26.04 | 0.97   | 10.91 | 37.92 | 46.00 | -8.08 Average  |
| 9    | 29.70 | 0.98   | 10.94 | 41.62 | 56.00 | -14.38 QP      |
| 10   | 26.84 | 0.98   | 10.94 | 38.76 | 46.00 | -7.24 Average  |
| 11   | 26.95 | 0.99   | 10.93 | 38.87 | 46.00 | -7.13 Average  |
| 12   | 24.68 | 1.00   | 10.88 | 36.56 | 46.00 | -9.44 Average  |

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.


## 6.4 20dB Bandwidth
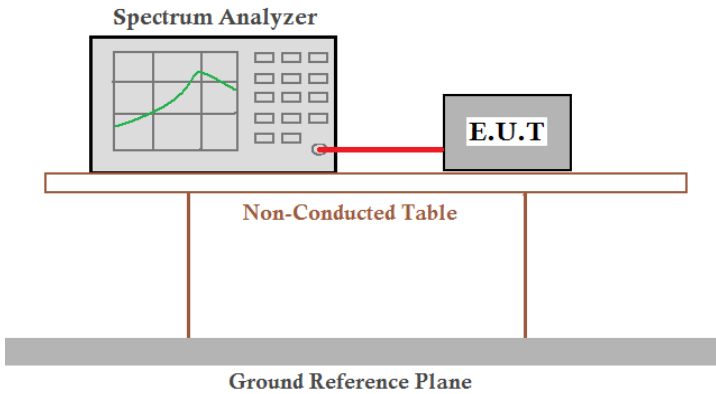
|                   |   |
|-------------------|---|
| Test Requirement: | FCC Part15 C Section 15.215 (c)   |
| Test Method:      | ANSI C63.4-2014 ; ANSI C63.10-2013  |
| Receiver setup:   | RBW=1 kHz, VBW=3 kHz, detector: Peak  |
| Limit:            | The fundamentelemission be kept within atleast the central 80% of the permittedband   |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.</li> <li>2. Set the EUT to proper test channel.</li> <li>3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points.</li> <li>4. Read 20dB bandwidth.</li> </ol> |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>  |
| Test Instruments: | Refer to section 5.9 for details  |
| Test mode:        | Refer to section 5.3 for details  |
| Test results:     | Passed  |

### Measurement Data

| 20dB bandwidth (kHz)                    | Limits |
|---|--------|
| 2.88                                    | N/A    |
| 3.06                                    |        |
| <i>Remark: For report purpose only.</i> |        |

Test plot as follows:

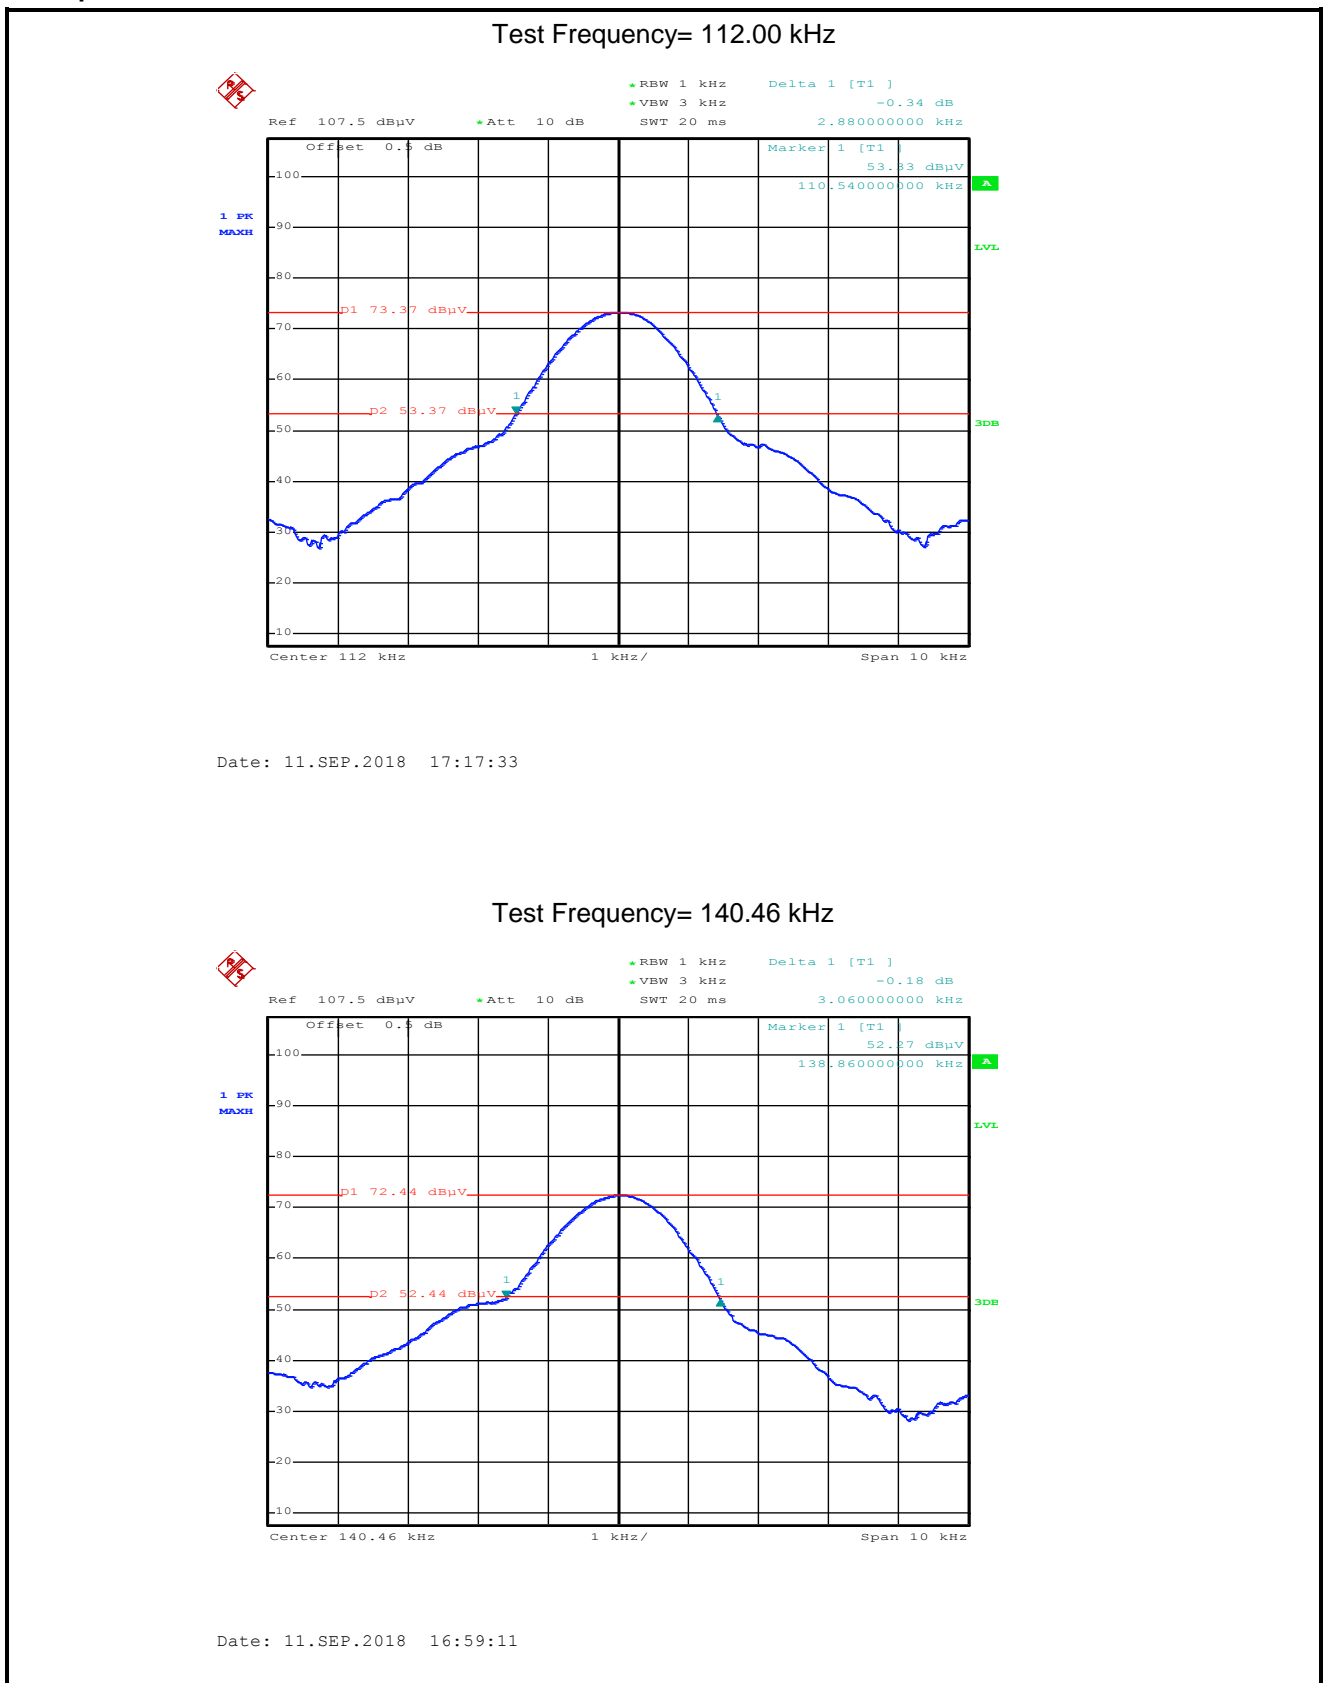

### Test Frequency= 140.46 kHz