

Page: 1 of 44

## ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

Applicant: Targus International LLC

1211 North Miller Street Anaheim, CA 92806 USA

**Product Name:** Wireless Receiver

**Brand Name: TARGUS** Model No.: AMP32R

**Model Difference:** N/A

**Report Number:** T190416W03-RP

FCC ID: OXM000099

**FCC Rule Part: §15.249** 

Issue Date: Jul. 15, 2019

**Date of Test:** Apr. 16, 2019 ~ Jun. 28, 2019

Date of EUT Received: Apr. 16, 2019

Compliance Certification Services Inc.Wugu Lab. Issued by:

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Tai-

wan. (R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this re-port. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Henry Chiang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。



Page: 2 of 44

# **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190416W03-RP	Rev.00	Initial creation of docu- ment	All	Jul. 03, 2019	Elle Chang
T190416W03-RP	Rev.01	Updated Operating Frequency and Channel	4, 10	Jul. 15, 2019	Elle Chang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 3 of 44

# **Contents**

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	. 10
4	DESCRIPTION OF TEST MODES	. 10
5	MEASUREMENT UNCERTAINTY	. 12
6	CONDUCTED EMISSION TEST	. 13
7	RADIATED EMISSION TEST	. 17
8	20 DB BANDWIDTH MEASUREMENT	. 39
9	FREQUENCY STABILITY	. 42
10	ANTENNA REQUIREMENT	44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 4 of 44

### **GENERAL INFORMATION**

### 1.1 Product Description

Product Name:	Wireless Receiver
Brand Name:	TARGUS
Model No.:	AMP32R
Model Difference:	N/A
Hardware Version:	AMP032TX V18
Software Version:	Targus032_OTA_V27_0
Power Supply:	5Vdc from USB port

Radio Technology:	2.4GHz Short Range Radio
Frequency Range:	2404-2477MHz
Channel number:	5 channels
Modulation type:	GFSK
Transmit Power:	70.80 dBµV/m
Antenna Designation:	Printed antenna, Gain: -2.28 dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 5 of 44

### **Test Methodology of Applied Standards**

FCC Part 15, Subpart C §15.249 ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

#### 1.3 **Test Facility**

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309) FCC Designation number: TW1309

#### 1.4 **Special Accessories**

There are no special accessories used while test was conducted.

#### 1.5 **Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 6 of 44

### 2 SYSTEM TEST CONFIGURATION

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

### 2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

### 2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the irrights intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the

t:(886-2) 2299-9720 f:(886-2) 2298-1882 www.sgs.tw www.ccsrf.com



Page: 7 of 44

#### 2.4 **Measurement Results Explanation Example**

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

#### 2.5 Limitation

# (2) Radiated Emission

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following.

Frequency	Field strength of	ld strength of Field strength of	
(MHz)	Fundamental	Harmonics	
902 – 928	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
2400 – 2483.5	50 mV/m	50 mV/m 500 uV/m 3	
	(94dBuV/m)	(54dBuV/m)	
5725 – 5875	50 mV/m	50 mV/m 500 uV/m	
	(94dBuV/m)	(54dBuV/m)	
24.0 – 24.25 GHz	250 mV/m	0 mV/m 2500 uV/m	
	(107.95dBuV/m)	(67.95dBuV/m)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 8 of 44

# (3) Radiated Emission

Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits as below, whichever is the lesser attenuation.

Frequency	Field strength	Distance (m)	Field strength at
(MHz)	μ <b>V/m</b>		3m dBμV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

# (4) Radiated Emission

For frequencies above 1000MHz, the above field strength limits are based on average limits. The peak filed strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

Re-

1. Emission level in dBuV/m=20 log (uV/m)

mark:

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$  15.205.
- 4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of ξ15.205, then the general radiated emission limits in  $\xi$  15.209 apply.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 9 of 44

#### **Configuration of Tested System** 2.6

# Fig. 2-1 Radiated Emission Configuration

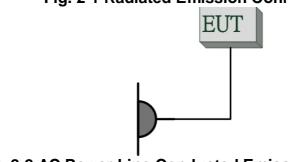


Fig. 2-2 AC Power Line Conducted Emission



Fig. 2-3 Conducted (Antenna Port) Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	2.4G Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Agilent	E3640A	MY53130054	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 10 of 44

### **SUMMARY OF TEST RESULTS**

FCC Rules Description Of Test		Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.249(a)(e)	Field Strength of the Fundamental signal	Compliant
§15.249(a), 15.209	Spurious Emission	Compliant
15.249(a), 15.205	Restricted bands around fundamental frequency (Radiated Emission)	Compliant
§15.215(c)	20dB Bandwidth Measurement	Compliant
15.249(b)(2)	Frequency Stability	Compliant

### **DESCRIPTION OF TEST MODES**

### 4.1 Operated in 2404 ~ 2477MHz Band

5 channels are provided.

ltem	Frequency
1	2404
2	2425
3	2442
4	2463
5	2477

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 11 of 44

#### 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### **RADIATED EMISSION TEST:**

TADIATED ENTION	011 120 11						
	RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED FREQUENCY	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
2.4G	2404 to 2477	2442	GFSK	N/A	MAIN		
	RADIATED	EMISSION TES	ST (ABOVE 1 GH	z)			
MODE	AVAILABLE CHANNEL	TESTED FREQUENCY	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
2.4G	2404 to 2477	2404, 2442, 2477	GFSK	N/A	MAIN		

#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 2.4GHz Wireless Transmitter for channel Low, Mid and High, the worst case H position was reported.

#### ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST					
MODE	AVAILABLE CHANNEL	TESTED FREQUENCY	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
2.4G	2404 to 2477	2404, 2442, 2477	GFSK	N/A	MAIN	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 12 of 44

### **MEASUREMENT UNCERTAINTY**

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Frequency Stability	+/- 147.256 Hz
20 dB Occupied Bandwidth	+/- 147.256 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.924 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

#### Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 13 of 44

### **CONDUCTED EMISSION TEST**

#### **Standard Applicable:** 6.1

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)				
MHz	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

#### Note

### **Measurement Equipment Used:**

	Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019				
<b>EMI Test Receiver</b>	R&S	ESCI	100064	07/24/2018	07/23/2019				
LISN	SCHWARZ- BECK	NSLK 8127	8127-541	01/31/2019	01/30/2020				
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020				
Software	EZ-EI	MC(CCS-3A1-CE	N/A	N/A					

### 6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。


<sup>1.</sup> The lower limit shall apply at the transition frequencies

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50



Page: 14 of 44

## Test SET-UP (Block Diagram of Configuration)

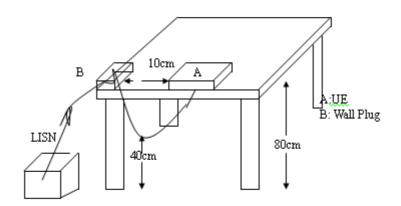

#### 6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

#### 6.6 Measurement Result:

Note: Refer to next page for measurement data and plots.

Note2: The \* reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 15 of 44

## AC POWER LINE CONDUCTED EMISSION TEST DATA

Description: Operation 2019/5/15 Temp.(°C)/Hum.(%): Line: **26.5(°C)/59%** 

**Test Volt-**AC 120V/60Hz Test By: Henry

age:

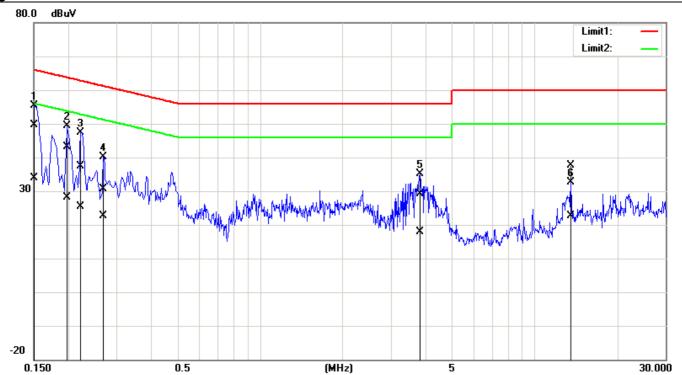

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1500	49.48	33.63	0.16	49.64	33.79	65.99	56.00	-16.35	-22.21	Pass
2	0.1980	43.07	27.86	0.15	43.22	28.01	63.69	53.69	-20.47	-25.68	Pass
3	0.2220	37.26	25.28	0.15	37.41	25.43	62.74	52.74	-25.33	-27.31	Pass
4	0.2700	30.41	22.37	0.15	30.56	22.52	61.12	51.12	-30.56	-28.60	Pass
5	3.8220	28.89	17.61	0.27	29.16	17.88	56.00	46.00	-26.84	-28.12	Pass
6	13.5620	37.07	21.97	0.54	37.61	22.51	60.00	50.00	-22.39	-27.49	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 16 of 44

Description: Operation Date: 2019/5/15 Line: Temp.(°C)/Hum.(%): **26.5(°C)/59%** 

**Test Volt-**AC 120V/60Hz Test By: Henry

age:

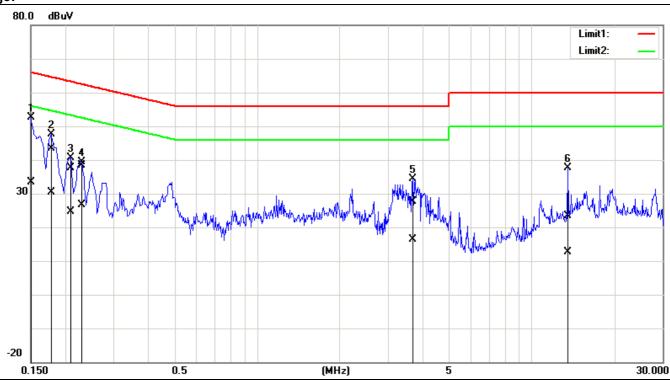

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1500	52.61	33.29	0.10	52.71	33.39	65.99	56.00	-13.28	-22.61	Pass
2	0.1780	43.17	30.33	0.10	43.27	30.43	64.57	54.58	-21.30	-24.15	Pass
3	0.2100	37.59	24.64	0.10	37.69	24.74	63.20	53.21	-25.51	-28.47	Pass
4	0.2300	38.33	26.60	0.10	38.43	26.70	62.45	52.45	-24.02	-25.75	Pass
5	3.7060	27.33	16.11	0.21	27.54	16.32	56.00	46.00	-28.46	-29.68	Pass
6	13.5620	23.00	12.25	0.44	23.44	12.69	60.00	50.00	-36.56	-37.31	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留%天。本報告未經本公司書面許可·不可部份複製。



Page: 17 of 44

### RADIATED EMISSION TEST

### 7.1. Standard Applicable


#### 7.2. Measurement Procedure

- 1. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequencv> 1GHz above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measured were complete.

### 7.3. Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-UP Frequency Below 30MHz. Turntable FUT Test Receiver  $0.8 \, m$ Ground Plane Coaxial Cable


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 18 of 44



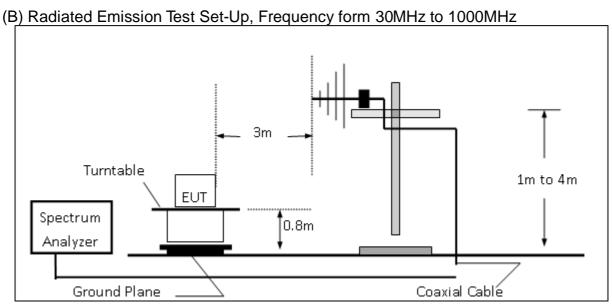

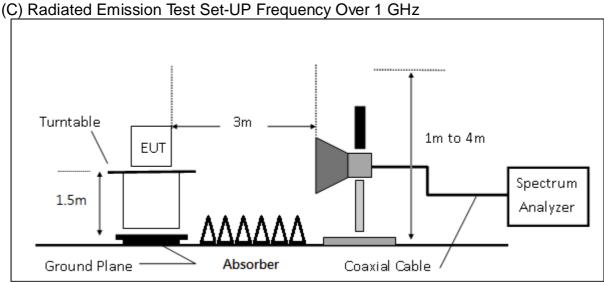

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留%天。本報告未經本公司書面許可·不可部份複製。



Page: 19 of 44

## 7.4. Measurement Equipment Used:

OCCA Chambar										
966A Chamber										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020					
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019					
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020					
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020					
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020					
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019					
Loop Antenna	COM-POWER	AL-130	121051	03/22/2019	03/21/2020					
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020					
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020					
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020					
DC Power Supply	Agilent	E3640A	MY40000811	12/11/2018	12/10/2019					
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R					
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R					
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R					
Software		e3 V6	6.11-20180413							

Note: N.C.R refers to Not Calibrated Required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 20 of 44

### 7.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where		CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual  $FS(dB\mu V/m) = SPA$ . Reading level(dB $\mu V$ ) + Factor(dB) Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre\_Amplifier Gain(dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 21 of 44

# 7.6. Measurement Result Field Strength of the Fundamental Signal


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2404 MHz Antenna Pol. : VERTICAL

Operation Mode : Main CH Low Engineer :Jerry

EUT Pol. :H Plan

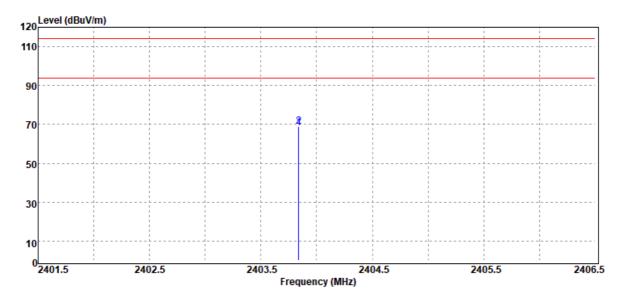

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2403.84	Average	71.60	-3.39	68.21	94.00	-25.79
2403.84	Peak	72.28	-3.39	68.89	114.00	-45.11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 22 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2404 MHz Antenna Pol. :HORIZONTAL

Operation Mode : Main CH Low Engineer :Jerry

EUT Pol. :H Plan

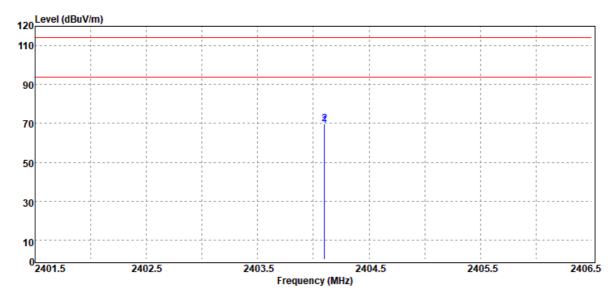

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2404.10	Average	72.41	-3.39	69.02	94.00	-24.98
2404.10	Peak	73.07	-3.39	69.68	114.00	-44.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 23 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2442 MHz Antenna Pol. : VERTICAL

Operation Mode : Main CH Mid Engineer :Jerry

EUT Pol. :H Plan

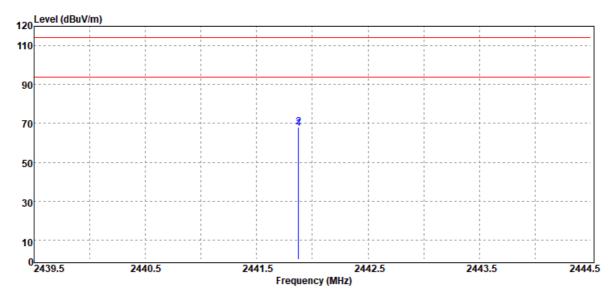

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
-	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2441.88	Average	70.52	-3.21	67.31	94.00	-26.69
2441.88	Peak	71.26	-3.21	68.05	114.00	-45.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 24 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2442 MHz Antenna Pol. :HORIZONTAL

Operation Mode : Main CH Mid Engineer :Jerry

EUT Pol. :H Plan

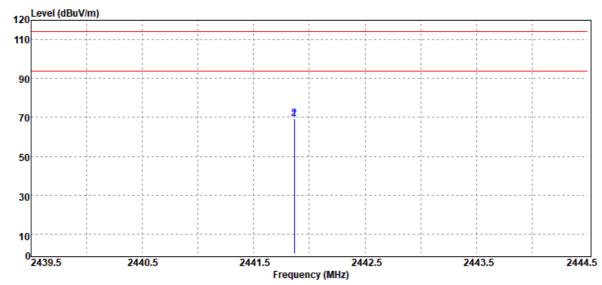

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2441.87	Average	71.95	-3.21	68.74	94.00	-25.26
2441.87	Peak	72.61	-3.21	69.40	114.00	-44.60

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 25 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2477 MHz Antenna Pol. : VERTICAL

Operation Mode : Main CH High Engineer :Jerry

EUT Pol. :H Plan

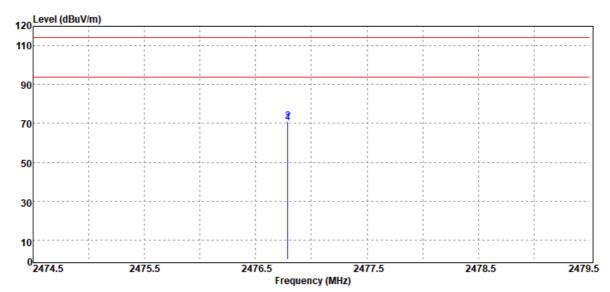

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2476.79	Average	73.13	-2.89	70.24	94.00	-23.76
2476.79	Peak	73.69	-2.89	70.80	114.00	-43.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 26 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2477 MHz Antenna Pol. :HORIZONTAL

Operation Mode : Main CH High Engineer :Jerry

EUT Pol. :H Plan

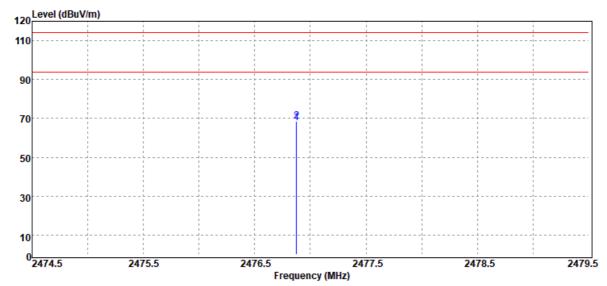

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2476.88	Average	70.51	-2.89	67.62	94.00	-26.38
2476.88	Peak	71.22	-2.89	68.33	114.00	-45.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 27 of 44

# Restricted bands around fundamental frequency


Project Number: T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

:2404 MHz Frequency Antenna Pol. : VERTICAL

Operation Mode :BE CH Low Engineer :Jerry

EUT Pol. :H Plan

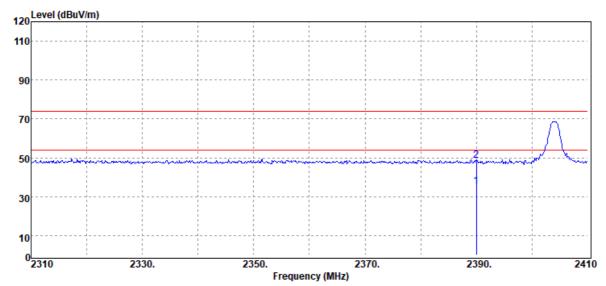

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	38.84	-3.38	35.46	54.00	-18.54
2390.00	Peak	52.04	-3.38	48.66	74.00	-25.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 28 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2404 MHz Antenna Pol. :HORIZONTAL

Operation Mode :BE CH Low Engineer :Jerry

EUT Pol. :H Plan

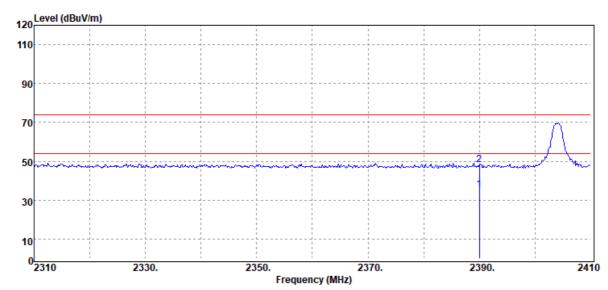

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
-	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	38.74	-3.38	35.36	54.00	-18.64
2390.00	Peak	51.71	-3.38	48.33	74.00	-25.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 29 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2477 MHz Antenna Pol. : VERTICAL

Operation Mode :BE CH High Engineer :Jerry

EUT Pol. :H Plan

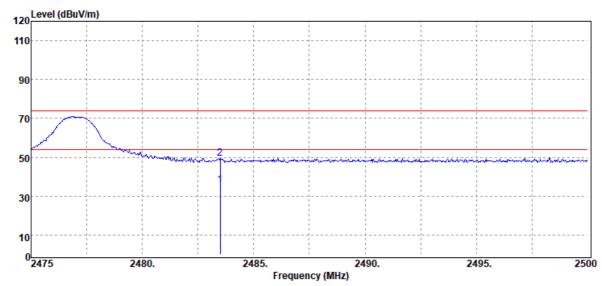

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	38.38	-2.83	35.55	54.00	-18.45
2483.50	Peak	52.14	-2.83	49.31	74.00	-24.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



:H Plan

2480.

EUT Pol.

0 2475

Report No.: T190416W03-RP

2500


Page: 30 of 44

Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2477 MHz Antenna Pol. :HORIZONTAL

Operation Mode :BE CH High Engineer :Jerry

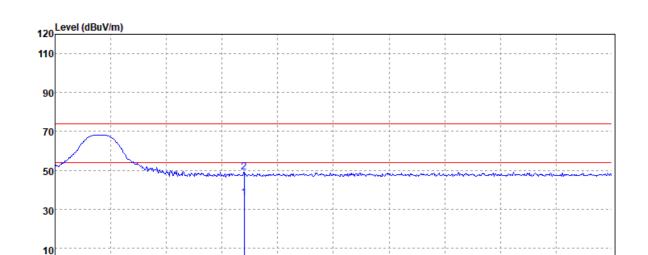

2485.

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	38.53	-2.83	35.70	54.00	-18.30
2483.50	Peak	51.63	-2.83	48.80	74.00	-25.20

Frequency (MHz)

2495.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 31 of 44

### Radiated Spurious Emission Measurement Result (Below 1GHz)


**Project Number** : T190416W03 **Test Date** :2019-04-23

**Operation Band** Temp./Humi. :20/58

Fundamental Frequen-:2442 MHz Engineer :Jerry

Antenna :VERTICAL Measurement **Operation Mode** :Tx CH Mid Pol.

EUT Pol. :H Plan

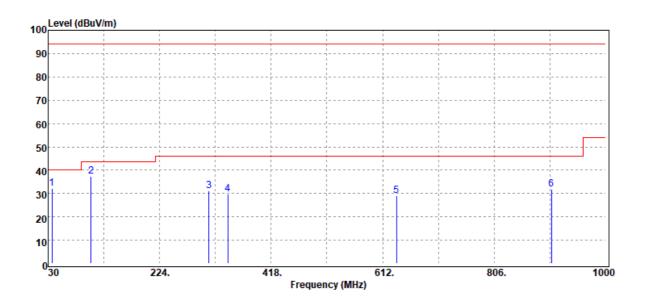

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
36.79	Peak	39.39	-7.08	32.31	40.00	-7.69
104.69	Peak	48.48	-11.18	37.30	43.50	-6.20
309.36	Peak	39.10	-7.91	31.19	46.00	-14.81
342.34	Peak	36.90	-7.19	29.71	46.00	-16.29
636.25	Peak	29.37	-0.30	29.07	46.00	-16.93
905.91	Peak	27.62	4.12	31.74	46.00	-14.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 32 of 44


: T190416W03 **Project Number Test Date** :2019-04-23

**Operation Band** :2.4G Temp./Humi. :20/58

Fundamental Frequen-:2442 MHz Engineer :Jerry СУ

Antenna :VERTICAL Measurement **Operation Mode** :Tx CH Mid Pol.

EUT Pol. :H Plan

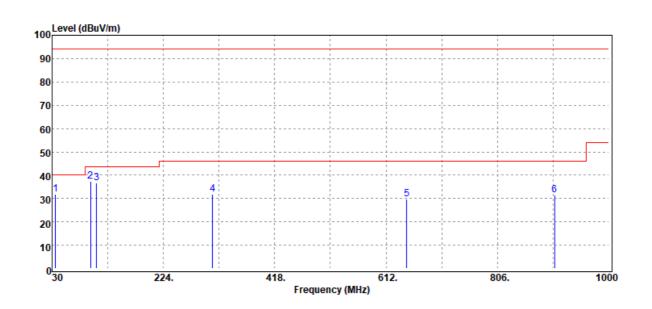

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
35.82	Peak	38.27	-6.35	31.92	40.00	-8.08
96.93	Peak	50.70	-13.46	37.24	43.50	-6.26
107.60	Peak	47.42	-10.67	36.75	43.50	-6.75
309.36	Peak	39.77	-7.91	31.86	46.00	-14.14
647.89	Peak	29.90	-0.06	29.84	46.00	-16.16
905.91	Peak	27.25	4.12	31.37	46.00	-14.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 33 of 44

### Radiated Spurious Emission Measurement Result (Above 1GHz)


Project Number: T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2404 MHz Antenna Pol. : VERTICAL

Operation Mode: Tx CH Low Engineer :Jerry

EUT Pol. :H Plan

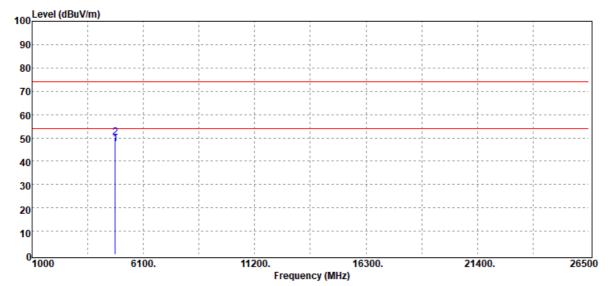

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4808.00	Average	44.43	2.84	47.27	54.00	-6.73
4808.00	Peak	47.17	2.84	50.01	74.00	-23.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 34 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2404 MHz Antenna Pol. :HORIZONTAL

Operation Mode: Tx CH Low Engineer :Jerry

EUT Pol. :H Plan

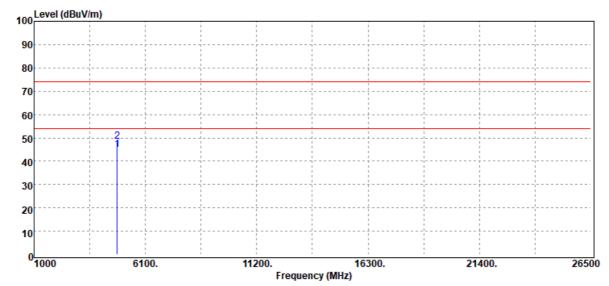

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
-	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4808.00	Average	42.24	2.84	45.08	54.00	-8.92
4808.00	Peak	45.50	2.84	48.34	74.00	-25.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 35 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2442 MHz Antenna Pol. : VERTICAL

Operation Mode :Tx CH Mid Engineer :Jerry

EUT Pol. :H Plan

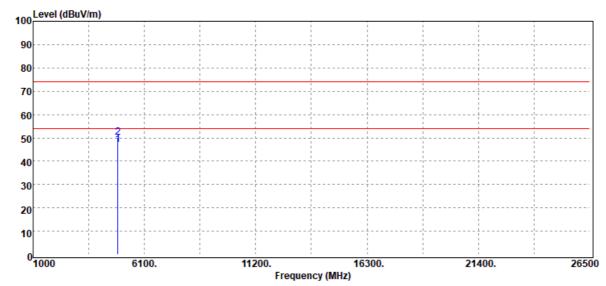

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
-	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4884.00	Average	44.14	3.05	47.19	54.00	-6.81
4884.00	Peak	47.09	3.05	50.14	74.00	-23.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 36 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2442 MHz Antenna Pol. :HORIZONTAL

Operation Mode :Tx CH Mid Engineer :Jerry

EUT Pol. :H Plan

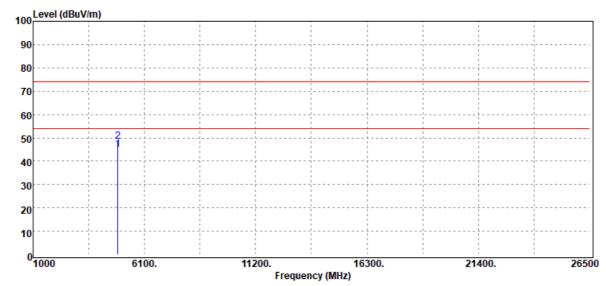

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
-	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4884.00	Average	42.10	3.05	45.15	54.00	-8.85
4884.00	Peak	45.32	3.05	48.37	74.00	-25.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 37 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2477 MHz Antenna Pol. : VERTICAL

Operation Mode: Tx CH High Engineer :Jerry

EUT Pol. :H Plan

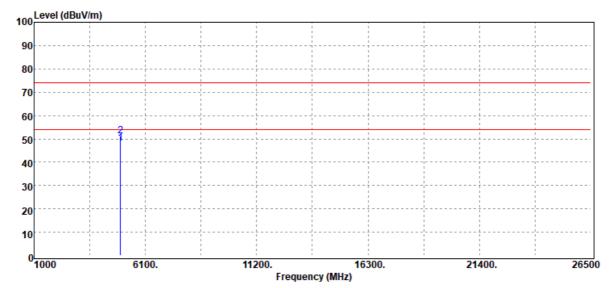

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
-	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4954.00	Average	44.36	3.80	48.16	54.00	-5.84
4954.00	Peak	47.28	3.80	51.08	74.00	-22.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 38 of 44


Project Number :T190416W03 Test Date :2019-06-19

Operation Band :2.4G Temp./Humi. :20/58

Frequency :2477 MHz Antenna Pol. :HORIZONTAL

Operation Mode: Tx CH High Engineer :Jerry

EUT Pol. :H Plan

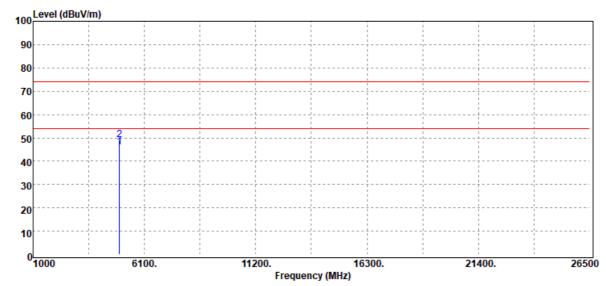

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
-	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4954.00	Average	42.15	3.80	45.95	54.00	-8.05
4954.00	Peak	45.38	3.80	49.18	74.00	-24.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page: 39 of 44

### 20 dB BANDWIDTH MEASUREMENT

### **8.1 Measurement Procedure**

- The EUT was placed on a turn table which is 0.8m above ground plane.
- Set ETU normal operating mode.
- 3. Set SPA Center Frequency = fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 3MHz.
- 4. Set SPA Max hold. Mark peak, -20dB.

### 8.2 Test SET-UP (Block Diagram of Configuration)



### 8.3 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
	A ail oat				11/20/2010	
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019	
DC Block	PASTER- NACK	PE8210	RF256	02/26/2019	02/25/2020	
DC Power Supply	Agilent	E3640A	MY53130054	09/03/2018	09/02/2019	
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020	
Thermostat- ic/Hrgrosatic Chamber	TAICHY	MHG-150LF	930619	10/08/2018	10/07/2019	

#### 8.4 Measurement Results:


Frequency (MHz)	20dB Bandwidth (MHz)
2404	0.697
2442	0.693
2477	0.700

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。


Page: 40 of 44



# 20dB Bandwidth Test Plot CH Low

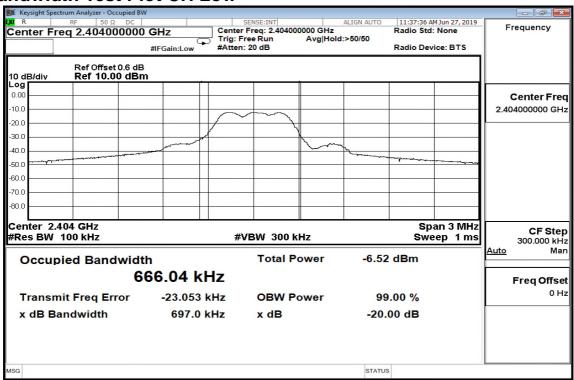

## 20dB Bandwidth Test Plot CH Mid

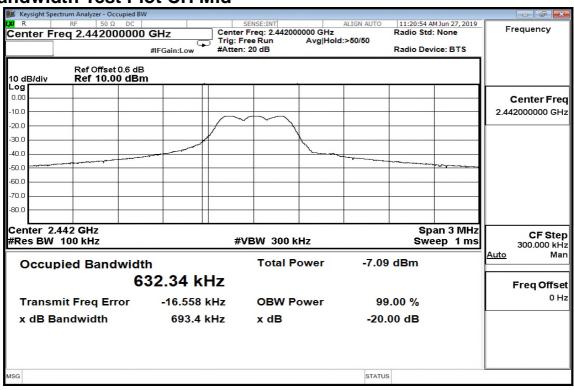


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製。



Page: 41 of 44

# 20dB Bandwidth Test Plot CH High

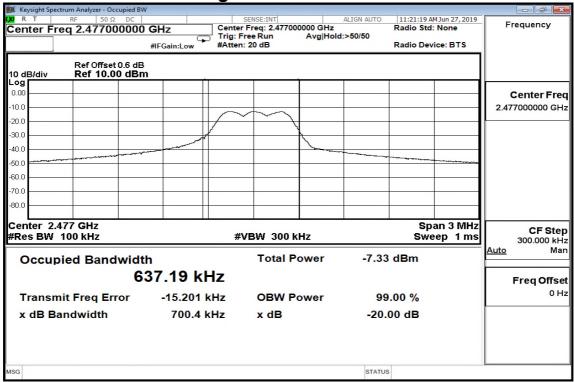

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 42 of 44

### FREQUENCY STABILITY

### 9.1Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within ±0.001% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 9.2 Measurement Procedure

- 1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
- 2. Set EUT as normal operation.
- 3. Turn the EUT on and couple its output to spectrum.
- 4. Turn the EUT off and set the chamber to the highest temperature specified.
- 5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
- 6. Repeat step with the temperature chamber set to the lowest temperature.

### 9.3 Measurement Equipment Used:


Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019	
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020	
DC Power Supply	Agilent	E3640A	MY53130054	09/03/2018	09/02/2019	
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020	
Thermostat- ic/Hrgrosatic Cham- ber	TAICHY	MHG-150LF	930619	10/08/2018	10/07/2019	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 43 of 44

## 9.4 Test SET-UP (Block Diagram of Configuration)

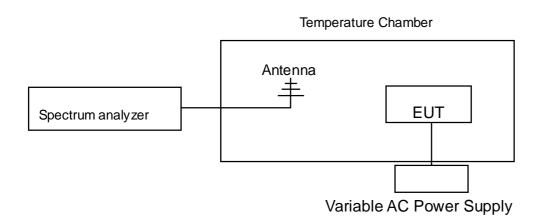

### 9.5 Measurement Results:

#### 2404 MHz

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)
Vdc	Temperature (°C)	(MHz)	Della (IVI IZ)	Little (IXI IZ)
4.25	20	2403.99707	0.02000	+/- 240.4
5.75	20	2403.99704	0.05000	+/- 240.4
5	20	2403.99709	0.00000	+/- 240.4
5	-20	2403.99706	0.03000	+/- 240.4
5	50	2403.99715	-0.06000	+/- 240.4

#### 2442 MHz

Power Supply	Environment	Frequency	Dolto (KHz)	Limit (ICLI=)
Vdc	Temperature (°C)	(MHz)	Delta (KHz)	Limit (KHz)
4.25	20	2441.99682	-0.68000	+/- 244.2
5.75	20	2441.99764	-1.50000	+/- 244.2
5	20	2441.99614	0.00000	+/- 244.2
5	-20	2441.99716	-1.02000	+/- 244.2
5	50	2441.99635	-0.21000	+/- 244.2

#### 2477 MHz

Power Supply	Environment	Frequency	Dolto (KHz)	Limit (KU=)
Vdc	Temperature (°C)	(MHz)	Delta (KHz)	Limit (KHz)
4.25	20	2476.99635	0.07000	+/- 247.7
5.75	20	2476.9973	-0.88000	+/- 247.7
5	20	2476.99642	0.00000	+/- 247.7
5	-20	2476.99674	-0.32000	+/- 247.7
5	50	2476.99658	-0.16000	+/- 247.7

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留%天。本報告未經本公司書面許可·不可部份複製。



Page: 44 of 44

#### 10 ANTENNA REQUIREMENT

### 10.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

#### 10.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。