

TEST REPORT

Test Report Reference: R40451/1 Edition 2

Equipment under Test: TSS/RE3T

Applicant: BERU AG

Manufacturer: BERU AG

**Test Laboratory
(CAB)
accredited by
DATech e.V.
in compliance with DIN EN ISO/IEC 17025
under the
Reg. No. TTI-P-G071/94-11
and listed by
FCC 31040/SIT1300F2**

Contents:	Page
1 IDENTIFICATION	3
1.1 APPLICANT	3
1.2 MANUFACTURER	3
1.3 DATES	3
1.4 TEST LABORATORY	4
1.5 RESERVATION	4
1.6 NORMATIVE REFERENCES	4
1.7 TEST RESULTS	4
2 TECHNICAL DATA OF EQUIPMENT	5
2.1 DEVICE UNDER TEST	5
2.2 PERIPHERY DEVICES	5
2.3 MODIFICATIONS	5
3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES	6
4 LIST OF TEST MODULES	7
4.1 EMISSION	7
5 METHOD OF MEASUREMENT	8
5.1 RADIATED EMISSION 30 MHz to 4 GHz	8
6 TEST RESULTS EMISSION TEST	10
6.1 PRELIMINARY RADIATED EMISSION TEST (30 MHz to 1 GHz)	10
6.2 FINAL RADIATED EMISSION TEST (30 MHz to 1 GHz)	12
6.3 RADIATED EMISSION TEST (1 GHz to 4 GHz)	14
6.4 BANDWIDTH OF EMISSION	17
7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	18
8 LIST OF ANNEXES	21

1 IDENTIFICATION

1.1 APPLICANT

Name:	BERU AG
Address:	Mörikestraße 155 71602 Ludwigsburg
Country:	Germany
Name for contact purposes:	Mr. Zlatan Saric
Phone:	+49-7141-132-798
Fax:	+49-7141-132-589
Mail address:	Zlatan.saric@beru.de
Applicant represented during the test by the following person:	-

1.2 MANUFACTURER

Name:	BERU AG
Address:	Mörikestraße 155 71602 Ludwigsburg
Country:	Germany
Name for contact purposes:	Mr. Zlatan Saric
Phone:	+49-7141-132-798
Fax:	+49-7141-132-589
Mail address:	Zlatan.saric@beru.de
Applicant represented during the test by the following person:	-

1.3 DATES




Date of receipt of test sample:	17 May 2004
Start of test:	17 May 2004
Finish of test:	18 May 2004

1.4 TEST LABORATORY

The tests were carried out at:

PHOENIX TEST-LAB GmbH
Königswinkel 10
D-32825 Blomberg
Germany

Phone: +49 (0) 52 35 / 95 00-0
Fax: +49 (0) 52 35 / 95 00-10

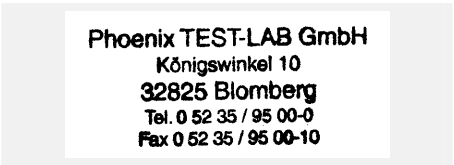Test engineer:	Raimund Blask		14 June 2004
	name	signature	date
Test report checked:	Bernd Steiner		14 June 2004
	name	signature	date
			
stamp			

1.5 RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents without written permission of the accredited test laboratory PHOENIX TEST-LAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TEST-LAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TEST-LAB Logo and the TEST REPORT REFERENCE.

1.6 NORMATIVE REFERENCES

- [1] **ANSI C63.4-1992** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC 47 CFR Part 15 (December 2003)** Radio Frequency Devices

1.7 TEST RESULTS

The requirements of this test document are fulfilled by the equipment under test. The complete test results are presented in the following.

2 TECHNICAL DATA OF EQUIPMENT

2.1 DEVICE UNDER TEST

Type of equipment:	Tire pressure monitoring transmitter*
Type designation:	TSS/RE3T
Serial No.:	4200005528
Highest operating frequency:	315.000 MHz*

* declared by the applicant

The following external I/O cables were used:

Cable	Length	Shielding	Connector
-	-	-	-

2.2 PERIPHERY DEVICES

The ancillary equipment mentioned below was in use:

No ancillary equipment necessary.

2.3 MODIFICATIONS

No modifications necessary to fulfil the requirements.

3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES

The transmitter was tested in normal operation mode:


To stimulate the transmitter the EUT (TSS/RE3T) was triggered by a 125 kHz-Transmitter (Type BERU TSS/TS) to transmit every 1 second.

The transmitter was operating on the following frequency:

Channel:	Transmit frequency:
1	315.000 MHz

The physical boundaries of the Equipment Under Test are shown below.

Physical boundaries of the EUT:

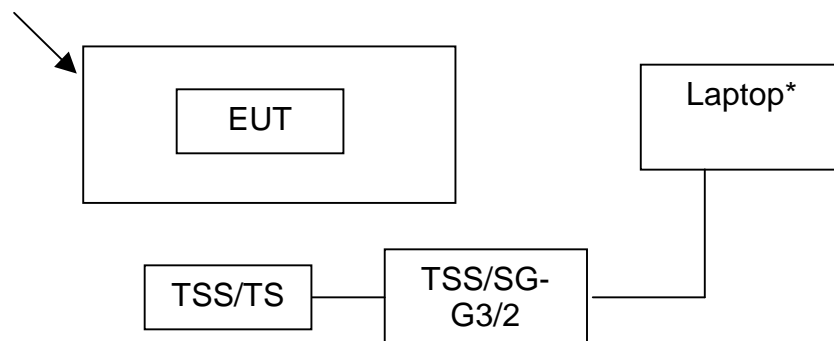

* Laptop with Vector Tool “CANoe” to establish CAN communication to Control Unit (TSS/SG-G3/2). Vector Tool “CANape” to stimulate the Transmitter (TSS/RE3T) transmitting every second RF-telegrams.

4 LIST OF TEST MODULES

4.1 EMISSION

Field strength of spurious emissions FCC 47 CFR Part 15 section 15.231 (b)						
No.	Application	Frequency range	Limits	Reference standard	Remark	Status
1	Intentional radiator	30 to 960 MHz above 960 MHz	55.62 dB μ V/m at 3 m 55.62 dB μ V/m at 3 m	ANSI C63.4 (1992)	-	Passed
Field strength of fundamental FCC 47 CFR Part 15 section 15.231 (b)						
No.	Fundamental frequency	Transmitter frequency	Limits	Reference standard	Remark	Status
2	260 – 470 MHz	315.000 MHz	6041.67 μ V/m or 75.62 dB μ V/m at 3m	ANSI C63.4 (1992);	-	Passed
Bandwidth of emission FCC 47 CFR Part 15 section 15.231 (c)						
No.	Application	Frequency range	Limits	Reference standard	Remark	Status
3	Intentional radiator	70 to 900 MHz	0.25% of the center frequency (20 dB-points)	-	-	Passed

5 METHOD OF MEASUREMENT

5.1 RADIATED EMISSIONS 30 MHz TO 4 GHz

The radiated emission measurement is divided into two stages.


Preliminary measurement:

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-1992 [1].

The frequency range 30 MHz to 4 GHz will be measured with an EMI Receiver set to MAX Hold mode. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	100 kHz
1 GHz to 4 GHz	1 MHz

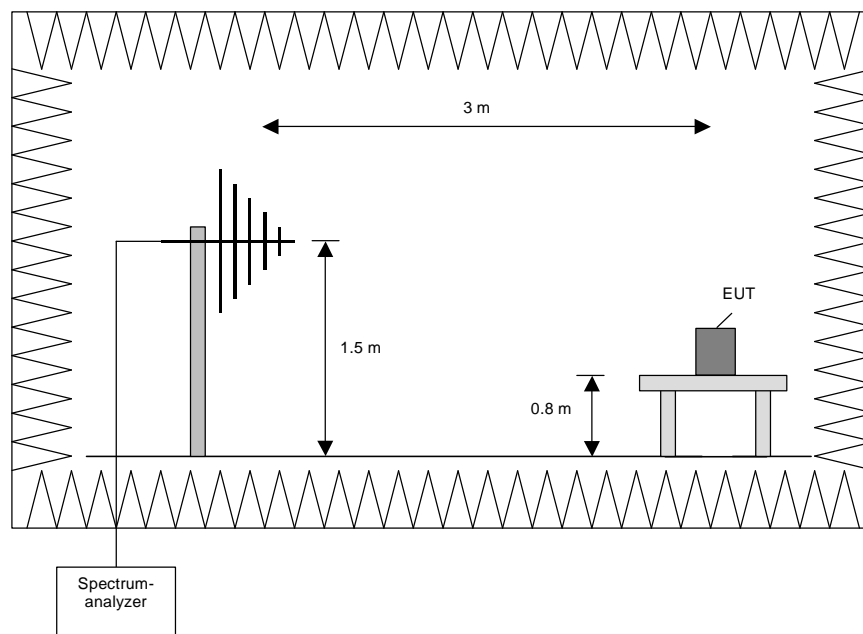

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 200 MHz, 200 MHz to 1 GHz and 1 GHz to 4 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °
2. Manipulate the system cables within the range to produce the maximum level of emission
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum
5. Measure the frequency of 3 highest detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat steps 1) to 4) with the other orthogonal axes of the EUT if handheld equipment
7. Repeat steps 1) to 5) with the vertical polarisation of the measuring antenna.

Final Measurement:

In the second stage a final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

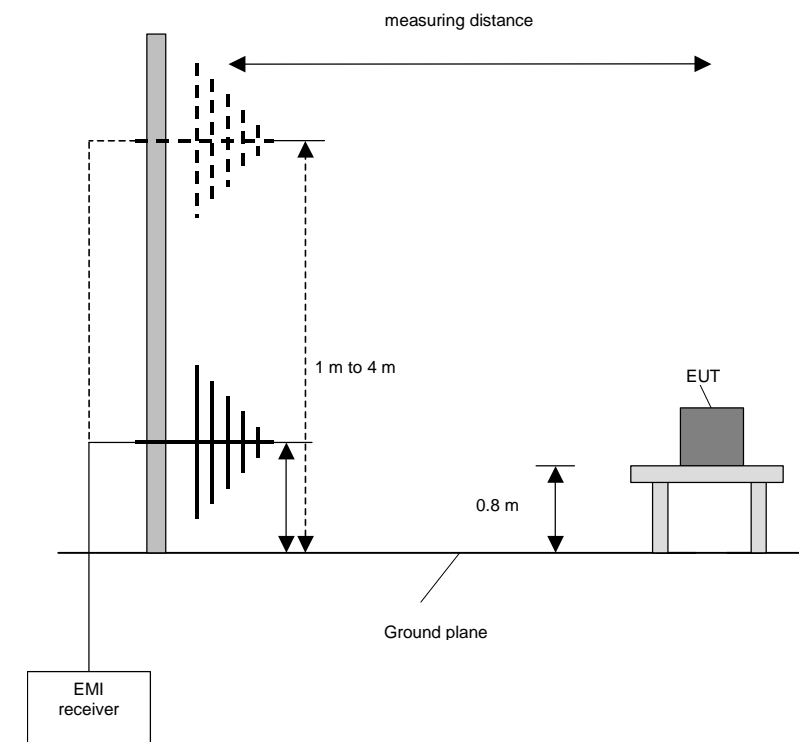

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m
- 7) Set the antenna to the position where the maximum value is found
- 8) Measure while moving the turntable +/- 45 °
- 9) Set the turntable to the azimuth where the maximum value is found
- 10) Measure with Final detector (Peak) and note the value
- 11) Repeat 5) to 10) for each frequency
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT if handheld equipment.

6 TEST RESULTS EMISSION TEST


6.1 PRELIMINARY RADIATED EMISSION TEST (30 MHz to 1 GHz)

Ambient temperature	20 °C	Relative humidity	60 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a wooden table of a height of 0.8 m.
The distance between EUT and antenna was 3 m.

Cable guide: No cable necessary.


Test record: The test was carried out in normal operation-mode.

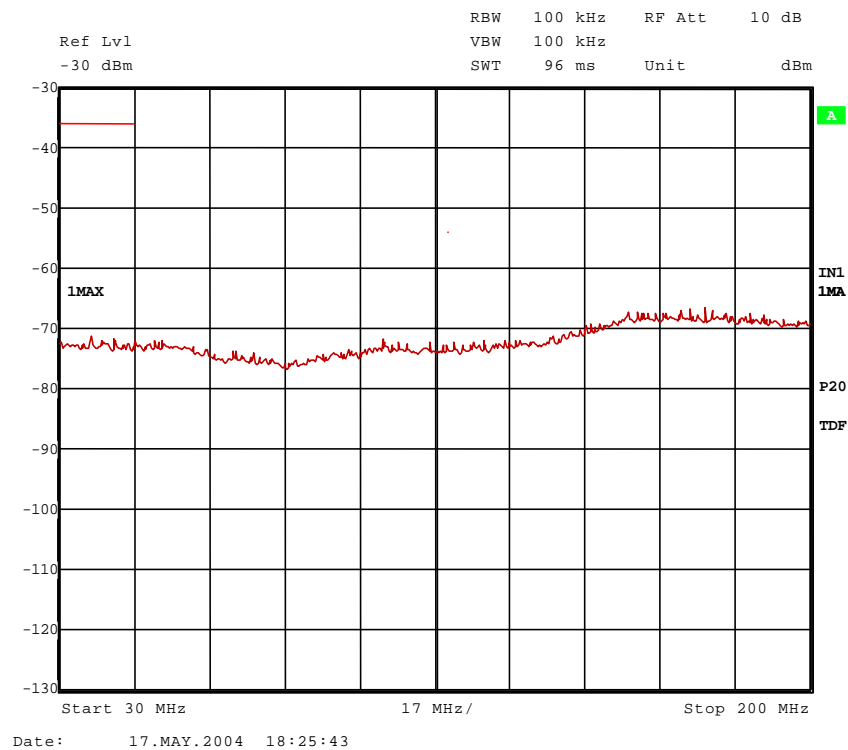

40451tx3.wmf: 30 MHz to 200 MHz



TEST REPORT REFERENCE: R40451/1_Edition 2

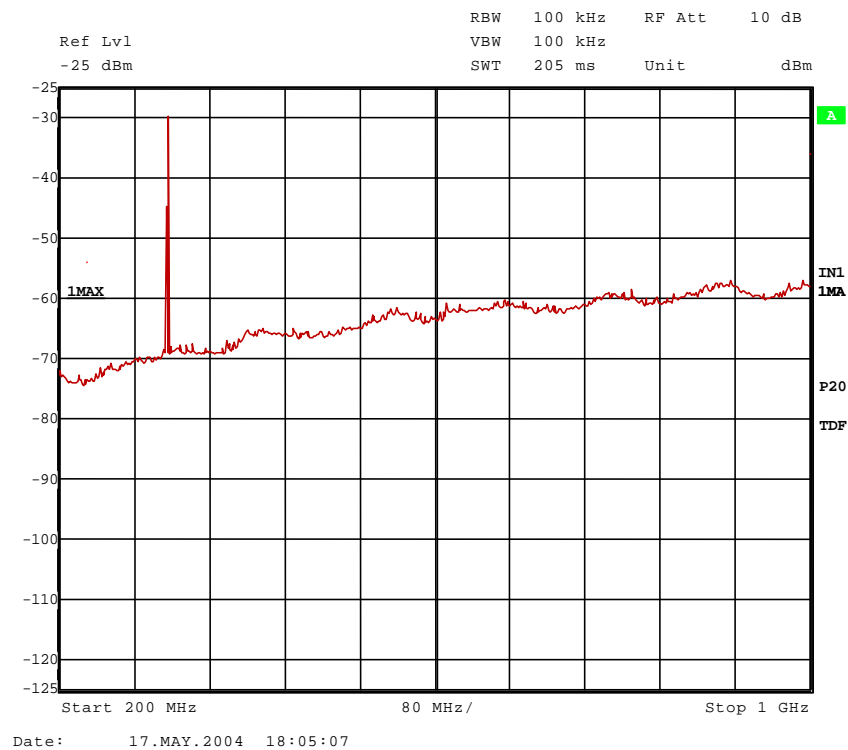

40451tx4.wmf: 200 MHz to 1000 MHz

The following significant frequencies were found during the preliminary radiated emission test:

315.000 MHz, 630.000 MHz, 945.000 MHz

These frequencies have to be measured on the open area test site.

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 35, 37


6.2 FINAL RADIATED EMISSION TEST (30 MHz to 1 GHz)

Ambient temperature	20 °C	Relative humidity	60 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a wooden table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: No cable necessary.

Test record: The test was carried out in normal operation-mode.

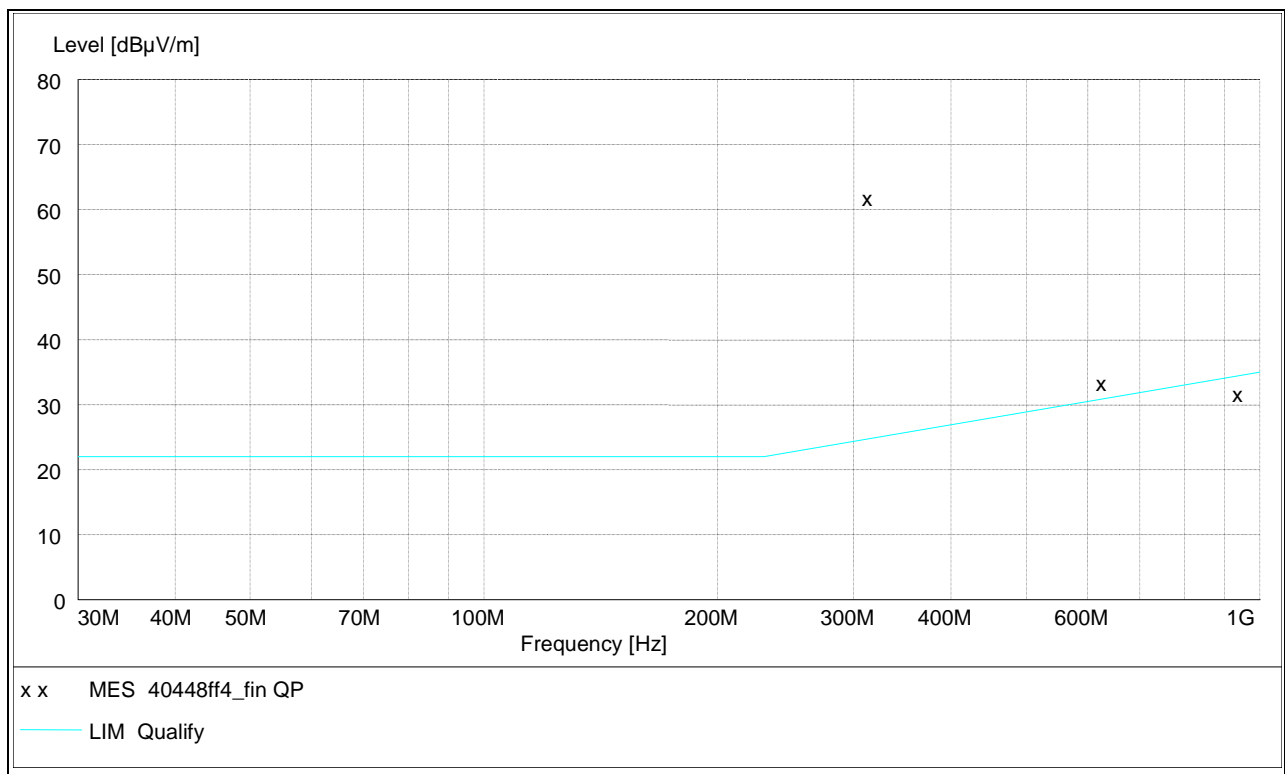

Data record name: 40448ff4

of 18 May 2004

Continued next page:

TEST REPORT REFERENCE: R40451/1_Edition 2

Continued:

The field strength E was calculated as follows:

Peak E-field: $F = U + k$ (k = antenna factor + cable loss – amplifier gain)
 Duty cycle correction factor: $D = 20 \log (10 \text{ ms} / 920 \text{ ms}) = -39.7 \text{ dB}$ (Maximum 20 dB)
 Calculated averaged field: $E = F + D$

Freq.: MHz	Peak- reading U: dBμV	Trans- ducer k: dB/m	Peak- E-field F: dBμV/m	Duty Cycle D: dB	Calculated averaged field E: dBμV/m	Limit: dBμV/m	Margin: dB	Result:
315.000	47.0	15.0	62.0	-20	42.0	75.6	33.6	Passed
630.000	10.8	22.7	33.5	-20	13.5	55.6	42.1	Passed
945.000	4.5	27.3	31.8	-20	11.8	55.6	43.8	Passed

TEST EQUIPMENT USED FOR THE TEST:

14 – 20

TEST REPORT REFERENCE: R40451/1_Edition 2


6.3 RADIATED EMISSION TEST (1 GHz to 4 GHz)

Ambient temperature	20 °C	Relative humidity	50 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a wooden table of a height of 0.8 m.
The distance between EUT and antenna was 3 m.

Cable guide: No cable necessary.

Test record: The test was carried out in normal operation-mode.

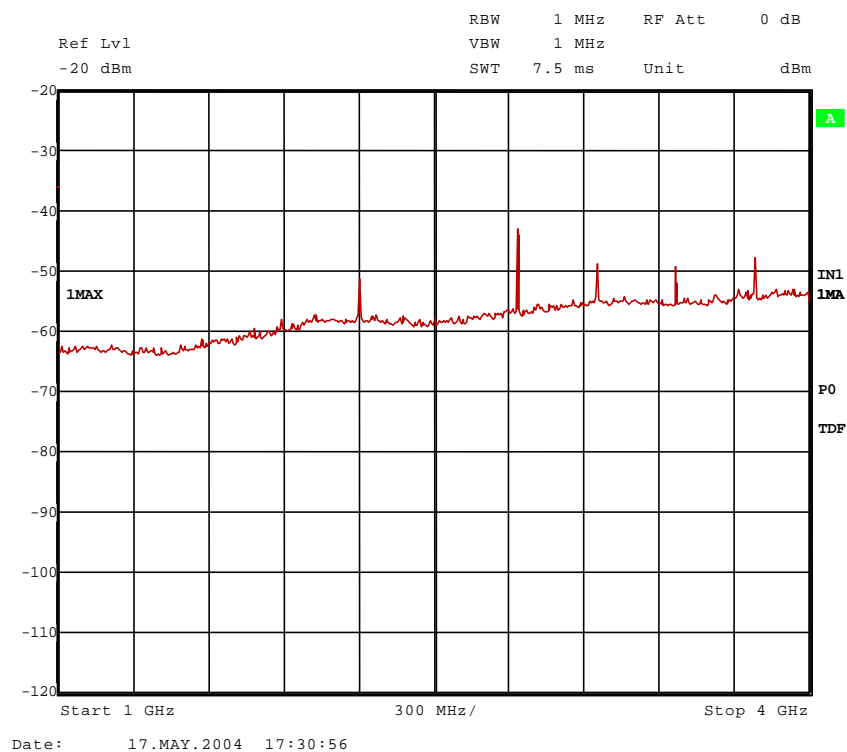


40451tx5.wmf: 1 GHz to 4 GHz




TEST REPORT REFERENCE: R40451/1_Edition 2

Measurement results: Duty cycle

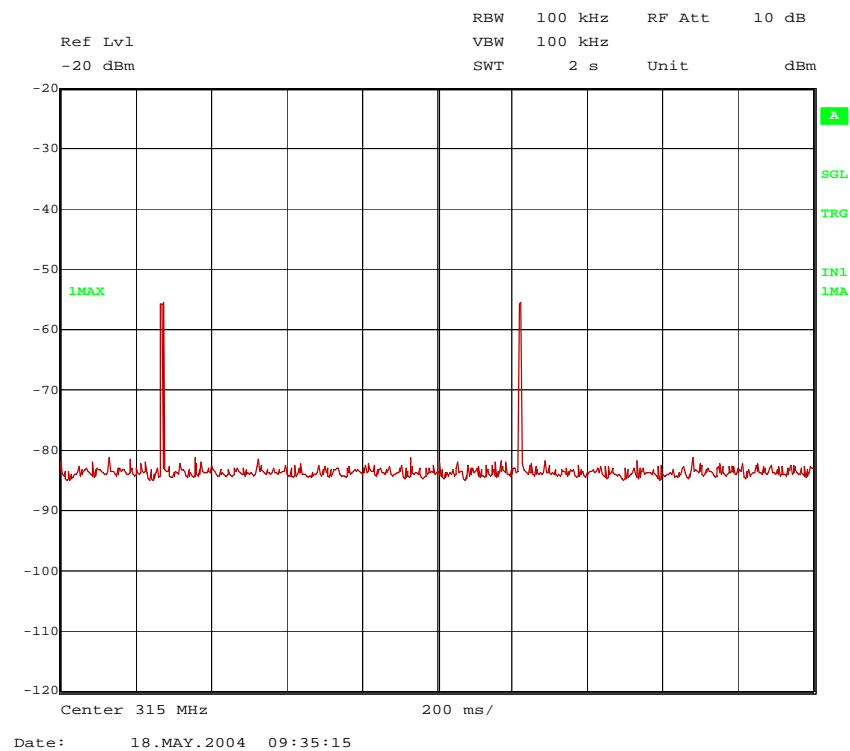

40451duty1.wmf: Transmitter on / off – time: t (off-time) = 920 ms

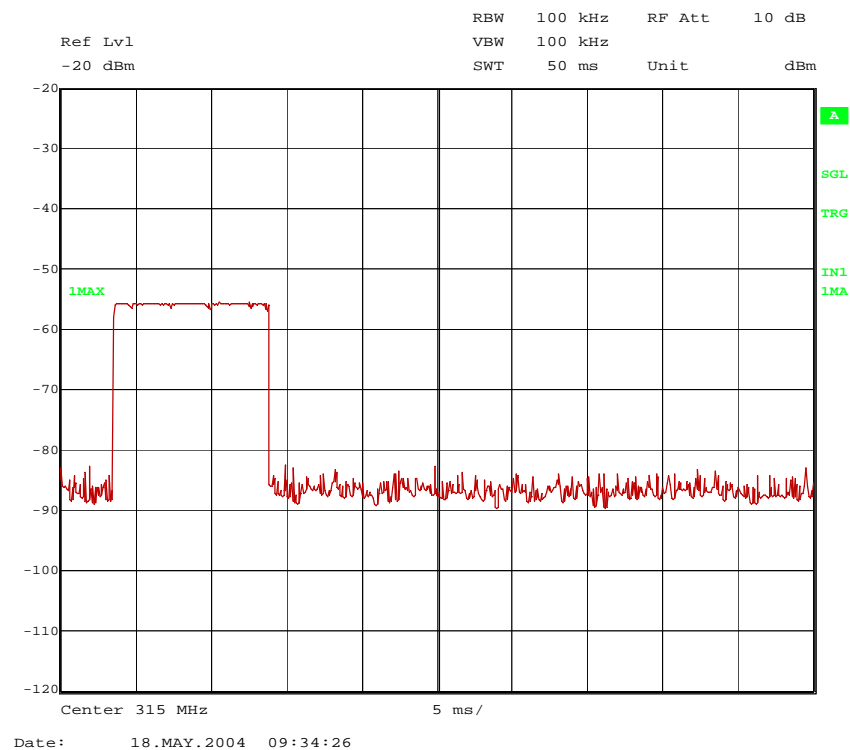

40451_6duty1.wmf: Transmitter on time: t (on-time) = 10 ms

The field strength E was calculated as follows:

Peak E-field: $F = U + k$ (k = antenna factor + cable loss – amplifier gain)
Duty cycle correction factor: $D = 20 \log (10 \text{ ms} / 920 \text{ ms}) = -39.7 \text{ dB}$ (Maximum 20 dB)
Calculated averaged field: $E = F + D$

2 highest spurious frequencies:

Freq.: MHz	Peak-reading U: dBμV	Trans-ducer k: dB/m	Peak-E-field F: dBμV/m	Duty Cycle D: dB	Calculated averaged field E: dBμV/m	Limit: dBμV/m	Margin: dB	Result:
2835.000	45.0	7.5	52.2	-20	32.2	55.6	23.4	Passed
3465.000	55.2	9.0	46.2	-20	26.2	55.6	29.4	Passed

2 highest spurious frequencies in the restricted bands:

Freq.: MHz	Peak-reading U: dBμV	Trans-ducer k: dB/m	Peak-E-field F: dBμV/m	Duty Cycle D: dB	Calculated averaged field E: dBμV/m	Limit: dBμV/m	Margin: dB	Result:
3150.000	38.7	8.5	47.2	-20	27.2	54	26.8	Passed
3780.000	36.7	10.5	47.2	-20	27.2	54	26.8	Passed

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:


14 – 20, 42 – 44, 47



6.4 BANDWIDTH OF EMISSION

Ambient temperature	20 °C	Relative humidity	50 %
---------------------	-------	-------------------	------

Test record: The test was carried out in normal operation-mode.

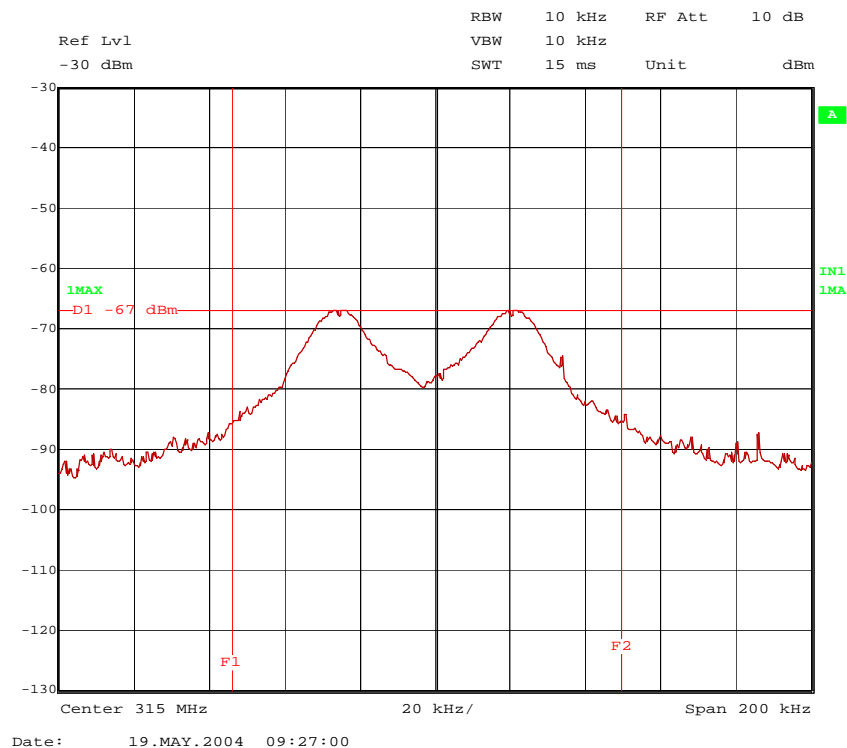

40451obw1.wmf: Bandwidth of emission

f (low) Lower frequency: (- 20 dB-point)	f (high) Higher frequency: (- 20 dB-point)	Bandwidth of emission: $B = f(\text{high}) - f(\text{low})$	Limit:	Result:
314.946 MHz	315.050 MHz	104 kHz	0.7875 MHz	Passed

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 47

7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

Emission measurement at AC mains and DC in / out ports at M4					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
1	Shielded chamber M4	-	Siemens	B83117S1-X158	480088
2	Measuring receiver	ESAI	Rohde & Schwarz	831953/001 833181/018	480025 480026
3	LISN	NSLK8128	Schwarzbeck	8128155	480058
4	DC-filter	B84266-A21-E13	Siemens	940164525	480099
5	AC-filter	B84299-D87-E3	Siemens	930262292	480097
6	EMI-Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M5					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
7	Fully anechoic chamber M5	-	Siemens	B83177-S1-X156	480073
8	Measuring receiver	ESVS30	Rohde & Schwarz	829673/012	480024
9	Controller	HD100	Deisel	100/324	480067
10	Antenna support	MA240	Deisel	228/314	480069
11	Turntable	DS412	Deisel	412/317	480070
12	Antenna	CBL6112C	Chase	2689	480327
13	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M6					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
14	Open area test site	-	Phoenix Test-Lab	-	480085
15	Measuring receiver	ESVS30	Rohde & Schwarz	829673/012	480024
16	Controller	HD100	Deisel	100/670	480139
17	Turntable	DS420HE	Deisel	420/620/80	480087
18	Antenna support	AS615P	Deisel	615/310	480086
19	Antenna	CBL6111 A	Chase	1643	480147
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M8					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
21	Fully anechoic chamber M8	-	Siemens	B83117-E7019-T231	480190
22	Measuring receiver	ESMI	Rohde & Schwarz	843977/001	480179

TEST REPORT REFERENCE: R40451/1_Edition 2

				843530/018	480180
23	Measuring receiver	ESCS 30	Rohde & Schwarz	828985/014	480270
24	Controller	HD100	Deisel	100/427	480181
25	Turntable	DS420	Deisel	420/435/97	480186
26	Antenna support	AS615P	Deisel	615/310	480187
27	Antenna	CBL6112 A	Chase	2034	480185
28	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M20					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303
30	Measuring receiver	ESMI	Rohde & Schwarz	843977/001 843530/018	480179 480180
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355
32	Controller	HD100	Deisel	100/670	480326
33	Turntable	DS420HE	Deisel	420/620/80	480315
34	Antenna support	AS615P	Deisel	615/310	480187
35	Antenna	CBL6112 B	Chase	2688	480328
36	Antenna	3115 A	EMCO	9609-4918	480183
37	RF-cable No. 30	RTK 081	Rosenberger	-	410141
38	EMI Software	ES-K1	Rohde & Schwarz	-	480111
39	RF-cable No. 5	RTK 081	Rosenberger		410097

Ancillary equipment used for testing					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
40	Outdoor test site	-	Phoenix Test-Lab	-	480293
41	Loop antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
42	Power supply	TOE 8852	Toellner	51712	480233
43	EMI test receiver	ESPC	Rohde & Schwarz	843756/006	480150
44	Signal generator	SMHU	Rohde & Schwarz	844170/017	480266
45	Climatic chamber	GTS500.40	GTS	1660	490073
46	Loop Antenna $\varnothing = 225$ mm	-	Phoenix Test-Lab	-	410085
47	RF-cable No. 11	RG223	Phoenix-Test-Lab	-	410103

All used measurement equipment was calibrated (if necessary). The calibration intervals and the calibration history will be given out on request.

8 LIST OF ANNEXES

ANNEX A	PHOTOGRAPHS OF THE TEST SET-UPS:	2 pages
	Test set-up preliminary radiated emission measurement	40451emi13.jpg
	Test set-up final radiated emission measurement	40451emi28.jpg
ANNEX B	EXTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	1 page
	EUT, front view	40451eut16.jpg