

FCC ID: OYGTSSRE3DD

EMI - TEST REPORT

- FCC Part 15.231 -



Test Report No. :	T35913-00-00HU	15. May 2012 Date of issue
--------------------------	-----------------------	-------------------------------

Type / Model Name : TSSRE3Dd / TSSRE3De / TSSRE3Df

Product Description : Tire Safety System / Wheel Electronic

Applicant : Huf Electronics Bretten GmbH

Address : Gewerbestr. 40

75015 Bretten Germany

Manufacturer : Huf Electronics Bretten GmbH

Address : Gewerbestr. 40

75015 Bretten Germany

Licence holder : Huf Electronics Bretten GmbH

Address : Gewerbestr. 40

75015 Bretten Germany

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------



The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: OYGTSSRE3DD

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>SUMMARY</u>	4
3	<u>EQUIPMENT UNDER TEST</u>	5
3.1	Photo documentation of the EUT – See Attachment A	5
3.2	Power supply system utilised	5
3.3	Short description of the Equipment under Test (EUT)	5
4	<u>TEST ENVIRONMENT</u>	6
4.1	Address of the test laboratory	6
4.2	Environmental conditions	6
4.3	Statement of the measurement uncertainty	6
4.4	Measurement Protocol for FCC, VCCI and AUSTEL	6
4.5	Determination of worst case measurement conditions	7
5	<u>TEST CONDITIONS AND RESULTS</u>	8
5.1	Conducted emissions	8
5.2	Field strength of the fundamental wave	9
5.3	Spurious emissions (magnetic field) 9 kHz – 30 MHz	11
5.4	Spurious emissions radiated (electric field)	13
5.5	Correction for pulse operation (duty cycle)	17
5.6	Emission bandwidth	22
5.7	On / Off Period	25
5.8	Signal deactivation	30
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	34
	<u>ATTACHMENT</u>	A

FCC ID: OYGTSSRE3DD

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (October, 2011)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2011)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.231	Periodic operation in the band 40.66-40.70 MHz and above 70 MHz

ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
------------------	---

ANSI C95.1: 1992	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
------------------	--

CISPR 16-4-2: 2003	Uncertainty in EMC measurement
--------------------	--------------------------------

CISPR 22: 2005 EN 55022: 2006	Information technology equipment
----------------------------------	----------------------------------

FCC ID: OYGTSSRE3DD

2 SUMMARY

GENERAL REMARKS:

All tests have been performed on sample TSSRE3Dd which are in original state.

For activating the EuT a "TSS Trigger & Receiver Test System" was used.
With this device it is possible to set the EuT in all operation modes.

There are three different types of wheel electronics TSSRE3Dd, TSSRE3De and TSSRE3Df.
The PCB, Battery and all other parts are technical identical.

The EUT has an incorporated antenna and is powered by a primary battery.

For detailed technical information about the function of the differences, please refer to the operational description.

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 27. February 2012

Testing concluded on : 29. February 2012

Checked by:

Tested by:

Thomas Weise
Dipl.-Ing.(FH)
Laboratory Manager

Markus Huber

FCC ID: OYGTSSRE3DD

3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EUT – See Attachment A

3.2 Power supply system utilised

Power supply voltage : 3.0 V / DC (Lithium battery)

3.3 Short description of the Equipment under Test (EUT)

The Wheel electronics measure the tire pressure and the air temperature in the tire and send these via a set radio route together with the residual battery life and the code (ID) to the digital antenna. For exactly description please refer to the technical documents.

Number of tested samples: 1
Serial number: Pre production sample

EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- Tx mode at frequency 315 MHz (see Determination of worst case measurement conditions)

-

-

EUT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurements:

- <u>BERU TSS Trigger & Receiver Tool</u>	Model : <u>01C7E22314000</u>
- <u>Teelefant Software</u>	Model : <u>supplied by manufacturer</u>
- <u>Triggersender-Antenna</u>	Model : <u>Ford, #A39</u>
- <u>Mean Well Power supply</u>	Model : <u>GS18A24-P1J, #R091219272</u>
- <u>Lap top</u>	Model : <u>Fa. mikes-testingpartners gmbh</u>
- <u></u>	Model : <u></u>

FCC ID: OYGTSSRE3DD

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

mikes-testingpartners gmbh
Ohmstrasse 2-4
94342 STRASSKIRCHEN
GERMANY

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader may notice that tolerances within the calibration of the equipment and facilities may cause additional uncertainty. The measurement uncertainty is calculated for all measurements listed in this test report acc. to CISPR 16-4-2 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurement“ and documented in the mikes-testingpartners gmbh quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, mikes-testingpartners gmbh, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component diversity and modifications in production process of devices may result in additional deviation. If necessary, refer to the test lab for the actual measurement uncertainty for the specific test. The manufacturer has the sole responsibility of continued compliance of the EUT.

4.4 Measurement Protocol for FCC, VCCI and AUSTEL

4.4.1 GENERAL INFORMATION

4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

FCC ID: OYGTSSRE3DD

4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

4.5 Determination of worst case measurement conditions

According the declaration of the manufacturer complete tests were performed on the TSSRE3Dd Wheel Electronic. All three models have exactly the same hardware and software version included and have the same housing.

The only difference is the setting of some software parameters which will be set at the EOL test of our assembly line over the LF interface (125 kHz). One of this parameters is related to the Burst Mode (BMT):

- BMT on (TSSRE3Dd) → first 36 RF transmissions after rotating detection with burst interval of 15 seconds, then fall back to standard transmitting one time per minute.
- BMT off (TSSRE3De & TSSRE3Df) → after rotating detection RF transmitting one time per minute.

Tire Pressure Range:	Auto Range 57.5/115 PSI	High Pressure 115 PSI	Low Pressure 50 PSI
Model Number:	TSSRE3Dd	TSSRE3De	TSSRE3Df
Parameter "Auto Range":	On	Off	Off
Parameter "Pressure Range":	Low	High	Low
Parameter "Burst Mode (BMT)":	On	Off	Off

The main functions that the WE will perform are:

- Regularly measure the tire pressure and temperature
- Monitor if the wheel is moving
- Periodically transmit tire pressure and temperature using an RF link and a specific protocol
- Monitor condition of the battery and notify the system during an RF transmission if the battery performance degrades
- Notify the system if there are abnormal pressure variations (leak) in the tire
- Monitor the transponder input for valid LF field timing (only tool LF, no LF transmitter in vehicle)

The test report covers following operation modes where the Wheel Electronic has the max. Tx on times.

- ⇒ RF transmission intervals with pressure change detected – Rotating mode
 - If the pressure change was a **decrease** of pressure, the WE transmits immediately every time it detects the 2.0-psi or greater pressure changes from the last transmission. Then the WE will make two other independent pressure measurements and transmits them during the 5 seconds following the RPC transmission and each measurement/transmission will have a silent period of 2 seconds between each transmission
- ⇒ RF transmission interval with no pressure change detected – Stationary & Interim mode
- ⇒ RF transmission interval with no pressure change detected – Rotating mode
 - In **Rotating Mode** the WE transmits every 60 s (a random generator with a jitter of 100 ms to 5 s ensures that no periodic signal is generated) data messages. Each RF telegram Burst consists out of 4 identical FSK frames with a random interframe space of 100 ms to 154 ms.
 - In **Stationary & Interim Mode** the WE transmits every 6 h a RF transmission (a random generator with a jitter of 100 ms to 5 s ensures that no periodic signal is generated). Each RF telegram Burst consists out of 9 ASK frames with a interframe space of 52.5 ms, followed by 4 FSK frames with a interframe space of 100 ms.

FCC ID: OYGTSSRE3DD

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: NONE

5.1.2 Photo documentation of the test set-up

5.1.3 Applicable standard

According to FCC Part 15C, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

5.1.4 Description of Measurement

The measurements are performed on the power interface 120 V / 60 Hz using a receiver, which has CISPR characteristic bandwidth, quasi-peak detection and line impedance stabilization network with 50Ω/50 μH (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 cm above the floor and is positioned 40 cm from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

To convert between dBμV and μV, the following conversions apply:

$$\text{dB}\mu\text{V} = 20 \log \mu\text{V}$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

5.1.5 Test result

Remarks: The measurement is not applicable.

The EuT has no AC mains connections.

The EuT is separated powered by a 3.0 V battery.

FCC ID: OYGTSSRE3DD**5.2 Field strength of the fundamental wave**

For test instruments and accessories used see section 6 Part CPR 2.

5.2.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

5.2.2 Photo documentation of the test set-up

FCC ID: OYGTSSRE3DD

5.2.1 Applicable standard

According to FCC Part 15C, Section 15.231(e):

The field strength of emissions from intentional radiators shall not exceed the effective field strength limits.

5.2.2 Description of Measurement

The radiated power of the fundamental wave from the EUT is measured in the frequency range of 30 to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the EUT will be in accordance to ANSI C63.4. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the centre in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the centre of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 metres horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres, measurement scans are made in horizontal and vertical antenna polarization's and the EUT is rotated 360 degrees.

The resolution bandwidth during the measurement is as follows:

30 MHz – 1000 MHz: RBW: 120 kHz

Example:

Frequency (MHz)	Level (dBμV)	+	Factor (dB)	=	Level dB(μV/m)	-	Limit dB(μV/m)	=	Delta (dB)
170.5	5	+	20	=	25	-	30	=	-5

5.2.3 Test result

Frequency (MHz)	Level Pk (dBμV)	Level QP (dBμV)	Bandwidth (kHz)	Correct. factor (dB)	Duty Cycle Correct. factor (dB)	Corrected Pk level dB(μV/m)	Effective limit dB(μV/m)	Delta (dB)
315.0	57.7	56.2	120	17.3	-14.33	60.7	67.7	-7.0

Limit according to FCC Section 15.231(e):

Frequency (MHz)	Field strength of fundamental @ 3m		Effective limit for 315.0 MHz	
	(μV/m)	dB(μV/m)	(μV/m)	dB(μV/m)
40.66 – 40.70	1000	60		
70 - 130	500	54		
130 - 174	500 to 1500*	54 to 63.5*		
174 - 260	1500	63.5		
260 - 470	1500 to 5000*	63.5 to 74*	2416.77	67.66
Above 470	5000	81.9		

*Linear interpolation

The requirements are **FULFILLED**.

Remarks:

The level of fundamental field strength is identically in both operation modes.

FCC ID: OYGTSSRE3DD**5.3 Spurious emissions (magnetic field) 9 kHz – 30 MHz**

For test instruments and accessories used see section 6 Part **SER 1**.

5.3.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

5.3.2 Photo documentation of the test set-up**5.3.3 Applicable standard**

According to FCC Part 15C, Section 15.209:

The emissions from intentional radiators shall not exceed the effective field strength limits.

5.3.4 Description of Measurement

The magnetic field strength from the EUT will be measured on an open area test site in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The set up of the Equipment under test will be in accordance to ANSI C63.4. The antenna was positioned 3, 10 or 30 meters horizontally from the EUT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions. In the case where larger measuring distances are required the results will extrapolated based on the values measured on the closer distances according to Section 15.31(f)(2)(2). The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209(d)(2).

FCC ID: OYGTSSRE3DD

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: RBW: 200 Hz

150 kHz – 30 MHz: RBW: 9 kHz

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level dB(μ V/m)	-	Limit dB(μ V/m)	=	Delta (dB)
1.705	5	+	20	=	25	-	30	=	-5

5.3.5 Test result

Measurement distance: 3 m

Frequency [MHz]	L: QP [dB μ V]	L: AV [dB μ V]	Bandwidth [kHz]	Correct. [dB]	L: QP [dB μ V/m]	L: AV [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
0.009-0.150			0.2	20				>20
0.150-30.0			9.0	20				>20

Limit according to FCC Part 15C Section 15.209(a):

Frequency (MHz)	Field strength of spurious emissions		Measurement distance
	(μ V/m)	dB(μ V/m)	(metres)
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.

Remarks:

FCC ID: OYGTSSRE3DD**5.4 Spurious emissions radiated (electric field)**

For test instruments and accessories used see section 6 Part **SER 2**, **SER 3**.

5.4.1 Description of the test location

Test location: OATS1
Anechoic Chamber A2

Test distance: 3 metres

5.4.2 Photo documentation of the test set-up

FCC ID: OYGTSSRE3DD

5.4.3 Applicable standard

According to FCC Part 15C, Section 15.231(e), Section 15.209(a) and Section 15.205(a):
The emissions from intentional radiators shall not exceed the effective field strength limits.

5.4.4 Description of Measurement

The radiated power of the spurious emission from the EUT is measured in the frequency range of 30 to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 cm above the ground plane. Floor standing equipment is placed directly on the turntable ground plane. The set up of the EUT will be in accordance to ANSI C63.4. The interface cables closer than 40 cm to the ground plane are bundled in the centre in a serpentine fashion so they are at least 40 cm away from the ground plane. Cables to simulators/testers are routed through the centre of the table to a screen room located outside the test area. To locate maximum emission from the test sample the antenna is varied in height from 1 to 4 m, measurement scans are made in horizontal and vertical antenna polarization and the EUT is turned 360 degrees.

The radiated power of the spurious emission from the EUT is measured in the frequency range above 1 GHz using a spectrum analyser and appropriate linear polarised antennas. Measurements are made in the horizontal and vertical polarization of the antenna. The set up of the EUT will be in accordance to ANSI C63.4. The interface cables closer than 40 cm to the ground plane are bundled in the centre in a serpentine fashion so they are at least 40 cm away from the ground plane. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration results in the highest emission and therefore shall be used for final testing. During the tests the EUT is turned 360 degrees to find the maximum level of emission. For testing above 1 GHz, if the emission level of the EUT in peak mode complies with the average limit is 20 dB lower, then testing will be stopped and peak values of the EUT will be reported, otherwise the emission will be measured in average mode again and reported.

The resolution bandwidth during the measurement is as follows:

30 MHz – 1000 MHz: RBW: 120 kHz

1000 MHz – 18000 MHz RBW: 1 MHz

Example:

Frequency (MHz)	Level (dBμV)	+	Factor (dB)	=	Level dB(μV/m)	-	Limit dB(μV/m)	=	Delta (dB)
170.5	5	+	20	=	25	-	30	=	-5

5.4.5 Test result f < 1 GHz

Frequency (MHz)	Level Pk (dBμV)	Level QP (dBμV)	Bandwidth (kHz)	Correct. factor (dB)	Corrected QP level dB(μV/m)	Effective limit dB(μV/m)	Delta (dB)
630.0	19.8	17.2	120	24.3	41.6	47.7	-14.0
945.0	15.4	13.9	120	28.8	43.0	47.7	-12.6

FCC ID: OYGTSSRE3DD

5.4.6 Test result f > 1 GHz

Frequency (MHz)	L: PK (dBμV)	L: AV (dBμV)	Bandwidth (kHz)	Correct. (dB)	Corrected AV level dB(μV/m)	Effective limit dB(μV/m)	Delta (dB)
1260.0	59.0	28.0	1000	-13.7	14.3	54.0	-39.7
1575.0	59.1	32.5	1000	-15.6	16.9	54.0	-37.1
1890.0	55.7	32.9	1000	-12.0	20.9	54.0	-33.1
2205.0	65.5	43.1	1000	-12.1	31.0	54.0	-23.0
2520.0	64.6	41.3	1000	-9.8	31.5	54.0	-22.5
2835.0	72.3	52.0	1000	-10.1	41.8	54.0	-12.2
3150.0	67.6	46.3	1000	-8.8	37.5	54.0	-16.5
3465.0	57.4	37.0	1000	-9.0	27.9	54.0	-26.1
3780.0	53.2	32.0	1000	-8.8	23.3	54.0	-30.7

Limit according to FCC Section 15.231(e), Section 15.209(a) and Section 15.205(a):

Frequency (MHz)	Field strength of spurious emissions @ 3m		Effective limit for 315.0 MHz	
	(μV/m)	dB(μV/m)	(μV/m)	dB(μV/m)
40.66 – 40.70	100	40		
70 - 130	50	34		
130 - 174	50 to 150*	34 to 43.5*		
174 - 260	150	43.5		
260 - 470	150 to 500*	51.4 to 54	241.67	47.66
Above 470	500	54		

*Linear interpolation

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in the table above or to the general limits shown in the table below according to § 15.209, whichever limit permits a higher field strength.

Frequency (MHz)	15.209 Limits (μV/m)	15.209 Limits dB(μV/m)
30 - 88	100	40
88 - 216	150	43,5
216 - 960	200	46
Above 960	500	54

Additionally there is a limit according to §15.35(b) on the radio frequency emissions, as measured with a peak detector, corresponding to 20 dB above the maximum permitted average limits.

FCC ID: OYGTSSRE3DD

Restricted bands of operation according to FCC Part 15C, Section 15.205(a):

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

The requirements are **FULFILLED**.

Remarks: The level of spurious emissions are identically in both operation modes.

The test was performed in Fast send mode of the EuT.

FCC ID: OYGTSSRE3DD


5.5 Correction for pulse operation (duty cycle)

For test instruments and accessories used see section 6 Part DC.

5.5.1 Description of the test location

Test location: AREA4

5.5.2 Photo documentation of the test set-up

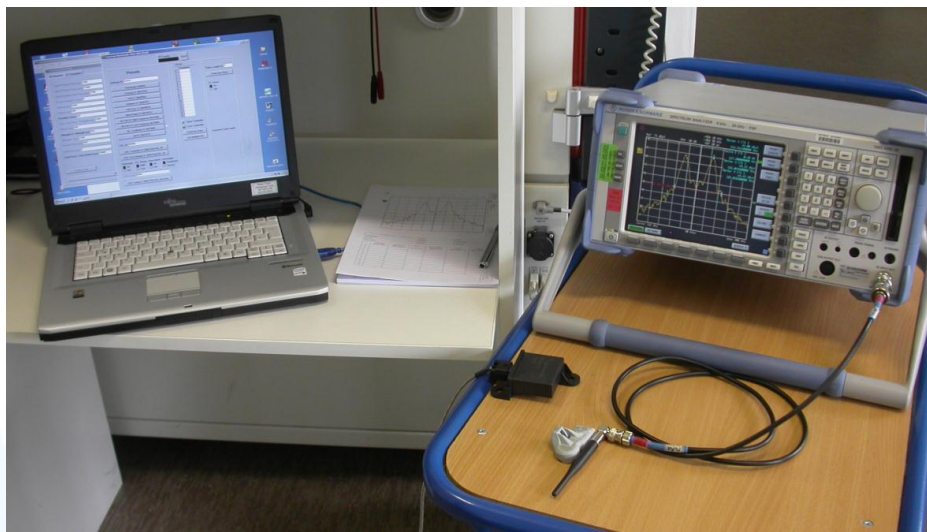

5.5.3 Applicable standard

According to FCC Part 15C, Section 15.35(c):

The emissions from intentional radiators shall not exceed the effective field strength limits.

5.5.4 Test result

The Duty cycle factor (dB) is calculated applying the following formula:

$$KE = 20 \log ((t_B)/100)$$

KE : pulse operation correction factor (dB)
 t_B : pulse duration for one pulse (ms)

Maximum transmitting duration in every 100ms period:

$$KE = 20 \log ((19.2^*)/100) = -14.33 \text{ dB}$$

⇒ * max. Tx on time within a 100 ms time period is 2 x 9.6 ms.

Remarks: The pulse train (T_w) exceeds 100 ms, therefore the duty cycle have been calculated by averaging the sum of the pulse widths over the 100 ms width with the highest average value.
For detailed results, please see the test protocol below.

FCC ID: OYGTSSRE3DD

5.5.5 Test protocol


Correction for pulse operation (duty cycle)

FCC Part 15C, Section 15.35(c)

Pulse duration for one pulse (Stationary & Interim Mode)



Ref -34 dBm Att 10 dB RBW 1 MHz Marker 1 [T1]
VBW 3 MHz -73.30 dBm
SWT 1.2 s -3.200000 ms

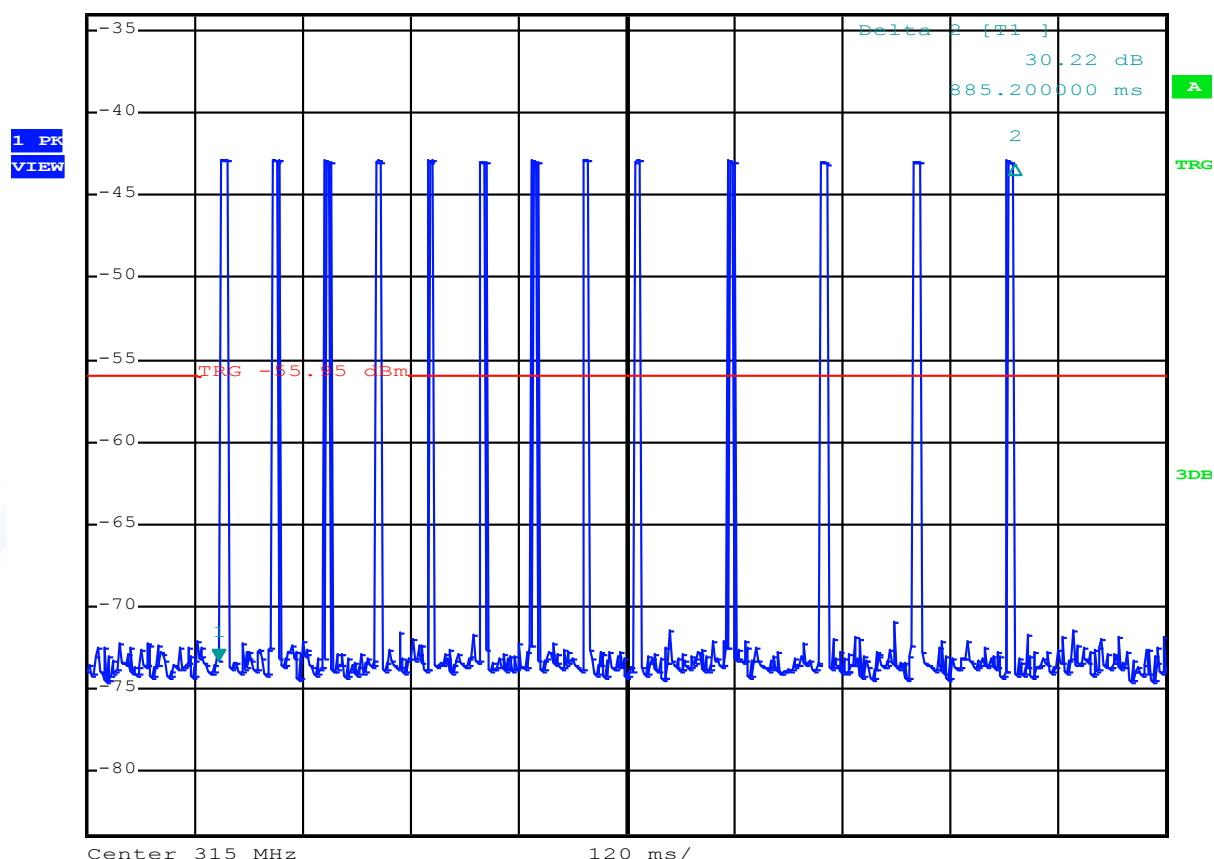

Worst case Tx on time:

- In **Stationary & Interim Mode** the WE transmits every 6 h a RF transmission (a random generator with a jitter of 100 ms to 5 s ensures that no periodic signal is generated). Each RF telegram Burst consists out of 9 ASK frames with a interframe space of 52.5 ms, followed by 4 FSK frames with a interframe space of 100 ms.


FCC ID: OYGTSSRE3DD

⇒ max. Tx on time within a 100 ms time period is 2 x 9.6 ms.


⇒ Tx on (9.6 ms) + Tx off (48 ms) + Tx on (9.6 ms) + Tx off (48 ms) = 115.2 ms



Ref 85 dBµV Att 10 dB RBW 3 MHz Marker 1 [T1]
VBW 10 MHz 38.54 dBµV
SWT 1.2 s -60.400000 ms


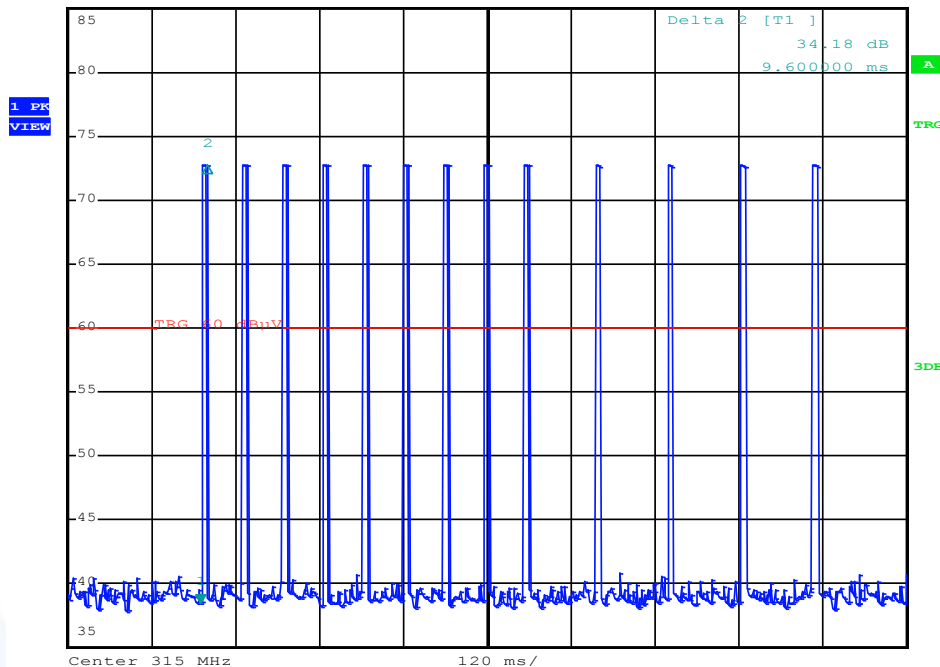


Ref 85 dBµV Att 10 dB RBW 3 MHz Marker 1 [T1]
VBW 10 MHz 38.78 dBµV
SWT 1.2 s -48.400000 ms

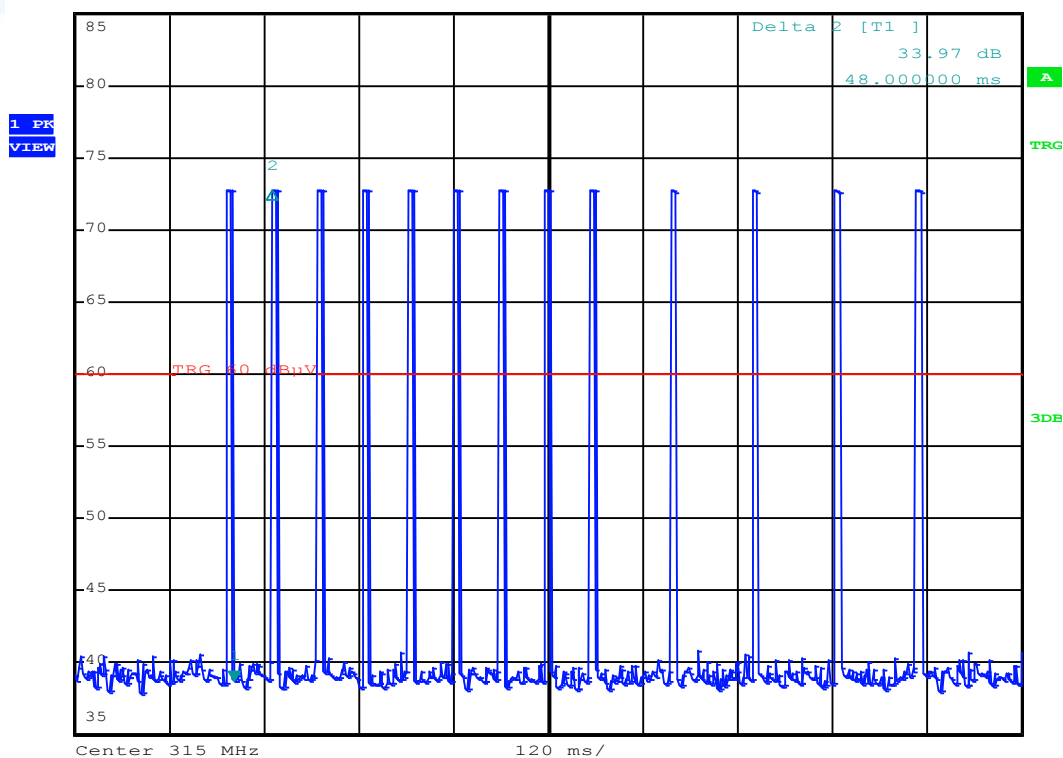

FCC ID: OYGTSSRE3DD

Normal operation mode (Rotating Mode)

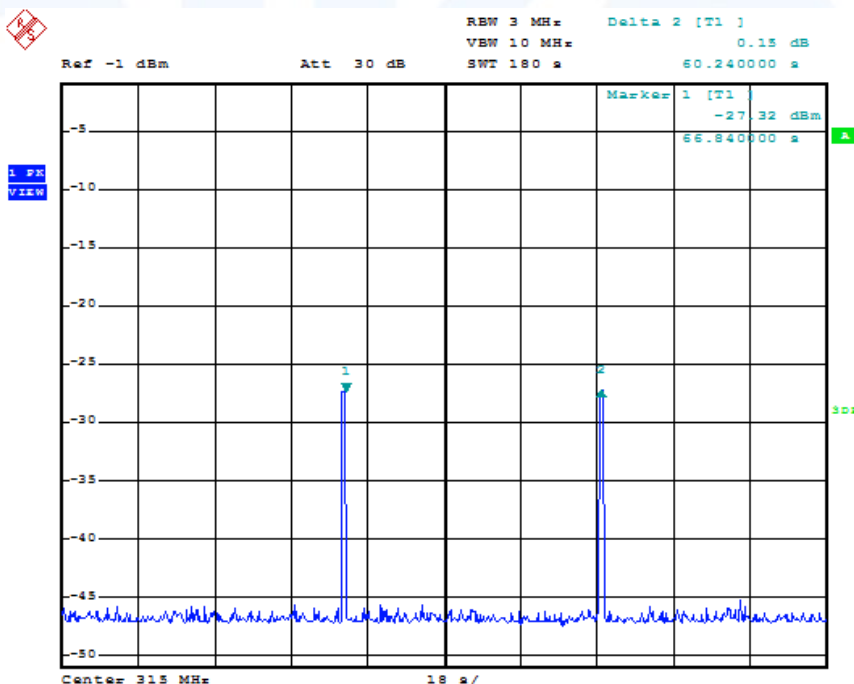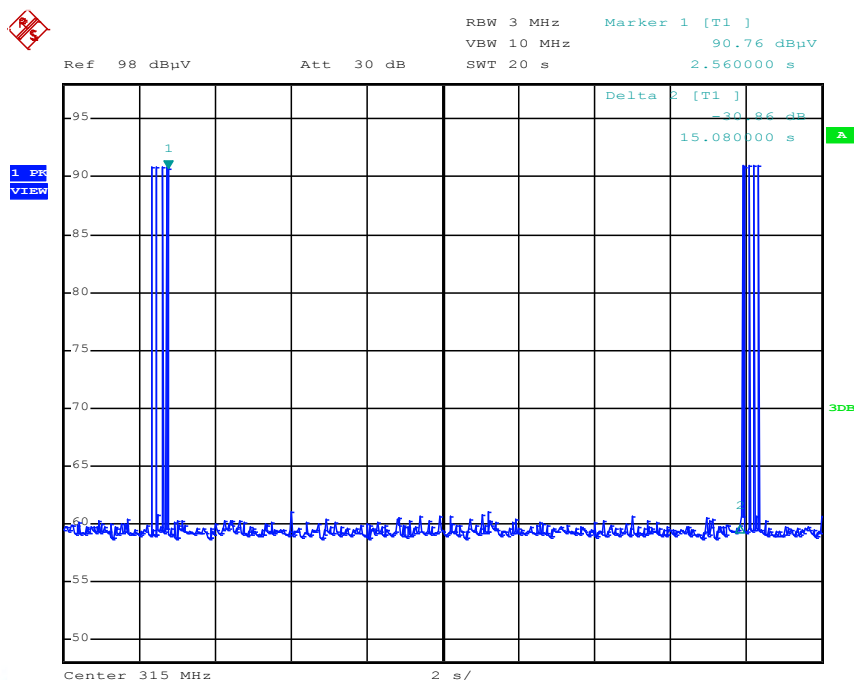


Measurement Intervals:

- Tire pressure and wheel electronics temperature are measured every 15 seconds in Rotating Mode and Interim Mode. In Stationary Mode this interval is 60 seconds.

FCC ID: OYGTSSRE3DD

Fast send mode (Alarm mode)

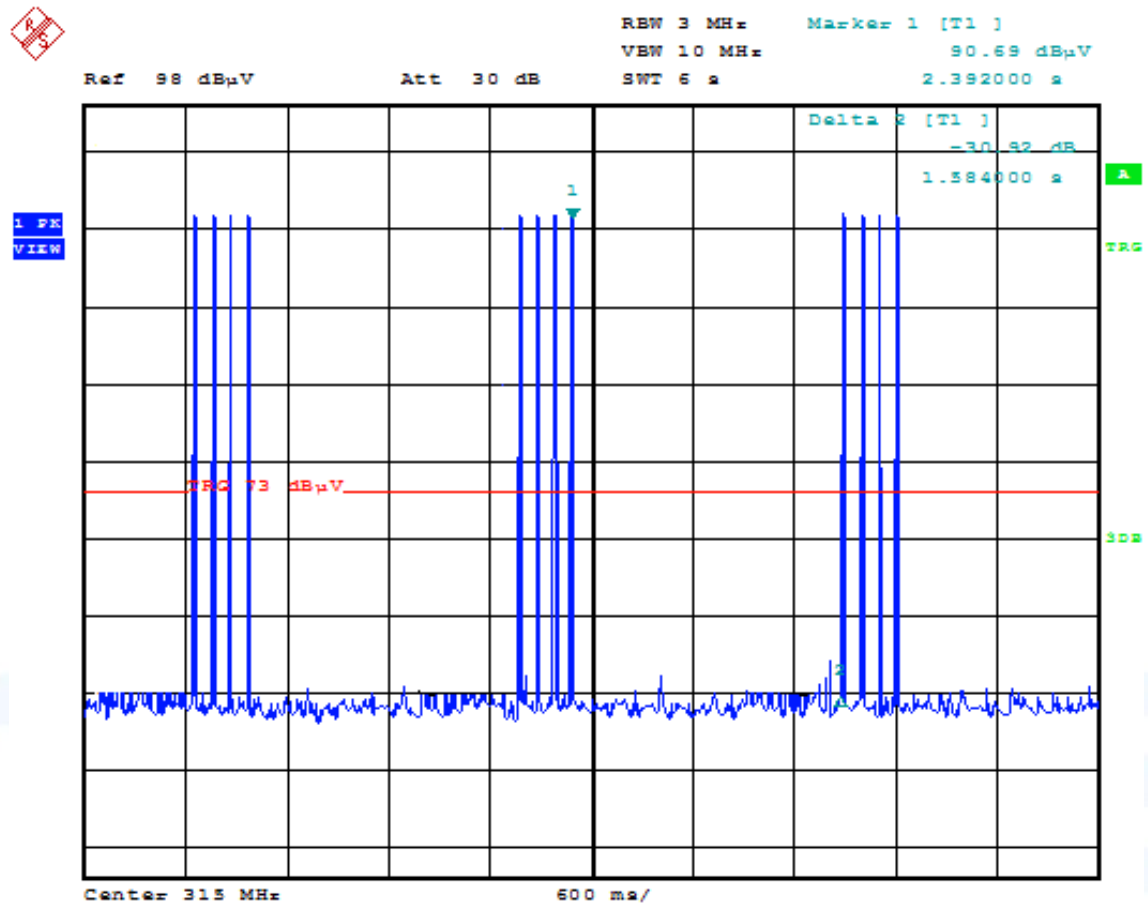

FCC ID: OYGTSSRE3DD**5.6 Emission bandwidth**

For test instruments and accessories used see section 6 Part MB.

5.6.1 Description of the test location

Test location: AREA4

5.6.2 Photo documentation of the test set-up**5.6.3 Applicable standard**

According to FCC Part 15C, Section 15.231(c):
The bandwidth of the emission shall not exceed the effective limits.

5.6.4 Description of Measurement

The measurement was performed conducted with intentional modulation using a spectrum analyser. The analyser span was set wide enough to capture the most of the power envelope of the signal. The function “20-dB-down” is used to determine the BW. For an overview on the adjacent restricted bands the span was set as wide as needed to show that the restricted bands are not affected.

FCC ID: OYGTSSRE3DD

5.6.5 Test result

Fundamental [MHz]	20dB Bandwidth F1 [MHz]	20dB Bandwidth F2 [MHz]	Measured Bandwidth [MHz]	LIMIT Fundamental $f \cdot 0,0025$ [MHz]
315.0	314.9424	315.0696	0.1272	0.7875

Limit according to FCC Part 15C Section 15.231(c):

Frequency (MHz)	20 dB BW limit dependent of the carrier (%)
70 – 900	0.25
above 900	0.50

The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

The requirements are **FULFILLED**.

Remarks: For detailed results, please see the test protocol below.

FCC ID: OYGTSSRE3DD

5.6.6 Test protocol

Emission bandwidth FCC Part 15C, Section 15.231(c)




*RBW 10 kHz Marker 1 [T1]
*VBW 10 kHz 44.00 dBμV
SWT 10 ms 314.942400000 MHz

Ref 71 dBμV

Att 10 dB

1 PK
VIEW

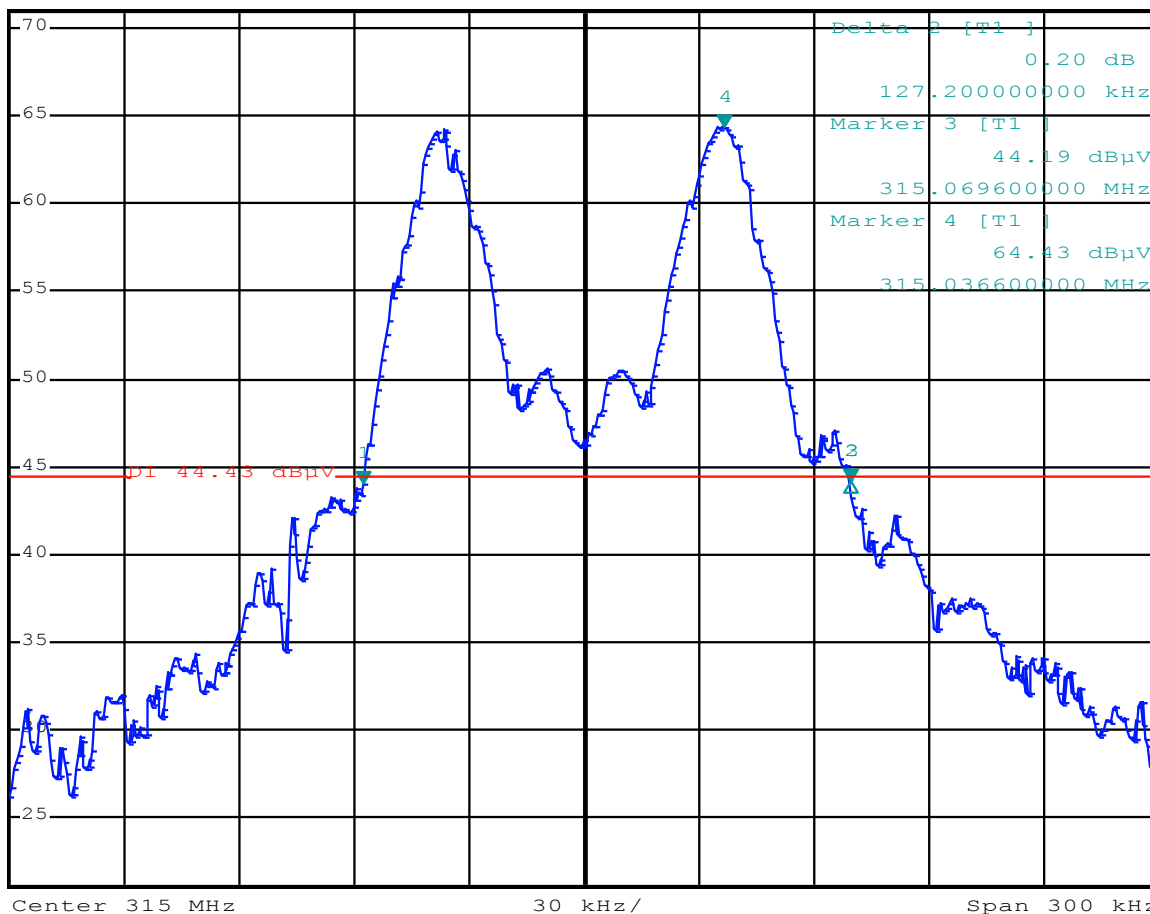


FCC ID: OYGTSSRE3DD**5.7 On / Off Period**

For test instruments and accessories used see section 6 Part MB.

5.7.1 Description of the test location

Test location: AREA4

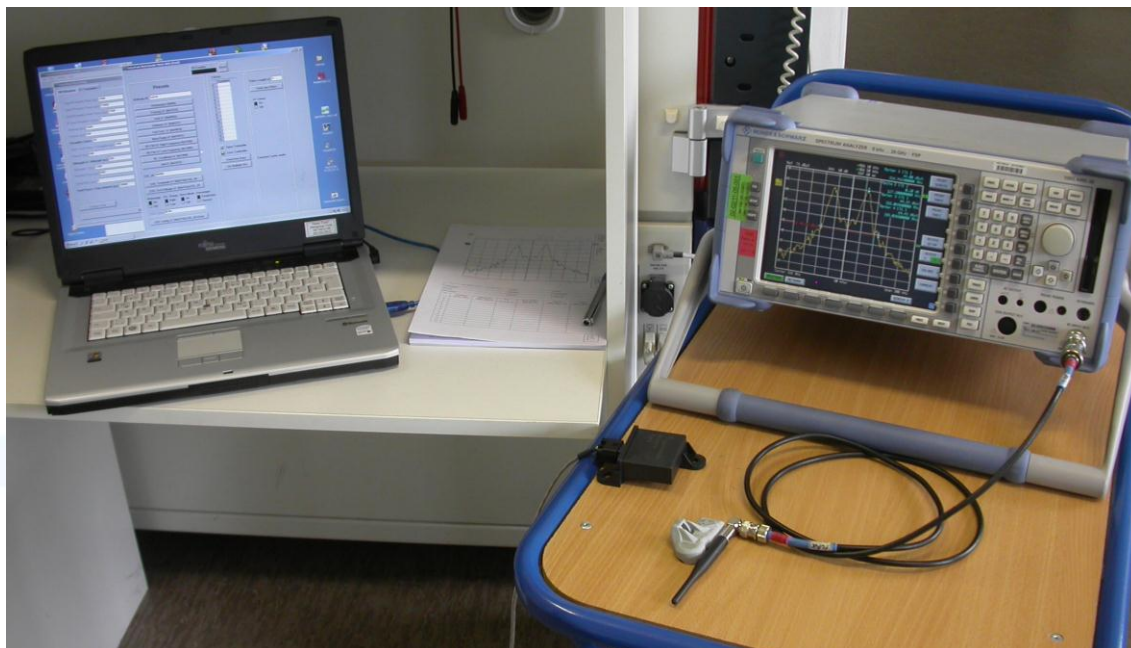5.7.2 Photo documentation of the test set-up**5.7.3 Applicable standard**

According to FCC Part 15C, Section 15.231(e):

5.7.4 Description of Measurement

The duration of transmission is measured with the spectrum analyzer. The sweep points were set to maximum for higher the time resolution. The signal is modulated; the marker of the analyzer is set to maximum amplitude at normal temperature and zero span. The analyser was set to single sweep and triggered on the button, the marker was set to the edges in order to measure the duration time and then recorded.

FCC ID: OYGTSSRE3DD

5.7.5 Test result

The manufacturer declares following transmitting intervals:

- Normal Operation mode:

Operational Description

Measurement Intervals:

- Tire pressure and wheel electronics temperature are measured every 15 seconds in Rotating Mode and Interim Mode. In Stationary Mode this interval is 60 seconds.

RF Transmission Intervals with no pressure change detected:

- In **Rotating Mode** the WE transmits every 60 s (a random generator with a jitter of 100 ms to 5 s ensures that no periodic signal is generated) data messages. Each RF telegram Burst consists out of 4 identical FSK frames with a random interframe space of 100 ms to 154 ms.
- In **Stationary & Interim Mode** the WE transmits every 6 h a RF transmission (a random generator with a jitter of 100 ms to 5 s ensures that no periodic signal is generated). Each RF telegram Burst consists out of 9 ASK frames with a interframe space of 52.5 ms, followed by 4 FSK frames with a interframe space of 100 ms.

Rotating Mode:

Duration of transmission (ms)	Limit (s)
406.0	1.0

Silent period (s)	Limit (s)
60.0	> 10.0

Stationary & Interim Mode:

Duration of transmission (ms)	Limit (s)
885.20	1.0

Silent period (s)	Limit (s)
60 x 3600	> 10.0

Limit according to FCC Part 15C, Section 15.231(e):

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

The requirements are **FULFILLED**.



Remarks: For detailed test results, please see the test protocol below.

FCC ID: OYGTSSRE3DD

5.7.6 Test protocol


Signal deactivation FCC Part 15C, Section 15.231(e)

Pulse duration for one pulse (Rotating Mode)

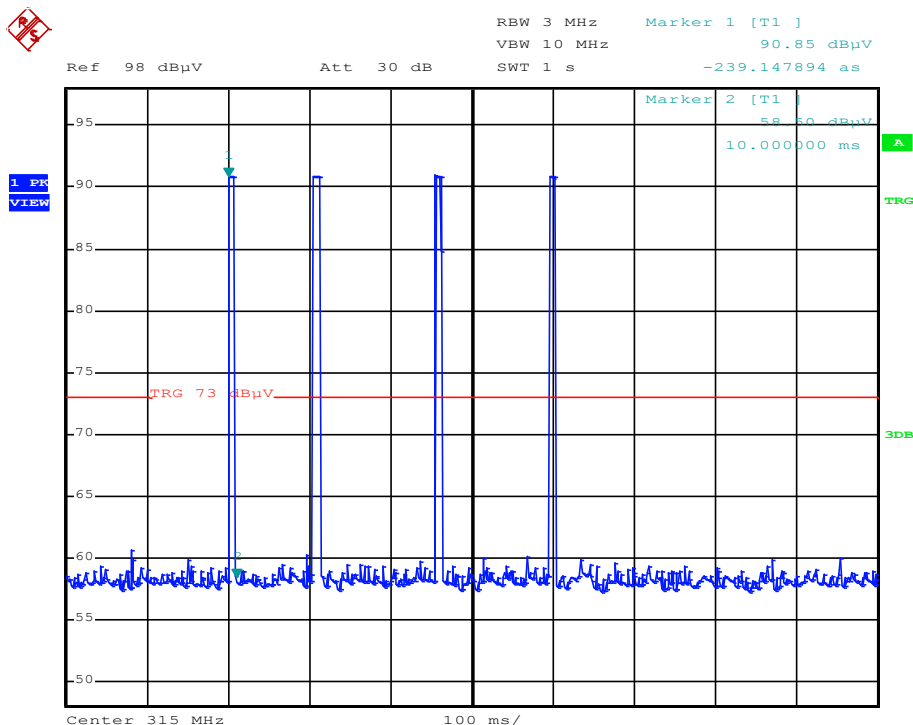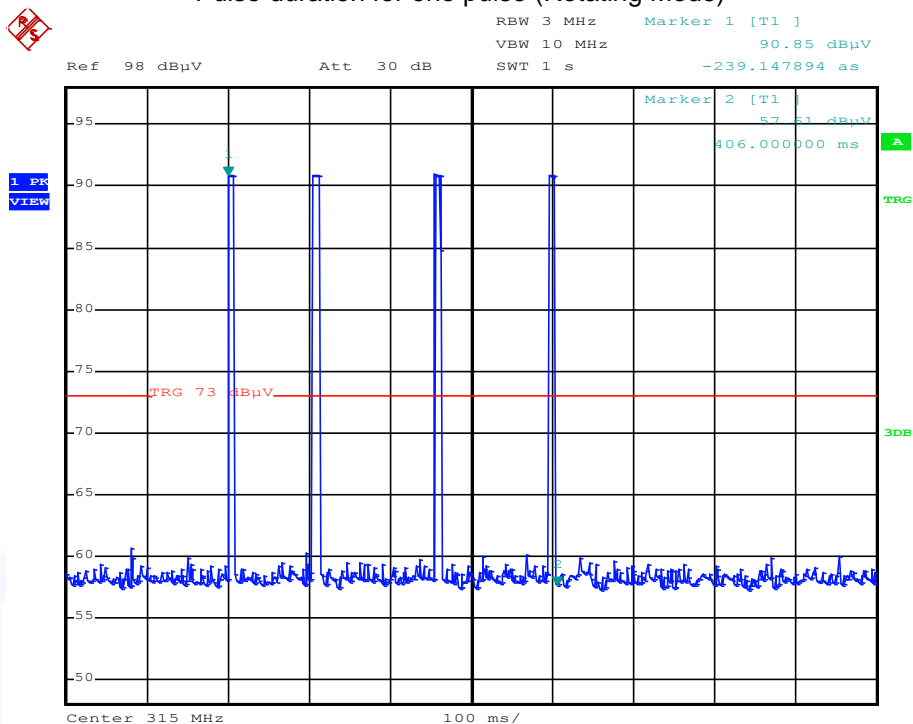

FCC ID: OYGTSSRE3DD

Normal operation mode (Rotating Mode)

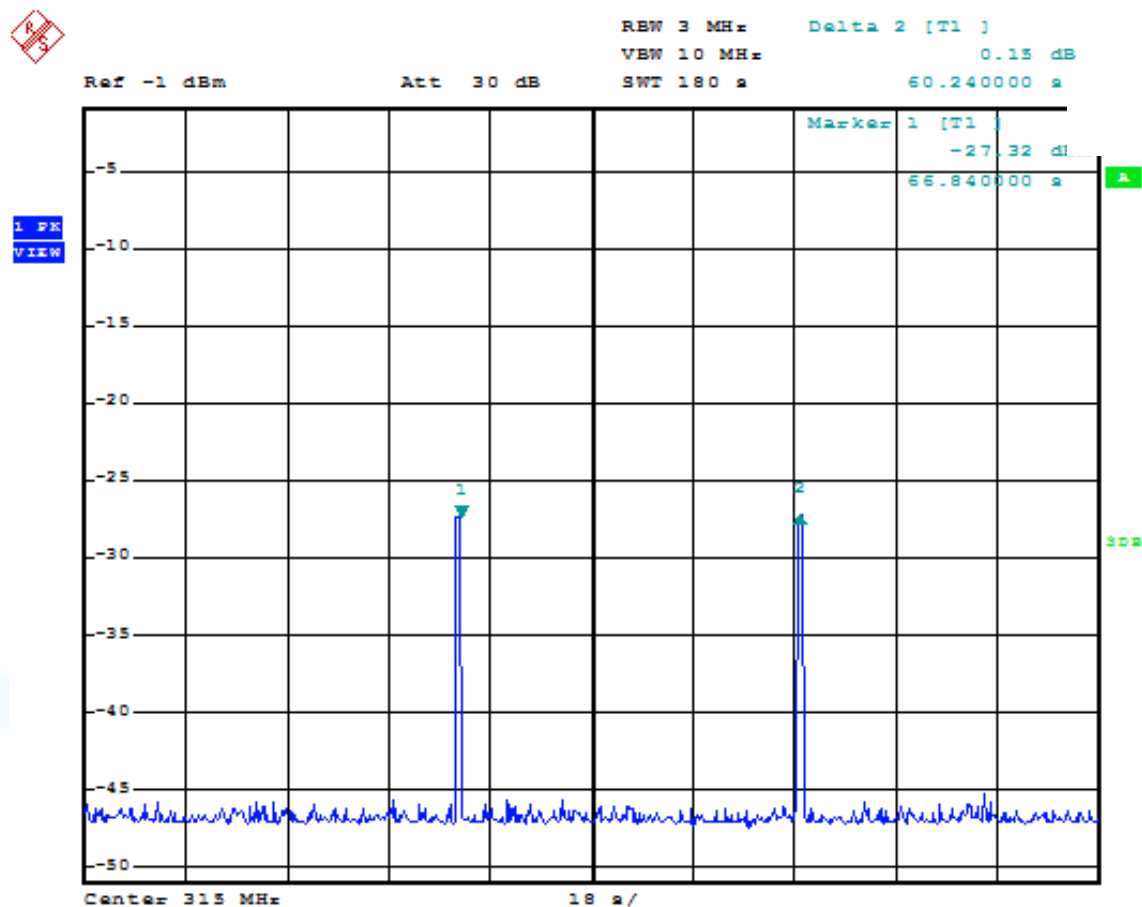


FCC ID: OYGTSSRE3DD**5.8 Signal deactivation**

For test instruments and accessories used see section 6 Part MB.

5.8.1 Description of the test location

Test location: AREA4

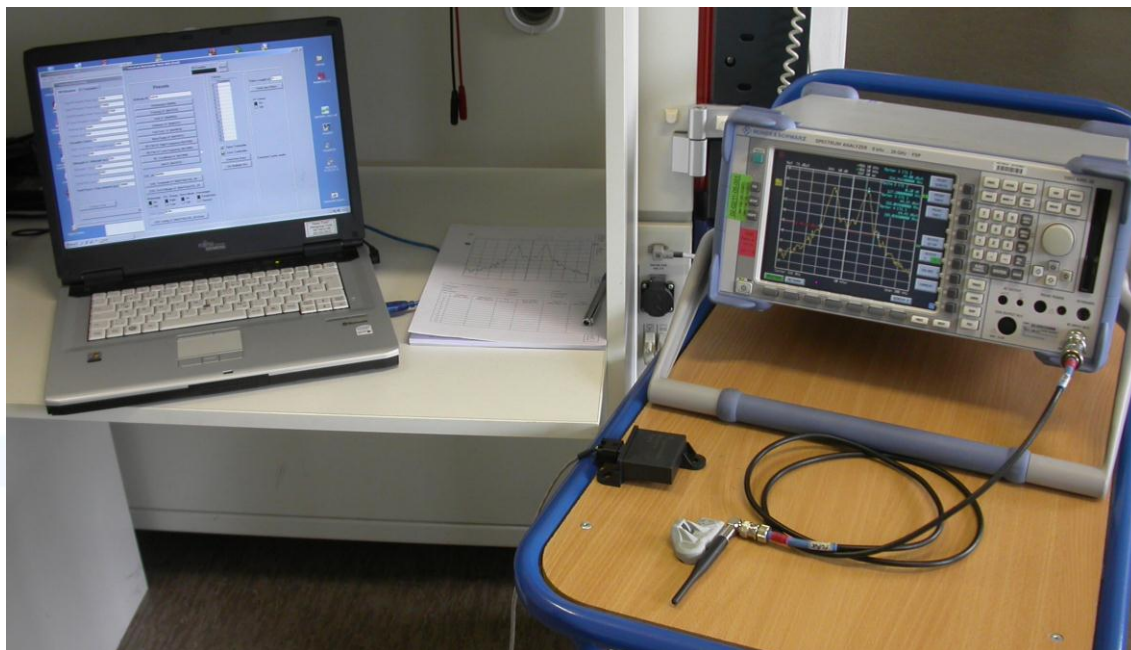5.8.2 Photo documentation of the test set-up**5.8.3 Applicable standard**

According to FCC Part 15C, Section 15.231(a):

5.8.4 Description of Measurement

The duration of transmission is measured with the spectrum analyzer. The sweep points were set to maximum for higher the time resolution. The signal is modulated; the marker of the analyzer is set to maximum amplitude at normal temperature and zero span. The analyser was set to single sweep and triggered on the button, the marker was set to the edges in order to measure the duration time and then recorded.

FCC ID: OYGTSSRE3DD

5.8.5 Test result

The manufacturer declares following transmitting intervals:

- Fast send mode (Rotating Mode):

- While the WE is in the **Rotating Mode**, the WE transmits an instantaneous measured data (RPC Transmission), if a pressure change of 2.0 psi from the last transmission or greater has occurred with respect to the following conditions:
 - If the pressure change was a **decrease** of pressure, the WE transmits immediately every time it detects the 2.0-psi or greater pressure changes from the last transmission. Then the WE will make two other independent pressure measurements and transmits them during the 5 seconds following the RPC transmission and each measurement/transmission will have a silent period of 2 seconds between each transmission
 - If the pressure change of 2.0 psi or greater was an **increase** of pressure, the sensor will not react to it.

Duration of transmission (ms)
406.0

Limit according to FCC Part 15C, Section 15.231(a)(4):

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released and a transmitter activated automatically shall cease transmission within 5 seconds after activation.

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine systems integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds.

(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

The requirements are **FULFILLED**.


Remarks: For detailed test results, please see the test protocol below.

FCC ID: OYGTSSRE3DD

5.8.6 Test protocol


Signal deactivation FCC Part 15C, Section 15.231(a)

Pulse duration for one pulse

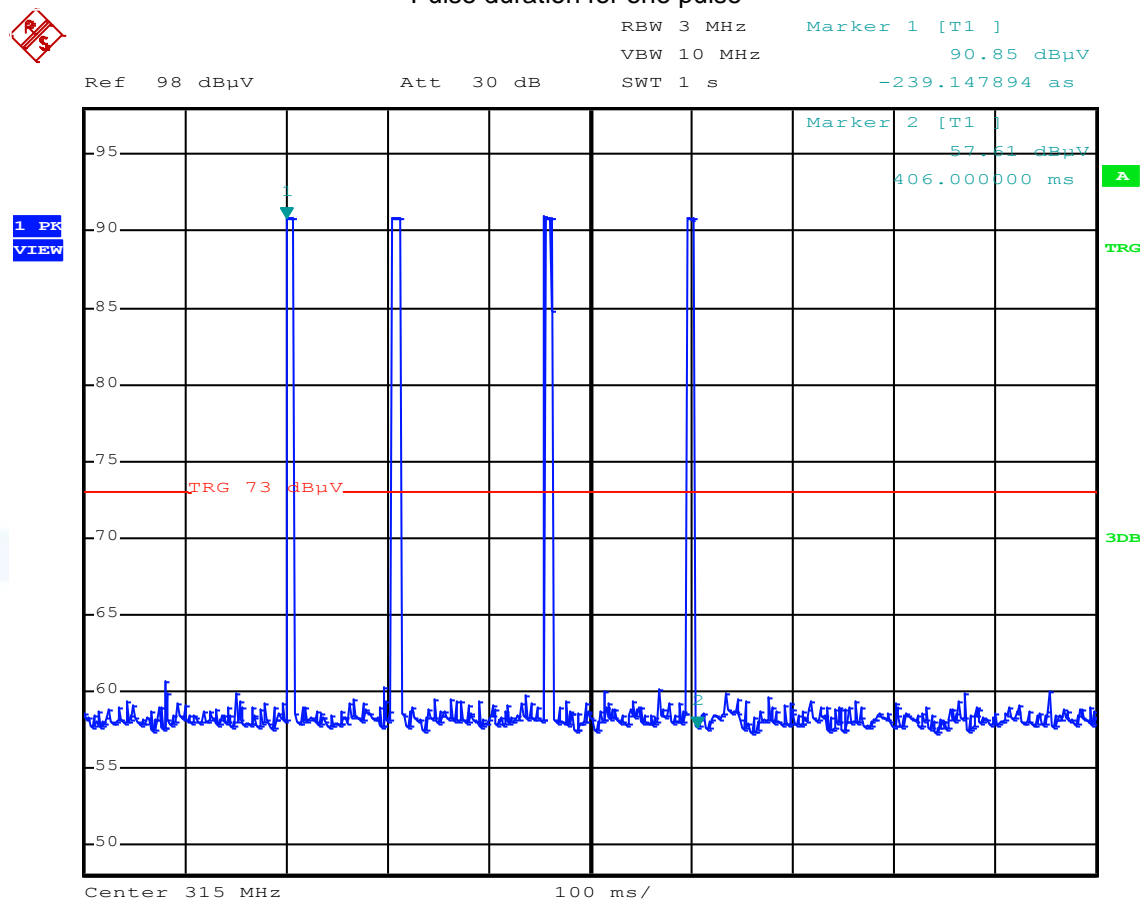

FCC ID: OYGTSSRE3DD

Fast send mode (Alarm mode)

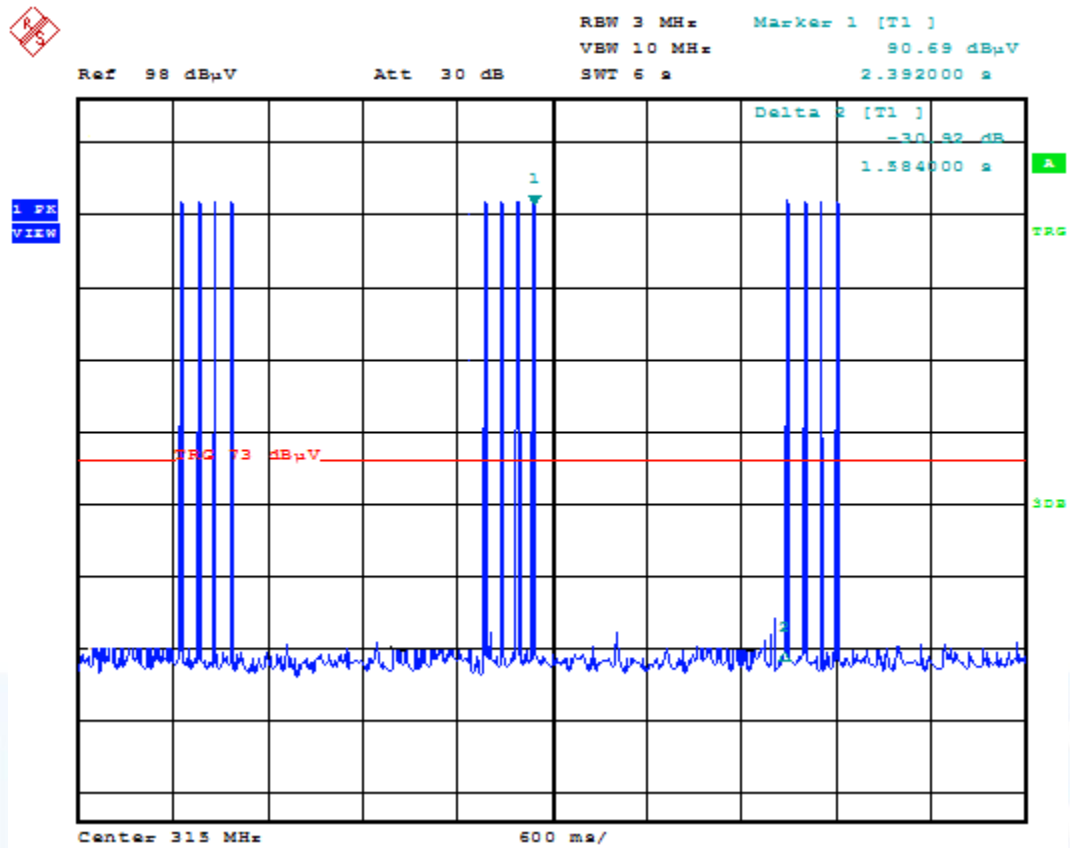

FCC ID: OYGTSSRE3DD

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPR 2	ESVS 30	02-02/03-05-006	20/06/2012	20/06/2011		
	VULB 9168	02-02/24-05-005	07/03/2012	07/03/2011	08/09/2012	08/03/2012
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				
DC	FSP 30	02-02/11-05-001	05/10/2012	05/10/2011		
	RF Antenna	02-02/24-05-032				
MB	FSP 30	02-02/11-05-001	05/10/2012	05/10/2011		
	RF Antenna	02-02/24-05-032				
SER 1	FMZB 1516	01-02/24-01-018			16/02/2013	16/02/2012
	ESCI	02-02/03-05-005	21/11/2012	21/11/2011		
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				
SER 2	ESVS 30	02-02/03-05-006	20/06/2012	20/06/2011		
	VULB 9168	02-02/24-05-005	07/03/2012	07/03/2011	08/09/2012	08/03/2012
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				
SER 3	FSP 30	02-02/11-05-001	05/10/2012	05/10/2011		
	AFS4-01000400-10-10P-4	02-02/17-05-003				
	AMF-4F-04001200-15-10P	02-02/17-05-004				
	AFS5-12001800-18-10P-6	02-02/17-06-002				
	3117	02-02/24-05-009	16/02/2013	16/02/2012		
	Sucoflex N-1600-SMA	02-02/50-05-073				
	Sucoflex N-2000-SMA	02-02/50-05-075				