

FCC ID: OYG TSSRE4TB

## EMI -- TEST REPORT

<b>Test Report No. :</b>	<b>T30529-00-02XF</b>	February 09, 2006 Date of issue
--------------------------	-----------------------	------------------------------------

**Type / Model Name** : Wheel Electronic / TSSRE4Tb

**Product Description** : Tire Safety System

**Applicant** : BERU AG

**Address** : Mörikestrasse 155

71636 Ludwigsburg

**Manufacturer** : BERU AG

**Address** : Mörikestrasse 155

71636 Ludwigsburg

**Licence holder** : BERU AG

**Address** : Mörikestrasse 155

71636 Ludwigsburg

<b>Test Result</b> according to the standards listed in clause 1 test standards:	<b>Positive</b>
--	-----------------



The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

# Contents

<b>1</b>	<b><u>TEST STANDARDS</u></b>	<b>3</b>
<b>2</b>	<b><u>SUMMARY</u></b>	<b>4</b>
<b>3</b>	<b><u>EQUIPMENT UNDER TEST</u></b>	<b>5</b>
3.1	PHOTO DOCUMENTATION OF THE EUT	5
3.3	POWER SUPPLY SYSTEM UTILISED	10
3.4	SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	10
<b>4</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>11</b>
4.1	ADDRESS OF THE TEST LABORATORY	11
4.2	ENVIRONMENTAL CONDITIONS	11
4.3	STATEMENT OF THE MEASUREMENT UNCERTAINTY	11
4.4	MEASUREMENT PROTOCOL FOR FCC, VCCI AND AUSTEL	11
<b>5</b>	<b><u>TEST CONDITIONS AND RESULTS FOR 433 MHZ TRANSMITTER</u></b>	<b>13</b>
5.1	CONDUCTED EMISSIONS	13
5.2	RADIATED POWER OF THE FUNDAMENTAL WAVE	14
5.3	RADIATED EMISSIONS (ELECTRIC FIELD) 30 MHz – 18 GHz	16
5.4	CORRECTION FOR PULSE OPERATION (DUTY CYCLE)	21
5.5	EMISSION BANDWIDTH	25
5.6	SIGNAL DEACTIVATION	27
<b>6</b>	<b><u>TEST CONDITIONS AND RESULTS FOR 125 KHZ RECEIVER</u></b>	<b>29</b>
6.1	CONDUCTED EMISSIONS	29
6.2	RADIATED EMISSIONS (ELECTRIC FIELD)	30
<b>7</b>	<b><u>USED TEST EQUIPMENT AND ACCESSORIES</u></b>	<b>33</b>

# **1 TEST STANDARDS**

The tests were performed according to following standards:

## **FCC Rules and Regulations Part 15 Subpart C - Intentional Radiators (October 01, 2004)**

Part 15, Subpart C, Section 15.231	Periodic operation in the band 40.66-40.70 MHz and above 70 MHz §15.231(a) Signal deactivation §15.231(b) Radiated emissions, Fundamental & Harmonics §15.231(c) Emission Bandwidth
Part 15, Subpart C, Section 15.35(c)	Correction for Pulse Operation (Duty Cycle)
Part 15, Subpart C, Section 15.207(a)	AC Line conducted emissions
Part 15, Subpart C, Section 15.209(a)	Radiated emissions, general requirements

## **FCC Rules and Regulations Part 15 Subpart B - Unintentional Radiators (October 01, 2004)**

Part 15, Subpart B, Section 15.107(a)	AC Line conducted emissions
Part 15, Subpart B, Section 15.109(a)	Radiated emissions, general requirements
Part 15, Subpart B, Section 15.111(a)	Antenna power conduction

## 2 SUMMARY

### GENERAL REMARKS:

The Wheel electronic is one component of the Tire Safety System (TSS) which controls and monitors tire pressures. The system comprises the following components:

- 1 TSS control unit
- 4 sets of wheel electronics including valve
- 1 digital antenna
- 4 trigger transmitters

The Wheel electronic consists of a 125 kHz Receiver and a 433 MHz Transmitter therefore contains this test report the transmitter tests according to FCC Part 15, Subpart C, Section 15.231 and the receiver tests according to FCC Part 15, Subpart B. During all tests, the Eut have been operated in the complete Tire Safety System (TSS), where it was possible to set the different modes via suitable software.

### FINAL ASSESSMENT:


The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : January 25, 2006


Testing concluded on : January 30, 2006

Checked by:

 Klaus Gegenfurtner  
Ich bestätige die  
Richtigkeit und Integrität  
dieses Dokuments  
2006.02.22 09:40:39  
+01'00'

Klaus Gegenfurtner  
Dipl.-Ing.(FH)  
Manager: Radio Group

Tested by:

 Xavier Fischer  
Ich bin der Verfasser  
dieses Dokuments  
2006.02.22 09:00:37  
+01'00'

Fischer Xavier

## Power supply system utilised

FCC ID: OYG TSSRE4TB

Power supply voltage : 3,0 V / DC

## 3.4 Short description of the Equipment under Test (EuT)

The Wheel electronics measure the tire pressure and the air temperature in the tire and send these via a set radio route together with the residual battery life and the code (ID) to the digital antenna. For exactly description please refer to the technical documents.

Number of tested samples: 1  
Serial number: Prototype

## EuT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- TX-mode at frequency 433 MHz

- RX-mode at frequency 125 kHz

## EuT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurements:

- Notebook	Model : IBM
- _____	Model : _____
- _____	Model : _____
- _____	Model : _____
- _____	Model : _____
- _____	Model : _____

## **4 TEST ENVIRONMENT**

### **4.1 Address of the test laboratory**

**mikes-testingpartners gmbh**  
**Ohmstrasse 2-4**  
**94342 Strasskirchen**  
**Germany**

### **4.2 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

### **4.3 Statement of the measurement uncertainty**

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 /11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

### **4.4 Measurement Protocol for FCC, VCCI and AUSTEL**

#### **4.4.1 GENERAL INFORMATION**

##### **4.4.1.1 Test Methodology**

Conducted and radiated disturbance testing is performed according to the procedures in International Special Committee on Radio Interference (CISPR) Publication 22 (1997), European Standard EN 55022 and Australian Standard AS 3548 (which are based on CISPR 22).

The Japanese standard, "Voluntary Control Council for Interference (VCCI) by Data Processing Equipment and Electronic Office Machines, Technical Requirements" is technically equivalent to CISPR 22 (1997). For official compliance, a conformance report must be sent to and accepted by the VCCI.

In compliance with FCC Docket 92-152, "Harmonization of Rules for Digital Devices Incorporate International Standards", testing for FCC compliance may be done following the ANSI C63.4-2003 procedures and using the CISPR 22 Limits.

#### 4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into it's characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum disturbances from the unit.

#### **4.4.2 DETAILS OF TEST PROCEDURES**

##### General Standard Information

The test methods used comply with CISPR Publication 22 (1997), EN 55022 (2001) and AS 3548 (1992) - "Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment" and with ANSI C63.4-2003 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

mikes

## 5 TEST CONDITIONS AND RESULTS FOR 433 MHZ Transmitter

### 5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

#### 5.1.1 Description of the test location

Test location:

#### 5.1.2 Photo documentation of the test set-up

#### 5.1.3 Description of Measurement

The final level, expressed in dB $\mu$ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit, which is equivalent to the Australian AS 3548 limit.

To convert between dB $\mu$ V and  $\mu$ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the DC power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 $\Omega$ /50  $\mu$ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeter's above the floor and is positioned 40 centimeter's from the vertical ground plane (wall) of the screen room. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

**Remarks:**     The measurement is not applicable because the EuT is not powered by the system, but  
it is separated powered by a 3,0 V battery.



## 5.2 Radiated power of the fundamental wave

For test instruments and accessories used see section 6 Part CPR 2.

### 5.2.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

### 5.2.2 Photo documentation of the test set-up



### 5.2.3 Description of Measurement

The radiated power of the fundamental wave from the EUT is measured in the frequency range of 30 to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in dB $\mu$ V/m, is arrived by taking the reading from the EMI receiver (Level dB $\mu$ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The resolution bandwidth during the measurement is as follows:

30 MHz – 1000 MHz: ResBW: 120 kHz

### 5.2.4 Test result

Frequency [MHz]	L: QP [dB $\mu$ V]	L: AV [dB $\mu$ V]	L: PK [dB $\mu$ V]	Bandwidth [kHz]	Correct. [dB]	L: QP [dB $\mu$ V/m]	L: AV [dB $\mu$ V/m]	L: PK [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Delta [dB]
433,95	48,5	17,2	51,8	120	19,1	67,6	36,3	70,9	80,8	-13,2

Limit according to FCC Subpart 15.231(b)

Frequency (MHz)	Fieldstrength of fundamental		Fieldstrength of spurious emissions	
	( $\mu$ V/m)	dB ( $\mu$ V/m)	( $\mu$ V/m)	dB ( $\mu$ V/m)
40,66 – 40,70	2250	67	225	47
70 - 130	1250	62	125	42
130 - 174	1250 to 3750*	62 to 71,4*	125 to 375*	42 to 51,4*
174 - 260	3750	71,4	375	51,4
<b>260 - 470</b>	<b>3750 to 12500*</b>	<b>71,4 to 81,9*</b>	375 to 1250*	51,4 to 61,9*
Above 470	12500	81,9	1250	61,9

\*Linear interpolations

The requirements are **FULFILLED**.

Remarks:

---



---



---



---

FCC ID: OYG TSSRE4TB

### 5.3 Radiated emissions (electric field) 30 MHz – 18 GHz

For test instruments and accessories used see section 6 Part SER 2, SER 3.

#### 5.3.1 Description of the test location

Test location: OATS1  
Anechoic Chamber A2

Test distance: 3 metres

#### 5.3.2 Photo documentation of the test set-up



FCC ID: OYG TSSRE4TB



### 5.3.3 Description of Measurement

Radiated spurious emissions from the EuT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in dB $\mu$ V/m, is arrived by taking the reading from the EMI receiver (Level dB $\mu$ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EuT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3 horizontally from the EuT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 1 MHz. All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

The resolution bandwidth during the measurement is as follows:

30 MHz – 1000 MHz: ResBW: 120 kHz  
1000 MHz – 18000 MHz ResBW: 1 MHz

### 5.3.4 Test result

#### Testresult in detail:(<1GHz)

Frequency [MHz]	L: QP [dB $\mu$ V]	L: AV [dB $\mu$ V]	L: PK [dB $\mu$ V]	Bandwidth [kHz]	Correct. [dB]	L: QP [dB $\mu$ V/m]	L: AV [dB $\mu$ V/m]	L: PK [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Delta [dB]
867,9	14,9	-6,3	18,9	120	27,0	41,9	20,7	45,9	60,8	-18,9



FCC ID: OYG TSSRE4TB

**Testresult in detail:(>1GHz)**

Frequency [MHz]	L: PK [dBμV]	Corr. Duty Cycle [dB]	L: AV [dBμV]	Band width [kHz]	Correct. [dB]	L: PK [dBμV/m]	L: AV [dBμV/m]	Limit AV [dBμV/m]	Delta [dB]
1780	71,1	-19,78	51,3	1000	-12,9	58,1	38,4	60,8	-22,4
1900	55,3	-19,78	35,5	1000	-12,1	43,2	23,4	60,8	-37,4
2170	67,2	-19,78	47,4	1000	-10,7	56,5	36,7	60,8	-24,1
2602	64,4	-19,78	44,6	1000	-9,6	54,8	35,0	60,8	-25,8
3040	61,7	-19,78	41,9	1000	-8,3	53,4	33,6	60,8	-27,2
3394	54,5	-19,78	34,7	1000	-8,2	46,3	26,5	60,8	-34,3
3910	67,0	-19,78	47,2	1000	-8,1	58,9	39,1	54,0	-14,9

Limit according to FCC Subpart 15.231(b) Subpart 15.209(a) / Subpart 15.205(a)

Frequency (MHz)	Fieldstrength of fundamental		Fieldstrength of spurious emissions	
	(μV/m)	dB (μV/m)	(μV/m)	dB (μV/m)
40,66 – 40,70	2250	67	225	47
70 - 130	1250	62	125	42
130 - 174	1250 to 3750*	62 to 71,4*	125 to 375*	42 to 51,4*
174 - 260	3750	71,4	375	51,4
<b>260 - 470</b>	<b>3750 to 12500*</b>	<b>71,4 to 81,9*</b>	<b>375 to 1250*</b>	<b>51,4 to 61,9*</b>
Above 470	12500	81,9	1250	61,9

\*Linear interpolations

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in the table above or to the general limits shown in the table below according to § 15.209, whichever limit permits a higher field strength.

Frequency [MHz]	15.209 Limits [μV/m]	15.209 Limits [dBμV/m]
30-88	100	40
88-216	150	43,5
<b>216-960</b>	<b>200</b>	<b>46</b>
<b>Above 960</b>	<b>500</b>	<b>54</b>

Besides is a limit according to §15.35(b) on the radio frequency emissions, as measured with a peak detector, corresponding to 20 dB above the maximum permitted average limits.

**FCC ID: OYG TSSRE4TB**

**Restricted bands of operation:**

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209

MHz	MHz	GHz
25.5 – 25.67	960 – 1240	4.5 – 5.15
37.5 – 38.25	1300 – 1427	5.35 – 5.46
73 – 74.6	1435 – 1626.5	7.25 – 7.75
74.8 – 75.2	1645.5 – 1646.5	8.025 – 8.5
108 – 121.94	1660 – 1710	9.0 – 9.2
123 – 138	1718.8 – 1722.2	9.3 – 9.5
149.9 – 150.05	2200 – 2300	10.6 – 12.7
156.52475 – 156.52525	2310 – 2390	13.25 – 13.4
156.7 – 156.9	2483.5 – 2500	14.47 – 14.5
162.0125 – 167.17	2655 – 2900	15.35 – 16.2
167.72 – 173.2	3260 – 3267	17.7 – 21.4
240 – 285	3332 – 3339	22.01 – 23.12
322 – 335.4	3345.8 – 3358	23.6 – 24.0
399.9 – 410	3600 – 4400	31.2 – 31.8
608 – 614		36.43 – 36.5

The requirements are **FULFILLED**.

**Remarks:** During the test, the Eut was set into continuous transmitting mode.

The measurement was performed up to the 10<sup>th</sup> harmonic (4330 MHz).


## 5.4 Correction for Pulse Operation (Duty Cycle)

For test instruments and accessories used see section 6 Part DC.

### 5.4.1 Description of the test location

Test location: AREA4

### 5.4.2 Photo documentation of the test set-up

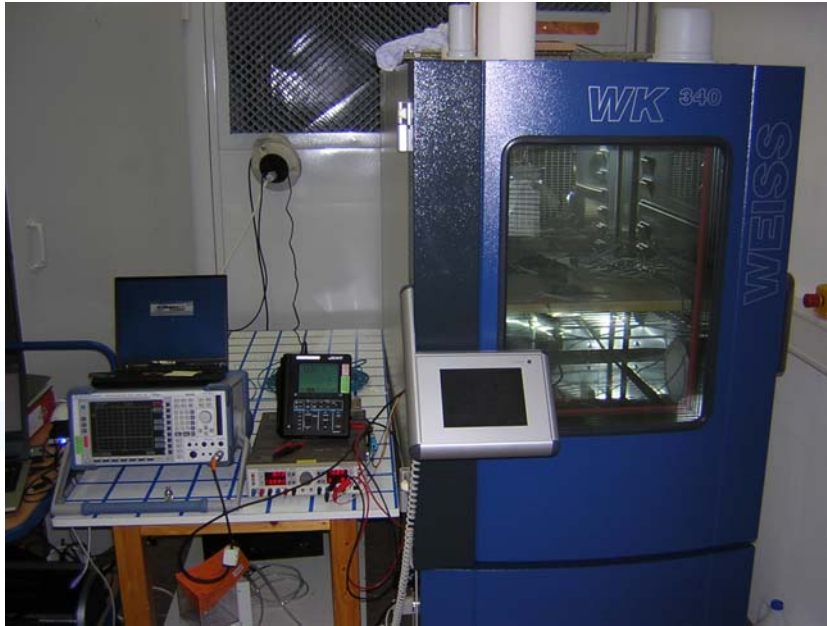

### 5.4.3 Description of Measurement

The Duty cycle factor, expressed in dB, is arrived by taking the following formula:

$$KE = 20 \log [(t_B \cdot p) / T_w]$$

KE: pulse operation correction factor [dB]  
t<sub>w</sub>: pulse duration for one complete pulse track [msec]  
t<sub>B</sub>: pulse duration for one pulse [μsec]  
T<sub>w</sub>: a period of the pulse track [msec]  
p: number of pulses in one train



FCC ID: OYG TSSRE4TB

#### 5.4.4 Test result

Duty cycle	$t_{iw}$ [msec]	$T_w$ [msec]	$t_{iB}$ [msec]	p	KE [dB / %]
Real Duty cycle					
Within 100 msec		100	10,25	1	-19,78 / 10,25

**Remarks:** The pulse train [ $T_w$ ] exceeds 100 ms, therefore the duty cycle have been calculated by averaging the sum of the pulsewidths over the 100 ms width with the highest average value.


For detailed results, please see the test protocol below.

mikes

FCC ID: OYG TSSRE4TB


#### 5.4.5 Test protocol

### Correction for Pulse Operation (Duty Cycle) FCC Part 15 Subpart 15.35(c)

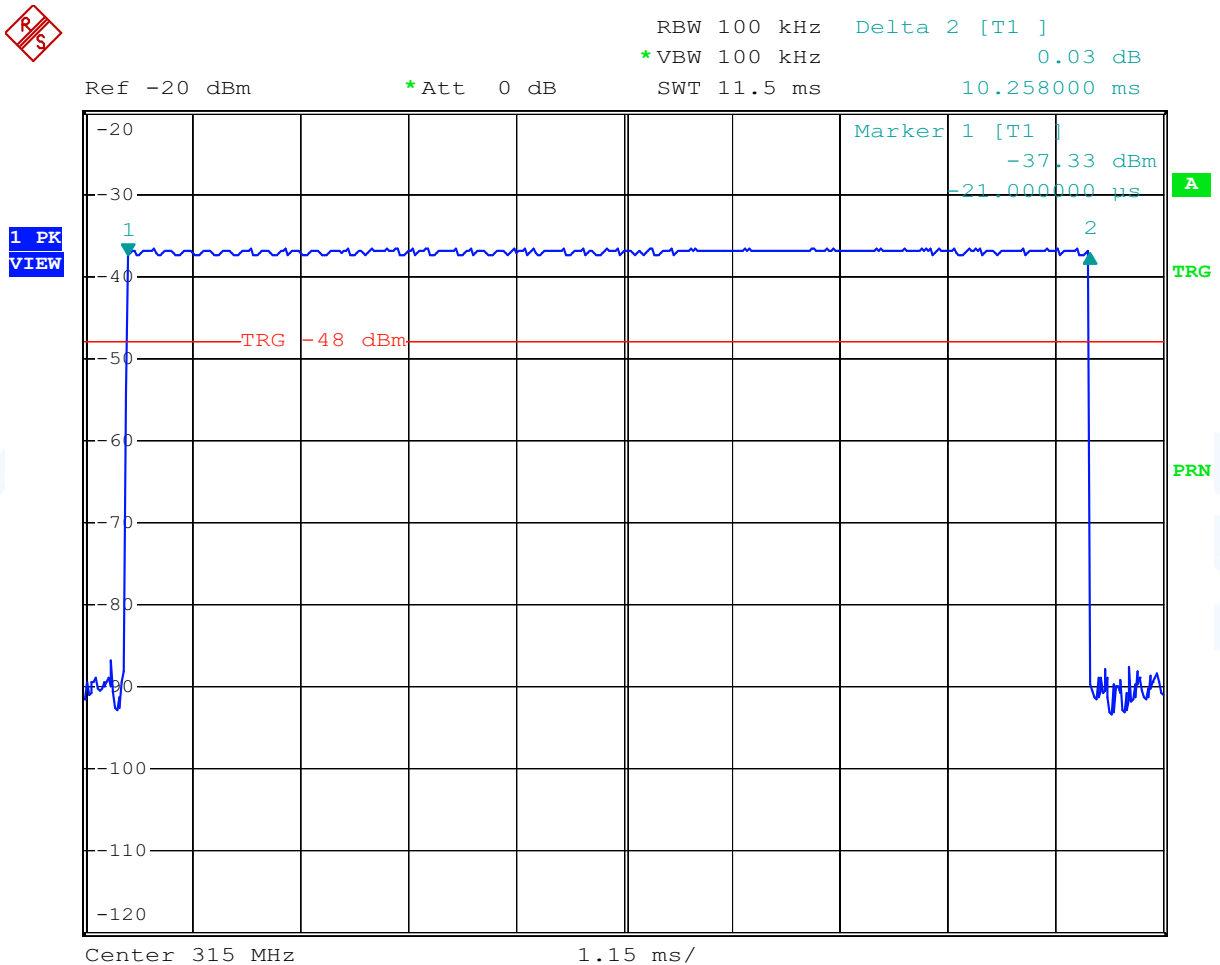

Date: 27.JAN.2006 11:29:17

FCC ID: OYG TSSRE4TB

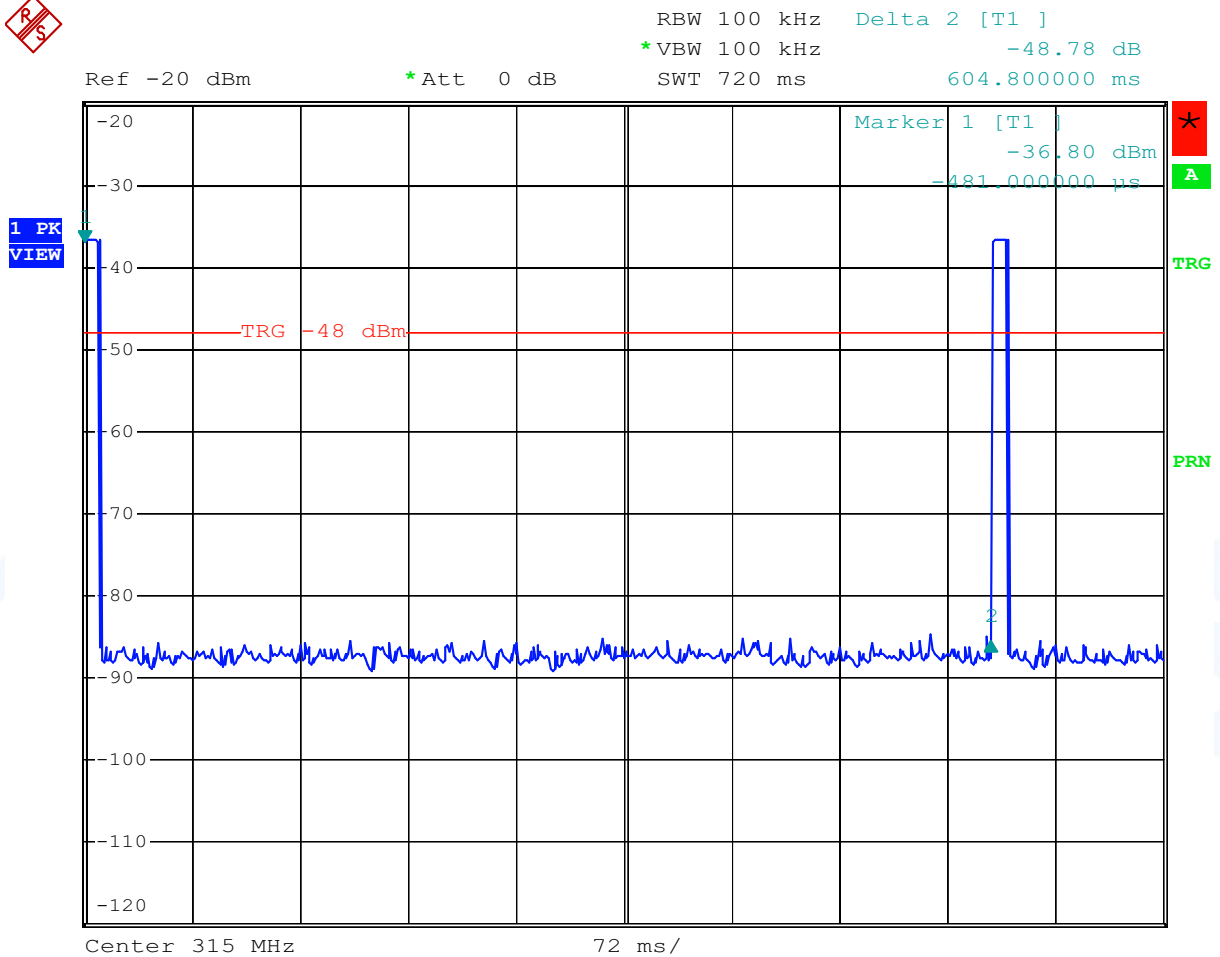

Date: 27.JAN.2006 11:30:57

## 5.5 Emission Bandwidth

For test instruments and accessories used see section 6 Part MB.

### 5.5.1 Description of the test location

Test location: AREA4

### 5.5.2 Photo documentation of the test set-up



### 5.5.3 Test result

Fundamental [MHz]	20dB Bandwidth F1 [MHz]	20dB Bandwidth F2 [MHz]	Measured Bandwidth [kHz]	LIMIT Fundamental f*0,0025 [kHz]
433,92	433,8858	434,0091	123,3	1084,8

Limit according to FCC Part 15 Subpart 15.231(c):

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.


The requirements are **FULFILLED**.

**Remarks:** For detailed results, please see the test protocol below.

FCC ID: OYG TSSRE4TB

## 5.5.4 Test protocol

### Emission Bandwidth FCC Part 15 Subpart 15.231(c)

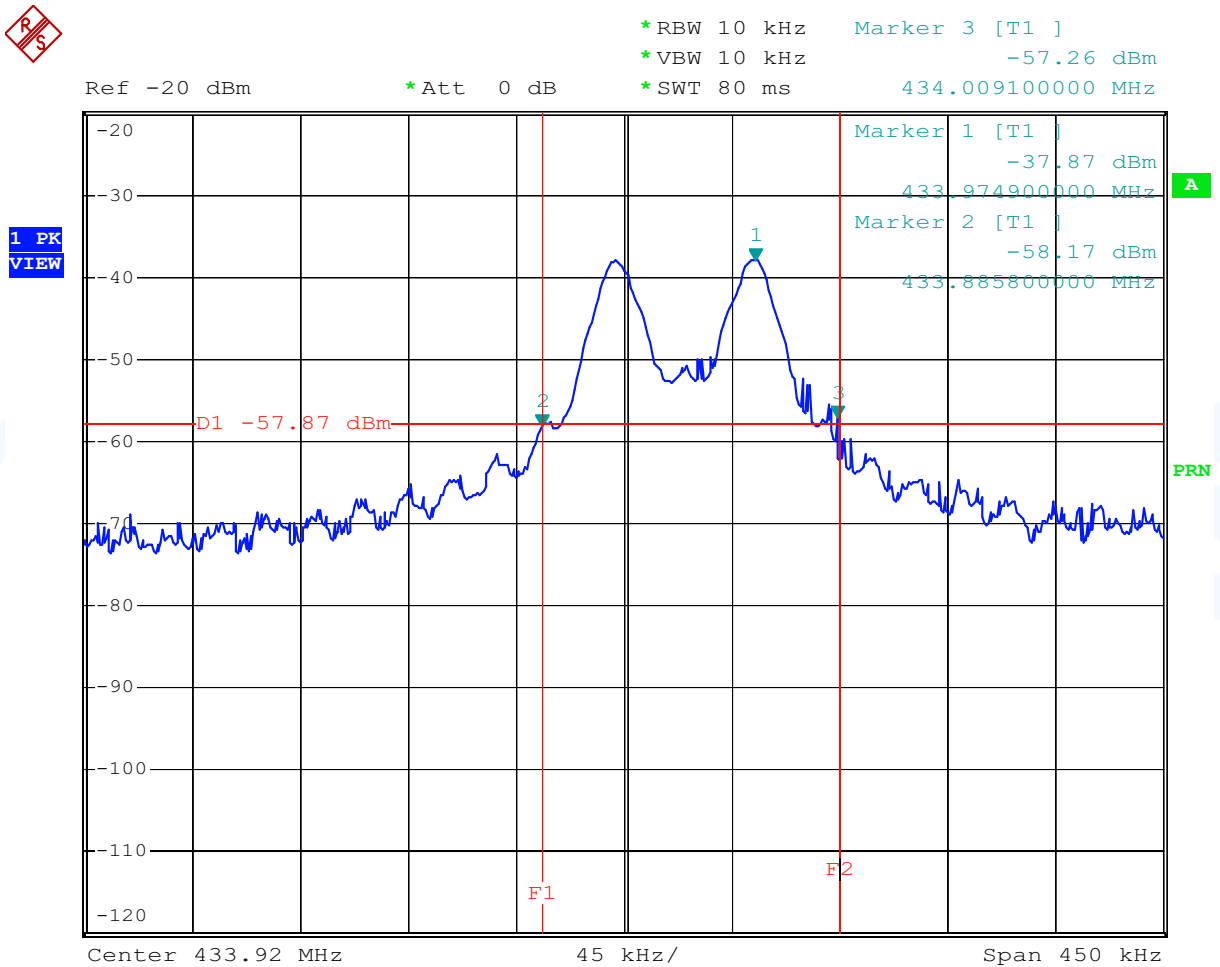

Date: 27.JAN.2006 11:13:12

## 5.6 Signal deactivation

For test instruments and accessories used see section 6 Part MB.

### 5.6.1 Description of the test location

Test location: AREA4

### 5.6.2 Photo documentation of the test set-up



### 5.6.3 Test result

The duration of the transmission is 10,3 milliseconds each time the Trigger Transmitter TSSTSb triggered the EuT which meets the requirement of ceasing transmission within 5 seconds.

Limit according to FCC Part 15 Subpart 15.231(a):

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released and a transmitter activated automatically shall cease transmission within 5 seconds after activation.

The requirements are **FULFILLED**.

**Remarks:** For detailed test results, please see the test protocol below.

---




---

FCC ID: OYG TSSRE4TB

#### 5.6.4 Test protocol

#### Signal deactivation FCC Part 15 Subpart 15.231(a)

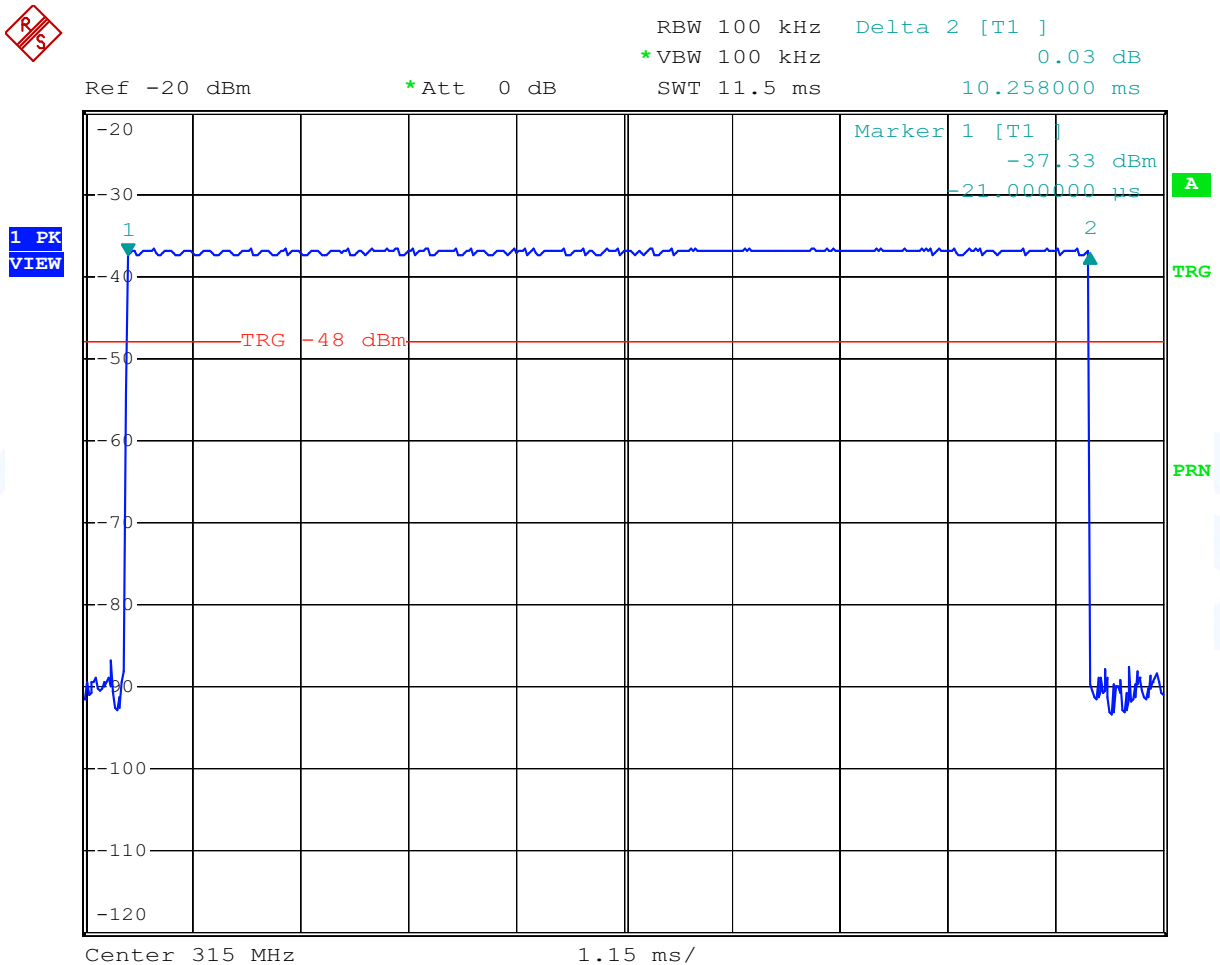

Date: 27.JAN.2006 11:29:17

## 6 TEST CONDITIONS AND RESULTS FOR 125 KHz Receiver

### 6.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

#### 6.1.1 Description of the test location

Test location:

#### 6.1.2 Photo documentation of the test set-up

#### 6.1.3 Description of Measurement

The final level, expressed in dB $\mu$ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit, which is equivalent to the Australian AS 3548 limit.

To convert between dB $\mu$ V and  $\mu$ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the DC power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 $\Omega$ /50  $\mu$ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeter's above the floor and is positioned 40 centimeter's from the vertical ground plane (wall) of the screen room. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

**Remarks:** The measurement is not applicable because the EuT is not powered by the system, but  
it is separated powered by a 3,0 V battery.  
 \_\_\_\_\_  
 \_\_\_\_\_



## 6.2 Radiated emissions (electric field)

For test instruments and accessories used see section 6 Part SER 1.

### 6.2.1 Description of the test location

Test location: OATS1

### 6.2.2 Photo documentation of the test set-up



### 6.2.3 Description of Measurement

Radiated emissions from the EuT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in dBµV/m, is arrived by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EuT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3m horizontally from the EuT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 1 MHz. All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

The resolution bandwidth during the measurement is as follows:

0,009 MHz – 30 MHz	ResBW: 10 kHz
30 MHz – 1000 MHz:	ResBW: 120 kHz
Above 1000 MHz	ResBW: 1 MHz

### 6.2.4 Test result

#### Testresult in detail:(<1GHz)

Frequency [MHz]	L: QP [dBµV]	L: AV [dBµV]	Bandwidth [kHz]	Correct. [dB]	L: QP [dBµV/m]	L: AV [dBµV/m]	Limit [dBµV/m]	Delta [dB]
0,009-30			0,2 - 10		< 30			

FCC ID: OYG TSSRE4TB

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (meters)
	( $\mu\text{V/m}$ )	dB ( $\mu\text{V/m}$ )	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

Limit according to FCC Part 15 Subpart 15.109(a)

Frequency [MHz]	15.109 Limits [ $\mu\text{V/m}$ ]	15.109 Limits [dB $\mu\text{V/m}$ ]
30-88	100	40
88-216	150	43,5
<b>216-960</b>	<b>200</b>	<b>46</b>
<b>Above 960</b>	<b>500</b>	<b>54</b>

The requirements are **FULFILLED**.

**Remarks:** According to FCC Part 15.33(b), the measurement was performed up to 30 MHz.

FCC ID: OYG TSSRE4TB

## 7 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

The calibration intervals and the calibration history will be given out on request.

Test ID	Model / Type	Kind of Equipment	Manufacturer	Equipment No.
CPR 2	ESVS 30	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-006
	VULB 9168	Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	02-02/24-05-005
	S10162-B / +11N-50-10-5 / +	RF Cable 33m	Huber + Suhner	02-02/50-05-031
	KK-EF393-21N-16	RF Cable 20m	Huber + Suhner	02-02/50-05-033
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
DC	FSP 30	Spectrum Analyzer	Rohde & Schwarz München	02-02/11-05-001
	THS730A	Handheld Scope	Tektronix GmbH	02-02/13-05-001
	HM-8142	Power Supply	A.H.-Systems Inc.	02-02/50-05-047
MB	FSP 30	Spectrum Analyzer	Rohde & Schwarz München	02-02/11-05-001
	THS730A	Handheld Scope	Tektronix GmbH	02-02/13-05-001
	HM-8142	Power Supply	A.H.-Systems Inc.	02-02/50-05-047
SER 2	ESVS 30	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-006
	VULB 9168	Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	02-02/24-05-005
	S10162-B / +11N-50-10-5 / +	RF Cable 33m	Huber + Suhner	02-02/50-05-031
	KK-EF393-21N-16	RF Cable 20m	Huber + Suhner	02-02/50-05-033
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
SER 3	AFS4-01000400-10-10P-4	RF Amplifier 1-4 GHz	PARZICH GMBH	02-02/17-05-003
	AMF-4F-04001200-15-10P	RF Amplifier 4-12 GHz	PARZICH GMBH	02-02/17-05-004
	AFS5-12001800-18-10P-6	RF Amplifier 12-18 GHz	PARZICH GMBH	02-02/17-05-005
	3117	Horn Antenna 1-18 GHz	EMCO Elektronik GmbH	02-02/24-05-009
	Sucoflex N-1600-SMA	RF Cable	novotronik Signalverarbeitung	02-02/50-05-073
	Sucoflex N-2000-SMA	RF Cable	novotronik Signalverarbeitung	02-02/50-05-075