


INTERTEK TESTING SERVICES


Report No.: HK11051169-1
Sample No.: 1/2

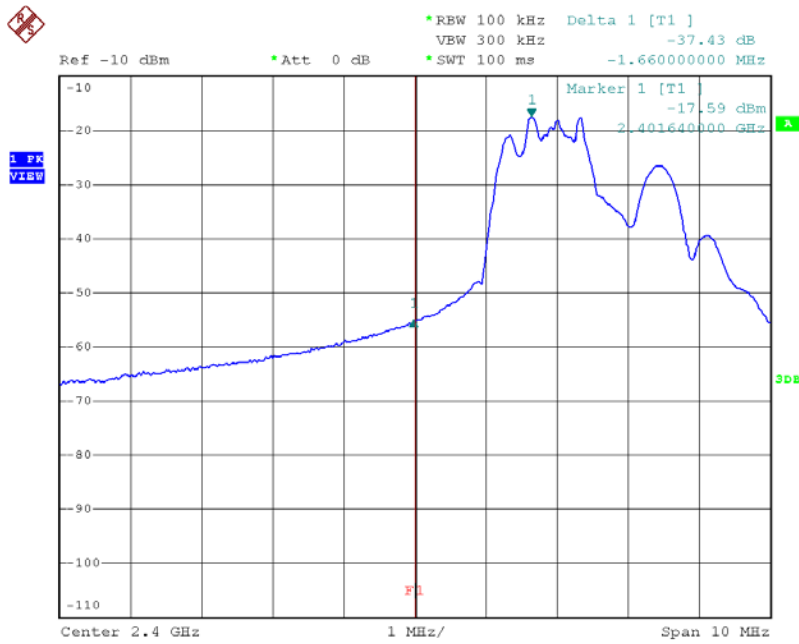

OATS = 91.40 dBuV/m
 Field Strength (Peak)
 =91.40 – 37.43 dBuV/m
 =53.97 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 =53.97 - AF dBuV/m
 =53.97 – 27.10 dBuV/m
 =26.87 dBuV/m
 (Limit: 54 dBuV/m)

Date: 25.MAY.2011 00:08:50

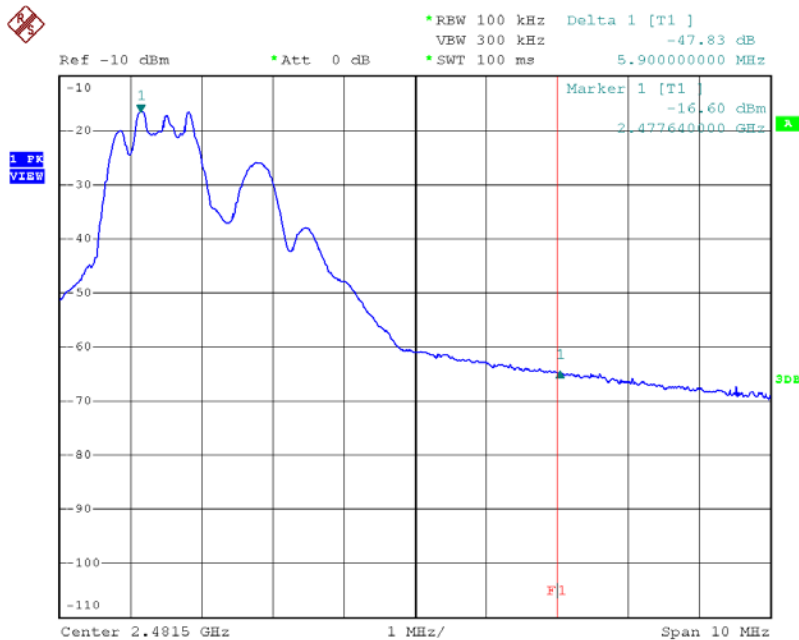

OATS = 91.80 dBuV/m
 Field Strength (Peak)
 =91.80 – 47.83 dBuV/m
 =43.97 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 =43.87 - AF dBuV/m
 =43.87 – 27.10 dBuV/m
 =16.87 dBuV/m
 (Limit: 54 dBuV/m)

Date: 25.MAY.2011 00:11:01

Bandedge Plot - Pursuant to FCC Part 15 Section 15.249 Requirement (Pass/Fail)