


INTERTEK TESTING SERVICES


Report No.: HK11030506-1
Sample No.: 1/2

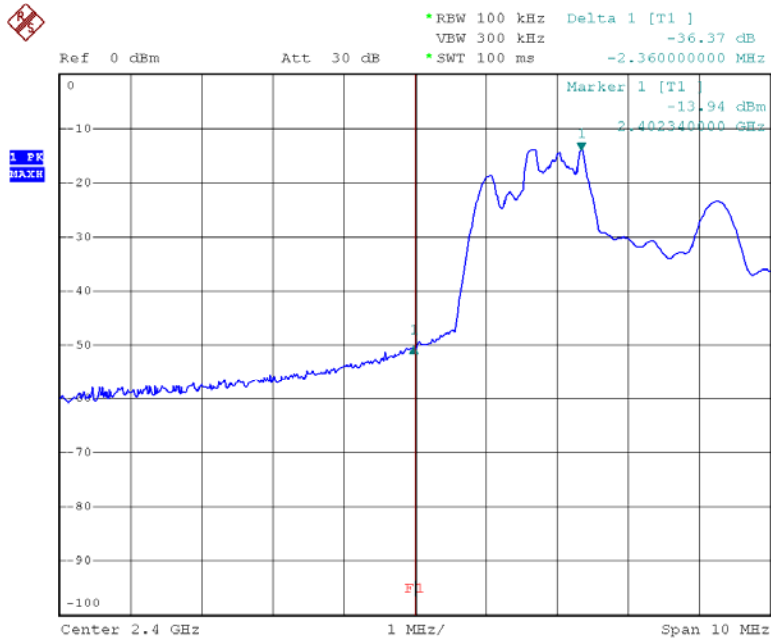

OATS = 88.8dBuV/m
 Field Strength (Peak)
 =88.8 – 36.37 dBuV/m
 =52.43 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength
 (Average)
 =52.43 – AF dBuV/m
 =52.43 – 25.3 dBuV/m
 = 27.13 dBuV/m
 (Limit: 54 dBuV/m)

Date: 31.MAR.2011 15:29:49

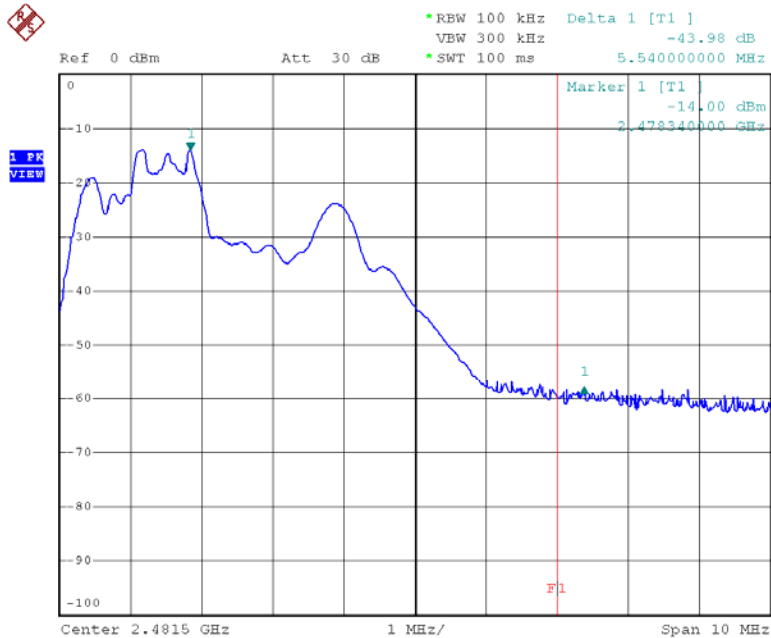

OATS = 89.5dBuV/m
 Field Strength (Peak)
 =89.5 – 43.98 dBuV/m
 =45.52 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 =45.52 – AF dBuV/m
 =45.52 – 25.3 dBuV/m
 =20.22 dBuV/m
 (Limit: 54 dBuV/m)

Date: 31.MAR.2011 15:27:15

Bandedge Plot - Pursuant to FCC Part 15 Section 15.249 Requirement (Pass)