


INTERTEK TESTING SERVICES


Report No.: HK11051168-1
Sample No.: 1/2

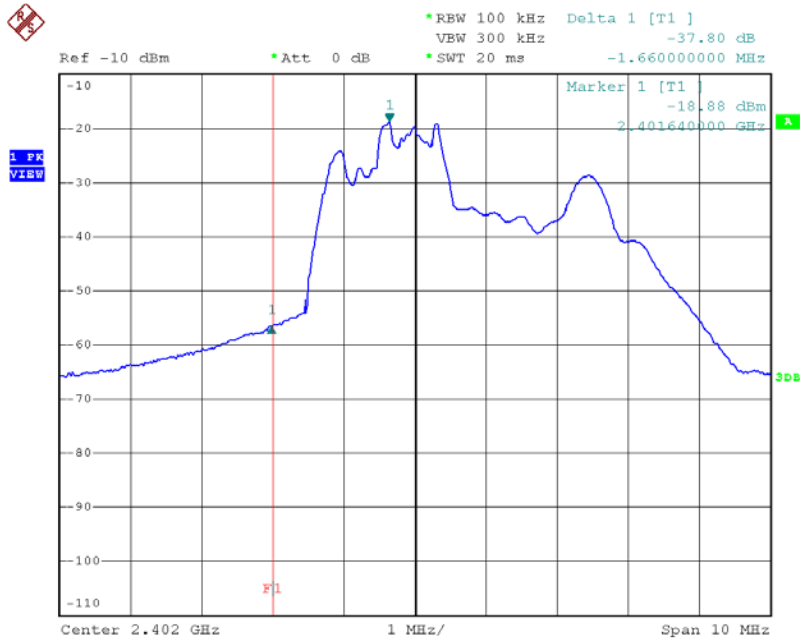

OATS = 102.00 dBuV/m
 Field Strength (Peak)
 =102.00 – 37.80 dBuV/m
 =64.20 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 =64.20 - AF dBuV/m
 =64.20 - 27.20 dBuV/m
 =37.00 dBuV/m
 (Limit: 54 dBuV/m)

Date: 24.MAY.2011 23:37:47

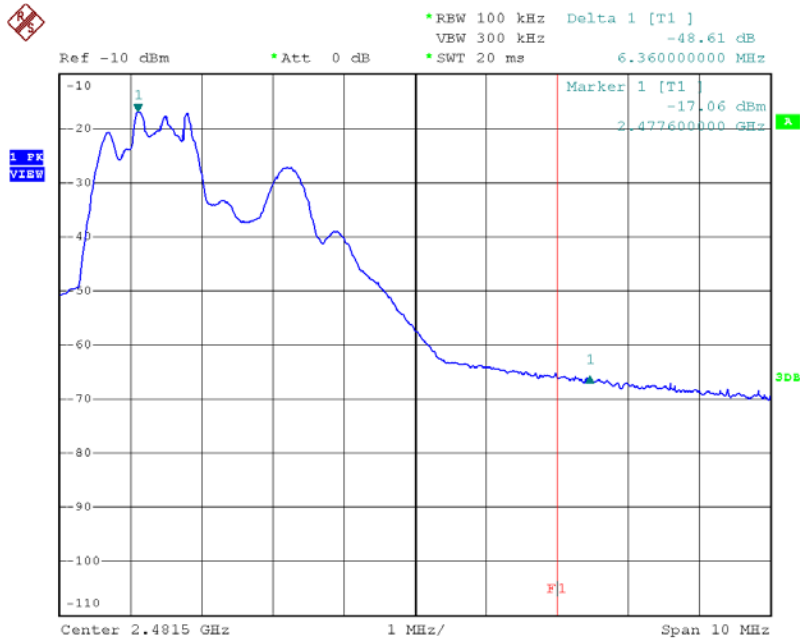

OATS = 102.90 dBuV/m
 Field Strength (Peak)
 =102.90 – 48.61 dBuV/m
 =54.29 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 =54.29 - AF dBuV/m
 =54.29 - 27.20 dBuV/m
 =27.09 dBuV/m
 (Limit: 54 dBuV/m)

Date: 24.MAY.2011 23:41:29

Bandedge Plot - Pursuant to FCC Part 15 Section 15.249 Requirement (Pass/Fail)