


INTERTEK TESTING SERVICES


Report No.: HK11030505-1
Sample No.: 1/2

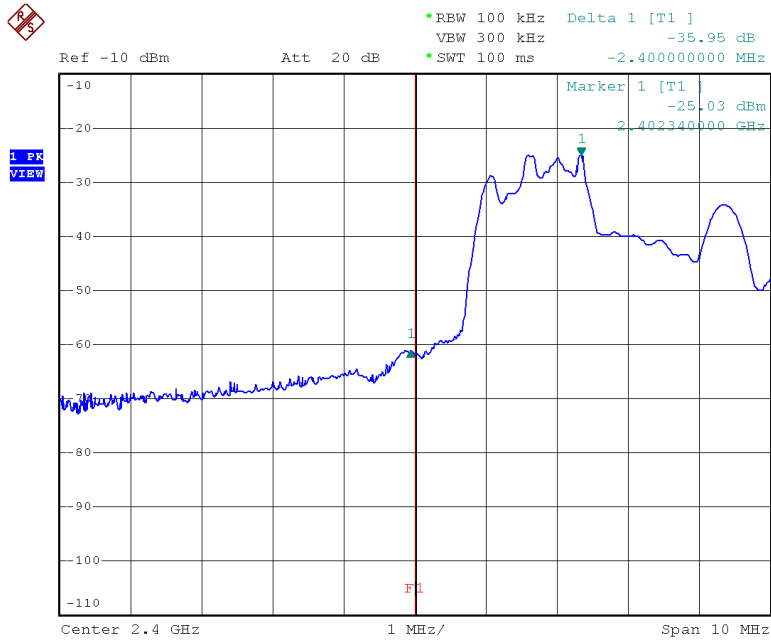

OATS = 98.5dBuV/m
 Field Strength (Peak)
 =98.5 – 35.95 dBuV/m
 =62.55 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength
 (Average)
 =62.55 – AF dBuV/m
 =62.55 – 26.8 dBuV/m
 =35.75 dBuV/m
 (Limit: 54 dBuV/m)

Date: 31.MAR.2011 15:34:03

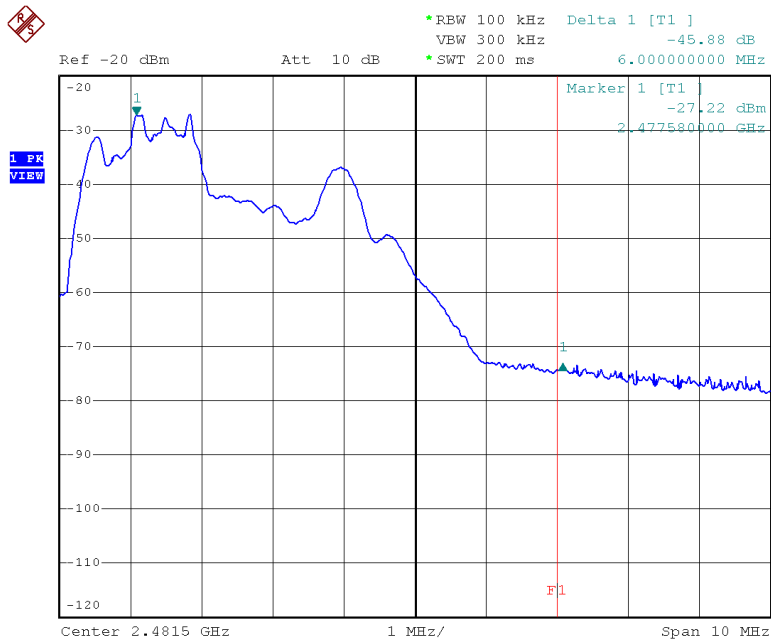

OATS = 98.5dBuV/m
 Field Strength (Peak)
 =98.5 – 45.88 dBuV/m
 =52.62 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 =52.62 – AF dBuV/m
 =52.62 – 26.8 dBuV/m
 =25.82 dBuV/m
 (Limit: 54 dBuV/m)

Date: 31.MAR.2011 15:20:12

Bandedge Plot - Pursuant to FCC Part 15 Section 15.249 Requirement (Pass/Fail)