
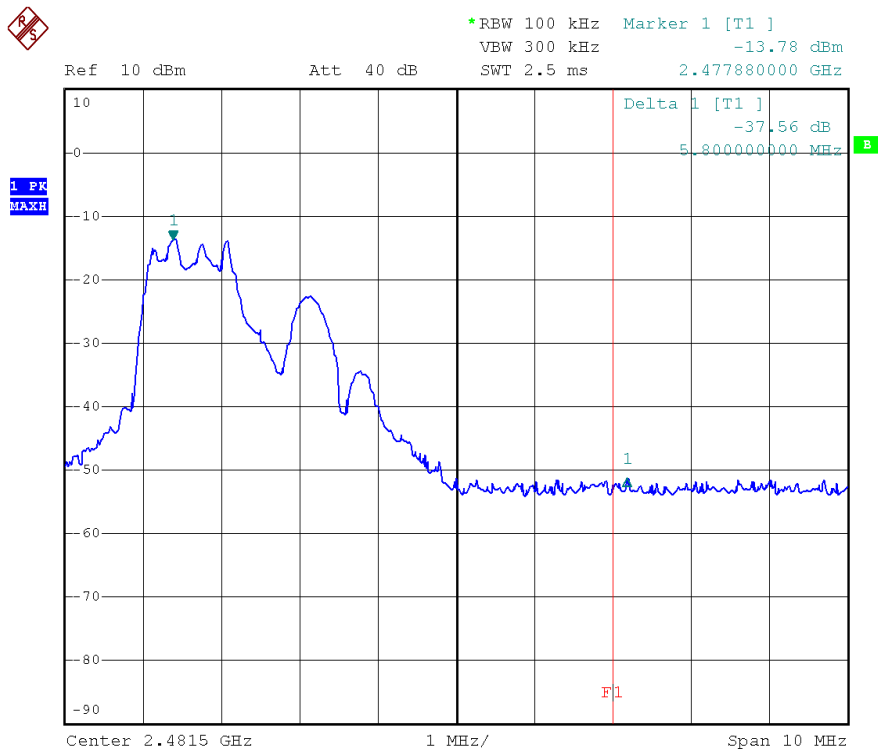


INTERTEK TESTING SERVICES

Report No.: HK11110731-1
Sample No.: 1/1

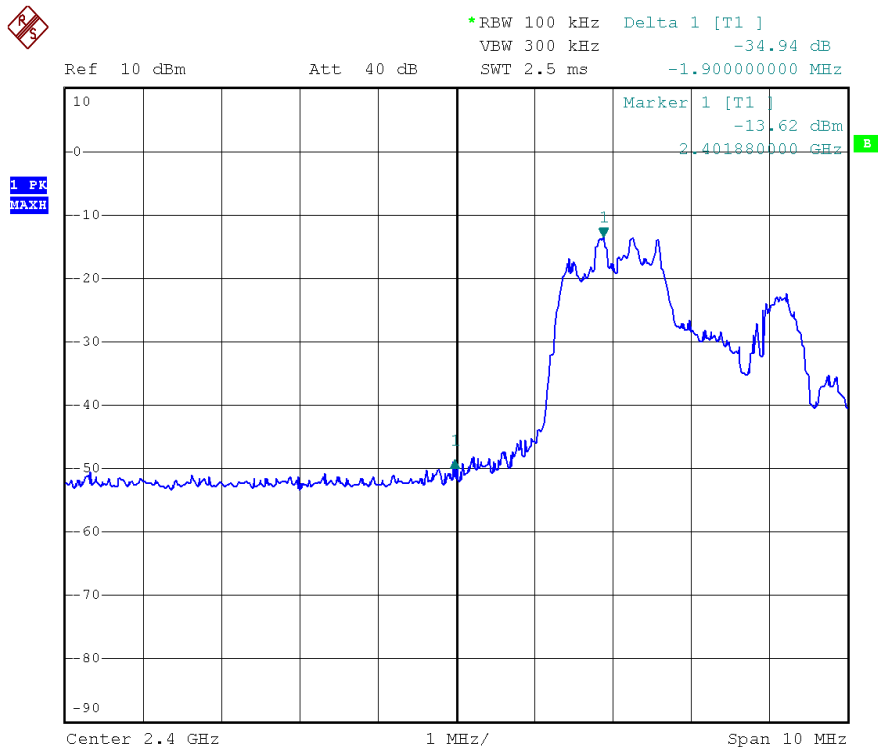

<p>Lower bandedge (2402MHz) OATS = 101.6dBuV/m Field Strength (Peak) = 101.6 - 34.9 dBuV/m = 66.7 dBuV/m (Limit 74dBuV/m)</p> <p>Field Strength (Average) = 66.7 - AF dBuV/m = 66.7 - 27.0 dBuV/m = 39.7 dBuV/m (Limit 54dBuV/m)</p> <p>Upper Bandedge (2478MHz) OATS = 101.1dBuV/m Field Strength (Peak) = 101.1 - 37.6 dBuV/m = 63.5 dBuV/m (Limit 74dBuV/m)</p> <p>Field Strength (Average) = 63.5 - AF dBuV/m = 63.5 - 27.0 dBuV/m = 36.5 dBuV/m (Limit 54dBuV/m)</p>

Bandwidth / Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement (Pass/Fail)