


# INTERTEK TESTING SERVICES


Report No.:HK12030861-1  
Sample No.:1/2

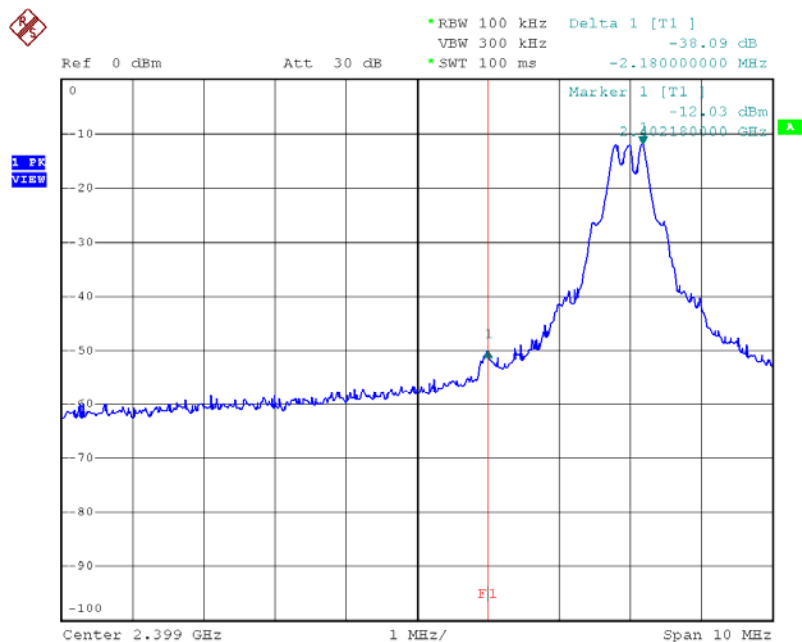

OATS = 95.0dBuV/m  
 Field Strength (Peak)  
 = 95.00 – 38.09 dBuV/m  
 = 56.91 dBuV/m  
 (Limit: 74 dBuV/m)

Field Strength (Average)  
 = 56.91 – AF dBuV/m  
 = 56.91 – 21.90 dBuV/m  
 = 35.01 dBuV/m  
 (Limit: 54 dBuV/m)

Date: 2.APR.2012 11:30:19

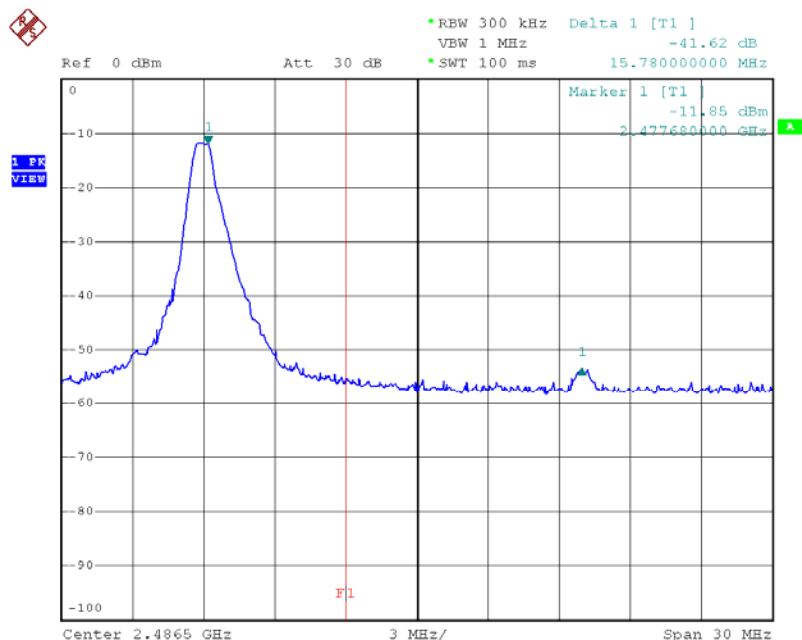

OATS = 95.2dBuV/m  
 Field Strength (Peak)  
 = 95.20 – 41.62 dBuV/m  
 = 53.58 dBuV/m  
 (Limit: 74 dBuV/m)

Field Strength (Average)  
 = 53.58 – AF dBuV/m  
 = 53.58 – 21.90 dBuV/m  
 = 31.68 dBuV/m  
 (Limit: 54 dBuV/m)

Date: 2.APR.2012 11:32:06

**Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement**

**(Pass/Fail)**