


REV	DETAIL OF CHANGE	DATE	APPROVED BY

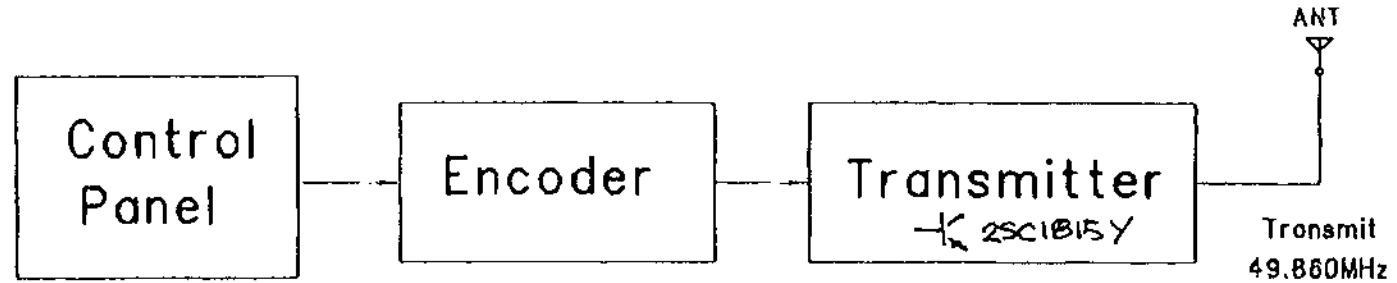

Transmitter Block diagram

Technical description	encoding signal will be generated by IC-PT8A971P when pressing a function key and move the jaysytick, it will be mixed with carry frequency and amplified by Q2 Modulating signal will be transmitted through antenna network
-----------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

参考用

Silverlit® <small>Silverlit Toys Manufacturing Ltd. 20th Floor, 20 Queen Street, Commerce Building Hong Kong</small>		DWG. NAME	BLOCK DIAGRAM
ITEM NO. B6011		ITEM NAME	Bubble Z
Transmit frequency : 49.860MHz		DRAWN/DATE	Sam/Mar-24-2001
SCALE	PAGE 1 OF 1	CHK/DATE	APP/DATE

SF-PE-0070-5/2000-99