

Recognized by the
Federal Communications Commission and Industry Canada
Anechoic chamber registration No.: 90462 (FCC)
Anechoic chamber registration No.: 3463 (IC)
TCB ID: DE0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 081/94-D0



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test report no.: 4-1246-01-04/04
FCC Part 15.249 / CANADA RSS-210
SBC HD1500/37
FCC-ID: OYMHD1502
IC: 135M-SBCHD150037

CETECOM – ICT Services GmbH
Untertürkheimerstr. 6-10
66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0

Fax: + 49 (0) 681 /598-9075

Table of contents

- 1 General information
 - 1.1 Notes
 - 1.2 Testing laboratory
 - 1.3 Details of applicant
 - 1.4 Application details
 - 1.5 Test item
 - 1.6 Test specifications

- 2 Technical test
 - 2.1 Summary of test results
 - 2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5.

The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.


Test laboratory manager:

2004-03-17	RSC - 8411	Berg M.
Date	Section	Name


Signature

Technical responsibility for area of testing:

2004-03-17	RSC - 8412	Hausknecht D.
Date	Section	Name


Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 0

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom-ict.de

Accredited testing laboratory

Accredited by : Regulierungsbehörde für Telekommunikation und Post (RegTP)

Listed by : Federal Communications Commission (FCC)

Authority	Identification/Registration No.
RegTP	TTI-P-G 081/94-D0
FCC	90462

1.3 Details of applicant

Name : Philips Consumer Electronics B.V.
B.U. Accessories

Street : Glaslaan 2, Building SBP 636

City : NL-5616LW Eindhoven

Country : The Netherlands

Telephone: +31-40-24-36589

Telex : +31-40-24-37256

E-mail : Karel.rysman@philips.com

Contact person:

Name : Mr. Karel Rysman

Telephone : +31-40-24-36589

Telex : +31-40-24-37256

E-mail : Karel.rysman@philips.com

1.4 Application details

Date of receipt of application : 2004-02-06

Date of receipt of test item : 2004-02-26


Date of test : 2004-02-27

1.5 Test item

Type of equipment : **Dolby digital wireless headphone**
Type designation : **SBC HD1500/37 (consists of : Tx: SBC HD1502/37
and Rx: SBC HD1505/37**
Manufacturer : **see applicant**
Street :
City :
Country :
Serial number : Tx: HS1A0349000013 ; Rx: HS1A0349000010

Additional information :
Frequency : 914.1 – 915.3 MHz
420KF1W (= 2 x max deviation (80 kHz) + 260 kbps)
Channel spacing : 300 kHz
Number of channels : 4
Antenna : integral antenna
ERP : 94 dB μ V/m in 3m
Power supply : Tx: 120V/9V AC/DC Adapter; Rx: 2,4V rechargeable Ni.MH
battery
Temperature range : +5°C - +45°C
Transmitter spurious : 40.8 μ V/m in 3m
Receiver spurious : 25.2 dB μ /m in 3m

DECLARATION OF COMPLIANCE: I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Signature:  _____

Date: 2003-09-02 Michael Berg ; Test management
NAME AND TITLE (Please print or type):

1.6 Test specifications: FCC Part 15 §15.249 CANADA RSS-210

2 Technical test

2.1 Summary of test results

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2001 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.35, 15.209.

The product fulfils also the requirements for CANADA RSS-210

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT : PASS

2.2 Test report

TEST REPORT

Test report no: 4-1246-01-04/04

LIST OF MEASUREMENTS.

The list of measured parameters is given below.

Clause		Page number
FIELDSTRENGTH OF FUNDAMENTAL	§ 15.249	9
SPURIOUS RADIATION	§ 15.249	10
RECEIVER SPURIOUS RADIATION	§ 15.109	24
CONDUCTED EMISSIONS	§ 15.107/207	29
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		31
TEST SETUP		33

Equipment under test : SBC HD1500/37
Ambient temperature : 23°C
Relative humidity : 39%
FIELDSTRENGTH OF FUNDAMENTAL
§ 15.249

TEST CONDITIONS		MAXIMUM OUTPUT POWER (QUASI PEAK)		
		ERP (mV/m)		
Frequency (MHz)		914.1 MHz	914.5 MHz	915.3 MHz
T _{nom} (23.0)°C	V _{nom} (115V)V	47.9	46.2	50.0
Measurement uncertainty		±3dB		

Quasi Peak
Measured at a distance of 3m
Limits
SUBCLAUSE § 15.249 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental (mV/m)	Field strength of Fundamental (µV/m)
902-928	50 (94 dBµV/m)	500 (54 dBµV/m)
2400-2483.5	50 (94 dBµV/m)	500 (54 dBµV/m)
5725-5875	50 (94 dBµV/m)	500 (54 dBµV/m)
24.0-24.25 GHz	250 (108 dBµV/m)	2500 (68 dBµV/m)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 – 24; 64; 52-63

Test report no.:4-1246-01-04/04

Issue date: 2004-02-27

Page 10 (35)

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

SPURIOUS RADIATION

§ 15.249

Ch 1 (25 – 1000 MHz)

Data File : /41246_05.DOC

16 Feb 1904 11:02:10

No	EMISSION	SPEC LIMIT	MEASUREMENTS			SITE			CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE	POL	HGT cm	AZM deg		
				dB					dB	
1	45.1	40.0	27.0	-13.0	PK	V	102	360	N/T	
2	50.8	40.0	26.5	-13.6	PK	V	102	360	N/T	
3	98.1	44.0	28.9	-15.1	PK	V	102	360	N/T	
4	101.8	44.0	31.9	-12.1	PK	V	102	360	N/T	
5	117.7	44.0	34.2	-9.8	PK	V	102	360	N/T	
6	122.651	44.0	32.0	-12.0	QP	V	104	82	12.	
7	125.2	44.0	31.3	-12.7	PK	V	102	360	N/T	
8	141.2	44.0	25.9	-18.1	PK	V	102	360	N/T	
9	153.1	44.0	32.8	-11.2	PK	H	173	0	N/T	
10	164.9	44.0	29.6	-14.4	PK	V	102	360	N/T	
11	170.0	44.0	29.7	-14.3	PK	H	173	0	N/T	
12	170.2	44.0	32.6	-11.4	PK	V	102	360	N/T	
13	180.9	44.0	30.0	-14.0	PK	V	102	360	N/T	
14	183.7	44.0	29.5	-14.5	PK	V	102	360	N/T	
15	188.5	44.0	34.1	-9.9	PK	H	173	0	N/T	
16	191.4	44.0	31.0	-13.0	PK	V	102	360	N/T	
17	194.9	44.0	26.2	-17.8	PK	V	102	360	N/T	
18	211.4	44.0	32.7	-11.3	PK	V	101	360	N/T	
19	235.1	46.0	29.3	-16.7	PK	V	101	360	N/T	
20	271.0	46.0	34.7	-11.3	PK	H	150	0	N/T	
21	306.402	46.0	39.8	-6.2	QP	H	103	62	15.8	
22	323.2	46.0	35.1	-11.0	PK	V	101	360	N/T	
23	333.8	46.0	35.0	-11.1	PK	V	101	360	N/T	
24	357.5	46.0	38.0	-8.0	PK	V	101	360	N/T	
25	424.4	46.0	36.5	-9.5	PK	V	101	360	N/T	
26	459.665	46.0	33.4	-12.6	QP	V	107	248	19.4	
27	470.9	46.0	36.5	-9.5	PK	V	101	360	N/T	
28	550.9	46.0	38.5	-7.5	PK	V	101	360	N/T	
29	612.1	46.0	35.3	-10.7	PK	H	150	0	N/T	
30	666.8	46.0	35.6	-10.4	PK	V	101	360	N/T	
31	764.7	46.0	35.7	-10.3	PK	V	101	360	N/T	
32	856.1	46.0	35.9	-10.1	PK	H	150	0	N/T	
33	911.6	46.0	95.6	49.6	PK	V	101	360	N/T	LINK
34	916.5	46.0	35.3	-10.7	PK	H	150	0	N/T	
35	952.4	46.0	36.9	-9.1	PK	V	101	360	N/T	

N/T in CORR FACTOR column denotes a non-traceable signal.

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37


Ambient temperature : 23°C

Relative humidity : 39%

CH 1 (25-200 MHz V)

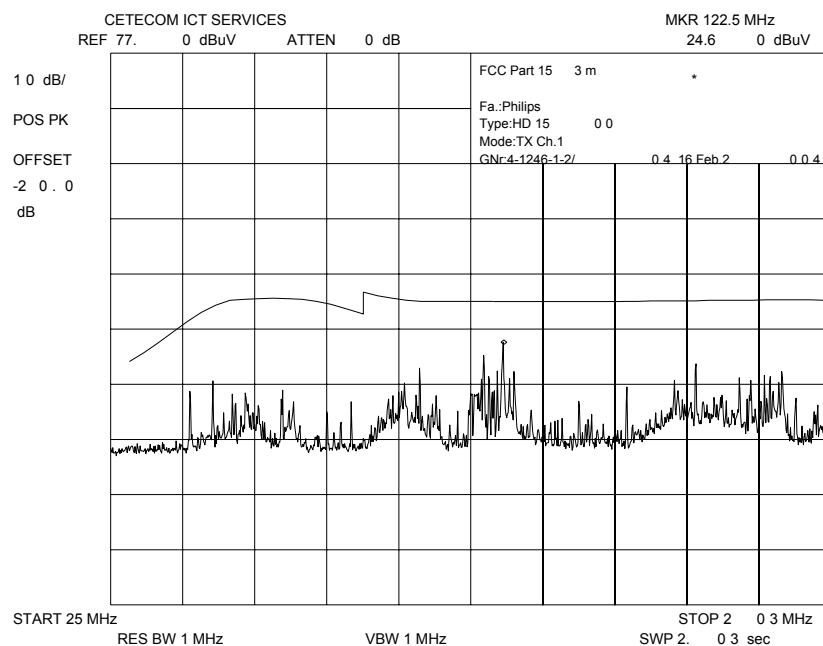

CH 1 (25-200 MHz H)

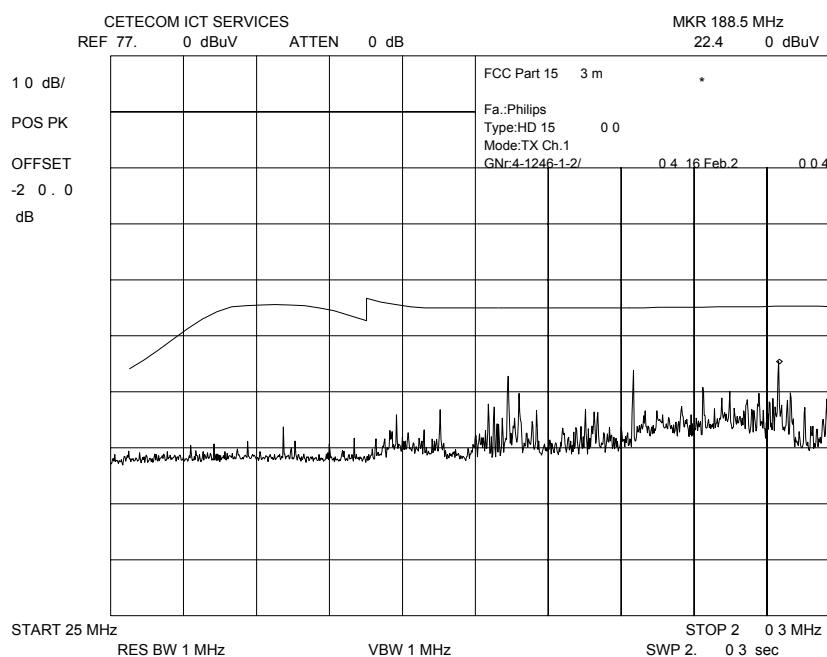

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37


Ambient temperature : 23°C

Relative humidity : 39%

CH 1 (200-1000 MHz V)

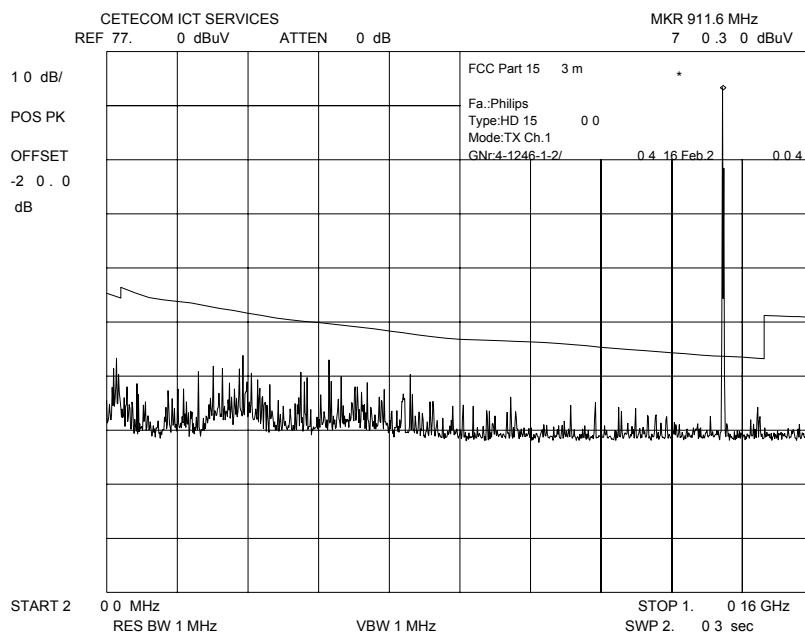

CH 1 (200-1000 MHz H)

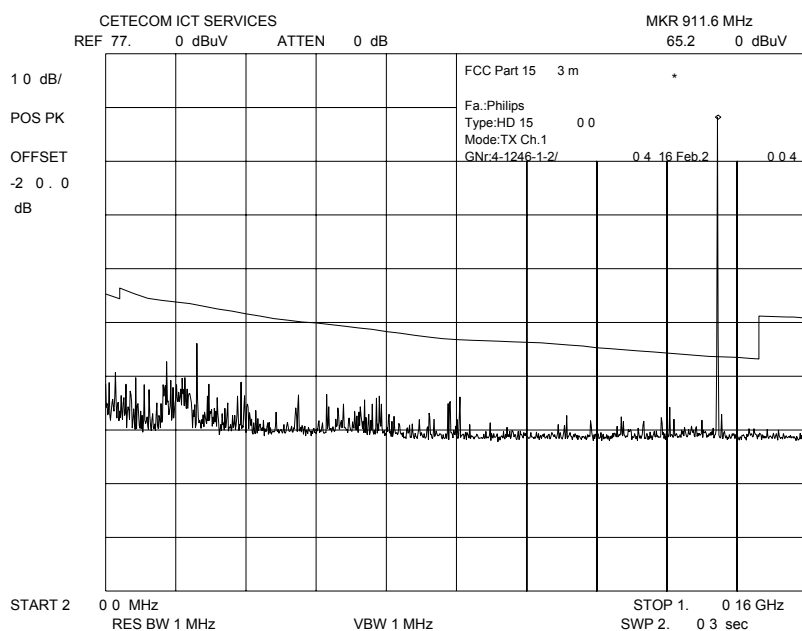

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Test report no.:4-1246-01-04/04

Issue date: 2004-02-27

Page 13 (35)

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

CH 2 (25 – 1000 MHz)

Data File : /41246_15.DOC

16 Feb 1904 15:28:03

No	EMISSION	SPEC LIMIT	MEASUREMENTS			POL	SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE		HGT	AZM		
			dBuV/m	dB			cm	deg	dB	
1	45.1	40.0	26.7	-13.3	PK	V	103	0	N/T	
2	50.8	40.0	26.4	-13.7	PK	V	103	0	N/T	
3	58.9	40.0	24.0	-16.1	PK	V	103	0	N/T	
4	67.7	40.0	23.0	-17.1	PK	V	103	0	N/T	
5	98.1	44.0	28.5	-15.5	PK	V	103	0	N/T	
6	102.0	44.0	29.0	-15.0	PK	V	103	0	N/T	
7	117.7	44.0	34.1	-9.9	PK	V	103	0	N/T	
8	122.623	44.0	31.6	-12.5	QP	V	109	83	12.	
9	125.2	44.0	32.3	-11.7	PK	V	103	0	N/T	
10	153.1	44.0	32.1	-11.9	PK	H	158	360	N/T	
11	165.7	44.0	30.0	-14.0	PK	V	103	0	N/T	
12	170.2	44.0	33.4	-10.6	PK	H	158	360	N/T	
13	180.9	44.0	32.2	-11.8	PK	V	103	0	N/T	
14	188.3	44.0	30.4	-13.6	PK	V	103	0	N/T	
15	188.5	44.0	33.1	-10.9	PK	H	158	360	N/T	
16	190.7	44.0	29.7	-14.3	PK	V	103	0	N/T	
17	200.3	44.0	25.8	-18.2	PK	V	103	0	N/T	
18	204.1	44.0	32.1	-12.0	PK	H	149	0	N/T	
19	211.4	44.0	34.0	-10.0	PK	V	103	0	N/T	
20	235.1	46.0	33.1	-12.9	PK	H	149	0	N/T	
21	271.0	46.0	35.6	-10.4	PK	H	149	0	N/T	
22	292.2	46.0	35.5	-10.5	PK	H	149	0	N/T	
23	306.354	46.0	40.5	-5.5	QP	H	102	280	15.8	
24	323.2	46.0	38.5	-7.6	PK	H	149	0	N/T	
25	357.5	46.0	35.7	-10.3	PK	H	149	0	N/T	
26	361.6	46.0	34.1	-11.9	PK	V	103	0	N/T	
27	412.2	46.0	34.9	-11.1	PK	V	103	0	N/T	
28	457.204	46.0	39.3	-6.7	QP	V	109	241	19.3	
29	459.715	46.0	31.8	-14.2	QP	V	106	253	19.4	
30	544.4	46.0	37.9	-8.1	PK	V	103	0	N/T	
31	550.9	46.0	37.3	-8.7	PK	V	103	0	N/T	
32	612.1	46.0	36.6	-9.4	PK	H	149	0	N/T	
33	672.5	46.0	36.4	-9.6	PK	V	103	0	N/T	
34	736.2	46.0	36.0	-10.0	PK	V	103	0	N/T	
35	763.9	46.0	38.1	-7.9	PK	H	149	0	N/T	
36	811.3	46.0	37.4	-8.6	PK	H	149	0	N/T	
37	848.378	46.0	34.8	-11.2	QP	V	121	79	24.6	
38	856.1	46.0	38.2	-7.8	PK	H	149	0	N/T	
39	912.5	46.0	96.3	50.3	PK	V	103	0	N/T	LINK
40	951.6	46.0	36.6	-9.4	PK	V	103	0	N/T	
41	999.0	54.0	37.6	-16.4	PK	V	103	0	N/T	

N/T in CORR FACTOR column denotes a non-traceable signal.

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37


Ambient temperature : 23°C

Relative humidity : 39%

CH 2 (25 – 200 MHz V)

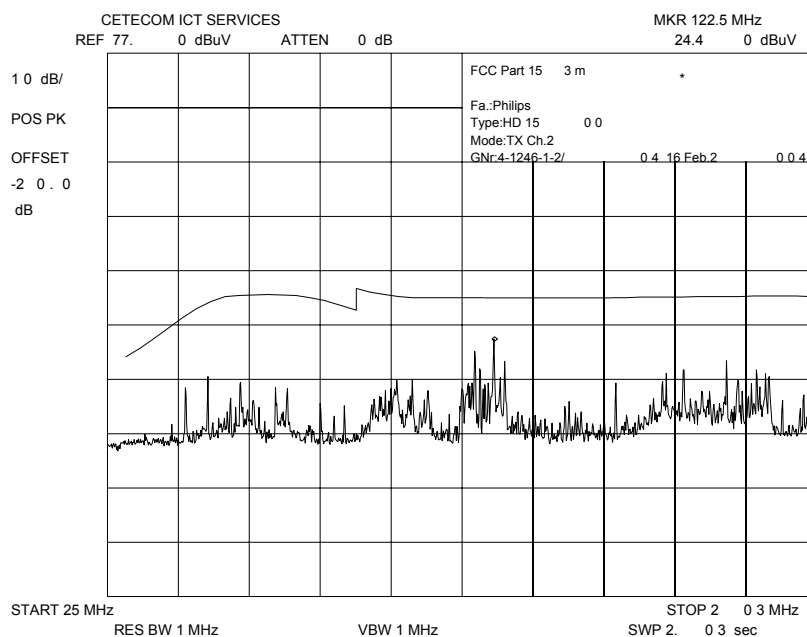

CH 2 (25 – 200 MHz H)

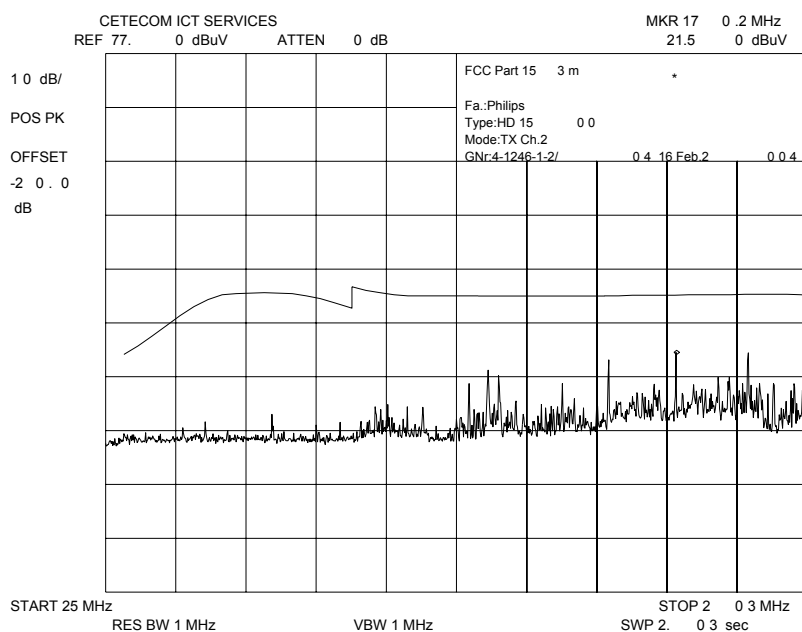

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37


Ambient temperature : 23°C

Relative humidity : 39%

CH 2 (200 – 1000 MHz V)

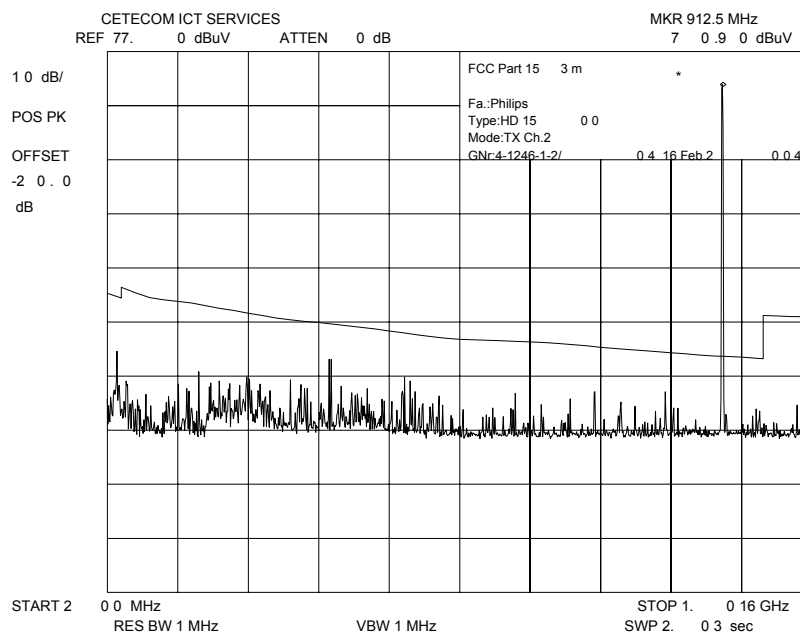

CH 2 (200 – 1000 MHz H)

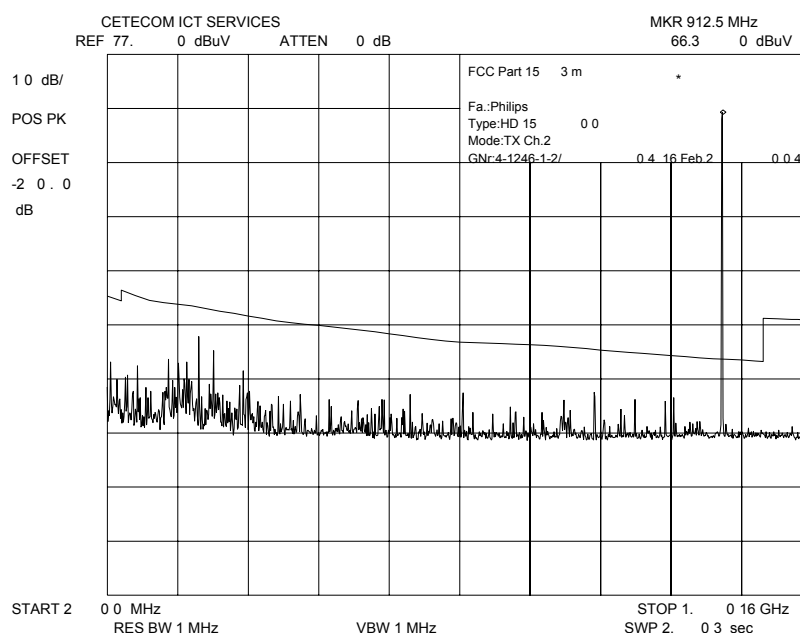

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Test report no.:4-1246-01-04/04

Issue date: 2004-02-27

Page 16 (35)

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

CH 4 (25 – 1000 MHz)

Data File : /41246_10.doc

16 Feb 1904 12:03:25

No	EMISSION	SPEC LIMIT	MEASUREMENTS			SITE			CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE	POL	HGT cm	AZM deg		
			dBuV/m	dB					dB	
1	45.1	40.0	27.7	-12.3	PK	V	102	360	N/T	
2	50.8	40.0	27.1	-13.0	PK	V	102	360	N/T	
3	58.9	40.0	23.0	-17.1	PK	V	102	360	N/T	
4	68.0	40.0	21.9	-18.2	PK	V	102	360	N/T	
5	84.9	40.0	22.6	-17.4	PK	V	102	360	N/T	
6	98.1	44.0	29.2	-14.8	PK	V	102	360	N/T	
7	102.0	44.0	31.3	-12.7	PK	V	102	360	N/T	
8	117.7	44.0	34.3	-9.7	PK	V	102	360	N/T	
9	122.600	44.0	32.0	-12.0	QP	V	109	96	12.	
10	125.2	44.0	32.7	-11.3	PK	V	102	360	N/T	
11	153.1	44.0	31.3	-12.7	PK	H	169	0	N/T	
12	165.7	44.0	30.5	-13.5	PK	V	102	360	N/T	
13	170.0	44.0	33.7	-10.3	PK	V	102	360	N/T	
14	180.9	44.0	31.8	-12.2	PK	H	169	0	N/T	
15	187.1	44.0	30.9	-13.1	PK	V	102	360	N/T	
16	188.5	44.0	34.4	-9.6	PK	H	169	0	N/T	
17	194.9	44.0	25.3	-18.7	PK	V	102	360	N/T	
18	200.3	44.0	25.7	-18.3	PK	V	102	360	N/T	
19	204.1	44.0	30.7	-13.4	PK	V	107	360	N/T	
20	211.4	44.0	32.8	-11.2	PK	V	107	360	N/T	
21	282.4	46.0	33.2	-12.8	PK	H	140	0	N/T	
22	306.366	46.0	40.3	-5.7	QP	H	134	357	15.8	
23	361.6	46.0	37.4	-8.6	PK	V	107	360	N/T	
24	457.604	46.0	39.9	-6.1	QP	V	105	239	19.4	
25	489.7	46.0	36.7	-9.3	PK	V	107	360	N/T	
26	550.9	46.0	37.9	-8.1	PK	V	107	360	N/T	
27	612.842	46.0	33.3	-12.7	QP	H	136	8	22.2	
28	728.8	46.0	38.1	-7.9	PK	V	107	360	N/T	
29	766.012	46.0	31.7	-14.3	QP	V	110	323	23.6	
30	794.9	46.0	37.6	-8.4	PK	V	107	360	N/T	
31	846.4	46.0	37.3	-8.7	PK	V	107	360	N/T	
32	856.1	46.0	38.3	-7.7	PK	V	107	360	N/T	
33	897.338	46.0	40.8	-5.2	QP	V	102	197	25.2	
34	913.3	46.0	95.9	49.9	PK	V	107	360	N/T	LINK
35	954.9	46.0	37.4	-8.6	PK	V	107	360	N/T	
36	999.0	54.0	36.6	-17.4	PK	V	107	360	N/T	

N/T in CORR FACTOR column denotes a non-traceable signal.

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37


Ambient temperature : 23°C

Relative humidity : 39%

CH 4 (25-200 MHz V)

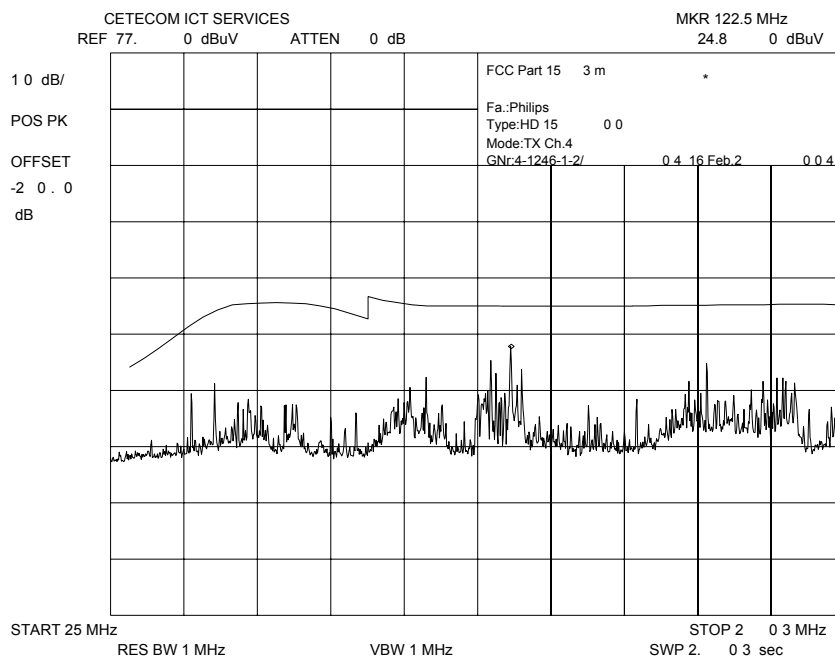

CH 4 (25-200 MHz H)

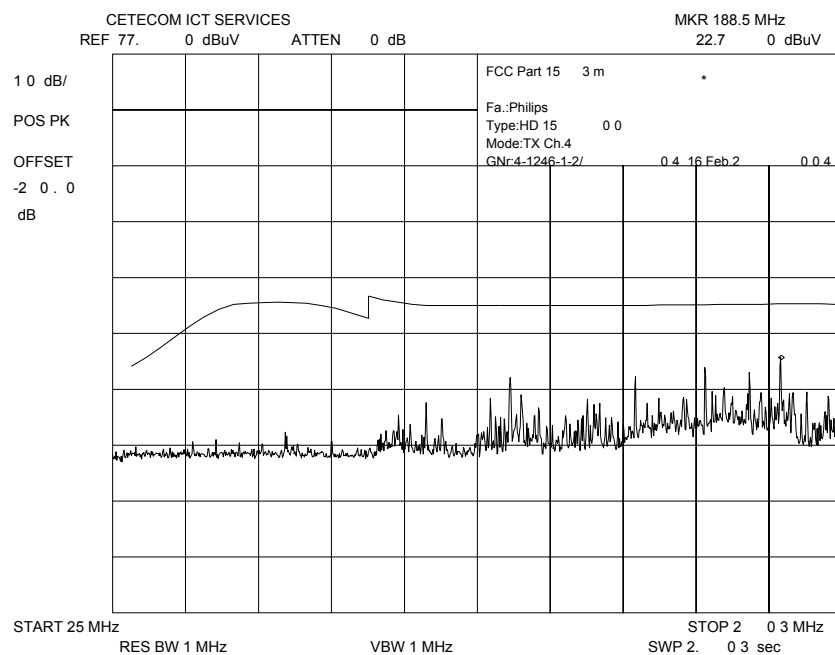

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37


Ambient temperature : 23°C

Relative humidity : 39%

CH 4 (200-1000 MHz V)

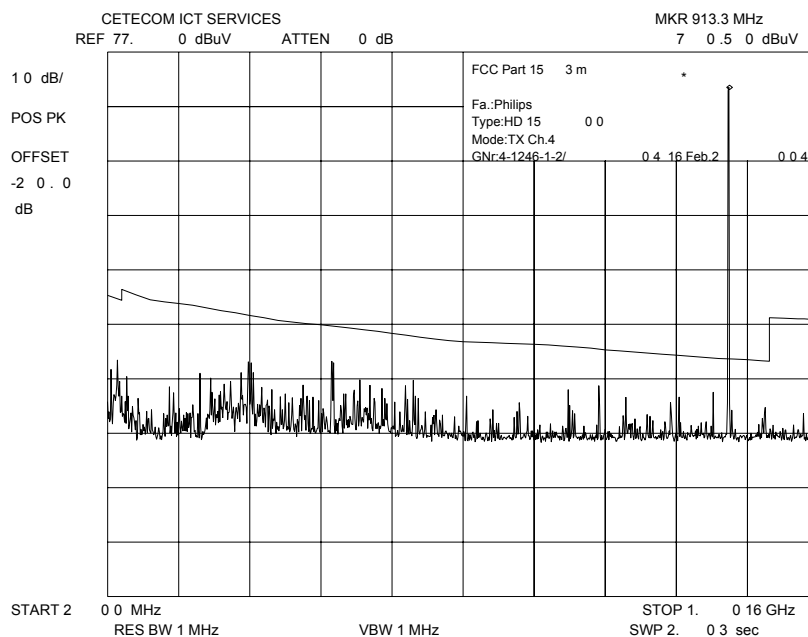

CH 4 (200-1000 MHz H)

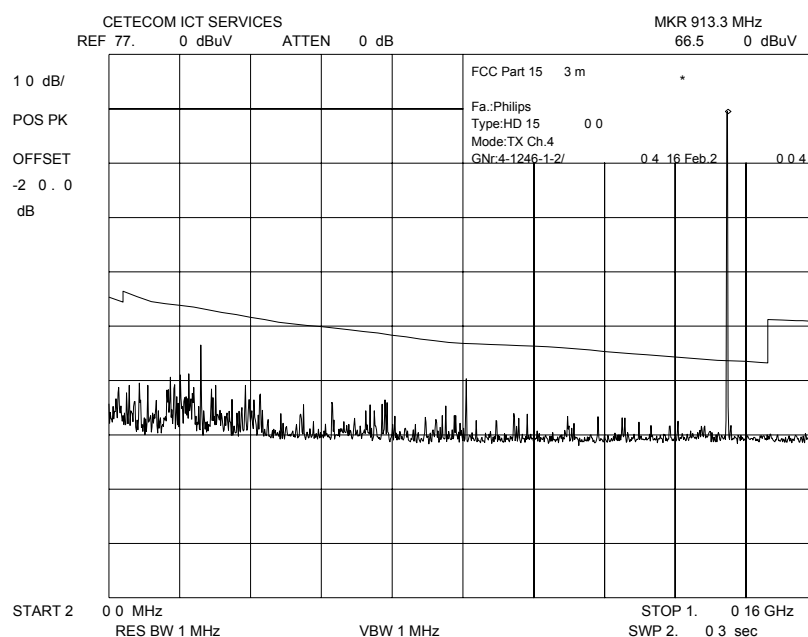

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

Radiated (> 1 GHz and Harmonics)

SPURIOUS EMISSIONS LEVEL (µV/m)								
914.1 MHz			914.5 MHz			915.3 MHz		
f (MHz)	Detect	Level (µV/m)	f (MHz)	Detect	Level (µV/m)	f (MHz)	Detect	Level (µV/m)
1378.9	AV	42.7	1073.2	AV	33.9	1378.9	AV	46.2
1828.2	AV	199.5	1225.8	AV	33.1	1830.6	AV	199.5
2742.3	AV	-	1378.9	AV	43.7	2745.9	AV	-
3656.4	AV	-	1747.4	AV	36.7	3661.2	AV	-
4570.5	AV	-	1829.0	AV	201.8	4576.5	AV	-
5484.6	AV	-	2743.5	AV	-	5491.8	AV	-
6398.7	AV	-	3658.0	AV	-	6407.1	AV	-
7312.8	AV	-	4572.5	AV	-	7322.4	AV	-
8226.9	AV	-	5487.0	AV	-	7237.7	AV	-
9141.0	AV	-	6401.5	AV	-	9153.0	AV	-
10055.1	AV	-	7316.0	AV	-	10068.3	AV	-
			8230.5	AV	-			
			9145.0	AV	-			
			10059.5	AV	-			
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Measured at a distance of 3m

Limits

SUBCLAUSE § 15.249 (a)

	Field strength of Fundamental (mV/m)	Field strength of Harmonics (µV/m)
902-928	50 (94 dBµV/m)	500 (54 dBµV/m)
2400-2483.5	50 (94 dBµV/m)	500 (54 dBµV/m)
5725-5875	50 (94 dBµV/m)	500 (54 dBµV/m)
24.0-24.25 GHz	250 (108 dBµV/m)	2500 (68 dBµV/m)

Limits

SUBCLAUSE § 15.109 / 209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Test report no.:4-1246-01-04/04

Issue date: 2004-02-27



Page 20 (35)

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

CH 1 (1 GHz –12 GHz)

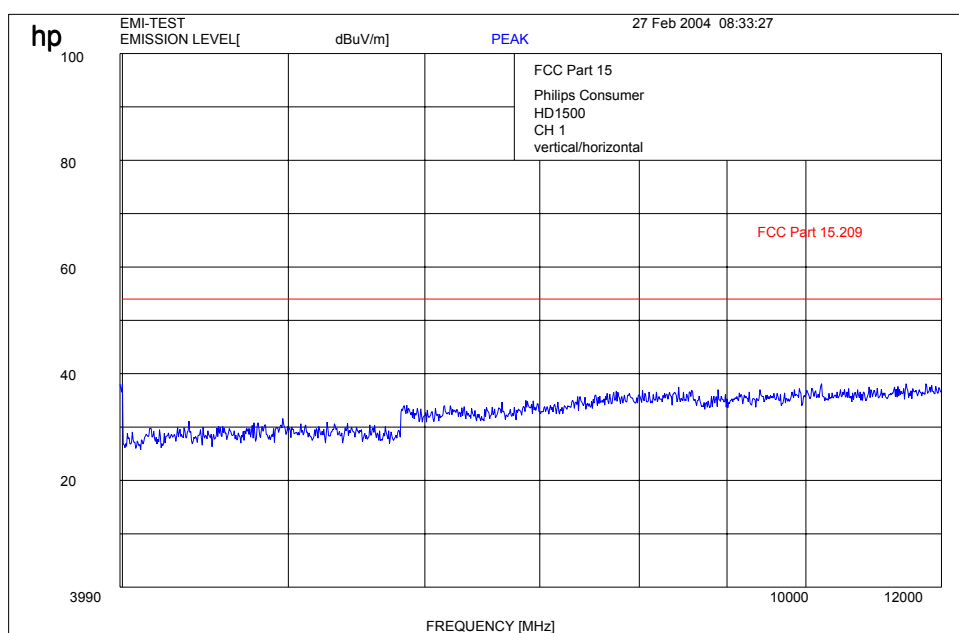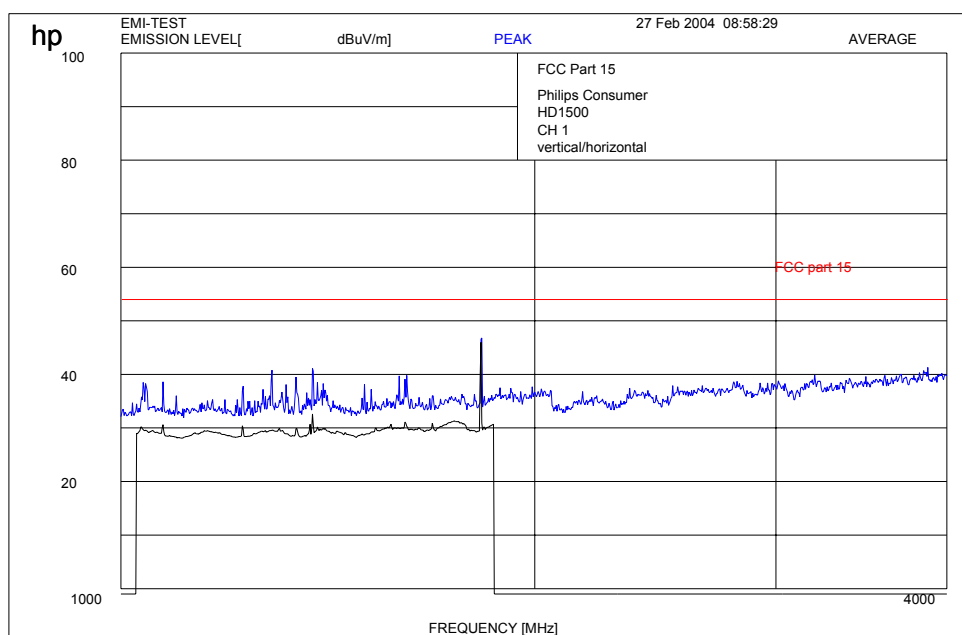

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)



17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

CH 2 (1 GHz –12 GHz)

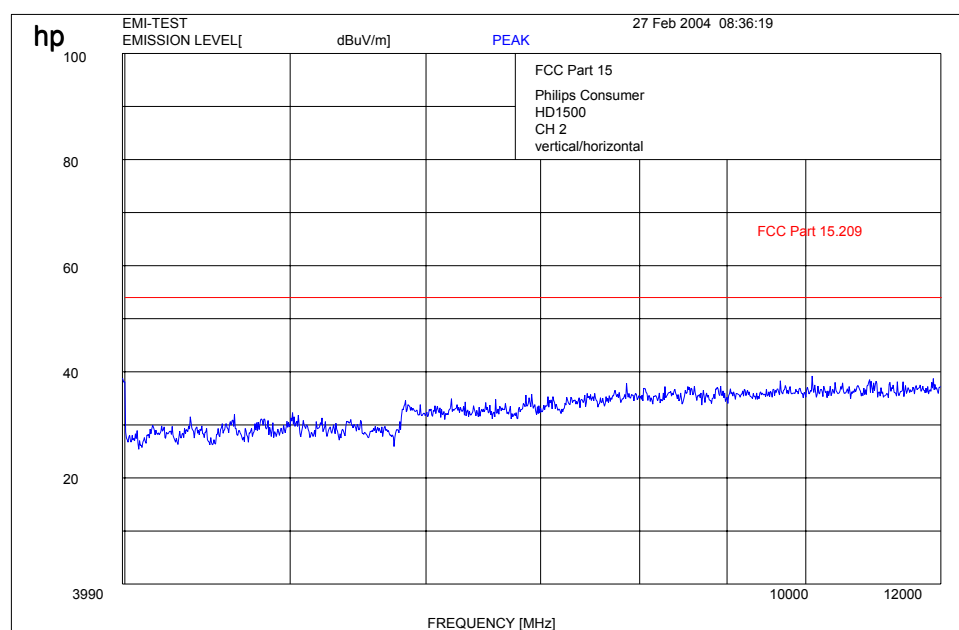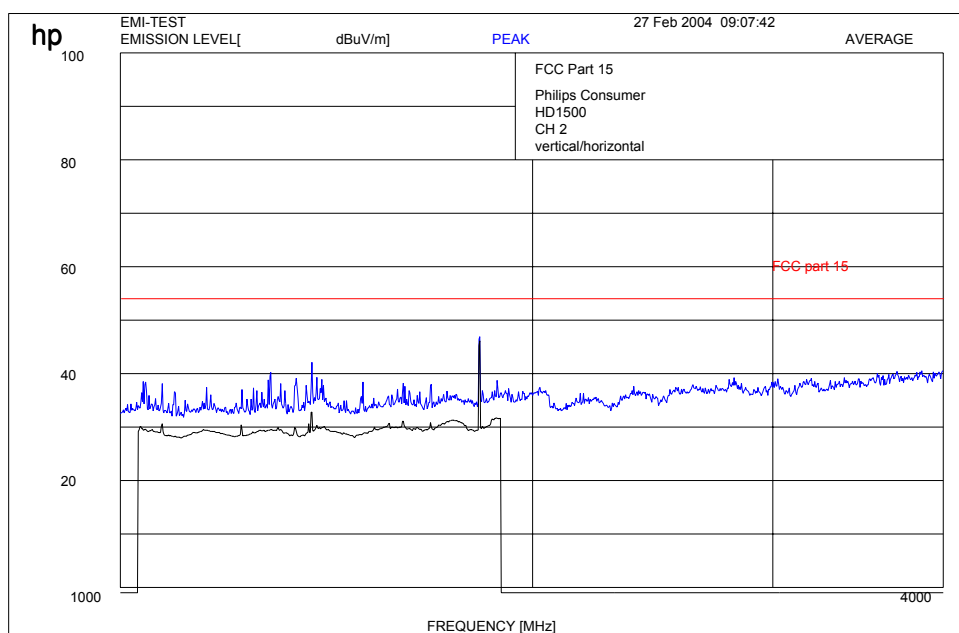

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Test report no.:4-1246-01-04/04

Issue date: 2004-02-27



Page 22 (35)

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

CH 4 (1 GHz –12 GHz)

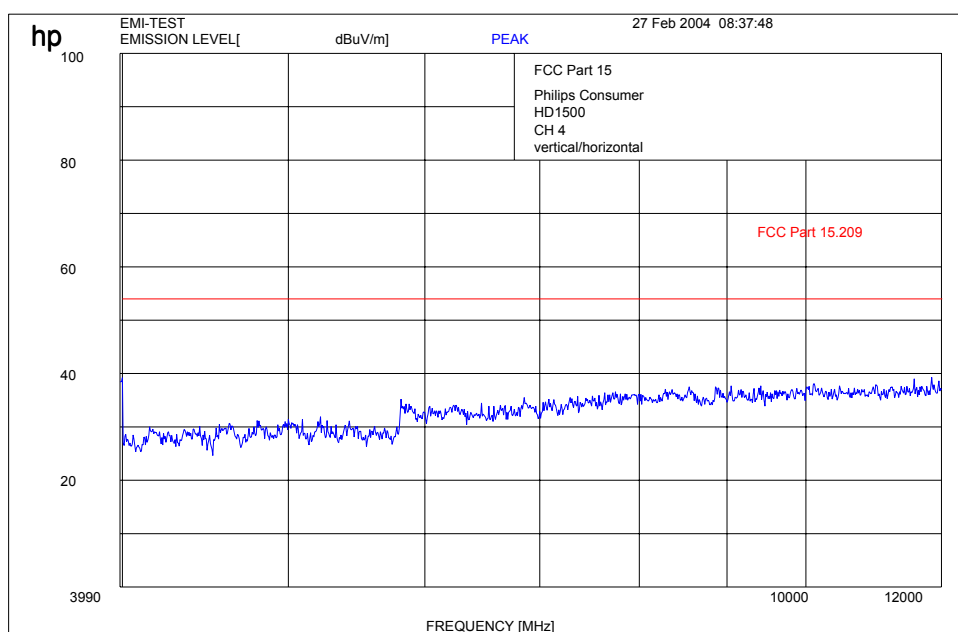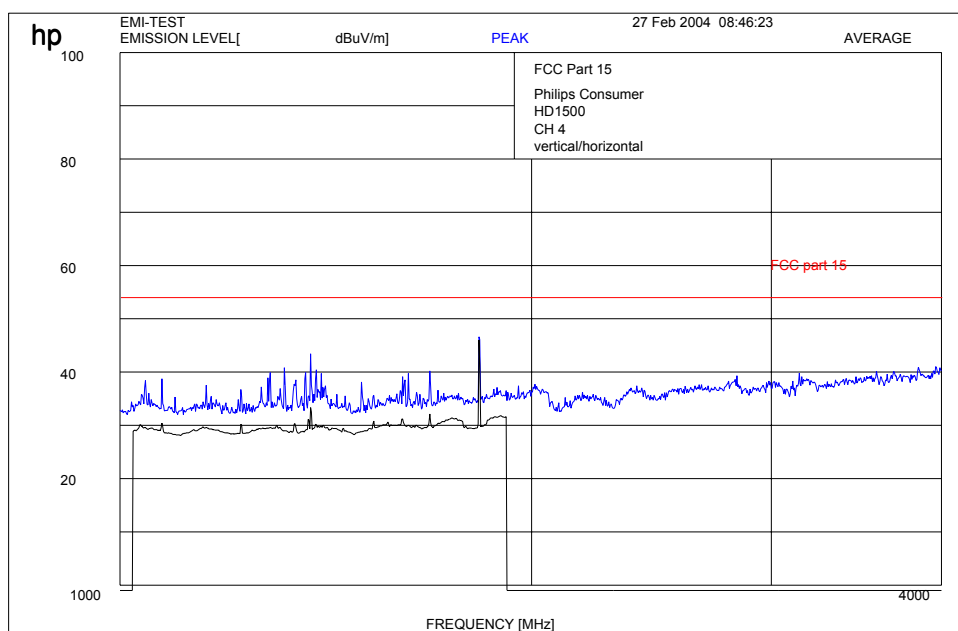

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%


Plots of the measurements

SPURIOUS RADIATION 9kHz – 30 MHz

§ 15.109

Part 15.209 Magnetics

EUT: HD1502/37
 Manufacturer: Philips Consumer
 Operating Condition: Tx on ;
 Test Site: Cetecom, Room 6
 Operator: Berg M.
 Test Specification: 15.109/15.209
 Comment:
 Start of Test: 01.04.04 / 09:38:17

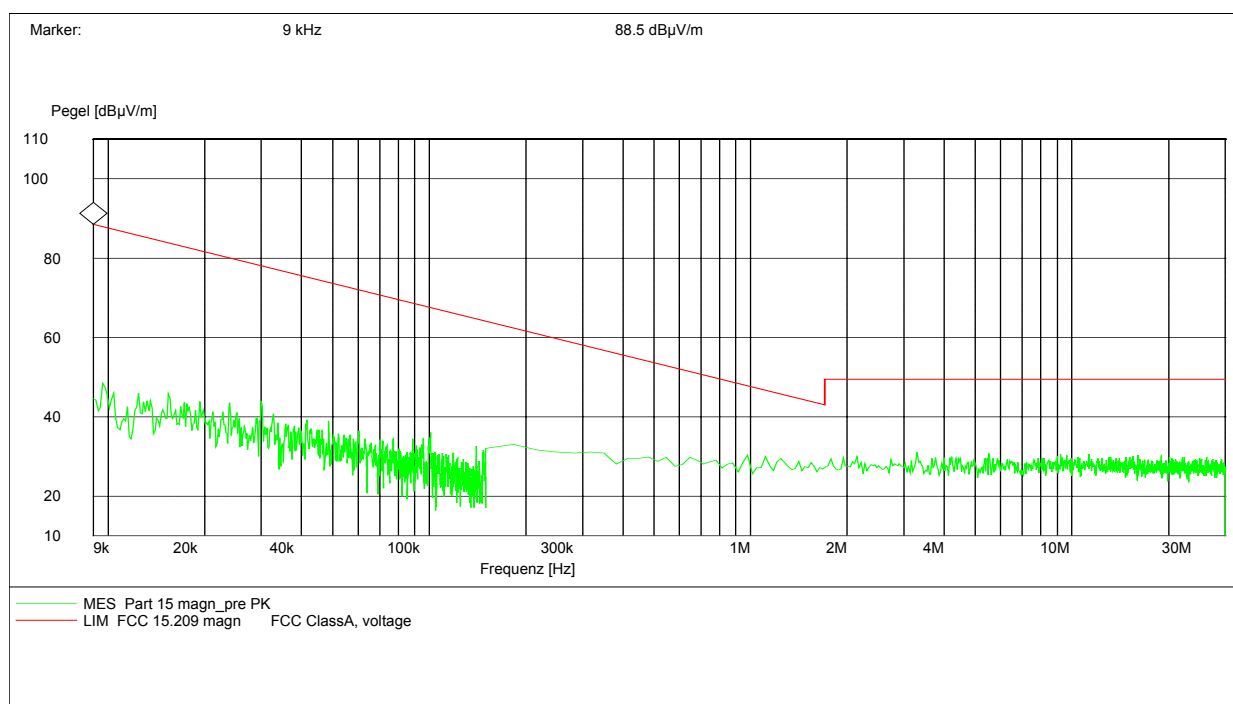

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Test report no.:4-1246-01-04/04

Issue date: 2004-02-27

Page 24 (35)

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

RECEIVER SPURIOUS RADIATION

§ 15.109

Data File : /41246_20.DOC

16 Feb 1904 16:23:39

No	EMISSION	SPEC LIMIT	MEASUREMENTS			POL	SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE		HGT	AZM		
			dBuV/m	dB			cm	deg	dB	
1	114.5	44.0	21.9	-22.1	PK	V	101	0	N/T	
2	117.7	44.0	22.8	-21.2	PK	V	101	0	N/T	
3	136.0	44.0	25.1	-18.9	PK	V	101	0	N/T	
4	152.2	44.0	22.5	-21.5	PK	H	149	360	N/T	
5	169.3	44.0	25.6	-18.4	PK	H	149	360	N/T	
6	170.0	44.0	25.4	-18.6	PK	V	101	0	N/T	
7	186.2	44.0	25.1	-19.0	PK	H	149	360	N/T	
8	187.1	44.0	23.1	-20.9	PK	V	101	0	N/T	
9	191.2	44.0	19.3	-24.7	PK	V	101	0	N/T	
10	191.4	44.0	24.4	-19.6	PK	V	101	0	N/T	
11	198.5	44.0	24.5	-19.5	PK	H	149	360	N/T	
12	198.7	44.0	22.4	-21.6	PK	V	101	0	N/T	
13	204.1	44.0	26.2	-17.9	PK	V	106	0	N/T	
14	219.6	46.0	26.1	-20.0	PK	H	144	131	N/T	
15	221.2	46.0	27.5	-18.5	PK	V	106	0	N/T	
16	236.7	46.0	23.2	-22.8	PK	H	144	17	N/T	
17	254.7	46.0	28.1	-17.9	PK	V	106	0	N/T	
18	306.418	46.0	25.2	-20.8	QP	V	105	126	15.8	
19	320.0	46.0	27.7	-18.3	PK	V	106	0	N/T	
20	397.5	46.0	31.0	-15.0	PK	V	106	0	N/T	
21	423.6	46.0	29.5	-16.5	PK	V	106	0	N/T	
22	793.3	46.0	32.8	-13.2	PK	H	144	198	N/T	
23	912.5	46.0	75.5	29.5	PK	V	106	0	N/T	LINK

N/T in CORR FACTOR column denotes a non-traceable signal.

Measurement distance see table

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Test report no.:4-1246-01-04/04

Issue date: 2004-02-27


Page 25 (35)

Equipment under test : SBC HD1500/37


Ambient temperature : 23°C

Relative humidity : 39%

Receiver (25 – 200 MHz V)

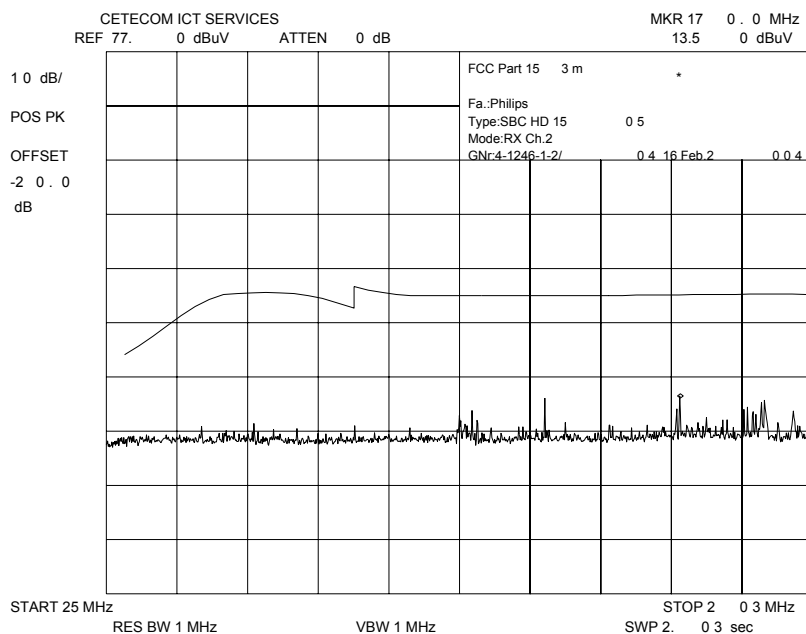

(25 – 200 MHz H)

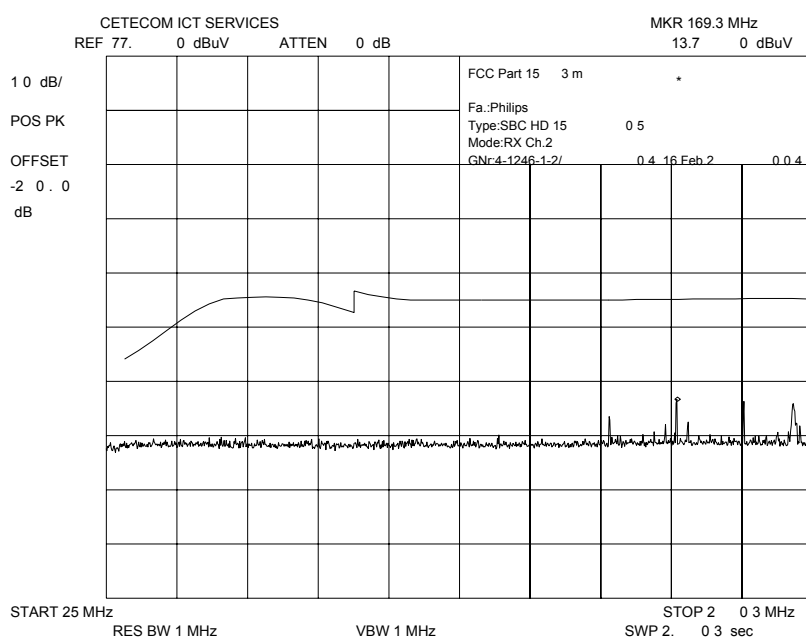

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37


Ambient temperature : 23°C

Relative humidity : 39%

(200 – 1000 MHz V)

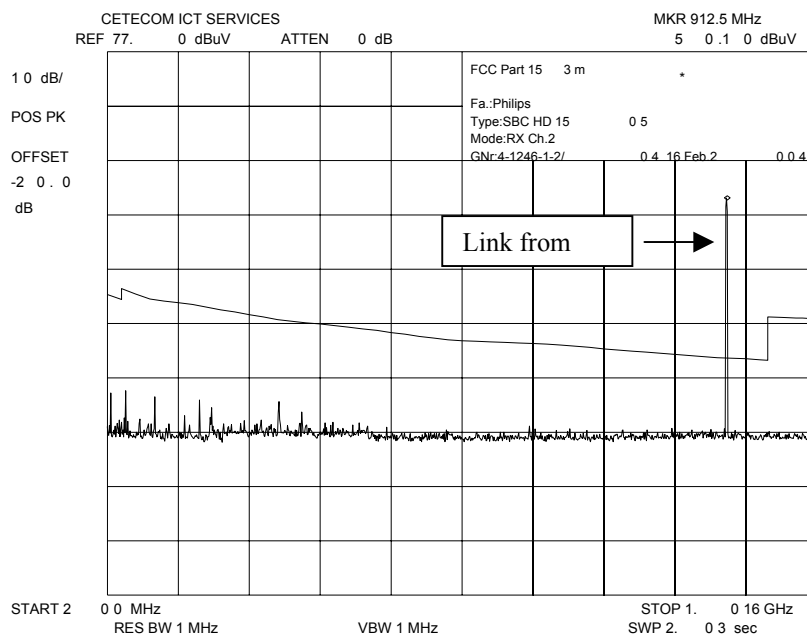

(200 – 1000 MHz H)

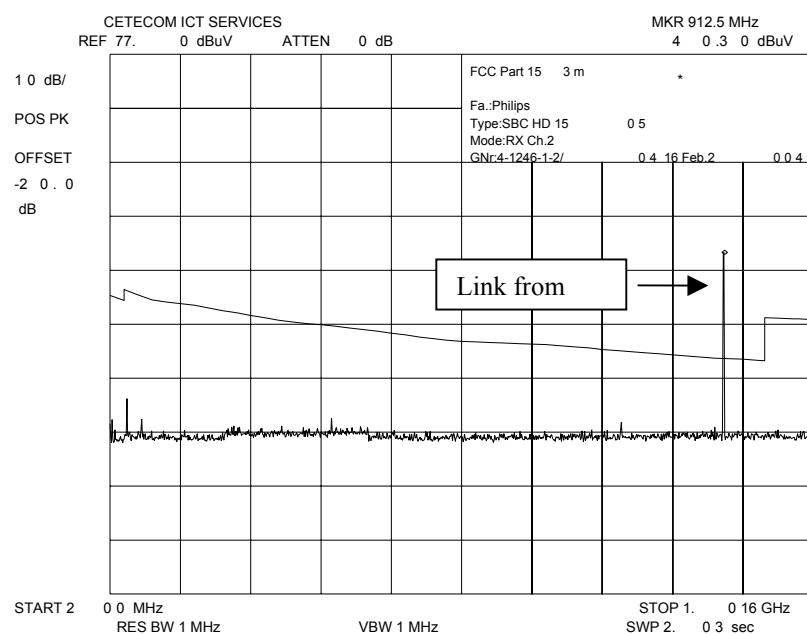

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Test report no.:4-1246-01-04/04

Issue date: 2004-02-27



Page 27 (35)

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

(1000 – 12000 MHz)

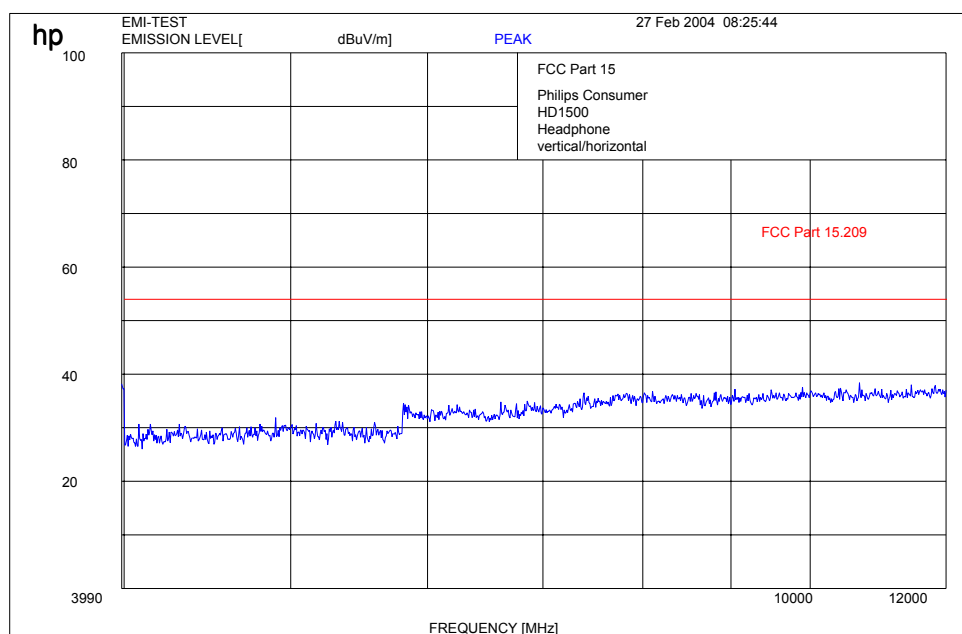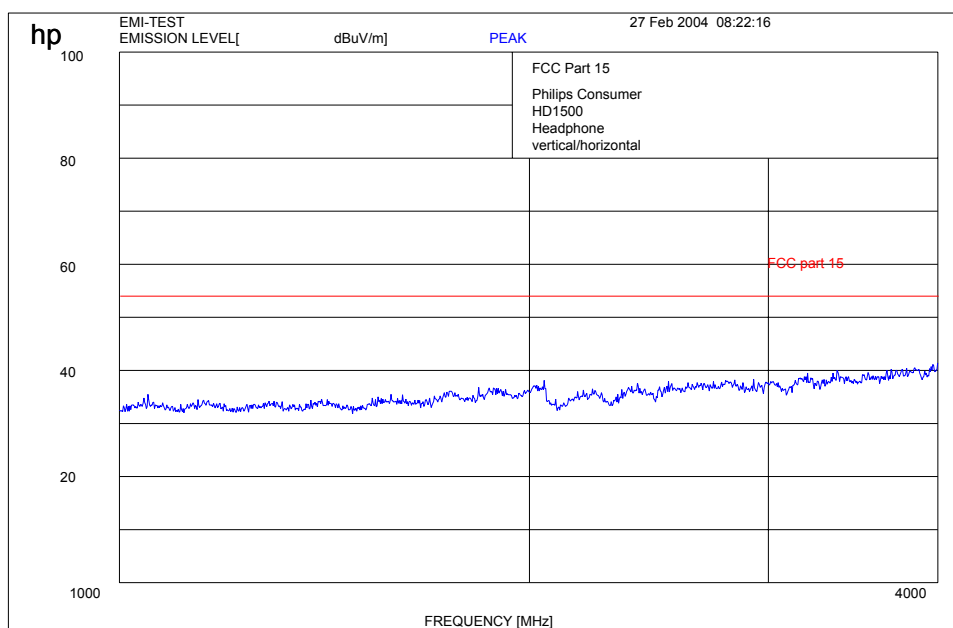

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37


Ambient temperature : 23°C

Relative humidity : 39%

SPURIOUS RADIATION 9kHz – 30 MHz

§ 15.109

EUT: HD1502/37
 Manufacturer: Philips Consumer
 Operating Condition: Tx on ;
 Test Site: Cetecom, Room 6
 Operator: Berg M.
 Test Specification: 15.109/15.209
 Comment:
 Start of Test: 01.04.04 / 09:54:14

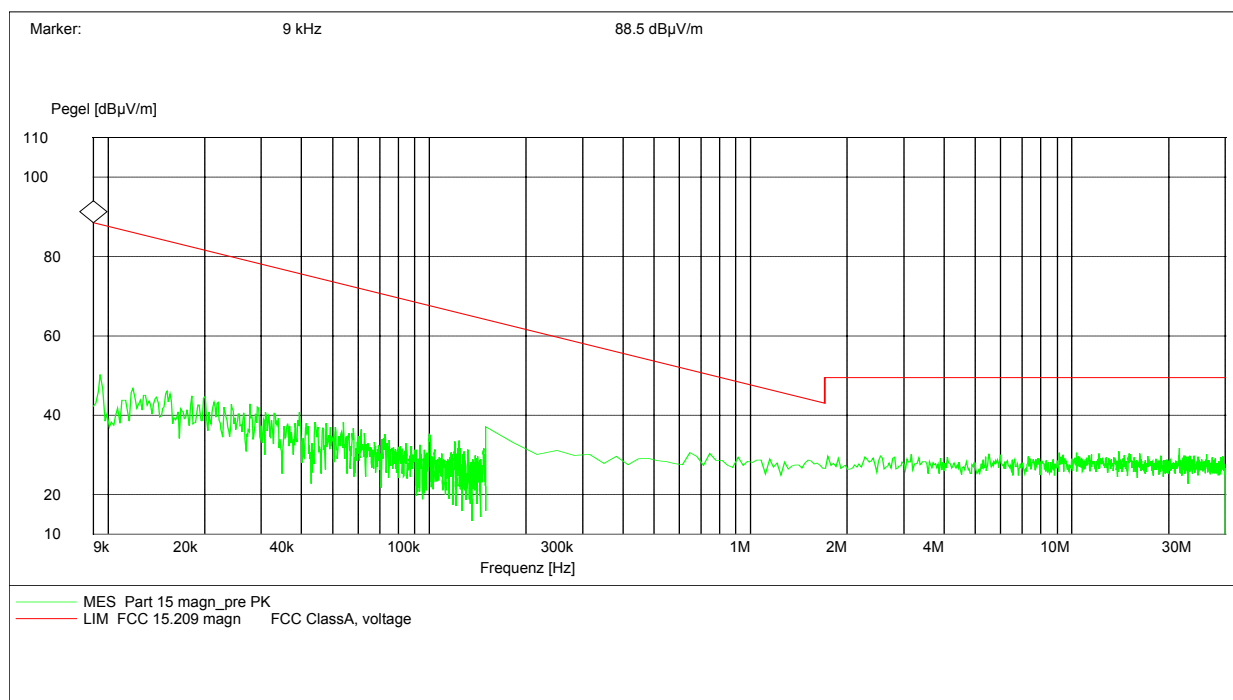

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

Conducted emissions

§ 15.107/207


**CISPR 22
EN 55022**

EUT: HD1502/37
 Manufacturer: Philips Consumer
 Operating Condition: Tx on
 Test Site: Cetecom, Room 6
 Operator: Berg M.
 Test Specification: 15.109/15.209
 Comment:
 Start of Test: 01.04.04 / 10:04:54

SCAN TABLE: "EN 55022 V"

Short Description: Voltage Mains 1.60
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 7.5 kHz MaxPeak 100.0 ms 10 kHz ESH3-Z5 L1 1458
 Average

L1

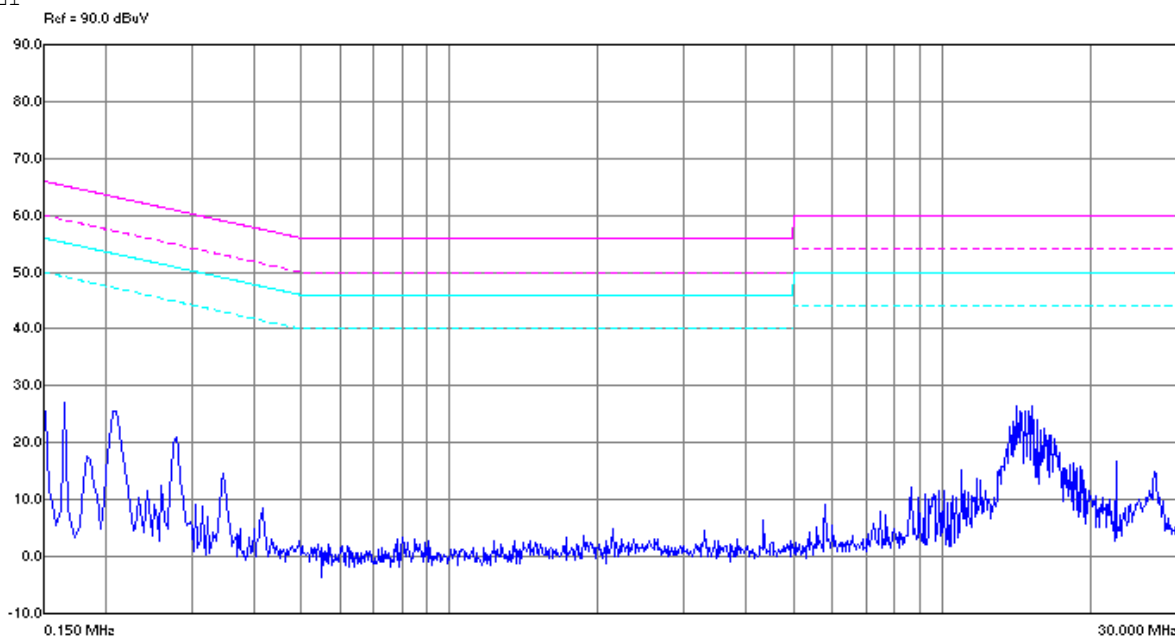

Frequency MHz	Peak Lim dBuV	Peak dBuV	QP Lim dBuV	QP dBuV	DelLim-QP dB	Avg Lim dBuV	Avg dBuV	DelLim-Avg dB
0.151710	55.91	27.16	65.91	9.23	-56.68	55.91	5.54	-50.37
0.206086	53.36	26.96	63.36	25.06	-38.30	53.36	24.89	-28.47
14.151454	50.00	27.60	60.00	24.37	-35.63	50.00	19.36	-30.64
14.364092	50.00	26.81	60.00	24.10	-35.90	50.00	19.79	-30.21
14.578714	50.00	25.42	60.00	23.52	-36.48	50.00	19.25	-30.75
14.791956	50.00	26.44	60.00	24.00	-36.00	50.00	19.69	-30.31
15.006944	50.00	27.39	60.00	24.57	-35.43	50.00	20.61	-29.39
15.220214	50.00	26.73	60.00	23.61	-36.39	50.00	18.74	-31.26
15.437127	50.00	25.80	60.00	23.12	-36.88	50.00	19.80	-30.20
15.656860	50.00	24.94	60.00	21.28	-38.72	50.00	16.34	-33.66

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64; 52-63

Equipment under test : SBC HD1500/37

Ambient temperature : 23°C

Relative humidity : 39%

N

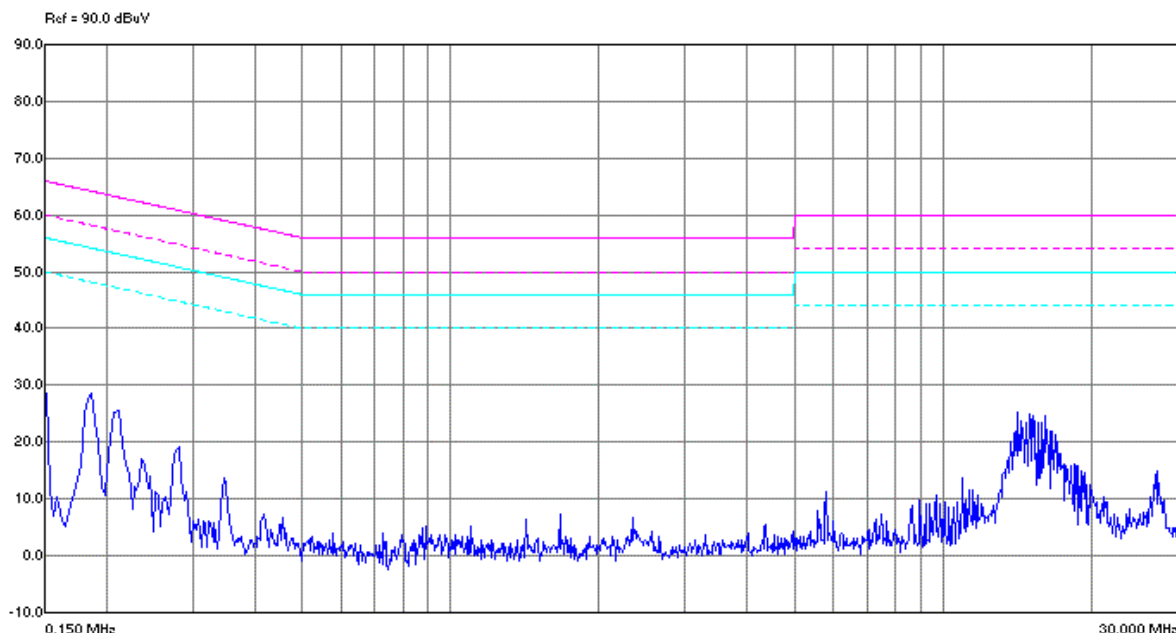

Frequency MHz	Peak Lim dBuV	Peak dBuV	QP Lim dBuV	QP dBuV	DelLim-QP dB	Avg Lim dBuV	Avg dBuV	DelLim-Avg dB
0.182306	54.38	30.52	64.38	27.45	-36.93	54.38	22.78	-31.60
0.205954	53.37	26.54	63.37	25.03	-38.34	53.37	23.73	-29.63
14.152511	50.00	25.56	60.00	23.09	-36.91	50.00	17.98	-32.02
14.362685	50.00	26.37	60.00	22.73	-37.27	50.00	17.96	-32.04
14.792870	50.00	25.47	60.00	22.61	-37.39	50.00	18.96	-31.04
15.008237	50.00	25.21	60.00	23.43	-36.57	50.00	19.89	-30.11
15.224386	50.00	24.85	60.00	23.21	-36.79	50.00	19.13	-30.87
15.437347	50.00	24.44	60.00	22.47	-37.53	50.00	19.13	-30.87
15.867371	50.00	23.56	60.00	21.00	-39.00	50.00	17.68	-32.32
16.077796	50.00	25.43	60.00	21.73	-38.27	50.00	16.88	-33.12

Limit§ 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64; 52-63

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.


No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Funktionsgenerator	AFGU	Rohde & Schwarz	862 480/032
09	Regeltrenntrafo	MPL	Erfi	91350
10	Netznachbildung	NNLA 8120	Schwarzbeck	8120331
11	Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulationsmeter	9008	Racal-Dana	2647
16	Frequenzzähler	5340 A	Hewlett-Packard	1532A03899
17	Absorber Schirmkabine	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenne	3104	Emco	3758
23	Log. Per. Antenne	3146	Emco	2130
24	Double Ridge Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenne	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenne	HL 223	Rohde & Schwarz	825 584/002
29	Relais-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Absorber Schirmkabine		Frankonia	
33	Steuerrechner	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Reciever	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS


To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Controler	HD 100	Deisel	100/322/93
37	Relais Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relais Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spektrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Meßempfänger	ESH 3	Rohde & Schwarz	890 174/002
43	Meßempfänger	ESVP	Rohde & Schwarz	891 752/005
44	Biconi Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisationsnetzwerk	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridge G Horn Antenne 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Spectrum Analyzer	8562A	Hewlett Packard	2809AO2682
52	Steuerrechner	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phasen V-Netzwerk	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Stromversorgung	6032A	Rohde & Schwarz	2933A05441
59	HF-Test Empfänger	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	HF-Test Empfänger	ESH3	Rohde & Schwarz	881 515/002
62	Relais Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relais Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				

Test setup

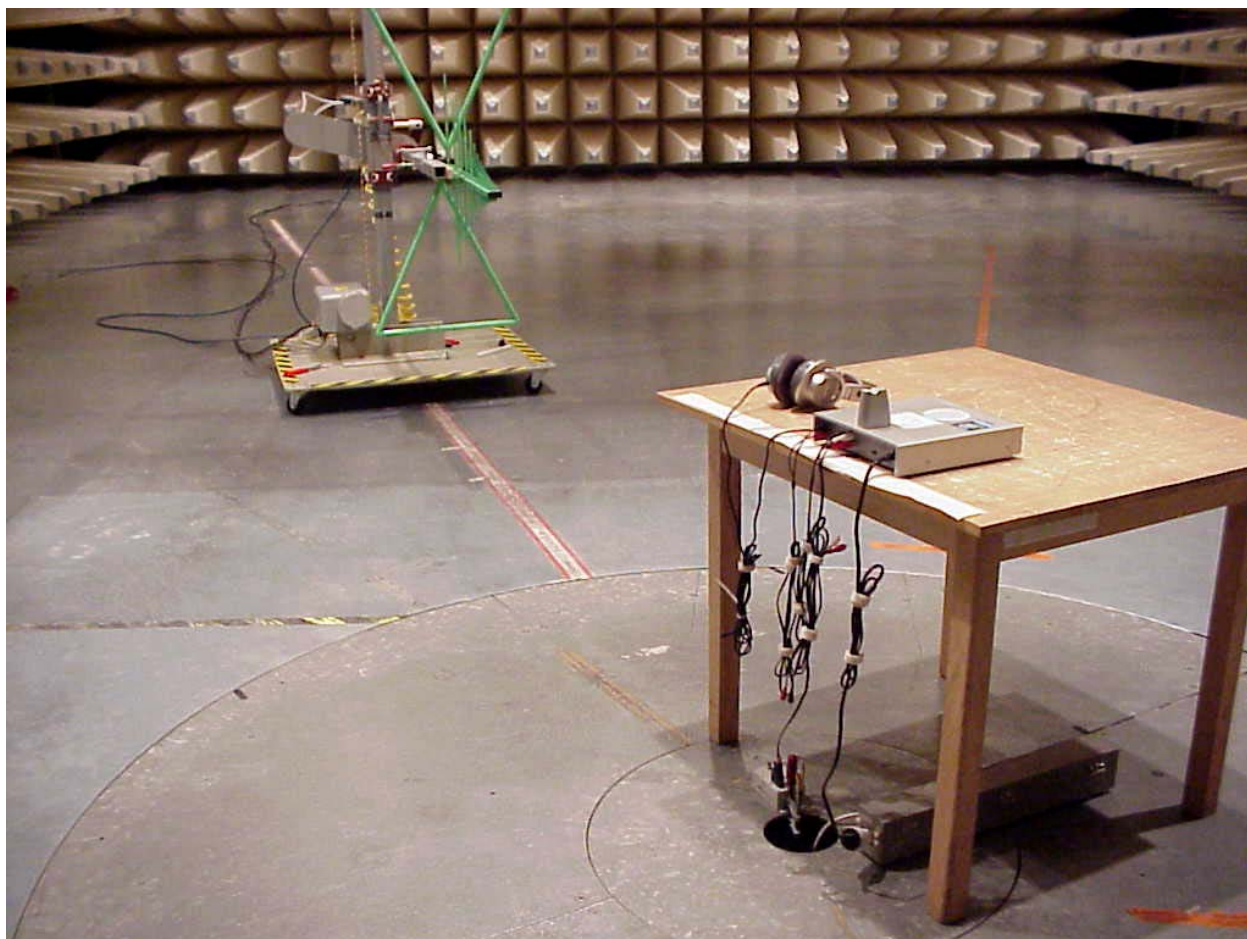

Test setup

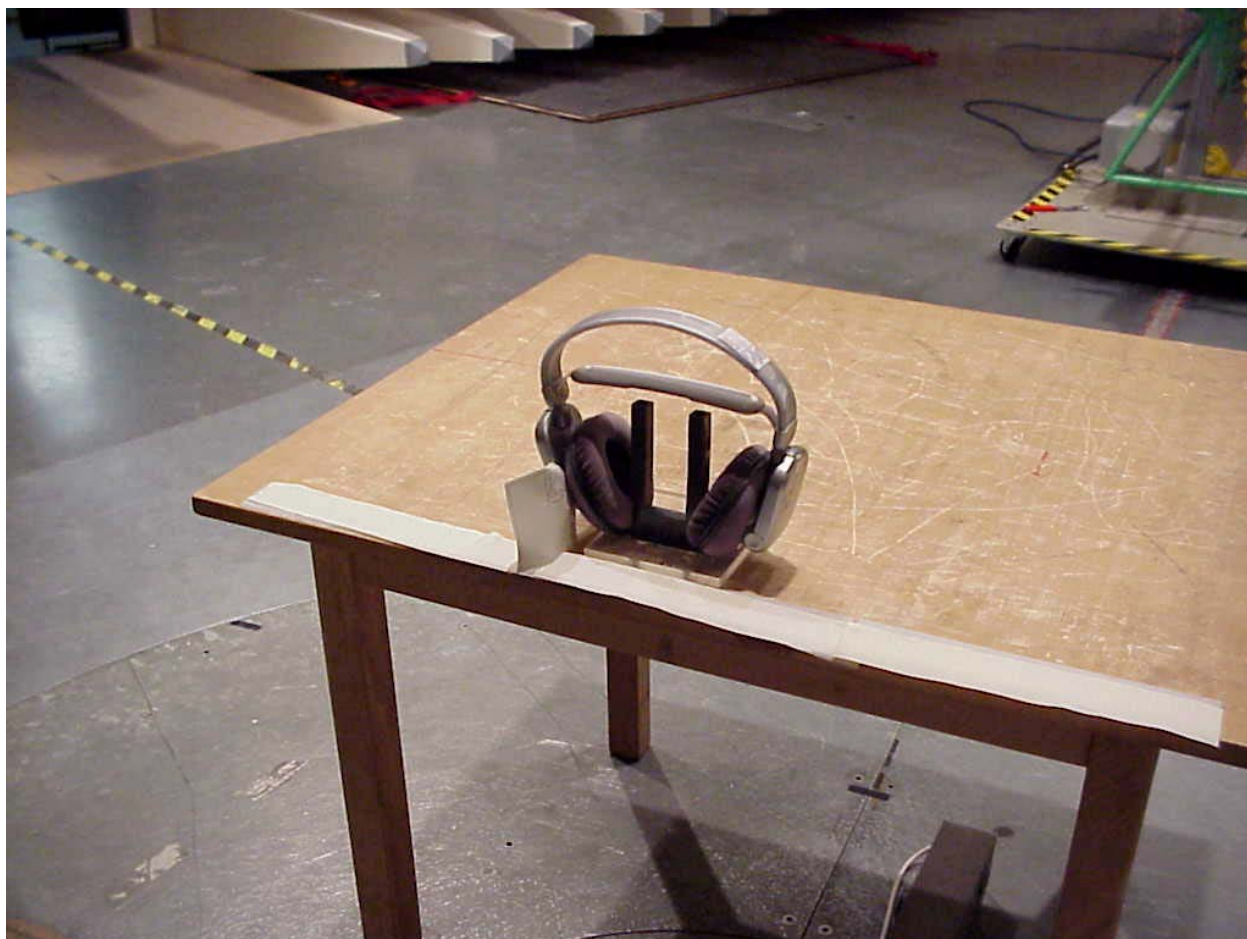

Test setup

