

Measurement Report

Product: ***Car Wireless Hands Free Device***
Applicant: ***Hanning Industries Company***
FCC ID: ***OYPYJ98002HM***
Model: ***YJ98-002***
Report No.: ***MLT0206P15002***
Test Date: ***September 02,2002***

Test By

Max Light Technology Co.,Ltd.

***Room 5, 8F, No.125, Section 3 Roosevelt Road,
Taipei, Taiwan., R.O.C.***

Tel: 886-2-363-2447 Fax: 886-2-363-2597

The test report consists of 17 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory.



MAX LIGHT

MEASUREMENT REPORT

Page: 2/17

Table of Contents :

| | |
|--------------------------------------------|-----|
| I. General | 4. |
| II. Conducted Emissions Requirements | 7. |
| III. Radiated Emissions Requirements | 8. |
| IV. Emissions Band Measurement | 16. |
| Appendix I (EUT Test Setup) | 17. |



MAX LIGHT

MEASUREMENT REPORT

Page: 3/17

CERTIFICATION

We here by verify that :

The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4-1992. All test were conducted by *MLT (Max Light Technology Co.,Ltd) Room 5, 8F, No.125, Section 3 Roosevelt Road, Taipei, Taiwan, R.O.C* Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance radiated emission limit of FCC Rules Part 15 Subpart C Section 15.239.

EUT : Car Wireless Hands Free Device

Applicant : HANMING INDUSTRIES COMPANY.
UNIT B,5/F ,HAVEN COMM. BLDG.,
6-8 TSING FUNG ST., Hong Kong

Manufacturer : SHENZHEN A POWER TECHNOLOGY CO.,LTD.
E.5F,S.BLDG.,ZHONGHANGS SHAHE
INDUSTRIAL AREA,OVERSEAS CHINESE
TOWN,SHENZHE,CHINA

Model No : YJ98-002

FCC ID : OYPYJ98002HM

Prepared by : **Country** Approved by : **Roger Chen**
Country Huang Roger Chen



MAX LIGHT

MEASUREMENT REPORT

Page: 4/17

I. GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of HANMING INDUSTRIES COMPANY. In support of an Intentional Periodic Radiator certification in accordance with Part2 Subpart J and Part 15 Subpart A And C of the Commission' s and Regulations.

1.2 Description of EUT

EUT : Car Wireless Hands Free Device

Applicant : HANMING INDUSTRIES COMPANY.
UNIT B,5/F ,HAVEN COMM. BLDG.,
6-8 TSING FUNG ST., Hong Kong

Manufacturer : SHENZHEN A POWER TECHNOLOGY CO.,LTD.
E.5F,S.BLDG.,ZHONGHANGS SHAHE
INDUSTRIAL AREA,OVERSEAS CHINESE
TOWN,SHENZHE,CHINA

Model No : YJ98-002

FCC ID : OYPYJ98002HM

Power Type : Powered by Batter (DC8V-24V/20mA)

DC Power Output : DC 4.5V/12mA

The EUT(YJ98-002) is wireless audio transmitter product. The operation frequency is 107.70MHz.Connect the audio input of emitter and the audio output of TV set or cassette player ... by using the audio cord and hear the audio signal of TV set or cassette player ... ,through your FM Radio. The receiver is FM radio. While testing the EUT was adjusted at a position which transmit the maximum.

Report Number: MLT0206P15002

FCC ID: OYPYJ98002HM



MAX LIGHT

MEASUREMENT REPORT


Page: 5/17

1.3 Description of Support Equipment

In order to construct the minimum system which required by the ANSI C63.4-1991, following equipments were used as the support units.

Cassette Player : KOKA
Model No. : KW-240
Serial No. : KS3303

1.3 Configuration of System Under Test

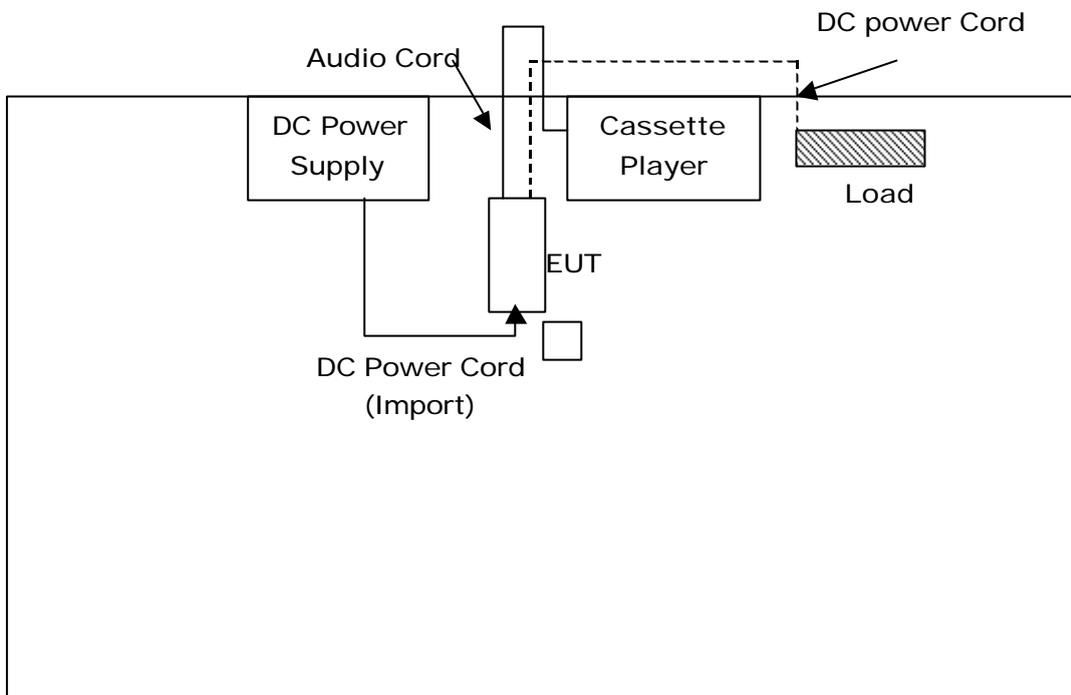

During testing the EUT's (Car Wireless Hands Free Device) Power Jack was connected to the DC power supply & Audio port was connected to the cassette player and DC power out port was connected to the Resistance Load.

P.S Cassette Player send 1KHz audio signal to EUT.



MAX LIGHT

MEASUREMENT REPORT

Page: 7/17

1.5 Test Procedure

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.4-1992 "Measurement of Intentional Radiators."

1.6 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests was chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated.



MAX LIGHT

MEASUREMENT REPORT

Page: 8/17

II. Conducted Emissions Requirements

The EUT operates solely by the battery. According to the rule of Section 15.207(c), the EUT exempt to the power line conducted test.



MAX LIGHT

MEASUREMENT REPORT

Page: 9/17

III. Radiated Emissions Requirements


3.1 General & Setup :

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8591EM Spectrum Analyzer, EMCO Biconical Antenna (Model 3142) for 30-1000MHz. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post-detector video filters were used in the test. The spectrum analyzer's 6 dB bandwidth was set to 120 KHz, and the analyzer was operated in the quasi-peak detection mode. The highest emission amplitudes relative to the appropriate limit were measured and recorded in paragraph 3.6.


3.2 Test Equipment List:

- A. HP 8591EM 9KHz-1.8GHz Spectrum Analyzer (S/N:73412A00230)
- B. HP 8447D Pre Amplifier (S/N:2944A08954)
- C. EMCO 3142 Biconilog Antenna (S/N:1184)
- D. HP 8590A 10KHz-1.5GHz Spectrum Analyzer (S/N:5212A000211)
- E. HP 9872B Plotter (S/N:20447A03436)

3.3 Test Configuration:

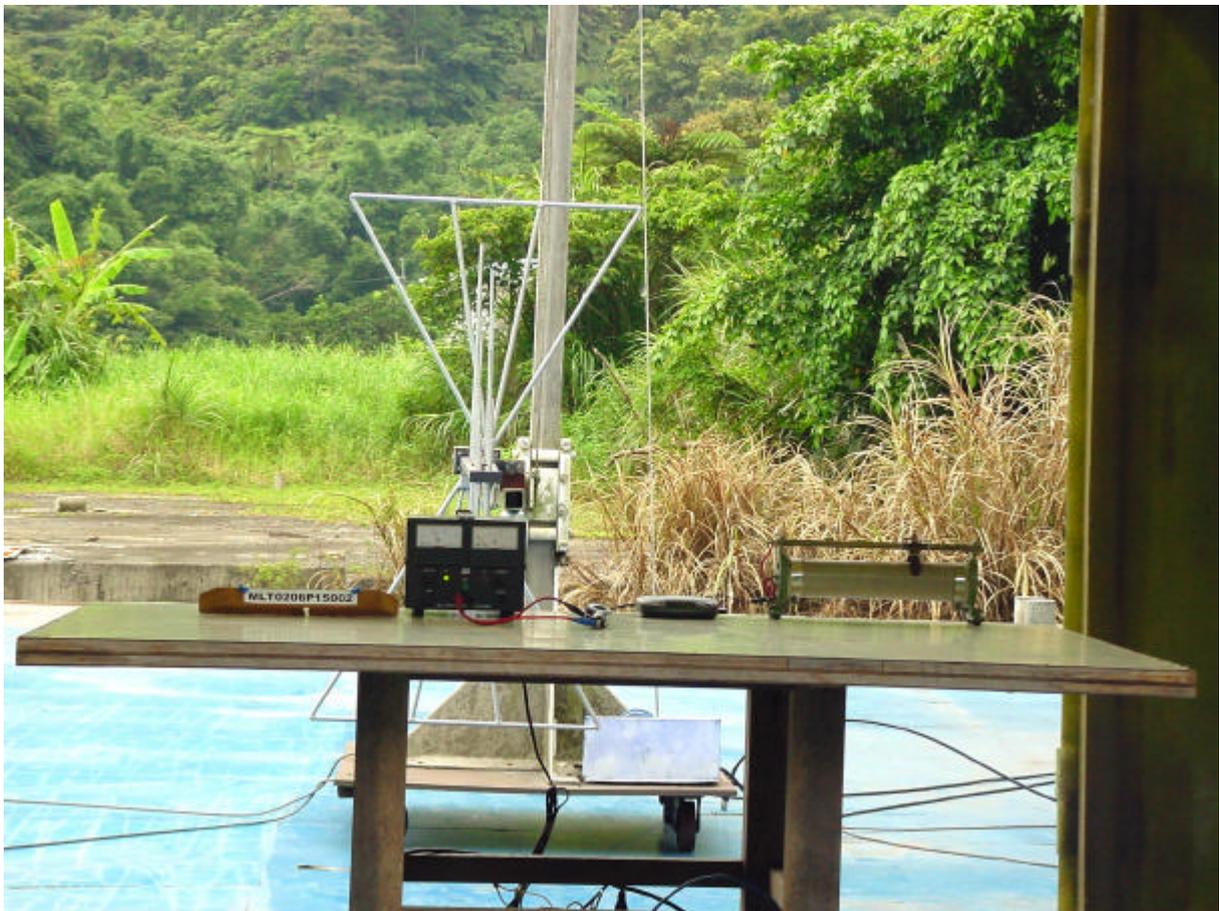

Front View of The Test Configuration

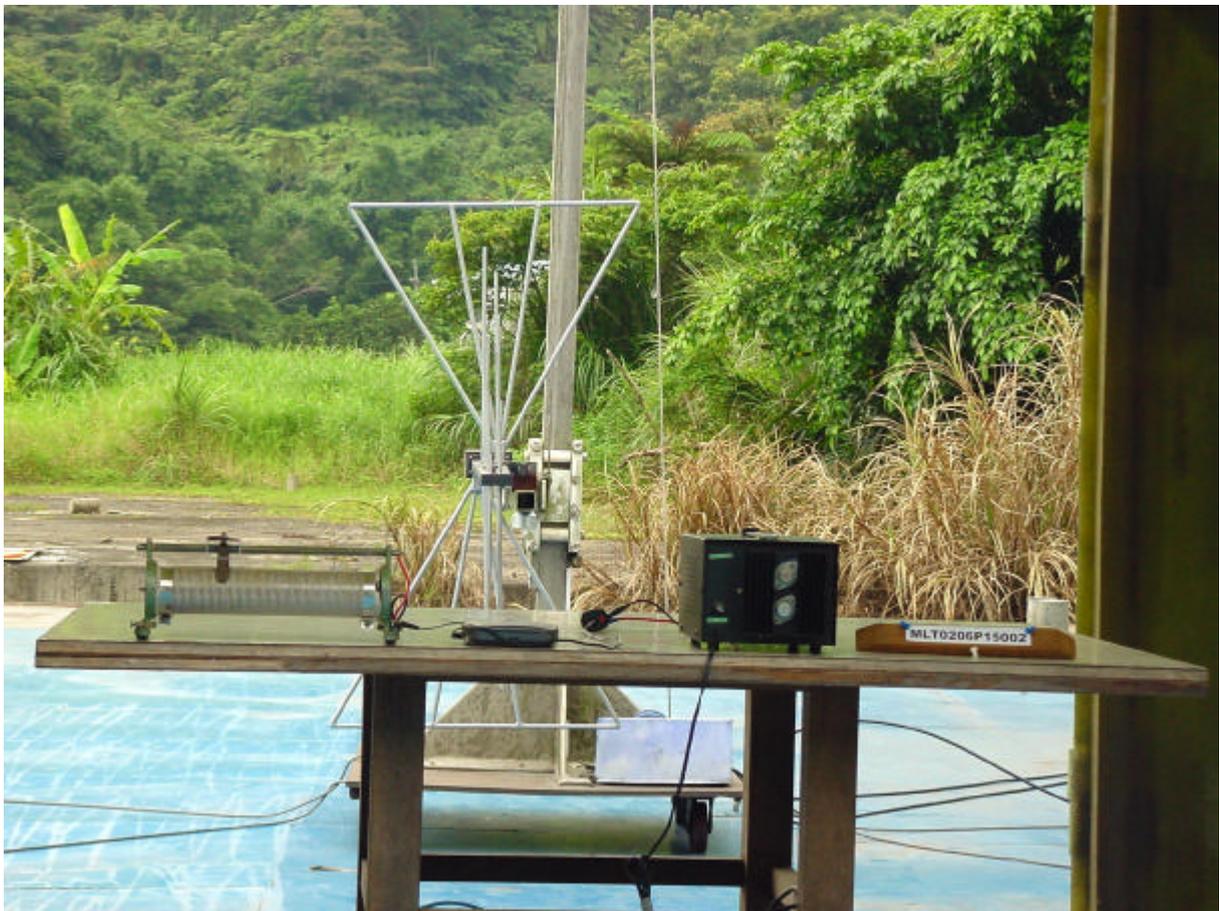

Rear View of The Test Configuration



MAX LIGHT

MEASUREMENT REPORT

3.4 Test condition:

EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner. During the testing, the highest and lowest frequency were measured under the conditions that the EUT was considered likely to encounter in normal use.

3.5 Radiated Emissions Limits:

Fundamental Frequency

| Frequency range (MHz) | dBuV/meter |
|-----------------------|------------|
| 88 to 108 | 47.9 |

Other Frequency

| Frequency range (MHz) | dBuV/meter |
|-----------------------|------------|
| 30 to 88 | 40 |
| 88 to 216 | 43.5 |
| 216 to 960 | 46 |
| Above 960 | 54 |



MAX LIGHT

MEASUREMENT REPORT

3.6 Measurement Data Of Radiated Emissions:

3.6.1 Open Field Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Manufacturer : HANMING INDUSTRIES COMPANY.
Model No : YJ98-002
EUT : Car Wireless Hands Free Device

| Radiated Emissions (HORIZONTAL) | | | | | |
|---------------------------------|--------------------|----------|----------------|--------------------------|-------------|
| Frequency (MHz) | Amplitude (dBUV/m) | Ant. (m) | Table (Degree) | Limits(Class B) (dBUV/m) | Margin (dB) |
| 107.71 | 44.81 | 1.5 | 340 | 47.9 | -3.09 |
| 215.42 | 35.97 | 2 | 130 | 46 | -10.03 |
| 323.13 | 32.29 | 1.5 | 240 | 46 | -13.71 |
| 430.84 | 33.95 | 2 | 230 | 46 | -12.05 |
| 538.55 | 38.41 | 1 | 270 | 46 | -7.59 |
| 646.26 | 39.00 | 1.5 | 240 | 46 | -7.00 |
| 753.97 | 40.24 | 1 | 180 | 46 | -5.76 |
| 861.68 | 37.52 | 1 | 250 | 46 | -8.48 |
| 969.39 | 38.60 | 1.5 | 210 | 54 | -15.40 |

- Notes :
- 1.Margin= Amplitude - Limits
 - 2.Distance of Measurement : 3 Meter (30-1000MHz)
 - 3.Height of table for EUT placed: 0.8 Meter.
 - 4.ANT= Antenna height.
 - 5.Amplitude= Reading Amplitude -Amplifier gain+Cable loss +Antenna factor
(Auto calculate in spectrum analyzer)



MAX LIGHT

MEASUREMENT REPORT

3.6.2 Open Field Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following.

Manufacturer : HANMING INDUSTRIES COMPANY.
Model No : YJ98-002
EUT : Car Wireless Hands Free Device

| Radiated Emissions (VERTICAL) | | | | | |
|-------------------------------|--------------------|----------|----------------|--------------------------|-------------|
| Frequency (MHz) | Amplitude (dBUV/m) | Ant. (m) | Table (Degree) | Limits(Class B) (dBUV/m) | Margin (dB) |
| 107.71 | 42.39 | 1 | 360 | 47.9 | -5.51 |
| 215.42 | 34.22 | 1.5 | 250 | 46 | -11.78 |
| 323.13 | 31.17 | 2 | 300 | 46 | -14.83 |
| 430.84 | 32.91 | 1.5 | 220 | 46 | -13.09 |
| 538.55 | 35.79 | 1 | 300 | 46 | -10.21 |
| 646.25 | 39.00 | 1.5 | 80 | 46 | -7.00 |
| 753.97 | 31.88 | 1 | 350 | 46 | -14.12 |
| 861.68 | 37.45 | 1 | 360 | 46 | -8.55 |
| 969.39 | 38.57 | 1.5 | 210 | 46 | -7.43 |

- Notes :
- 1.Margin= Amplitude - Limits
 - 2.Distance of Measurement : 3 Meter (30-1000MHz)
 - 3.Height of table for EUT placed: 0.8 Meter.
 - 4.ANT= Antenna height.
 - 5.Amplitude= Reading Amplitude -Amplifier gain+Cable loss +Antenna factor
(Auto calculate in spectrum analyzer)


IV. Emissions Band Measurement

4.1 Test Condition & Setup :

The transmitter bandwidth measurements were performed in a shielded enclosure. The EUT was placed on a wooded table which is 0.8 meters height and a near field probe was used at a distance about 20 cm for receiving. While testing, EUT was set to transmit continuously.

The resolution bandwidth of the spectrum analyzer was set to 10KHz. The detector function was set to peak and hold mode to clearly observe the components. Emission from the intentional radiator shall be confined within a band 200KHz wide centered on the operating frequency. The 200 KHz band shall lie wholly within the frequency range of 88~108MHz.

4.2 Test Instruments Configuration:

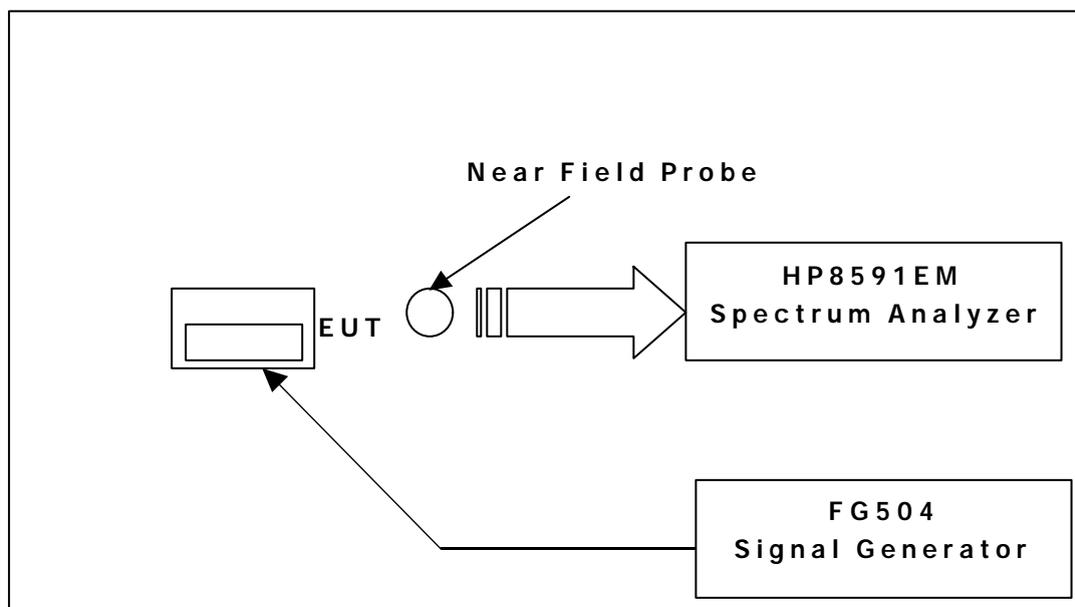



MAX LIGHT

MEASUREMENT REPORT


4.3 Test Equipment List:

- A. Tektronix FG504 0.1H~40MHz (S/N:43AS251)
- B. EMCO Near Field Probe (S/N:7901-291)
- C. HP 8591EM 9KHZ-1.8GHz Spectrum Analyzer (S/N:73412A00110)
- D. Shielded Room (MLT-SR1)

4.4 Test Result:

| | |
|-----------------------------|----------|
| Fundamental emission | |
| Permitted Maximum Bandwidth | 200KHz |
| Bandwidth Measurement | 173.6KHz |

4.5 Test Graphs:

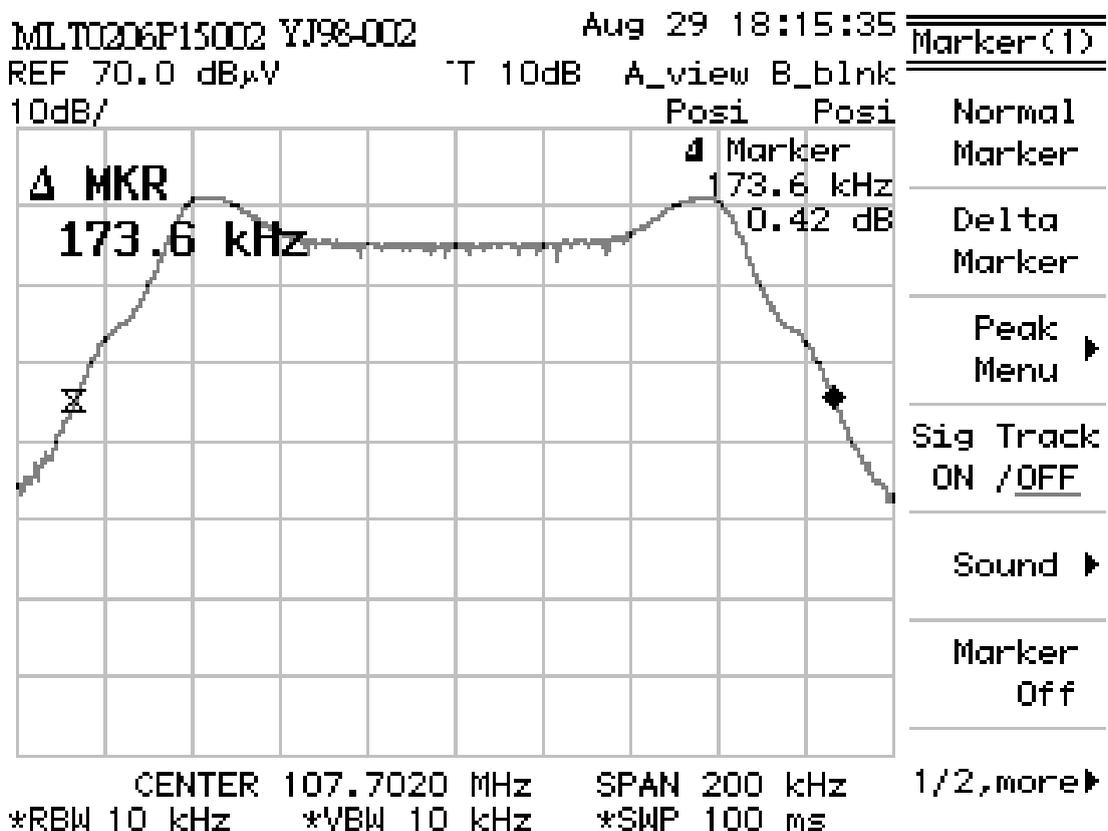

Appendix I- EUT Test SETUP

MEASUREMENT OF RADIATED EMISSION

