



**中认信通**  
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant:** Shenzhen Four Seas Global Link Network Technology Co., Ltd

Address: Room 607-610, Block B, TAOJINDI Electronic Business Incubation Base, Tenglong Road, Longhua District, Shenzhen, China

**FCC ID:** OYR-CF-WR765AC

**Product Name:** Repeater

**Model Number:** CF-WR765AC, CF-AC2100, CF-XR186, CF-WR616AC V2, CF-WR619AC V2, CF-XR11, CF-XR10, CF-XR187, CF-XR188, CF-XR189, CF-XR185, CF-XR184

**Standard(s):** 47 CFR Part 15, Subpart E(15.407)  
ANSI C63.10-2013  
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR230311091-00C

**Date Of Issue:** 2023/4/25

**Reviewed By:** Sun Zhong

*Sun Zhong*

Title: Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China  
Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

<b>TEST FACILITY .....</b>	<b>2</b>
<b>DECLARATIONS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>6</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>8</b>
1.2.2 Support Equipment List and Details .....	8
1.2.3 Support Cable List and Details .....	8
1.2.4 Block Diagram of Test Setup.....	9
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>12</b>
<b>3.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>12</b>
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup .....	13
3.1.4 Test Procedure .....	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
<b>3.2 RADIATION SPURIOUS EMISSIONS .....</b>	<b>15</b>
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	16
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....	16
3.2.4 Test Procedure .....	17
3.2.5 Corrected Amplitude & Margin Calculation.....	17
<b>3.3 EMISSION BANDWIDTH: .....</b>	<b>18</b>
3.3.1 Applicable Standard.....	18
3.3.2 EUT Setup.....	18
3.3.3 Test Procedure .....	18
<b>3.4 MAXIMUM CONDUCTED OUTPUT POWER:.....</b>	<b>20</b>
3.4.1 Applicable Standard.....	20
3.4.2 EUT Setup.....	20
3.4.3 Test Procedure .....	21
<b>3.5 MAXIMUM POWER SPECTRAL DENSITY: .....</b>	<b>22</b>
3.5.1 Applicable Standard.....	22
3.5.2 EUT Setup.....	22
3.5.3 Test Procedure .....	23
<b>3.7 DUTY CYCLE:.....</b>	<b>23</b>
3.7.1 EUT Setup.....	23
3.7.2 Test Procedure .....	23
<b>3.8 ANTENNA REQUIREMENT.....</b>	<b>24</b>
3.8.1 Applicable Standard.....	24
3.8.2 Judgment.....	24

<b>4. Test DATA AND RESULTS .....</b>	<b>25</b>
<b>4.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>25</b>
<b>4.2 RADIATION SPURIOUS EMISSIONS .....</b>	<b>28</b>
<b>4.3 EMISSION BANDWIDTH: .....</b>	<b>43</b>
<b>4.4 MAXIMUM CONDUCTED OUTPUT POWER: .....</b>	<b>61</b>
<b>4.5 MAXIMUM POWER SPECTRAL DENSITY: .....</b>	<b>63</b>
<b>4.6 DUTY CYCLE:.....</b>	<b>82</b>
<b>5. RF EXPOSURE EVALUATION .....</b>	<b>85</b>
<b>5.1 APPLICABLE STANDARD.....</b>	<b>85</b>
<b>5.2 MEASUREMENT RESULT .....</b>	<b>85</b>

**DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230311091-00C	Original Report	2023/4/25

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

#### 1.1.1 General:

<b>EUT Name:</b>	Repeater
<b>Trade Name:</b>	COMFAST
<b>EUT Model:</b>	CF-WR765AC
<b>Multiple Models:</b>	CF-AC2100, CF-XR186, CF-WR616AC V2, CF-WR619AC V2, CF-XR11, CF-XR10, CF-XR187, CF-XR188, CF-XR189, CF-XR185, CF-XR184
<b>Operation Frequency:</b>	Band 1: 5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) Band 4: 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
<b>Maximum Average Output Power (Conducted):</b>	22.09 dBm (5150-5250 MHz) 19.52 dBm (5725-5850 MHz)
<b>Modulation Type:</b>	802.11a/n/ac: OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM
<b>Rated Input Voltage:</b>	120Vac
<b>Serial Number:</b>	22Y5_1
<b>EUT Received Date:</b>	2023/3/15
<b>EUT Received Status:</b>	Good

Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.

#### 1.1.2 Operation Frequency Detail:

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825

Per section 15.31(m), the below frequencies were performed the test as below:

36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

**For 802.11n ht40/ac vht40:**

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795
Per section 15.31(m), the below frequencies were performed the test as below:			
38	5190	151	5755
46	5230	159	5795

**For 802.11ac vht80:**

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775
Per section 15.31(m), the below frequencies were performed the test as below:			
42	5210	155	5775

**1.1.3 Antenna Information Detail▲:**

Antenna Chain	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain		
Chain 0	PCB	50	5150-5250MHz	5.07 dBi		
			5725-5850MHz	5.37 dBi		
Chain 1	PCB	50	5150-5250MHz	5.07 dBi		
			5725-5850MHz	5.37 dBi		
The Method of §15.203 Compliance:						
<input checked="" type="checkbox"/> Antenna must be permanently attached to the unit. <input type="checkbox"/> Antenna must use a unique type of connector to attach to the EUT. <input type="checkbox"/> Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.						

**1.1.4 Accessory Information:**

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
<b>Equipment Modifications:</b>	No		
<b>EUT Exercise Software:</b>	MT7628 QA 0.0.2.8.exe		

The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:

Band	Mode	Channel	Frequency (MHz)	Data Rate	Power level	
					Chain 0	Chain 1
5150-5250 MHz	802.11a	Lowest	5180	6Mbps	20	23
		Middle	5200	6Mbps	20	24
		Highest	5240	6Mbps	23	27
	802.11n ht20	Lowest	5180	MCS8	18	1B
		Middle	5200	MCS8	19	1B
		Highest	5240	MCS8	1B	1E
	802.11n ht40	Lowest	5190	MCS8	21	24
		Highest	5230	MCS8	24	25
	802.11ac vht80	Middle	5210	MCS8	23	24
	802.11a	Lowest	5745	6Mbps	27	25
		Middle	5785	6Mbps	27	25
		Highest	5825	6Mbps	27	25
5725-5850 MHz	802.11n ht20	Lowest	5745	MCS8	26	26
		Middle	5785	MCS8	26	26
		Highest	5825	MCS8	26	26
	802.11n ht40	Lowest	5755	MCS8	23	25
		Highest	5795	MCS8	23	25
	802.11ac vht80	Middle	5775	MCS8	27	27

#### Note:

1. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.
2. The device supports SISO in all modes, and MIMO 2T2R in 802.11n/ac modes, per pretest, 2T2R mode was the worst mode and reported for 802.11n/ac modes.
3. The 802.11ac20/ac40 mode was reduced as the two modes are identical with the 802.11n20/n40 mode.

### 1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T460S	60PDTEK8

### 1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	No	3	EUT	Laptop

### 1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

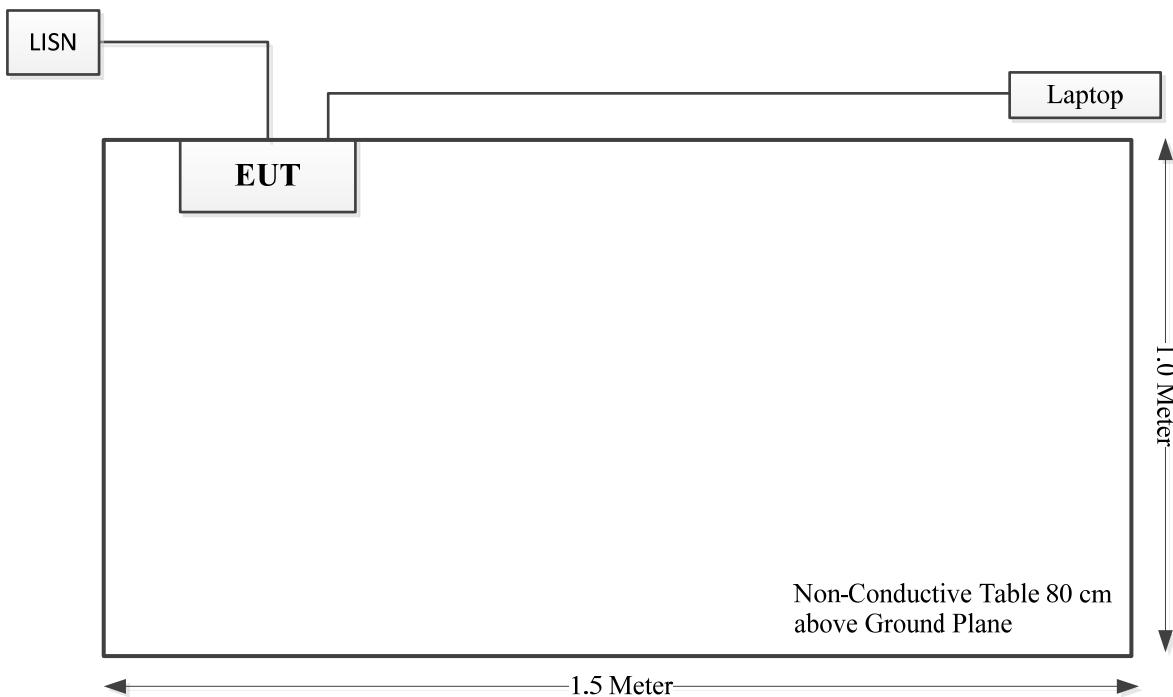

Spurious Emissions:

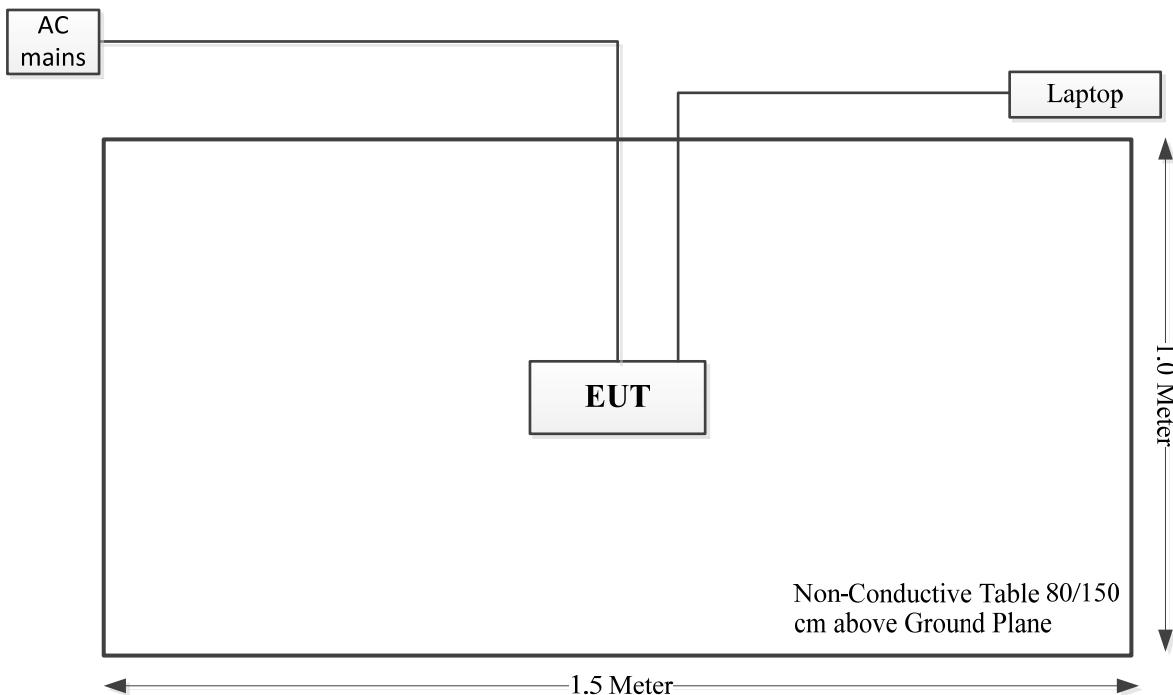

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
FCC§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Conducted Transmitter Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
FCC§15.203	Antenna Requirement	Compliant
§15.407 (f) & §1.1307	RF Exposure Evaluation	Compliant

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtainig their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### 3.1.2 EUT Setup

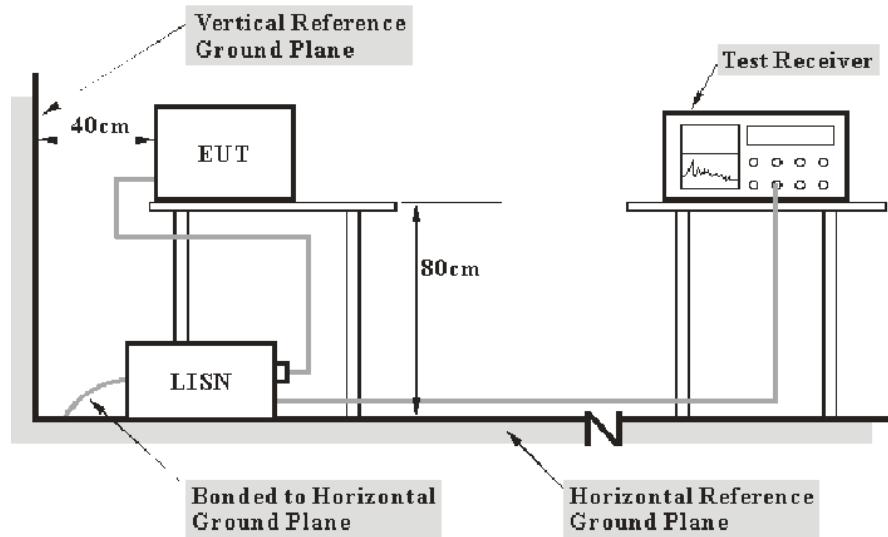

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiation Spurious Emissions

### 3.2.1 Applicable Standard


FCC §15.407 (b);

*Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
  - (i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

### 3.2.2 EUT Setup

**Below 1GHz:**

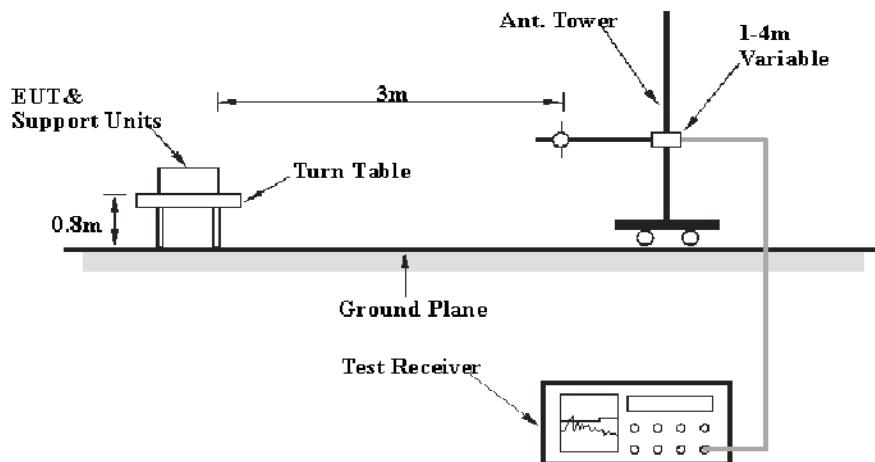

**1-40 GHz:**

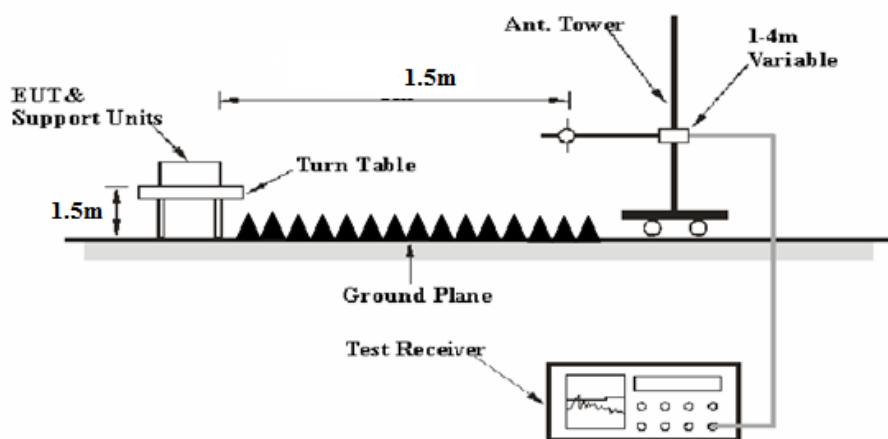

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

<b>Detector</b>	<b>RBW</b>	<b>Video B/W</b>	<b>IF B/W</b>
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

<b>Measurement</b>	<b>Duty cycle</b>	<b>RBW</b>	<b>Video B/W</b>
PK	Any	1MHz	3 MHz
AV	>98% <98%	1MHz	10 Hz 1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:  $E [\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$ , for d = 3 meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$  dB = 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor-Distance extrapolation Factor

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

### 3.3 Emission Bandwidth:

#### 3.3.1 Applicable Standard


FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### 3.3.2 EUT Setup

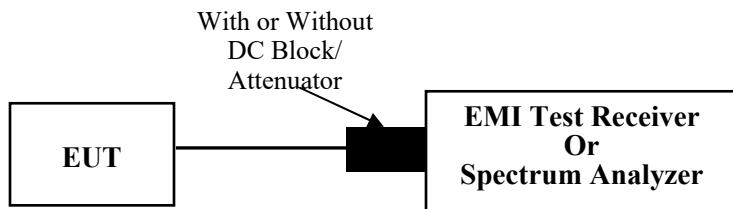

#### 3.3.3 Test Procedure

##### 26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

##### 6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3$  RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

**99% Occupied Bandwidth:**

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

### 3.4 Maximum conducted output power:

#### 3.4.1 Applicable Standard

FCC §15.407(a) (1)

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### 3.4.2 EUT Setup

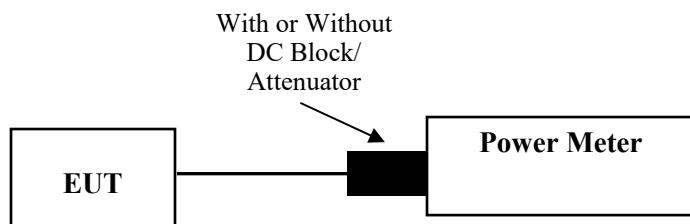

### 3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.2

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### 3.5 Maximum power spectral density:

#### 3.5.1 Applicable Standard

FCC §15.407(a) (1)

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### 3.5.2 EUT Setup

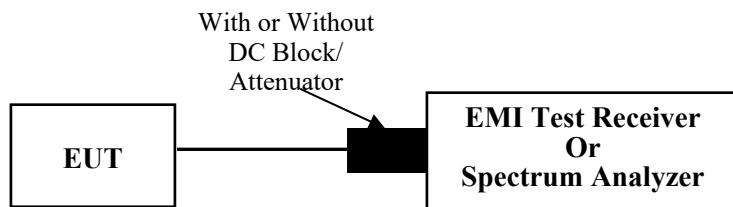

### 3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

**Duty cycle  $\geq 98\%$**

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

**Duty cycle  $< 98\%$ , duty cycle variations are less than  $\pm 2\%$**


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

**Duty cycle  $< 98\%$ , duty cycle variations exceed  $\pm 2\%$**

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

## 3.7 Duty Cycle:

### 3.7.1 EUT Setup

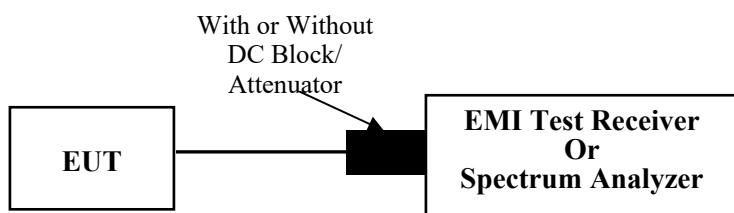

### 3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value.
- 3) Set VBW  $\geq$  RBW. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

## 3.8 Antenna Requirement

### 3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 3.8.2 Judgment

**Result: Compliant.** Please refer to the Antenna Information detail in Section 1.

## 4. Test DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

Serial Number:	22Y5_1	Test Date:	2023/3/23
Test Site:	CE	Test Mode:	Transmitting(802.11n ht 40 5190 MHz was the worst)
Tester:	Vic Du	Test Result:	Pass

#### Environmental Conditions:


Temperature: (°C)	24.8	Relative Humidity: (%)	68	ATM Pressure: (kPa)	100.7
----------------------	------	------------------------------	----	------------------------	-------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022/04/01	2023/03/31
R&S	EMI Test Receiver	ESR3	102726	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022/08/07	2023/08/06
Audix	Test Software	E3	190306 (V9)	N/A	N/A


\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Mode: Transmitting  
Port: Line  
Note:

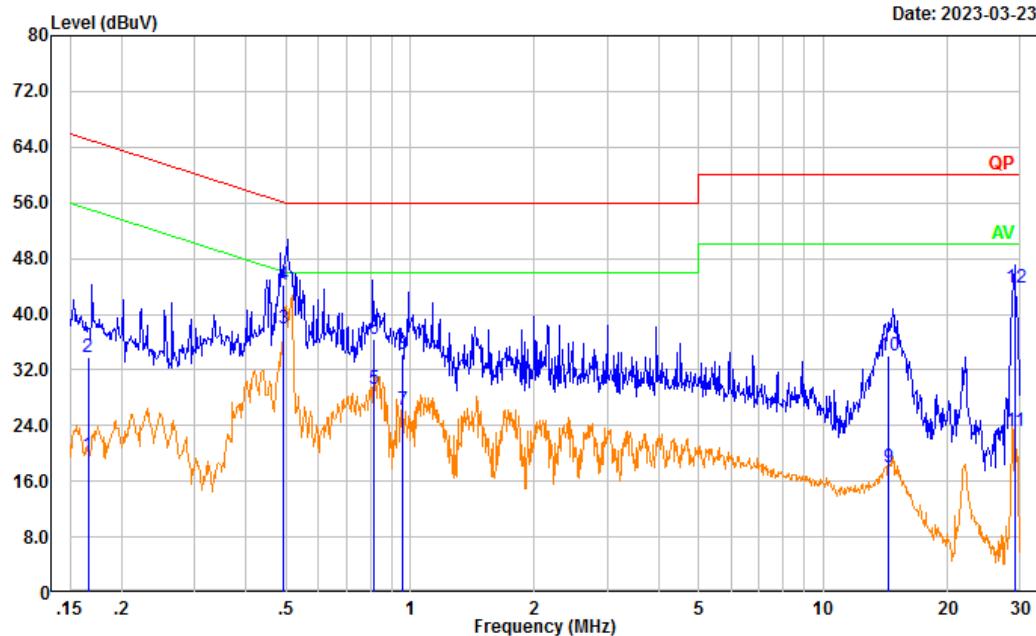

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.166	10.13	9.61	19.74	55.17	35.43	Average
2	0.166	24.13	9.61	33.74	65.17	31.43	QP
3	0.493	28.39	9.61	38.00	46.13	8.13	Average
4	0.493	34.58	9.61	44.19	56.13	11.94	QP
5	0.816	19.58	9.62	29.20	46.00	16.80	Average
6	0.816	26.73	9.62	36.35	56.00	19.65	QP
7	0.957	16.65	9.62	26.27	46.00	19.73	Average
8	0.957	24.73	9.62	34.35	56.00	21.65	QP
9	14.343	8.39	9.68	18.07	50.00	31.93	Average
10	14.343	24.42	9.68	34.10	60.00	25.90	QP
11	29.155	13.34	9.82	23.16	50.00	26.84	Average
12	29.155	33.93	9.82	43.75	60.00	16.25	QP

Test Mode: Transmitting  
Port: neutral  
Note:

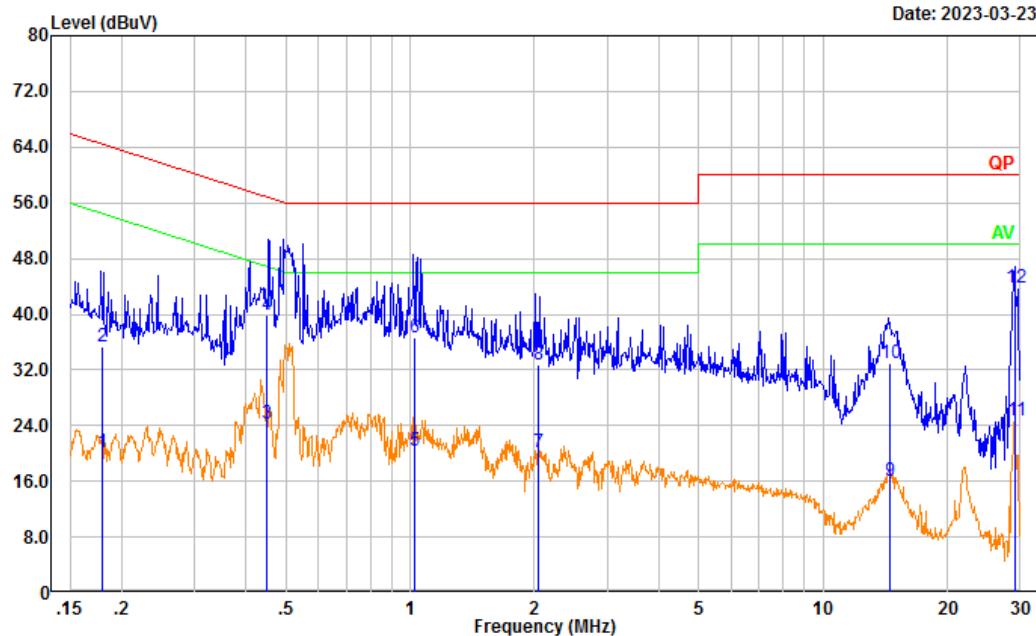

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.180	10.54	9.61	20.15	54.50	34.35	Average
2	0.180	25.73	9.61	35.34	64.50	29.16	QP
3	0.450	14.58	9.61	24.19	46.88	22.69	Average
4	0.450	30.39	9.61	40.00	56.88	16.88	QP
5	1.022	10.86	9.62	20.48	46.00	25.52	Average
6	1.022	26.99	9.62	36.61	56.00	19.39	QP
7	2.046	10.43	9.63	20.06	46.00	25.94	Average
8	2.046	23.08	9.63	32.71	56.00	23.29	QP
9	14.528	6.41	9.69	16.10	50.00	33.90	Average
10	14.528	23.21	9.69	32.90	60.00	27.10	QP
11	29.221	14.82	9.81	24.63	50.00	25.37	Average
12	29.221	33.98	9.81	43.79	60.00	16.21	QP

## 4.2 Radiation Spurious Emissions

Serial Number:	22Y5_1	Test Date:	2023/3/25 ~2023/4/21
Test Site:	966-1,966-2	Test Mode:	Transmitting
Tester:	Tao,Carl Xue	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	23.7~26.3	Relative Humidity: (%)	53~59	ATM Pressure: (kPa)	100.1~100.7

### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
Sonoma	Amplifier	310N	186165	2022/07/17	2023/07/16
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
AH	Preamplifier	PAM-1840VH	190	2022/11/09	2023/11/08
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022/08/07	2023/08/06
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2022/08/07	2023/08/06
Mini Circuits	High Pass Filter	VHF-6010+	31119	2022/08/07	2023/08/06
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/02/05	2024/02/04

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


### Test Data:

Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.10 figure 8, the worst orientation was photographed and it's data was recorded.


## 1) 30MHz-1GHz(802.11n ht40 5190MHz was the worst)

Test Mode: Transmitting  
Polarization: horizontal  
Note:

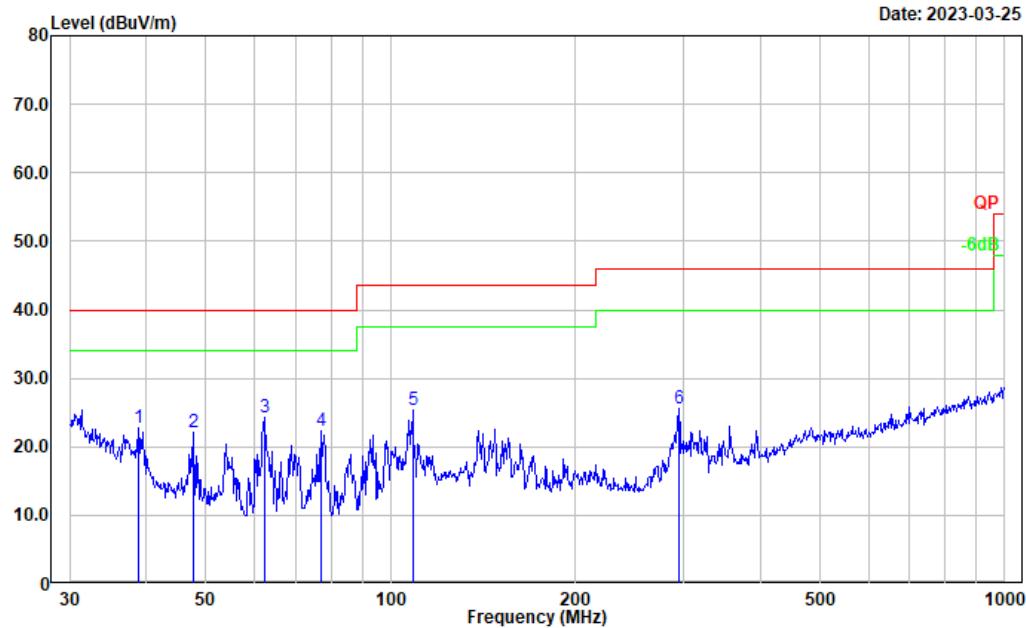

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	38.752	33.14	-10.32	22.82	40.00	17.18	Peak
2	47.659	37.91	-15.83	22.08	40.00	17.92	Peak
3	62.213	41.55	-17.22	24.33	40.00	15.67	Peak
4	77.051	39.48	-17.15	22.33	40.00	17.67	Peak
5	108.647	37.95	-12.54	25.41	43.50	18.09	Peak
6	294.114	36.37	-10.82	25.55	46.00	20.45	Peak

Test Mode: Transmitting  
Polarization: vertical  
Note:

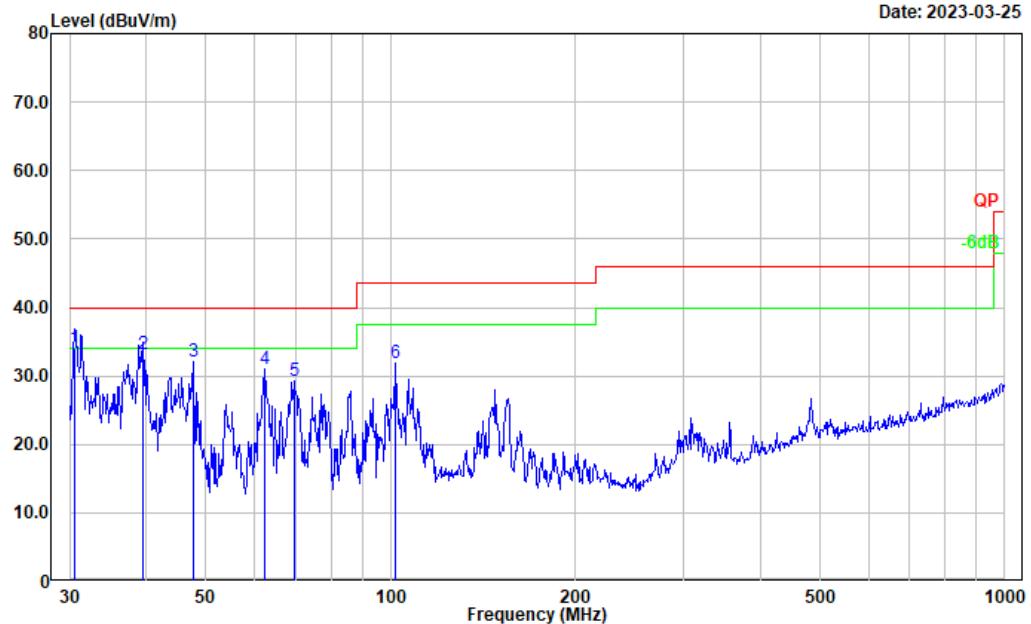

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
<hr/>							
1	30.639	38.16	-4.09	34.07	40.00	5.93	QP
2	39.470	44.08	-10.90	33.18	40.00	6.82	QP
3	47.659	47.93	-15.83	32.10	40.00	7.90	Peak
4	62.213	48.29	-17.22	31.07	40.00	8.93	Peak
5	69.600	45.77	-16.52	29.25	40.00	10.75	Peak
6	102.001	45.90	-13.97	31.93	43.50	11.57	Peak

**2) 1GHz-40GHz:****5150-5250MHz****802.11a, Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.000	75.83	PK	H	38.68	108.49	N/A	N/A
5180.000	62.90	AV	H	38.68	95.56	N/A	N/A
5180.000	79.35	PK	V	38.68	112.01	N/A	N/A
5180.000	66.82	AV	V	38.68	99.48	N/A	N/A
5150.000	39.71	PK	V	38.64	72.33	74.00	1.67
5150.000	20.45	AV	V	38.64	53.07	54.00	0.93
10360.000	50.15	PK	V	19.18	63.31	68.20	4.89
15540.000	37.44	PK	V	22.44	53.86	74.00	20.14
15540.000	23.84	AV	V	22.44	40.26	54.00	13.74
Middle Channel: 5200 MHz							
5200.000	75.32	PK	H	38.70	108.00	N/A	N/A
5200.000	62.41	AV	H	38.70	95.09	N/A	N/A
5200.000	79.52	PK	V	38.70	112.20	N/A	N/A
5200.000	66.41	AV	V	38.70	99.09	N/A	N/A
10400.000	49.20	PK	V	19.16	62.34	68.20	5.86
15600.000	37.40	PK	V	22.41	53.79	74.00	20.21
15600.000	23.97	AV	V	22.41	40.36	54.00	13.64
High Channel: 5240 MHz							
5240.000	74.59	PK	H	38.85	107.42	N/A	N/A
5240.000	61.10	AV	H	38.85	93.93	N/A	N/A
5240.000	78.52	PK	V	38.85	111.35	N/A	N/A
5240.000	65.33	AV	V	38.85	98.16	N/A	N/A
5350.000	30.32	PK	V	39.03	63.33	74.00	10.67
5350.000	16.82	AV	V	39.03	49.83	54.00	4.17
10480.000	45.66	PK	V	18.86	58.50	68.20	9.70
15720.000	38.81	PK	V	22.28	55.07	74.00	18.93
15720.000	24.66	AV	V	22.28	40.92	54.00	13.08

## 802.11a, Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.000	75.20	PK	H	38.68	107.86	N/A	N/A
5180.000	62.37	AV	H	38.68	95.03	N/A	N/A
5180.000	78.75	PK	V	38.68	111.41	N/A	N/A
5180.000	65.65	AV	V	38.68	98.31	N/A	N/A
5150.000	39.73	PK	V	38.64	72.35	74.00	1.65
5150.000	21.12	AV	V	38.64	53.74	54.00	0.26
10360.000	50.11	PK	V	19.18	63.27	68.20	4.93
15540.000	37.28	PK	V	22.44	53.70	74.00	20.30
15540.000	23.18	AV	V	22.44	39.60	54.00	14.40
Middle Channel: 5200 MHz							
5200.000	74.82	PK	H	38.70	107.50	N/A	N/A
5200.000	61.82	AV	H	38.70	94.50	N/A	N/A
5200.000	78.65	PK	V	38.70	111.33	N/A	N/A
5200.000	65.94	AV	V	38.70	98.62	N/A	N/A
10400.000	49.08	PK	V	19.16	62.22	68.20	5.98
15600.000	37.33	PK	V	22.41	53.72	74.00	20.28
15600.000	23.68	AV	V	22.41	40.07	54.00	13.93
High Channel: 5240 MHz							
5240.000	74.85	PK	H	38.85	107.68	N/A	N/A
5240.000	61.74	AV	H	38.85	94.57	N/A	N/A
5240.000	77.66	PK	V	38.85	110.49	N/A	N/A
5240.000	64.41	AV	V	38.85	97.24	N/A	N/A
5350.000	30.13	PK	V	39.03	63.14	74.00	10.86
5350.000	16.71	AV	V	39.03	49.72	54.00	4.28
10480.000	45.58	PK	V	18.86	58.42	68.20	9.78
15720.000	38.74	PK	V	22.28	55.00	74.00	19.00
15720.000	24.52	AV	V	22.28	40.78	54.00	13.22

**802.11n ht20:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.000	73.28	PK	H	38.68	105.94	N/A	N/A
5180.000	59.74	AV	H	38.68	92.40	N/A	N/A
5180.000	78.15	PK	V	38.68	110.81	N/A	N/A
5180.000	65.08	AV	V	38.68	97.74	N/A	N/A
5150.000	39.66	PK	V	38.64	72.28	74.00	1.72
5150.000	20.33	AV	V	38.64	52.95	54.00	1.05
10360.000	54.46	PK	V	19.18	67.62	68.20	0.58
15540.000	38.12	PK	V	22.44	54.54	74.00	19.46
15540.000	24.29	AV	V	22.44	40.71	54.00	13.29
Middle Channel: 5200 MHz							
5200.000	73.85	PK	H	38.70	106.53	N/A	N/A
5200.000	59.53	AV	H	38.70	92.21	N/A	N/A
5200.000	78.23	PK	V	38.70	110.91	N/A	N/A
5200.000	65.17	AV	V	38.70	97.85	N/A	N/A
10400.000	53.86	PK	V	19.16	67.00	68.20	1.20
15600.000	38.15	PK	V	22.41	54.54	74.00	19.46
15600.000	24.87	AV	V	22.41	41.26	54.00	12.74
High Channel: 5240 MHz							
5240.000	72.40	PK	H	38.85	105.23	N/A	N/A
5240.000	59.66	AV	H	38.85	92.49	N/A	N/A
5240.000	77.68	PK	V	38.85	110.51	N/A	N/A
5240.000	64.05	AV	V	38.85	96.88	N/A	N/A
5350.000	30.11	PK	V	39.03	63.12	74.00	10.88
5350.000	16.65	AV	V	39.03	49.66	54.00	4.34
10480.000	53.35	PK	V	18.86	66.19	68.20	2.01
15720.000	38.21	PK	V	22.28	54.47	74.00	19.53
15720.000	25.02	AV	V	22.28	41.28	54.00	12.72

**802.11n ht40:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5190MHz							
5190.000	73.26	PK	H	38.69	105.93	N/A	N/A
5190.000	59.48	AV	H	38.69	92.15	N/A	N/A
5190.000	78.23	PK	V	38.69	110.90	N/A	N/A
5190.000	64.25	AV	V	38.69	96.92	N/A	N/A
5150.000	34.64	PK	V	38.64	67.26	74.00	6.74
5150.000	17.85	AV	V	38.64	50.47	54.00	3.53
10380.000	53.70	PK	V	19.17	66.85	68.20	1.35
15570.000	39.41	PK	V	22.43	55.82	74.00	18.18
15570.000	25.67	AV	V	22.43	42.08	54.00	11.92
High Channel: 5230 MHz							
5230.000	73.56	PK	H	38.81	106.35	N/A	N/A
5230.000	59.57	AV	H	38.81	92.36	N/A	N/A
5230.000	78.14	PK	V	38.81	110.93	N/A	N/A
5230.000	64.23	AV	V	38.81	97.02	N/A	N/A
5350.000	30.12	PK	V	39.03	63.13	74.00	10.87
5350.000	16.63	AV	V	39.03	49.64	54.00	4.36
10460.000	53.92	PK	V	18.94	66.84	68.20	1.36
15690.000	39.33	PK	V	22.29	55.60	74.00	18.40
15690.000	25.35	AV	V	22.29	41.62	54.00	12.38

**802.11ac vht80:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Middle Channel: 5210 MHz							
5210.000	73.12	PK	H	38.74	105.84	N/A	N/A
5210.000	59.71	AV	H	38.74	92.43	N/A	N/A
5210.000	77.52	PK	V	38.74	110.24	N/A	N/A
5210.000	63.13	AV	V	38.74	95.85	N/A	N/A
5150.000	31.29	PK	V	38.64	63.91	74.00	10.09
5150.000	16.87	AV	V	38.64	49.49	54.00	4.51
5350.000	30.21	PK	V	39.03	63.22	74.00	10.78
5350.000	16.62	AV	V	39.03	49.63	54.00	4.37
10420.000	50.11	PK	V	19.09	63.18	68.20	5.02
15630.000	38.16	PK	V	22.37	54.51	74.00	19.49
15630.000	24.18	AV	V	22.37	40.53	54.00	13.47

*Note:**Result = Reading + Factor- Distance extrapolation Factor**For 1-40GHz:**Distance extrapolation Factor = 20 log (specific distance [3m]/test distance [1.5m]) dB= 6.02 dB*

5725-5850MHz:

802.11a, Chain 0:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5745MHz							
5745.000	76.58	PK	H	39.46	110.02	N/A	N/A
5745.000	66.68	AV	H	39.46	100.12	N/A	N/A
5745.000	79.12	PK	V	39.46	112.56	N/A	N/A
5745.000	69.57	AV	V	39.46	103.01	N/A	N/A
5725.000	48.60	PK	V	39.48	82.06	122.20	40.14
5720.000	35.94	PK	V	39.49	69.41	110.80	41.39
5700.000	29.94	PK	V	39.51	63.43	105.20	41.77
5650.000	28.02	PK	V	39.49	61.49	68.20	6.71
11490.000	51.30	PK	V	20.67	65.95	74.00	8.05
11490.000	34.42	AV	V	20.67	49.07	54.00	4.93
17235.000	35.22	PK	V	26.76	55.96	68.20	12.24
Middle Channel: 5785 MHz							
5785.000	76.33	PK	H	39.44	109.75	N/A	N/A
5785.000	66.74	AV	H	39.44	100.16	N/A	N/A
5785.000	79.45	PK	V	39.44	112.87	N/A	N/A
5785.000	69.25	AV	V	39.44	102.67	N/A	N/A
11570.000	34.52	PK	V	20.83	49.33	74.00	24.67
11570.000	21.47	AV	V	20.83	36.28	54.00	17.72
17355.000	34.57	PK	V	27.74	56.29	68.20	11.91
High Channel: 5825 MHz							
5825.000	75.68	PK	H	39.46	109.12	N/A	N/A
5825.000	65.41	AV	H	39.46	98.85	N/A	N/A
5825.000	78.62	PK	V	39.46	112.06	N/A	N/A
5825.000	68.47	AV	V	39.46	101.91	N/A	N/A
5850.000	37.77	PK	V	39.49	71.24	122.20	50.96
5855.000	31.23	PK	V	39.51	64.72	110.80	46.08
5875.000	30.87	PK	V	39.60	64.45	105.20	40.75
5925.000	30.62	PK	V	39.68	64.28	68.20	3.92
11650.000	49.68	PK	V	21.07	64.73	74.00	9.27
11650.000	33.02	AV	V	21.07	48.07	54.00	5.93
17475.000	34.59	PK	V	28.61	57.18	68.20	11.02

**802.11a, Chain 1:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5745MHz							
5745.000	75.59	PK	H	39.46	109.03	N/A	N/A
5745.000	65.68	AV	H	39.46	99.12	N/A	N/A
5745.000	78.32	PK	V	39.46	111.76	N/A	N/A
5745.000	68.51	AV	V	39.46	101.95	N/A	N/A
5725.000	47.62	PK	V	39.48	81.08	122.20	41.12
5720.000	35.47	PK	V	39.49	68.94	110.80	41.86
5700.000	30.66	PK	V	39.51	64.15	105.20	41.05
5650.000	28.65	PK	V	39.49	62.12	68.20	6.08
11490.000	51.62	PK	V	20.67	66.27	74.00	7.73
11490.000	34.62	AV	V	20.67	49.27	54.00	4.73
17235.000	35.23	PK	V	26.76	55.97	68.20	12.23
Middle Channel: 5785 MHz							
5785.000	75.63	PK	H	39.44	109.05	N/A	N/A
5785.000	65.57	AV	H	39.44	98.99	N/A	N/A
5785.000	78.45	PK	V	39.44	111.87	N/A	N/A
5785.000	68.33	AV	V	39.44	101.75	N/A	N/A
11570.000	34.62	PK	V	20.83	49.43	74.00	24.57
11570.000	22.37	AV	V	20.83	37.18	54.00	16.82
17355.000	34.76	PK	V	27.74	56.48	68.20	11.72
High Channel: 5825 MHz							
5825.000	75.41	PK	H	39.46	108.85	N/A	N/A
5825.000	65.24	AV	H	39.46	98.68	N/A	N/A
5825.000	77.85	PK	V	39.46	111.29	N/A	N/A
5825.000	68.33	AV	V	39.46	101.77	N/A	N/A
5850.000	37.52	PK	V	39.49	70.99	122.20	51.21
5855.000	32.20	PK	V	39.51	65.69	110.80	45.11
5875.000	31.02	PK	V	39.60	64.60	105.20	40.60
5925.000	31.02	PK	V	39.68	64.68	68.20	3.52
11650.000	49.50	PK	V	21.07	64.55	74.00	9.45
11650.000	33.12	AV	V	21.07	48.17	54.00	5.83
17475.000	34.69	PK	V	28.61	57.28	68.20	10.92

**802.11n ht20:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5745MHz							
5745.000	77.22	PK	H	39.46	110.66	N/A	N/A
5745.000	65.27	AV	H	39.46	98.71	N/A	N/A
5745.000	74.25	PK	V	39.46	107.69	N/A	N/A
5745.000	62.74	AV	V	39.46	96.18	N/A	N/A
5725.000	48.18	PK	V	39.48	81.64	122.20	40.56
5720.000	38.98	PK	V	39.49	72.45	110.80	38.35
5700.000	30.33	PK	V	39.51	63.82	105.20	41.38
5650.000	29.58	PK	V	39.49	63.05	68.20	5.15
11490.000	46.12	PK	V	20.67	60.77	74.00	13.23
11490.000	30.07	AV	V	20.67	44.72	54.00	9.28
17235.000	34.25	PK	V	26.76	54.99	68.20	13.21
Middle Channel: 5785 MHz							
5785.000	74.38	PK	H	39.44	107.80	N/A	N/A
5785.000	62.52	AV	H	39.44	95.94	N/A	N/A
5785.000	77.57	PK	V	39.44	110.99	N/A	N/A
5785.000	65.23	AV	V	39.44	98.65	N/A	N/A
11570.000	45.23	PK	V	20.83	60.04	74.00	13.96
11570.000	29.57	AV	V	20.83	44.38	54.00	9.62
17355.000	34.22	PK	V	27.74	55.94	68.20	12.26
High Channel: 5825 MHz							
5825.000	77.36	PK	H	39.46	110.80	N/A	N/A
5825.000	65.82	AV	H	39.46	99.26	N/A	N/A
5825.000	74.38	PK	V	39.46	107.82	N/A	N/A
5825.000	62.60	AV	V	39.46	96.04	N/A	N/A
5850.000	48.17	PK	H	39.49	81.64	122.20	40.56
5855.000	38.95	PK	H	39.51	72.44	110.80	38.36
5875.000	30.30	PK	V	39.60	63.88	105.20	41.32
5925.000	29.54	PK	V	39.68	63.20	68.20	5.00
11650.000	45.78	PK	V	21.07	60.83	74.00	13.17
11650.000	29.66	AV	V	21.07	44.71	54.00	9.29
17475.000	34.54	PK	V	28.61	57.13	68.20	11.07


**802.11n ht40:**


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5755 MHz							
5755.000	75.77	PK	H	39.45	109.20	N/A	N/A
5755.000	62.31	AV	H	39.45	95.74	N/A	N/A
5755.000	78.20	PK	V	39.45	111.63	N/A	N/A
5755.000	65.61	AV	V	39.45	99.04	N/A	N/A
5725.000	37.84	PK	V	39.48	71.30	122.20	50.90
5720.000	34.47	PK	V	39.49	67.94	110.80	42.86
5700.000	31.15	PK	V	39.51	64.64	105.20	40.56
5650.000	30.80	PK	V	39.49	64.27	68.20	3.93
11510.000	45.71	PK	V	20.67	60.36	74.00	13.64
11510.000	29.16	AV	V	20.67	43.81	54.00	10.19
17265.000	34.58	PK	V	26.94	55.50	68.20	12.70
High Channel: 5795 MHz							
5795.000	74.85	PK	H	39.43	108.26	N/A	N/A
5795.000	62.36	AV	H	39.43	95.77	N/A	N/A
5795.000	76.37	PK	V	39.43	109.78	N/A	N/A
5795.000	63.24	AV	V	39.43	96.65	N/A	N/A
5850.000	37.58	PK	V	39.49	71.05	122.20	51.15
5855.000	34.25	PK	V	39.51	67.74	110.80	43.06
5875.000	31.28	PK	V	39.60	64.86	105.20	40.34
5925.000	31.42	PK	V	39.68	65.08	68.20	3.12
11590.000	44.39	PK	V	20.88	59.25	74.00	14.75
11590.000	28.87	AV	V	20.88	43.73	54.00	10.27
17385.000	34.67	PK	V	28.07	56.72	68.20	11.48


**802.11ac vht80:**


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Middle Channel: 5775 MHz							
5775.000	73.67	PK	H	39.44	107.09	N/A	N/A
5775.000	62.33	AV	H	39.44	95.75	N/A	N/A
5775.000	76.58	PK	V	39.44	110.00	N/A	N/A
5775.000	64.52	AV	V	39.44	97.94	N/A	N/A
5725.000	30.33	PK	V	39.48	63.79	122.20	58.41
5720.000	30.18	PK	V	39.49	63.65	110.80	47.15
5700.000	30.47	PK	V	39.51	63.96	105.20	41.24
5650.000	30.52	PK	V	39.49	63.99	68.20	4.21
5850.000	30.47	PK	V	39.49	63.94	122.20	58.26
5855.000	29.88	PK	V	39.51	63.37	110.80	47.43
5875.000	28.79	PK	V	39.60	62.37	105.20	42.83
5925.000	28.89	PK	V	39.68	62.55	68.20	5.65
11550.000	37.23	PK	V	20.78	51.99	74.00	22.01
11550.000	23.68	AV	V	20.78	38.44	54.00	15.56
17325.000	34.25	PK	V	27.41	55.64	68.20	12.56

**Note:***Result = Reading + Factor- Distance extrapolation Factor**For 1-40GHz:**Distance extrapolation Factor =20 log (specific distance [3m]/test distance [1.5m]) dB= 6.02 dB*

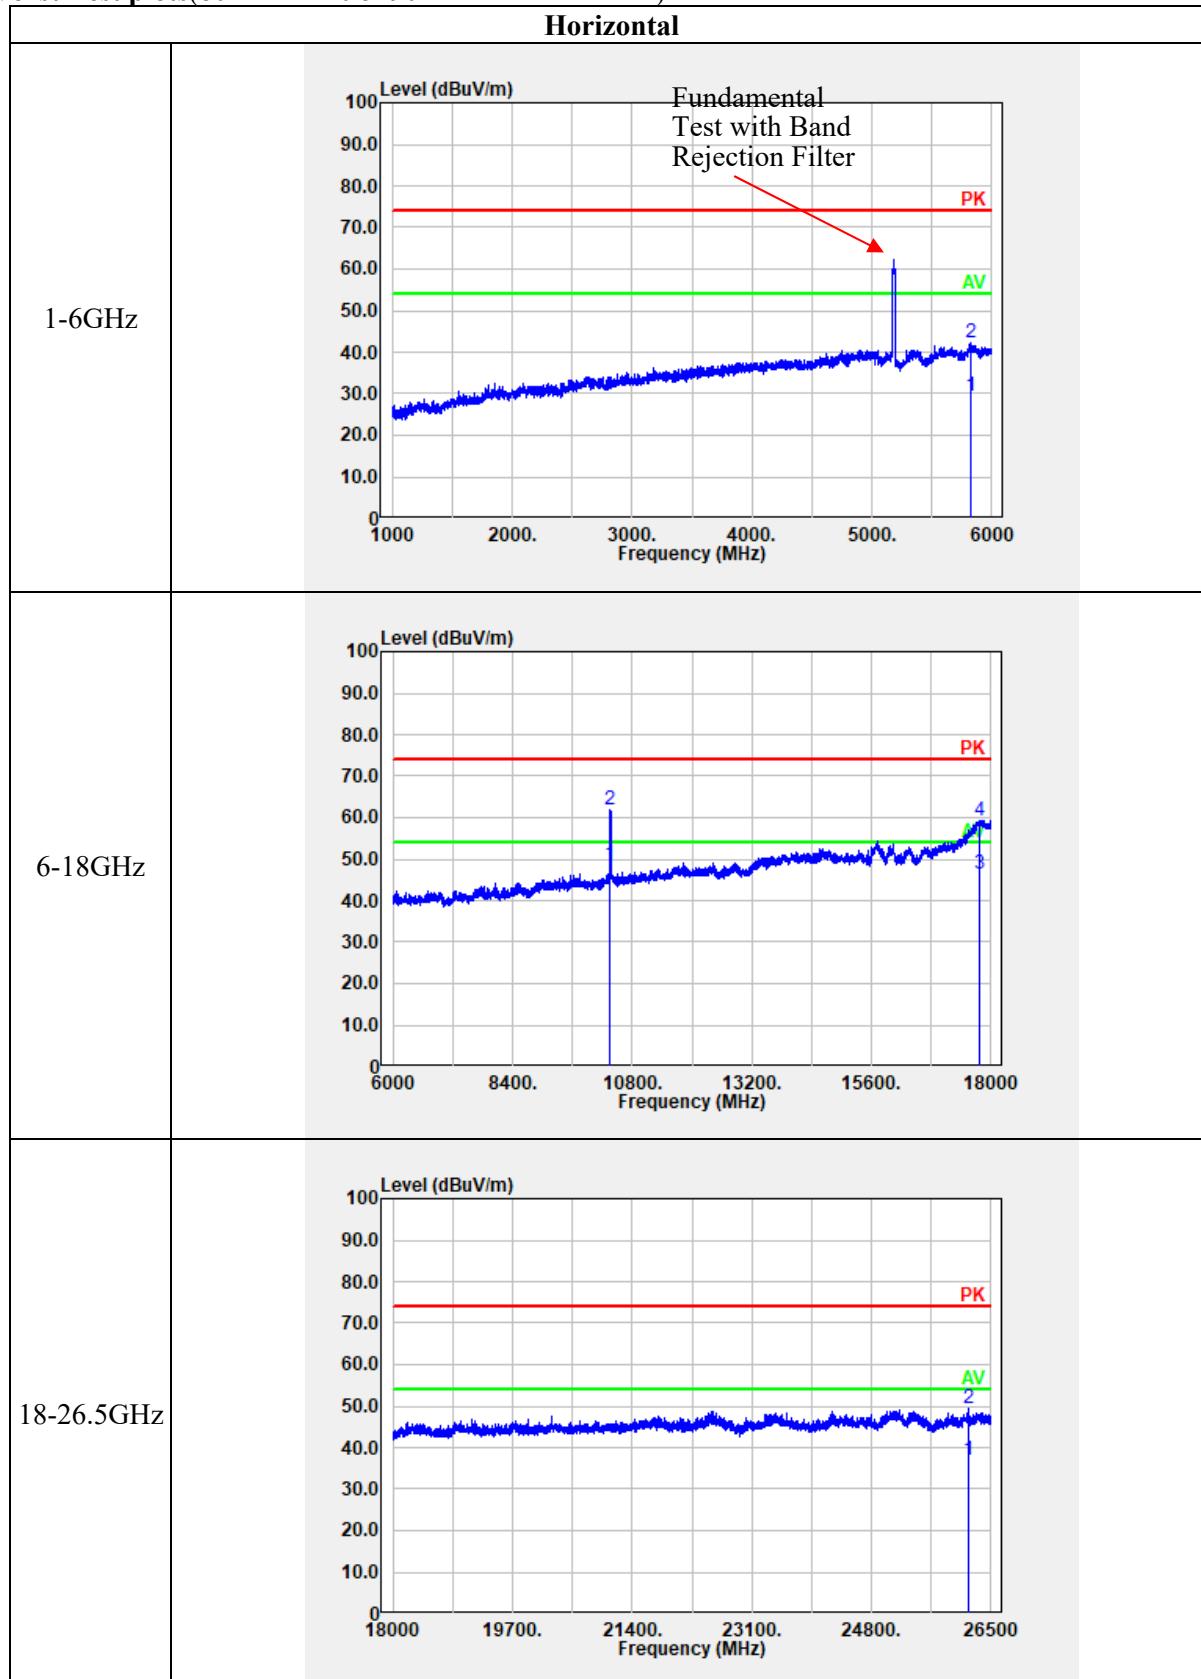**Worst Test plots(802.11n ht40 5190 MHz was the worst)**

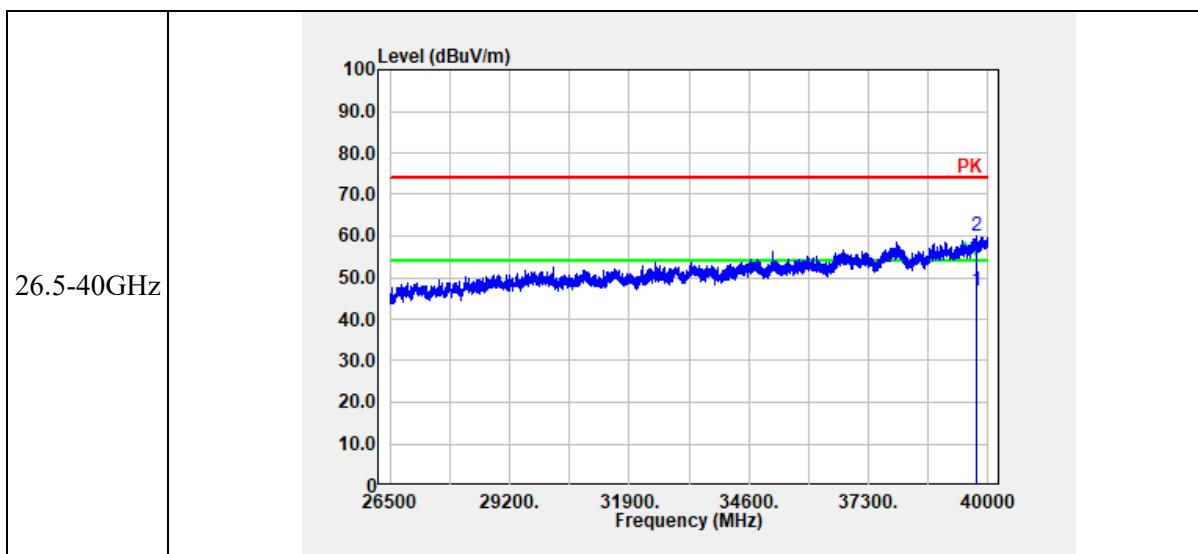

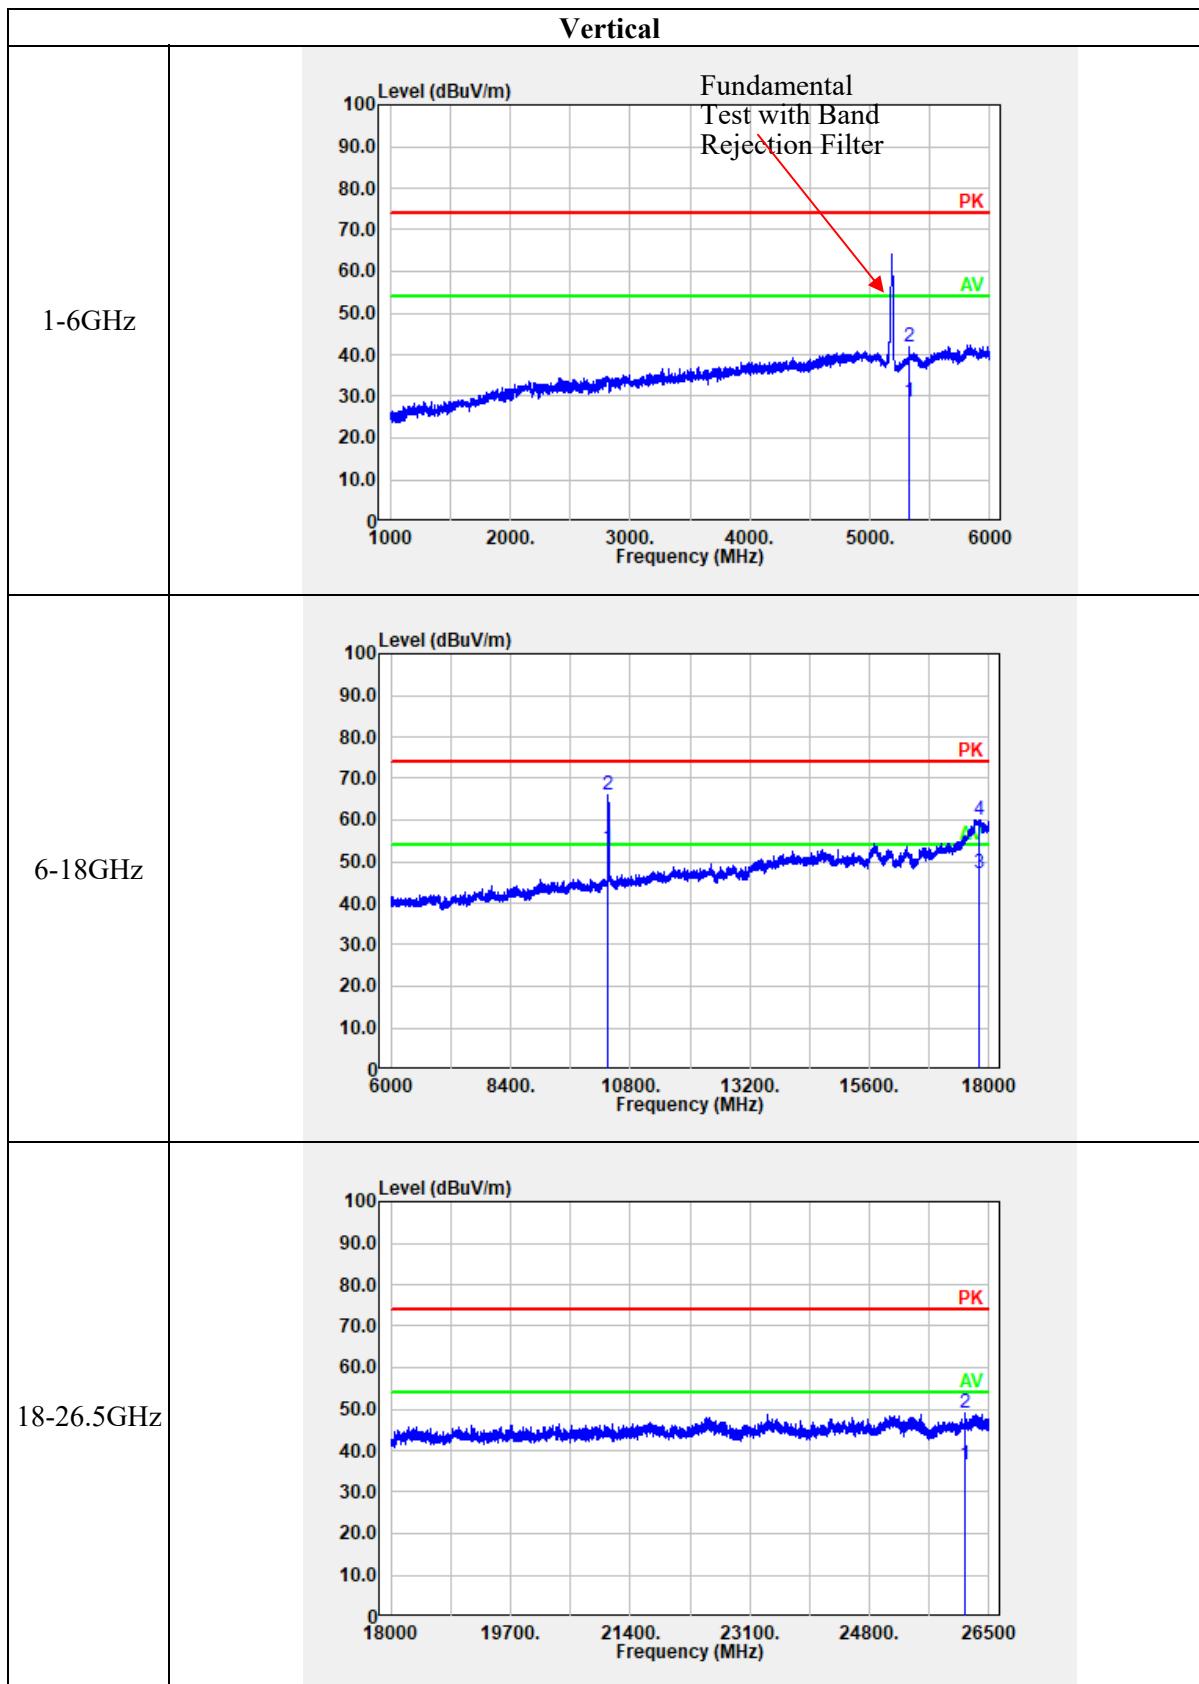

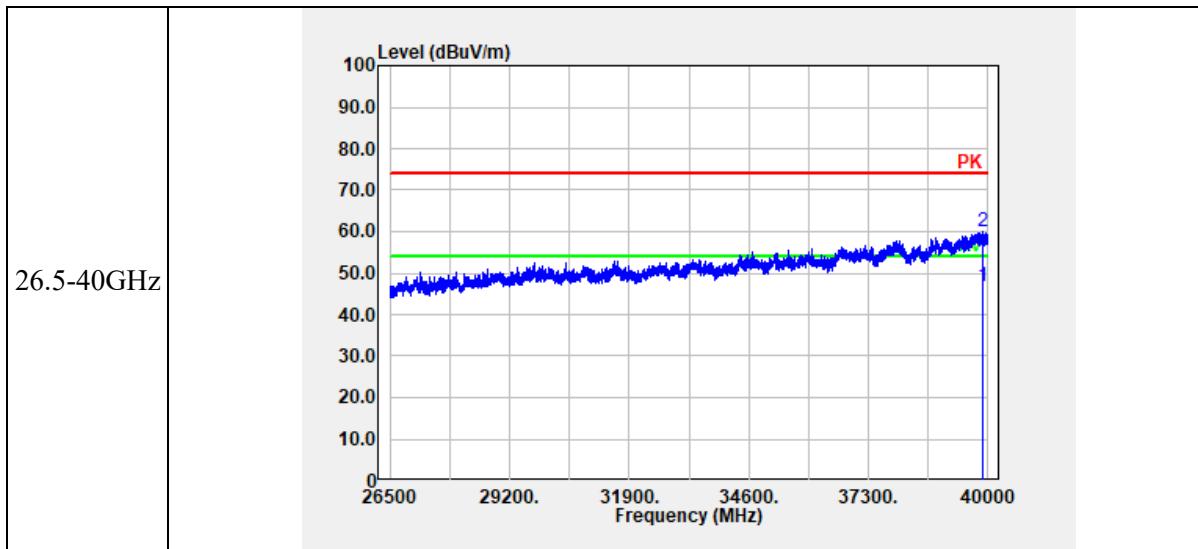

#### 4.3 Emission Bandwidth:

Serial Number:	22Y5_1	Test Date:	2023/4/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	25.1	Relative Humidity: (%)	61	ATM Pressure: (kPa)	100.6
----------------------	------	------------------------------	----	------------------------	-------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2023/3/31	2024/3/30
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	27.253	17.179
	5200	29.43	16.987
	5240	31.049	17.243
802.11n ht20	5180	20.844	17.821
	5200	20.778	17.821
	5240	20.763	17.821
802.11n ht40	5190	42.125	36.667
	5230	42.443	36.667
802.11ac vht80	5210	82.079	76.154

Note:


Test only was performed at Chain 0.


The 99% Occupied Bandwidth have not fallen into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.


5725-5850 MHz:


Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	15.269	19.808
	5785	15.231	18.782
	5825	15.265	17.949
802.11n ht20	5745	15.423	19.487
	5785	15.231	19.103
	5825	15.679	18.462
802.11n ht40	5755	35.462	38.974
	5795	35.385	38.59
802.11ac vht80	5775	75.615	76.667


Note:  
6dB Emission Bandwidth Limit:  $\geq 0.5$  MHz  
Test only was performed at Chain 0.  
The 99% Occupied Bandwidth have not fallen into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.

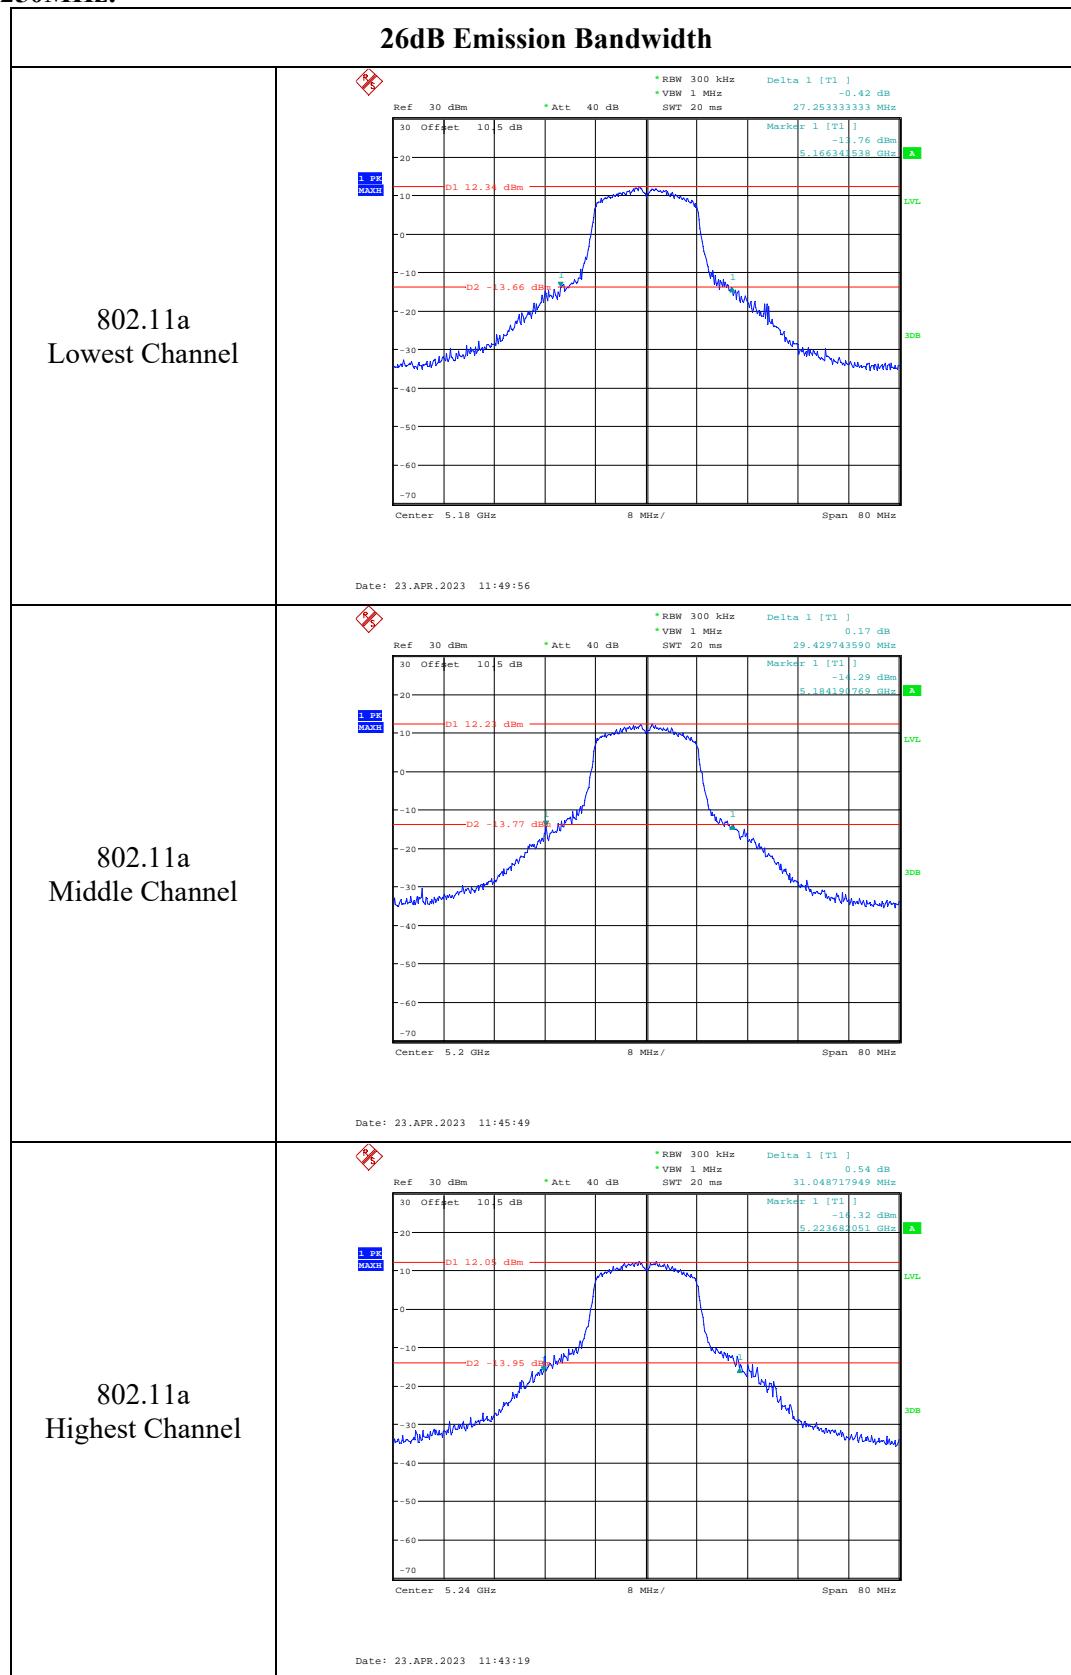
**5150-5250MHz:**

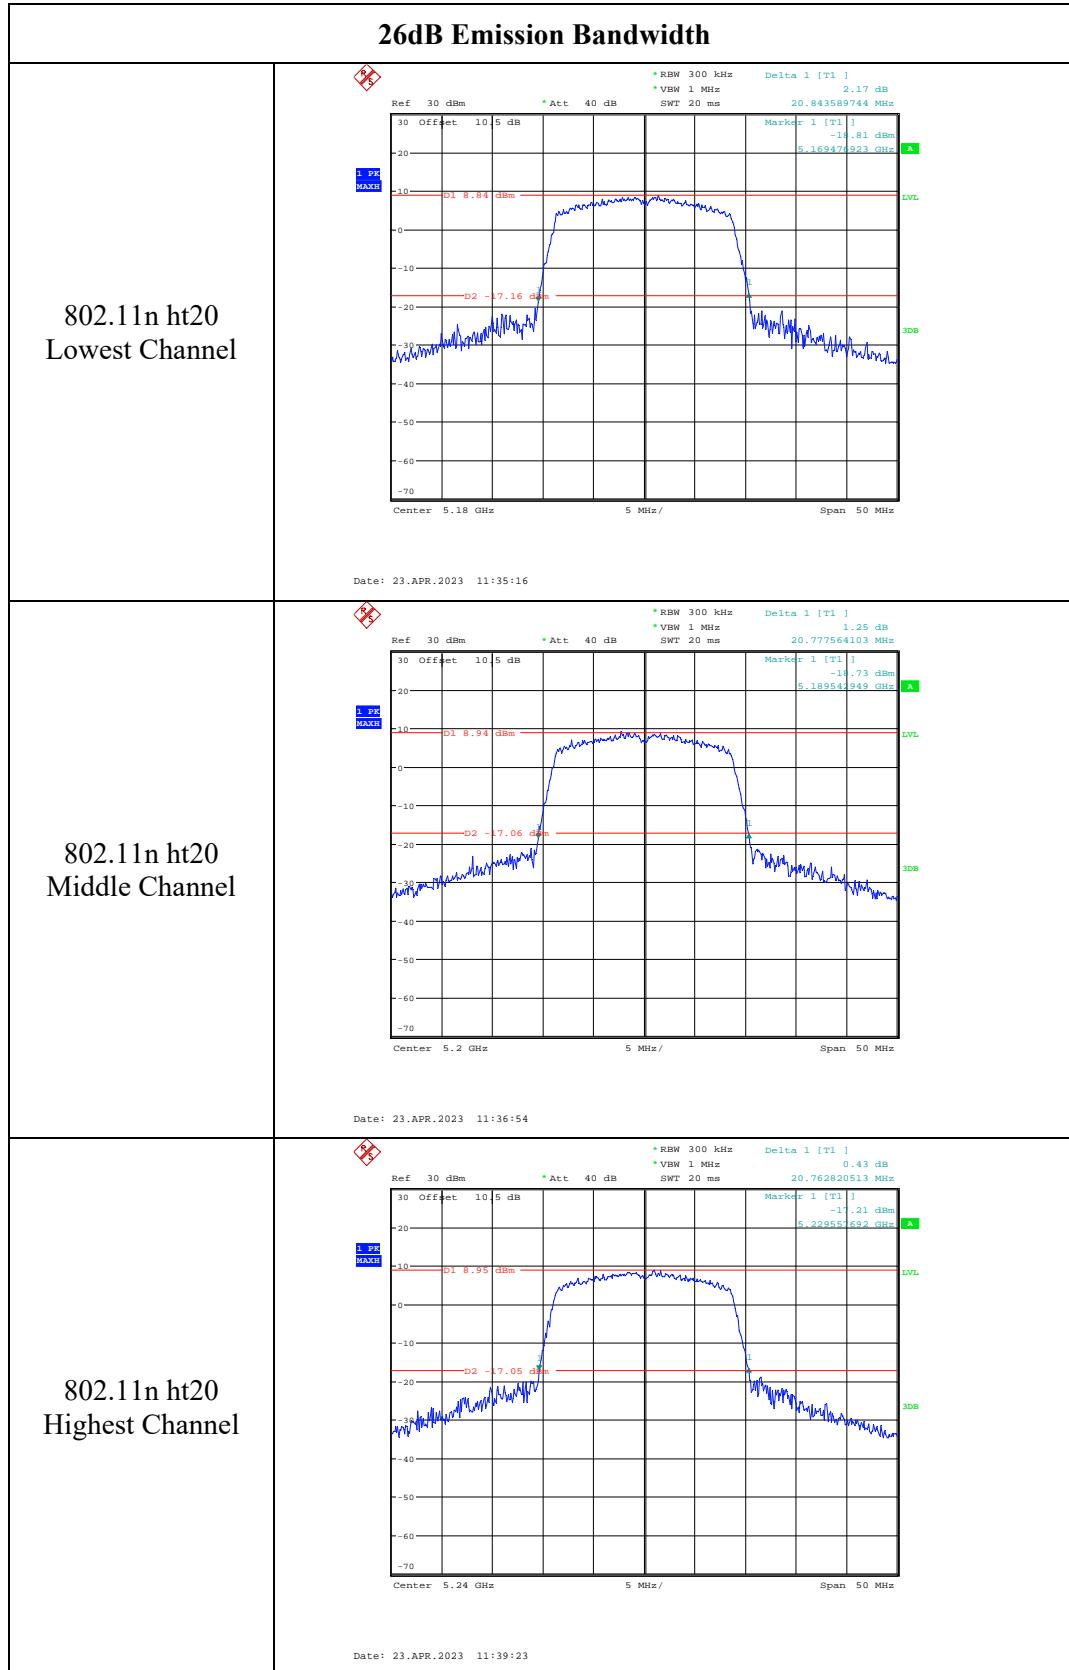


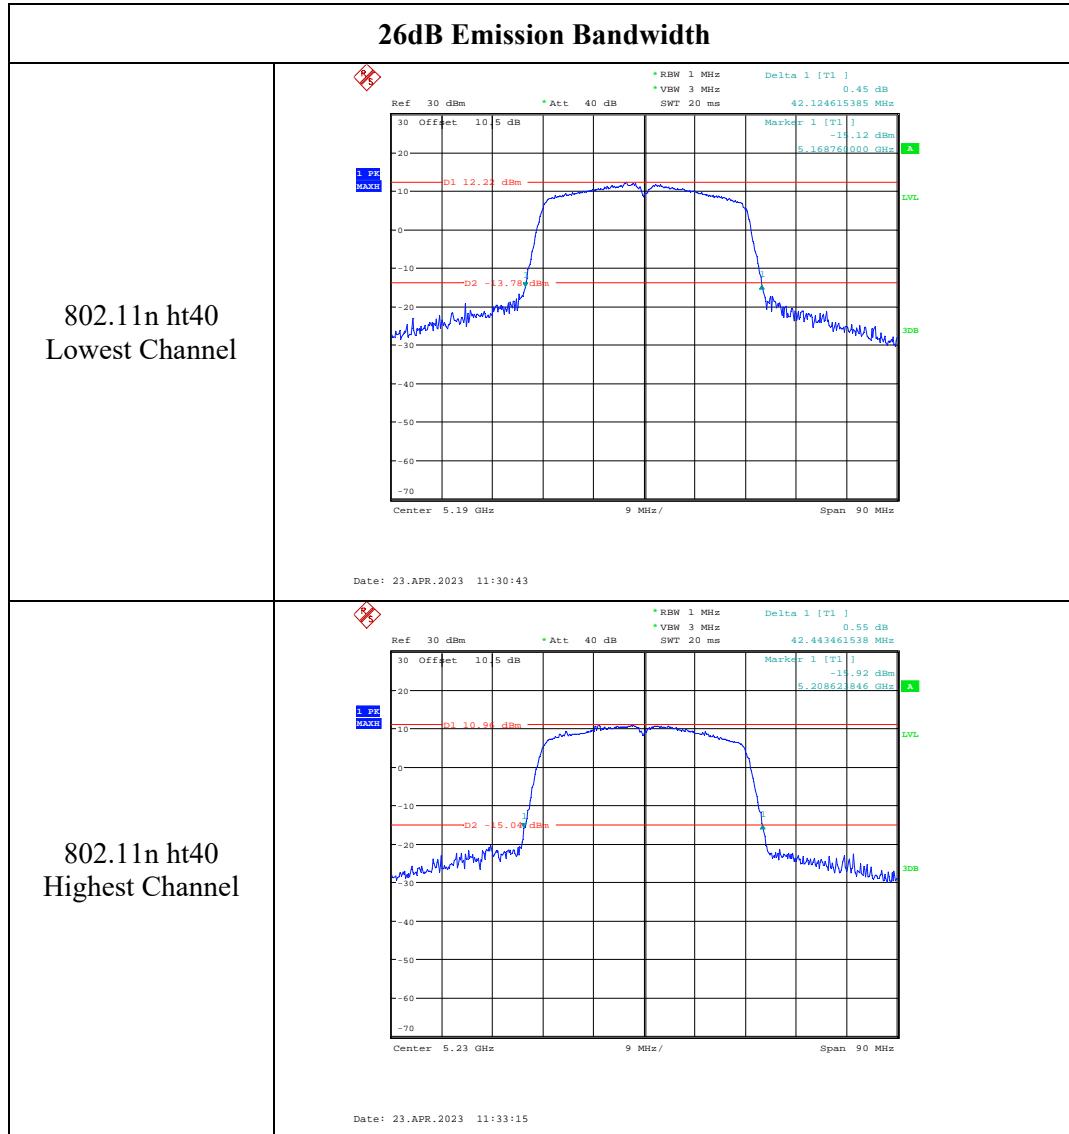


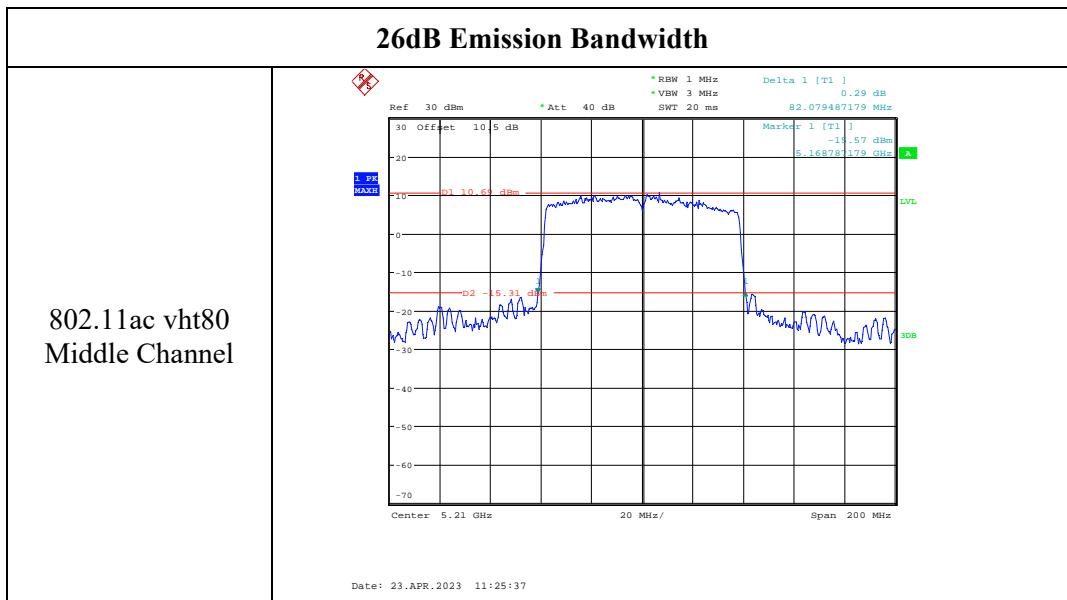


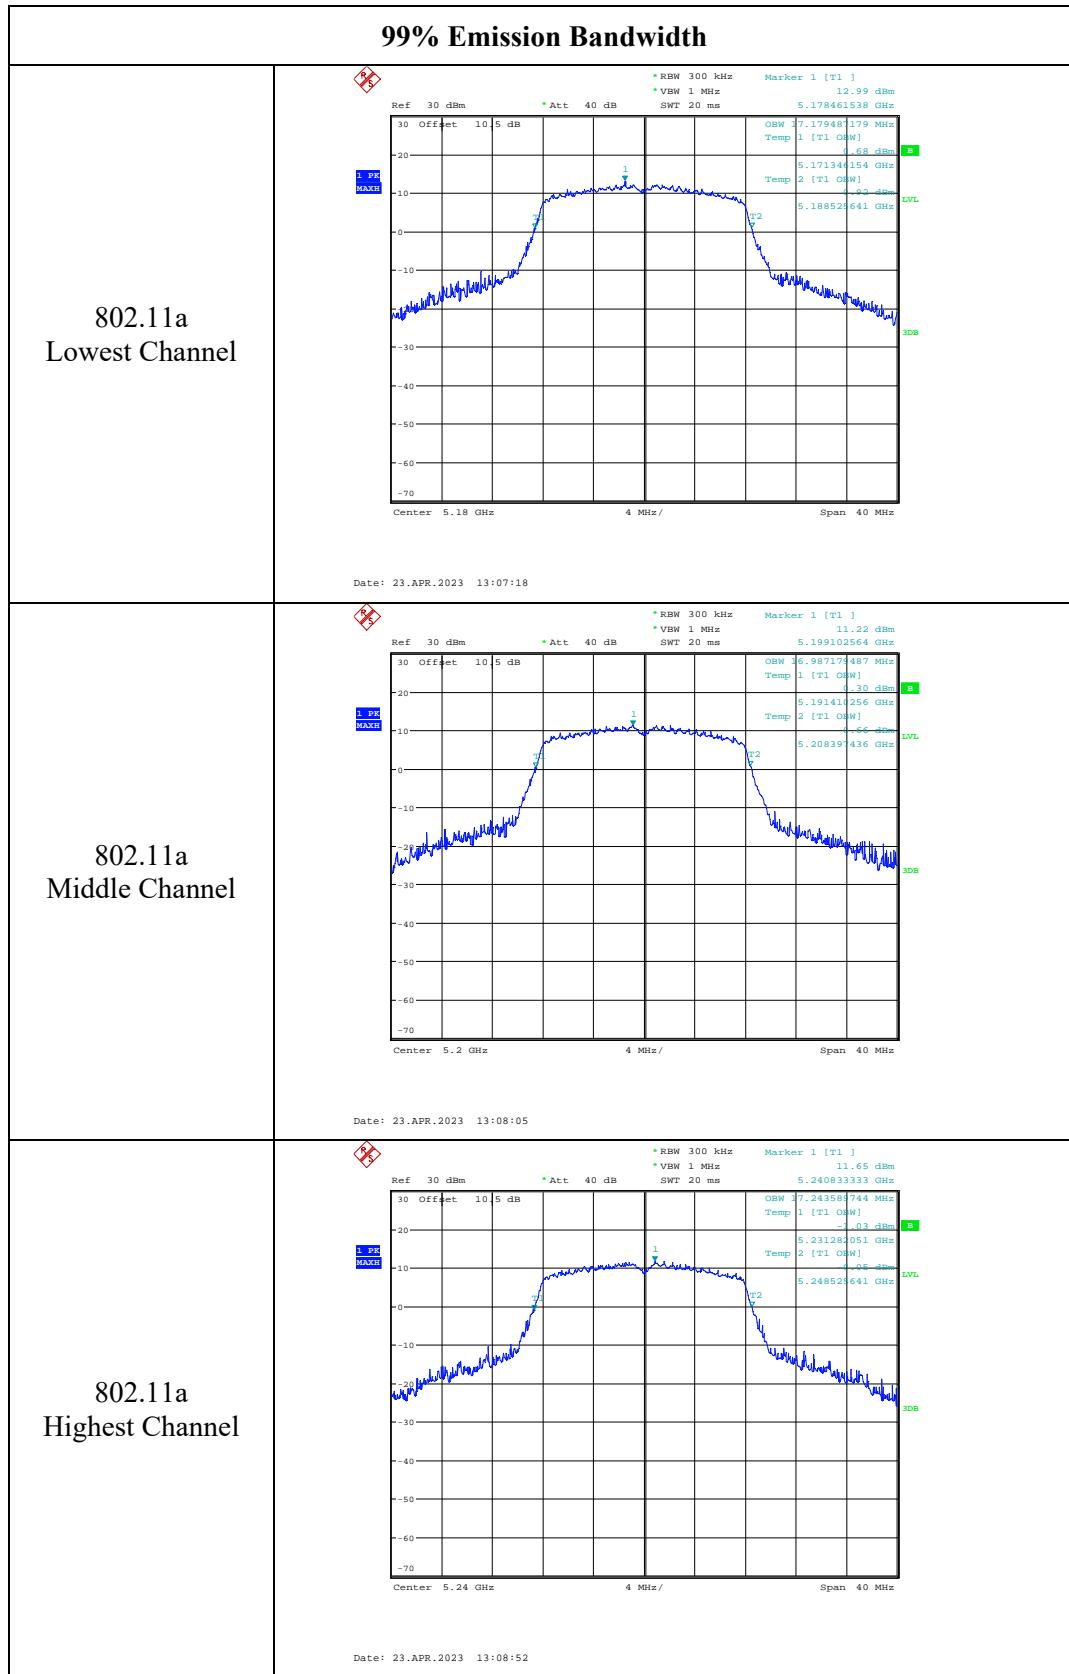


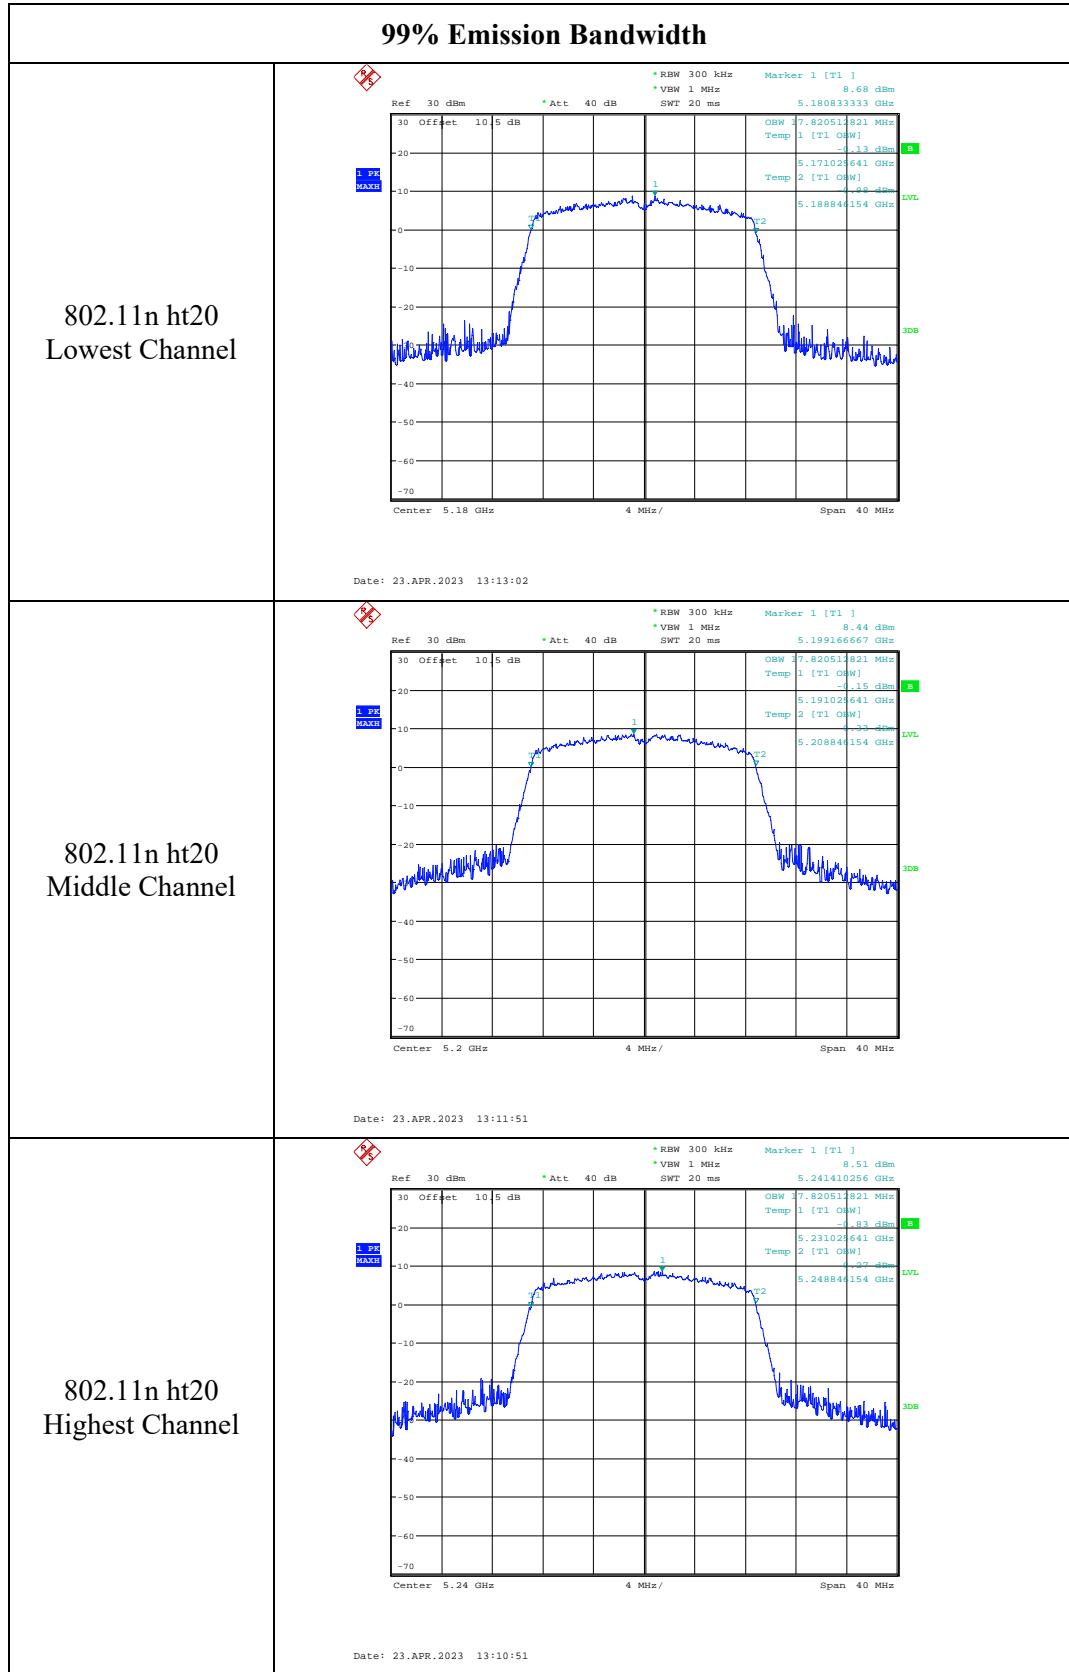


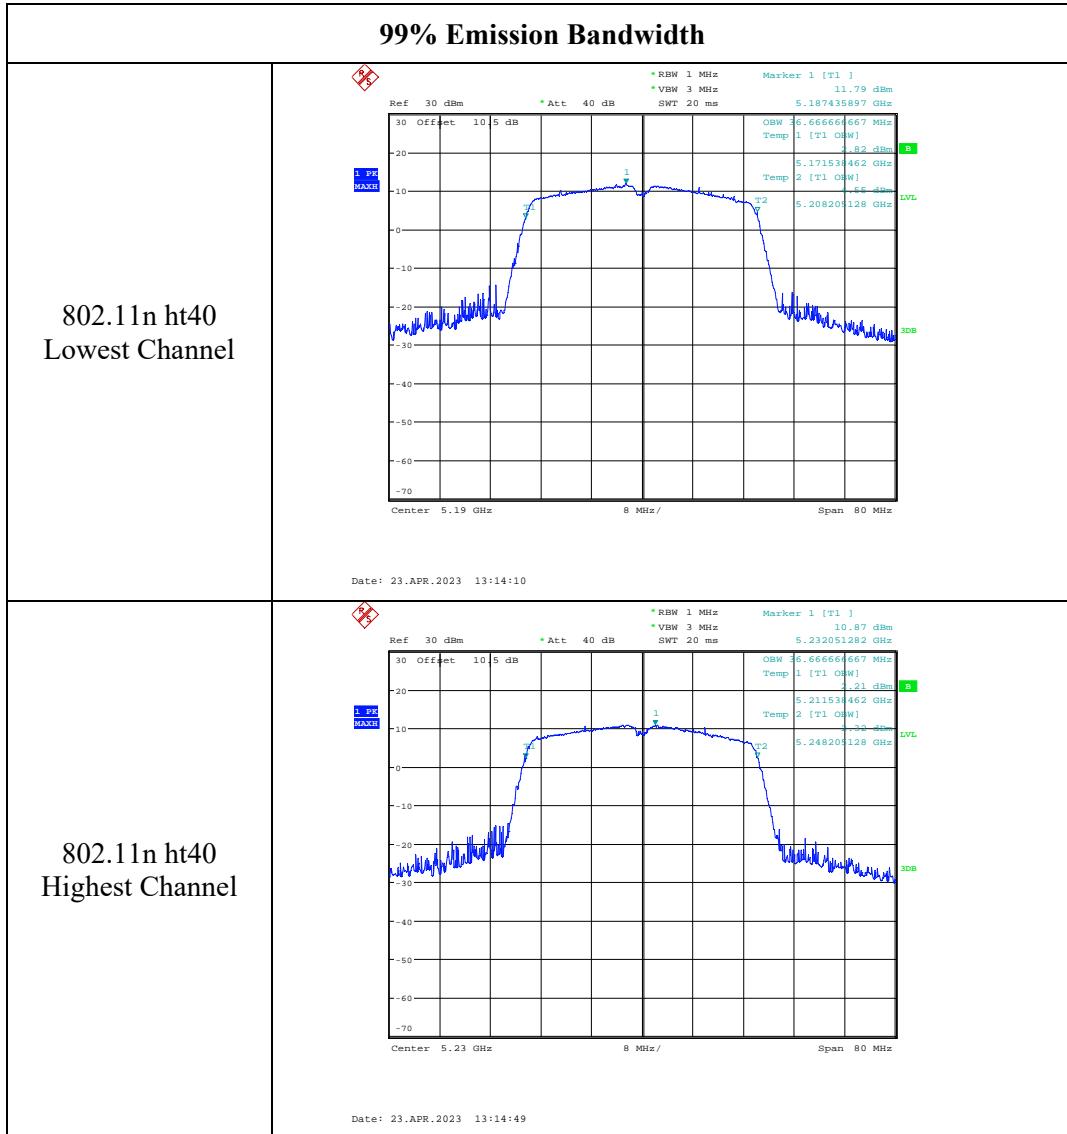


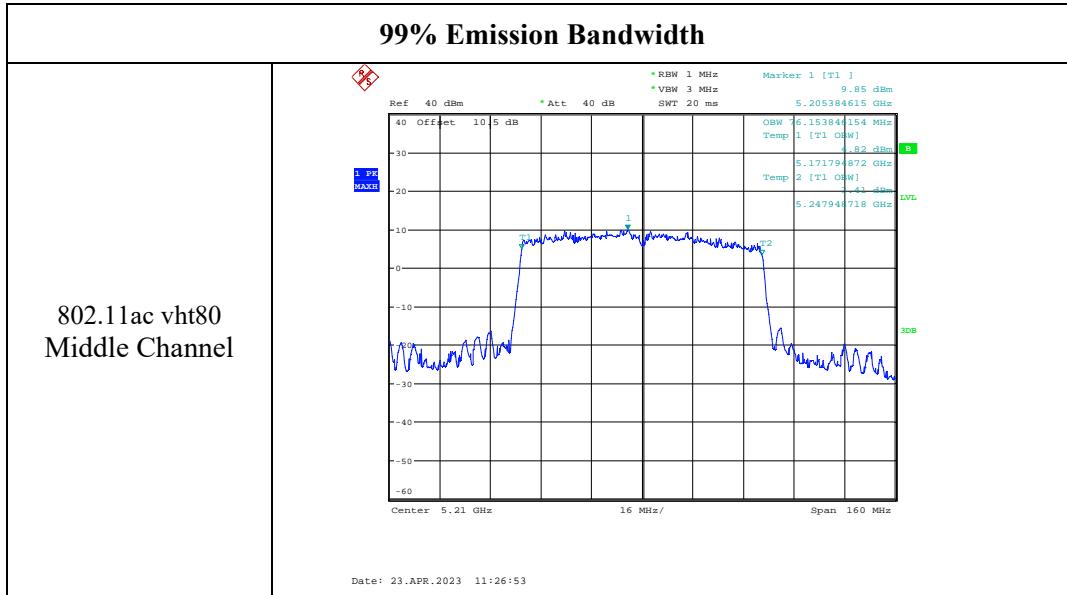


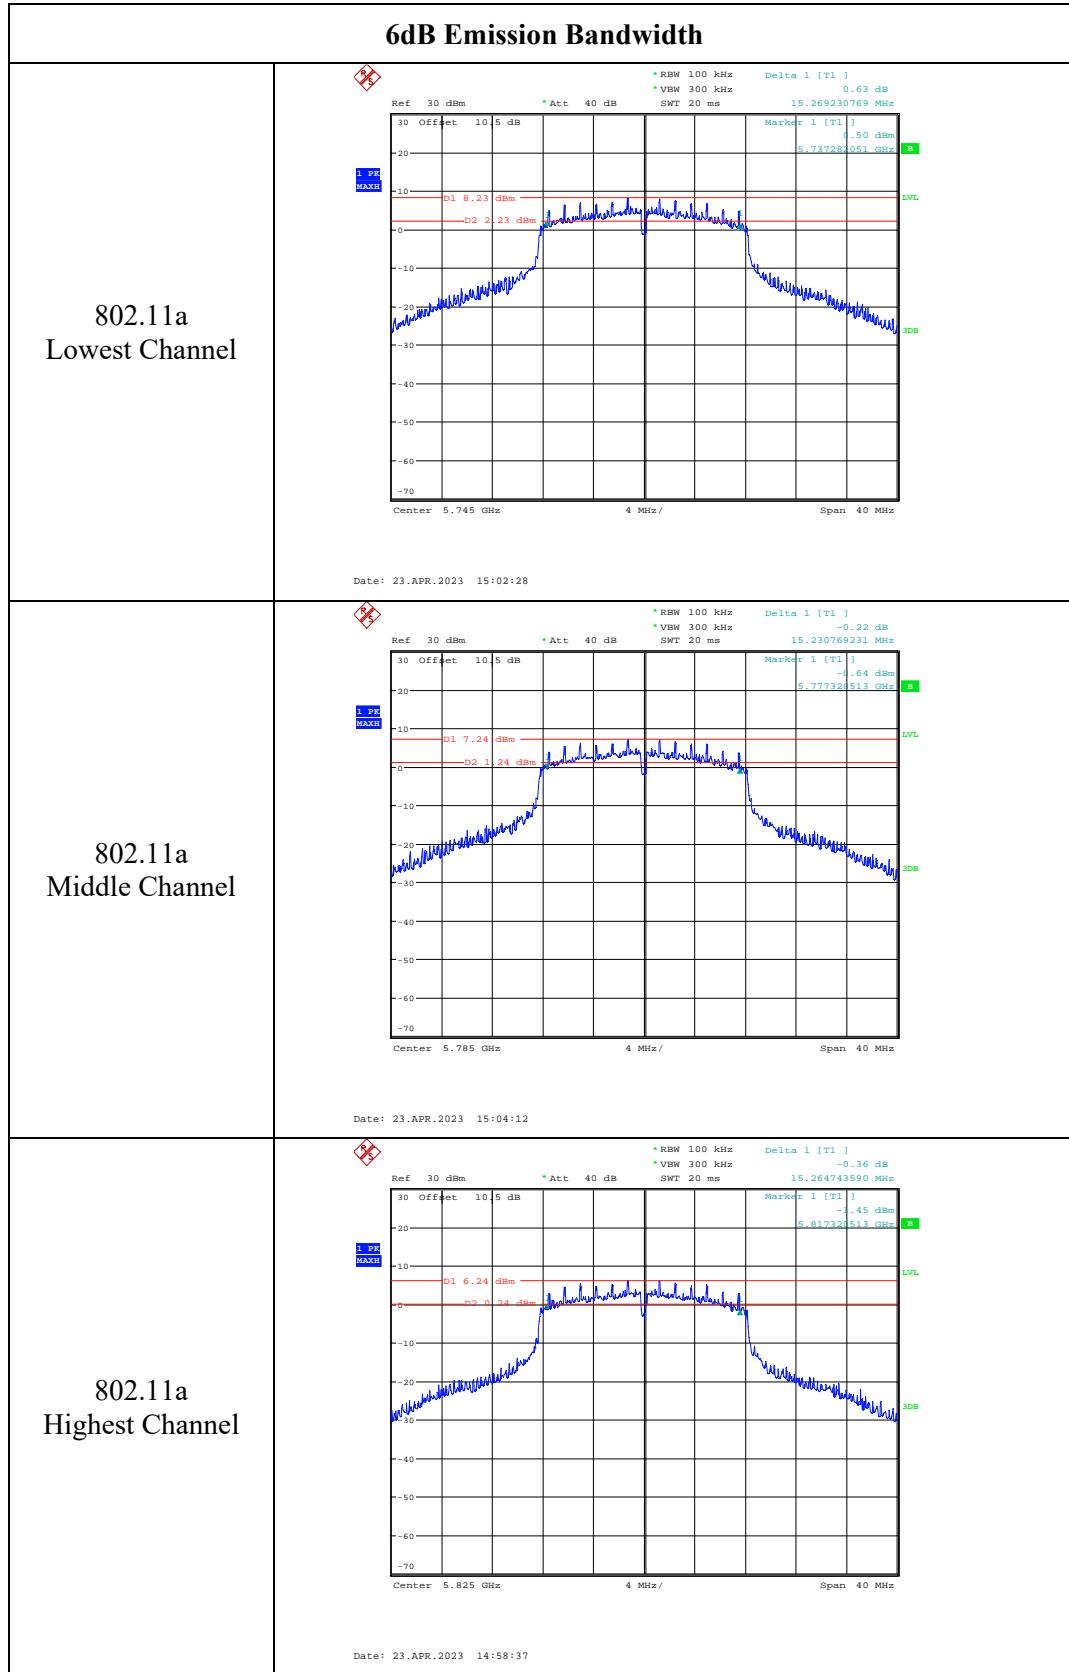
**5725-5850MHz:**

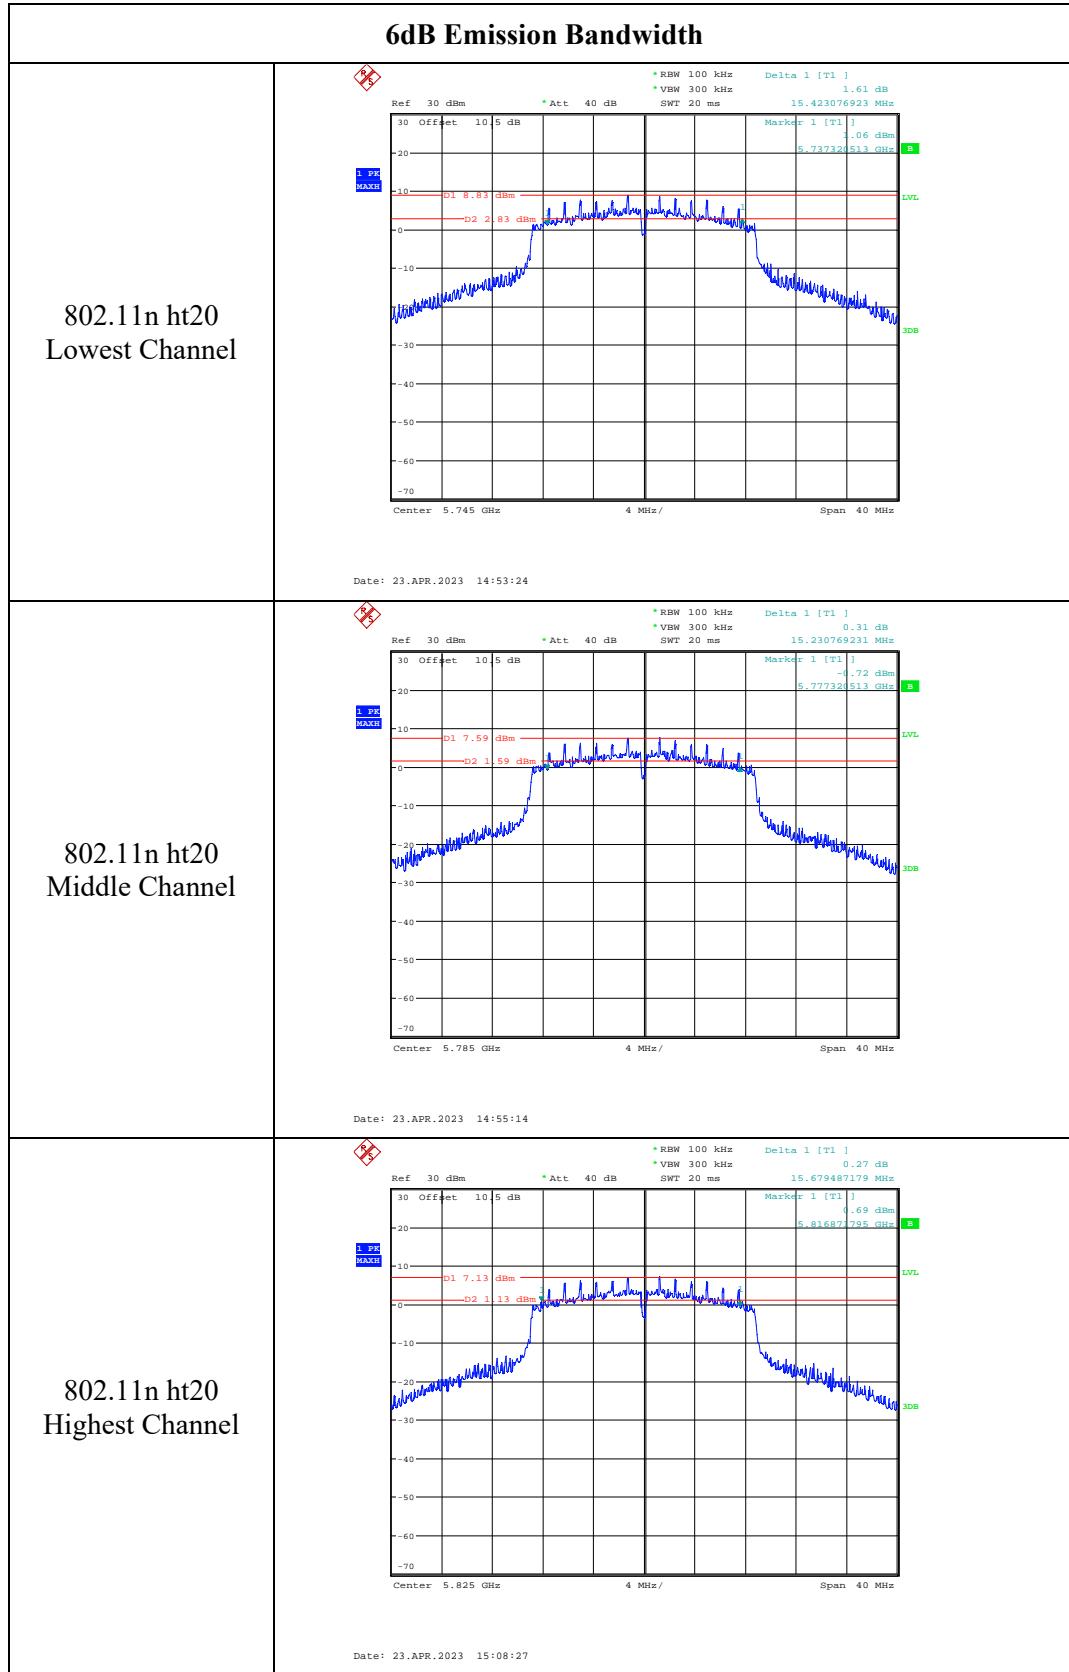


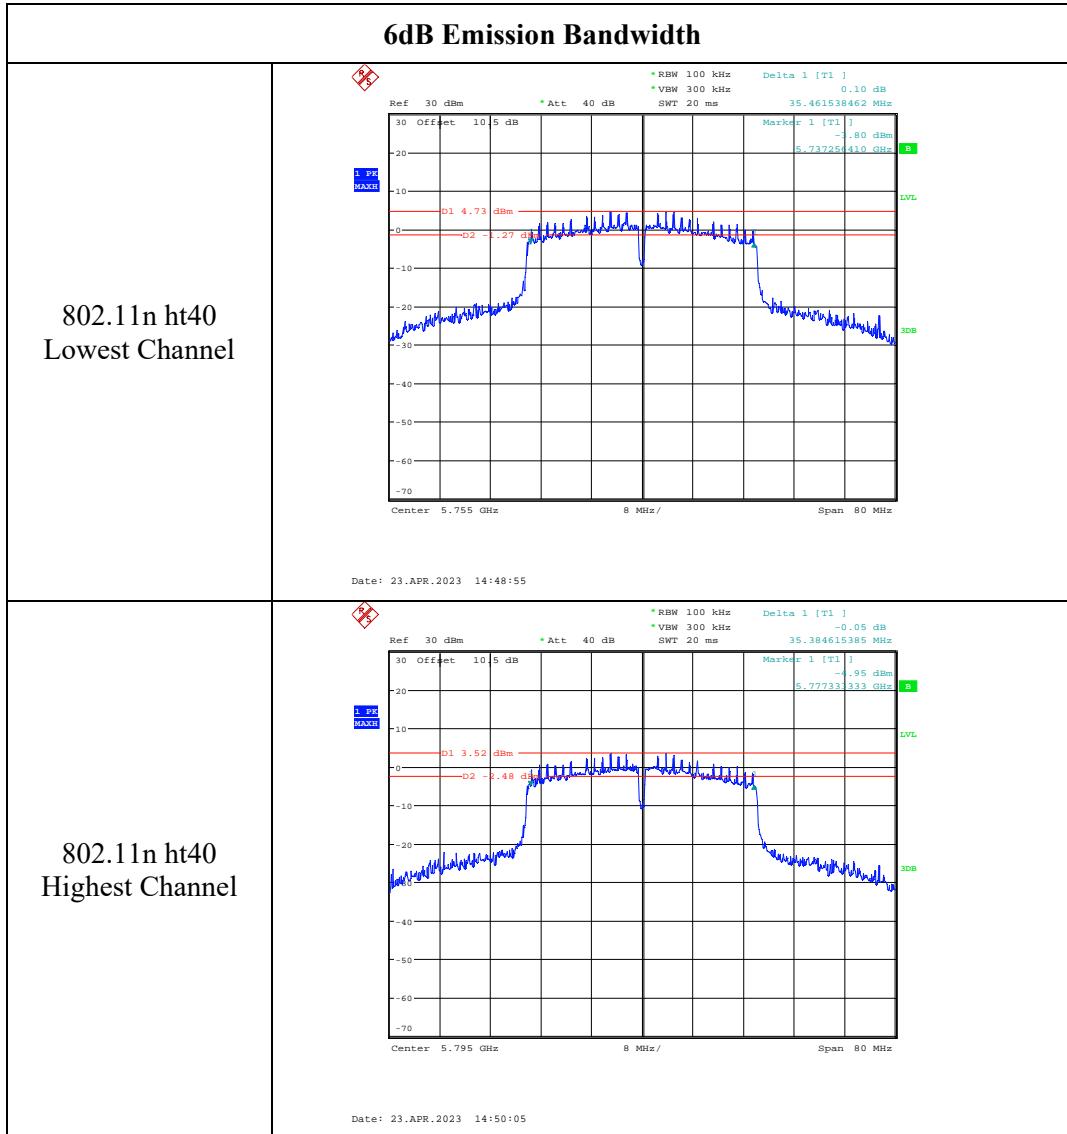


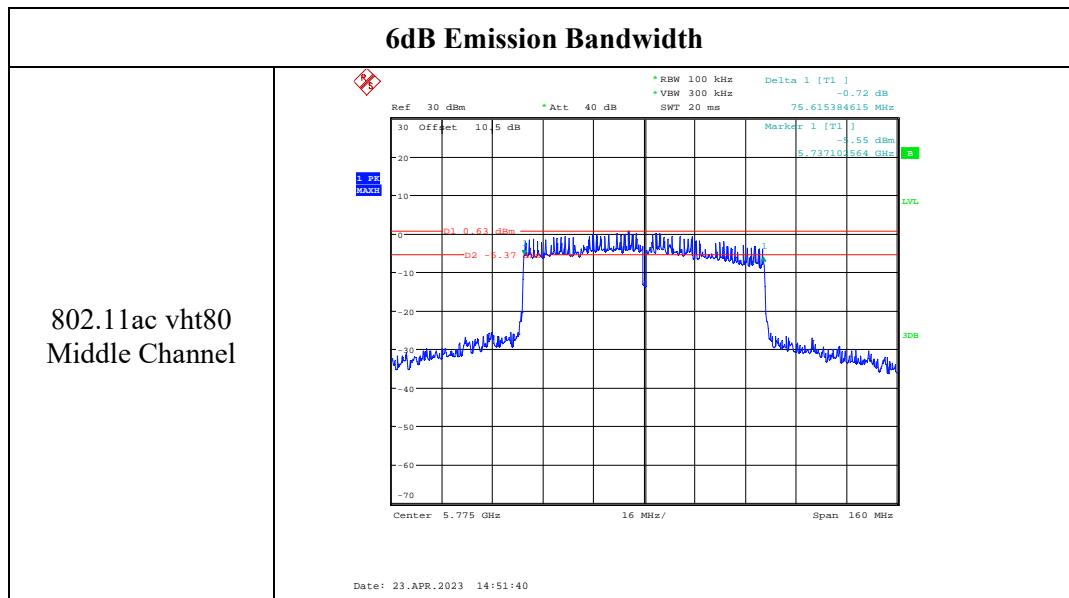

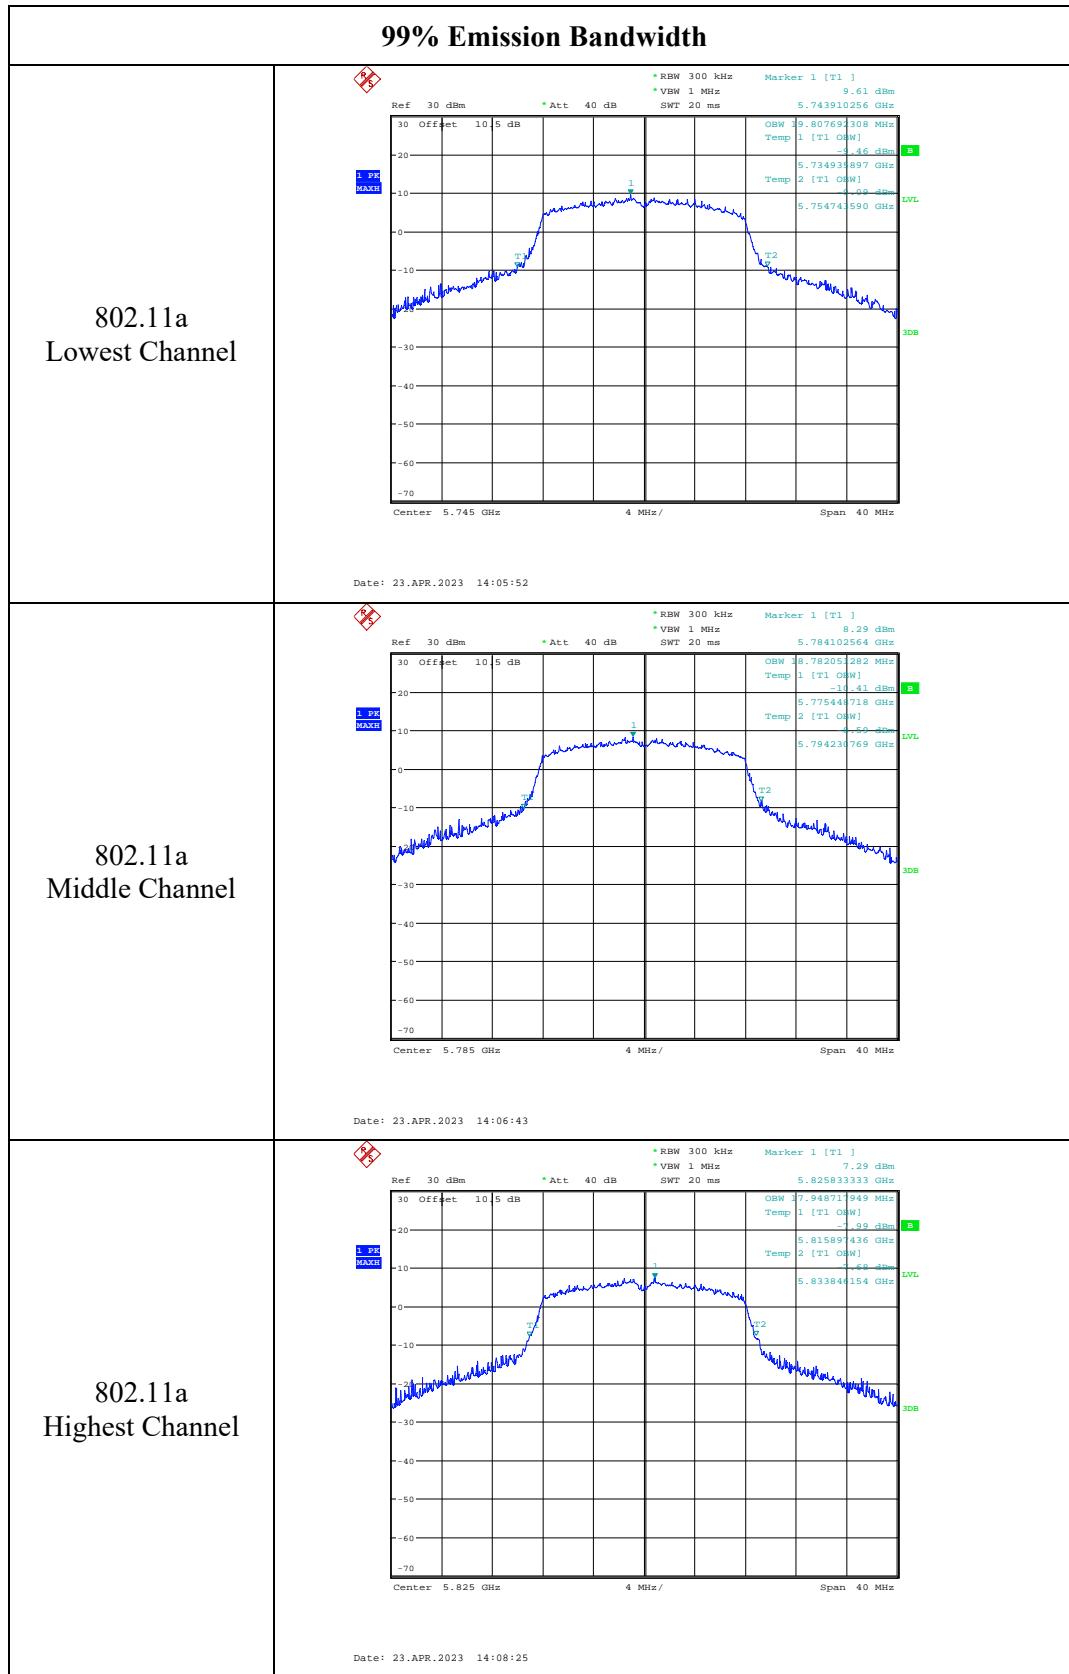

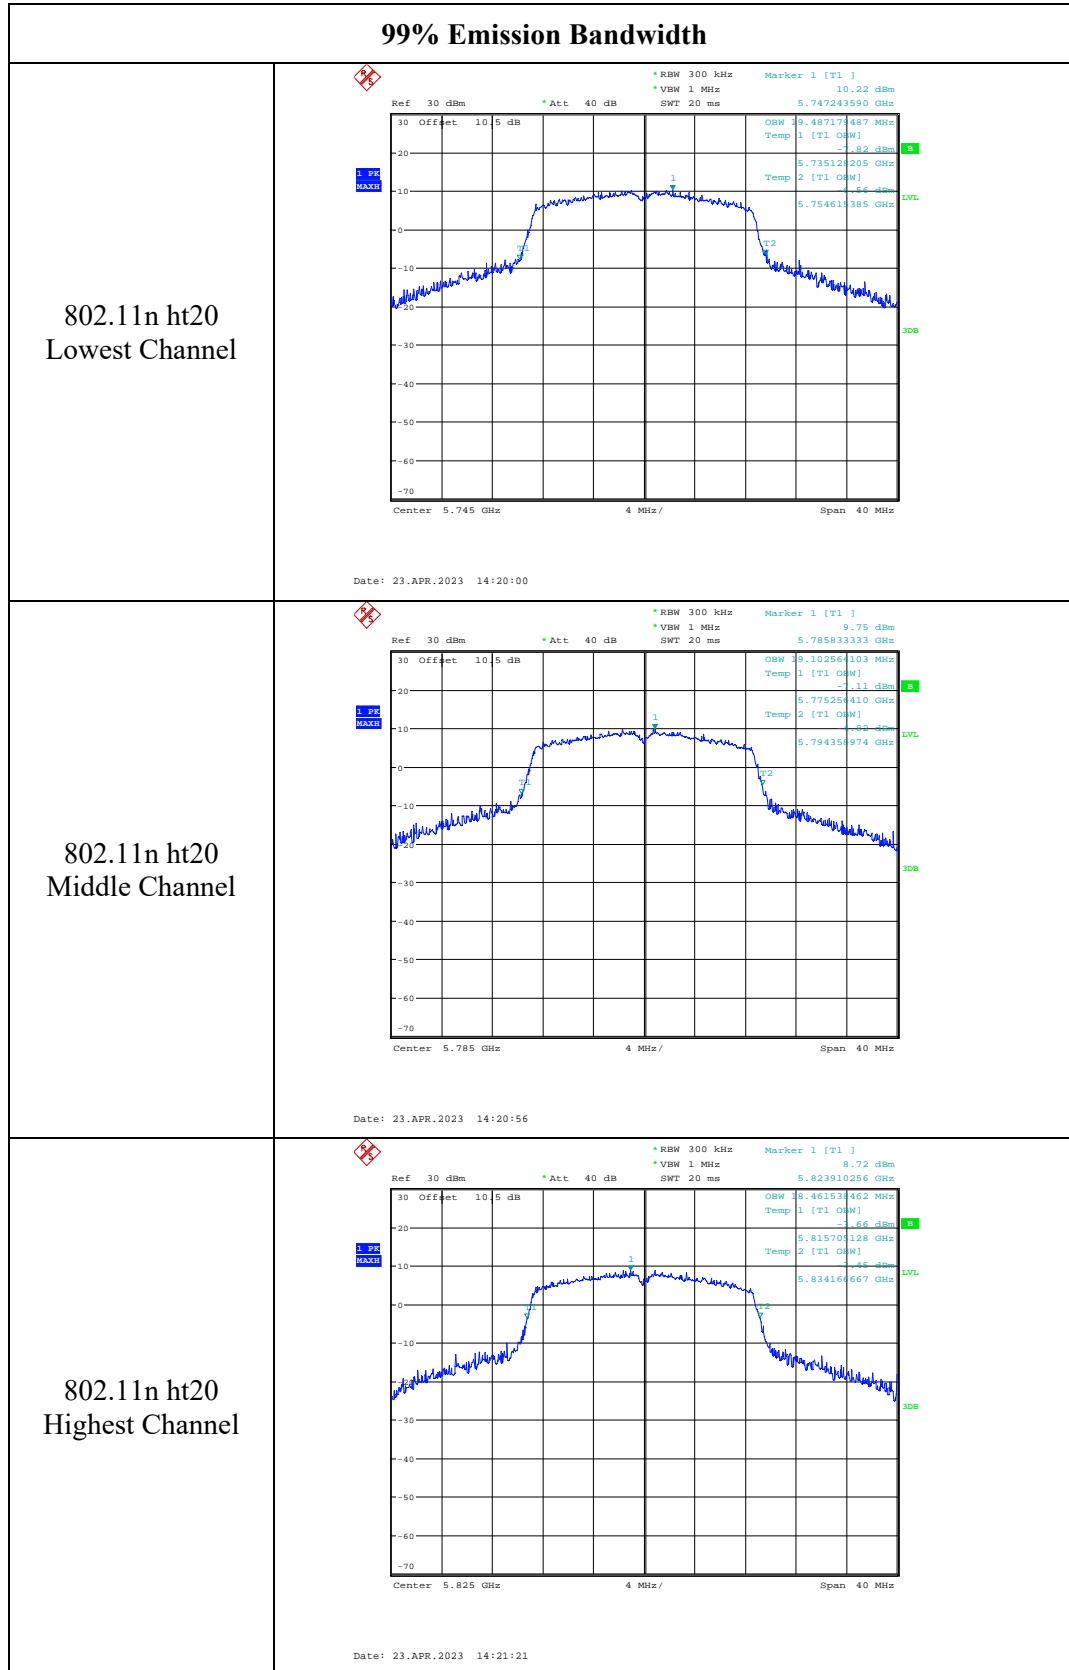

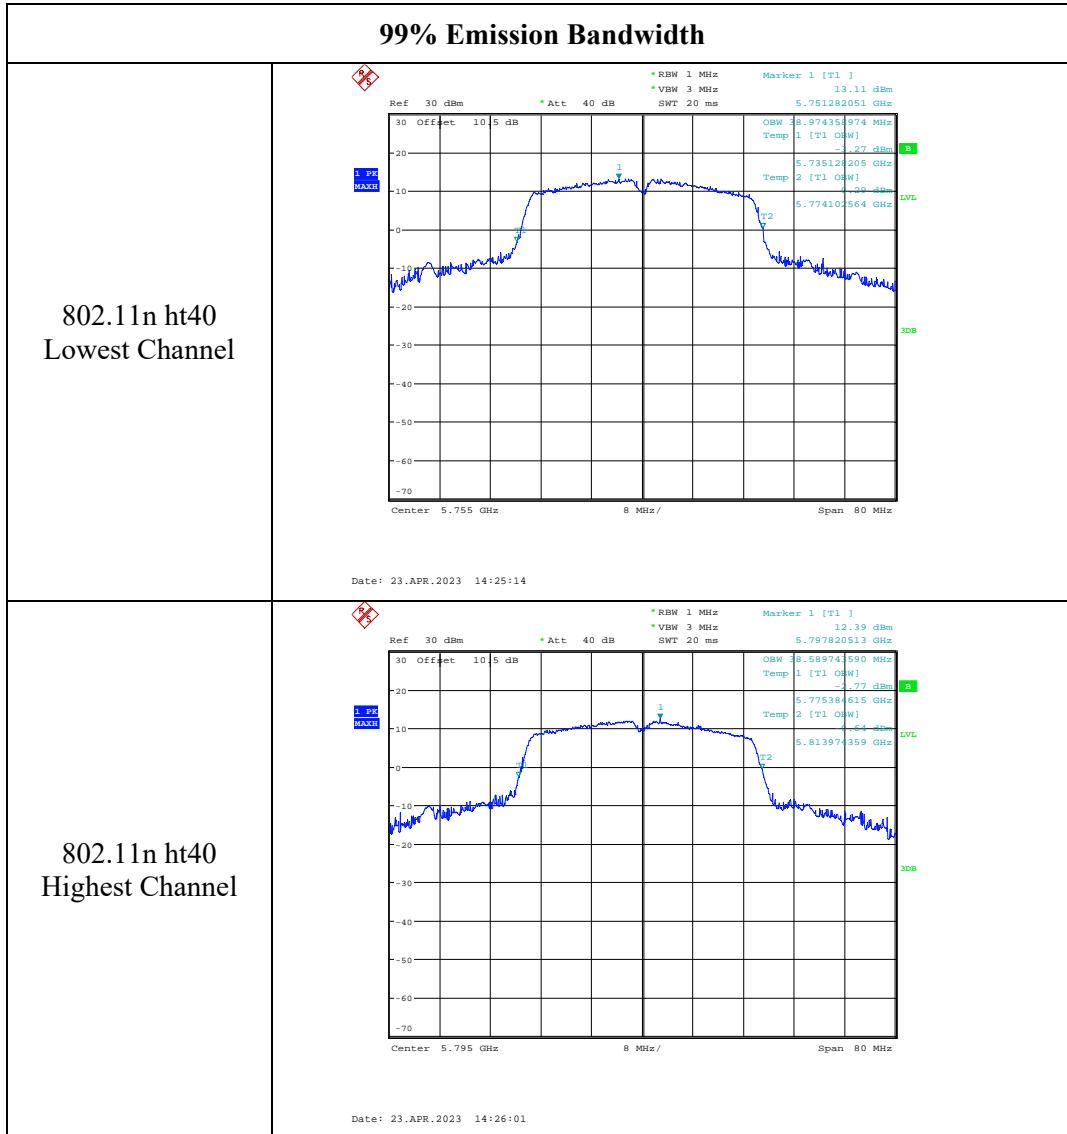

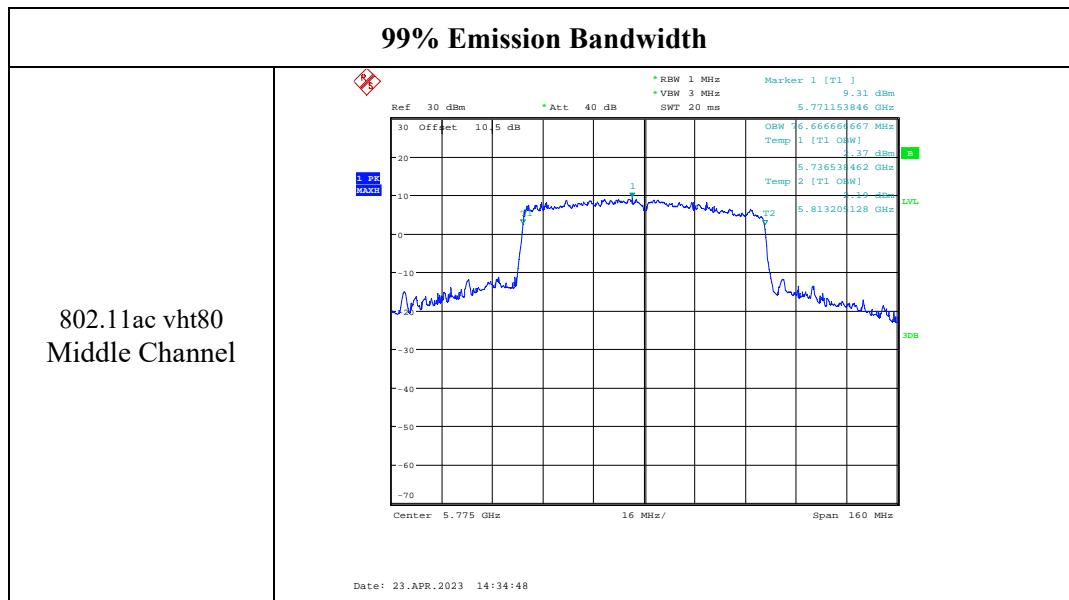

#### 4.4 Maximum Conducted Output Power:

Serial Number:	22Y5_1	Test Date:	2023/4/21~2023/4/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

<b>Environmental Conditions:</b>					
Temperature: (°C)	24.0~25.1	Relative Humidity: (%)	45~61	ATM Pressure: (kPa)	100.1~100.6

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2022/7/15	2023/7/14
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

##### 5150-5250 MHz:

##### 802.11a/n/ac modes:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5180	19.54	18.66	/	30
	5200	19.04	18.58	/	30
	5240	19.29	18.88	/	30
802.11n ht20	5180	15.33	15.21	18.28	30
	5200	15.42	15.29	18.37	30
	5240	15.53	15.32	18.44	30
802.11n ht40	5190	19.13	19.03	22.09	30
	5230	19.1	18.66	21.90	30
802.11ac vht80	5210	17.38	17.27	20.34	30

Note:

The device is an indoor AP. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

So:

Directional gain = 5.07dBi

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5745	18.16	17.56	/	30
	5785	17.32	16.23	/	30
	5825	16.54	15.17	/	30
802.11n ht20	5745	17.65	16.68	17.65	30
	5785	16.85	16.02	19.47	30
	5825	15.99	16.25	19.13	30
802.11n ht40	5755	17.21	15.67	19.52	30
	5795	16.3	15.21	18.80	30
802.11ac vht80	5775	16.48	14.38	18.57	30

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

So:

Directional gain = 5.37 dBi

#### 4.5 Maximum power spectral density:

Serial Number:	22Y5_1	Test Date:	2023/4/21~2023/4/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

<b>Environmental Conditions:</b>					
Temperature: (°C)	24.0~25.1	Relative Humidity: (%)	45~61	ATM Pressure: (kPa)	100.1~100.6

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2023-03-31	2024-03-30
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**5150-5250 MHz:**

Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)		Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
		Chain 0	Chain 1		Result	Limit
802.11a	5180	8.82	8.6	0.15	8.97	17
	5200	8.4	8.5	0.15	8.65	17
	5240	8.63	8.61	0.15	8.78	17
802.11n ht20	5180	5.3	5.14	0.33	8.56	14.93
	5200	5.19	5.03	0.33	8.45	14.93
	5240	5.26	5.12	0.33	8.53	14.93
802.11n ht40	5190	5.16	5.29	0.34	8.58	14.93
	5230	5.32	4.67	0.34	8.36	14.93
802.11ac vht80	5210	-1.33	-1.51	3.05	4.64	14.93

Note:

The device is an indoor AP.

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 5.07 + 10 * \log(2/1) = 8.07 \text{ dBi}$$

**Duty cycle <98%, duty cycle variations are less than ±2%**

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 was used.

The maximum Power Spectral Density was calculated the result of the maximum chain for SISO mode, and Total chains for MIMO mode.

**5725-5850 MHz:**

Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)		Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/500kHz)	
		Chain 0	Chain 1		Result	Limit
802.11a	5745	2.74	3.11	0.15	3.26	30.00
	5785	1.55	2.9	0.15	3.05	30.00
	5825	0.91	2.62	0.15	2.77	30.00
802.11n ht20	5745	4.14	3.29	0.33	7.08	27.63
	5785	3.32	3.24	0.33	6.62	27.63
	5825	2.35	2.94	0.33	6.00	27.63
802.11n ht40	5755	0.78	0.09	0.34	3.80	27.63
	5795	-0.47	-0.29	0.34	2.97	27.63
802.11ac vht80	5775	-4.92	-5.65	3.05	0.79	27.63

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 5.37 + 10 * \log(2/1) = 8.37 \text{ dBi}$$

If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement


**Duty cycle <98%, duty cycle variations are less than ±2%**


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 was used.


The maximum Power Spectral Density was calculated the result of the maximum chain for SISO mode, and Total chains for MIMO mode.


**5150-5250MHz:**

Chain0:

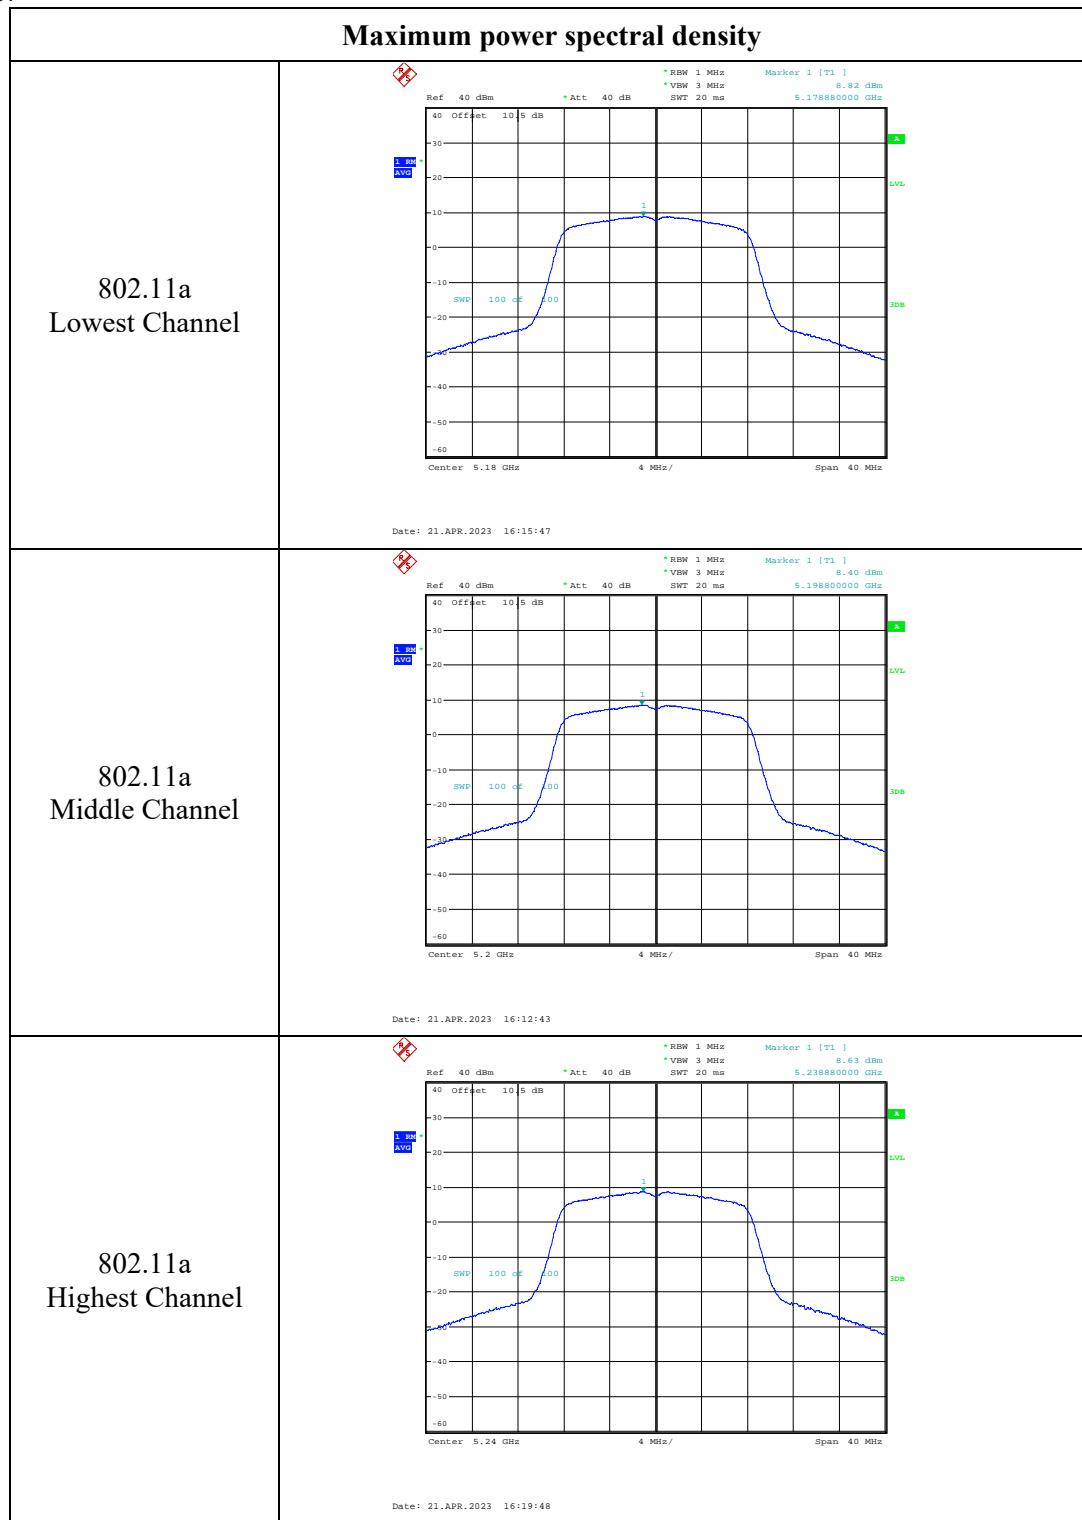


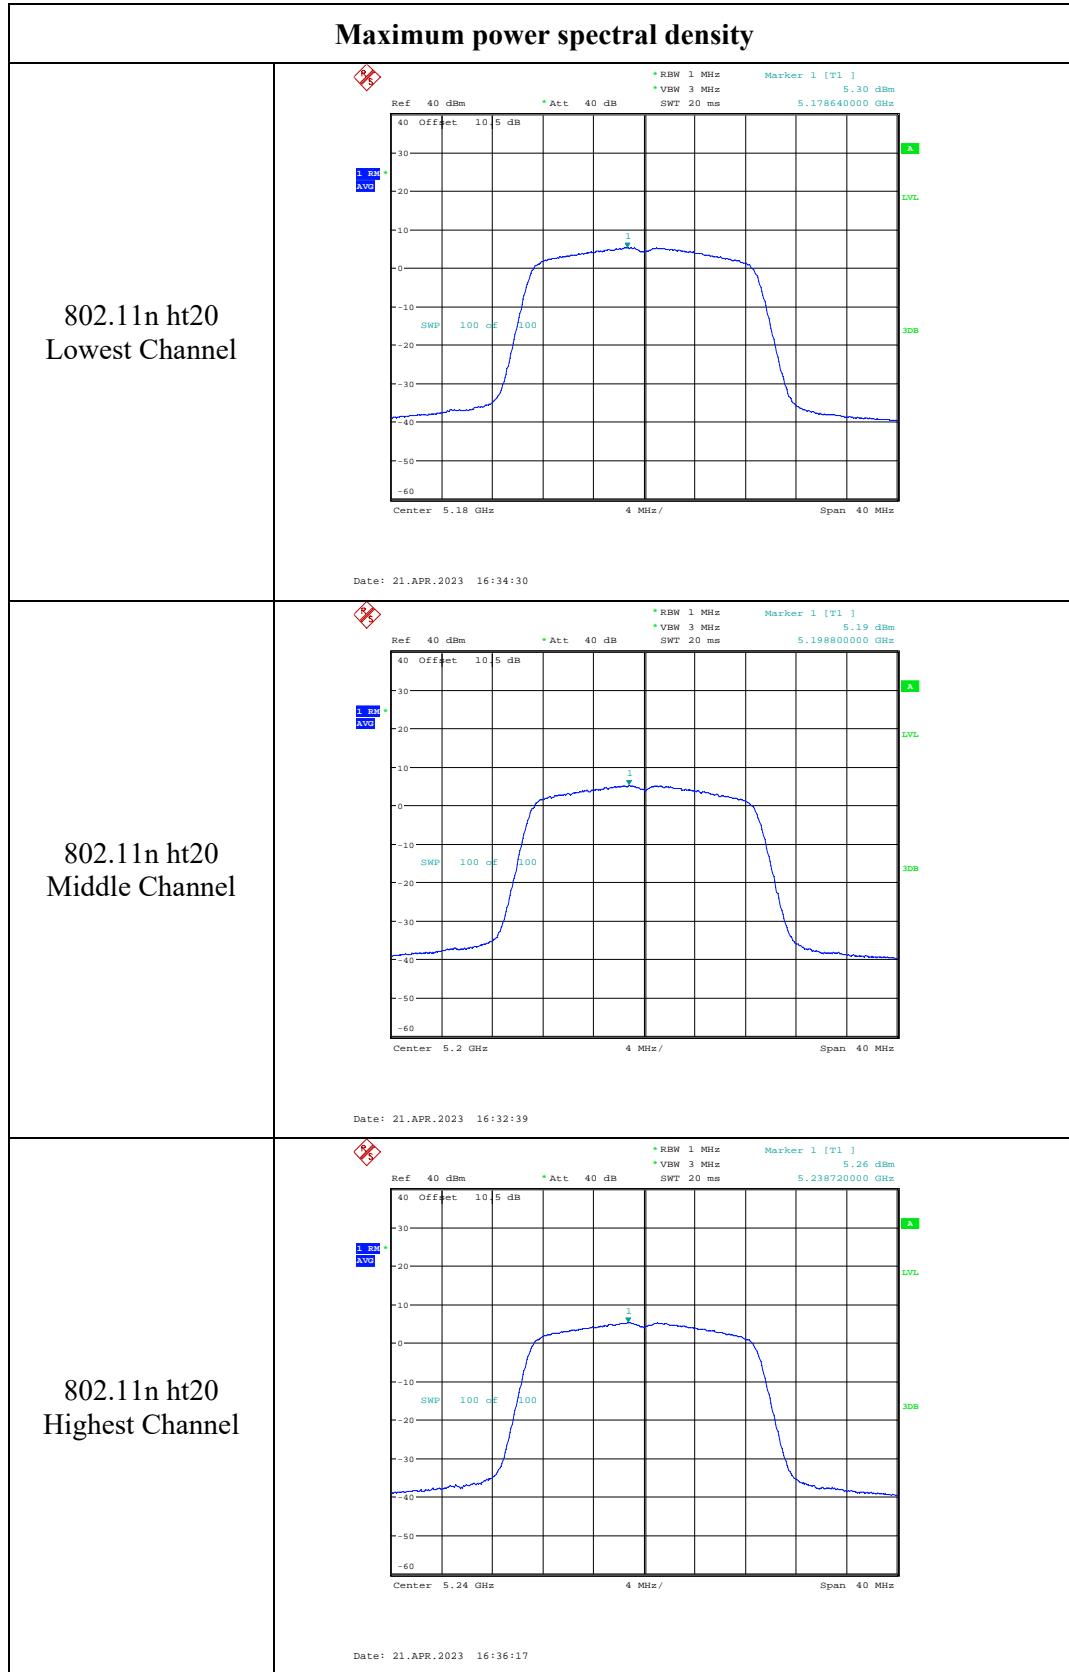


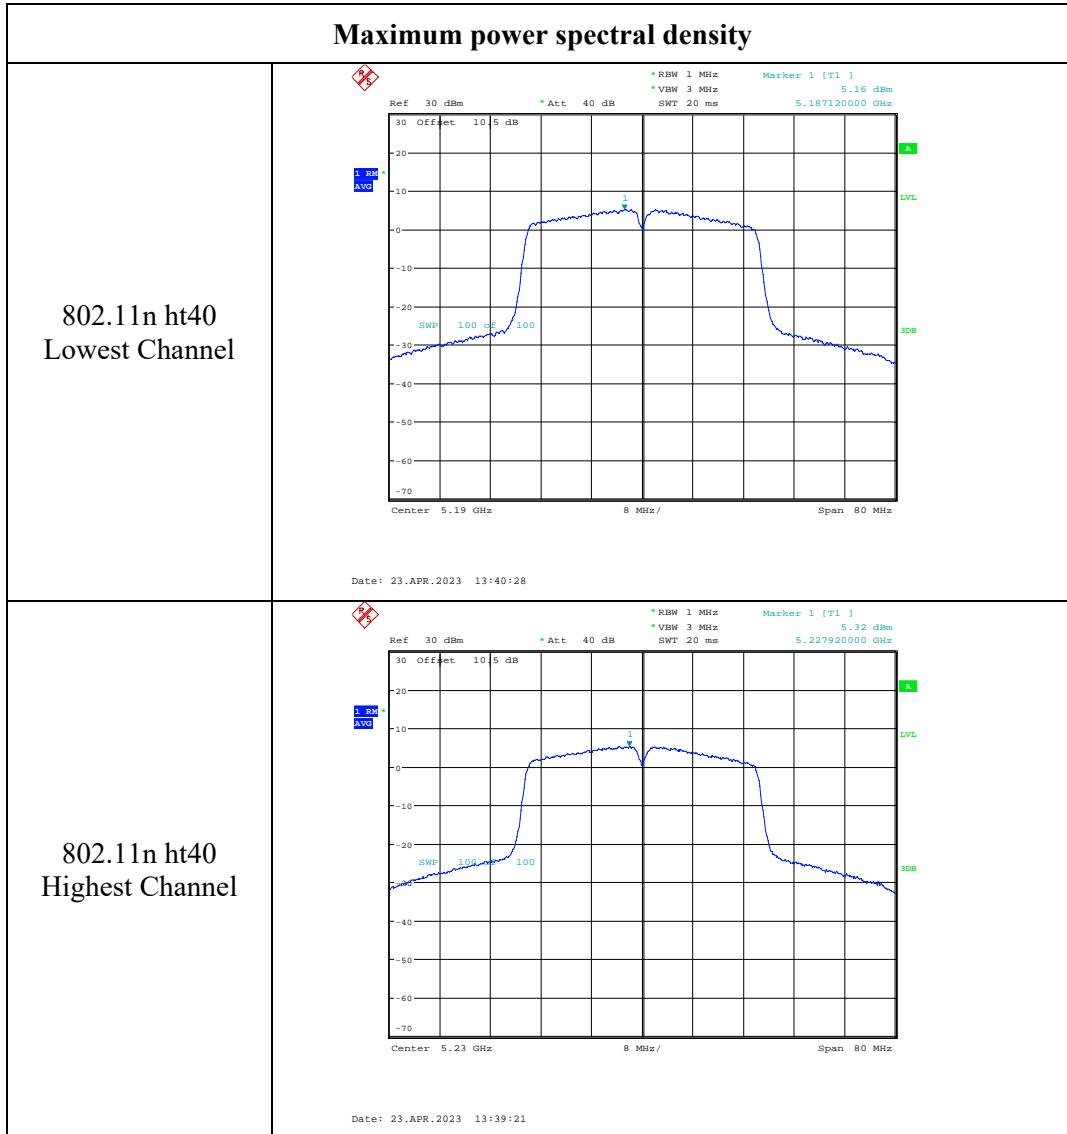


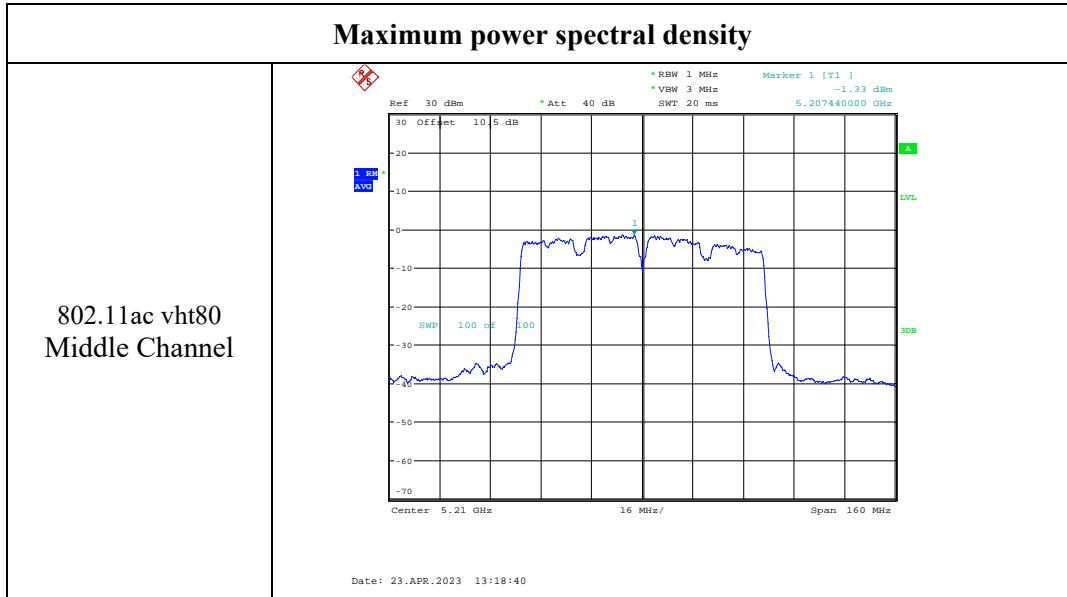


Chain1:

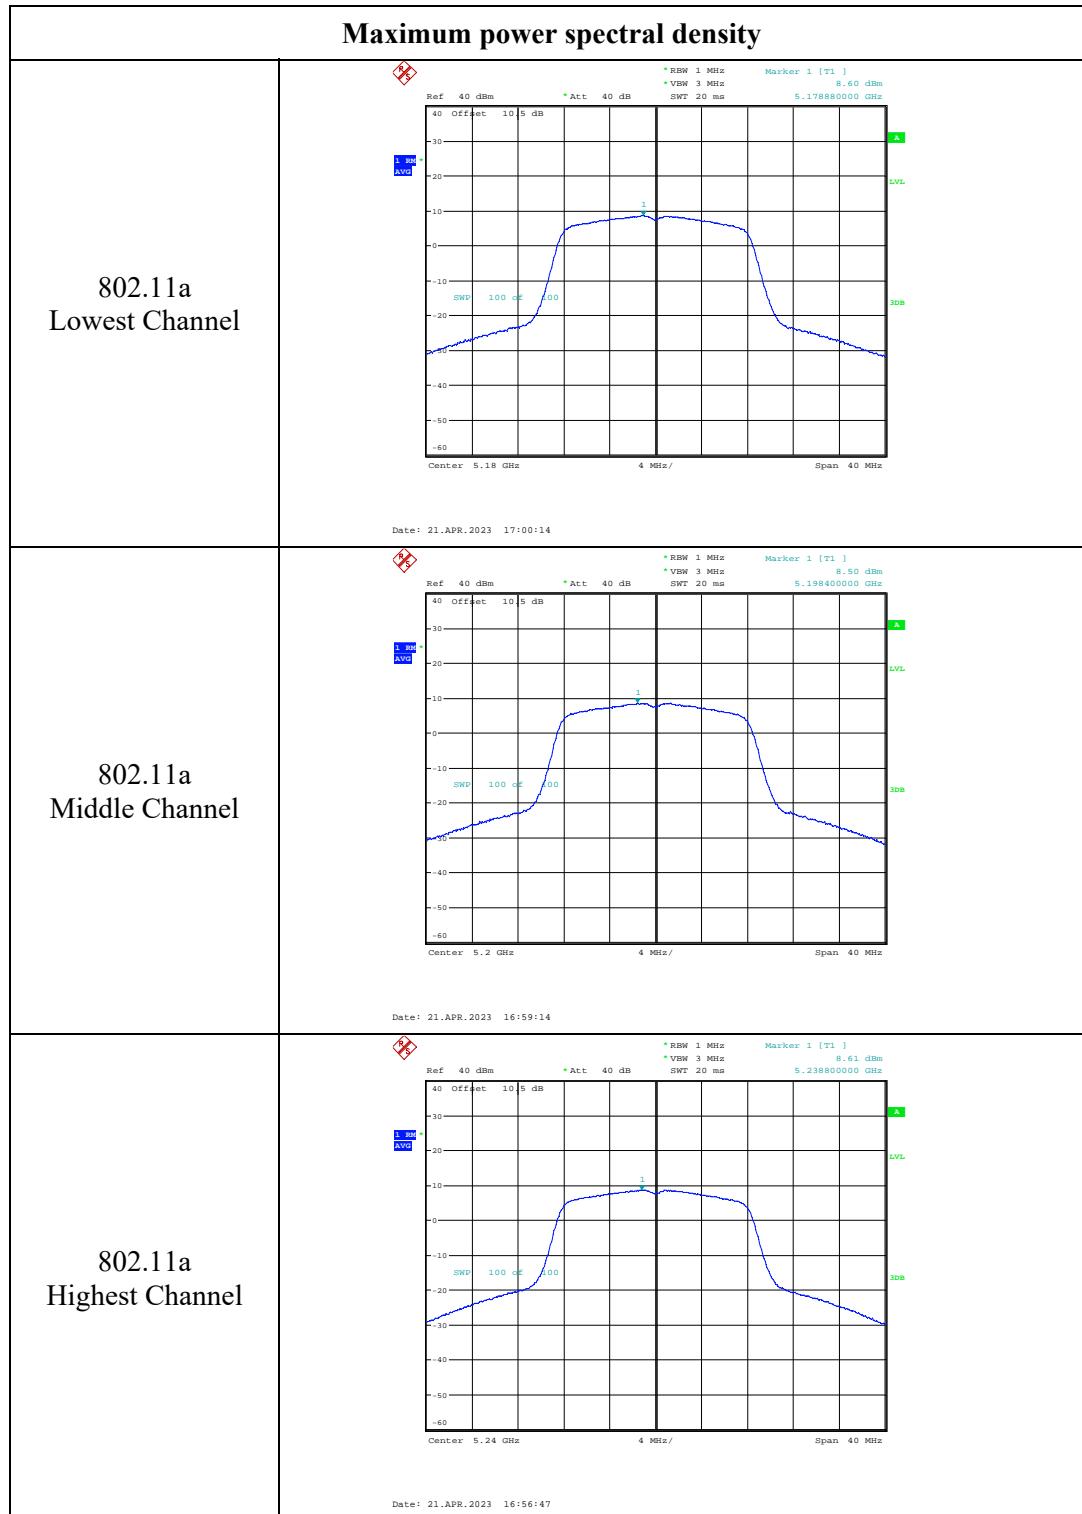

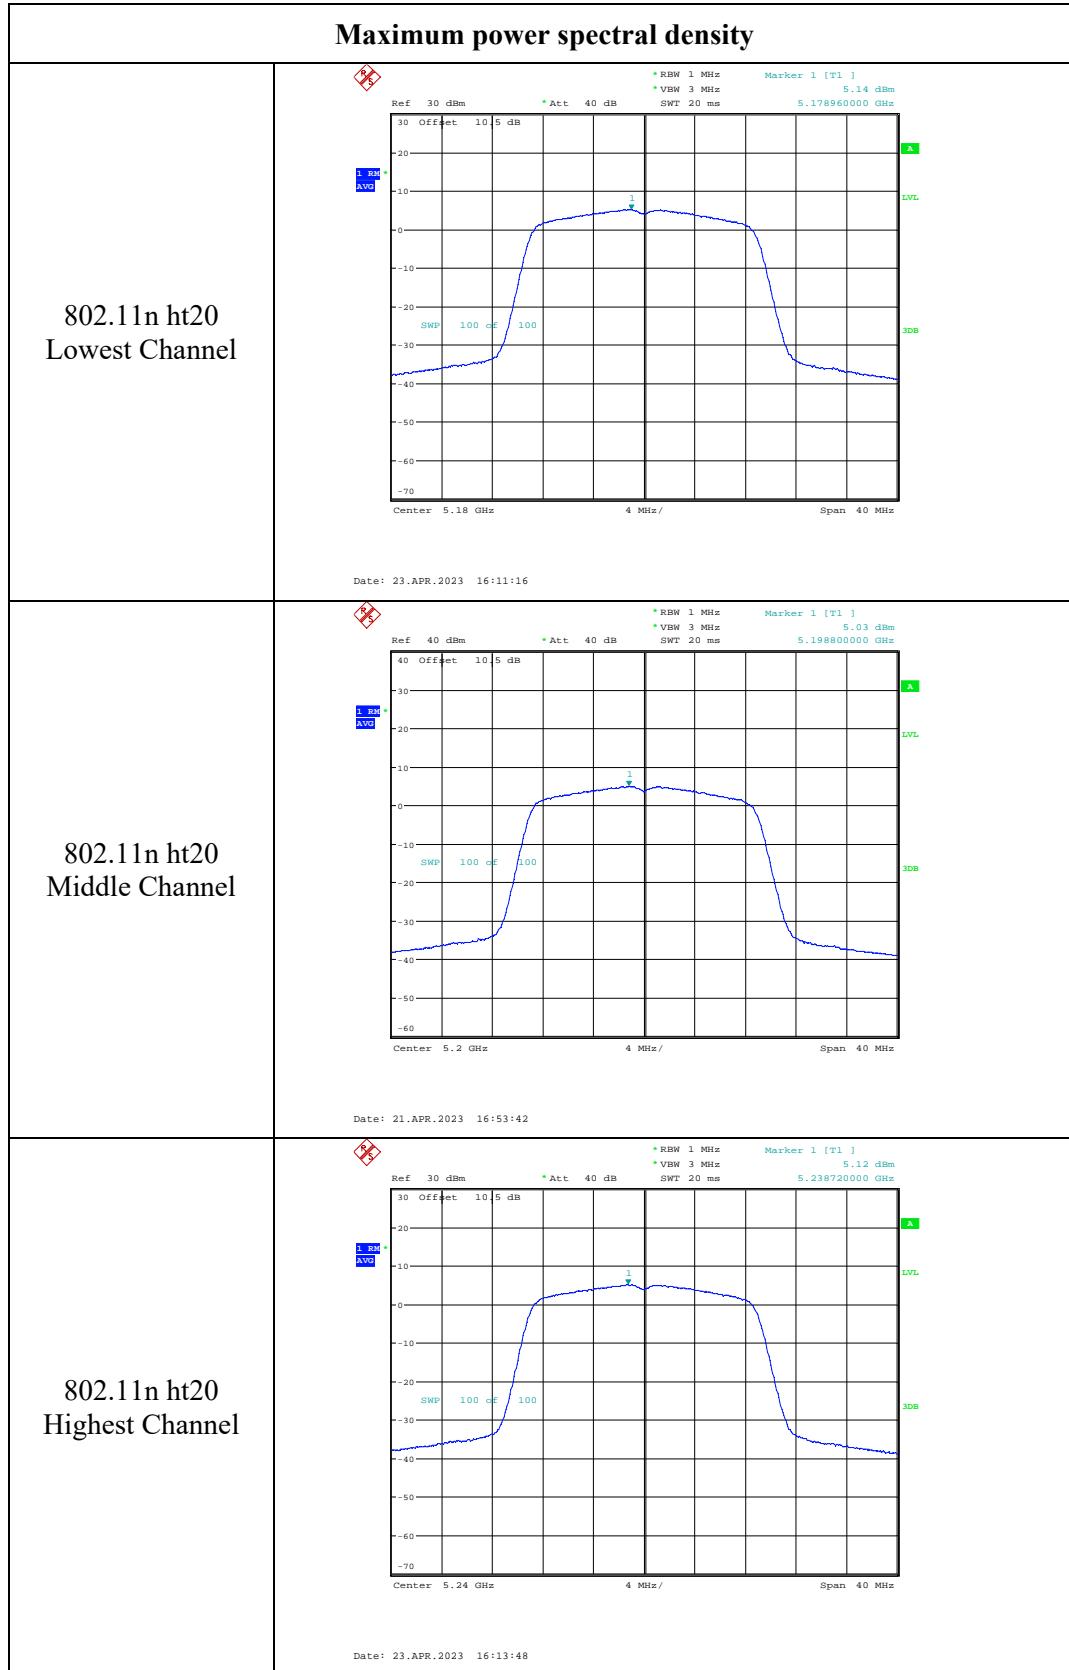


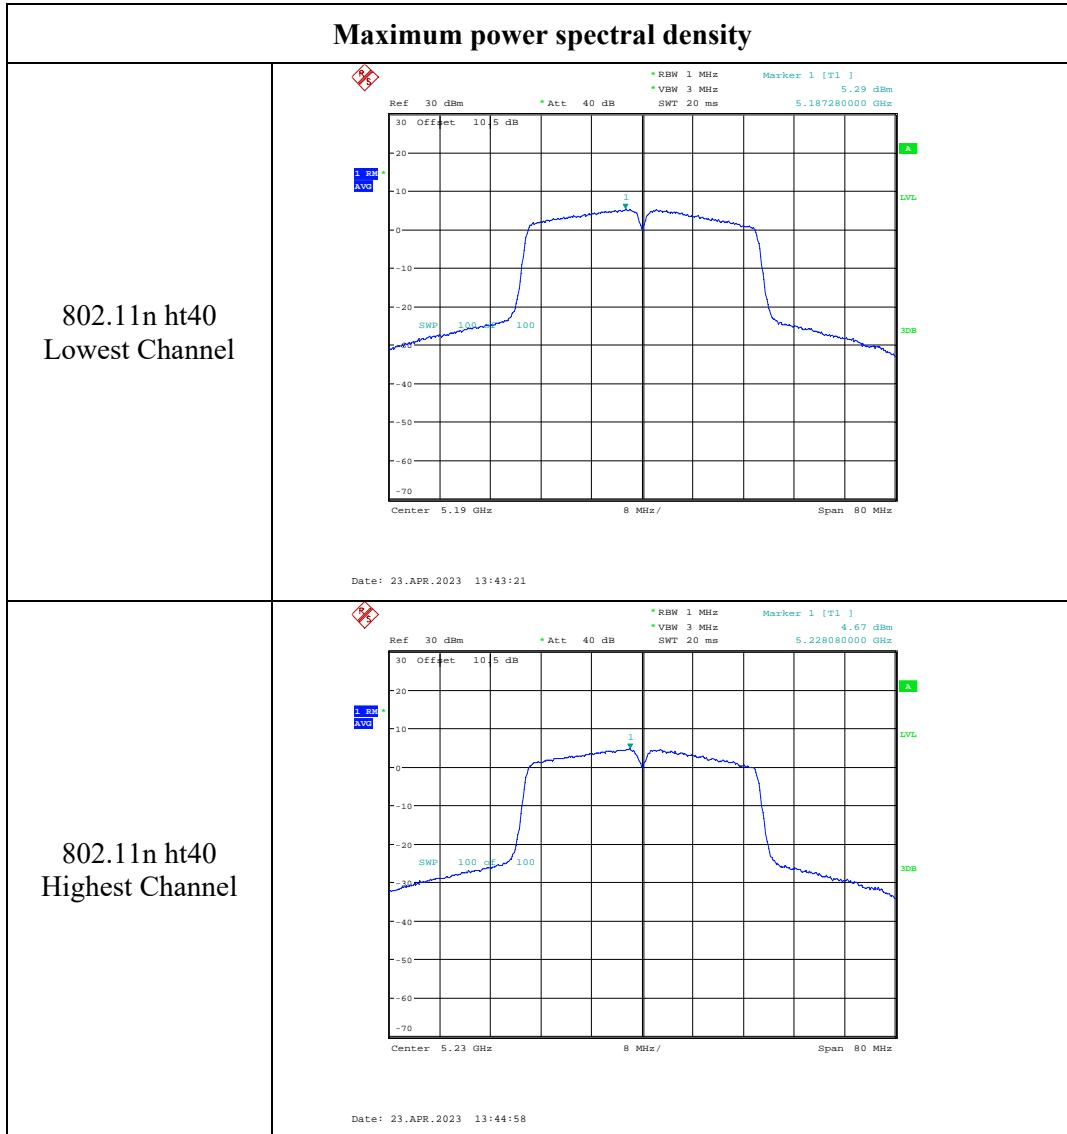


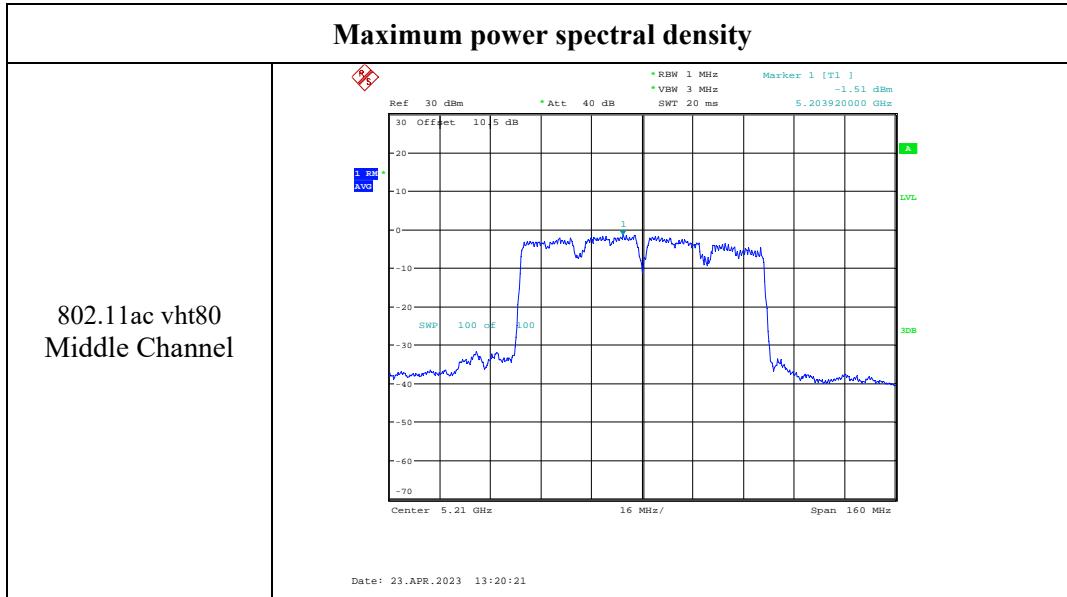



5725-5850MHz


Chain0:

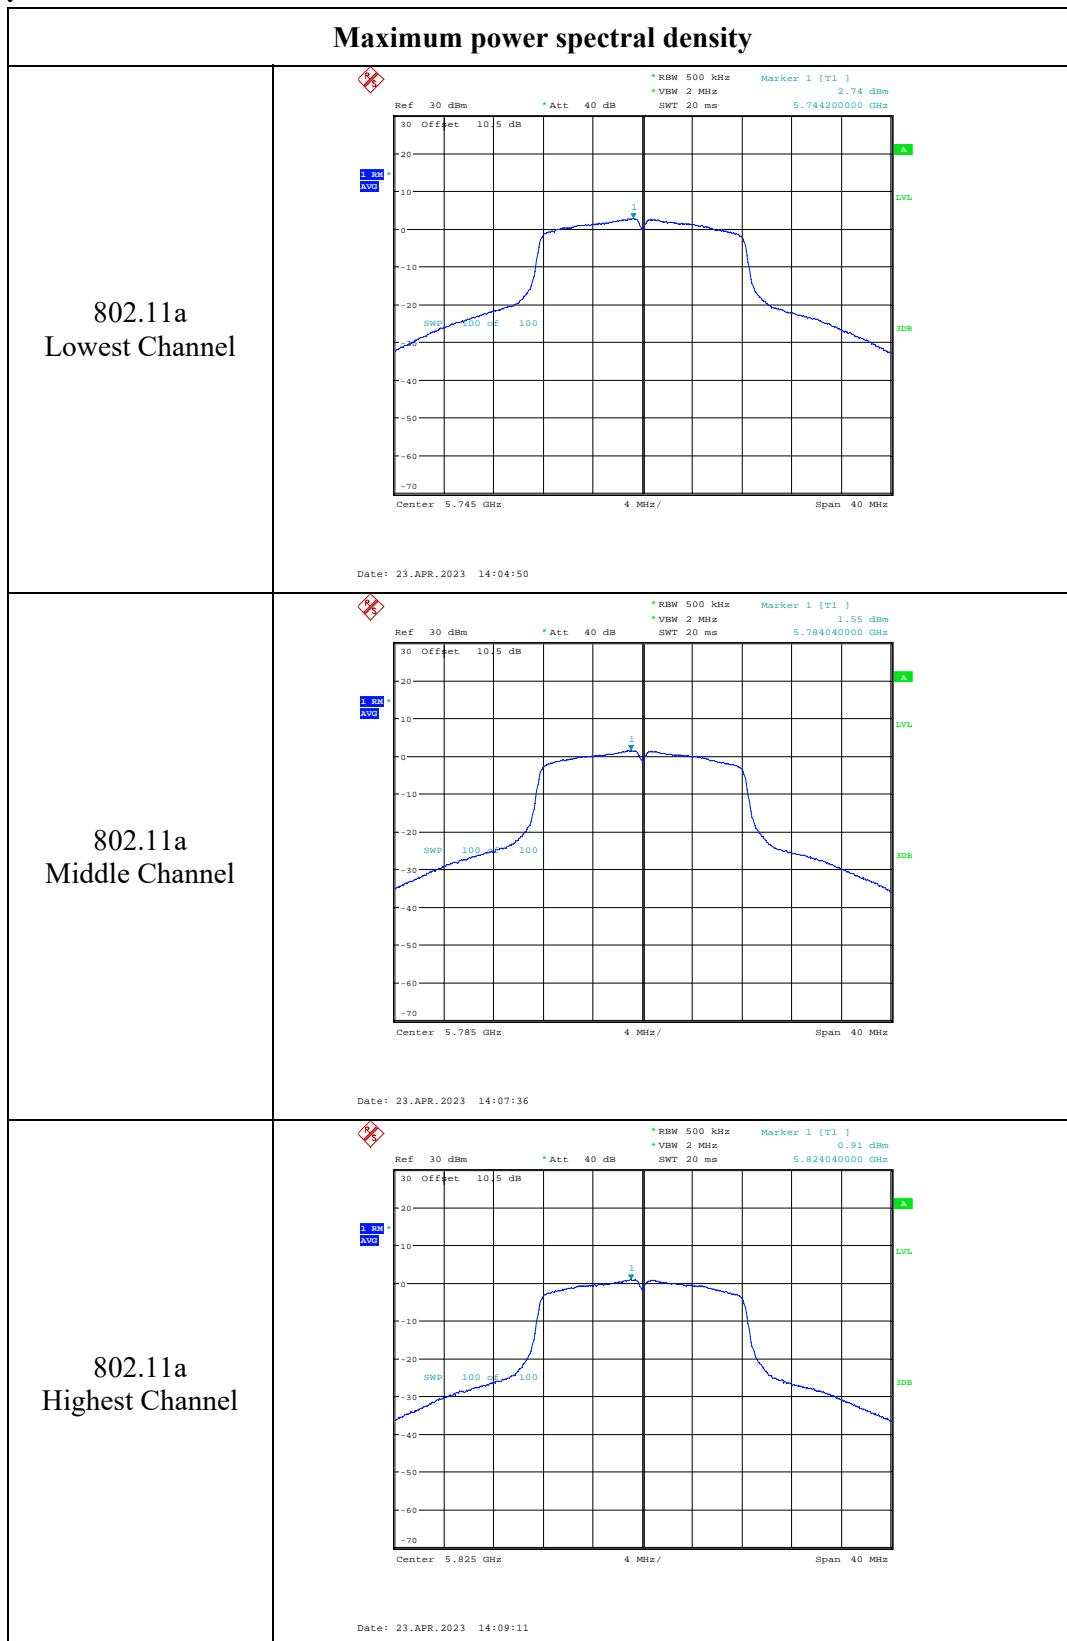


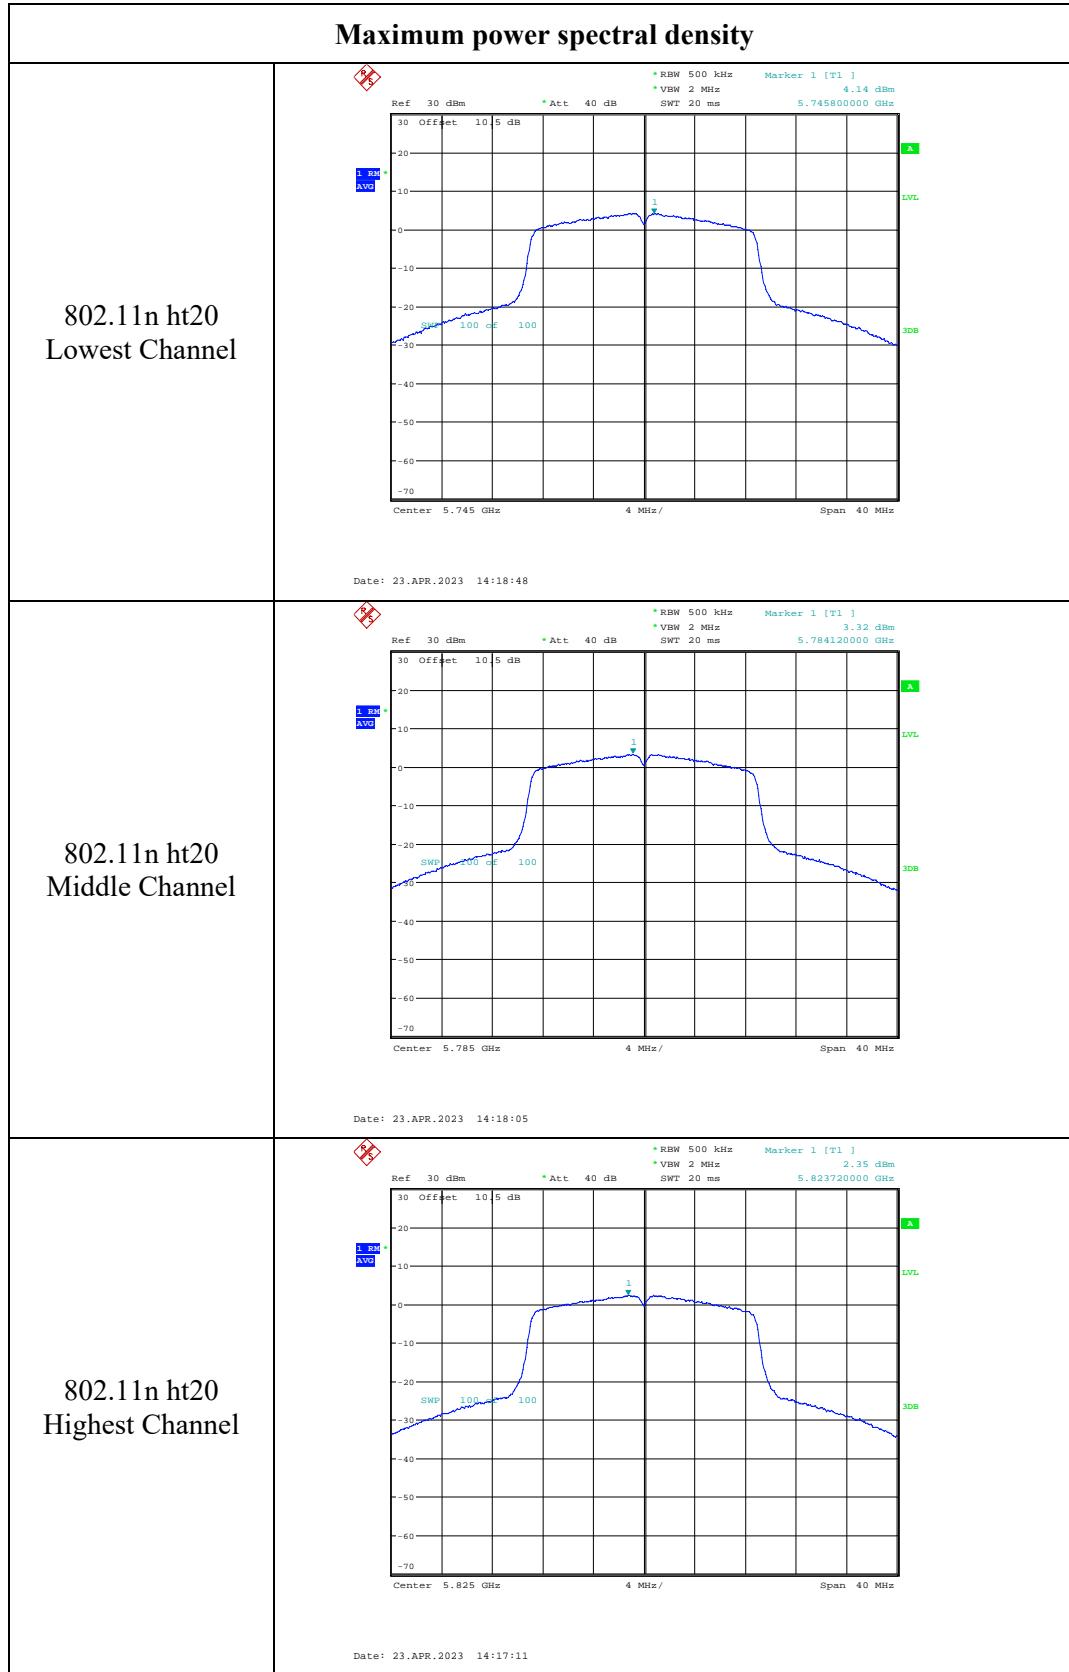


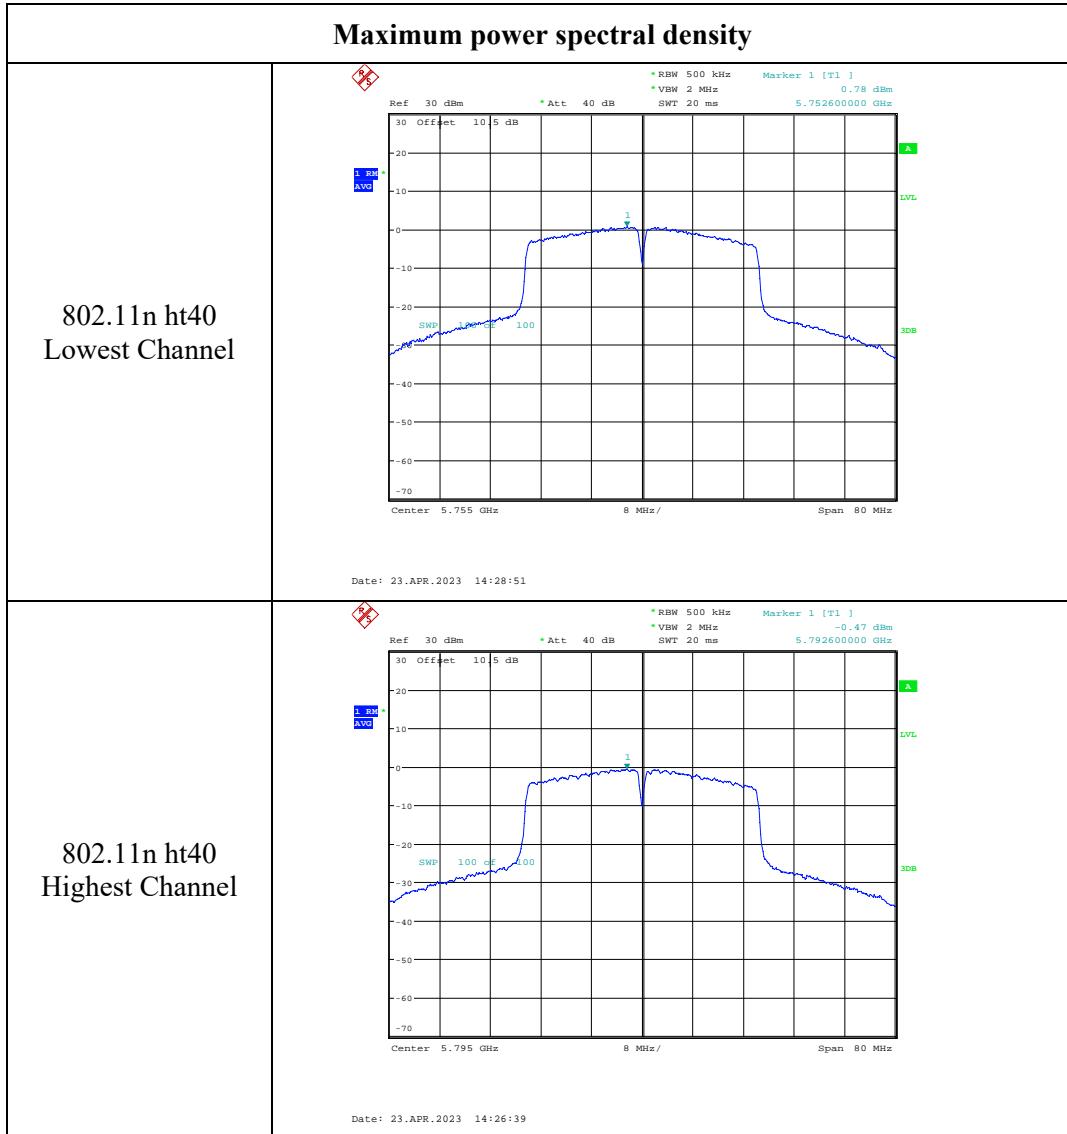


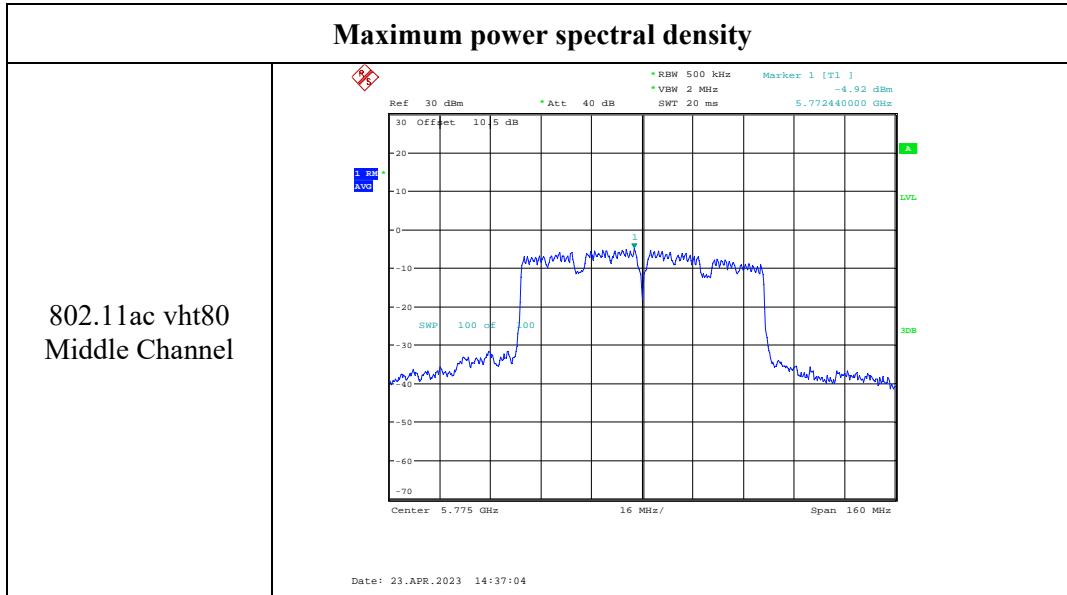

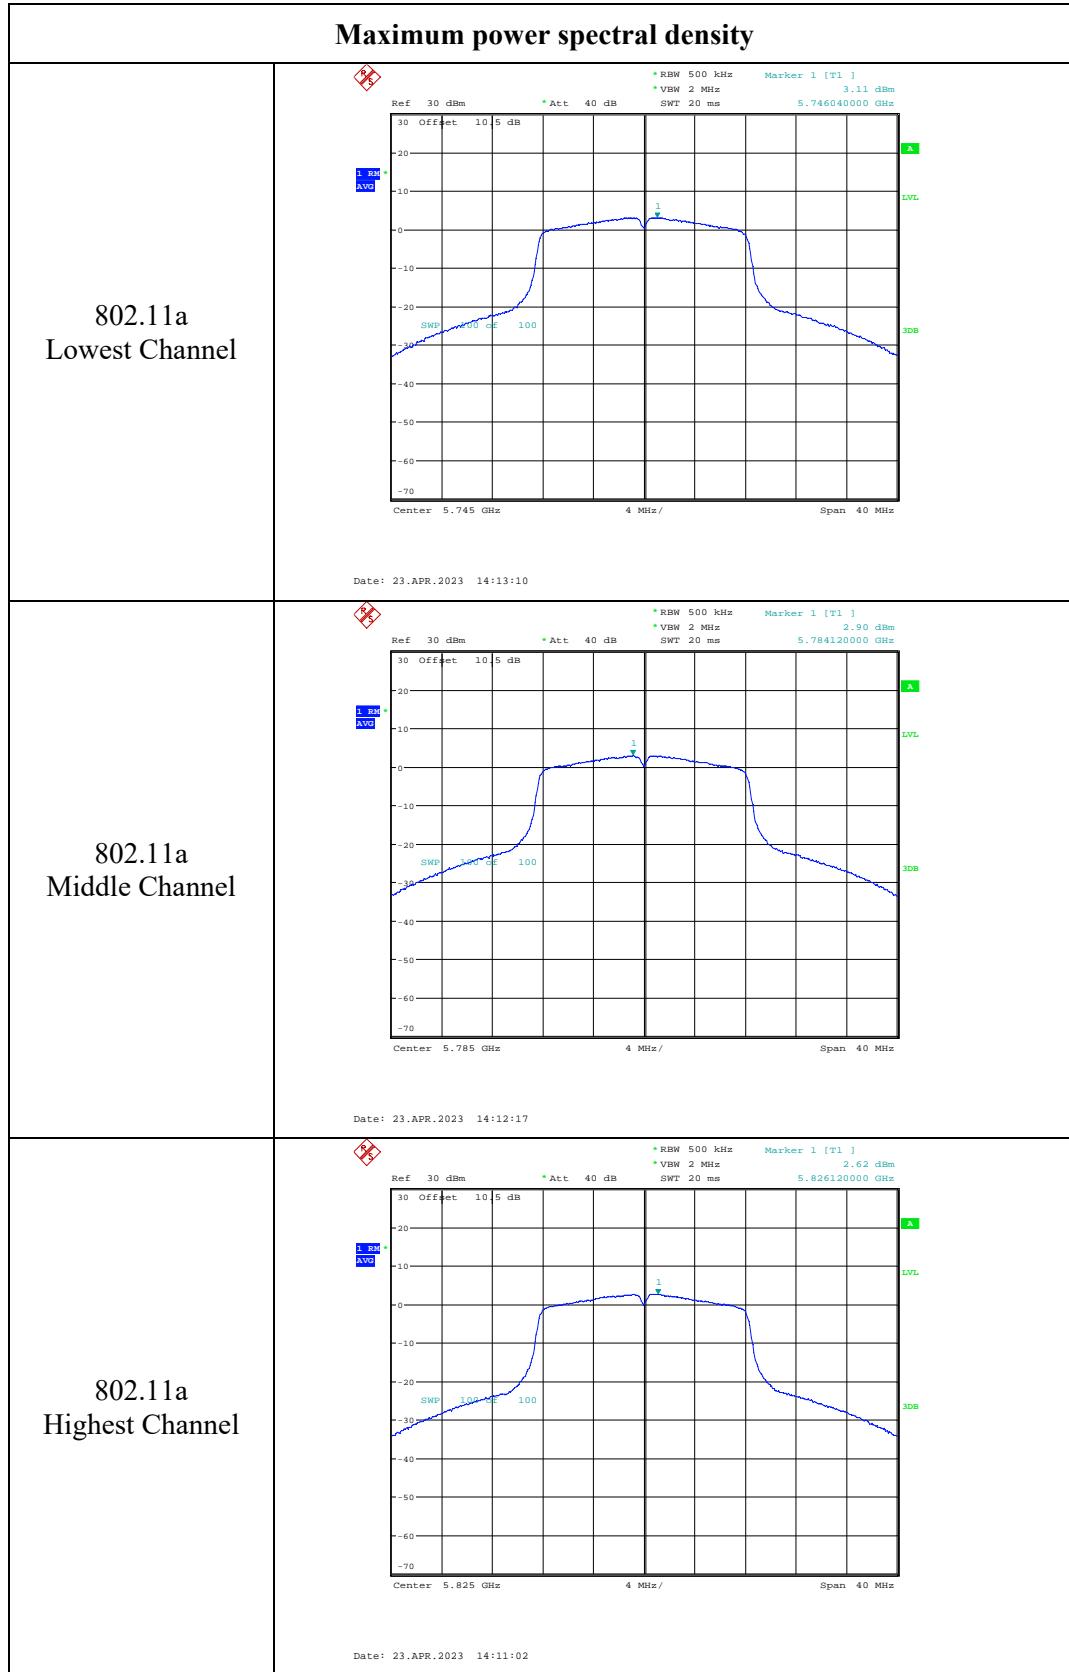**Chain1:**

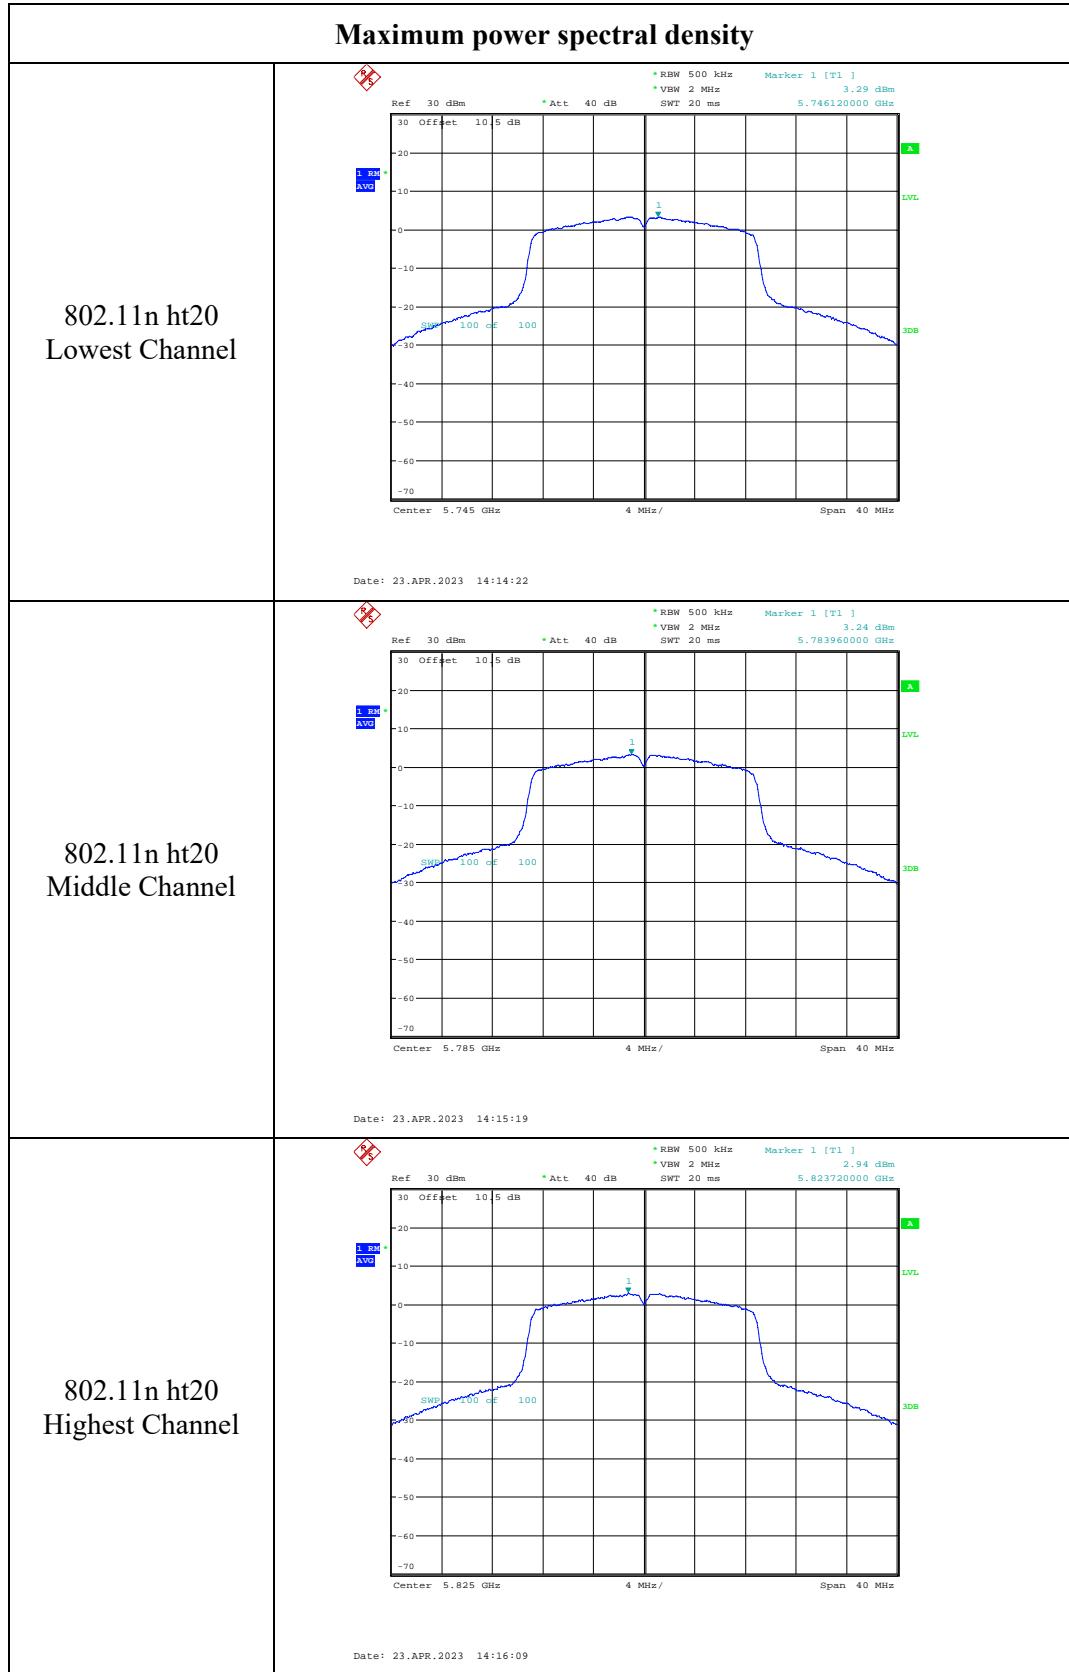

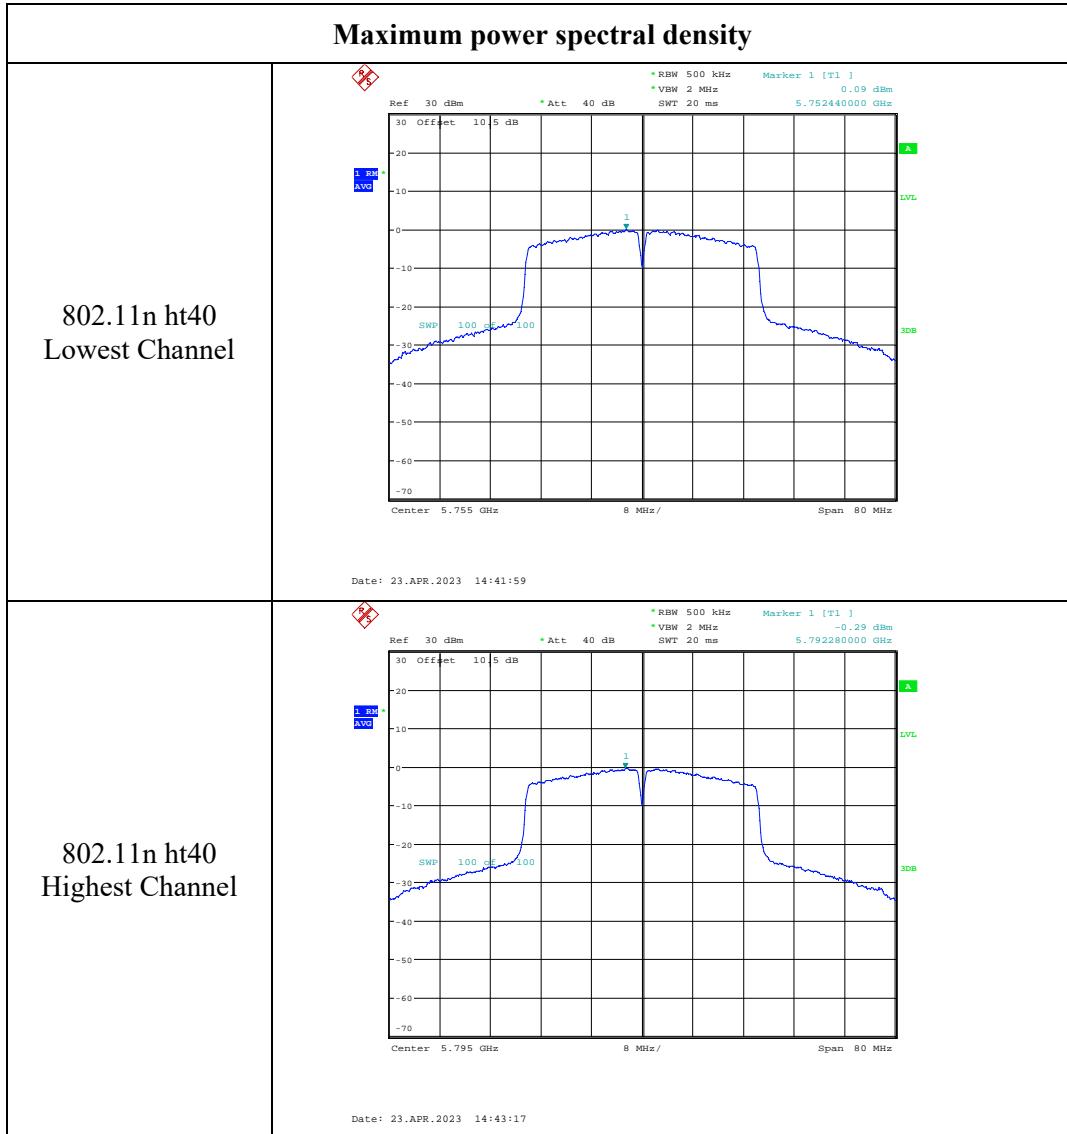

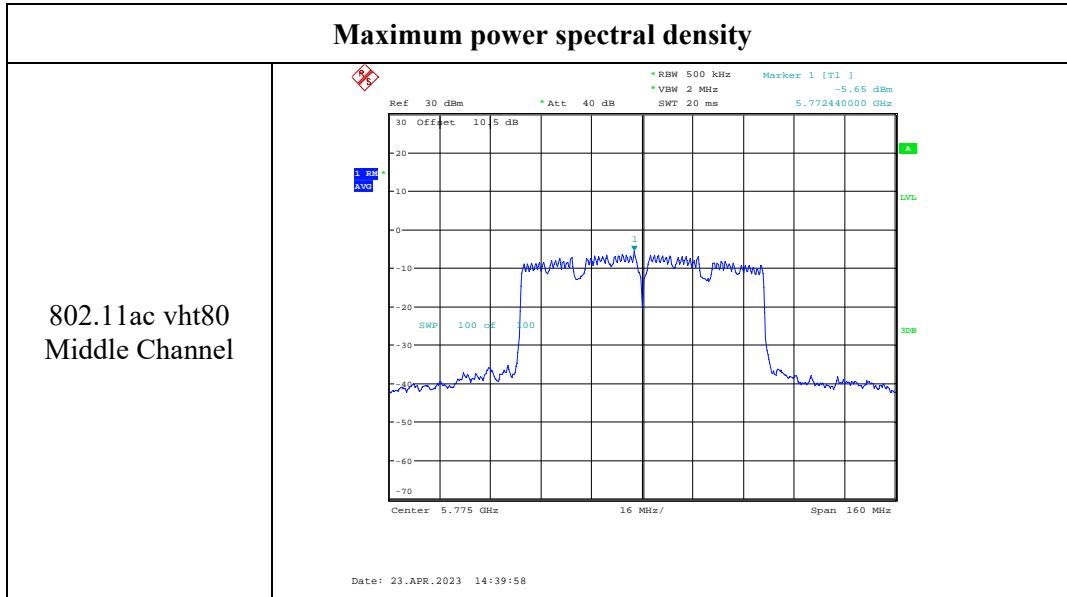

**4.6 Duty Cycle:**

Serial Number:	22Y5 1	Test Date:	2023/4/21~2023/4/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	N/A

**Environmental Conditions:**

Temperature: (°C)	24.0~25.1	Relative Humidity: (%)	45~61	ATM Pressure: (kPa)	100.1~100.6
----------------------	-----------	---------------------------	-------	------------------------	-------------


**Test Equipment List and Details:**


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2023-03-31	2024-03-30
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	Duty cycle Factor (dB)
802.11a	1.407	1.458	96.50	711	0.15
802.11n ht20	0.683	0.737	92.67	1464	0.33
802.11n ht40	0.683	0.738	92.55	1464	0.34
802.11ac vht80	0.058	0.117	49.57	17241	3.05

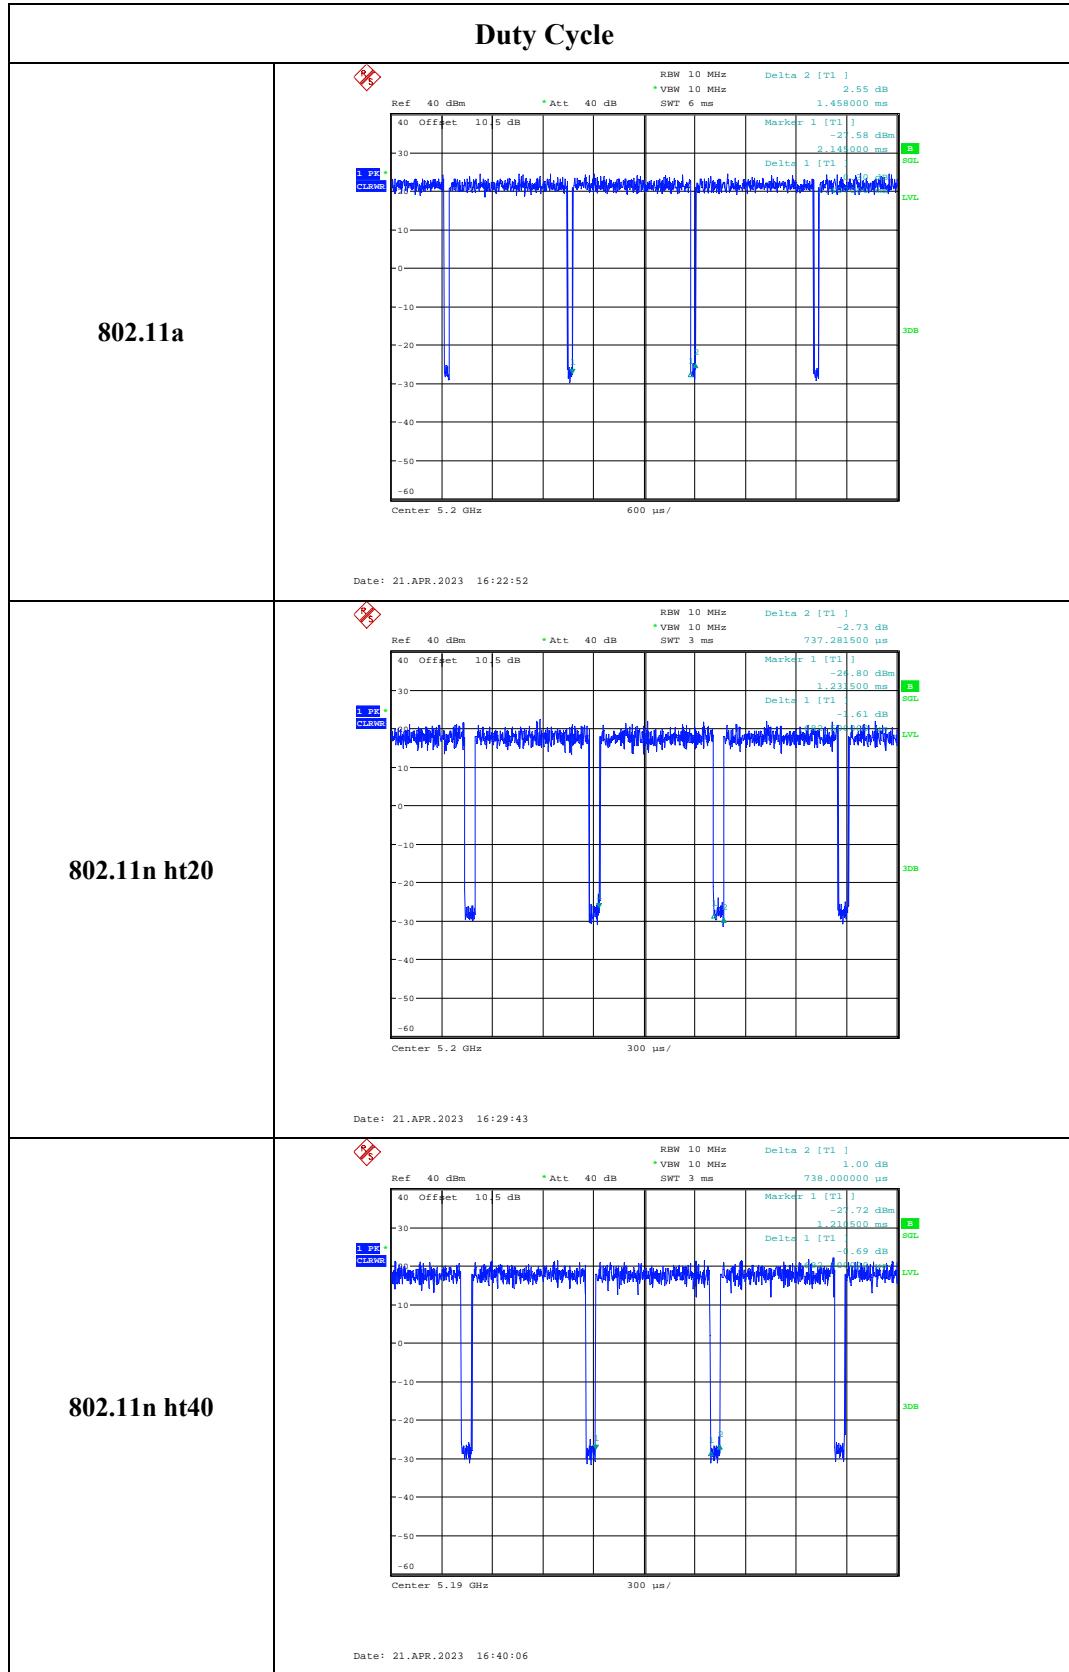

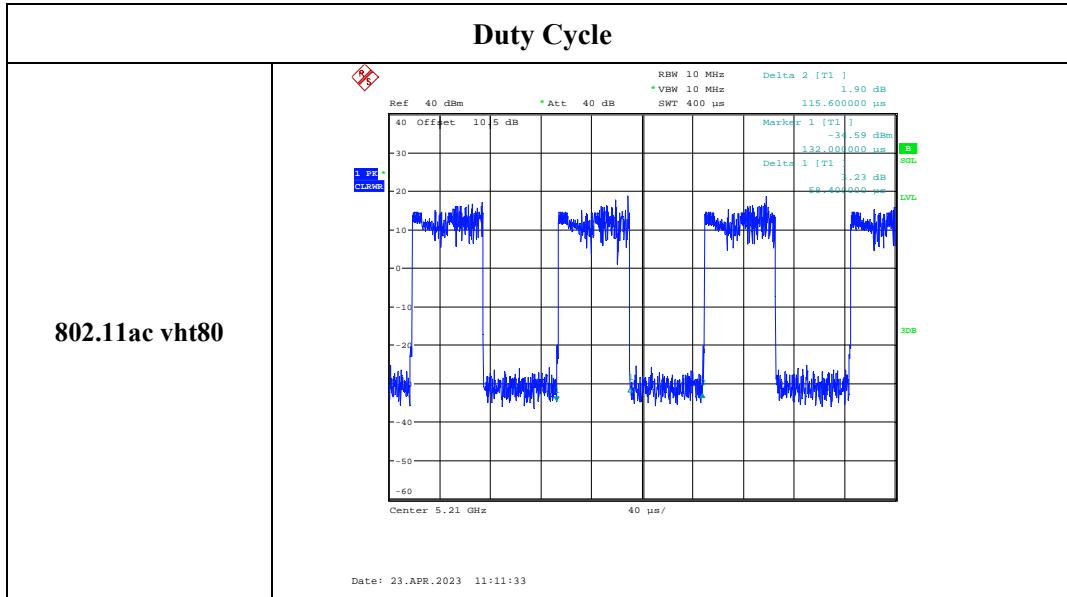

## 5. RF EXPOSURE EVALUATION

### 5.1 Applicable Standard

According to § 1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance ( $R$  in meters) from the body of a nearby person for the frequency ( $f$  in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply,  $R$  must be at least  $\lambda/2\pi$ , where  $\lambda$  is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of  $\lambda/4$  or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2 f$ .
1,500-100,000	$19.2R^2$ .

### 5.2 Measurement Result

Radio	Frequency (MHz)	$\lambda/2 \Pi$ (mm)	Distance (mm)	Exemption ERP (mW)	Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP		MPE-Based Exemption
							dBm	mW	
2.4G WLAN	2412-2472	19.80	200	768	21	5.56	24.41	276.06	Compliant
5.2G WLAN	5180-5240	9.22	200	768	23	5.07	25.92	390.84	Compliant
5.8G WLAN	5745-5825	8.31	200	768	20	5.37	23.22	209.89	Compliant

Note:

The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.  
WLAN 2.4G and 5G can't transmit simultaneously.

**Result: The device compliant the Exemption at 20cm distances.**

===== END OF REPORT =====