

TEST REPORT

Ref. Report No.

06-1341-033-1

Name and address of the applicant

IDTECK CO., LTD.
5F, Ace Techno Tower B/D. 684-1 Deungchon-Dong,
Gangseo-Gu, Seoul 157-030, Korea

Standard / Test regulation

FCC Part 15, Subpart C

Test result

Pass

Incoming date : Sep 21, 2006

Test date : Sep 21, 2006 ~ Sep 27, 2006

Test item(s) ;

UHF -Band RFID Tag
(Digital Transmission Transmitter)

Model/type ref. ;

IDA245

Manufacturer ;

ID-TECK CO., LTD.

Additional information ;

-Required Authorization : Certification
-FCC ID. : OYUIDA245

This test report only responds to the tested sample and shall not be reproduced except in full without written approval of the Korea Testing Laboratory.

Tested and reported by



Sung-Kyu Cho, Engineer

Reviewed by



Seok-Jin Kim , Telecommunication Team
Manager

KOREA TESTING LABORATORY

TABLE OF CONTENTS

I. GENERAL INFORMATION.....	4
1. Applicant's Name and Mailing Address	
2. Manufacturer's Name and Mailing Address	
3. Equipment Descriptions	
4. Rules and Regulations	
5. Measuring Procedure	
6. Place of Measurement	
7. Date of Measurement	
II. GENERAL REQUIREMENTS OF THE EUT.....	5
1. Labeling Requirement (Section 15.19)	
2. Information to User (Sections 15.21)	
3. Special Accessories (Section 15.27)	
III. RADIATED EMISSION MEASUREMENT (Section 15.209).....	6
1. Test Procedure	
2. Photograph for the test configuration	
3. Sample Calculation	
4. Measurement Data	
V. 6 dB BANDWIDTH (Section 15.247(a)).....	14
1. Test standard	
2. Measurement Data	
3. Measurement Plot	
VI. OUTPUT POWER MEASUREMENT (Section 15.247(b)).....	15
1. Test standard	
2. Measurement Data	
3. Measurement Plot	

VII.	100 kHz BANDWIDTH OF BAND EDGES (Section 15.247(c)).....	16
1.	Test standard	
2.	Measurement Data	
3.	Measurement Plot	
VIII.	POWER SPECTRAL DENSITY (Section 15.247(e)).....	17
1.	Test standard	
2.	Measurement Data	
3.	Measurement Plot	
IX.	TEST EQUIPMENTS USED FOR MEASUREMENTS.....	20

I. GENERAL INFORMATION

1. Applicant's Name and Mailing Address : IDTECK CO., LTD.
5F, Ace Techno Tower B/D. 684-1 Deungchon-Dong,
Gangseo-Gu, Seoul 157-030, Korea

2. Manufacturer's Name and Mailing Address : IDTECK CO., LTD.
5F, Ace Techno Tower B/D. 684-1 Deungchon-Dong,
Gangseo-Gu, Seoul 157-030, Korea

3. Equipment Descriptions

3.1 Operating Frequency : 2,402 MHz
3.2 Maximum Antenna gain : 6 dBi
3.2 Power Supply : DC 3 V (Battery)

4. Rules and Regulations : FCC Part 15, Subpart C

5. Measuring Procedure : ANSI C63.4-2003

6. Place of Measurement : Absorber-lined room(3-Meter) of KTL

7. Date of Measurement : Sep 21, 2006 ~ Sep 27, 2006

II. GENERAL REQUIREMENTS OF THE EUT

1. Labelling Requirement (Section 15.19)

This device complies with Part 15 of the FCC Rules.
Operation is subject to following two condition : (1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

1.1 Location of Label : User's Guide Manual

1.2 How Applied : Printed

2. Information to User (Section 15.21)

The following or similar statements were provided in the manual for user instruction.

Please refer page 9 of the attached manual for details.

CAUTION : Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

3. Special Accessories (Section 15.27)

3.1 Were the special Accessories provided? [] yes, [☒] no

3.2 If yes, details for the special accessories are as follows :

3.3 If yes, were the appropriate instructions provided on the first page of the text concerned with the device?

[] yes, [] no

3.4 Are these accessories provided of the type which can be readily obtained from multiple retail outlets ?

[] yes, [] no

And therefore does the manual specify what additional components or accessories are required to used in order to comply with the Rules?

[] yes, [] no

III. RADIATED EMISSION MEASUREMENT (Section 15.209)

1. Test Procedure

1.1 Preliminary Testing for Reference

The EUT was designed to transmit on 2,402 MHz. Therefore measurements were performed with the equipment operating on 2,402 MHz.

Preliminary testing was performed in a KTL absorber-lined room to determine the emission characteristics of the EUT. The EUT was placed on the wooden table which has dimensions of 0.8 meters in height, 1 meter in length and 1.5 meters in width. Receiving antenna (Biconi-Log antenna : 30 to 1000 MHz or Horn Antenna : 1 to 25 GHz) was placed at the distance of 1 meter from the EUT.

An attempt was made to maximize the emission level with the various configurations of the EUT. Emission levels from the EUT with various configurations were examined on a spectrum analyzer connected with a RF amplifier and graphed by a plotter.

1.2 Final Radiated Emission Test at an Absorber-Lined Room

The final measurement of radiated field strength was carried out in a KTL absorber-lined Room that was listed up at FCC according to the "Radiated Emissions Testing" procedure specified by ANSI C63.4.


Based on the test results in preliminary test, measurement was made in same test set up and configurations where produced maximum emission level. Receiving antenna was installed at 3-meter distance from the EUT, and was connected to an EMI receiver or spectrum analyzer with a RF amplifier.

Turntable was rotated through 360 degrees and receiving antenna height was varied from 1 to 4 meters above the ground plane with horizontal and vertical polarization to read maximum emission level.

If necessary, the radiated emission measurements could be performed at a closer distance than specified distance to ensure higher accuracy and their results were extrapolated to the specified distance using an inverse linear distance extrapolation factor(20dB/decade) as per Section 15.31(f).

The maximum emission level from the EUT occurred in such configuration as shown in the following photograph.

2. Photograph of the test configuration

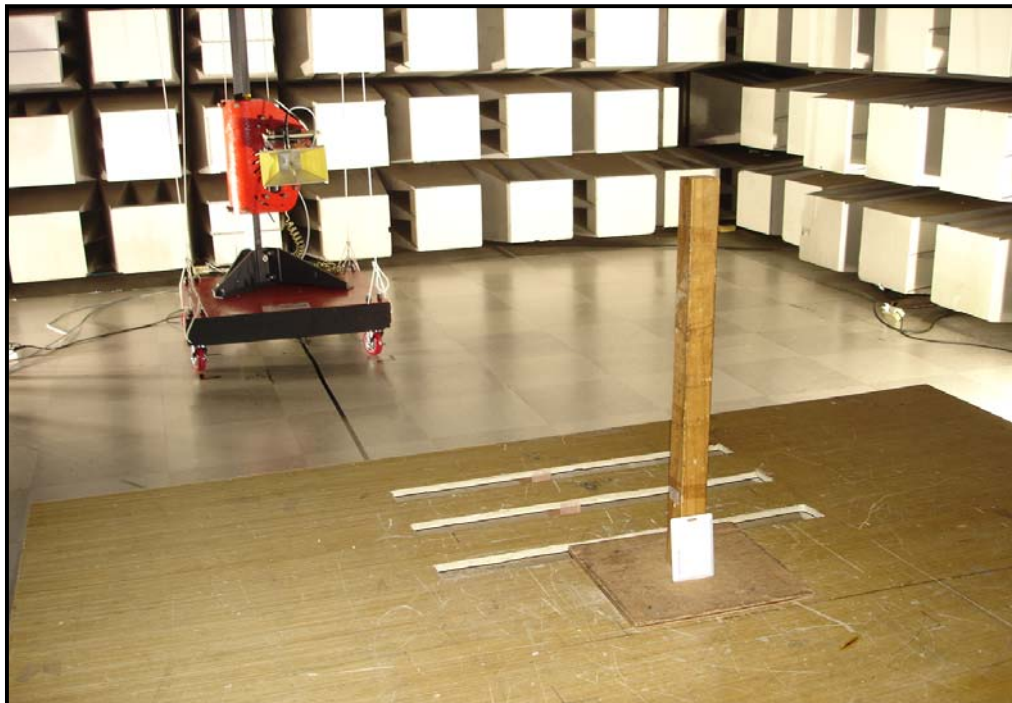

3. Sample Calculation

The emission level measured in decibels above one microvolt ($\text{dB } \mu\text{V}$) was calculated as shown in following sample calculation.

For example :

Measured Value at	<u>2.401.8 MHz</u>	57.8 $\text{dB } \mu\text{V}$
+	Antenna Factor & Cable Loss	31.4 dB/m
-	Preamplifier	-29.6 dB
-	Distance Correction Factor *	0.0 dB
=	Radiated Emission	59.6 $\text{dB } \mu\text{V/m}$

* Extrapolated from the measured distance to the specified distance by an inverse linear distance extrapolation.

4. Measurement Data

- Intentional Spurious Emission
- Resolution Bandwidth : x CISPR Quasi-Peak (6dB Bandwidth : 120kHz for below 1GHz)
 x Peak (3dB Bandwidth : 1MHz for above 1GHz)
- Measurement Distance : 3 Meter

channel Frequency (MHz)		* D.M.	* A.P.	Measured Value (dBμV/m)	* A.F. + C.L (dB)	* A.G. (dB)	* D.C.F.	Emission Level (dBμV/m)	Limit (dBμV/m)	** Margin (dB)
2,402 MHz	2,401.8	P	V	57.8	31.4	-29.6	--	59.6	114.0	-54.4
	2,401.8	A	V	25.6	31.4	-29.6	--	27.4	94.0	-66.6
	*** 4,804.0	P	V	49.7	37.6	-26.7	-9.5	51.1	74.0	-22.9
	*** 4,804.0	A	V	22.6	37.6	-26.7	-9.5	24.0	54.0	-30.0
	**** 7,206.0	P	H/V	<35.0	42.1	-26.0	-9.5	<41.6	74.0	>-32.4
	**** 7,206.0	A	H/V	<20.0	42.1	-26.0	-9.5	<26.6	54.0	>-27.4
	--	--	--	--	--	--	--	--	--	--
	--	--	--	--	--	--	--	--	--	--
	--	--	--	--	--	--	--	--	--	--
	--	--	--	--	--	--	--	--	--	--
	--	--	--	--	--	--	--	--	--	--
	--	--	--	--	--	--	--	--	--	--
Note * D.M. : Detect Mode (P : Peak, Q : Quasi-Peak, A : Average) A.P. : Antenna Polarization (H : Horizontal, V : Vertical) A.F. : Antenna Factor C.L. : Cable Loss A.G. : Amplifier Gain D.C.F. : Distance Correction Factor ** Margin (dB) = Emission Level (dB) - Limit (dB) *** In the case of these frequencies, the EUT was measured at 1.0m distance for sufficient sensitivity of measurement system. **** < means less than, > means bigger than. The observed spectrum analyzer noise floor level with RF preamplifier was 35.0 dBuV and 25.0 dBuV in peak and average mode respectively.										


Note ;

- (1) Fundamental emissions from the intentional radiators were not located within any of frequency bands described in section 15.205(a) listed below ;


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.1775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	
13.36-13.41			

The field strength of emissions appearing within above frequency bands did not exceed the limits shown in section 15.209. At frequency equal to or less than 1000 MHz, compliance with the limits section 15.209 was demonstrated using measurement employing a CISPR quasi-peak detector. Above 1000 MHz, demonstrated based on the average value of the measured emissions.


- (2) If the intentional radiator was operated under the radiated emission limits of the general requirements of section 15.209, it's fundamental emissions were not located in the frequency bands 54-72MHz, 76-88 MHz, 174-216 MHz, 470-860 MHz.
- (3) The level of any unwanted emissions from an intentional radiator did not exceed the level of the fundamental emission.
- (4) Radiated and spurious emissions were checked from 30 MHz to 24 GHz. And all other emissions not reported on data were more than 20 dB below the permitted level.

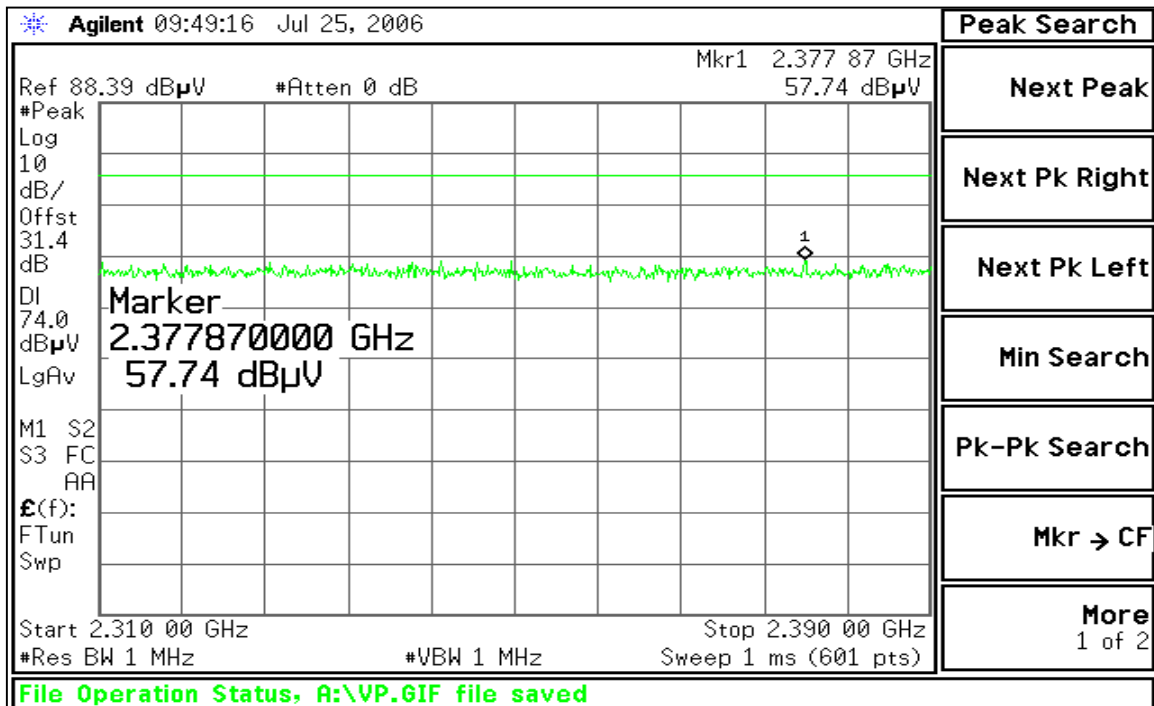


< Restricted Band edge (PEAK), Horizontal >

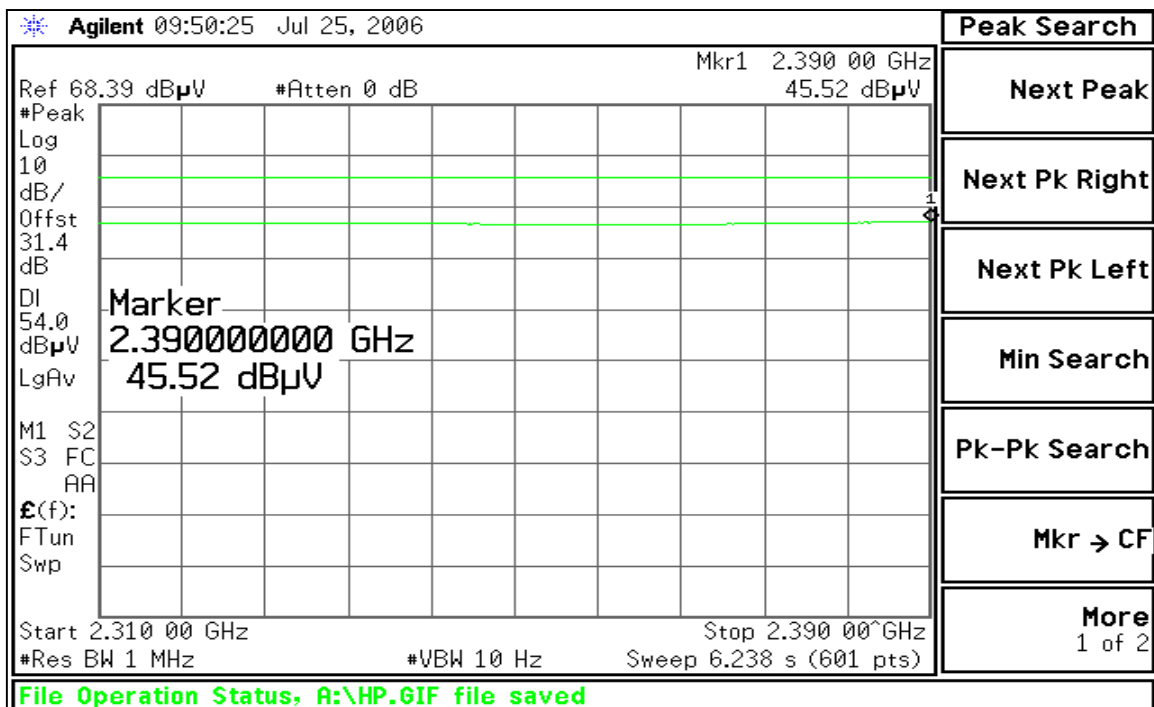


< Restricted Band edge (AVG), Horizontal >

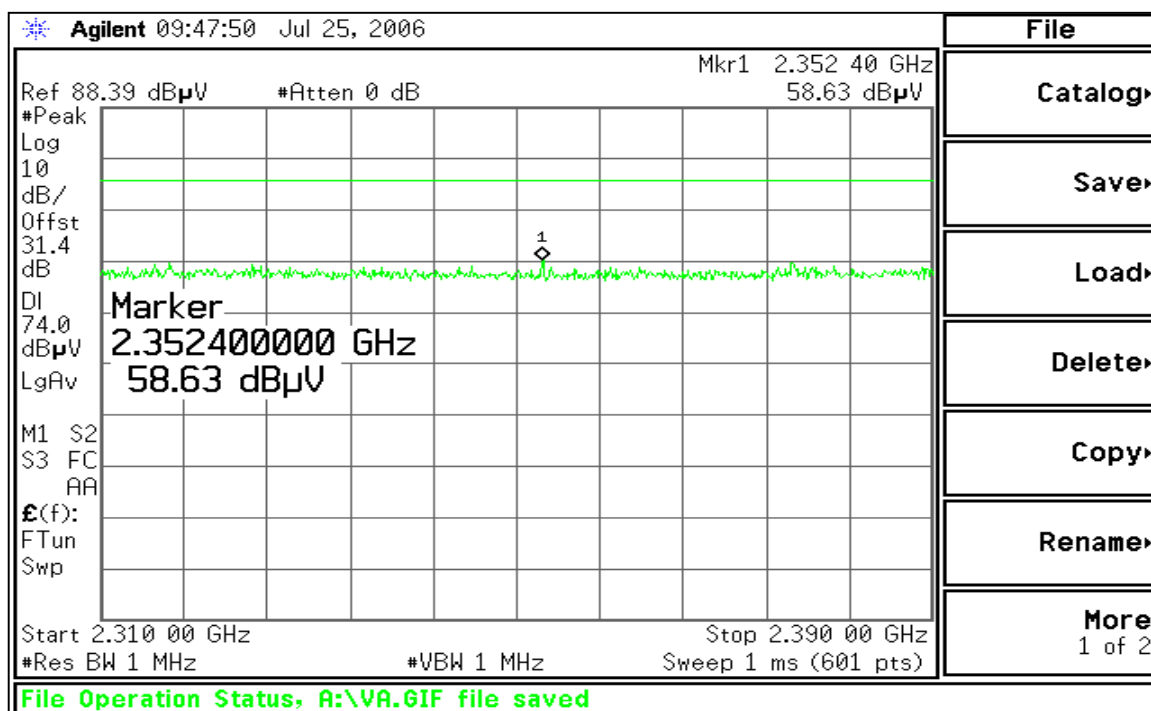


< Restricted Band edge (PEAK), Vertical >

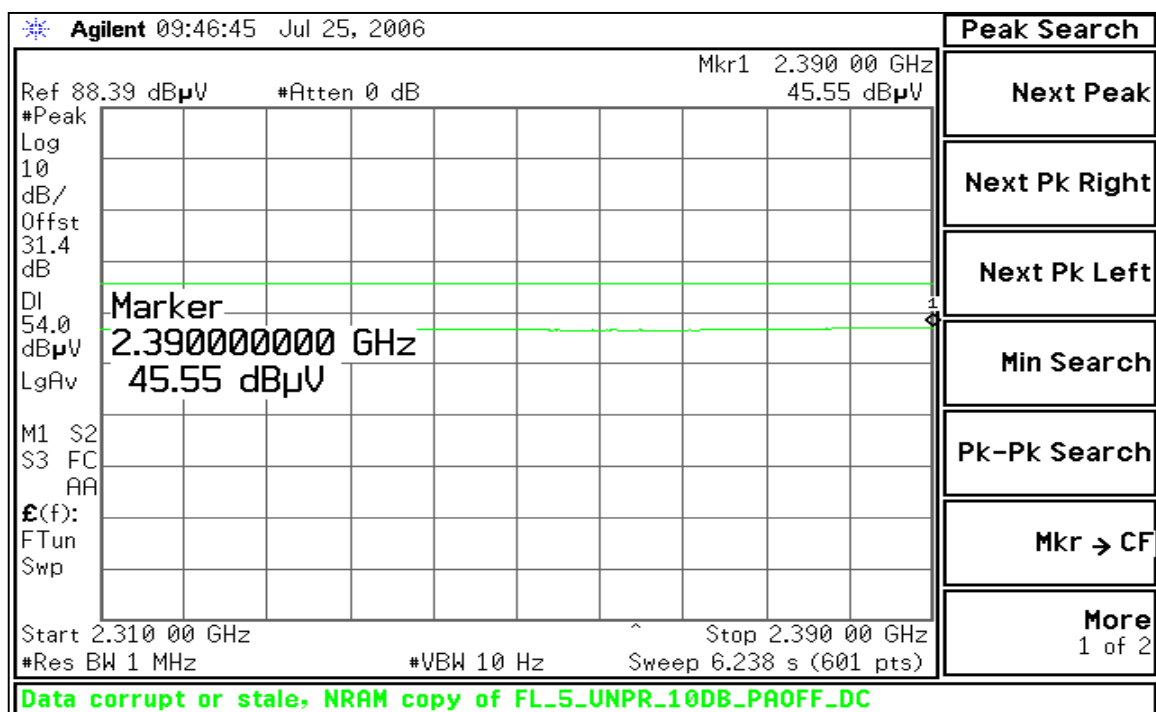


< Restricted Band edge (AVG), Vertical >

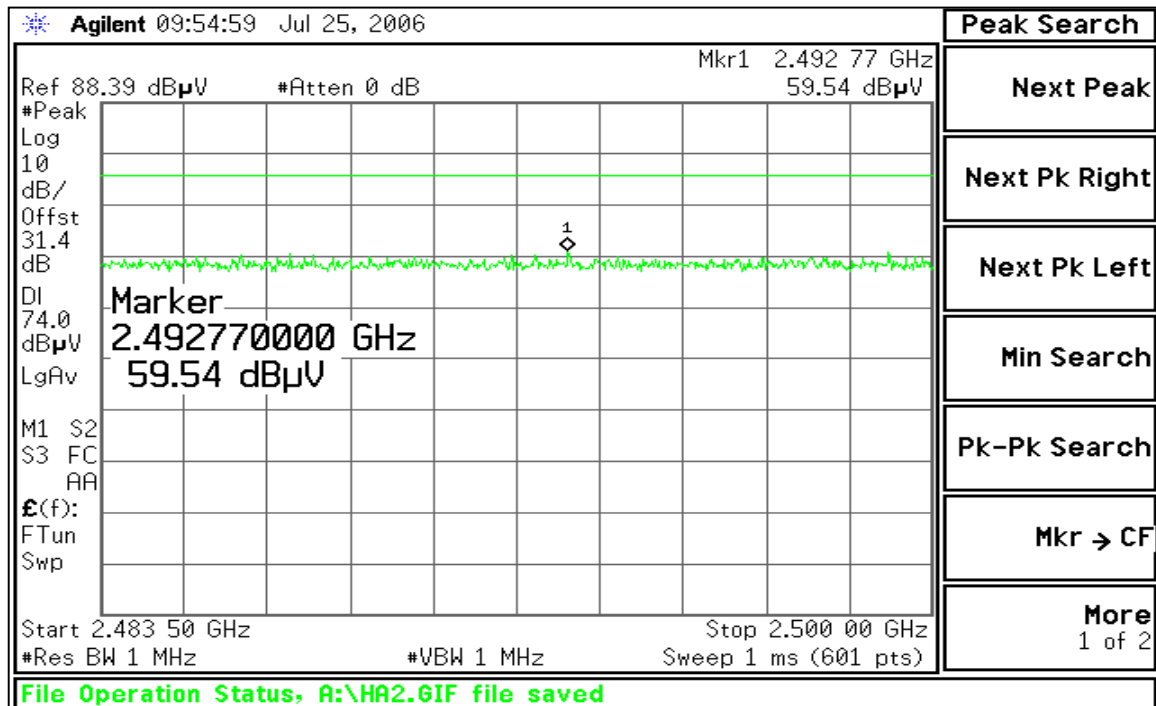


< Restricted Band edge (PEAK), Horizontal >

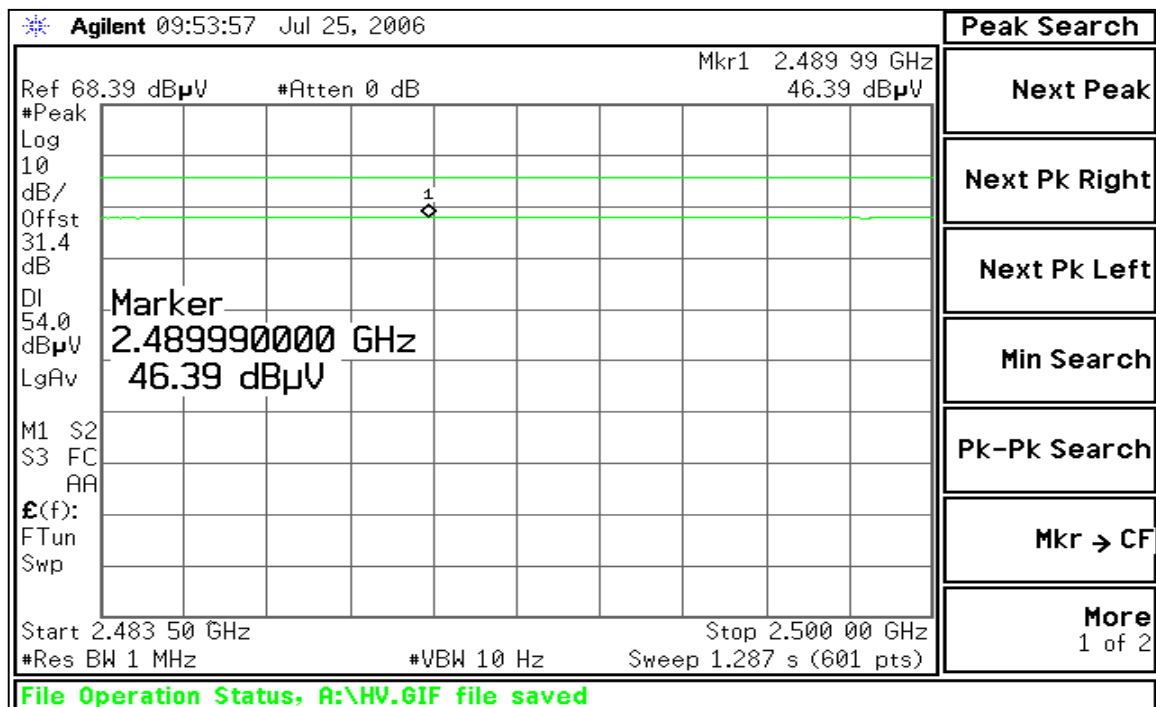

< Restricted Band edge (AVG), Horizontal >

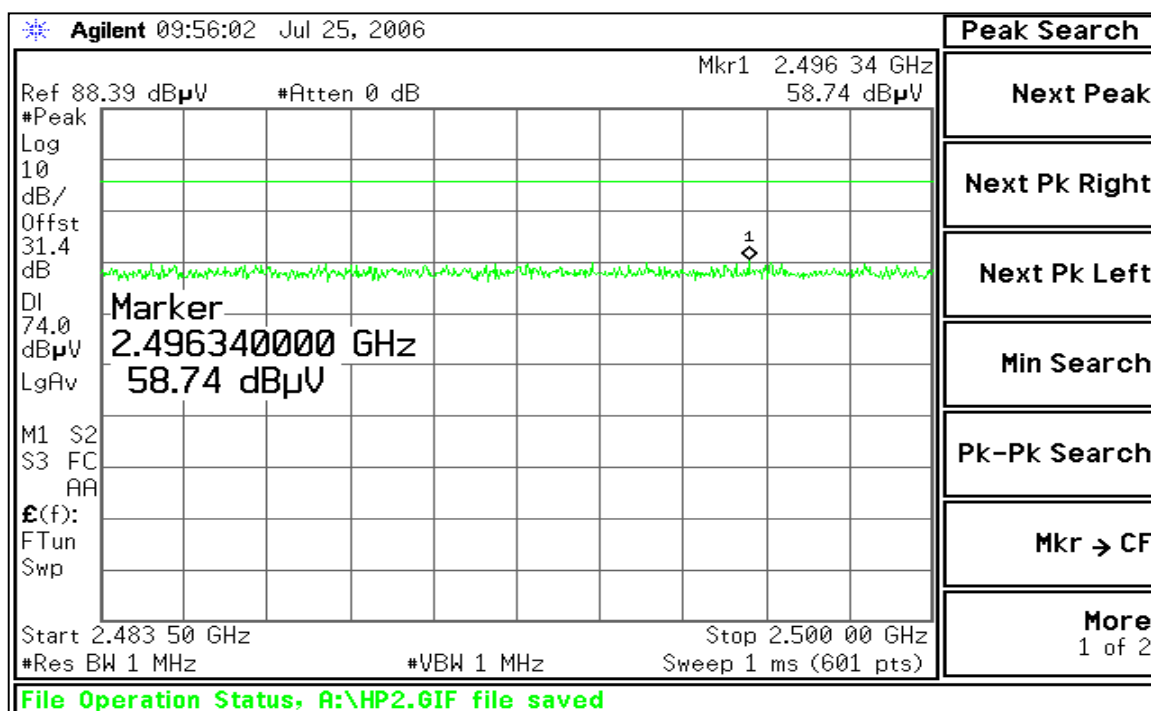

< Restricted Band edge (PEAK), Vertical >

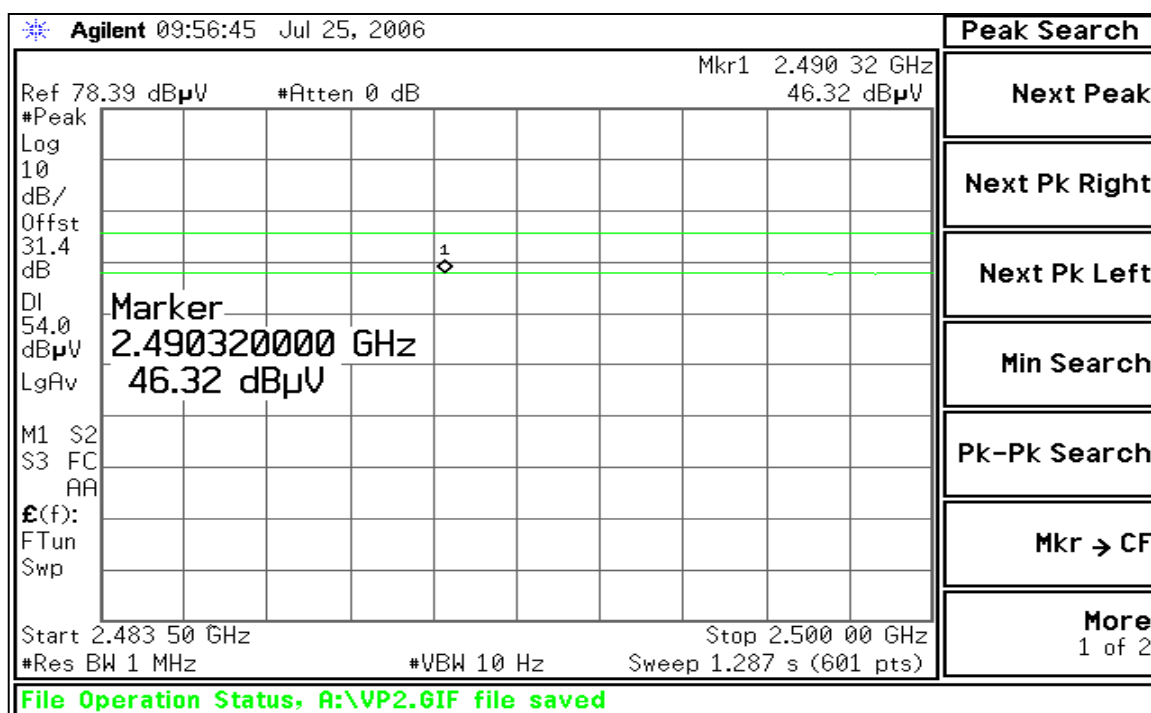

< Restricted Band edge (AVG), Vertical >

VI. 6 dB BANDWIDTH (Section 15.247(a))

1. Test Standards

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB Bandwidth shall be at least 500 kHz


2. Test Procedure

The EUT was set to transmit at its maximum data rate. The EUT was connected to a spectrum analyzer through a 50 ohm RF cable. Analyzer RES BW was set to 100 kHz..

3. 6 dB Bandwidth

Frequency (MHz)	Measured Value (kHz)	Limit (kHz)	Result
2,402	728.0	At least 500	Pass

4. Measurement Plot

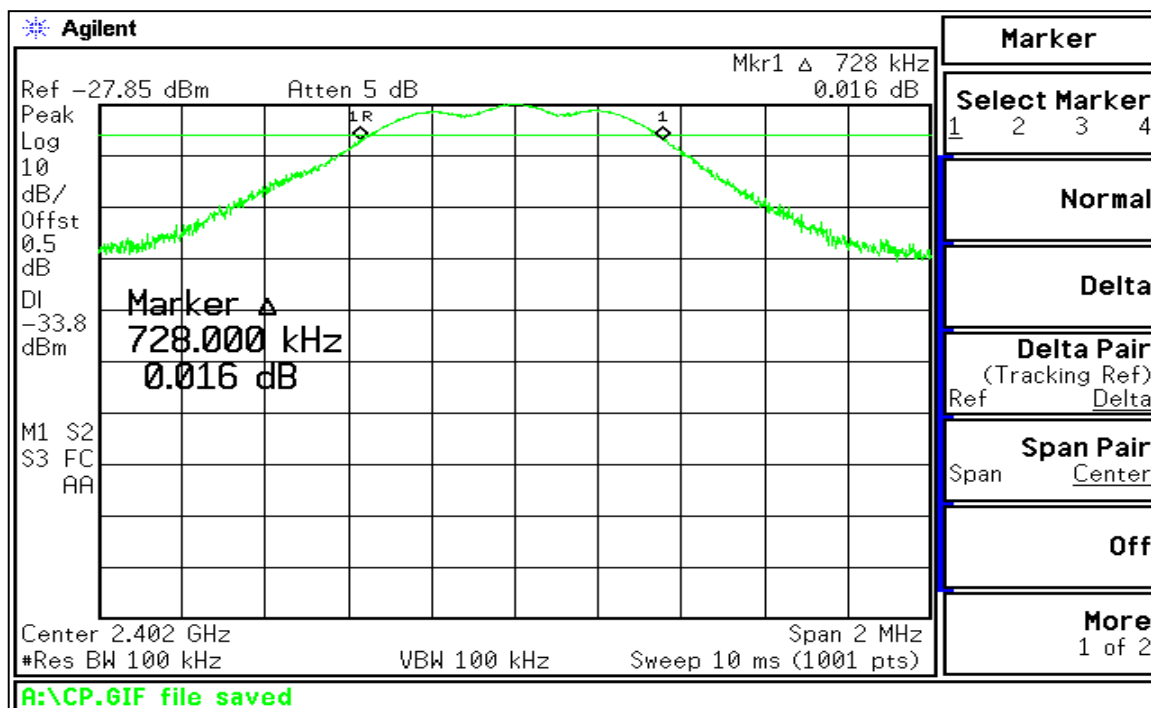

(6 dB Bandwidth)

V. OUTPUT POWER MEASUREMENT (Section 15.247(b))

1. Test Standards

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands using antennas with gains of 6 dBi or less, maximum allowed transmitter output power is 1 Watt. For antennas with gains greater than 6 dBi, the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


2. Test Procedure

The EUT was connected to a spectrum analyzer through a 50 ohm RF cable. External attenuation and cable loss were compensated for using the offset function of the analyzer. Analyzer RES BW was set to 1 MHz..

3. Measurement Data

Frequency (MHz)	Measured Value (uW)	Limit (Watt)	Result
2,402	17.49	1	Pass

4. Measurement Plot

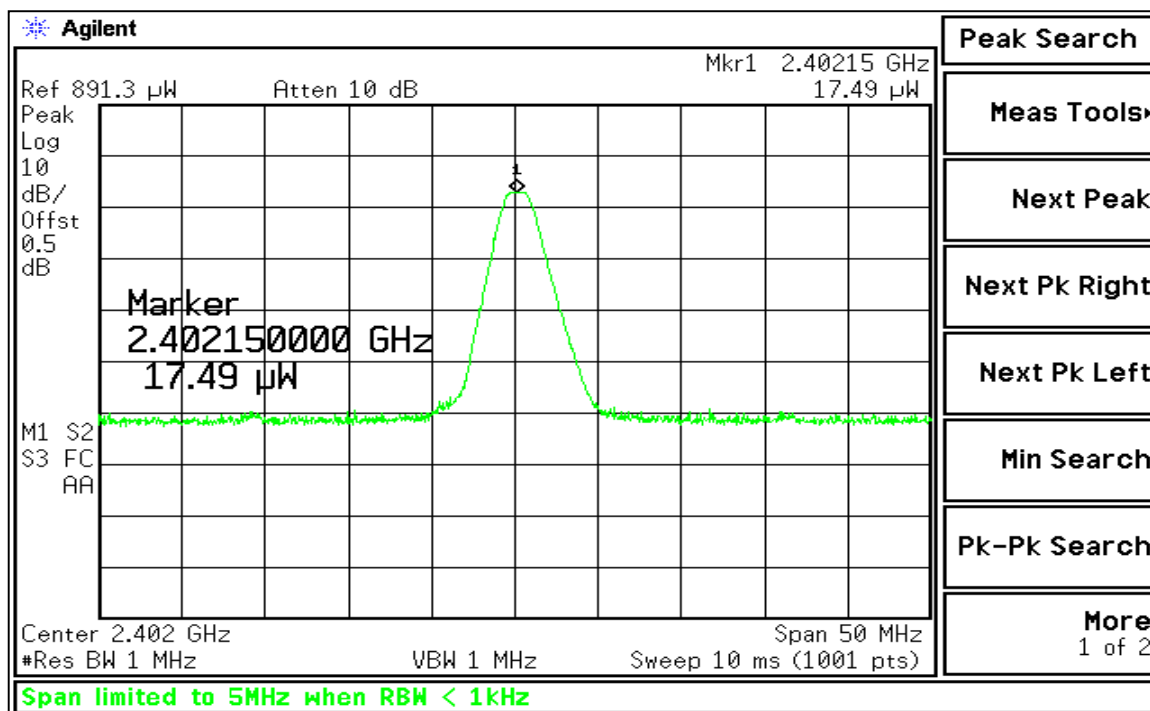

(Maximum Conducted Output Power)

VI. 100 kHz BANDWIDTH OF BAND EDGES (Section 15.247(c))**1. Test Standards**


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum of digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in section 15.209(a) is not required.

2. Test Procedure


The EUT was connected to a spectrum analyzer through a 50 ohm RF cable. External attenuation and cable loss were compensated for using the offset function of the analyzer.

3. Measurement data


Frequency (MHz)	Measured Value (dBc)	Limit (dBc)	Result
2,402	31.43	20	Pass

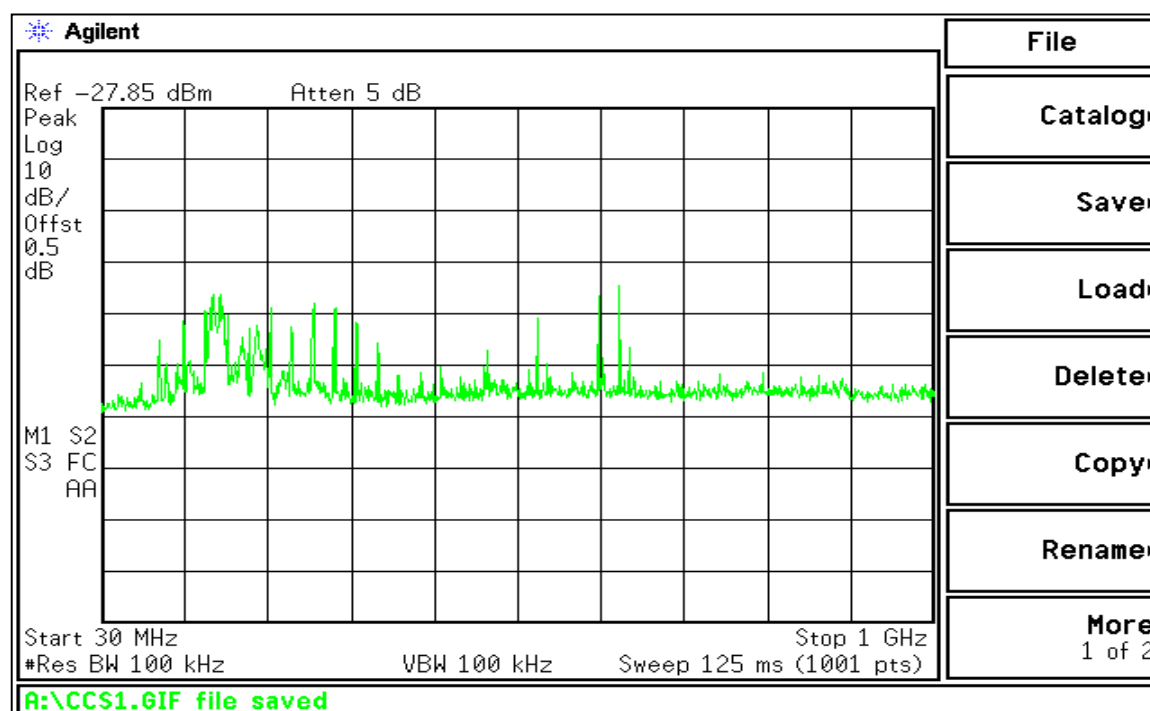4. Measurement Plot


(Out of band Conducted Emissions, 30 MHz ~ 1 GHz)

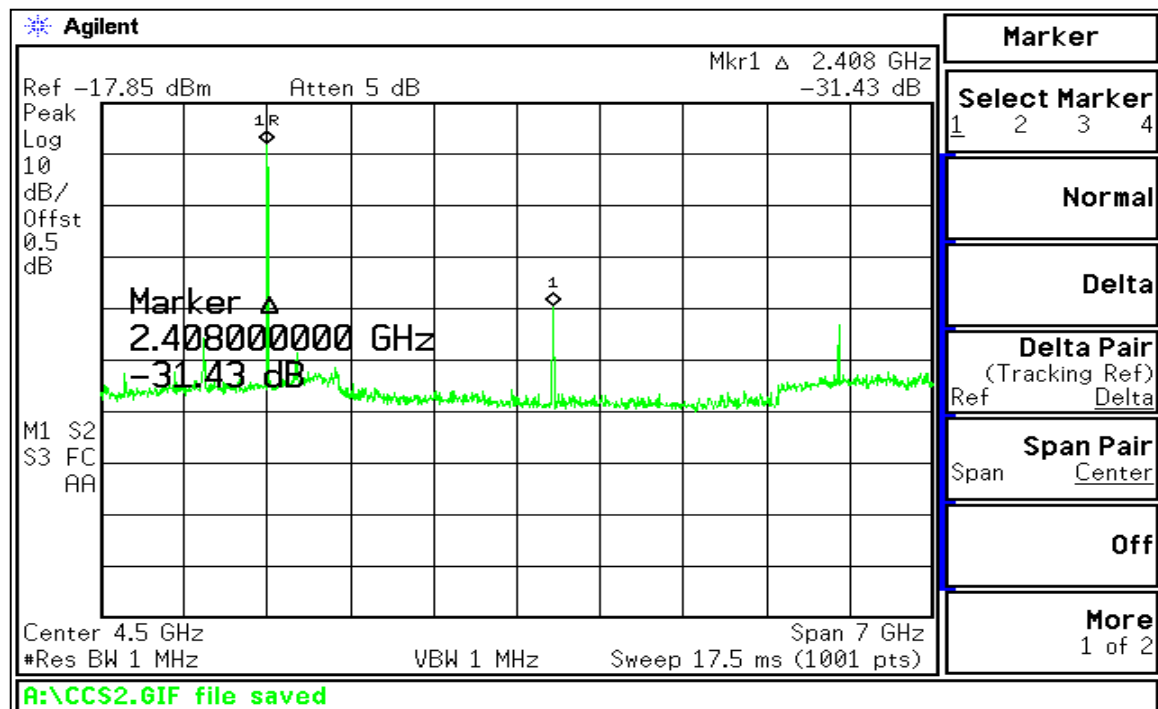

(Out of band Conducted Emissions, 1 GHz ~ 8 GHz)

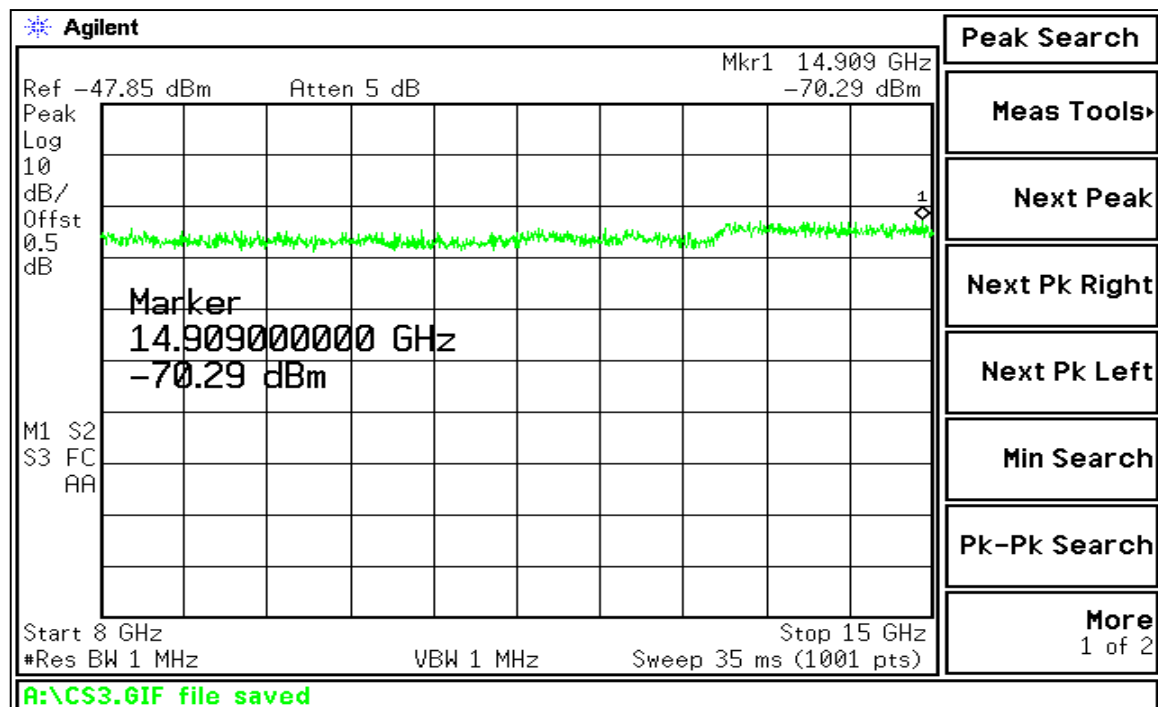

(Out of band Conducted Emissions, 8 GHz ~ 15 GHz)

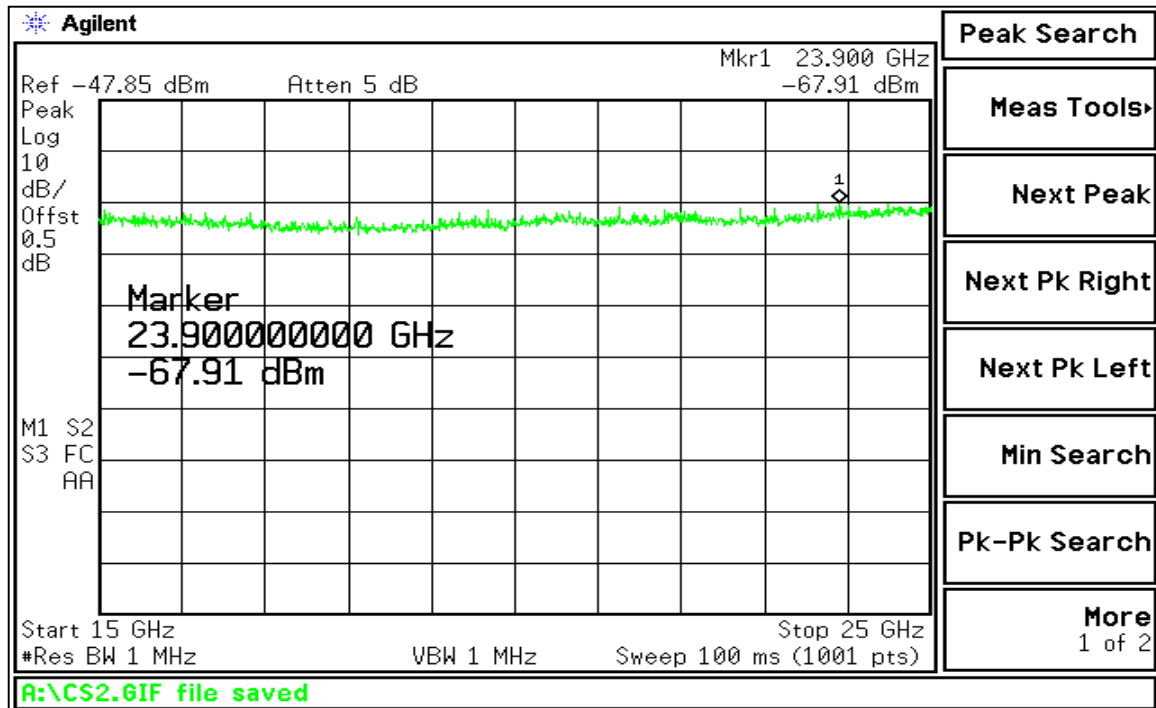

(Out of band Conducted Emissions, 15 GHz ~ 25 GHz)

VII. POWER SPECTRAL DENSITY (Section 15.247(e))**1. Test Standards**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any tie interval of continuous transmission.


2. Test Procedure

The EUT was connected to a spectrum analyzer through a 50 ohm RF cable. External attenuation and cable loss were compensated for using the offset function of the analyzer. The spectrum analyzer RES BW was set to 3 kHz. The Start and Stop frequencies were set to band edges of the maximum output passband. Total sweep time was calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$

3. Measurement data

Frequency (MHz)	Measured Value (dBm)	Limit (dBm)	Result
2,402	-35.26	8	Pass

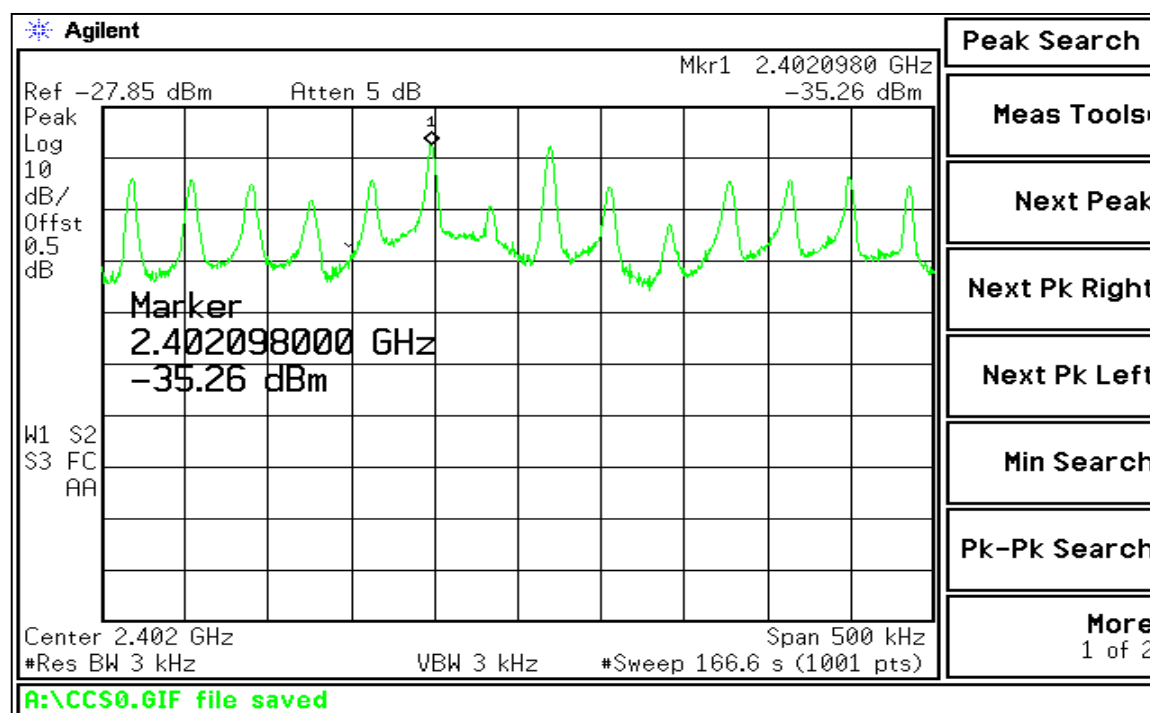4. Measurement Plot

(Power Spectral Density)

VIII. TEST EQUIPMENTS USED FOR MEASUREMENTS

<u>Equipment</u>	<u>Model No.</u>	<u>Manufacturer</u>	<u>Serial No.</u>	<u>Effective Cal. Duration</u>
[x] EMI Receiver (20 MHz-1 GHz)	ESVS30	R & S	830516/002	04/04/06-04/04/07
[x] EMI Receiver (20 Hz-7 GHz)	ESI	R & S	835571/004	10/14/05-10/14/06
[x] Spectrum Analyzer (9 kHz-26.5 GHz)	8563A	H. P.	3222A02069	05/15/06-05/15/07
[x] Spectrum Analyzer (3 Hz-50 GHz)	E4448A	Agilent	MY43360322	03/16/06-03/16/07
[x] Pre-Amplifier (0.1-3000 MHz, 30 dB)	8347A	H. P.	2834A00543	05/19/06-05/19/07
[x] Pre-Amplifier (1-26.5 GHz, 35 dB)	8449B	H. P.	3008A00302	06/14/06-06/14/07
[] Signal Generator (250 kHz-20 GHz)	E8257D	Agilent	MY44320379	12/26/05-12/26/06
[] LISN(50 Ω , 50 μ H) (10 kHz-100 MHz)	ESH3-Z5	R & S	826789/009	05/16/06-05/16/07
[] Plotter	7470A	H. P.	3104A21292	-
[] Tuned Dipole Ant. (30 MHz-300 MHz)	VHA 9103	Schwarzbeck	-	*
[] Tuned Dipole Ant. (300 MHz-1 GHz)	UHA 9105	Schwarzbeck	-	*
[x] BiConi-Log Ant. (30 MHz -1 GHz)	VULB9168	Schwarzbeck	9168-167	*
[x] Horn Ant. (1 GHz-18 GHz)	3115	EMCO	-	*
[] Horn Ant. (18 GHz-40 GHz)	3116	EMCO	-	*
[] Active Loop Ant. (9 kHz-30 MHz)	6502	EMCO	2532	*
[] DC Power Supply	6260B	H.P.	1145A04822	-
[] Shielded Room (5.0 m x 4.5 m)	-	SIN-MYUNG	-	-

* Each set of antennas has been calibrated to ensure correlation with ANSI C63.5 standard. The calibration of antennas is traceable to Korea Standard Research Institute(KSRI)