



Standard Engineering Model: MRF-250N
 AC Adapter Model: AD35-09003 L/R PCTEST Engineering Lab.

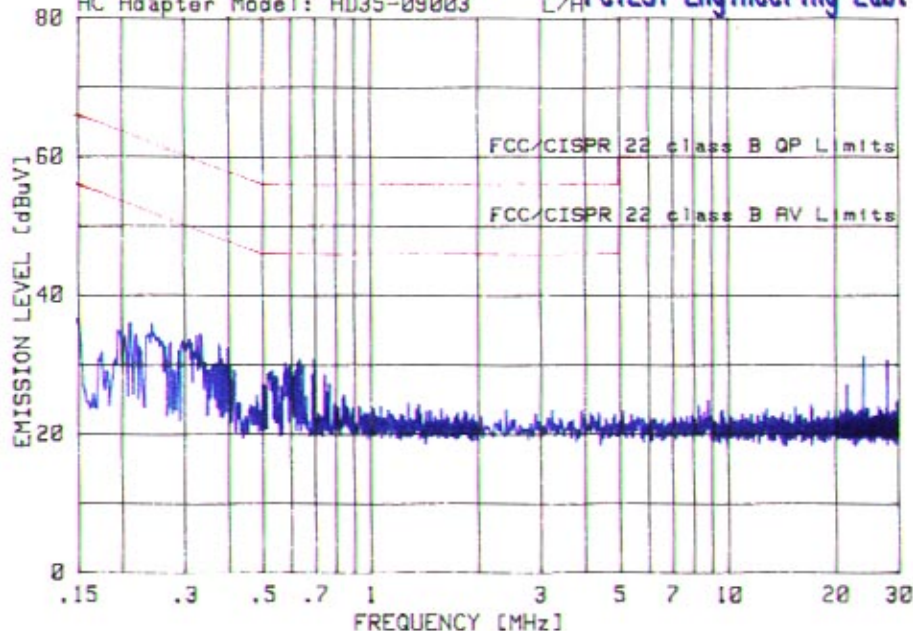

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	.317	28.24	59.79	-31.55	19.84	49.58	-29.74
2	.619	22.85	56.00	-33.15	17.45	46.00	-28.55
3	.680	22.57	56.00	-33.43	17.37	46.00	-28.63
4	.358	26.21	58.78	-32.57	18.41	48.54	-30.13
5	.380	25.48	58.28	-32.80	18.14	48.07	-29.93
6	.610	22.65	56.00	-33.35	17.50	46.00	-28.50
7	.566	23.02	56.00	-32.98	17.53	46.00	-28.47
8	.634	22.75	56.00	-33.25	17.36	46.00	-28.64
9	.225	35.91	62.62	-26.71	24.70	52.20	-27.50
10	.298	29.48	60.30	-30.82	20.41	50.00	-29.59

Standard Engineering Model: MRF-250N
 AC Adapter Model: AD35-09003 L/B PCTEST Engineering Lab.

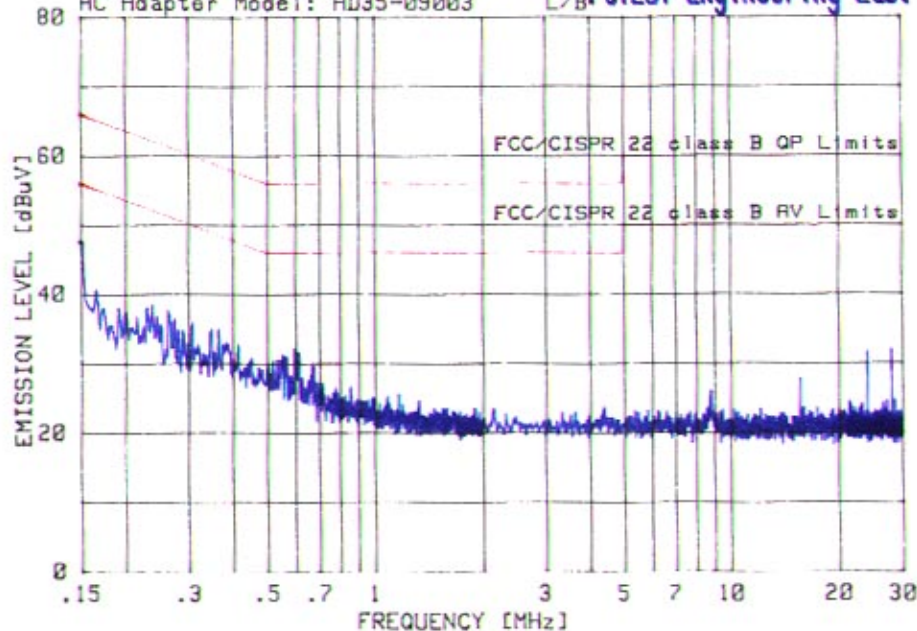

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	.151	49.39	65.93	-16.54	43.90	56.00	-12.10
2	.245	38.01	61.91	-23.90	31.65	51.60	-19.95
3	.347	30.68	59.04	-28.36	24.02	48.01	-24.79
4	.220	40.73	62.84	-22.11	34.12	52.49	-18.37
5	.580	24.98	56.00	-31.02	18.87	46.00	-27.13
6	.330	31.36	59.45	-28.09	24.39	48.99	-24.60
7	.292	33.66	60.45	-26.79	27.88	50.26	-22.38
8	.593	25.80	56.00	-30.20	18.65	46.00	-27.35
9	.151	49.48	65.95	-16.47	42.70	55.53	-12.83
10	.257	36.83	61.54	-24.71	30.64	51.25	-20.61