

FCC EVALUATION REPORT FOR CERTIFICATION

(Class II Permissive Change)

Manufacturer : OHSUNG ELECTRONICS CO., LTD
#181 Gongdan-Dong, Gumi-City
Gyeongsangbuk-Do, Korea
Attn : Mr. Kwang-jae Ok / Manager

Date of Issue : July 28, 2005
Test Report S/N : GETEC-E3-05-057
Test Site : Gumi College EMC Center

FCC ID

OZSURCMX-3000

APPLICANT

OHSUNG ELECTRONICS CO., LTD

Rule Part(s) : FCC Part 15 Subpart B-Unintentional Radiator § 15.107, § 15.109
FCC Part 15 Subpart C-Intentional Radiator § 15.231

Equipment Class : Remote Control Transmitter (DSC)

Application Type : Class II Permissive Change

EUT Type : RF Transmitter Universal Remote Control

Frequency Range : 417.5~418.5 MHz

Model No. : MX-3000-N3, MT-1000C

Class II Change(s) : With alternate LCD Panel
(TD035STEB1 TOPPOLY Optoelectrnics Corporation)

This equipment, with the Class II Permissive Change(s) listed above, has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,



Jea-Woon Choi, Chief engineer
GUMI College EMC center



Tae-Sig Park, Technical manager
GUMI College EMC center

CONTENTS

1. SCOPE.....	4
2. INTRODUCTION	5
3. TEST CONDITIONS & EUT INFORMATION.....	6
3.1 DESCRIPTION OF EUT.....	6
3.2 SUPPORT EQUIPMENT USED	6
4. ANTENNA REQUIREMENT-§15.203.....	7
4.1 DESCRIPTION OF ANTENNA.....	7
5. DESCRIPTION OF TESTS.....	8
5.1 CONDUCTED EMISSION	8
5.2 RADIATED EMISSION.....	9
5.3 DUTY CYCLE CORRECTION	10
5.4 OCCUPIED BANDWIDTH.....	10
6. CONDUCTED EMISSION.....	11
6.1 OPERATING ENVIRONMENT	11
6.2 TEST SET-UP.....	11
6.3 MEASUREMENT UNCERTAINTY	11
6.4 LIMIT	12
6.5 TEST EQUIPMENT USED	12
6.5 TEST DATA FOR CONDUCTED EMISSION	13
7. DUTY CYCLE CORRECTION.....	16
7.1 OPERATING ENVIRONMENT	16
7.2 TEST SET-UP.....	16
7.3 TEST EQUIPMENT USED	16
7.4 TEST RESULT OF DUTY CYCLE.....	16
8. RADIATED EMISSION TEST	17
8.1 OPERATING ENVIRONMENT	17
8.2 TEST SET-UP.....	17
8.3 MEASUREMENT UNCERTAINTY	17
8.4 LIMIT	18
8.5 TEST EQUIPMENT USED	18
8.6 RADIATED EMISSION TEST DATA	19
9. OCCUPIED BANDWIDTH MEASUREMENT.....	23
9.1 OPERATING ENVIRONMENT	23
9.2 TEST SET-UP.....	23
9.3 LIMIT	23
9.4 TEST EQUIPMENT USED	23
9.5 TEST RESULT OF OCCUPIED BANDWIDTH.....	23
10. RECOMMENDATION & CONCLUSION.....	24

APPENDIX A – ATTESTATION STATEMENT
APPENDIX B – TEST PLOTS
APPENDIX C – FCC ID LABEL & LOCATION
APPENDIX D – BLOCK DIAGRAM(S)
APPENDIX E – SCHEMATIC DIAGRAM(S)
APPENDIX F – TEST SET UP PHOTOS
APPENDIX G – EXTERNAL PHOTOGRAPHS
APPENDIX H – INTERNAL PHOTOGRAPHS
APPENDIX I – USER’S MANUAL
APPENDIX J – OPERATIONAL DESCRIPTION
APPENDIX K – INFORMATION OF CLASS II PERMISSIVE CHANGE

1. Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

Responsible Party	: OHSUNG ELECTRONICS CO., LTD.
Contact Person	: Mr. Kwang-jae Ok / Manager
Manufacturer	: OHSUNG ELECTRONICS CO., LTD #181 Gongdan-Dong, Gumi-city, Gyeongsangbuk-do, Korea

- **FCC ID.** OZ5URCMX-3000
- **Equipment Class** Remote Control Transmitter (DSC)
- **Application Type** Class II Permissive Change
- **EUT Type** RF Transmitter Universal Remote Control
- **Power Source** AC 120V / 60Hz
DC 5V (Lithium Ion battery)
- **Model No.** MX-3000-N3, MT-1000C
- **Rule Part(s)** FCC Part 15, Subpart B-Unintentional Radiator §15.107, §15.109
FCC Part 15, Subpart C-Intentional Radiator § 15.231
- **Test Procedure(s)** ANSI C63.4 (2003)
- **Dates of Test** July 21 ~ 26, 2005
- **Place of Test** Gumi College EMC Center
- **Test Report No.** GETEC-E3-05-057
- **Class II Change(s)** **With alternate LCD Panel**
(TD035STEB1 TOPPOLY Optoelectrnics Corporation)

2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **OHSUNG ELECTRONICS CO., LTD. RF Transmitter Universal Remote Control (Model No.: MX-3000-N3)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-City, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992

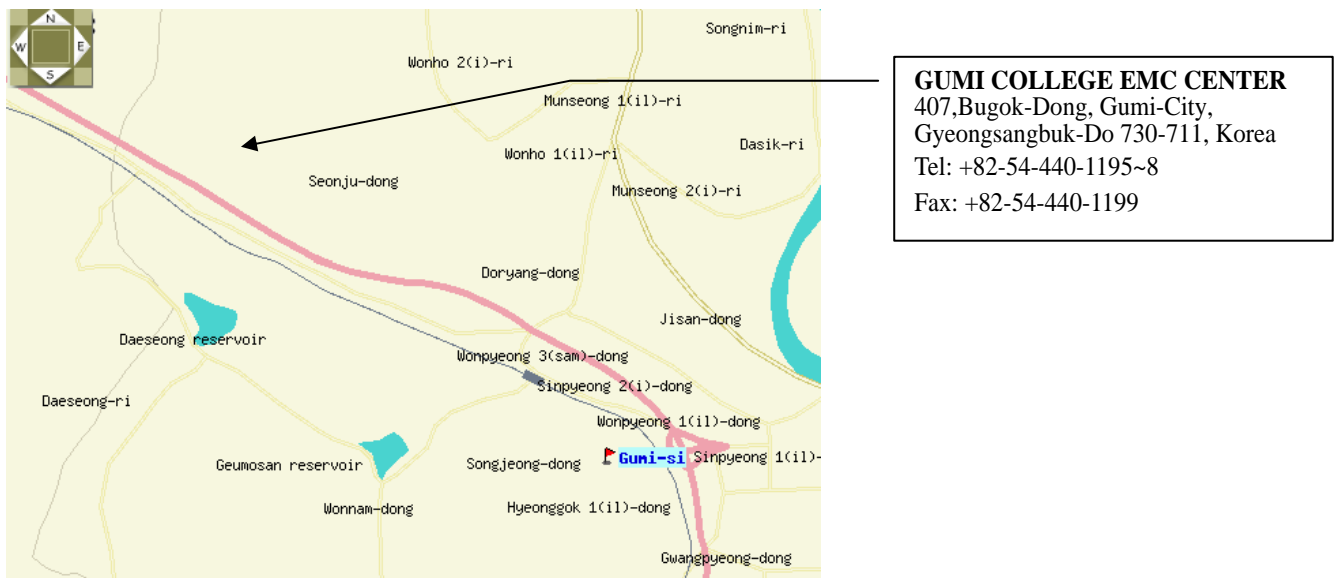


Fig 1. The map above shows the Gumi College in vicinity area.

3. Test Conditions & EUT Information

3.1 Description of EUT

The Equipment Under Test (EUT) is the **OHSUNG ELECTRONICS CO., LTD. RF Transmitter Universal Remote Control (Model No.: MX-3000-N3)**

Frequency Range	417.5 ~ 418.5MHz
Oscillator(s)	418MHz
Antenna	Built-in internal looped antenna on-board
Test Mode	Download mode RF remote control mode IR remote control mode
AC/DC Adapter	061-052000-UF (Xiang Fa Electronics Co., Ltd.) Input: 100 ~ 240Vac, 50 ~ 60Hz, 0.3A Output: 5Vdc, 2A
Cable(s)	2.1m AC/DC Adapter cable Connected to the EUT 1.2mUSB cable Connected to the EUT and notebook PC

3.2 Support Equipment used

Notebook PC	COMPAQ E500 S/N: 1J1BFTBZ528G FCC ID: DoC	Connected to the EUT and Peripheral equipments
--------------------	---	---

4. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

4.1 Description of Antenna

The **OHSUNG ELECTRONICS CO., LTD RF Transmitter Universal Remote Control** comply with the requirement of §15.203 with a built-in looped antenna permanently attached to the transmitter.

5. Description of tests

5.1 Conducted Emission

The Line conducted emission test facility is inside a 4×8×2.5 meter shielded enclosure.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table, which is 0.8 meters in height and 0.4 meters away from the vertical wall of the shielded enclosure.

The EUT was powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150kHz to 30MHz with 20msec sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9KHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 – 40 centi-meters.

Each EME reported was calibrated using the R/S signal generator

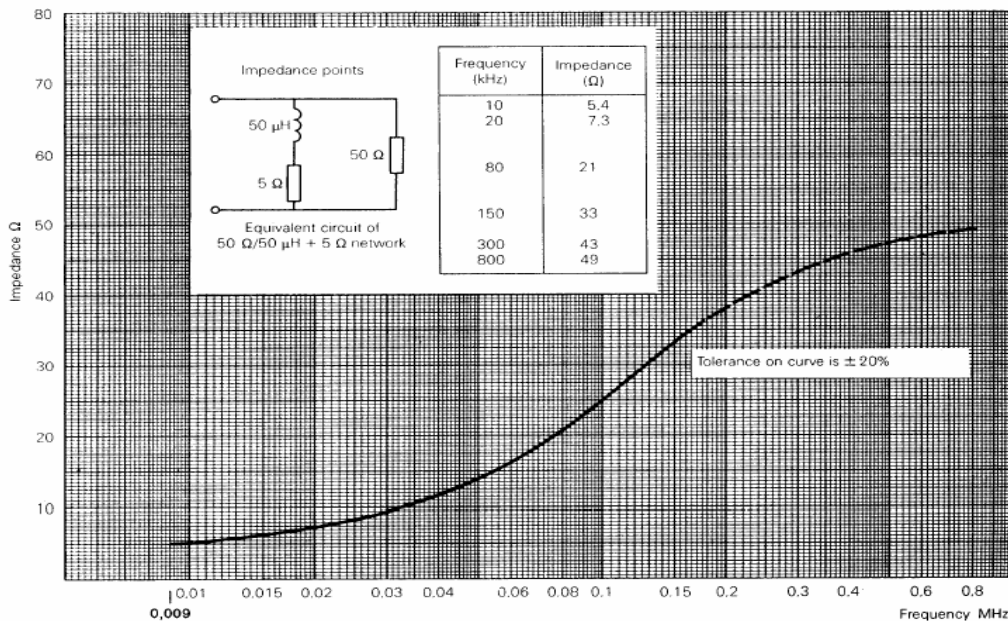


Fig 2. Impedance of LISN

5.2 Radiated Emission

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using biconical antenna (R&S, HK116) and log-periodic antenna (R&S, HL223).

Above 1GHz, calibrated double ridged horn antennas(Schwarzbeck, BBHA 9120D) were used.

Final measurements were made outdoors at 3 m-test range using biconical antenna (R&S, HK116) , log-periodic antenna (R&S, HL223)and calibrated double ridged horn antennas(Schwarzbeck, BBHA 9120D).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. (ESI)

The detector function was set to peak mode, the bandwidth of the receiver was set to 100KHz and 1MHz.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission. Each EME reported was calibrated using the R/S signal generator

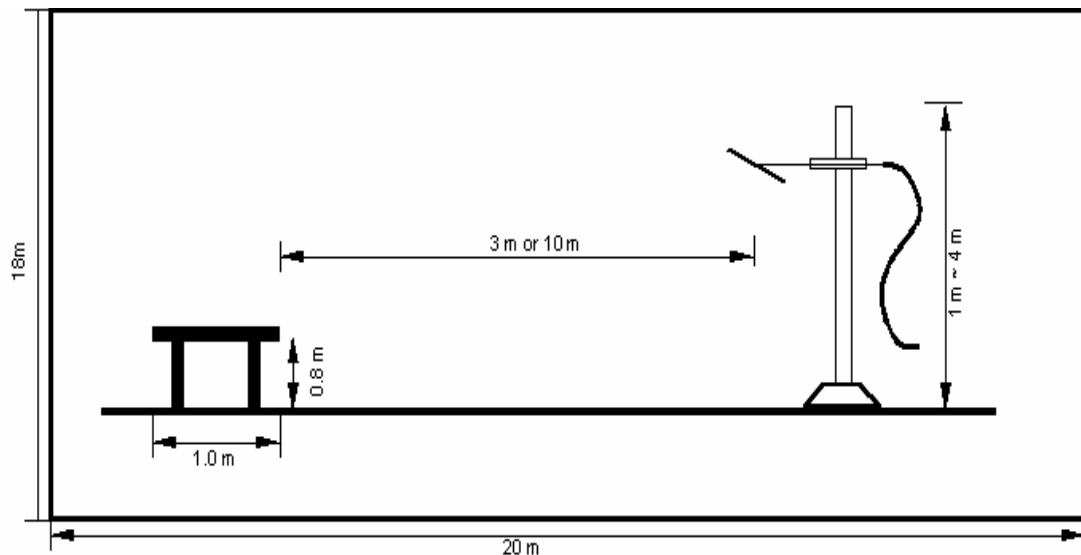


Fig 3. Dimensions of Open Site Test Area

5.3 Duty Cycle Correction

Measurements may be adjusted where pulsed RF is utilized to find the average level associated with a quantity.

This calculation is applied to limits for pulsed licensed and unlicensed devices.

For unlicensed intentional radiator under 47CFR Part 15 §15.35, all duty cycle measurements are compared to a 100 millisecond period.

On time = $N_1L_1 + N_2L_2 + \dots + N_nL_n$, where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

Duty Cycle = On time/100 millisecond.

5.4 Occupied Bandwidth

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. For device operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. The bandwidth is determined at the points 20dB down from the modulated carrier.

6. Conducted emission

6.1 Operating environment

Temperature : 26 °C
 Relative humidity : 56 %

6.2 Test set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall and 0.8m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, was filtered.

6.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (±dB)	
		Power Port	Communication port
Receiver specification	Rectangular	0.50	0.50
LISN coupling specification	Rectangular	1.50	
ISN coupling specification	Rectangular		1.50
Mismatch	U-shaped		
LISN VRC : $\Gamma_{l=}$ 0.20		0.05	0.05
ISN VRC : $\Gamma_{l=}$ 0.20		-0.05	-0.05
ATT VRC(IN) : $\Gamma_{g=}$ 0.03			
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$			
Mismatch	U-shaped		
Receiver VRC : $\Gamma_{l=}$ 0.09		0.09	0.09
ATT VRC : $\Gamma_{g=}$ 0.11		-0.09	-0.09
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$			
System repeatability	Std Deviation	0.11	0.11
Cable and input attenuator calibration	Normal (k=2)	0.04	0.04
Repeatability of EUT			
Combined standard uncertainty $U_c(y)$	Normal	0.92	0.92
		-0.92	-0.92
Extended uncertainty U	Normal (k=2)	1.85	1.85
		-1.85	-1.85

6.4 Limit

RFI Conducted	FCC Limit(dB) Class B	
Freq. Range	Quasi-Peak	Average
150kHz – 0.5MHz	66 – 56*	56 – 46*
0.5MHz – 5MHz	56	46
5MHz – 30MHz	60	50

*Limits decreases linearly with the logarithm of frequency.

6.5 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 17. 2004
■ - ESH3-Z5	Rohde & Schwarz	Artificial mains network	838979/020	12. 17. 2004
■ - ESH2-Z5	Rohde & Schwarz	Artificial mains network	829991/009	12. 17. 2004

6.5 Test data for conducted emission

6.5.1 Download mode

- Test Date : July 25, 2005
- Resolution bandwidth : 9kHz
- Frequency range : 0.15MHz ~ 30MHz
- AC Power Source : AC 120V, 60Hz / 5VDC (Lithium-ion Battery)

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.235	H	36.69	62.27	25.58	20.99	52.27	31.28
0.505	H	27.24	56.00	28.76	16.94	46.00	29.06
0.693	H	26.30	56.00	29.70	14.70	46.00	31.30
0.934	N	26.11	56.00	29.89	20.91	46.00	25.09
1.440	H	19.57	56.00	36.43	14.17	46.00	31.83
2.695	H	26.88	56.00	29.12	18.58	46.00	27.42
7.370	H	27.10	60.00	32.90	17.00	50.00	33.00
29.370	H	21.57	60.00	38.43	14.17	50.00	35.83

Comment: Pol: H(Live), N(Neut)

6.5.2 RF remote control mode

- Test Date : July 25, 2005
- Resolution bandwidth : 9kHz
- Frequency range : 0.15MHz ~ 30MHz
- AC Power Source : AC 120V, 60Hz / 5VDC (Lithium-ion Battery)

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.165	N	44.40	65.21	20.81	22.30	55.21	32.91
0.225	N	25.29	62.63	37.34	2.69	52.63	49.94
0.395	N	37.44	57.96	20.52	25.34	47.96	22.62
0.535	N	31.80	56.00	24.20	19.20	46.00	26.80
0.595	N	32.47	56.00	23.53	21.27	46.00	24.73
1.185	H	32.90	56.00	23.10	18.20	46.00	27.80
1.960	N	31.21	56.00	24.79	14.81	46.00	31.19

Comment: Pol: H(Live), N(Neut)

6.5.3 IR remote control mode

- Test Date : July 25, 2005
- Resolution bandwidth : 9kHz
- Frequency range : 0.15MHz ~ 30MHz
- AC Power Source : AC 120V, 60Hz / 5VDC (Lithium-ion Battery)

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0165	N	48.00	65.21	17.21	32.30	55.21	22.91
0.351	H	35.07	58.94	23.87	25.17	48.94	23.77
0.539	N	29.51	56.00	26.49	19.11	46.00	26.89
1.130	H	21.54	56.00	34.46	5.84	46.00	40.16
2.230	H	21.38	56.00	34.62	10.48	46.00	35.52

Comment: Pol: H(Live), N(Neut)

7. Duty Cycle Correction

7.1 Operating environment

Temperature : 23°C
Relative humidity : 57 %

7.2 Test set-up

The spectrum analyzer was set to Zero span and the video triggered to collect the pulse train of the modulation. Calculations of the duty cycle correction factor were obtained from time data provided by the plots.

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 17. 2004
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	11. 19. 2004

7.4 Test result of Duty Cycle

- Test Date : July 26, 2005
 - Reference standard : Part 15 Subpart C, Sec. 15.35
 - Operating condition : RF remote control mode
 - Spectrum resolution bandwidth(6dB) : 100 kHz
 - Power Source : AC 120V, 60Hz / 5VDC (Lithium-ion Battery)

Define of duty cycle

- Number of Code groups per 100ms = 1
 - Number of Wide Pulse = 1
 - Width of Pulses = 8.42ms
 - Number of Narrow Pulse = 340
 - Width of Pulses = 24.0µs

Calculation of duty cycle

- Total width of pulse train : $1 \times 8.42\text{ms} + 340 \times 24\mu\text{s} = 16.58\text{ms}$
 - Duty Cycle (%) : $16.58\text{ms} / 100\text{ms} = 16.58\%$
 - Duty Cycle (dB) : -15.61dB

Fundamental Frequency	Total width of ON-Time	Duty Cycle (%)	Duty Cycle (dB)
417.98 MHz	16.98 ms	16.98%	-15.40dB

Refer to APPENDIX B: Test Plots of complete Pulse Train

8. Radiated emission test

8.1 Operating environment

Temperature : 31 °C
 Relative humidity : 42 %

8.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber using the procedure in ANSI C63.4/2003 13.1.4.1 and found frequency for open area test site.

The formal radiated emission was measured at 3m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

8.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (dB)			
		Biconical Ant.		Log-periodic Ant.	
		3m	10m	3m	10m
Ambient signal					
Antenna factor calibration	Normal (k=2)	0.50	0.50	0.50	0.50
Receiver specification	Rectangular	0.50	0.50	0.50	0.50
Antenna directivity	Rectangular	0.25	0.00	1.50	0.25
Antenna phase center variation	Rectangular	0.00	0.00	1.00	0.20
Antenna factor frequency interpolation	Rectangular	0.25	0.25	0.25	0.25
Measure distance variation	Rectangular	0.60	0.40	0.60	0.40
Site imperfections	Rectangular	1.46	-2.32	2.26	2.94
Mismatch					
Receiver VRC : $\Gamma_l = 0.09$	U-shaped	0.33	0.33	0.33	0.33
Antenna VRC : $\Gamma_g = 0.43$ (Bi) 0.23 (Lp)		-0.35	-0.35	-0.18	-0.18
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$					
System repeatability	Std Deviation	0.18	0.18	0.17	0.17
Cable loss calibration	Normal (k=2)	0.05	0.05	0.05	0.05
Combined standard uncertainty $U_c(y)$	Normal	1.05	1.45	1.78	1.80
		-1.05	-1.45	-1.77	-1.78
Extended uncertainty U	Normal (k=2)	2.11	2.90	3.55	3.59
		-2.11	-2.90	-3.53	-3.57

8.4 Limit

Fundamental Frequency (MHZ)	Field strength of Fundamental			Field strength of Spurious Emission	
	uV/m	dBuV/m	uV/m	uV/m	dBuV/m
40.66~40.7	2250	67.04		225	47.04
70~130	1250	61.94		125	41.94
130~174	1250 to 3750	61.94 to 71.48	56.81818(F)-6136.3636	125 to 375	41.94 to 51.48
174~260	3750	71.48		375	51.48
260~470	3750 to 12500	71.48 to 81.94	41.6667(F)-7083.3333	375 to 1250	51.48 to 61.94
Above 470	12500	81.94		1250	61.94
Restricted Band	Refer to the clause 15.109 of FCC Part 15				

8.5 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 17. 2004
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 17. 2004
■ - HK116	Rohde & Schwarz	Biconical antenna	826861/018	11. 19. 2004
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	11. 19. 2004
■ - BBHA9120D	Schwarzbeck	horn antenna	207	11. 02. 2004
■ - HD100	HD GmbH	Position Controller	100/692/01	NCR
■ - DS415S	HD GmbH	Turntable	415/657/01	NCR
■ - MA240	HD GmbH	Antenna Mast	240/565/01	NCR

8.6 Radiated emission test data

8.6.1 RF remote control mode

- Test Date : July 26, 2005
- Reference standard : Part 15 Subpart C, Sec. 15.231
- Operating condition : Continuous transmitting
- Measuring Distance : 3m
- Spectrum resolution bandwidth (6dB) : 120kHz / 1MHz
- Detector mode : Peak detector mode / Average detector mode / Quasi-peak detector mode
- Power Source : AC 120V, 60Hz / 5VDC (Lithium-ion Battery)

♦ **Field Strength at the Fundamental frequency**

Frequency (MHz)	Ant. Pol. (H/V)	ANT Height (m)	Azimuth (Deg)	AFCL (dB/m)	Peak (dBuV/m)	Duty Cycle Correction (dB)	Average (dBuV/m)	Limits (dBuV/m)	Margin (dB)
417.98	H	246	306	21.15	92.00	-15.40	76.60	80.28	3.69

Note: "H": Horizontal, "V": Vertical

♦ **Field Strength at the Harmonic frequencies**


Frequency (MHz)	Ant. Pol. (H/V)	ANT Height (m)	Azimuth (Deg)	AFCL (dB/m)	Peak (dBuV/m)	Duty Cycle Correction (dB)	Average (dBuV/m)	Limits (dBuV/m)	Margin (dB)
835.94	H	311	71	27.88	70.80	-15.40	55.40	61.94	6.54
1253.00	V	144	78	-11.68	58.10	-15.40	42.70	61.94	19.24
1671.00	V	135	196	-8.99	62.70	-15.40	47.30	54.00	6.70
2089.00	H	169	180	-6.99	59.80	-15.40	44.40	61.94	17.54
2648.00	H	289	143	-4.23	56.10	-15.40	40.70	61.94	21.24
2926.00	H	311	184	-3.13	62.65	-15.40	47.25	61.94	14.69
3344.00	V	145	180	-1.84	70.30	-15.40	54.90	61.94	7.04
3761.00	V	187	221	-0.62	64.20	-15.40	48.80	54.00	5.20
4180.00	V	164	180	0.56	64.20	-15.40	48.80	54.00	5.20
4597.00	H	387	21	1.80	64.20	-15.40	48.80	54.00	5.20

Note: "H": Horizontal, "V": Vertical

◆ Field Strength of the spurious emission

Frequency (MHz)	Reading (dBuV/m)	Ant. Pol. (H/V)	Ant. Factor(dB)	Cable Loss	Quasi-peak (dBuV/m)	Limits (dBuV/m)	Margin (dB)
101.42	23.7	V	9.74	2.71	36.2	43.5	7.3
243.42	14.6	V	15.27	4.42	34.3	46.0	11.7
507.19	17.2	V	17.59	6.66	41.4	46.0	4.6
912.36	5.7	H	22.46	9.19	37.3	46.0	8.7

Note: "H": Horizontal, "V": Vertical

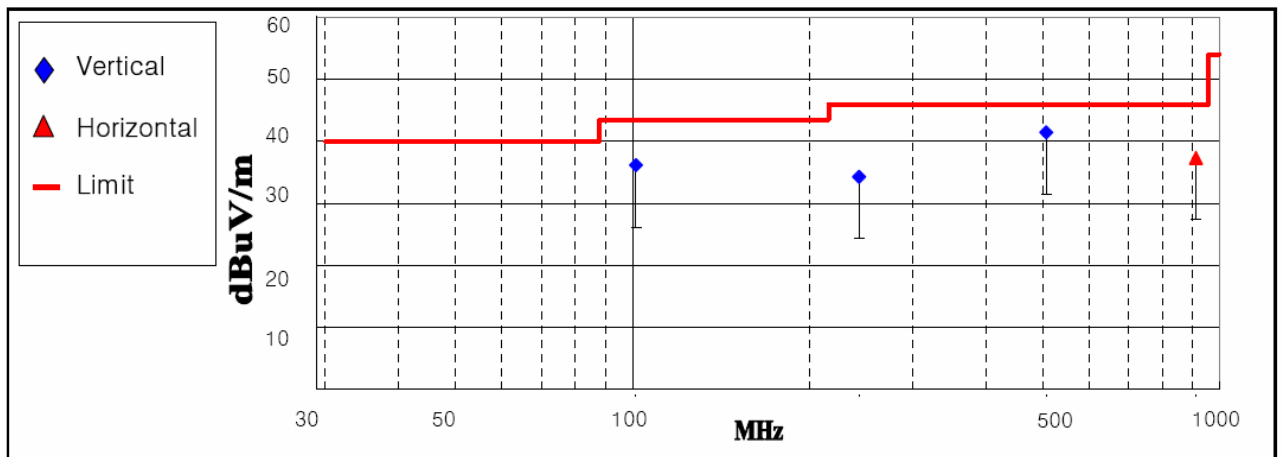


< Fig 5. Radiated emission result (30MHz ~ 1000MHz)>

◆ Field Strength of the spurious emission

Frequency (MHz)	Reading (dBuV)		Ant. Pol. (H/V)	AMP/CL (dB/m)	Test Result (dBuV/m)		Limits (dBuV/m)	Margin (dB)
	Peak	Average			Peak	Average		
2648.00	60.3	52.0	28.3	-32.5	56.1	47.8	54.0	6.2

Note: "H": Horizontal, "V": Vertical

"AMP/CL": Cable loss + AMP gain

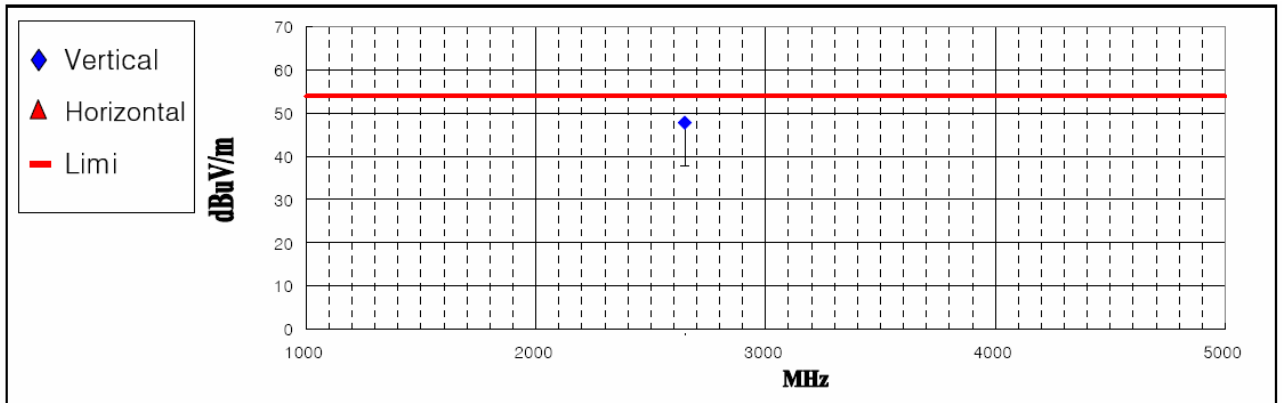


< Fig 6. Radiated Emission result (1000MHz ~ 5000MHz)>

8.6.2 IR remote control mode

- Test Date : July 26, 2005
- Reference standard : Part 15 Subpart B, Sec. 15.107, 15.109
- Operating condition : Continuous transmitting
- Measuring Distance : 3m
- Spectrum resolution bandwidth (6dB) : 120kHz
- Detector mode : Quasi-peak detector mode
- Power Source : AC 120V, 60Hz / 5VDC (Lithium-ion Battery)

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor(dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
101.40	21.9	V	9.74	2.71	34.4	43.5	9.1
243.18	19.2	V	15.26	4.42	38.9	46.0	7.1
253.56	14.6	V	15.51	4.54	34.7	46.0	11.3
456.42	19.1	V	16.72	6.38	42.2	46.0	3.8
514.20	16.1	V	17.52	6.71	40.3	46.0	5.7

Note: "H": Horizontal, "V": Vertical

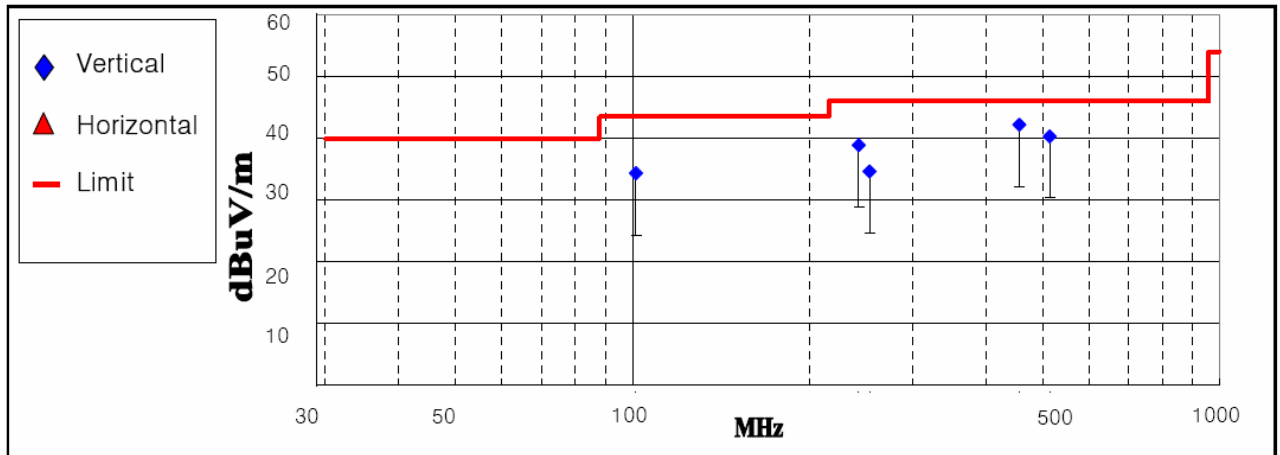


< Fig 7. Radiated emission result >

8.6.3 Download mode

- Test Date : July 26, 2005
- Reference standard : Part 15 Subpart B, Sec. 15.107, 15.109
- Operating condition : Downloading the file from the PC
- Measuring Distance : 3m
- Spectrum resolution bandwidth (6dB) : 120kHz
- Detector mode : Quasi-peak detector mode
- Power Source : AC 120V, 60Hz / 5VDC (Lithium-ion Battery)

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor(dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
60.00	15.9	V	8.64	2.10	26.6	40.0	13.4
497.76	14.2	V	17.61	6.59	38.4	46.0	7.6
746.70	5.2	V	21.38	8.18	34.8	46.0	11.2

Note: "H": Horizontal, "V": Vertical

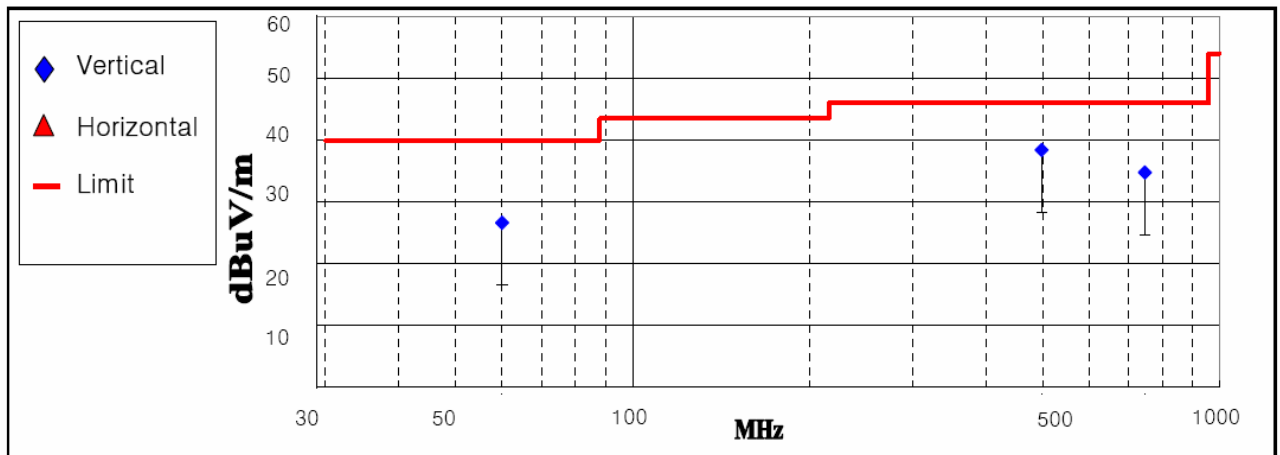

< Fig 8. Radiated emission result >

9. Occupied Bandwidth Measurement

9.1 Operating environment

Temperature : 31 °C
 Relative humidity : 42 %

9.2 Test set-up

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 86.8kHz/division frequency span, 100kHz 6dB resolution bandwidth and 5dB/division logarithmic display from an ESI spectrum analyzer. The measuring bandwidth shall be set to a value greater than 5% of the allowed bandwidth(ANSI C63.4-2003 I6)

9.3 Limit

Frequency Range(MHz)	Occupied Bandwidth Limit
70 ~ 900 MHz	0.25%
>900 MHz	0.5%

9.4 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 17. 2004
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	11. 19. 2004

9.5 Test result of occupied bandwidth

- Test Date : July 26, 2005
 - Reference standard : Part 15 Subpart C, Sec. 15.231
 - Operating condition : RF transmitting continuously
 - Spectrum resolution bandwidth(6dB) : 100 kHz
 - Power Source : 5VDC (Lithium-ion Battery)

Allowed Bandwidth : $417.98 \times 0.0025 = 1.045$ MHz

Fundamental Frequency	Bandwidth	Allowed Bandwidth	Result
417.98 MHz	422.0 kHz	1.045 MHz	PASS

Refer to APPENDIX B: Test Plots of occupied bandwidth

10. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

OHSUNG ELECTRONICS CO., LTD. RF Transmitter Universal Remote Control (Model No.: MX-3000-N3)
was complies with §15.107, §15.109 and §15.231 of the FCC Rules.