




APPENDIX B

: TEST PLOTS



◆ Occupied bandwidth

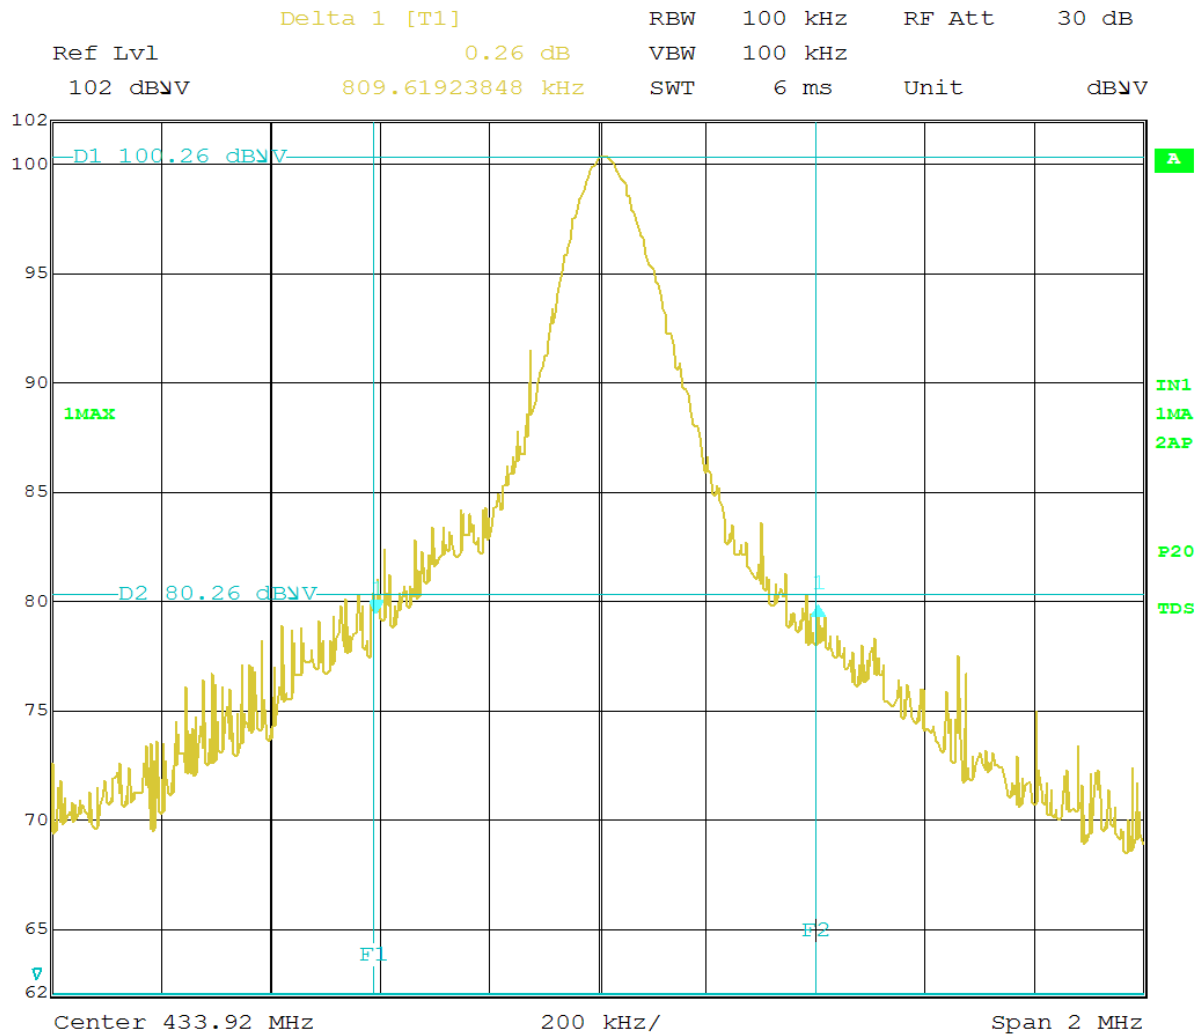


Date: 09.SEP.2009 17:45:22

(433.92 MHz)



◆ Complete Pulse Train/ On-time of the Head

1. NEC Format (15A_002)

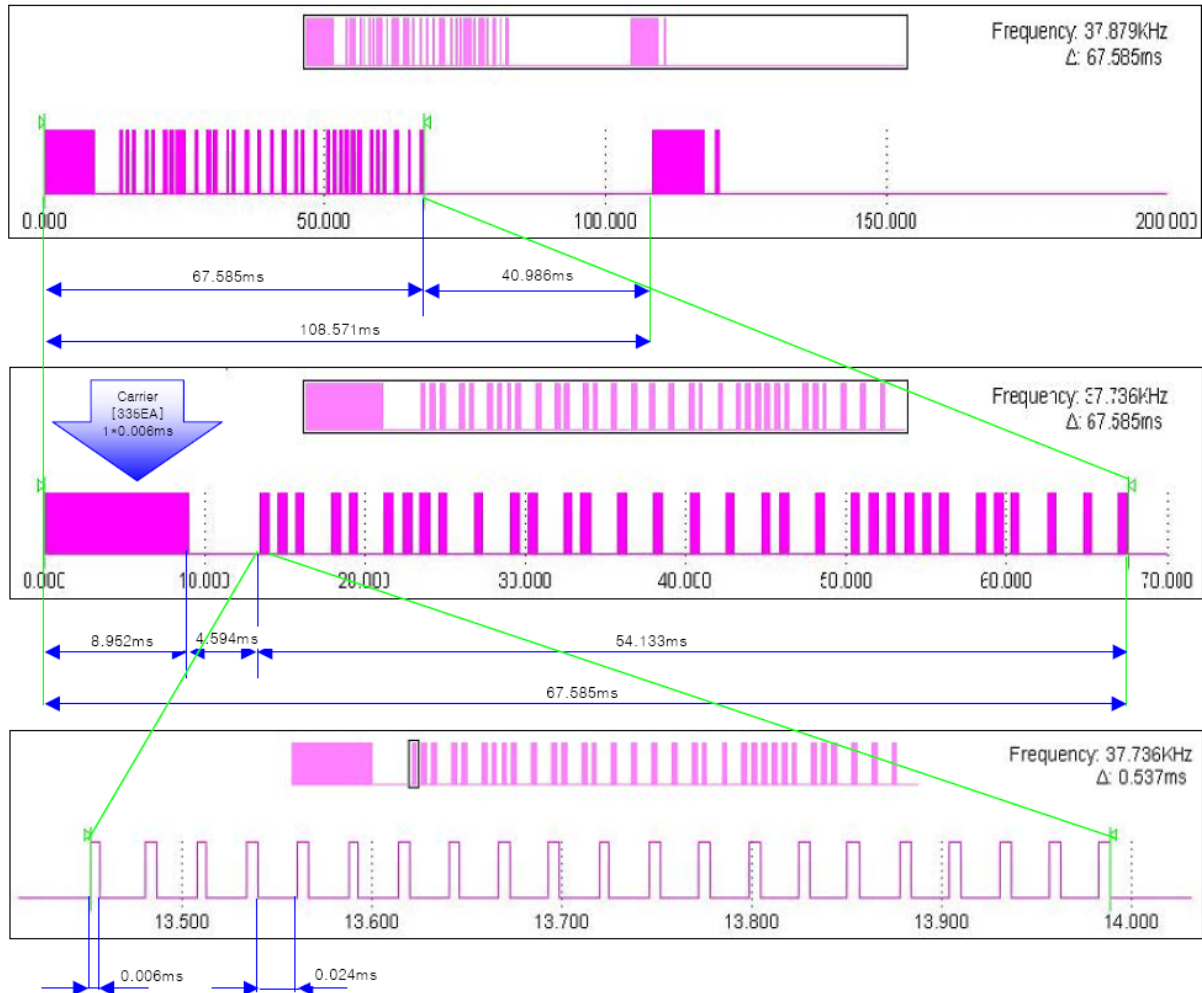


No. of code GR. Per 100ms	Head		Data		Total Width(ms)	Duty Cycle	
	No. of pulse	Width of pulse(ms)	No. of pulse	Width of pulse(ms)		(%)	(dB)
	335	0.006ms	693	0.006ms	6.168	6.17%	-24.20

계산식 : $(335 \times 0.006) + (693 \times 0.006) = 6.168$ [693 = (1 * 33 * 21)]



2. TC9012 Format (14A_044)

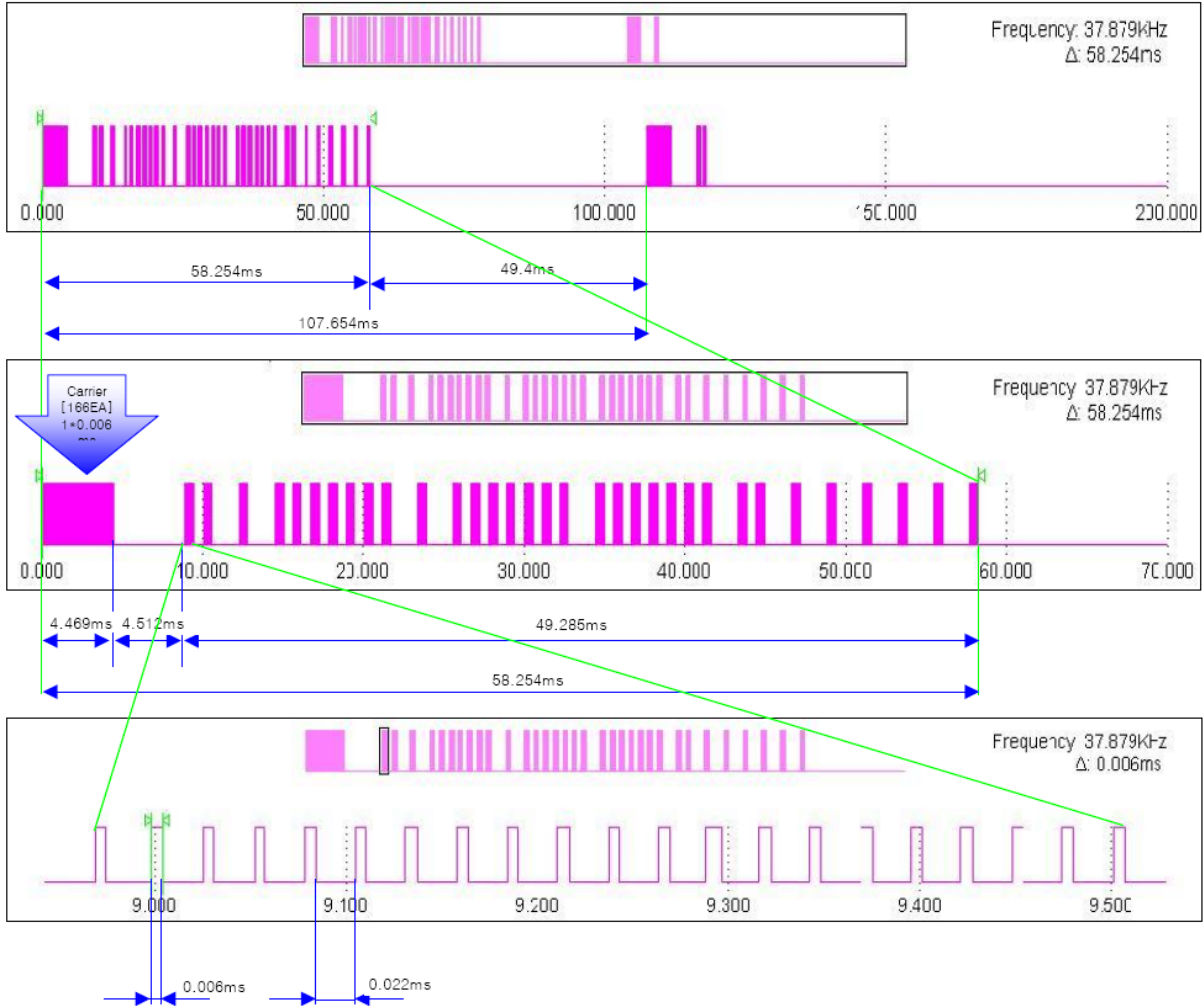


No. of code GR. Per 100ms	Head		Data		Total Width(ms)	Duty Cycle	
	No. of pulse	Width of pulse(ms)	No. of pulse	Width of pulse(ms)		(%)	(dB)
	166	0.006ms	693	0.006ms	5.15	5.15%	-25.757

계산식 : (166*0.006)+(693*0.006) = 5.154 [693 = (1*33*21)]



3. MN6014 Format (18A_052)

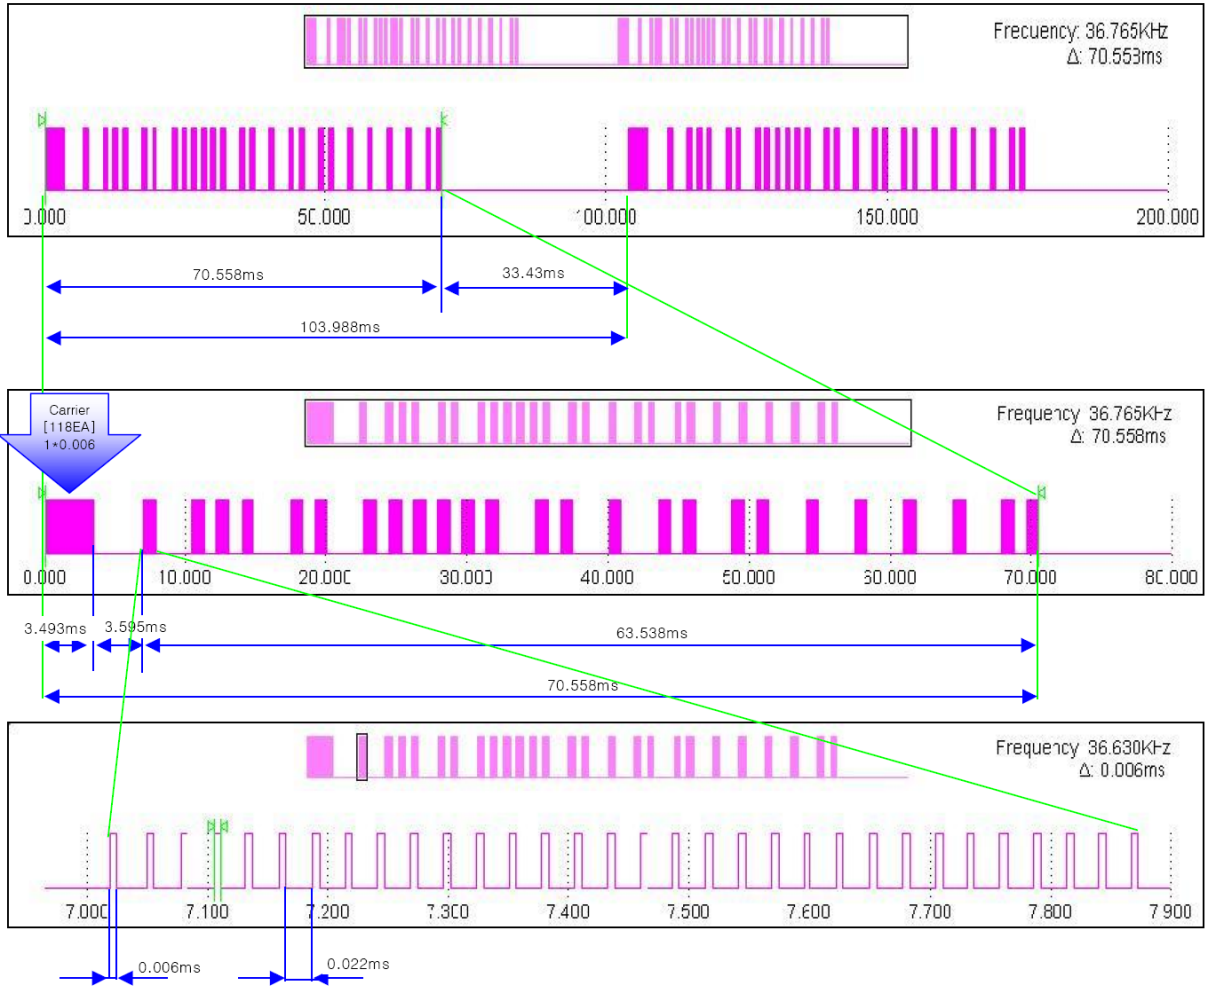

No. of code GR. Per 100ms	Head		Data		Total Width(ms)	Duty Cycle	
	No. of pulse	Width of pulse(ms)	No. of pulse	Width of pulse(ms)		(%)	(dB)
	118	0.006ms	825	0.006ms	5.658	5.66%	-24.94

계산식 : $(118 \times 0.006) + (825 \times 0.006) = 5.658$ [825 = (1 * 33 * 25)]