

## ***FCC EVALUATION REPORT FOR CERTIFICATION***

**Manufacturer : OHSUNG ELECTRONICS CO., LTD.**

**Date of Issue : June 2, 2009**

**#181 Gongdan-dong, Gumi-si, Gyeongbuk**

**Order Number: GETEC-C1-09-119**

**Republic of Korea.**

**Test Report Number: GETEC-E3-09-066**

**Attn : Mr. Kwang-Jae Ok / Team Leader of Q.C**

**Test Site: Gumi College EMC Center**

**FCC Registration Number: (100749, 443957)**

**FCC ID.: OZ5URCMX5000**

**Applicant: OHSUNG ELECTRONICS CO., LTD.**

|                          |  |
|--------------------------|--|
| <b>Rule Part(s)</b>      | <b>: FCC Part 15 Subpart C-Intentional Radiator § 15.231</b> |
| <b>Equipment Class</b>   | <b>: Remote Control Transmitter (DSC)</b>                    |
| <b>EUT Type</b>          | <b>: RF Remote Controller</b>                                |
| <b>Type of Authority</b> | <b>: Certification</b>                                       |
| <b>Model Name</b>        | <b>: MX-5000</b>   |
| <b>Trade Name</b>        | <b>: UNIVERSAL remote control</b>                            |

**This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003**

**I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.**

**Tested by,**

**Reviewed by,**



**Hyoung Seop Kim, Associate Engineer**  
**GUMI College EMC center**



**Tae-Sig Park, Technical Manager**  
**GUMI College EMC center**



## CONTENTS

|  |    |
|--|----|
| 1. GENERAL INFORMATION .....                 | 4  |
| 2. INTRODUCTION .....                        | 5  |
| 3. PRODUCT INFORMATION .....                 | 6  |
| 3.1 DESCRIPTION OF EUT.....                  | 6  |
| 3.2 SUPPORT EQUIPMENT / CABLES USED .....    | 7  |
| 3.3 MODIFICATION ITEM(S) .....               | 7  |
| 4. ANTENNA REQUIREMENT - §15.203 .....       | 7  |
| 4.1 DESCRIPTION OF ANTENNA.....              | 7  |
| 5. INTERMODULATION COMPLIANCE STATEMENT..... | 8  |
| 6. DESCRIPTION OF TESTS.....                 | 8  |
| 6.1 TEST CONDITION.....                      | 8  |
| 6.2 CONDUCTED EMISSION .....                 | 9  |
| 6.3 RADIATED EMISSION.....                   | 10 |
| 6.4 DUTY CYCLE CORRECTION .....              | 11 |
| 6.5 OCCUPIED BANDWIDTH .....                 | 11 |
| 7. CONDUCTED EMISSION.....                   | 12 |
| 7.1 OPERATING ENVIRONMENT .....              | 12 |
| 7.2 TEST SET-UP .....                        | 12 |
| 7.3 MEASUREMENT UNCERTAINTY.....             | 12 |
| 7.4 LIMIT .....                              | 13 |
| 7.5 TEST EQUIPMENT USED .....                | 13 |
| 7.6 TEST DATA FOR CONDUCTED EMISSION .....   | 13 |
| 8. DUTY CYCLE CORRECTION.....                | 16 |
| 8.1 OPERATING ENVIRONMENT .....              | 16 |
| 8.2 TEST SET-UP .....                        | 16 |
| 8.3 TEST EQUIPMENT USED.....                 | 16 |
| 8.4 TEST RESULT OF DUTY CYCLE.....           | 16 |
| 9. RADIATED EMISSION .....                   | 17 |
| 9.1 OPERATING ENVIRONMENT .....              | 17 |
| 9.2 TEST SET-UP.....                         | 17 |
| 9.3 MEASUREMENT UNCERTAINTY .....            | 17 |
| 9.4 LIMIT .....                              | 18 |
| 9.5 TEST EQUIPMENT USED .....                | 18 |
| 9.6 RADIATED EMISSION TEST DATA .....        | 19 |
| 10. OCCUPIED BANDWIDTH MEASUREMENT.....      | 22 |
| 10.1 OPERATING ENVIRONMENT .....             | 22 |
| 10.2 TEST SET-UP .....                       | 22 |
| 10.3 LIMIT .....                             | 22 |
| 10.4 TEST EQUIPMENT USED.....                | 22 |
| 10.5 TEST RESULT OF OCCUPIED BANDWIDTH.....  | 22 |
| 11. SAMPLE CALCULATIONS .....                | 23 |
| 11.1 EXAMPLE 1 : .....                       | 23 |
| 11.2 EXAMPLE 2 : .....                       | 23 |



**12. RECOMMENDATION & CONCLUSION.....24**

**APPENDIX A – ATTESTATION STATEMENT**

**APPENDIX B – TEST PLOTS**

**APPENDIX C – ID SAMPLE LABEL & LOCATION**

**APPENDIX D – BLOCK DIAGRAM**

**APPENDIX E – SCHEMATIC DIAGRAM**

**APPENDIX F – TEST SET-UP PHOTOGRAPHS**

**APPENDIX G – EXTERNAL PHOTOGRAPHS**

**APPENDIX H –INTERNAL PHOTOGRAPHS**

**APPENDIX I – USER’S MANUAL**

**APPENDIX J – OPERATIONAL DESCRIPTION FOR 418 MHz**



*Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.*

## 1. General Information

**Applicant: OHSUNG ELECTRONICS CO., LTD.**

**Applicant Address: #181 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea.**

**Manufacturer: OHSUNG ELECTRONICS CO., LTD.**

**Manufacturer Address: #181 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea.**

**Contact Person: Mr. Kwang-Jae Ok / Team Leader Q.C**

**Tel Number: +82-54-468- 0831 Fax Number: +82-54- 461- 8368**

- **FCC ID.** OZ5URCMX5000
- **Equipment Class** Remote Control Transmitter (DSC)
- **EUT Type** RF Remote Controller
- **Power Source** AC 120 V / 60 Hz,  
DC 3.7 V / 2400 mAh Rechargeable Lithium Polymer Battery
- **Model Name** MX-5000
- **Trade Name** UNIVERSAL remote control
- **Rule Part(s)** FCC Part 15, Subpart C-Intentional Radiator § 15.231
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003)
- **Dates of Test** May 19~20, 2008
- **Place of Test** **Gumi College EMC Center** ( FCC Registration No.: 100749, 443957)  
407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea.
- **Test Report Number** GETEC-E3-09-066
- **Dates of Issue** June 2, 2008

**EUT Type: RF Remote Controller**

**FCC ID.: OZ5URCMX5000**




## 2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **OHSUNG ELECTRONICS CO., LTD. RF Remote Controller (Model Name: MX-5000)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-dong, Gumi-si, Gyeongsangbuk-do, Korea.

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of FCC §2.948 according to ANSI C63.4 (2003).

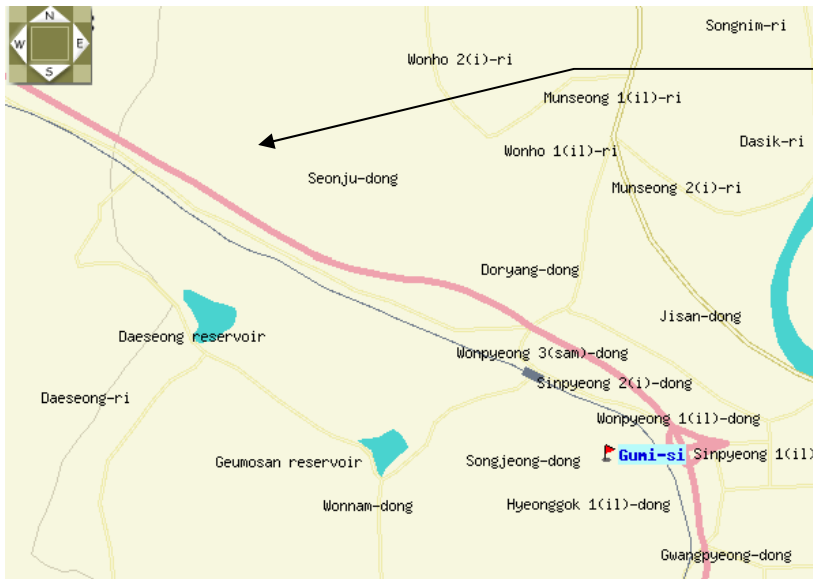

**GUMI COLLEGE EMC CENTER**  
407, Bugok-dong, Gumi-si,  
Gyeongbuk 730-711, Korea.  
Tel: +82-54-440-1195  
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.



### 3. Product Information

#### 3.1 Description of EUT

The equipment under test (EUT) is the **OHSUNG ELECTRONICS CO., LTD. RF Remote Controller (Model Name: MX-5000) FCC ID.: OZ5URCMX5000**

The RF Remote Controller has 2 type of RF module.

One is 418 MHz ASK module and the other is 2-way Wi-Fi.

This Report is for 418 MHz ASK module the next report (No. GETEC-E3-09-067) is for Wi-Fi module.

|                                      |  |
|--------------------------------------|--|
| <b>Used AC/DC Adapter</b>            | : KSAD0600200W1US(UNIVERSAL remote control)<br>Input: AC (100-240) V, (50/60) Hz, 0.4 A<br>Output: DC 6 V, 2.0 A |
| <b>RF Frequency</b>                  | : 418 MHz, 2.4 GHz   |
| <b>External Connector</b>            | : USB, DC in, Charger signal   |
| <b>Crystal &amp; Clock Frequency</b> | : 133 MHz, 48 MHz, 12 MHz, 32.768 kHz, 8 MHz ,<br>13.0625 MHz on Main board B'D                                  |
| <b>Number of Layer</b>               | : 6 Layer  |

Microprocessor: 533MHz ARM9  
 RAM: 128Mbyte Mobile DDR  
 NAND: 64Mbyte  
 LCD: 2.8 Inch Screen (240 by 320)  
 LCD Backlighting by LED  
 Sound: mono 1 watt  
 USB: 2.0  
 Devices - Supports up to 255 Devices with text, less with heavy graphics usage  
 Pages - Supports up to 255 Pages on each Device with text, less with heavy graphics usage  
 Learning Capability - Standard frequencies (20kHz to 455kHz)  
 Macro Capability - Up to 255 steps each, however nesting is allowed

IR Range (Line of Sight via Infrared):  
 30-50 feet, depending on the environment  
 RF Frequency: 418MHz  
 RF Range (radio frequency): 50 to 100 feet, depending upon the environment  
 Wi-Fi: IEEE 802.11 B (11Mps), G (54Mps)  
 Battery: Lithium Ion, 2400mAh  
 Battery Capacity: 4 hours continuous use, 9 days standby  
 Battery Charging Time: 5 Hours  
 Dimensions: 8.8" Height x 2.3" Wide x 0.9 Thick  
 Battery Warranty : 1 Year  
 Weight (without AC Adapter): 7.8 oz



### 3.2 Support Equipment / Cables used

#### 3.2.1 Used Support Equipment

| Description | Manufacturer                  | Model Name     | S/N & FCC ID                    |
|-------------|-------------------------------|----------------|---------------------------------|
| Cradle      | Universal Remote control Inc. | MX-5000 cradle | S/N : A903-1888A<br>FCC ID: DoC |

*See "Appendix F – Test Setup Photographs" for actual system test set-up*

#### 3.2.2 Used Cable(s)

| Cable Name    | Condition                             | Description       |
|---------------|---------------------------------------|-------------------|
| Adapter cable | Connected to the EUT and Power supply | 1.95 m unshielded |

### 3.3 Modification Item(s)

-. None

## 4. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

### 4.1 Description of Antenna

The **OHSUNG ELECTRONICS CO., LTD RF Transmitter Universal Remote Control** comply with the requirement of §15.203 with a built-in looped antenna permanently attached to the transmitter.




## 5. Intermodulation Compliance Statement

The two transmitters can be operated simultaneously but, do not share a common antenna.

Therefore, according to the “EMC Co-locatin Testing Poilcy”, Intermodulation test does not be required.

Although the test could be skipped, we conducted intermodulation test and there was no distortion observed.

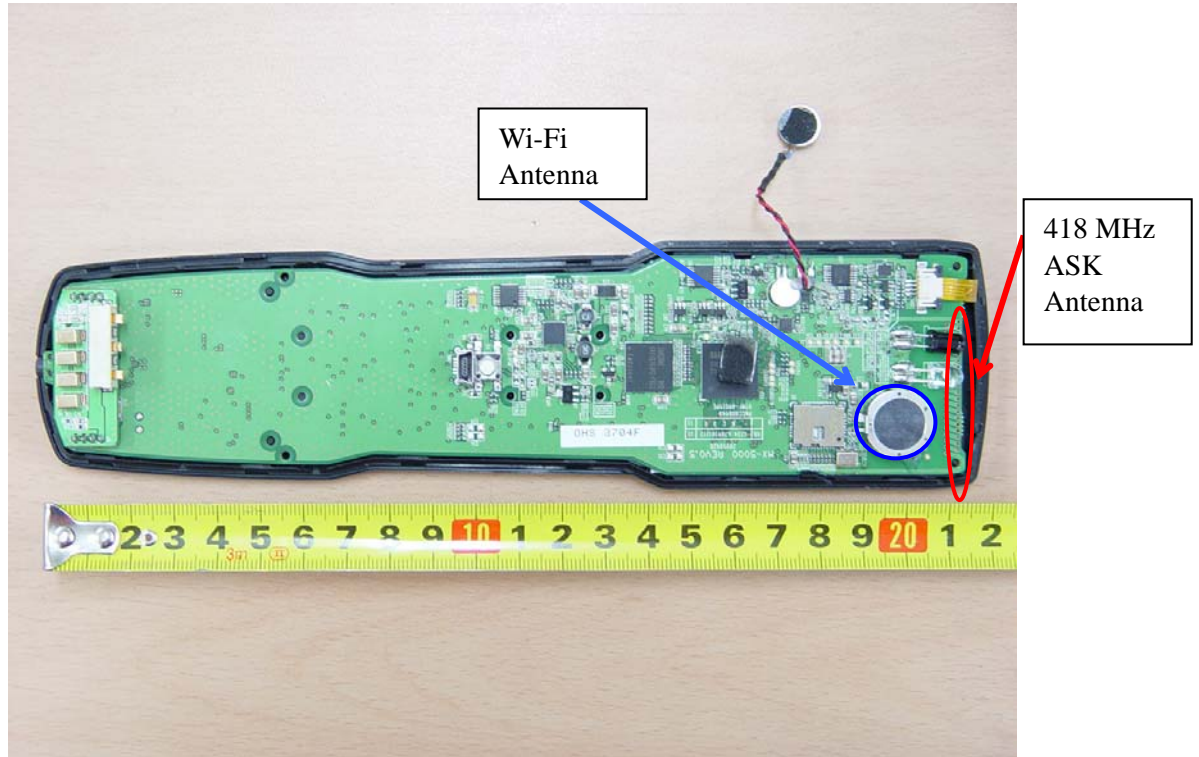

## 6. Description of tests

### 6.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used.

The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

Test Voltage / Frequency: AC 120 V / 60 Hz

DC 3.7 V / 2400 mAh Rechargeable Lithium Polymer Battery

- Test Mode(s)
  - . RF transmitting mode: Continuous RF transmitting mode





## 6.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Registration No.: 100749)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30 MHz with 20 ms sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

Each EME reported was calibrated using the R/S signal generator

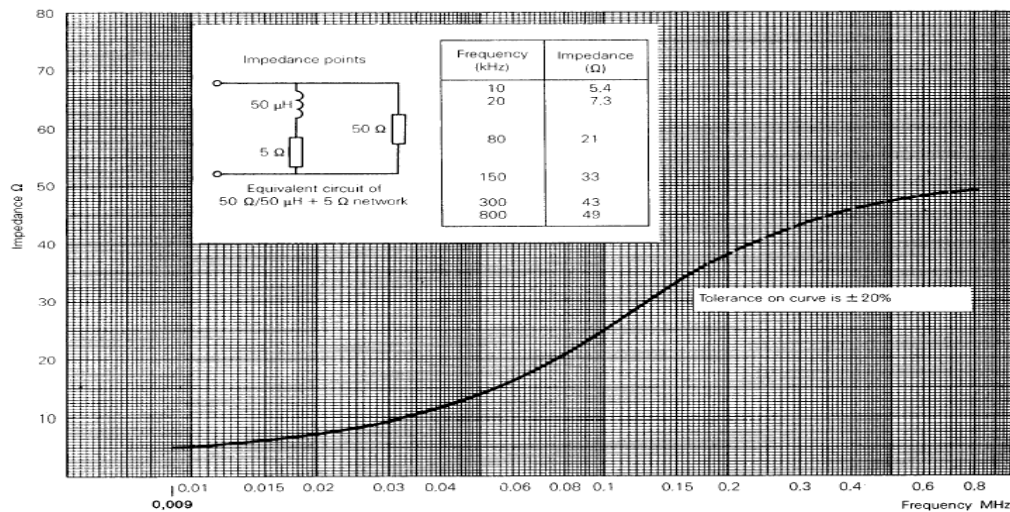


Fig 2. Impedance of LISN



### 6.3 Radiated Emission

The measurements were conducted in a 3 m anechoic chamber (FCC Registration No.: 443957) using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was noted for each frequency found.

The spectrum was scanned from 30 to 1000 MHz, using a biconical log antenna (Schwarzbeck, VULB9160).

Above 1 GHz, a horn antenna (Schwarzbeck, BBHA9120D / EMCO 3160) was used.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using an EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied from 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

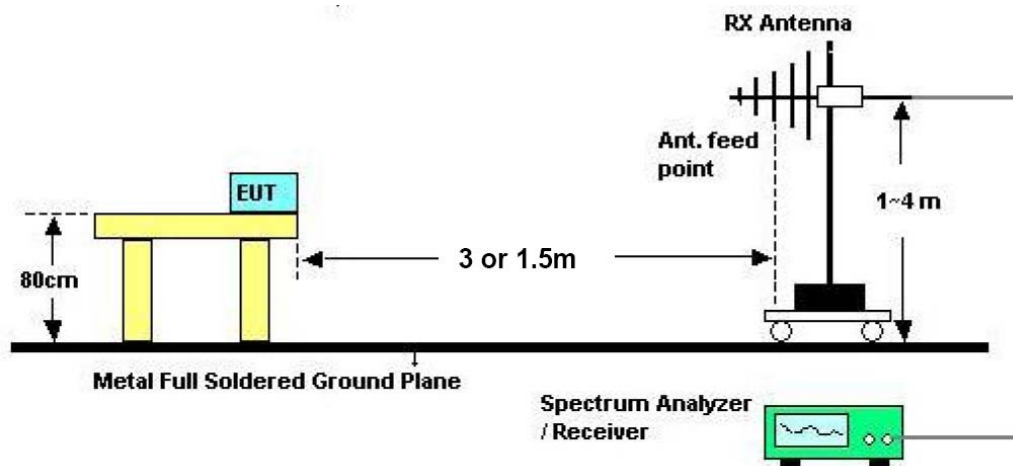


Fig 3. Dimensions of test site.



#### **6.4 Duty Cycle Correction**

Measurements may be adjusted where pulsed RF is utilized to find the average level associated with a quantity.

This calculation is applied to limits for pulsed licensed and unlicensed devices.

For unlicensed intentional radiator under 47CFR Part 15 §15.35, all duty cycle measurements are compared to a 100 millisecond period.

On time =  $N_1L_1 + N_2L_2 + \dots + N_nL_n$ , where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.

**Duty Cycle = On time/100 millisecond.**

#### **6.5 Occupied Bandwidth**

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

The bandwidth of the emission shall be no wider than 0.25 % of the center frequency for device operating above 70 MHz and below 900 MHz. For device operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. The bandwidth is determined at the points 20 dB down from the modulated carrier.



## 7. Conducted Emission

### 7.1 Operating Environment

Temperature : 23 °C  
Relative humidity : 37 %R.H.

### 7.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

### 7.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

| Test Items                            | Uncertainty | Remark                          |
|---------------------------------------|-------------|---------------------------------|
| Conducted emission (9 kHz ~ 150 kHz)  | ± 2.97 dB   | Confidence levels of 95 % (k=2) |
| Conducted emission (150 kHz ~ 30 MHz) | ± 4.05 dB   | Confidence levels of 95 % (k=2) |



#### 7.4 Limit

| RFI Conducted     | FCC Limit(dB) Class B |          |
|-------------------|-----------------------|----------|
|                   | Quasi-Peak            | Average  |
| Freq. Range       |                       |          |
| 150 kHz ~ 0.5 MHz | 66 ~ 56*              | 56 ~ 46* |
| 0.5 MHz ~ 5 MHz   | 56                    | 46       |
| 5 MHz ~ 30 MHz    | 60                    | 50       |

\*Limits decreases linearly with the logarithm of frequency.

#### 7.5 Test Equipment Used

| Model Name  | Manufacturer    | Description       | Serial Number | Due to Calibration |
|-------------|-----------------|-------------------|---------------|--------------------|
| ■ - ESCS30  | Rohde & Schwarz | EMI test receiver | 839809/003    | 12. 13. 2009       |
| ■ - ESH3-Z5 | Rohde & Schwarz | LISN              | 838979/020    | 12. 12. 2009       |


#### 7.6 Test data for Conducted Emission

##### 7.6.1 Test mode: RF transmitting mode.

- Test Date : May 20, 2008
- Resolution Bandwidth : 9 kHz
- Frequency Range : 0.15 MHz ~ 30 MHz



### Voltage with 4-Line-LISN\_L1

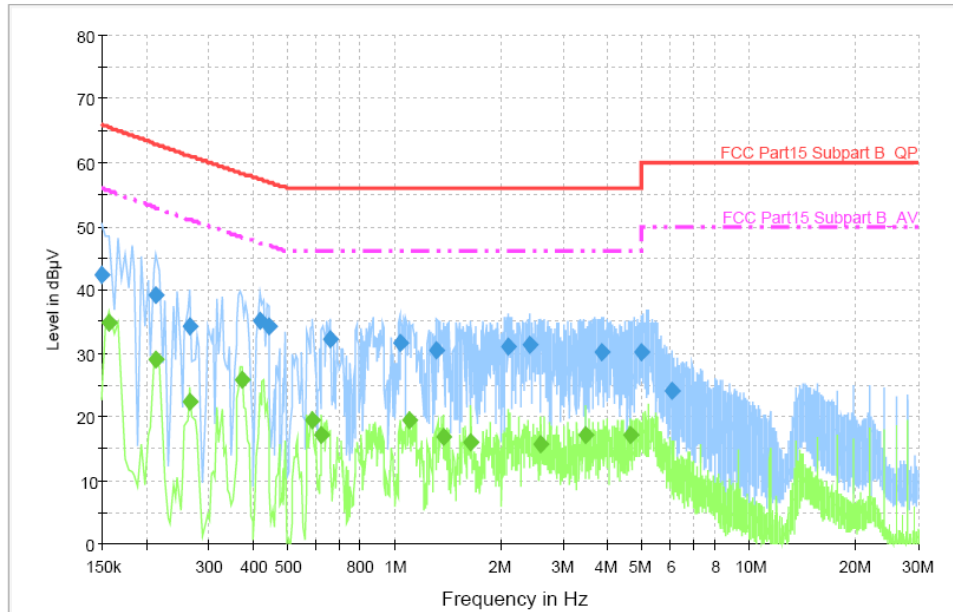

### Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|------------------|-----------------|-----------------|-----|------|------------|-------------|--------------|---------|
| 0.150000        | 42.3             | 1000.000        | 9.000           | GND | L1   | 9.9        | 23.7        | 66.0         |         |
| 0.214000        | 39.1             | 1000.000        | 9.000           | GND | L1   | 9.9        | 23.8        | 62.9         |         |
| 0.266000        | 34.1             | 1000.000        | 9.000           | GND | L1   | 10.0       | 26.9        | 61.0         |         |
| 0.418000        | 35.2             | 1000.000        | 9.000           | GND | L1   | 10.0       | 22.2        | 57.4         |         |
| 0.442000        | 34.1             | 1000.000        | 9.000           | GND | L1   | 10.0       | 22.9        | 57.0         |         |
| 0.658000        | 32.3             | 1000.000        | 9.000           | GND | L1   | 10.0       | 23.7        | 56.0         |         |
| 1.038000        | 31.7             | 1000.000        | 9.000           | GND | L1   | 10.0       | 24.3        | 56.0         |         |
| 1.322000        | 30.3             | 1000.000        | 9.000           | GND | L1   | 10.0       | 25.7        | 56.0         |         |
| 2.094000        | 31.0             | 1000.000        | 9.000           | GND | L1   | 10.1       | 25.0        | 56.0         |         |
| 2.422000        | 31.2             | 1000.000        | 9.000           | GND | L1   | 10.1       | 24.8        | 56.0         |         |
| 3.826000        | 30.2             | 1000.000        | 9.000           | GND | L1   | 10.2       | 25.8        | 56.0         |         |
| 4.986000        | 30.2             | 1000.000        | 9.000           | GND | L1   | 10.2       | 25.8        | 56.0         |         |
| 6.062000        | 24.0             | 1000.000        | 9.000           | GND | L1   | 10.2       | 36.0        | 60.0         |         |


### Final Measurement Detector 2

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|----------------|-----------------|-----------------|-----|------|------------|-------------|--------------|---------|
| 0.158000        | 34.7           | 1000.000        | 9.000           | GND | L1   | 9.9        | 20.8        | 55.5         |         |
| 0.214000        | 28.9           | 1000.000        | 9.000           | GND | L1   | 9.9        | 23.9        | 52.8         |         |
| 0.266000        | 22.4           | 1000.000        | 9.000           | GND | L1   | 10.0       | 28.6        | 51.0         |         |
| 0.374000        | 25.8           | 1000.000        | 9.000           | GND | L1   | 10.0       | 22.4        | 48.2         |         |
| 0.586000        | 19.5           | 1000.000        | 9.000           | GND | L1   | 10.0       | 26.5        | 46.0         |         |
| 0.626000        | 17.1           | 1000.000        | 9.000           | GND | L1   | 10.0       | 28.9        | 46.0         |         |
| 1.098000        | 19.3           | 1000.000        | 9.000           | GND | L1   | 10.0       | 26.7        | 46.0         |         |
| 1.378000        | 16.7           | 1000.000        | 9.000           | GND | L1   | 10.0       | 29.3        | 46.0         |         |
| 1.650000        | 16.0           | 1000.000        | 9.000           | GND | L1   | 10.1       | 30.0        | 46.0         |         |
| 2.598000        | 15.6           | 1000.000        | 9.000           | GND | L1   | 10.1       | 30.4        | 46.0         |         |
| 3.470000        | 17.2           | 1000.000        | 9.000           | GND | L1   | 10.1       | 28.8        | 46.0         |         |
| 4.658000        | 17.0           | 1000.000        | 9.000           | GND | L1   | 10.2       | 29.0        | 46.0         |         |

< Fig 4. Conducted emission result (Live line)>



### Voltage with 4-Line-LISN\_N

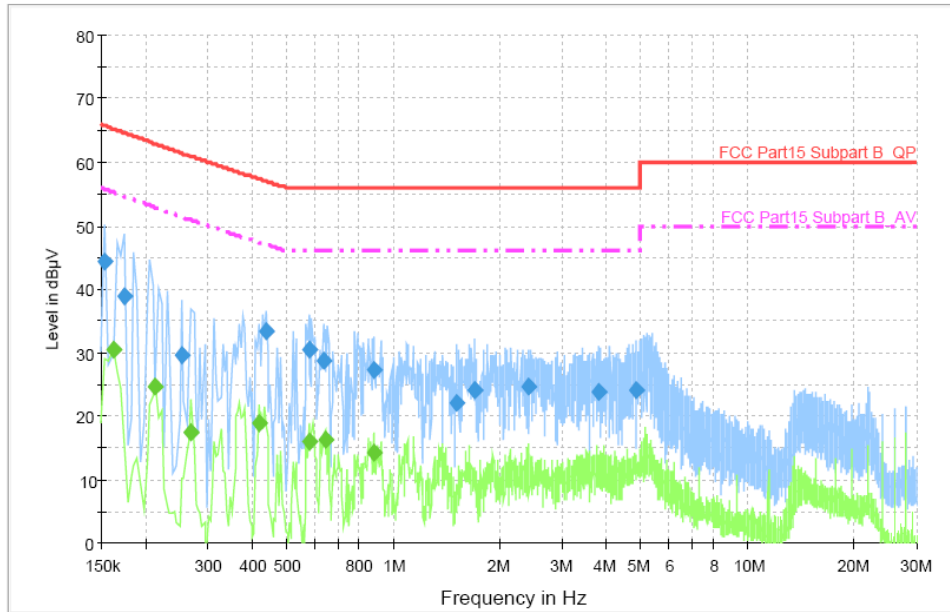

### Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|------------------|-----------------|-----------------|-----|------|------------|-------------|--------------|---------|
| 0.154000        | 44.3             | 1000.000        | 9.000           | GND | N    | 9.9        | 21.5        | 65.8         |         |
| 0.174000        | 38.8             | 1000.000        | 9.000           | GND | N    | 9.9        | 25.9        | 64.7         |         |
| 0.254000        | 29.4             | 1000.000        | 9.000           | GND | N    | 10.0       | 32.0        | 61.4         |         |
| 0.438000        | 33.4             | 1000.000        | 9.000           | GND | N    | 10.0       | 23.6        | 57.0         |         |
| 0.578000        | 30.4             | 1000.000        | 9.000           | GND | N    | 10.0       | 25.6        | 56.0         |         |
| 0.634000        | 28.6             | 1000.000        | 9.000           | GND | N    | 10.0       | 27.4        | 56.0         |         |
| 0.882000        | 27.2             | 1000.000        | 9.000           | GND | N    | 10.0       | 28.8        | 56.0         |         |
| 1.514000        | 22.1             | 1000.000        | 9.000           | GND | N    | 10.1       | 33.9        | 56.0         |         |
| 1.698000        | 24.0             | 1000.000        | 9.000           | GND | N    | 10.1       | 32.0        | 56.0         |         |
| 2.402000        | 24.5             | 1000.000        | 9.000           | GND | N    | 10.1       | 31.5        | 56.0         |         |
| 3.790000        | 23.7             | 1000.000        | 9.000           | GND | N    | 10.2       | 32.3        | 56.0         |         |
| 4.846000        | 24.1             | 1000.000        | 9.000           | GND | N    | 10.2       | 31.9        | 56.0         |         |

### Final Measurement Detector 2

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|----------------|-----------------|-----------------|-----|------|------------|-------------|--------------|---------|
| 0.162000        | 30.4           | 1000.000        | 9.000           | GND | N    | 9.9        | 24.9        | 55.3         |         |
| 0.214000        | 24.6           | 1000.000        | 9.000           | GND | N    | 9.9        | 28.2        | 52.8         |         |
| 0.270000        | 17.4           | 1000.000        | 9.000           | GND | N    | 10.0       | 33.5        | 50.9         |         |
| 0.418000        | 19.0           | 1000.000        | 9.000           | GND | N    | 10.0       | 28.4        | 47.4         |         |
| 0.578000        | 15.8           | 1000.000        | 9.000           | GND | N    | 10.0       | 30.2        | 46.0         |         |
| 0.642000        | 16.3           | 1000.000        | 9.000           | GND | N    | 10.0       | 29.7        | 46.0         |         |
| 0.882000        | 14.3           | 1000.000        | 9.000           | GND | N    | 10.0       | 31.7        | 46.0         |         |

< Fig 5. Conducted emission result (Neutral line)>



## 8. Duty Cycle Correction

### 8.1 Operating Environment

Temperature : 23 °C  
 Relative humidity : 40 %R.H.

### 8.2 Test Set-up

The spectrum analyzer was set to Zero span and the video triggered to collect the pulse train of the modulation. Calculations of the duty cycle correction factor were obtained from time data provided by the plots.

### 8.3 Test Equipment used

| Model Name   | Manufacturer    | Description       | Serial Number | Due to Calibration |
|--------------|-----------------|-------------------|---------------|--------------------|
| ■ - ESI      | Rohde & Schwarz | EMI test receiver | 830482/010    | 12. 14. 2009       |
| ■ - VULB9160 | Schwarzbeck     | Bi-log antenna    | 3193          | 12. 11. 2009       |

### 8.4 Test result of Duty Cycle

- Test Date : May 19, 2009  
 - Reference standard : Part 15 Subpart C, Sec. 15.35  
 - Operating condition : RF transmitting mode  
 - Spectrum resolution bandwidth(6dB) : 100 kHz  
 - Power Source : AC 120 V/ 60 Hz,  
 DC 3.7 V / 2400 mAh Rechargeable Lithium Polymer Battery

#### 8.4.1 Test Frequency: 418 MHz

Define of duty cycle

- Number of Code groups per 100 ms = 1  
 - Number of Wide Pulse = 335  
 - Width of Pulses = 0.006 ms  
 - Number of Narrow Pulse = 693  
 - Width of Pulses = 0.006 μs

Calculation of duty cycle

- Total width of pulse train:  $335 \times 0.006 \text{ ms} + 693 \times 0.006 \mu\text{s} = 6.17 \text{ ms}$   
 - Duty Cycle (%):  $6.17 \text{ ms} / 100 \text{ ms} = 6.17 \%$   
 - Duty Cycle (dB): -24.20 dB

| Fundamental Frequency | Total width of ON-Time | Duty Cycle (%) | Duty Cycle (dB) |
|-----------------------|------------------------|----------------|-----------------|
| 418 MHz               | 6.17 ms                | 6.17 %         | - 24.20 dB      |

Refer to APPENDIX B: Test Plots of complete Pulse Train





## 9. Radiated Emission

### 9.1 Operating environment

Temperature : 23 °C  
Relative humidity : 40 % R.H.

### 9.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber using the procedure in ANSI C63.4/2003 13.1.4.1 and found frequency for open area test site.

The formal radiated emission was measured at 3 m distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 9.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

| Test items  | Uncertainty | Remark                          |
|---|-------------|---------------------------------|
| Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)       | ± 3.54 dB   | Confidence levels of 95 % (k=2) |
| Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)     | ± 3.49 dB   | Confidence levels of 95 % (k=2) |
| Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)    | ± 3.85 dB   | Confidence levels of 95 % (k=2) |
| Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)  | ± 3.76 dB   | Confidence levels of 95 % (k=2) |
| Radiated emission (30 MHz ~ 300 MHz, 10 m, Vertical)      | ± 3.21 dB   | Confidence levels of 95 % (k=2) |
| Radiated emission (30 MHz ~ 300 MHz, 10 m, Horizontal)    | ± 3.32 dB   | Confidence levels of 95 % (k=2) |
| Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Vertical)   | ± 3.77 dB   | Confidence levels of 95 % (k=2) |
| Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Horizontal) | ± 3.84 dB   | Confidence levels of 95 % (k=2) |



#### 9.4 Limit

| Fundamental Frequency (MHZ) | Field strength of Fundamental |                |                       | Field strength of Spurious Emission |                |
|-----------------------------|-------------------------------|----------------|-----------------------|-------------------------------------|----------------|
|                             | uV/m                          | dBuV/m         | uV/m                  | uV/m                                | dBuV/m         |
| 40.66~40.7                  | 2 250                         | 67.04          |                       | 225                                 | 47.04          |
| 70~130                      | 1 250                         | 61.94          |                       | 125                                 | 41.94          |
| 130~174                     | 1 250 to 3 750                | 61.94 to 71.48 | 56.81818(F)-6136.3636 | 125 to 375                          | 41.94 to 51.48 |
| 174~260                     | 3 750                         | 71.48          |                       | 375                                 | 51.48          |
| 260~470                     | 3 750 to 12 500               | 71.48 to 81.94 | 41.6667(F)-7083.3333  | 375 to 1250                         | 51.48 to 61.94 |
| Above 470                   | 12 500                        | 81.94          |                       | 1250                                | 61.94          |
| Restricted Band             | N/A                           |                |                       | 500                                 | 54.0           |

#### 9.5 Test equipment used

| Model Name                    | Manufacturer    | Description         | Serial Number | Due to Calibration |
|-------------------------------|-----------------|---------------------|---------------|--------------------|
| ■ - ESI                       | Rohde & Schwarz | EMI test receiver   | 830482/010    | 12. 14. 2009       |
| ■ - VULB9160                  | Schwarzbeck     | Bi-log antenna      | 3193          | 12. 11. 2009       |
| ■ - MCU066                    | Maturo GmbH     | Position Controller | 1390306       | N/A                |
| ■ - AM4.0                     | Maturo GmbH     | Antenna Mast        | 1390308       | N/A                |
| ■ - TT2.5SI                   | Maturo GmbH     | Turntable           | 1390307       | N/A                |
| ■ - AFS 44 00101800-25-10P-44 | MITEQ           | Preamplifier        | 1258943       | 11. 11. 2009       |



### 9.6 Radiated emission test data

- Test Date : May 19, 2009
- Reference standard : Part 15 Subpart C, Sec.15.231
- Operating condition : RF transmitting mode
- Measuring Distance : 3 m
- Spectrum resolution bandwidth (6 dB) : 120 kHz / 1 MHz
- Detector mode : Peak detector mode / Average detector mode
- Power Source : AC 120 V/ 60 Hz, DC 3.7 V / 2400 mAh Rechargeable Lithium Polymer Battery
- Note : 1. Through three orthogonal axes were investigated and the worst case is reported.

#### 9.6.1 Test Frequency: 418 MHz

##### Field Strength at the Fundamental and Harmonic frequencies

| Frequency (MHz)    | Measurement Level |               |                 |               |                  | Limit         |                 | Margin        |                  | Positioning System |             |             |
|--------------------|-------------------|---------------|-----------------|---------------|------------------|---------------|-----------------|---------------|------------------|--------------------|-------------|-------------|
|                    | Reading (dBuV/m)  | Tranduce (dB) | Duty cycle (dB) | Peak (dBuV/m) | Average (dBuV/m) | Peak (dBuV/m) | Aveage (dBuV/m) | Peak (dBuV/m) | Average (dBuV/m) | Pol. (H/V)         | Height (cm) | Angle (deg) |
| <b>Fundamental</b> |                   |               |                 |               |                  |               |                 |               |                  |                    |             |             |
| 418.00             | 80.06             | 18.76         | -24.20          | 98.82         | 74.62            | 100.28        | 80.28           | 1.46          | 5.66             | V                  | 100         | 93          |
| <b>Spurious</b>    |                   |               |                 |               |                  |               |                 |               |                  |                    |             |             |
| 836.00             | 44.0              | 27.23         | -24.20          | 71.21         | 47.01            | 80.28         | 60.28           | 9.07          | 13.27            | H                  | 130         | 160         |
| 1254.00            | 70.9              | -14.79        | -24.20          | 56.10         | 31.90            | 80.28         | 60.28           | 24.18         | 28.38            | V                  | 100         | 90          |
| 1672.00            |                   |               |                 | <<            |                  |               |                 |               |                  |                    |             |             |
| 2090.00            | 56.5              | -11.95        | -24.20          | 44.50         | 20.30            | 80.28         | 60.28           | 35.78         | 39.98            | V                  | 100         | 123         |
| 2508.00            | 57.2              | -9.98         | -24.20          | 47.20         | 23.00            | 80.28         | 60.28           | 33.08         | 37.28            | H                  | 185         | 10          |
| 2926.00            |                   |               |                 | <<            |                  |               |                 |               |                  |                    |             |             |
| 3344.00            | 59.7              | -7.43         | -24.20          | 52.30         | 28.10            | 80.28         | 60.28           | 27.98         | 32.18            | H                  | 150         | 57          |
| 3762.00            | 57.7              | -5.54         | -24.20          | 52.20         | 28.00            | 74.00         | 54.00           | 21.80         | 26.00            | H                  | 135         | 270         |
| 4180.00            | 59.5              | -4.10         | -24.20          | 55.40         | 31.20            | 74.00         | 54.00           | 18.60         | 22.80            | H                  | 200.0       | 80          |


\*Comment ; below 1GHz : Tranduce = ANT factor + cable loss  
 above 1GHz : Tranduce = ANT factor + cable loss + AMP gain

Note: "H": Horizontal, "V": Vertical



◆ Field Strength of the spurious emission except the harmonic frequencies

| Frequency (MHz) | Measurement Level |              |          |                | Limit (dB $\mu$ V/m) | Margin (dB) | Positioning System |             |           |
|-----------------|-------------------|--------------|----------|----------------|----------------------|-------------|--------------------|-------------|-----------|
|                 | Reading           | Antenna      | Cable    | Test Result    |                      |             | Pol. (H/V)         | Height (cm) | Angle (°) |
|                 | Value(dB $\mu$ V) | Factor(dB/m) | Loss(dB) | (dB $\mu$ V/m) |                      |             |                    |             |           |
| 872.08          | 14.59             | 22.29        | 5.32     | 42.20          | 46.00                | 3.80        | V                  | 100         | 158       |

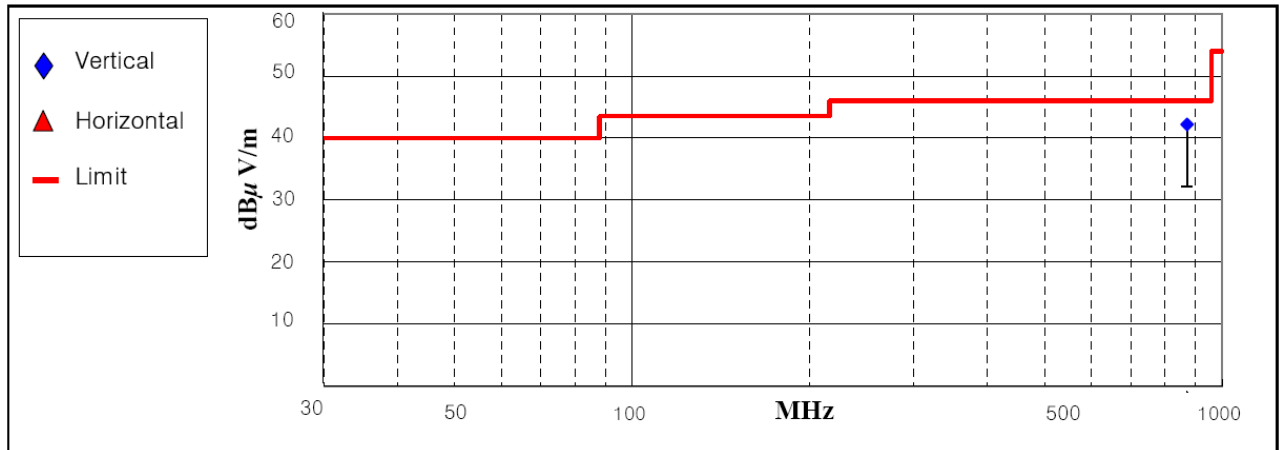


< Fig 6. Radiated emission result (30 MHz ~ 1 000 MHz)\_418 MHz >



◆ Field Strength of the spurious emission except the harmonic frequencies

| Frequency (MHz) | Measurement Level            |         |           |               |                            |         | Limit (dB $\mu$ V/m) |         | Margin (dB) |         | Positioning System |             |           |
|-----------------|------------------------------|---------|-----------|---------------|----------------------------|---------|----------------------|---------|-------------|---------|--------------------|-------------|-----------|
|                 | Reading Value (dB $\mu$ V/m) |         | AF (dB/m) | AMP / CL (dB) | Test Result (dB $\mu$ V/m) |         | Peak                 | Average | Peak        | Average | Pol. (H/V)         | Height (cm) | Angle (°) |
|                 | Peak                         | Average |           |               | Peak                       | Average |                      |         |             |         |                    |             |           |
| 4831.20         | 59.40                        | 49.60   | 31.41     | -33.91        | 56.90                      | 47.10   | 74.00                | 54.00   | 17.10       | 6.90    | H                  | 300         | 90        |
| 4835.20         | 57.91                        | 48.91   | 31.42     | -33.93        | 55.40                      | 46.40   | 74.00                | 54.00   | 18.60       | 7.60    | H                  | 215         | 6         |
| 4842.80         | 58.44                        | 48.04   | 31.43     | -33.97        | 55.90                      | 45.50   | 74.00                | 54.00   | 18.10       | 8.50    | H                  | 285         | 154       |

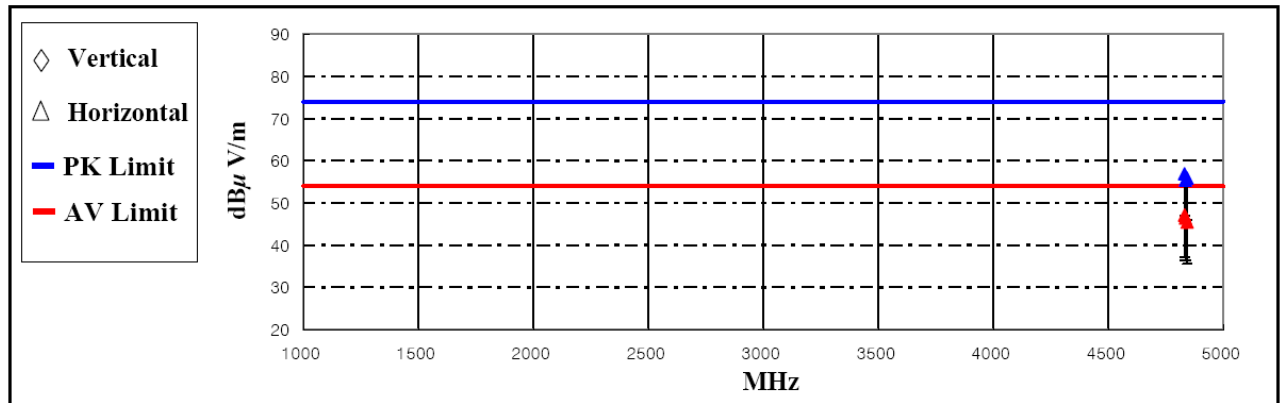

\*Comment : AMP/CL Cable loss value + AMP gain

< Fig 7. Radiated Emission result (1 GHz ~ 5 GHz)\_418 MHz >



## 10. Occupied Bandwidth Measurement

### 10.1 Operating Environment

Temperature : 23 °C  
 Relative humidity : 40 %R.H.

### 10.2 Test Set-up

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 200 kHz/division frequency span, 100 kHz 3 dB resolution bandwidth and 5 dB/division logarithmic display from an ESI spectrum analyzer.  
 The measuring bandwidth shall be set to a value greater than 5 % of the allowed bandwidth (ANSI C63.4-1992 I6)

### 10.3 Limit

| Frequency Range(MHz) | Occupied Bandwidth Limit |
|----------------------|--------------------------|
| 70 ~ 900 MHz         | 0.25 %                   |
| >900 MHz             | 0.5 %                    |

### 10.4 Test Equipment used

| Model Name   | Manufacturer    | Description       | Serial Number | Due to Calibration |
|--------------|-----------------|-------------------|---------------|--------------------|
| ■ - ESI      | Rohde & Schwarz | EMI test receiver | 830482/010    | 12. 14. 2009       |
| ■ - VULB9160 | Schwarzbeck     | Bi-log antenna    | 3193          | 12. 11. 2009       |

### 10.5 Test result of occupied bandwidth

- . Test Date : May 19, 2009  
 - . Reference standard : Part 15 Subpart C, Sec. 15.231  
 - . Operating condition : RF transmitting mode  
 - . Spectrum resolution bandwidth(3dB) : 30 kHz  
 - . Power Source : AC 120 V / 60 Hz,  
 DC 3.7 V / 2400 mAh Rechargeable Lithium Polymer Battery

#### 10.5.1 Test Frequency: 418 MHz

Allowed Bandwidth:  $418 \times 0.0025 = 1045$  kHz

| Fundamental Frequency | Bandwidth | Allowed Bandwidth | Result |
|-----------------------|-----------|-------------------|--------|
| 418 MHz               | 700 kHz   | 1 045 kHz         | PASS   |

Refer to APPENDIX B: Test Plots of occupied bandwidth



## 11. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

### 11.1 Example 1 :

#### ■ 20.3 MHz

|                                      |   |
|--------------------------------------|---|
| Class B Limit                        | = 250 $\mu\text{V}$ = 48 dB $\mu\text{V}$     |
| Reading                              | = 39.2 dB $\mu\text{V}$                       |
| $10^{(39.2\text{dB}\mu\text{V}/20)}$ | = 91.2 $\mu\text{V}$                          |
| Margin                               | = 48 dB $\mu\text{V}$ - 39.2 dB $\mu\text{V}$ |
|                                      | = 8.8 dB                                      |

### 11.2 Example 2 :

#### ■ 66.7 MHz

|                             |   |
|-----------------------------|---|
| Class B Limit               | = 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$     |
| Reading                     | = 31.0 dB $\mu\text{V}$   |
| Antenna Factor + Cable Loss | = 5.8 dB  |
| Total                       | = 36.8 dB $\mu\text{V}/\text{m}$                                  |
| Margin                      | = 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ |
|                             | = 3.2 dB  |



## 12. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

**OH SUNG ELECTRONICS CO., LTD. RF Remote Controller (Model Name: MX-5000)** was complies with §15.231 of the FCC Rules.