

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer : OHSUNG ELECTRONICS CO., LTD

Date of Issue : November 28, 2007

#181 Gongdan-Dong, Gumi, GyeongBuk

Test Report S/N : GETEC-E3-07-086

Republic of Korea

Test Site : Gumi College EMC Center

Attn : Mr. Kwang-Jae Ok / Team Leader of Q.C

FCC Registration No.: (100749)

FCC ID

OZ5URCMX980I

APPLICANT

OHSUNG ELECTRONICS CO., LTD

Rule Part(s) : FCC Part 15 Subpart B-Unintentional Radiator § 15.107, § 15.109
FCC Part 15 Subpart C-Intentional Radiator § 15.231

Equipment Class : Remote Control Transmitter (DSC)

EUT Type : RF Remote Controller

Trade Name : UNIVERSAL remote control

Model No. : MX-980i

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,



Jae-Hoon Jeong, Senior Engineer
GUMI College EMC center



Tae-Sig Park, Technical Manger
GUMI College EMC center

CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT.....	6
3.2 SUPPORT EQUIPMENT / CABLES USED	7
3.3 MODIFICATION ITEM(S).....	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
5. ANTENNA REQUIREMENT - §15.203	8
5.1 DESCRIPTION OF ANTENNA.....	8
5.2 CONDUCTED EMISSION.....	9
5.3 RADIATED EMISSION.....	10
5.4 DUTY CYCLE CORRECTION	11
5.5 OCCUPIED BANDWIDTH.....	11
6. CONDUCTED EMISSION.....	12
6.1 OPERATING ENVIRONMENT	12
6.2 TEST SET-UP.....	12
6.3 MEASUREMENT UNCERTAINTY	12
6.4 LIMIT	13
6.5 TEST EQUIPMENT USED	13
6.6 TEST DATA FOR POWER LINE CONDUCTED EMISSION.....	14
7. DUTY CYCLE CORRECTION.....	17
7.1 OPERATING ENVIRONMENT	17
7.2 TEST SET-UP.....	17
7.3 TEST EQUIPMENT USED	17
7.4 TEST RESULT OF DUTY CYCLE.....	17
8. RADIATED EMISSION	18
8.1 OPERATING ENVIRONMENT	18
8.2 TEST SET-UP.....	18
8.3 MEASUREMENT UNCERTAINTY	18
8.4 LIMIT	19
8.5 TEST EQUIPMENT USED	19
8.6 RADIATED EMISSION TEST DATA	20
9. OCCUPIED BANDWIDTH MEASUREMENT.....	24
9.1 OPERATING ENVIRONMENT	24
9.2 TEST SET-UP.....	24
9.3 LIMIT	24
9.4 TEST EQUIPMENT USED	24

9.5 TEST RESULT OF OCCUPIED BANDWIDTH.....24

10. SAMPLE CALCULATIONS.....25

10.1 EXAMPLE 1 :25

10.2 EXAMPLE 2 :25

11. RECOMMENDATION & CONCLUSION26

APPENDIX A – ATTESTATION STATEMENT

APPENDIX B – TEST PLOTS

APPENDIX C – FCC ID LABEL & LOCATION

APPENDIX D – BLOCK DIAGRAM(S)

APPENDIX E – SCHEMATIC DIAGRAM(S)

APPENDIX F – TEST SET UP PHOTOS

APPENDIX G – EXTERNAL PHOTOGRAPHS

APPENDIX H – INTERNAL PHOTOGRAPHS

APPENDIX I – USER’S MANUAL

APPENDIX J – OPERATIONAL DESCRIPTION

Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: OHSUNG ELECTRONICS CO., LTD.

Applicant Address: #181 Gongdan-Dong, Gumi-Si, Gyeongsangbuk-do, Korea

Manufacturer: OHSUNG ELECTRONICS CO., LTD

Manufacturer Address: #181 Gongdan-Dong, Gumi-Si, Gyeongsangbuk-do, Korea

Contact Person: Mr. Kwang-Jae Ok / Team Leader Q.C

Tel. & Fax No.: Tel No.: +82-54-468- 0831 Fax No.: +82-54- 461- 8368

- **FCC ID.** OZ5URCMX810I
- **Equipment Class** Remote Control Transmitter (DSC)
- **EUT Type** Remote Controller
- **Power Source** DC 3.7V supplied from Li-ion rechargeable battery
- **Model No.** MX-980i
- **Rule Part(s)** FCC Part 15, Subpart B-Unintentional Radiator §15.107, §15.109
FCC Part 15, Subpart C-Intentional Radiator § 15.231
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003)
- **Dates of Test** November 23 ~ 28, 2007
- **Place of Test** **Gumi College EMC Center** (FCC Registration No.: 100749)
407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea
- **Test Report No.** GETEC-E3-07-086
- **Dates of Issue** November 28, 2007

2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **OHSUNG ELECTRONICS CO., LTD. RF Remote Controller (Model No.: MX-980i)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daege city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992



Fig 1. The map above shows the Gumi College in vicinity area.

3. Product Information

3.1 Description of EUT

The Equipment Under Test (EUT) is the **OHSUNG ELECTRONICS CO., LTD. RF Remote Controller (Model No.: MX-980i) FCC ID.:OZ5URCMX980I**

Power Supply	Lithium Ion rechargeable (battery included) 3.7V 1100mAh / 0.2CmA
Memory	64 Megabytes of SDRAM & 34 Megabytes of Nand Flash
IR Output Drive	700±50mA maximum
Infrared Frequency Transmission Range	15kHz ~ 460kHz
Transmission method	Narrow Band RF
RF Freq	433.92 MHz
Rated RF output	80dBuV under
Frequency range	433.92 (±0.5)MHz
No. of channel	One
Modulation method	OOK
Antenna type & Characteristic	Type : PCB Antenna Gain : Unity VSWR : Less Than 2 Polarization : Horizontal Impedance : 50Ω
Dimensions (W x H x D)	2.4" x 9.2" x 1"D
LCD Size	2.4" TFT(QVGA) 262,144 Colors
Weight	7 oz. (with batteries)
Warranty	1 year parts & labor when purchased from an authorized dealer

-. User AC/DC Adapter : HK-F105-A05(UNIVERTIAL Remote control)
Input: AC 100-240V, 50/60Hz 0.15A
Output: DC 5V, 1.0A

3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model No.	S/N & FCC ID
Serial mouse	LOGITECH	M-S69	S/N: 334684-108 FCC ID: JNZ211443
Notebook PC	COMPAQ	ARMADA E500	S/N: PP2060 FCC ID: DoC
Printer	Hewlett Packard	970CXI	S/N: MY9B01F1FG FCC ID: DoC

See "Appendix E – Test Setup Photographs" for actual system test set-up

3.2.2 Used Cable(s)

Cable No.	Condition	Description
Adapter cable	Connected to the EUT	1.8m Unshielded
USB cable	Connected to the EUT and Notebook PC	1.2m Shielded with a ferrite core

3.3 Modification Item(s)

-. None

4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

Test Voltage / Frequency: DC 3.7V supplied from Li-ion rechargeable battery

- Test Mode(s)
 - . RF mode: RF transmitting mode
 - . IR mode : IR transmitting mode
 - . Download mode: Continuous downloading mode via USB with a software.

5. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

5.1 Description of Antenna

The **OHSUNG ELECTRONICS CO., LTD RF Transmitter Universal Remote Control** comply with the requirement of §15.203 with a built-in looped antenna permanently attached to the transmitter.

5.2 Conducted Emission

The Line conducted emission test facility is inside a 4×8×2.5 meter shielded enclosure.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table, which is 0.8 meters in height and 0.4 meters away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150kHz to 30MHz with 20msec sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 – 40 centi-meters.

Each EME reported was calibrated using the R/S signal generator

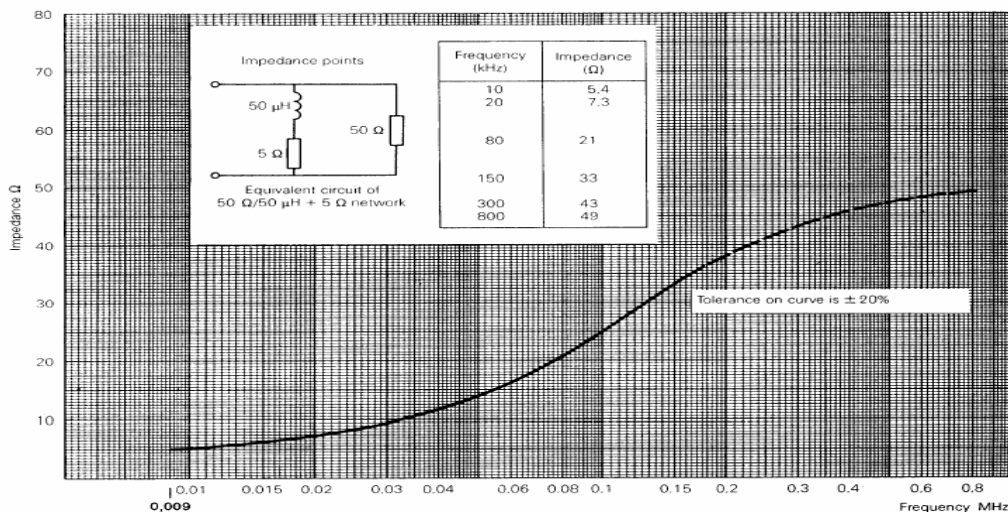


Fig 2. Impedance of LISN

5.3 Radiated Emission

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using bicornical log antenna (Schwarzbeck, VULB9160). Above 1GHz, horn antenna (Schwarzbeck, BBHA9120D) was used.

Final measurements were made outdoors at 3m/10m-test range.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

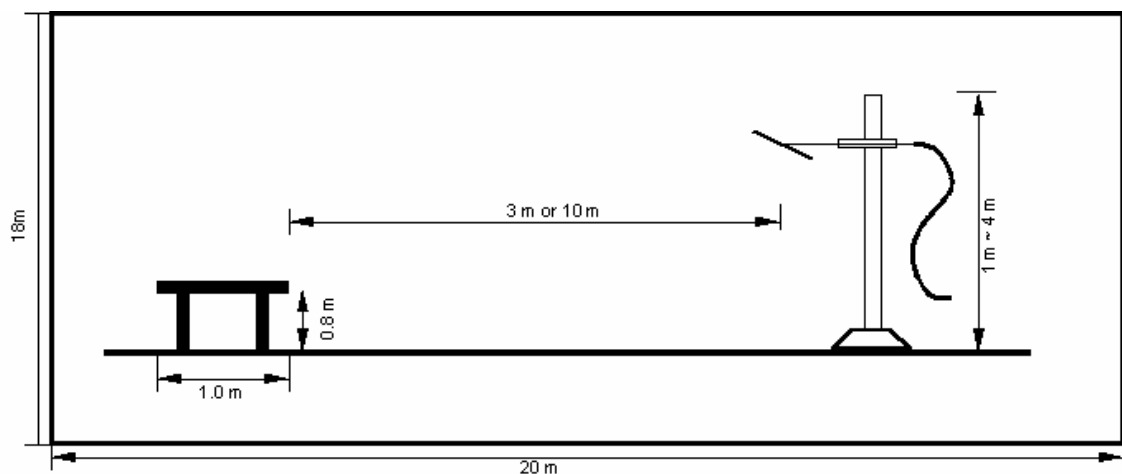


Fig 3. Dimensions of Open Site Test Area

5.4 Duty Cycle Correction

Measurements may be adjusted where pulsed RF is utilized to find the average level associated with a quantity.

This calculation is applied to limits for pulsed licensed and unlicensed devices.

For unlicensed intentional radiator under 47CFR Part 15 §15.35, all duty cycle measurements are compared to a 100 millisecond period.

On time = $N_1L_1 + N_2L_2 + \dots + N_nL_n$, where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

Duty Cycle = On time/100 millisecond.

5.5 Occupied Bandwidth

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. For device operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. The bandwidth is determined at the points 20dB down from the modulated carrier.

6. Conducted Emission

6.1 Operating environment

Temperature : 26°C
Relative humidity : 36 %

6.2 Test set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall and 0.8m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

6.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement".

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (\pm dB)	
		Power Port	Communication port
Receiver specification	Rectangular	0.50	0.50
LISN coupling specification	Rectangular	1.50	
ISN coupling specification	Rectangular		1.50
Mismatch LISN VRC : Γ l= 0.20 ISN VRC : Γ l= 0.20 ATT VRC(IN) : Γ g= 0.03 Uncertainty limits $20\log(1\pm \Gamma$ l Γ g)	U-shaped	0.05 -0.05	0.05 -0.05
Mismatch Receiver VRC : Γ l= 0.09 ATT VRC : Γ g= 0.11 Uncertainty limits $20\log(1\pm \Gamma$ l Γ g)	U-shaped	0.09 -0.09	0.09 -0.09
System repeatability	Std Deviation	0.55	0.55
Cable and input attenuator calibration	Normal (k=2)	0.08	0.08
Repeatability of EUT			
Combined standard uncertainty $U_c(y)$	Normal	1.07 -1.07	1.07 -1.07
Extended uncertainty U	Normal (k=2)	2.15 -2.15	2.15 -2.15

6.4 Limit

RFI Conducted	FCC Limit(dB) Class B	
Freq. Range	Quasi-Peak	Average
150kHz – 0.5MHz	66 – 56*	56 – 46*
0.5MHz – 5MHz	56	46
5MHz – 30MHz	60	50

*Limits decreases linearly with the logarithm of frequency.

6.5 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	11. 27. 2007
■ - ESH3-Z5	Rohde & Schwarz	Artificial mains network	838979/020	12. 09. 2007
■ - ESH2-Z5	Rohde & Schwarz	Artificial mains network	829991/009	12. 09. 2007

6.6 Test data for power line conducted emission

- Test Date : November 23, 2007
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15MHz ~ 30MHz

(Download mode)

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.250	0.11	-0.20	N	61.76	7.5	7.41	51.76	<<	-	54.35	-
0.338	0.13	-0.15	L1	59.25	5.5	5.48	49.25	<<	-	53.78	-
0.562	0.14	-0.21	L1	56.00	49.2	49.13	46.00	<<	-	6.87	-
0.686	0.14	-0.23	L1	56.00	45.0	44.91	46.00	21.6	21.51	11.09	24.49
0.854	0.14	-0.23	L1	56.00	46.9	46.81	46.00	35.0	34.91	9.19	11.09
0.986	0.14	-0.23	L1	56.00	49.4	49.31	46.00	30.0	29.91	6.69	16.09
1.054	0.14	-0.23	L1	56.00	46.6	46.51	46.00	20.8	20.71	9.49	25.29
1.758	0.10	-0.30	N	56.00	41.2	41.00	46.00	19.7	19.50	15.00	26.50
2.042	0.15	-0.31	L1	56.00	46.1	45.94	46.00	25.0	24.84	10.06	21.16
2.122	0.15	-0.30	L1	56.00	48.4	48.25	46.00	31.9	31.75	7.75	14.25
4.858	0.09	-0.16	N	56.00	36.2	36.13	46.00	15.6	15.53	19.87	30.47
7.302	0.09	-0.06	N	60.00	39.9	39.93	50.00	22.1	22.13	20.07	27.87

*Comment : Pol : L1 (Live), N(Neut)
 Insertion Loss : Insertion Loss of LISN
 Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

"<<" The margin is more than 30dB

(RF mode)

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.254	0.12	-0.20	L1	61.63	47.9	47.82	51.63	35.1	35.02	13.80	16.60
0.410	0.13	-0.13	L1	57.65	44.4	44.41	47.65	33.6	33.61	13.24	14.04
0.514	0.12	-0.18	N	56.00	43.3	43.24	46.00	31.7	31.64	12.76	14.36
0.674	0.13	-0.23	N	56.00	47.2	47.10	46.00	35.1	35.00	8.90	11.00
0.814	0.14	-0.23	L1	56.00	47.8	47.71	46.00	38.5	38.41	8.29	7.59
0.902	0.14	-0.23	L1	56.00	49.1	49.01	46.00	34.2	34.11	6.99	11.89
1.166	0.14	-0.24	L1	56.00	45.8	45.70	46.00	23.5	23.40	10.30	22.60
2.326	0.15	-0.26	L1	56.00	44.3	44.19	46.00	20.8	20.69	11.81	25.31
4.154	0.18	-0.14	L1	56.00	46.0	46.04	46.00	18.9	18.94	9.96	27.06
5.990	0.09	-0.18	N	60.00	35.7	35.61	50.00	17.1	17.01	24.39	32.99
7.294	0.09	-0.06	N	60.00	39.0	39.03	50.00	18.2	18.23	20.97	31.77
8.730	0.23	0.00	L1	60.00	36.1	36.33	50.00	16.1	16.33	23.67	33.67

*Comment : Pol : L1 (Live), N(Neut)

Insertion Loss : Insertion Loss of LISN

Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

(IR mode)

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.266	0.12	-0.19	L1	61.24	50.3	50.23	51.24	39.8	39.73	11.01	11.51
0.514	0.12	-0.18	N	56.00	43.2	43.14	46.00	31.2	31.14	12.86	14.86
0.526	0.12	-0.19	N	56.00	41.1	41.03	46.00	27.1	27.03	14.97	18.97
0.670	0.13	-0.23	N	56.00	49.9	49.80	46.00	38.7	38.60	6.20	7.40
0.754	0.14	-0.23	L1	56.00	47.0	46.91	46.00	35.6	35.51	9.09	10.49
0.946	0.14	-0.23	L1	56.00	47.6	47.51	46.00	32.3	32.21	8.49	13.79
1.286	0.14	-0.26	L1	56.00	50.8	50.69	46.00	25.8	25.69	5.31	20.31
1.742	0.15	-0.30	L1	56.00	46.2	46.05	46.00	24.9	24.75	9.95	21.25
1.934	0.15	-0.31	L1	56.00	50.8	50.64	46.00	30.1	29.94	5.36	16.06
2.010	0.15	-0.32	L1	56.00	50.7	50.53	46.00	29.2	29.03	5.47	16.97
4.314	0.18	-0.15	L1	56.00	42.4	42.43	46.00	24.6	24.63	13.57	21.37
7.326	0.09	-0.06	N	60.00	41.2	41.23	50.00	20.5	20.53	18.77	29.47

*Comment : Pol : L1 (Live), N(Neut)

Insertion Loss : Insertion Loss of LISN

Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

7. Duty Cycle Correction

7.1 Operating environment

Temperature : 11 °C
Relative humidity : 42 %

7.2 Test set-up

The spectrum analyzer was set to Zero span and the video triggered to collect the pulse train of the modulation. Calculations of the duty cycle correction factor were obtained from time data provided by the plots.

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2007
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	11. 27. 2007

7.4 Test result of Duty Cycle

- Test Date : November 28, 2007
- Reference standard : Part 15 Subpart C, Sec. 15.35
- Operating condition : RF transmitting mode
- Spectrum resolution bandwidth(6dB) : 100 kHz
- Power Source : AC 120V, 60Hz

Define of duty cycle

- Number of Code groups per 100ms = 1
- Number of Wide Pulse = 335
- Width of Pulses = 0.006ms
- Number of Narrow Pulse = 693
- Width of Pulses = 0.006µs

Calculation of duty cycle

- Total width of pulse train : $335 \times 0.006\text{ms} + 693 \times 0.006\mu\text{s} = 6.17\text{ms}$
- Duty Cycle (%) : $6.17\text{ms} / 100\text{ms} = 6.17\%$
- Duty Cycle (dB) : -24.20dB

Fundamental Frequency	Total width of ON-Time	Duty Cycle (%)	Duty Cycle (dB)
433.92 MHz	6.17 ms	6.17%	-24.20dB

Refer to APPENDIX B: Test Plots of complete Pulse Train

8. Radiated Emission

8.1 Operating environment

Temperature : 11 °C
Relative humidity : 42 %

8.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber using the procedure in ANSI C63.4/2003 13.1.4.1 and found frequency for open area test site.

The formal radiated emission was measured at 3m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

8.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (dB)			
		Biconical Ant.		Log-periodic Ant.	
		3m	10m	3m	10m
Ambient signal					
Antenna factor calibration	Normal (k=2)	0.50	0.50	0.50	0.50
Receiver specification	Rectangular	0.50	0.50	0.50	0.50
Antenna directivity	Rectangular	0.25	0.00	1.50	0.25
Antenna phase center variation	Rectangular	0.00	0.00	1.00	0.20
Antenna factor frequency interpolation	Rectangular	0.25	0.25	0.25	0.25
Measure distance variation	Rectangular	0.60	0.40	0.60	0.40
Site imperfections	Rectangular	-2.00	-2.40	2.50	2.40
Mismatch					
Receiver VRC : $\Gamma_l = 0.09$	U-shaped	0.33	0.33	0.18	0.18
Antenna VRC : $\Gamma_g = 0.43$ (Bi) 0.23 (Lp)		-0.35	-0.35	-0.18	-0.18
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$					
System repeatability	Std Deviation	0.82	0.82	0.79	0.79
Cable loss calibration	Normal (k=2)	0.09	0.09	0.09	0.09
Combined standard uncertainty $U_c(y)$	Normal	1.54	1.70	2.03	1.68
		-1.54	-1.70	-2.03	-1.68
Extended uncertainty U	Normal (k=2)	3.09	3.39	4.05	3.36
		-3.09	-3.40	-4.05	-3.36

8.4 Limit

Fundamental Frequency (MHZ)	Field strength of Fundamental			Field strength of Spurious Emission	
	uV/m	dBuV/m	uV/m	uV/m	dBuV/m
40.66~40.7	2250	67.04		225	47.04
70~130	1250	61.94		125	41.94
130~174	1250 to 3750	61.94 to 71.48	56.81818(F)-6136.3636	125 to 375	41.94 to 51.48
174~260	3750	71.48		375	51.48
260~470	3750 to 12500	71.48 to 81.94	41.6667(F)-7083.3333	375 to 1250	51.48 to 61.94
Above 470	12500	81.94		1250	61.94
Restricted Band	N/A			500	54.0

8.5 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	11. 27. 2007
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2007
■ - HK116	Rohde & Schwarz	Biconical ANT	826861/018	11. 27. 2007
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	11. 27. 2007
■ - HD100	HD GmbH	Position Controller	100/692/01	N/A
■ - DS415S	HD GmbH	Turntable	415/657/01	N/A
■ - MA240	HD GmbH	Antenna Mast	240/565/01	N/A
■ - BBHA9120D	Schwarzbeck	Horn ANT	597	04.01.2008
■ - AFS44-00101800- 25-10P-44	MITEQ	Preamplifier	1258943	N/A

8.6 Radiated emission test data

- Test Date : November 28, 2007
- Reference standard : Part 15 Subpart C, Sec.15.231
- Operating condition : RF transmitting mode
- Measuring Distance : 3m
- Spectrum resolution bandwidth (6dB) : 120kHz / 1MHz
- Detector mode : Peak detector mode / Average detector mode
- Power Source : DC 3.7V supplied from Li-ion rechargeable battery
- Note : 1. Through three orthogonal axes were investigated and the worst case is reported.
2. The EUT was tested with new batteries.

Field Strength at the Fundamental and Harmonic frequencies


Frequency (MHz)	Measurement Level					Limit		Margin		Positioning System		
	Reading (dBuV/m)	Tranduce (dB)	Duty cycle (dB)	Peak (dBuV/m)	Average (dBuV/m)	Peak (dBuV/m)	Aveage (dBuV/m)	Peak (dBuV/m)	Average (dBuV/m)	Pol. (H/V)	Height (cm)	Angle (deg)
Fundamental												
433.92	76.79	22.63	-24.20	99.42	75.22	100.83	80.83	1.41	5.60	H	300	270
Spurious												
867.84	23.7	31.42	-24.20	55.13	30.93	80.83	60.83	25.70	29.89	H	350	185
1301.76	70.9	-9.85	-24.20	61.08	36.88	74.00	54.00	12.92	17.12	V	140	267
1735.68	70.1	-8.12	-24.20	62.00	37.80	80.83	60.83	18.83	23.02	V	125	192
2169.60	66.5	-6.50	-24.20	60.04	35.84	80.83	60.83	20.79	24.98	H	328	158
2603.52	64.6	-4.64	-24.20	60.01	35.81	80.83	60.83	20.82	25.01	V	175	0
3037.44	64.7	-3.60	-24.20	61.07	36.87	80.83	60.83	19.76	23.95	H	380	90
3471.36	59.1	-2.78	-24.20	56.32	32.12	80.83	60.83	24.51	28.70	V	100	90
3905.28	62.1	-1.53	-24.20	60.57	36.37	74.00	54.00	13.43	17.63	H	300	175
4339.20	61.3	-0.55	-24.20	60.79	36.59	74.00	54.00	13.21	17.41	V	100	270

*Comment ; below 1GHz : Tranduce = ANT factor + cable loss
above 1GHz : Tranduce = ANT factor + cable loss + AMP gain

Note: "H": Horizontal, "V": Vertical

◆ Field Strength of the spurious emission except the harmonic frequencies (30MHz ~ 1GHz)

Frequency (MHz)	Measurement Level				Limit (dBuV/m)	Margin (dBuV/m)	Positioning System		
	Reading Value(dBuV)	Antenna Factor(dB)	Cable Loss(dB)	Test Result (dBuV/m)			Pol. (H/V)	Height (cm)	Angle (deg)
40.68	24.5	10.69	1.81	37.0	40.0	3.0	V	125	11
49.44	14.2	9.39	1.99	25.6	40.0	14.4	V	175	180
150.90	16.2	12.32	3.39	31.9	43.5	11.6	V	202	320

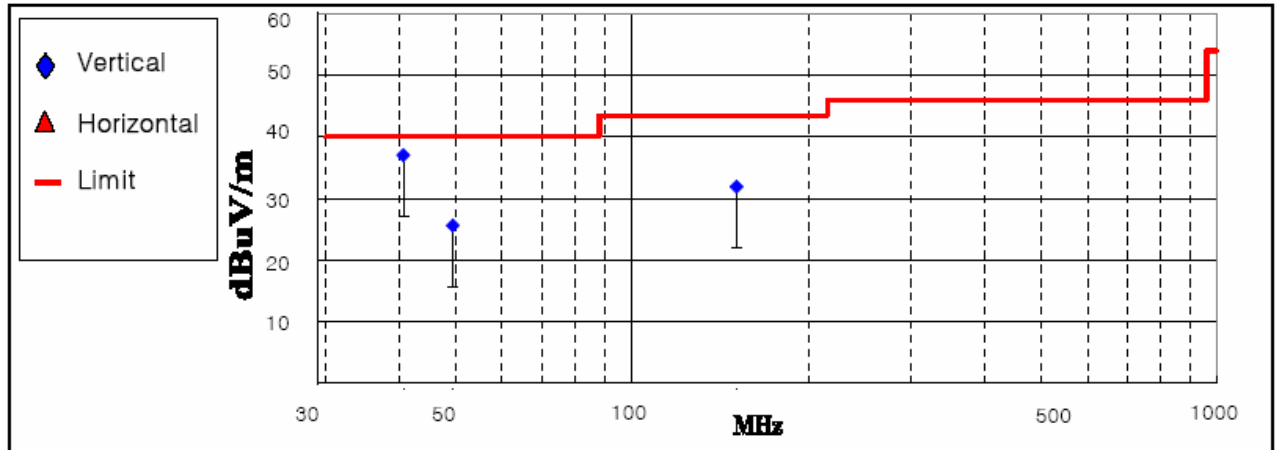


< Fig 4. Radiated emission result (30MHz ~ 1000MHz) >

◆ Field Strength of the spurious emission except the harmonic frequencies (1GHz ~ 5GHz)

Frequency (MHz)	Measurement Level					AV Limit (dBuV/m)	Margin (dBuV/m)	Positioning System			
	Reading Value(dBuV)		AF (dB)	AMP / CL (dB)	Test Result (dBuV/m)			Pol. (H/V)	Height (cm)	Angle (deg)	
	Peak	Average			Peak						Average
All frequency	-	-	-	-	-	-	<<	-	-	-	

"<<" The margin is more than 30dB

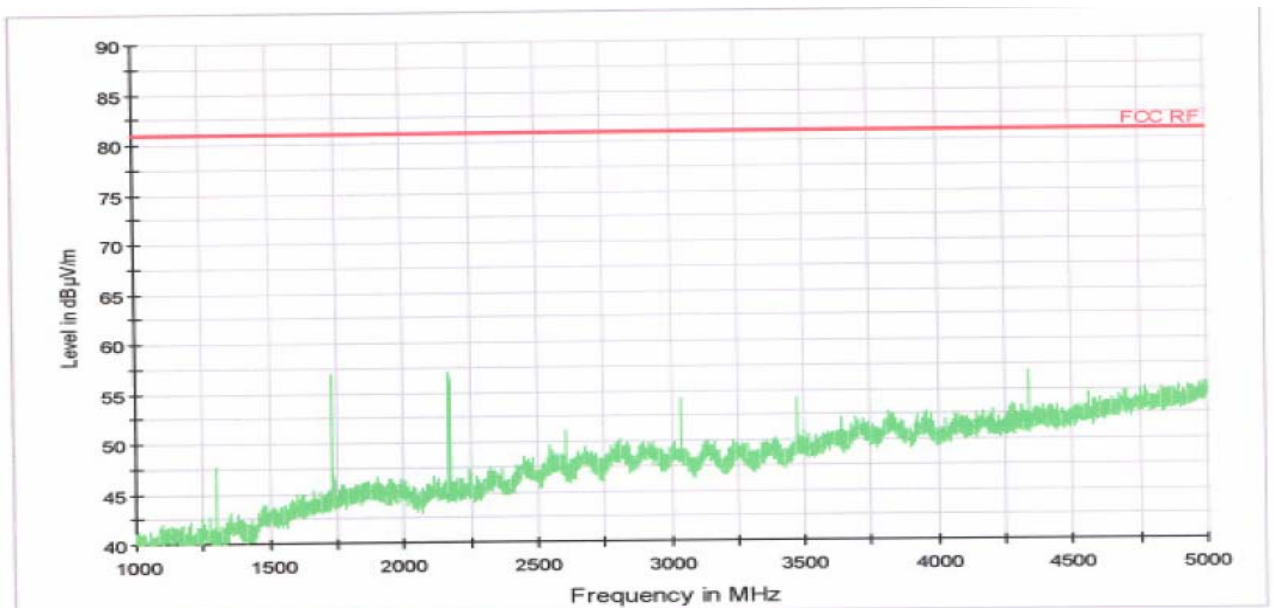


< Fig 5. Radiated Emission result (1000MHz ~ 5000MHz)>

8.6.2 IR remote control mode

- Test Date : November 23, 2007
- Reference standard : Part 15 Subpart B
- Operating condition : IR transmitting mode
- Measuring Distance : 3m
- Spectrum resolution bandwidth (6dB): 120kHz
- Detector mode : Quasi-peak detector mode
- Power Source : AC 120V, 60Hz

Frequency (MHz)	Measurement Level				Limit (dBuV/m)	Margin (dBuV/m)	Positioning System		
	Reading Value(dBuV)	Antenna Factor(dB)	Cable Loss(dB)	Test Result (dBuV/m)			Pol. (H/V)	Height (cm)	Angle (deg)
32.58	6.9	12.84	1.70	21.4	40.0	18.6	V	100	285
39.78	15.1	10.87	1.80	27.8	40.0	12.2	V	182	185
50.70	15.1	9.25	2.01	26.4	40.0	13.6	V	172	120
130.59	16.7	11.56	3.09	31.3	43.5	12.2	V	150	35
247.26	3.5	15.51	4.47	23.5	46.0	22.5	V	130	175
453.29	3.2	16.75	6.37	26.3	46.0	19.7	V	200	0
970.89	0.7	22.82	9.60	33.1	54.0	20.9	V	210	17

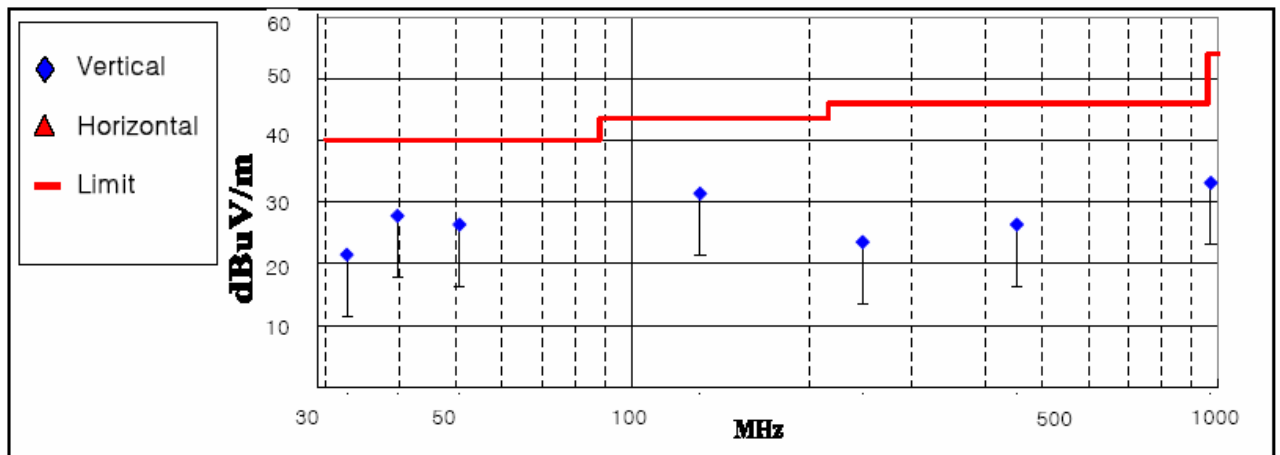


< Fig 6. Radiated emission result >

8.6.3 Download mode

- Test Date : November 23, 2007
- Reference standard : Part 15 Subpart B
- Operating condition : Downloading the file from the PC
- Measuring Distance : 3m
- Spectrum resolution bandwidth (6dB) : 120kHz
- Detector mode : Quasi-peak detector mode
- Power Source : AC 120V, 60Hz

Frequency (MHz)	Measurement Level				Limit (dBuV/m)	Margin (dBuV/m)	Positioning System		
	Reading Value(dBuV)	Antenna Factor(dB)	Cable Loss(dB)	Test Result (dBuV/m)			Pol. (H/V)	Height (cm)	Angle (deg)
39.54	7.5	10.93	1.80	20.2	40.0	19.8	V	144	17
100.26	12.1	9.65	2.70	24.5	43.5	19.0	V	100	154
132.62	8.2	11.66	3.12	23.0	43.5	20.5	V	175	182
397.86	8.1	15.57	6.08	29.7	46.0	16.3	H	320	120
532.89	11.3	18.00	6.86	36.2	46.0	9.8	V	195	160
662.70	3.2	19.93	7.62	30.7	46.0	15.3	V	100	90
798.24	5.1	21.05	8.49	34.6	46.0	11.4	V	105	227

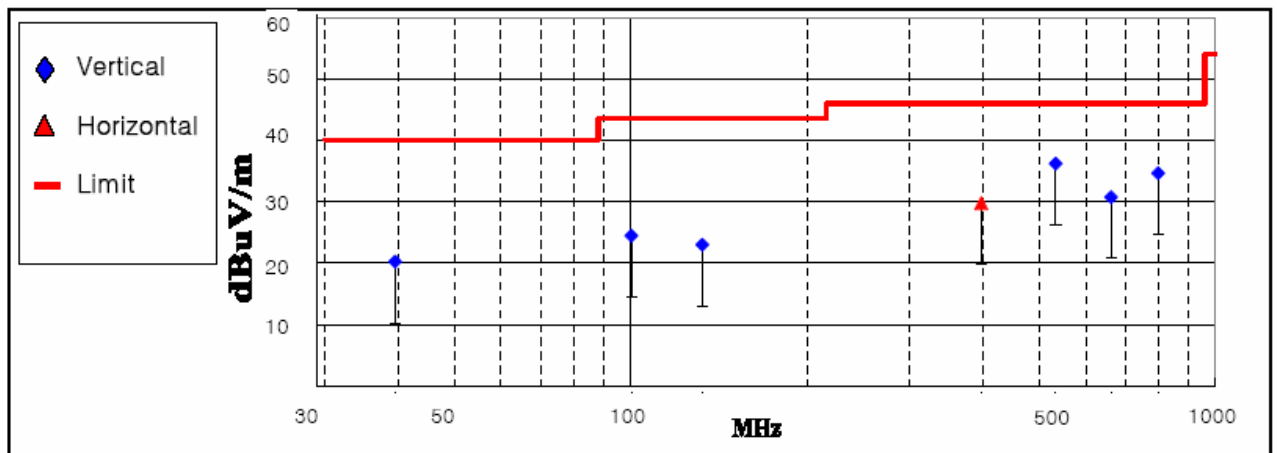

< Fig 7. Radiated emission result >

9. Occupied Bandwidth Measurement

9.1 Operating environment

Temperature : 11 °C
Relative humidity : 42 %

9.2 Test set-up

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 200kHz/division frequency span, 100kHz 3dB resolution bandwidth and 5dB/division logarithmic display from an ESI spectrum analyzer.

The measuring bandwidth shall be set to a value greater than 5% of the allowed bandwidth(ANSI C63.4-1992 I6)

9.3 Limit

Frequency Range(MHz)	Occupied Bandwidth Limit
70 ~ 900 MHz	0.25%
>900 MHz	0.5%

9.4 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2007
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	11. 27. 2007

9.5 Test result of occupied bandwidth

- Test Date : November 28, 2007
 - Reference standard : Part 15 Subpart C, Sec. 15.231
 - Operating condition : RF transmitting mode
 - Spectrum resolution bandwidth(3dB) : 100 kHz
 - Power Source : DC 3.7V supplied from Li-ion rechargeable battery

Allowed Bandwidth : $433.92 \times 0.0025 = 1084.8$ kHz

Fundamental Frequency	Bandwidth	Allowed Bandwidth	Result
433.92 MHz	881.762 kHz	1084.8 kHz	PASS

Refer to APPENDIX B: Test Plots of occupied bandwidth

10. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

10.1 Example 1 :

■ 20.3 MHz

Class B Limit	=	250 μV	=	48 $\text{dB}\mu\text{V}$
Reading	=	- 67.8 dBm (Calibrated level)		
Convert to $\text{dB}\mu\text{V}$	=	- 67.8 $\text{dBm} + 107$	=	39.2 $\text{dB}\mu\text{V}$
$10^{(39.2\text{dB}\mu\text{V}/20)}$	=	91.2 μV		
Margin	=	39.2 - 48	=	-8.8
	=	8.8 dB below Limit		

10.2 Example 2 :

■ 66.7 MHz

Class B Limit	=	100 $\mu\text{V}/\text{m}$	=	40.0 $\text{dB}\mu\text{V}/\text{m}$
Reading	=	- 76.0 dBm (Calibrated level)		
Convert to $\text{dB}\mu\text{V}/\text{m}$	=	- 76.8 $\text{dBm} + 107$	=	31.0 $\text{dB}\mu\text{V}/\text{m}$
Antenna Factor + Cable Loss	=	5.8 dB		
	Total =	36.8 $\text{dB}\mu\text{V}/\text{m}$		
Margin	=	36.8 - 40.0	=	-3.2
	=	3.2 dB below Limit		

11. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

OH SUNG ELECTRONICS CO., LTD. RF Remote Controller (Model No.: MX-980i) was complies with §15.107, §15.109 and §15.231 of the FCC Rules.