

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer : OHSUNG ELECTRONICS CO., LTD

#181 Gongdan-dong, Gumi-si, Gyeongbuk

Republic of Korea

Attn : Mr. Kwang-Jae Ok / Team Leader of Q.C

Date of Issue : April 21, 2009

Order Number: GETEC-C1-09-089

Test Report Number: GETEC-E3-09-042

Test Site: Gumi College EMC Center

FCC Registration Number: (100749, 443957)

FCC ID.: OZ5URCRFTX1

Applicant: OHSUNG ELECTRONICS CO., LTD.

Rule Part(s)	: FCC Part 15 Subpart C-Intentional Radiator § 15.231
Equipment Class	: Remote Control Transmitter (DSC)
EUT Type	: RF Transmitter
Type of Authority	: Certification
Model Name	: RFTX-1
Trade Name	: UNIVERSAL remote control

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,



Hyoung Seop Kim, Associate Engineer
GUMI College EMC center



Tae-Sig Park, Technical Manager
GUMI College EMC center



CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT	6
3.2 SUPPORT EQUIPMENT / CABLES USED	7
3.3 MODIFICATION ITEM(S)	7
4. ANTENNA REQUIREMENT - §15.203	7
4.1 DESCRIPTION OF ANTENNA	7
5. DESCRIPTION OF TESTS	8
5.1 TEST CONDITION	8
5.2 RADIATED EMISSION	9
5.3 DUTY CYCLE CORRECTION	10
5.4 OCCUPIED BANDWIDTH	10
6. DUTY CYCLE CORRECTION	11
6.1 OPERATING ENVIRONMENT	11
6.2 TEST SET-UP	11
6.3 TEST EQUIPMENT USED	11
6.4 TEST RESULT OF DUTY CYCLE	11
7. RADIATED EMISSION	13
7.1 OPERATING ENVIRONMENT	13
7.2 TEST SET-UP	13
7.3 MEASUREMENT UNCERTAINTY	13
7.4 LIMIT	14
7.5 TEST EQUIPMENT USED	14
7.6 RADIATED EMISSION TEST DATA	15
8. OCCUPIED BANDWIDTH MEASUREMENT	21
8.1 OPERATING ENVIRONMENT	21
8.2 TEST SET-UP	21
8.3 LIMIT	21
8.4 TEST EQUIPMENT USED	21
8.5 TEST RESULT OF OCCUPIED BANDWIDTH	21
9. SAMPLE CALCULATIONS	23
9.1 EXAMPLE 1 :	23
9.2 EXAMPLE 2 :	23
10. RECOMMENDATION & CONCLUSION	24

APPENDIX A – ATTESTATION STATEMENT

APPENDIX B – TEST PLOTS

APPENDIX C – ID SAMPLE LABEL & LOCATION

APPENDIX D – BLOCK DIAGRAM

APPENDIX E – SCHEMATIC DIAGRAM

APPENDIX F – TEST SET-UP PHOTOGRAPHS

APPENDIX G – EXTERNAL PHOTOGRAPHS



APPENDIX H –INTERNAL PHOTOGRAPHS
APPENDIX I – USER’S MANUAL
APPENDIX J – OPERATIONAL DESCRIPTION



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: OHSUNG ELECTRONICS CO., LTD.

Applicant Address: #181 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea.

Manufacturer: OHSUNG ELECTRONICS CO., LTD.

Manufacturer Address: #181 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea.

Contact Person: Mr. Kwang-Jae Ok / Team Leader Q.C

Tel Number: +82-54-468- 0831 Fax Number: +82-54- 461- 8368

- **FCC ID.** OZ5URCRFTX1
- **Equipment Class** Remote Control Transmitter (DSC)
- **EUT Type** RF Transmitter
- **Power Source** DC 5 V, 1.0 A (Max 32 mA) supplied from the RF Base station (MRZ-260)
- **Model Name** RFTX-1
- **Rule Part(s)** FCC Part 15, Subpart C-Intentional Radiator § 15.231
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003)
- **Dates of Test** April 13, 2008
- **Place of Test** **Gumi College EMC Center** (FCC Registration No.: 100749, 443957)
407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea
- **Test Report Number** GETEC-E3-09-042
- **Dates of Issue** April 21, 2008




2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **OHSUNG ELECTRONICS CO., LTD. RF Transmitter (Model Name: RFTX-1)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-dong, Gumi-si, Gyeongsangbuk-do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of FCC §2.948 according to ANSI C63.4 (2003).

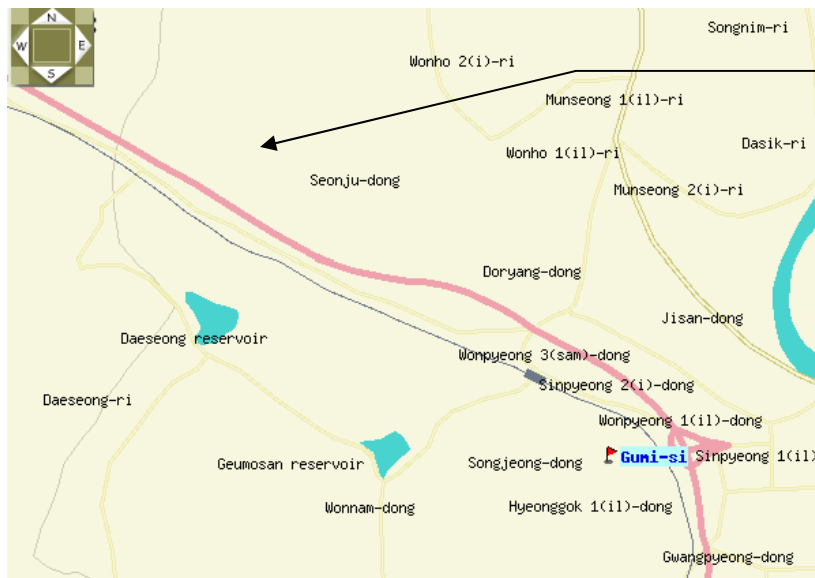

GUMI COLLEGE EMC CENTER
407, Bugok-dong, Gumi-si,
Gyeongbuk 730-711, Korea.
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.




3. Product Information

3.1 Description of EUT

The equipment under test (EUT) is the **OHSUNG ELECTRONICS CO., LTD. RF Transmitter (Model Name: RFTX-1) FCC ID.: OZ5URCRFTX1**

RF Frequency	: 433.92 MHz, 418 MHz
External Connector	: Signal port
Crystal & Clock Frequency	: 13.560 MHz, 13.0625 MHz on Main board B'D
Number of Layer	: 2 Layer
Weight	: 2.9 ounces

Test Configuration

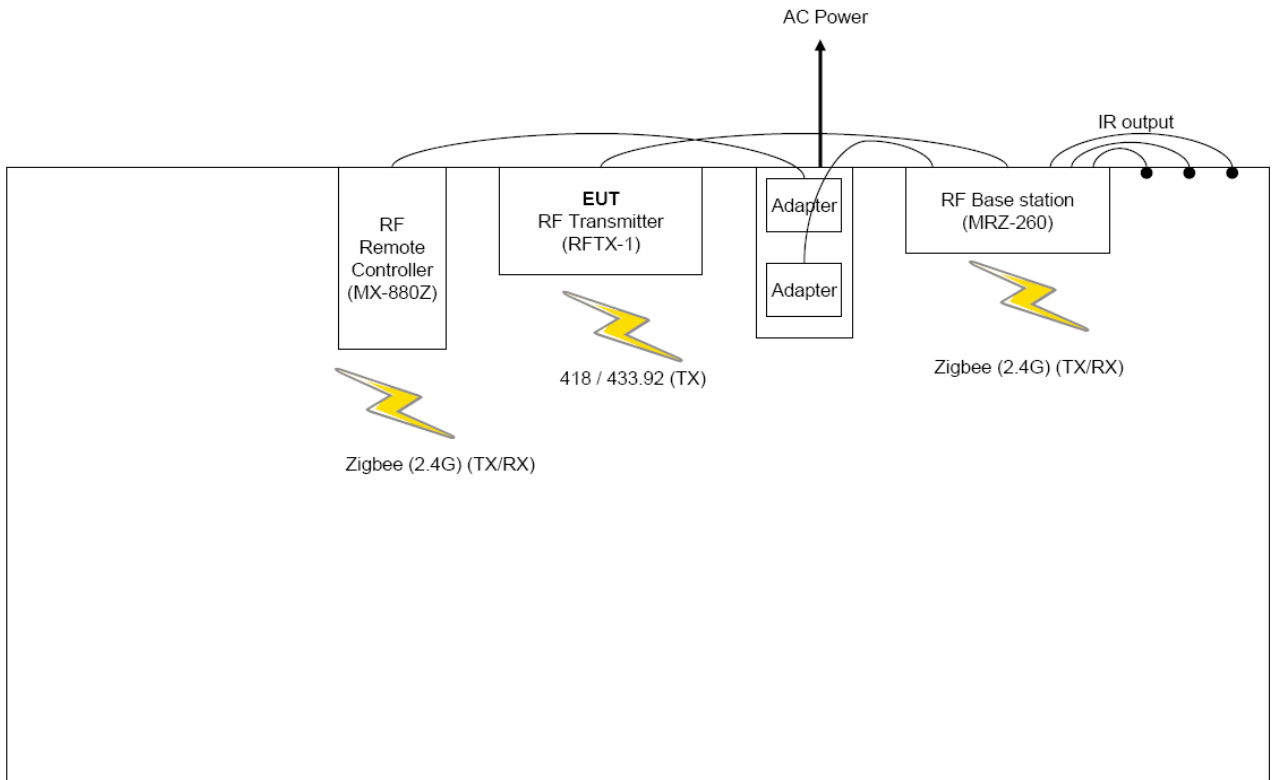



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID
RF Transmitter	OHSUNG ELECTRONICS CO., LTD.	MRZ-260	S/N: N/A FCC ID: -
RF Remote Controller	OHSUNG ELECTRONICS CO., LTD.	MX-880Z	S/N: N/A FCC ID: -

See "Appendix F – Test Setup Photographs" for actual system test set-up

3.2.2 Used Cable(s)

Cable Name	Condition	Description
Signal cable	Connected to the EUT and MRZ-260	3.62 m shielded

3.3 Modification Item(s)

-. None

4. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

4.1 Description of Antenna

The **OHSUNG ELECTRONICS CO., LTD RF Transmitter Universal Remote Control** comply with the requirement of §15.203 with a built-in looped antenna permanently attached to the transmitter.



5. Description of tests

5.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

Test Voltage / Frequency: DC 5.0 V, 1.0 A

[This equipment is supplied DC power from the RF base station (MRZ-260). Therefore, no conducted limits apply for this equipment]

- Test Mode(s)
 - . RF transmitting mode: Continuous RF transmitting mode



5.2 Radiated Emission

The measurements were conducted in a 3 m anechoic chamber (FCC Registration No.: 443957) using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was noted for each frequency found.

The spectrum was scanned from 30 to 1000 MHz, using a biconical log antenna (Schwarzbeck, VULB9160).

Above 1 GHz, a horn antenna (Schwarzbeck, BBHA9120D / EMCO 3160) was used.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using an EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied from 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

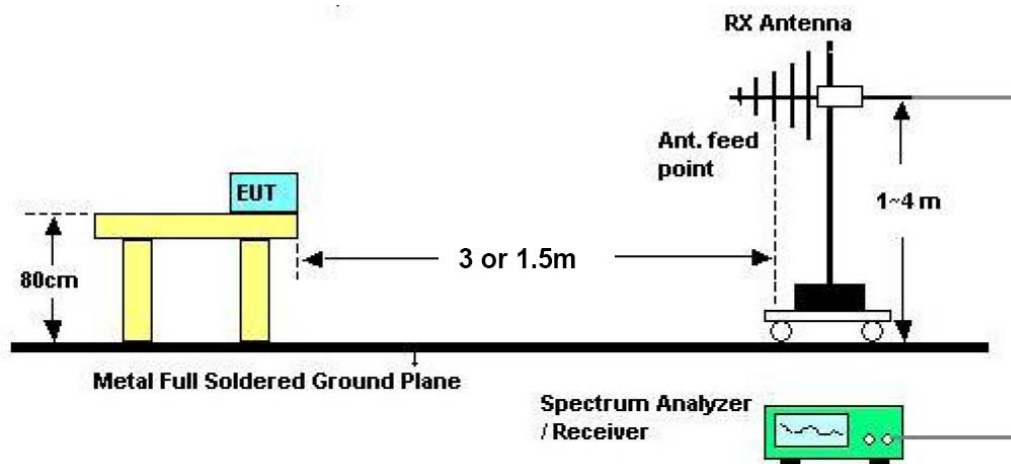


Fig 3. Dimensions of test site.



5.3 Duty Cycle Correction

Measurements may be adjusted where pulsed RF is utilized to find the average level associated with a quantity.

This calculation is applied to limits for pulsed licensed and unlicensed devices.

For unlicensed intentional radiator under 47CFR Part 15 §15.35, all duty cycle measurements are compared to a 100 millisecond period.

On time = $N_1L_1 + N_2L_2 + \dots + N_nL_n$, where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

Duty Cycle = On time/100 millisecond.

5.4 Occupied Bandwidth

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

The bandwidth of the emission shall be no wider than 0.25 % of the center frequency for device operating above 70 MHz and below 900 MHz. For device operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. The bandwidth is determined at the points 20 dB down from the modulated carrier.



6. Duty Cycle Correction

6.1 Operating Environment

Temperature : 19°C
 Relative humidity : 40%R.H.

6.2 Test Set-up

The spectrum analyzer was set to Zero span and the video triggered to collect the pulse train of the modulation. Calculations of the duty cycle correction factor were obtained from time data provided by the plots.

6.3 Test Equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2009
■ - HL223	Rohde & Schwarz	Log-periodic antenna	835998/004	12. 28. 2009

6.4 Test result of Duty Cycle

- Test Date : April 13, 2009
 - Reference standard : Part 15 Subpart C, Sec. 15.35
 - Operating condition : RF transmitting mode
 - Spectrum resolution bandwidth(6dB) : 100 kHz
 - Power Source : AC 120 V/ 60 Hz, DC 5 V , 1.0 A

6.4.1 Test Frequency: 418 MHz

Define of duty cycle

- Number of Code groups per 100ms = 1
 - Number of Wide Pulse = 335
 - Width of Pulses = 0.006ms
 - Number of Narrow Pulse = 693
 - Width of Pulses =0.006μs

Calculation of duty cycle

- Total width of pulse train: $335 \times 0.006 \text{ ms} + 693 \times 0.006 \mu\text{s} = 6.17 \text{ ms}$
 - Duty Cycle (%): $6.17 \text{ ms} / 100 \text{ ms} = 6.17 \%$
 - Duty Cycle (dB): -24.20 dB

Fundamental Frequency	Total width of ON-Time	Duty Cycle (%)	Duty Cycle (dB)
418 MHz	6.17 ms	6.17 %	- 24.20 dB



6.4.2 Test Frequency: 433.92 MHz

Define of duty cycle

- Number of Code groups per 100ms = 1
- Number of Wide Pulse = 335
- Width of Pulses = 0.006ms
- Number of Narrow Pulse = 693
- Width of Pulses = 0.006 μ s

Calculation of duty cycle

- Total width of pulse train: $335 \times 0.006 \text{ ms} + 693 \times 0.006 \mu\text{s} = 6.17 \text{ ms}$
- Duty Cycle (%): $6.17 \text{ ms} / 100 \text{ ms} = 6.17 \%$
- Duty Cycle (dB): -24.20 dB

Fundamental Frequency	Total width of ON-Time	Duty Cycle (%)	Duty Cycle (dB)
433.92 MHz	6.17 ms	6.17 %	- 24.20 dB

Refer to APPENDIX B: Test Plots of complete Pulse Train



7. Radiated Emission

7.1 Operating environment

Temperature : 12 °C
Relative humidity : 44 % R.H.

7.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber using the procedure in ANSI C63.4/2003 13.1.4.1 and found frequency for open area test site.

The formal radiated emission was measured at 3 m distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

7.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test items	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 3.54 dB	Confidence levels of 95 % (k=2)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 3.49 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	± 3.85 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	± 3.76 dB	Confidence levels of 95 % (k=2)
Radiated emission (30 MHz ~ 300 MHz, 10 m, Vertical)	± 3.21 dB	Confidence levels of 95 % (k=2)
Radiated emission (30 MHz ~ 300 MHz, 10 m, Horizontal)	± 3.32 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Vertical)	± 3.77 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Horizontal)	± 3.84 dB	Confidence levels of 95 % (k=2)



7.4 Limit

Fundamental Frequency (MHZ)	Field strength of Fundamental			Field strength of Spurious Emission	
	uV/m	dBuV/m	uV/m	uV/m	dBuV/m
40.66~40.7	2 250	67.04		225	47.04
70~130	1 250	61.94		125	41.94
130~174	1 250 to 3 750	61.94 to 71.48	56.81818(F)-6136.3636	125 to 375	41.94 to 51.48
174~260	3 750	71.48		375	51.48
260~470	3 750 to 12 500	71.48 to 81.94	41.6667(F)-7083.3333	375 to 1250	51.48 to 61.94
Above 470	12 500	81.94		1250	61.94
Restricted Band	N/A			500	54.0

7.5 Test equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2009
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 13. 2009
■ - HK116	Rohde & Schwarz	Biconical ANT	832639/007	12. 28. 2009
■ - HL223	Rohde & Schwarz	Log-periodic antenna	835998/004	12. 28. 2009
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	12. 26. 2009
■ - HD100	HD GmbH	Position Controller	100/692/01	N/A
■ - DS415S	HD GmbH	Turntable	415/657/01	N/A
■ - MA240	HD GmbH	Antenna Mast	240/565/01	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	11. 11. 2009



7.6 Radiated emission test data

- Test Date : April 13, 2009
- Reference standard : Part 15 Subpart C, Sec.15.231
- Operating condition : RF transmitting mode
- Measuring Distance : 3 m
- Spectrum resolution bandwidth (6 dB) : 120 kHz / 1 MHz
- Detector mode : Peak detector mode / Average detector mode
- Power Source : AC 120 V/ 60 Hz, DC 5 V
- Note : 1. Through three orthogonal axes were investigated and the worst case is reported.

7.6.1 Test Frequency: 418 MHz

Field Strength at the Fundamental and Harmonic frequencies

Frequency (MHz)	Measurement Level					Limit		Margin		Positioning System		
	Reading (dBuV/m)	Tranduce (dB/m)	Duty cycle (dB)	Peak (dBuV/m)	Average (dBuV/m)	Peak (dBuV/m)	Aveage (dBuV/m)	Peak (dB)	Average (dB)	Pol. (H/V)	Height (cm)	Angle (deg)
Fundamental												
418.00	78.07	22.14	-24.20	100.21	76.01	100.28	80.28	0.07	4.27	H	100	156
Spurious												
836.00	41.2	30.30	-24.20	71.49	47.29	80.28	60.28	8.79	12.99	V	100	136
1254.00	57.5	-10.32	-24.20	47.20	23.00	80.28	60.28	33.08	37.28	H	300	276
1672.00	60.3	-8.62	-24.20	51.70	27.50	74.00	54.00	22.30	26.50	V	100	228
2090.00	57.8	-7.08	-24.20	50.70	26.50	80.28	60.28	29.58	33.78	V	110	250
2508.00	58.1	-5.20	-24.20	52.90	28.70	80.28	60.28	27.38	31.58	V	105	246
2926.00	55.5	-3.85	-24.20	51.70	27.50	80.28	60.28	28.58	32.78	H	228	195
3344.00	63.7	-3.17	-24.20	60.50	36.30	80.28	60.28	19.78	23.98	V	134	175
3762.00	62.1	-2.29	-24.20	59.80	35.60	74.00	54.00	14.20	18.40	H	195	22
4180.00	57.3	-1.14	-24.20	56.20	32.00	74.00	54.00	17.80	22.00	V	100	187.0


*Comment ; below 1GHz : Tranduce = ANI factor + cable loss
 above 1GHz : Tranduce = ANI factor + cable loss + AMP gain

Note: "H": Horizontal, "V": Vertical



◆ Field Strength of the spurious emission except the harmonic frequencies

Frequency (MHz)	Measurement Level				Limit (dBμ V/m)	Margin (dBμ V/m)	Positioning System		
	Reading	Antenna	Cable	Test Result			Pol. (H/V)	Height (cm)	Angle (°)
	Value(dBμ V)	Factor(dB)	Loss(dB)	(dBμ V/m)					
39.17	17.90	10.63	1.80	30.33	40.00	9.67	V	100	90
44.85	17.92	9.54	1.90	29.36	40.00	10.64	V	120	25
78.35	18.88	7.89	2.37	29.14	40.00	10.86	V	145	145
104.55	14.80	9.76	2.75	27.31	43.50	16.19	H	195	220
147.91	7.89	11.54	3.35	22.78	43.50	20.72	V	135	75
189.33	5.06	13.15	3.74	21.95	43.50	21.55	V	100	215
352.61	12.89	14.33	5.63	32.85	46.00	13.15	H	225	180
431.04	19.21	16.22	6.26	41.69	46.00	4.31	H	175	95
755.12	1.61	20.42	8.23	30.26	46.00	15.74	V	130	22

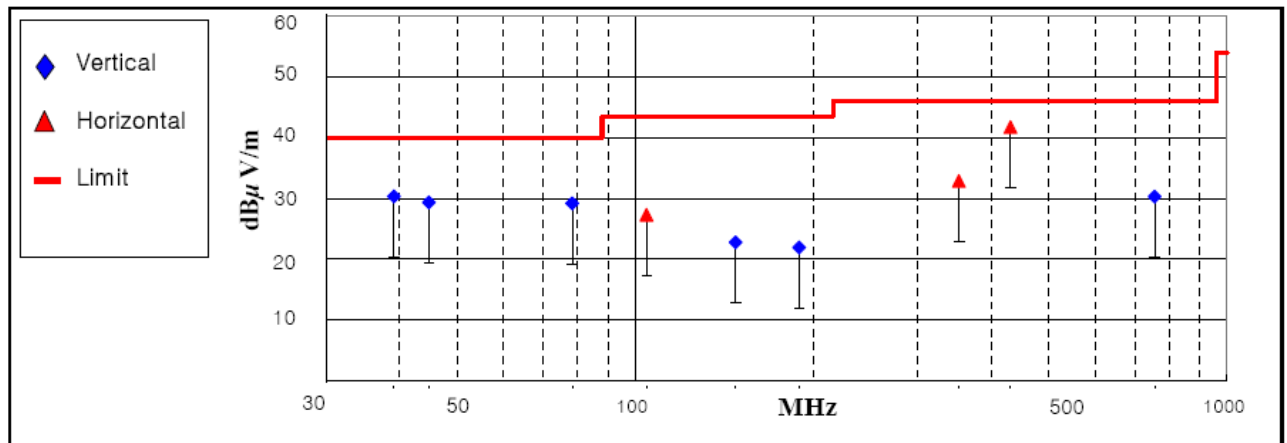


< Fig 4. Radiated emission result (30 MHz ~ 1 000 MHz)_418 MHz >



◆ Field Strength of the spurious emission except the harmonic frequencies

Frequency (MHz)	Measurement Level					Limit (dBμ V/m)		Margin (dBμ V/m)		Positioning System			
	Reading Value (dBμ V/m)		AF	AMP / CL	Test Result (dBμ V/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (°)
	Peak	Average	(dB)	(dB)	Peak	Average							
All frequency					-	-			<<	<<			

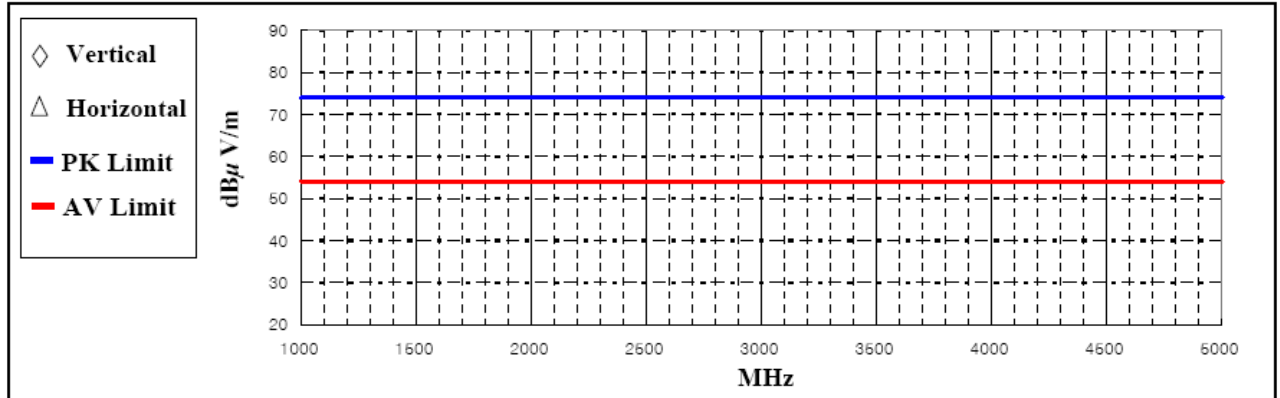

*Comment : AMP/CL_Cable loss value + AMP gain value
 AF : Antenna factor value
 Pol. : H(Horizontal), V(Vertical)

"The margin is more than 30 dBμV/m"

< Fig 5. Radiated Emission result (1GHz ~ 5GHz)_418 MHz >



7.6.2 Test Frequency: 433.92 MHz

Field Strength at the Fundamental and Harmonic frequencies

Frequency (MHz)	Measurement Level					Limit		Margin		Positioning System		
	Reading (dBuV/m)	Tranduce (dB/m)	Duty cycle (dB)	Peak (dBuV/m)	Average (dBuV/m)	Peak (dBuV/m)	Aveage (dBuV/m)	Peak (dB)	Average (dB)	Pol. (H/V)	Height (cm)	Angle (deg)
Fundamental												
433.92	75.59	22.55	-24.20	98.14	73.94	100.83	80.83	2.69	6.88	H	100	168
Spurious												
867.84	44.8	30.79	-24.20	75.64	51.44	80.83	60.83	5.19	9.38	V	110	285
1301.76	57.4	-10.11	-24.20	47.30	23.10	74.00	54.00	26.70	30.90	V	100	80
1735.68	61.2	-8.40	-24.20	52.80	28.60	80.83	60.83	28.03	32.22	V	132	153
2169.60	50.2	-6.72	-24.20	43.50	19.30	80.83	60.83	37.33	41.52	H	150	41
2603.52	55.2	-4.89	-24.20	50.30	26.10	80.83	60.83	30.53	34.72	H	224	320
3037.44	49.9	-3.56	-24.20	46.30	22.10	80.83	60.83	34.53	38.72	H	200	121
3471.36	61.3	-3.01	-24.20	58.30	34.10	80.83	60.83	22.53	26.72	V	105	0
3905.28	66.4	-1.92	-24.20	64.50	40.30	74.00	54.00	9.50	13.70	V	100	77
4339.20	59.6	-0.66	-24.20	58.90	34.70	74.00	54.00	15.10	19.30	V	100	198


*Comment ; below 1GHz : Tranduce = ANI factor + cable loss
 above 1GHz : Tranduce = ANI factor + cable loss + AMP gain

Note: "H": Horizontal, "V": Vertical



◆ Field Strength of the spurious emission except the harmonic frequencies

Frequency (MHz)	Measurement Level				Limit (dB μ V/m)	Margin (dB μ V/m)	Positioning System		
	Reading	Antenna	Cable	Test Result			Pol. (H/V)	Height (cm)	Angle (°)
	Value(dB μ V)	Factor(dB)	Loss(dB)	(dB μ V/m)					
44.38	19.04	9.62	1.89	30.55	40.00	9.45	V	120	270
64.35	15.80	7.67	2.14	25.61	40.00	14.39	V	100	226
122.04	12.63	10.78	2.94	26.35	43.50	17.15	V	123	28
144.01	12.37	11.37	3.30	27.04	43.50	16.46	V	150	185
288.01	3.68	17.61	4.96	26.25	46.00	19.75	H	220	100
352.61	7.97	14.33	5.63	27.93	46.00	18.07	H	197	39
755.16	1.71	20.42	8.23	30.36	46.00	15.64	H	200	176

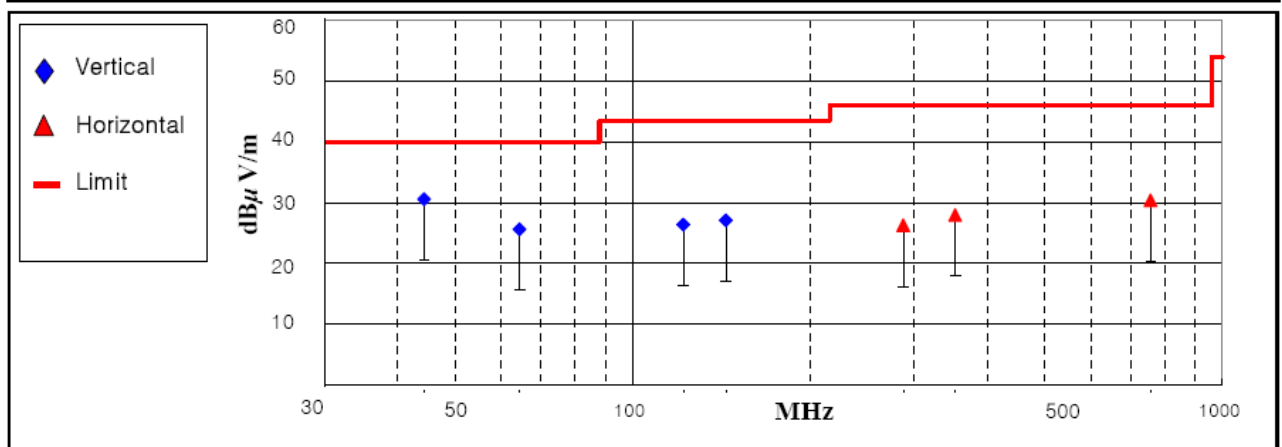


< Fig 6. Radiated emission result (30 MHz ~ 1 000 MHz)_433.92 MHz >



◆ Field Strength of the spurious emission except the harmonic frequencies

Frequency (MHz)	Measurement Level						Limit (dBμ V/m)		Margin (dB)		Positioning System		
	Reading Value (dBμ V/m)		AF	AMP / CL	Test Result (dBμ V/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (°)
	Peak	Average	(dB/m)	(dB)	Peak	Average							
3342.40	57.93	46.33	28.82	-36.65	50.10	38.50	74.00	54.00	23.90	15.50	H	200	152

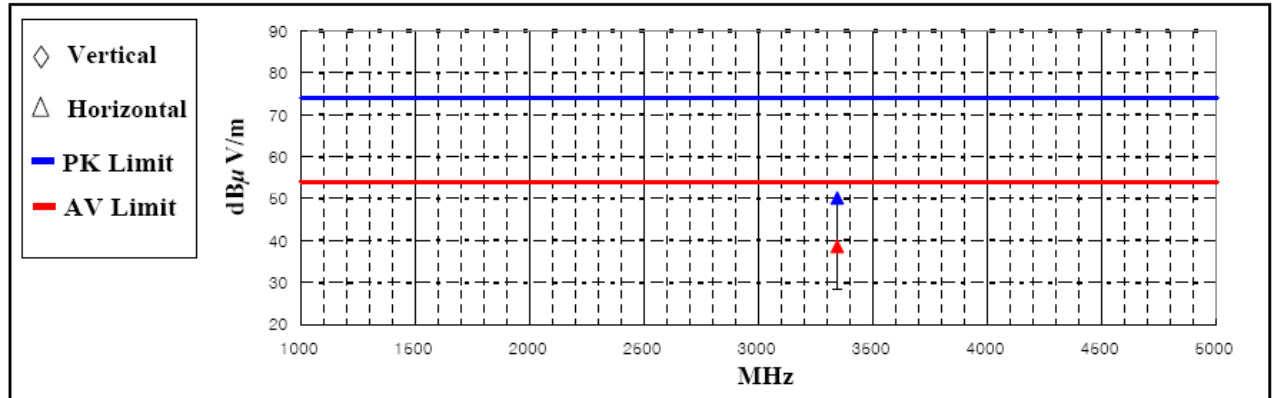

*Comment : AMP/CL_Cable loss value + AMP gain value
 AF : Antenna factor value
 Pol. : H(Horizontal), V(Vertical)

< Fig 7. Radiated Emission result (1GHz ~ 5GHz)_433.92 MHz >



8. Occupied Bandwidth Measurement

8.1 Operating Environment

Temperature : 19 °C
Relative humidity : 40 %R.H.

8.2 Test Set-up

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 200 kHz/division frequency span, 100 kHz 3 dB resolution bandwidth and 5 dB/division logarithmic display from an ESI spectrum analyzer.
The measuring bandwidth shall be set to a value greater than 5 % of the allowed bandwidth (ANSI C63.4-1992 I6)

8.3 Limit

Frequency Range(MHz)	Occupied Bandwidth Limit
70 ~ 900 MHz	0.25 %
>900 MHz	0.5 %

8.4 Test Equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2009
■ - HL223	Rohde & Schwarz	Log-periodic antenna	835998/004	12. 28. 2009

8.5 Test result of occupied bandwidth

- . Test Date : April 13, 2009
- . Reference standard : Part 15 Subpart C, Sec. 15.231
- . Operating condition : RF transmitting mode
- . Spectrum resolution bandwidth(3dB) : 30 kHz
- . Power Source : AC 120 V/ 60 Hz, DC 5 V, 1.0 A

8.5.1 Test Frequency: 418 MHz

Allowed Bandwidth : $418 \times 0.0025 = 1045$ kHz

Fundamental Frequency	Bandwidth	Allowed Bandwidth	Result
418 MHz	960 kHz	1 045 kHz	PASS



8.5.2 Test Frequency: 433.92 MHz

Allowed Bandwidth: $433.92 \times 0.0025 = 1\,084.8$ kHz

Fundamental Frequency	Bandwidth	Allowed Bandwidth	Result
433.92 MHz	896 kHz	1 084.8 kHz	PASS

Refer to APPENDIX B: Test Plots of occupied bandwidth



9. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

9.1 Example 1 :

■ 20.3 MHz

$$\begin{aligned} \text{Class B Limit} &= 250 \mu\text{V} &= 48 \text{ dB}\mu\text{V} \\ \text{Reading} &= -67.8 \text{ dBm(Calibrated level)} \\ \text{Convert to dB}\mu\text{V} &= -67.8 \text{ dBm} + 107 &= 39.2 \text{ dB}\mu\text{V} \\ 10^{(39.2\text{dB}\mu\text{V}/20)} &= 91.2 \mu\text{V} \\ \text{Margin} &= 39.2 - 48 &= -8.8 \\ &= 8.8 \text{ dB below Limit} \end{aligned}$$

9.2 Example 2 :

■ 66.7 MHz

$$\begin{aligned} \text{Class B Limit} &= 100 \mu\text{V}/\text{m} &= 40.0 \text{ dB}\mu\text{V}/\text{m} \\ \text{Reading} &= -76.0 \text{ dBm(Calibrated level)} \\ \text{Convert to dB}\mu\text{V}/\text{m} &= -76.8 \text{ dBm} + 107 &= 31.0 \text{ dB}\mu\text{V}/\text{m} \\ \text{Antenna Factor + Cable Loss} &= 5.8 \text{ dB} \\ \text{Total} &= 36.8 \text{ dB}\mu\text{V}/\text{m} \\ \text{Margin} &= 36.8 - 40.0 &= -3.2 \\ &= 3.2 \text{ dB below Limit} \end{aligned}$$



10. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

OH SUNG ELECTRONICS CO., LTD. RF Transmitter (Model Name: RFTX-1) was complies with §15.231 of the FCC Rules.