

FCC EVALUATION REPORT FOR CERTIFICATION

FCC Subpart C (Class II Permissive Change)

Manufacturer: Ohsung Electronics Co., Ltd.

Date of Issue: April 05, 2017

**#181 Gongdan-dong, Gumi-si, Gyeongsangbuk-Do
South Korea**

Order Number: GETEC-C1-17-161

Attn: Mr. Hak Ki, Kim / General Manager

Test Report Number: GETEC-E3-17-013

Test Site: GUMI UNIVERSITY EMC CENTER

(Test firm Registration Number: 269701)

FCC ID. : OZ5URCTDC7100

Applicant : Ohsung Electronics Co., Ltd.

Rule Part(s) : FCC Part 15 Subpart C-Intentional Radiator § 15.247
Test Method : ANSI C63.10 (2013)
Equipment Class : Digital Transmission System(DTS)
EUT Type : Wireless Remote Controller
Type of Authority : Certification
Model Name : TDC-7100
Trade Mark : URC

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10 (2013)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,

Soon Hoon

**Soon-Hoon Jeong, Senior Engineer
GUMI UNIVERSITY EMC CENTER**

Jae-Hoon Jeong

**Jae-Hoon Jeong, Technical Manager
GUMI UNIVERSITY EMC CENTER**



CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT.....	6
3.2 DEFINITION OF MODELS.....	6
3.3 SUPPORT EQUIPMENT / CABLES USED	7
3.4 MODIFICATION ITEM(S).....	7
4. ANTENNA REQUIREMENT - §15.203	8
4.1 DESCRIPTION OF ANTENNA.....	8
5. DESCRIPTION OF TESTS.....	8
5.1 TEST CONDITION.....	8
6. REFERENCES STANDARDS	8
7. SUMMARY OF TEST RESULTS	9
8. 6 DB BANDWIDTH MEASUREMENT	10
8.1 OPERATING ENVIRONMENT	10
8.2 TEST SET-UP (LAYOUT)	10
8.3 LIMIT	10
8.4 TEST EQUIPMENT USED.....	10
8.5 TEST TEST PROCEDURE	10
8.6 TEST RESULT	11
9. CONDUCTED MAXIMUM PEAK OUTPUT POWER MEASUREMENT	18
9.1 OPERATING ENVIRONMENT	18
9.2 TEST SET-UP (LAYOUT)	18
9.3 LIMIT	18
9.4 TEST EQUIPMENT USED.....	18
9.5 TEST PROCEDURE	18
9.6 TEST RESULT	19
10. POWER SPECTRAL DENSITY MEASUREMENT.....	20
10.1 OPERATING ENVIRONMENT	20
10.2 TEST SET-UP (LAYOUT)	20
10.3 LIMIT	20
10.4 TEST EQUIPMENT USED.....	20
10.5 TEST PROCEDURE	20
10.6 TEST RESULT	21
11. CONDUCTED SPURIOUS EMISSION & OUT OF BAND EMISSION	28
11.1 OPERATING ENVIRONMENT.....	28
11.2 TEST SET-UP (LAY-OUT).....	28
11.3 LIMIT	28
11.4 TEST EQUIPMENT USED	28
11.5 TEST PROCEDURE.....	28
11.6 TEST RESULT	29





12. AC POWER LINE CONDUCTED EMISSION	38
12.1 OPERATING ENVIRONMENT	39
12.2 TEST SET-UP	39
12.3 MEASUREMENT UNCERTAINTY.....	39
12.4 LIMIT	40
12.5 TEST EQUIPMENT USED.....	40
12.6 TEST DATA FOR CONDUCTED EMISSION	40
12.7 TEST RESULT	41
13. RADIATED SPURIOUS & RESTRICTED BAND EDGE EMISSION.....	44
13.1 OPERATING ENVIRONMENT	45
13.2 TEST SET-UP.....	45
13.3 MEASUREMENT UNCERTAINTY	45
13.4 LIMIT	46
13.5 TEST EQUIPMENT USED.....	46
13.6 TEST DATA FOR RADIATED SPURIOUS EMISSION.....	47
13.7 TEST DATA FOR RADIATED RESTRICTED BAND EDGE EMISSION	51
14. SAMPLE CALCULATIONS.....	52
14.1 EXAMPLE 1 :	52
14.2 EXAMPLE 2 :	52
15. RECOMMENDATION & CONCLUSION.....	53
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – INFORMATION OF CLASS II PERMISSIVE CHANGE	
APPENDIX C – SCHEMATIC DIAGRAM	
APPENDIX D – PART LIST	
APPENDIX E – TEST SETUP PHOTOGRAPH	
APPENDIX F – INTERNAL PHOTOGRAPH	
APPENDIX H – ANTENNA SPECIFICATION	
APPENDIX I – RF EXPOSURE EVALUATION	
APPENDIX J – EXTERNAL PHOTOGRAPH	





Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: Ohsung Electronics Co., Ltd.

Applicant Address: #141 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea

Manufacturer: Ohsung Electronics Co., Ltd.

Manufacturer Address: #141 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea

Contact Person: Hak Ki, Kim / General Manager

Telephone Number: +82-54-468-7281 Fax Number: +82-54-461-8368

- **FCC ID.** OZ5URCTDC7100
- **Equipment Class** Digital Transmission System (DTS)
- **EUT Type** Wireless Remote Controller
- **Model Name** TDC-7100
- **Rule Part(s)** FCC Part 15 Subpart C-Intentional Radiator § 15.247
- **Test Method** ANSI C63.10 (2013)
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v03r05(April 8,2016)
- **Dates of Test** March 23~ 31, 2017
- **Place of Test** GUMI UNIVERSITY EMC CENTER (FCC Test firm Registration No.: 269701)
37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea
- **Test Report Number** GETEC-E3-17-013
- **Dates of Issue** April 05, 2017

EUT Type: Wireless Remote Controller

FCC ID.: OZ5URCTDC7100





2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2009) was used in determining radiated and conducted emissions emanating from **Ohsung Electronics Co., Ltd. Wireless Remote Controller (Model name: TDC-7100)**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**.

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Gyeongnam 641-713, Korea

This test site is one of the highest point of GUMI UNIVERSITY at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.10 (2013)

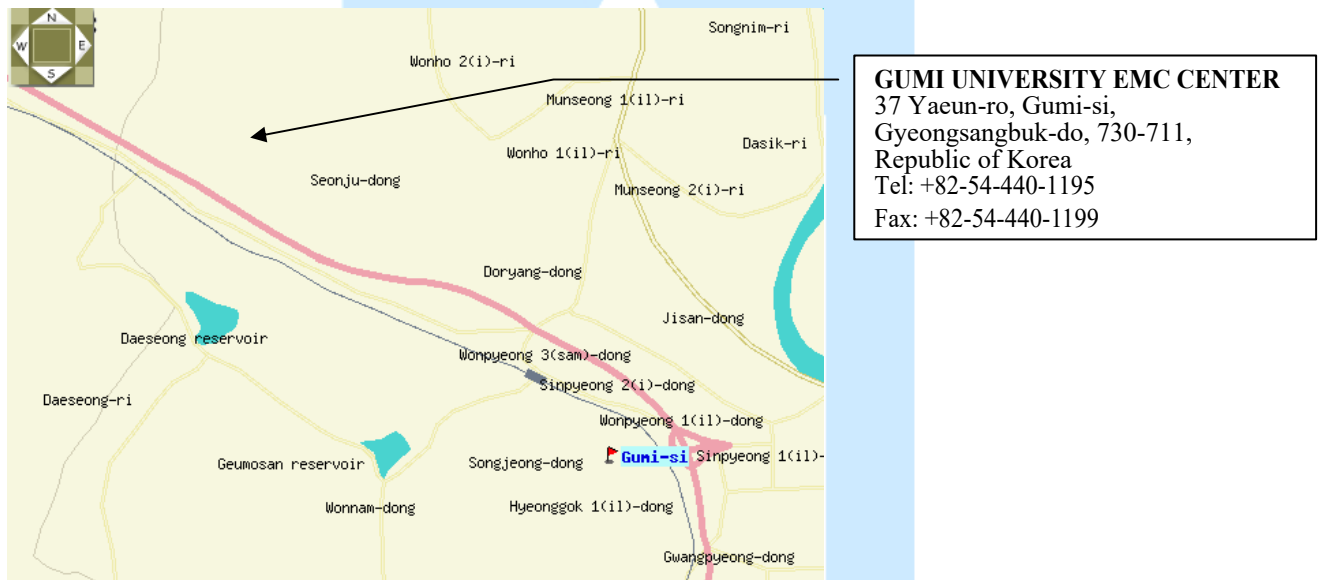


Fig 1. The map above shows the Gumi University in vicinity area.





3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **Ohsung Electronics Co., Ltd. Wireless Remote Controller (Model Name: TDC-7100) FCC ID.: OZ5URCTDC7100**

- Equipment	: Wireless Remote Controller
- Model name	: TDC-7100
- Brand name	: UNIVERSAL REMOTE CONTROLLER
- Serial number	: Proto type
- Electrical Rating	: DC 3.7 V
- Manufacturer	: Ohsung electronics Co., Ltd.
- Channel Separations	: 5 MHz
- Type of Modulation	: DSSS, OFDM
- Channel frequency	: 2 412 MHz ~ 2 462 MHz
- Number of channel	: 11
- Type of chain	: One
- Antenna specification	: Manufacturer: FourStTech Co., Ltd. Antenna type : PCB antenna Gain : 4.94 dBi
- Hardware version	: V0.8.0.0
- Software version	: V4.3.001.053

3.2 Definition of models

-None.





3.3 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
Notebook Computer ¹⁾	SAMSUNG	NT-Q45	S/N: CNBA4300168AI00682D5800 FCC ID.: N/A
Uart board	Ohsung Electronics Co., Ltd.	Proto type	S/N : None. FCC ID.: None.

Note)

1) The Support Equipment use only setting to the test mode.

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
Wireless Remote Controller	Ohsung Electronics Co., Ltd.	TDC-7100	S/N : None. FCC ID.: None.
AC/DC Adaptor	MEILE GROUP LTD	MLF-B250502000UU	S/N: 160806001 FCC ID.: None.

3.3.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected between EUT and AC/DC Adaptor	1.0 m shielded with a ferrite core.

3.4 Modification Item(s)

- None





4. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

4.1 Description of Antenna

The **Ohsung Electronics Co., Ltd. Wireless Remote Controller**, comply with the requirement of §15.203 with a PCB antenna permanently attached to the transmitter.

5. Description of tests

5.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: 3.7 V / DC
- Operating condition during the test(s) :
 - . Continuous RF transmitting mode with nominal maximum RF output power.
 - . Operating channel frequency and modulation technology

Mode	Available channel	Frequency	Modulation Technology
IEEE 802.11b	1 ~ 11	2412 ~ 2462 MHz	DSSS
IEEE 802.11g	1 ~ 11	2412 ~ 2462 MHz	OFDM
IEEE 802.11n(HT20)	1 ~ 11	2412 ~ 2462 MHz	OFDM

- . EUT set condition (RF power setting value)

Test Software version	Channel	RF power setting value
adb	1 ~ 11	7

6. References Standards

- FCC Part 15 (2009) Subpart C-Intentional Radiator §15.247
- ANSI C 63.10 (2013): American National Standard for Testing Unlicensed Wireless Devices
- KDB 558074 D01 DTS meas Guidance v03r05 (April 08, 2016): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247





7. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Result
§15.247(a)(2)	6 dB Bandwidth	Pass
§15.247(b)(3)	Conducted Maximum Peak Output Power	Pass
§15.247(e)	Power Spectral Density	Pass
§15.247(d)	Conducted Out of Band Emission Emissions	Pass
§15.207(a)	AC Power line Conducted Emissions	Pass
§15.205, 15.209	Radiated Spurious Emissions	Pass
§15.247(d), 15.205, 15.209	Radiated Restricted Band Edge	Pass






8. 6 dB Bandwidth Measurement

8.1 Operating environment

Temperature : 19.1 °C
 Relative Humidity : 19.8 % R.H.

8.2 Test Set-up (Layout)

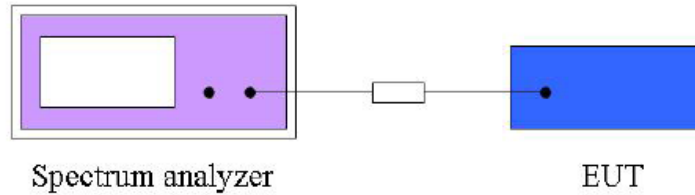

8.3 Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

8.4 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSP	Rohde & Schwarz	Signal Analyzer	101431	Dec. 08, 2017
■ - 56-10	Weinschel	10 dB Attenuator	53184	Apr. 20, 2017

8.5 Test Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.





8.6 Test result

- Test Date : March 23, 2017
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(2)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v03r05(April 8,2016)
- Operating Condition : RF transmitting mode (1 ch: 2 412 MHz, 6 ch: 2 437 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

IEEE 802.11b

Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Result
2 412	8.58	0.50	Complies
2 437	8.58	0.50	Complies
2 462	9.06	0.50	Complies

IEEE 802.11g

Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Result
2 412	15.54	0.50	Complies
2 437	15.18	0.50	Complies
2 462	15.00	0.50	Complies


IEEE 802.11n

Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Result
2 412	16.20	0.50	Complies
2 437	15.48	0.50	Complies
2 462	15.48	0.50	Complies






6 dB Bandwidth Plot on Configuration : IEEE 802.11b 1ch

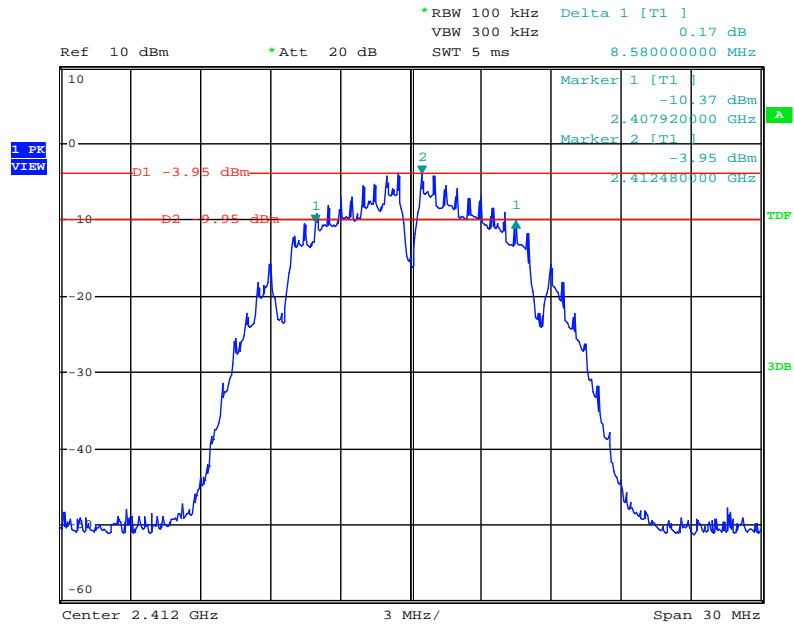

Date: 23.MAR.2017 16:52:54

6 dB Bandwidth Plot on Configuration : IEEE 802.11b 6ch

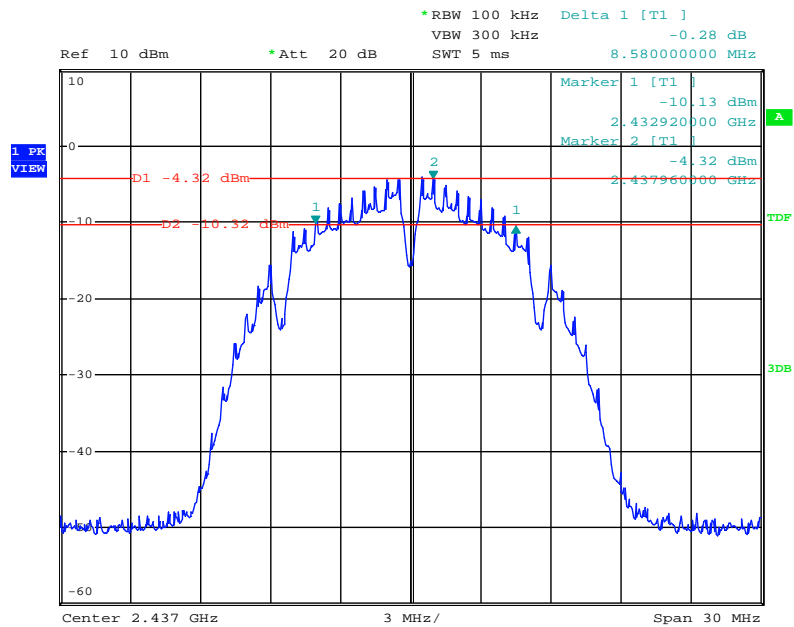

Date: 23.MAR.2017 16:54:56


EUT Type: Wireless Remote Controller

FCC ID.: OZ5URCTDC7100





6 dB Bandwidth Plot on Configuration : IEEE 802.11b 11ch

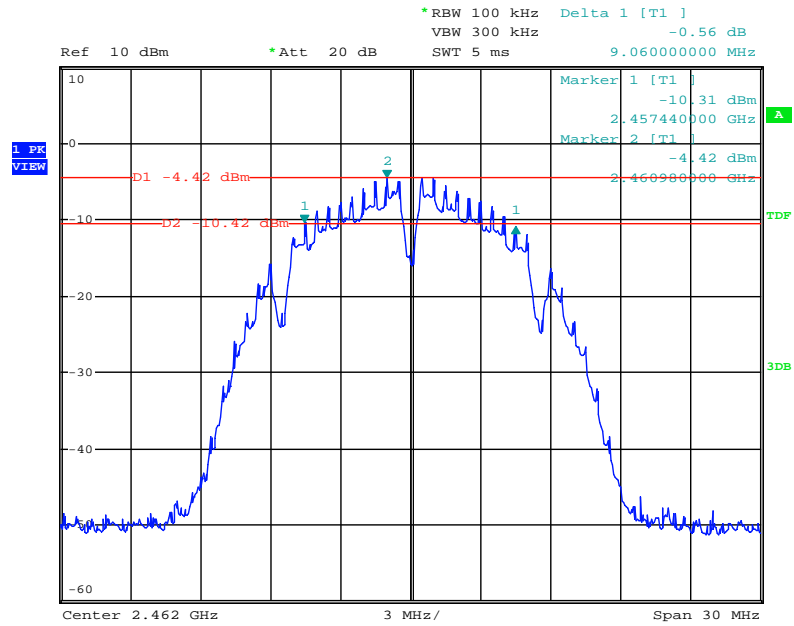


Date: 23.MAR.2017 16:58:23






6 dB Bandwidth Plot on Configuration : IEEE 802.11g 1ch

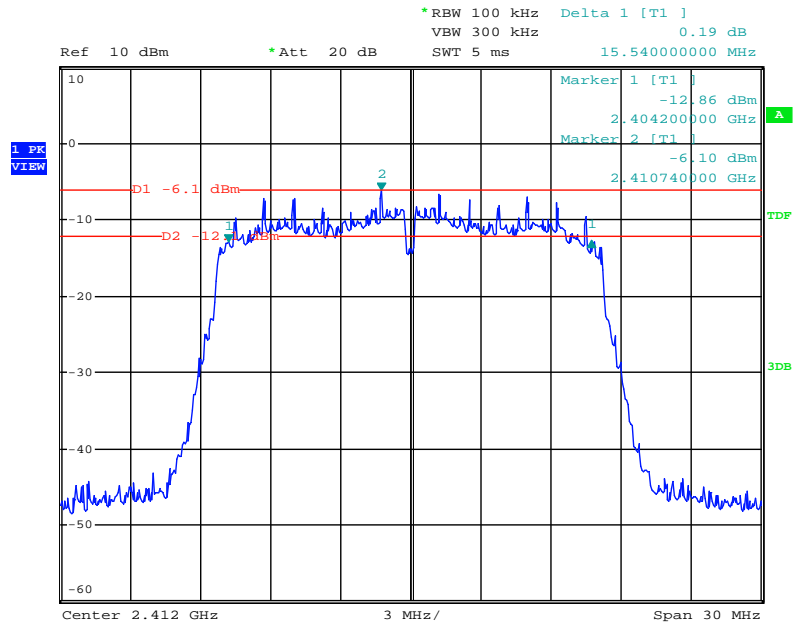

Date: 23.MAR.2017 17:26:10

6 dB Bandwidth Plot on Configuration : IEEE 802.11g 6ch

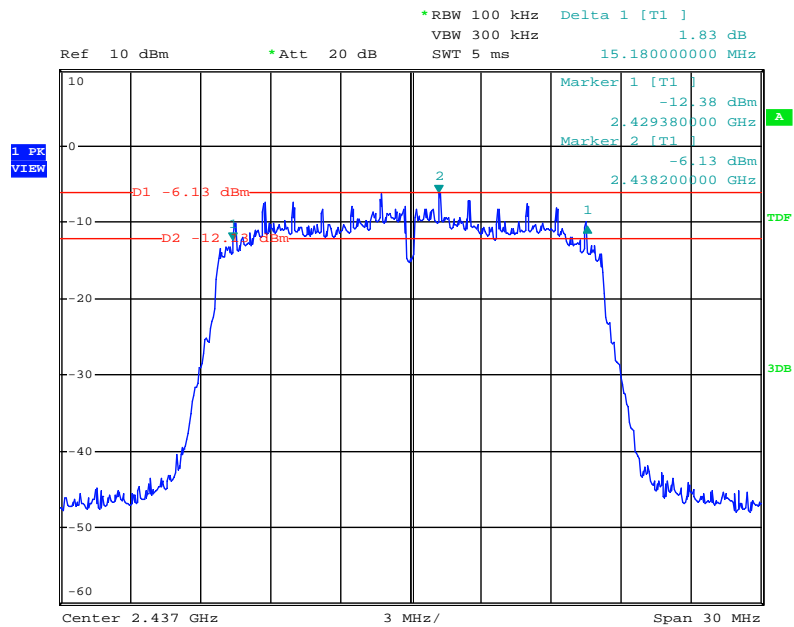

Date: 23.MAR.2017 17:29:37


EUT Type: Wireless Remote Controller

FCC ID.: OZ5URCTDC7100






6 dB Bandwidth Plot on Configuration : IEEE 802.11g 11ch

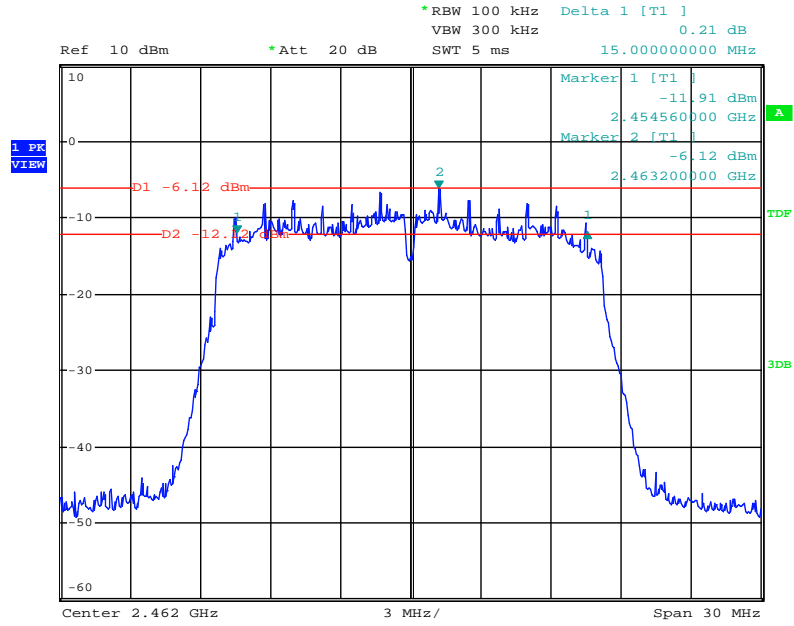


Date: 23.MAR.2017 17:31:04

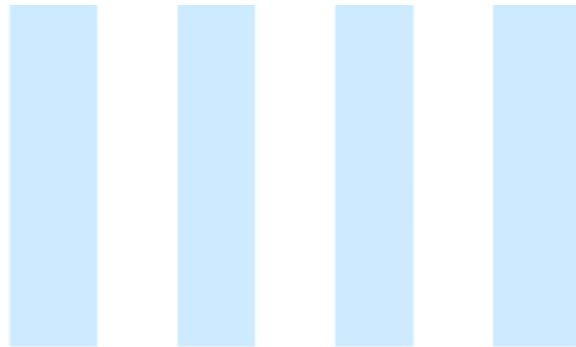




6 dB Bandwidth Plot on Configuration : IEEE 802.11n 1ch

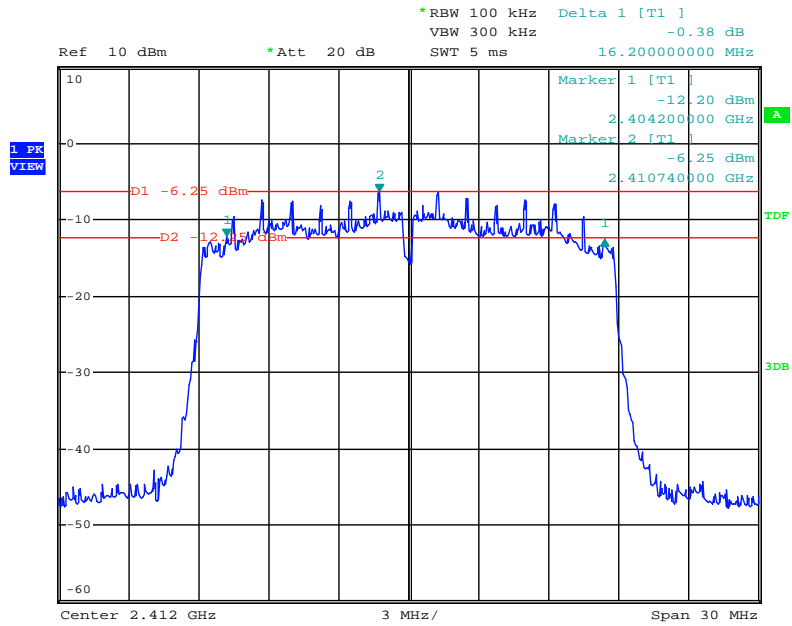

Date: 23.MAR.2017 17:44:46

6 dB Bandwidth Plot on Configuration : IEEE 802.11n 6ch

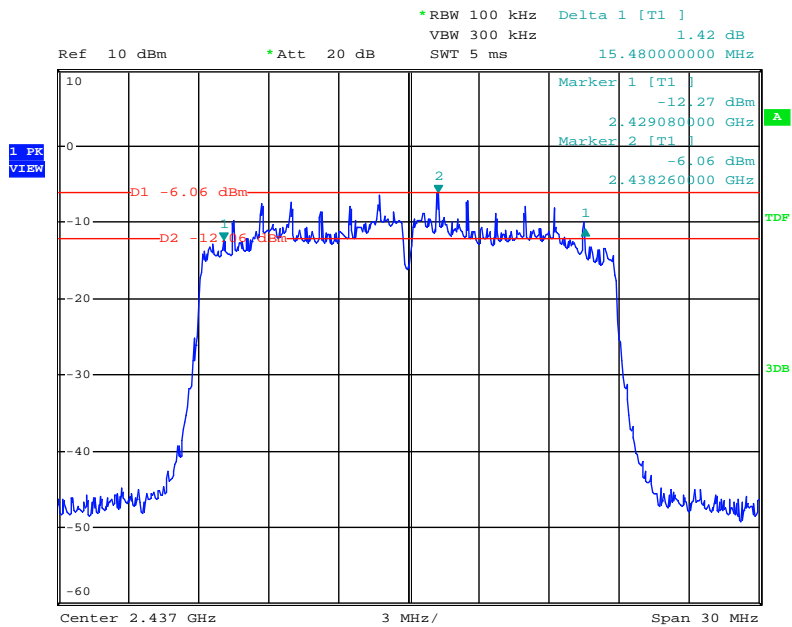

Date: 23.MAR.2017 17:43:15


EUT Type: Wireless Remote Controller

FCC ID.: OZ5URCTDC7100






6 dB Bandwidth Plot on Configuration : IEEE 802.11n 11ch

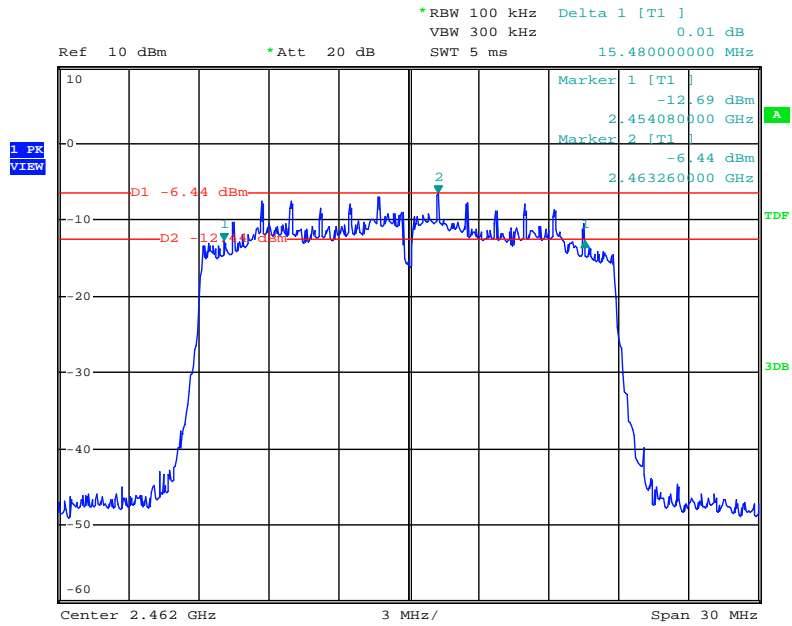

Date: 23.MAR.2017 17:46:01

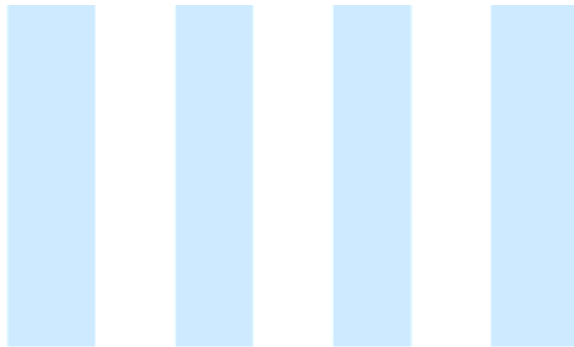




9. Conducted Maximum Peak Output Power Measurement

9.1 Operating environment

Temperature : 19.1 °C
 Relative Humidity : 33.0 % R.H.

9.2 Test Set-up (Layout)

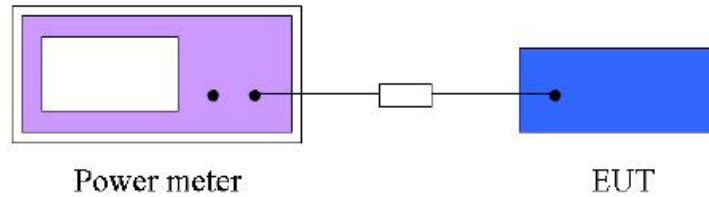

9.3 Limit

For systems using digital modulation in the (2 400~2 483.5) MHz, the limit for peak output power is 30 dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

9.4 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - NRV-Z32	Rohde & Schwarz	Peak Power sensor	100049	Dec. 06, 2017
■ - NRVS	Rohde & Schwarz	Single Channel Power Meter	101008	Apr 19, 2017
■ - NRP-Z51	Rohde & Schwarz	Power sensor	1138.0005.02	Apr. 20, 2017
■ - 56-10	Weinschel	10 dB Attenuator	53184	Apr. 20. 2017

9.5 Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.





9.6 Test Result

- Test Date : March 24, 2017
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(2)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v03r05(April 8,2016)
- Operating Condition : RF transmitting mode (1 ch: 2 412 MHz, 6 ch: 2 437 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

IEEE 802.11b

Frequency (MHz)	Average Conducted Power ¹⁾ (dBm)	Peak Conducted Power (dBm)	Max. Limit (dBm)	Result
2 412	4.52	6.13	30.00	Complies
2 437	4.05	5.52	30.00	Complies
2 462	4.19	5.71	30.00	Complies

Note: 1) The Average output power is reference data for RF Exposure.

IEEE 802.11g

Frequency (MHz)	Average Conducted Power ¹⁾ (dBm)	Peak Conducted Power (dBm)	Max. Limit (dBm)	Result
2 412	5.06	10.96	30.00	Complies
2 437	4.64	10.68	30.00	Complies
2 462	4.47	10.56	30.00	Complies

Note: 1) The Average output power is reference data for RF Exposure.

IEEE 802.11n

Frequency (MHz)	Average Conducted Power ¹⁾ (dBm)	Peak Conducted Power (dBm)	Max. Limit (dBm)	Result
2 412	4.95	10.45	30.00	Complies
2 437	4.56	10.29	30.00	Complies
2 462	4.36	10.04	30.00	Complies

Note: 1) The Average output power is reference data for RF Exposure.





10.6 Test Result

- Test Date : March 23, 2017
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(2)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v03r05(April 8,2016)
- Operating Condition : RF transmitting mode (1 ch: 2 412 MHz, 6 ch: 2 437 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

IEEE 802.11b

Frequency	PSD (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
2 412 MHz	-18.09	8.00	Complies
2 437 MHz	-18.98	8.00	Complies
2 462 MHz	-17.56	8.00	Complies

IEEE 802.11g

Frequency	PSD (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
2 412 MHz	-18.81	8.00	Complies
2 437 MHz	-20.30	8.00	Complies
2 462 MHz	-18.55	8.00	Complies


IEEE 802.11n

Frequency	PSD (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
2 412 MHz	-19.69	8.00	Complies
2 437 MHz	-20.39	8.00	Complies
2 462 MHz	-20.61	8.00	Complies






Power Density Plot on configuration : IEEE 802.11b 1ch

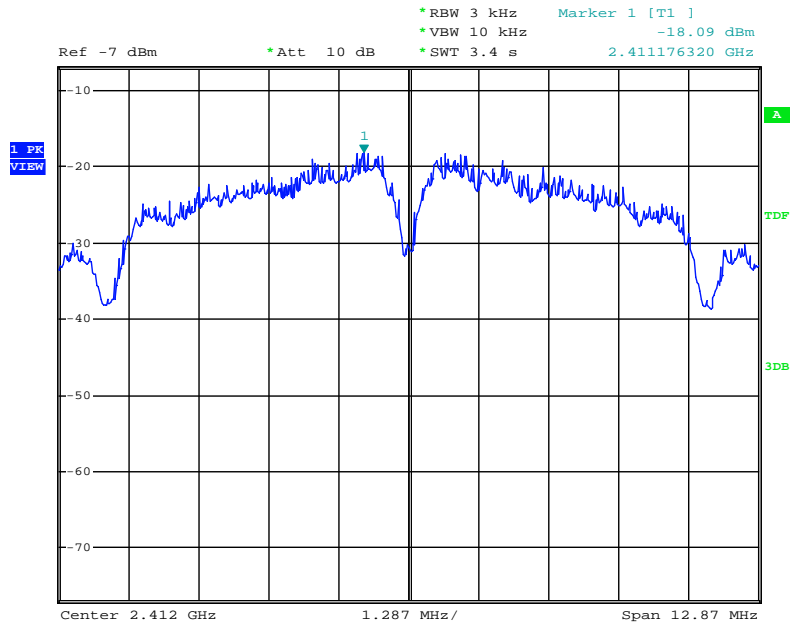

Date: 23.MAR.2017 17:58:44

Power Density Plot on configuration : IEEE 802.11b 6ch

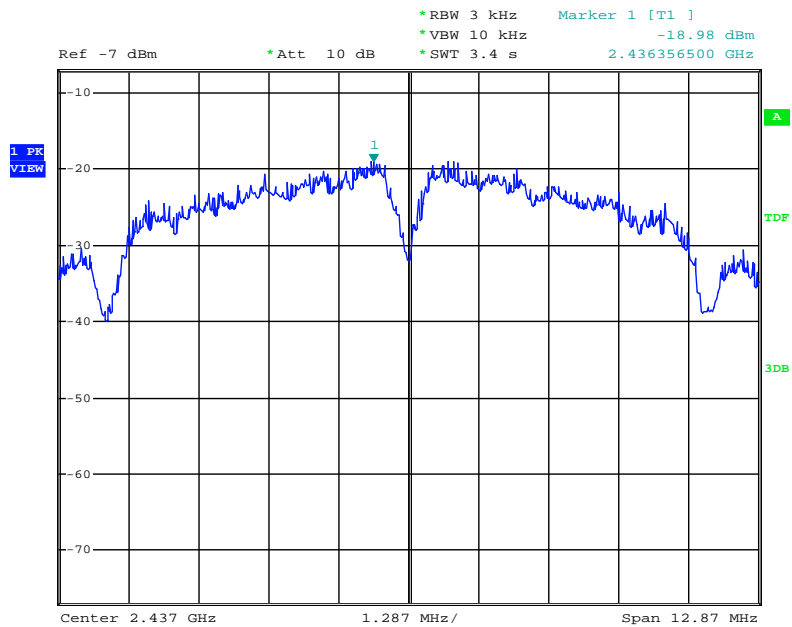

Date: 23.MAR.2017 18:08:08


EUT Type: Wireless Remote Controller

FCC ID.: OZ5URCTDC7100






Power Density Plot on configuration : IEEE 802.11b 11ch

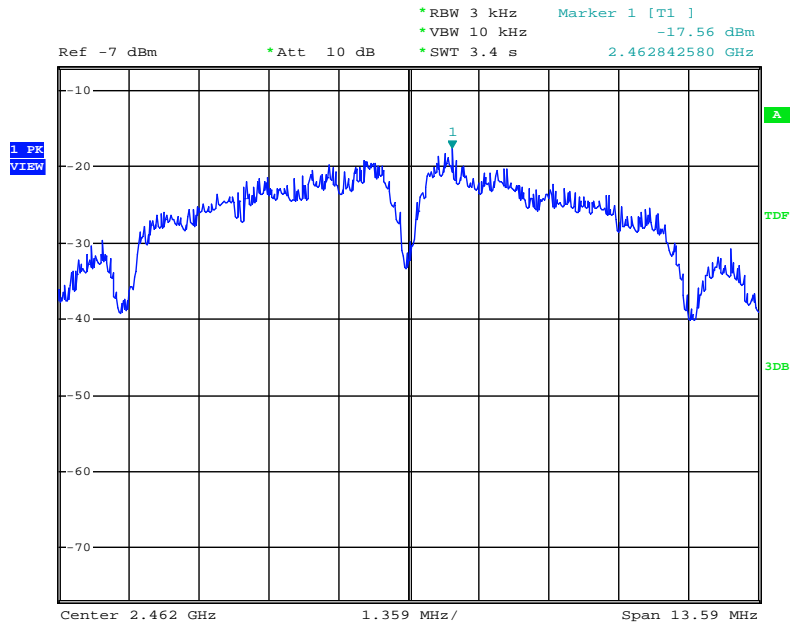


Date: 23.MAR.2017 18:09:44

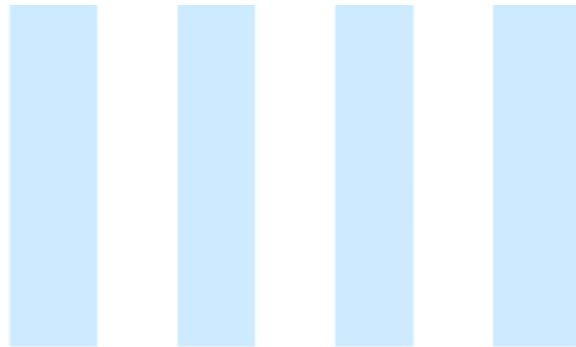




Power Density Plot on configuration : IEEE 802.11g 1ch

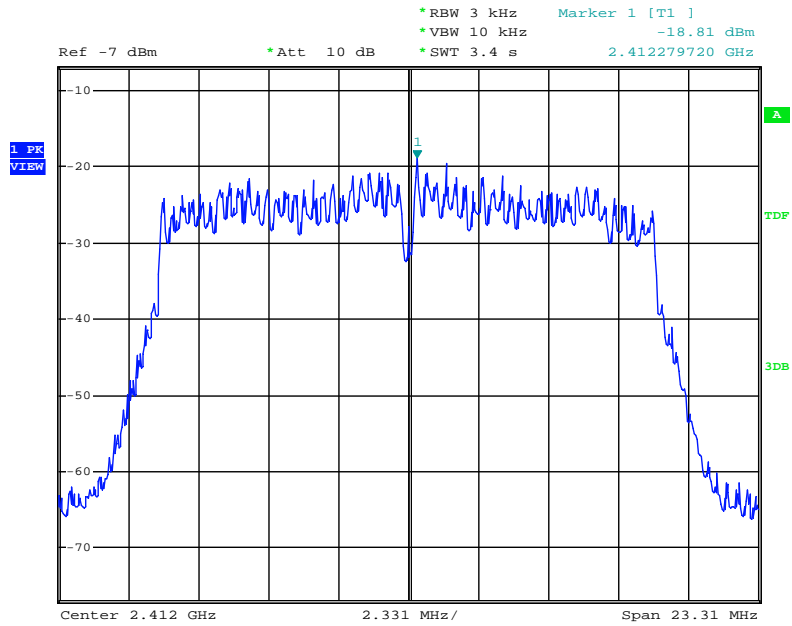

Date: 23.MAR.2017 18:18:16

Power Density Plot on configuration : IEEE 802.11g 6ch

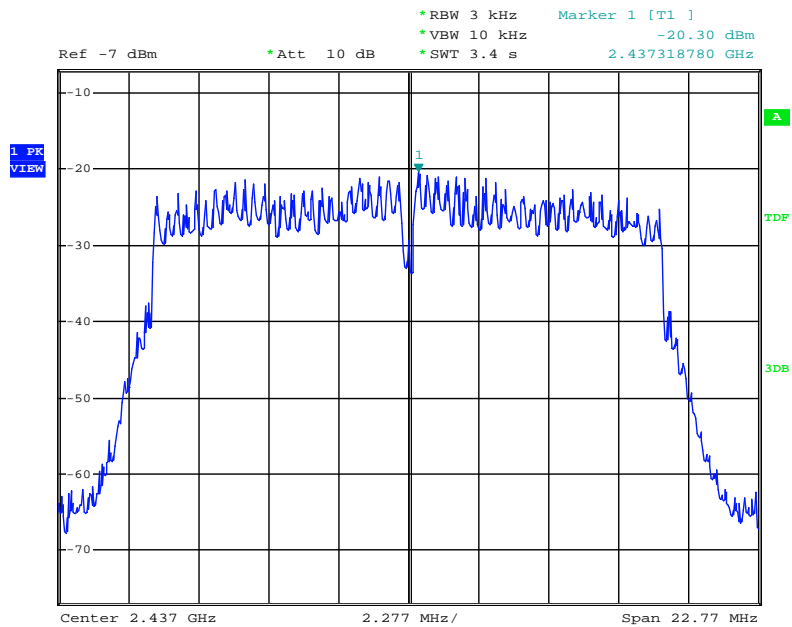

Date: 23.MAR.2017 18:25:18


EUT Type: Wireless Remote Controller

FCC ID.: OZ5URCTDC7100






Power Density Plot on configuration : IEEE 802.11g 11ch

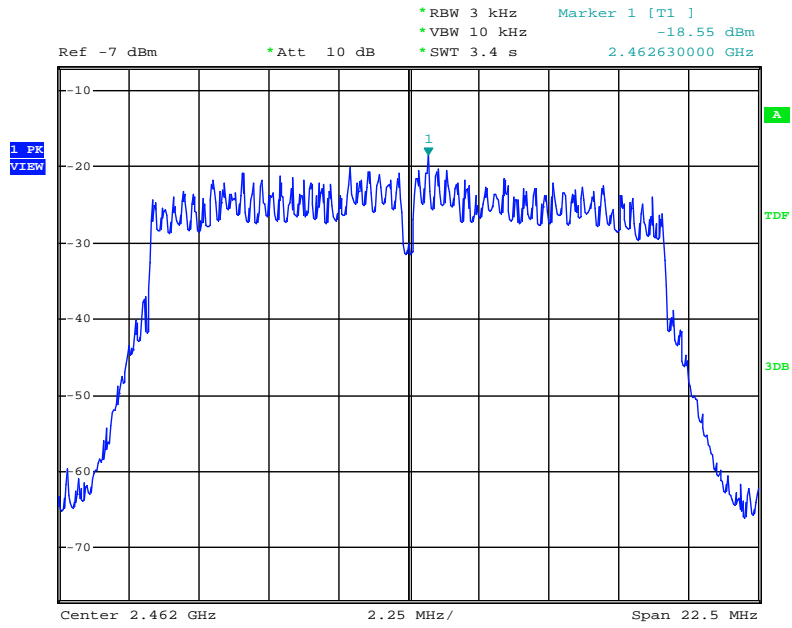


Date: 23.MAR.2017 18:26:34

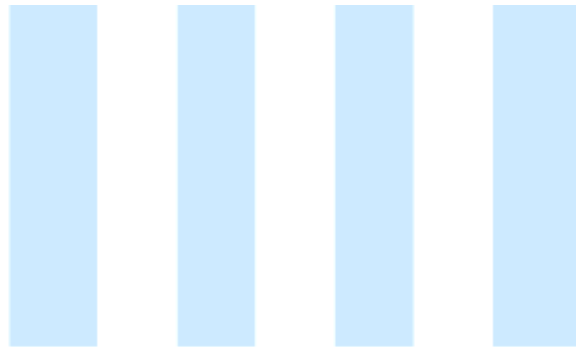




Power Density Plot on configuration : IEEE 802.11n 1ch

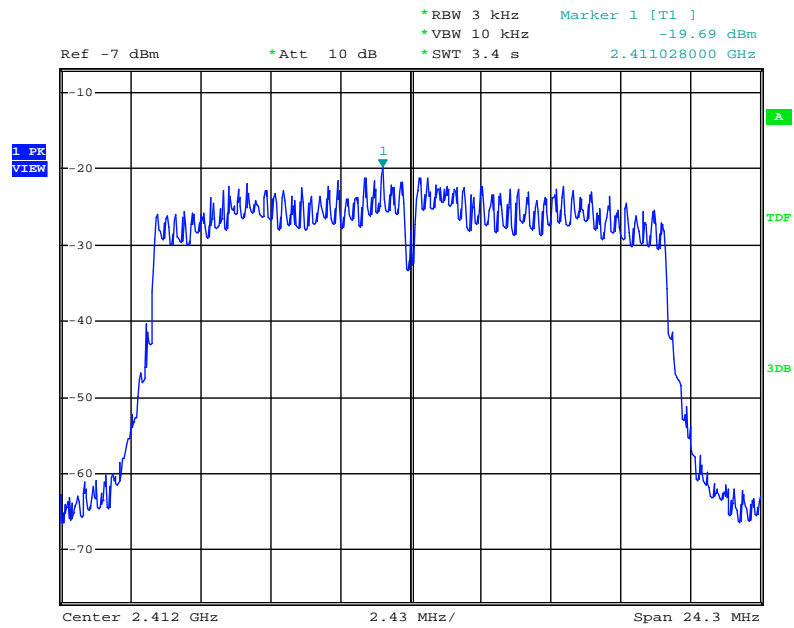

Date: 23.MAR.2017 18:31:52

Power Density Plot on configuration : IEEE 802.11n 6ch

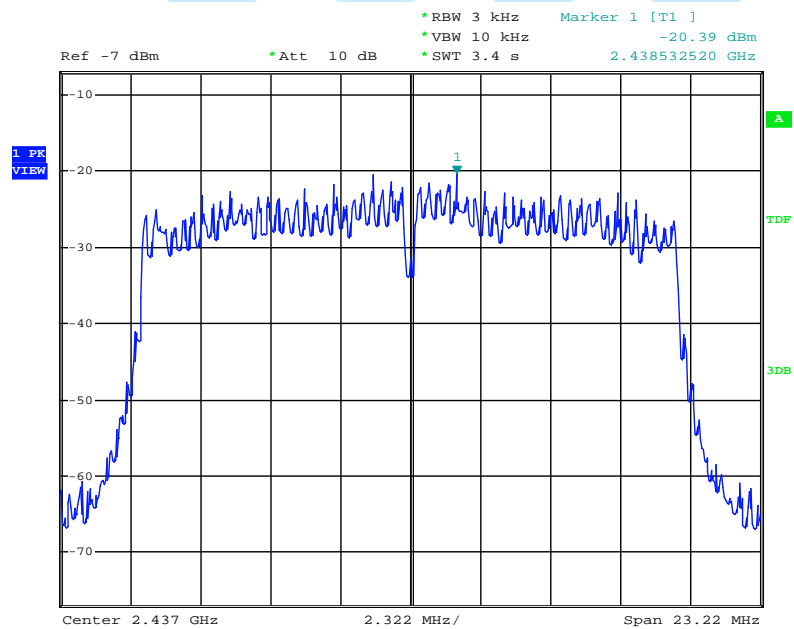

Date: 23.MAR.2017 18:39:58


EUT Type: Wireless Remote Controller

FCC ID.: OZ5URCTDC7100





Power Density Plot on configuration : IEEE 802.11n 11ch

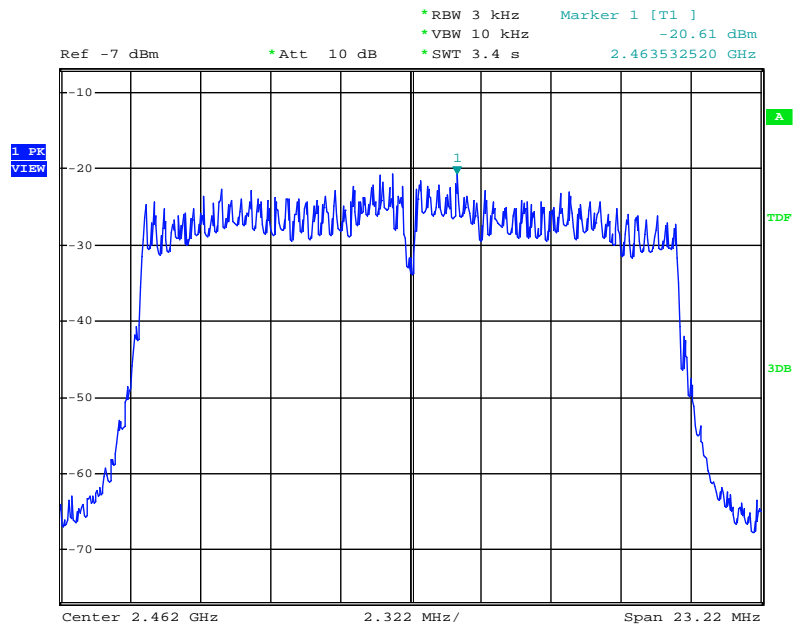

Date: 23.MAR.2017 18:39:00






11. Conducted Spurious Emission & Out of Band Emission

11.1 Operating environment

Temperature : 18.6 °C
 Relative Humidity : 38.3 % R.H.

11.2 Test set-up (Lay-out)

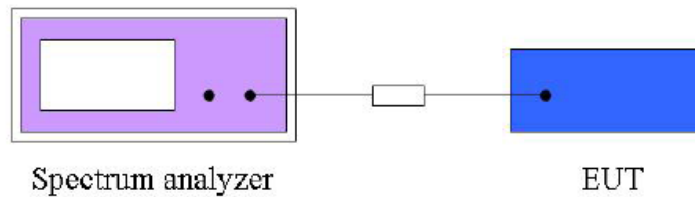

11.3 Limit

Below -20 dB of the highest emission level of operating band (in 100 kHz resolution band width)

11.4 Test equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - FSP	Rohde & Schwarz	Signal Analyzer	101431	Dec. 08, 2017
■ - 56-10	Weinschel	10 dB Attenuator	53184	Apr. 20, 2017

11.5 Test Procedure

- Span : 30 MHz to 10 times the operating frequency in GHz.
- Set the RBW to 100 kHz
- Set the VBW to 300 kHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.





11.6 Test Result

- Test Date : March 24, 2017
- Reference standard : Part 15 Subpart C, Sec. 15.247(a)(2)
- Test Procedure(s) : ANSI C63.10 (2013), KDB558074 D01 DTS Meas Guidance v03r05(April 8,2016)
- Operating condition : RF transmitting mode (1 ch: 2 412 MHz, 6 ch: 2 437 MHz, 11 ch: 2 462 MHz)
- Power Source : DC 3.7 V

Conducted Spurious Emission IEEE 802.11b

Operating Frequency	100 kHz PSD (dBm)	Spurious Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-3.13	-50.09	-46.96	-20.00	Complies
2 437 MHz	-3.30	-50.31	-47.01		Complies
2 462 MHz	-3.30	-50.01	-46.71		Complies

IEEE 802.11g

Operating Frequency	100 kHz PSD (dBm)	Spurious Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-5.51	-50.65	-45.14	-20.00	Complies
2 437 MHz	-5.68	-49.65	-43.97		Complies
2 462 MHz	-5.74	-51.07	-45.33		Complies

IEEE 802.11n

Operating Frequency	100 kHz PSD (dBm)	Spurious Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-5.35	-50.34	-44.99	-20.00	Complies
2 437 MHz	-5.76	-50.85	-45.09		Complies
2 462 MHz	-5.73	-50.45	-44.72		Complies





**Conducted Out of Band(Band Edge) Emission
 IEEE 802.11b**

Operating Frequency	100 kHz PSD (dBm)	Bandedge Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-3.13	-56.65	-53.52	-20.00	Complies
2 462 MHz	-3.30	-56.79	-53.49		Complies


IEEE 802.11g

Operating Frequency	100 kHz PSD (dBm)	Bandedge Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-5.51	-48.52	-43.01	-20.00	Complies
2 462 MHz	-5.74	-50.11	-44.37		Complies

IEEE 802.11n


Operating Frequency	100 kHz PSD (dBm)	Bandedge Level (dBm)	Deviation (dBc)	Limits (dBc)	Result
2 412 MHz	-5.35	-49.54	-44.19	-20.00	Complies
2 462 MHz	-5.73	-49.20	-43.47		Complies

Conducted spurious Emission Plot on Configuration : IEEE 802.11b 1ch

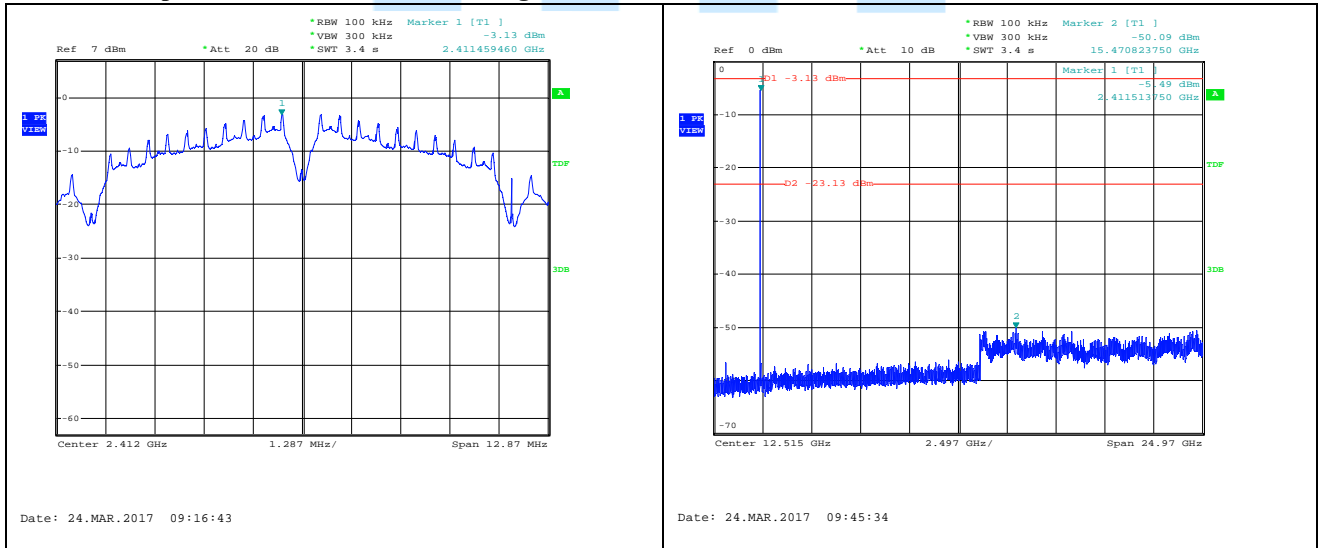




Conducted spurious Emission Plot on Configuration : IEEE 802.11b 6ch

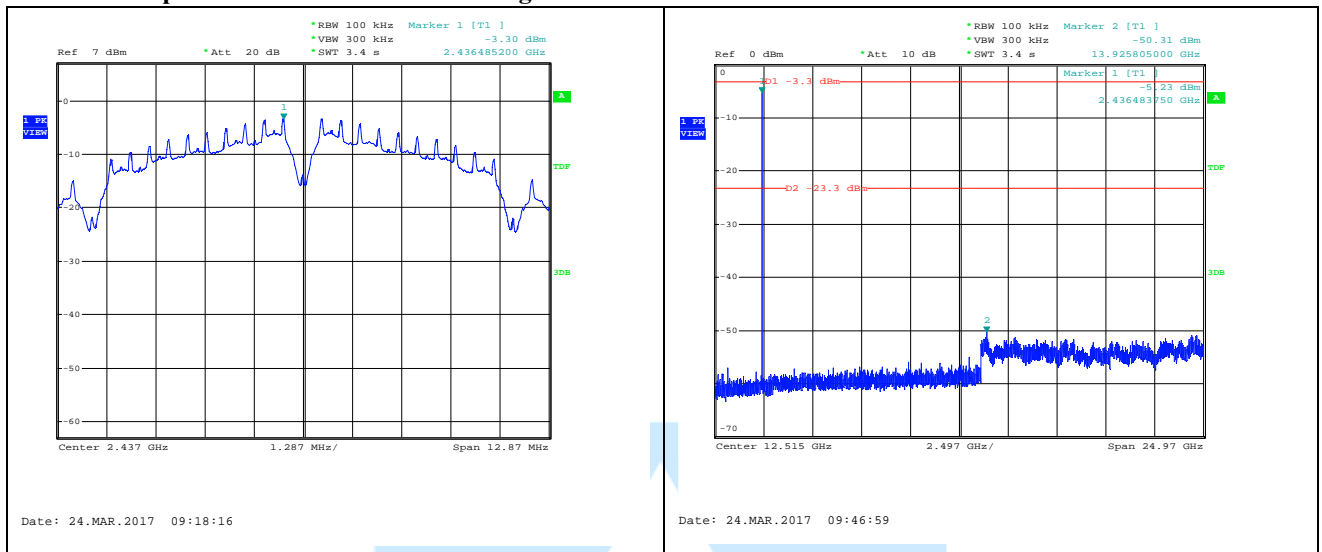


Conducted spurious Emission Plot on Configuration : IEEE 802.11b 11ch

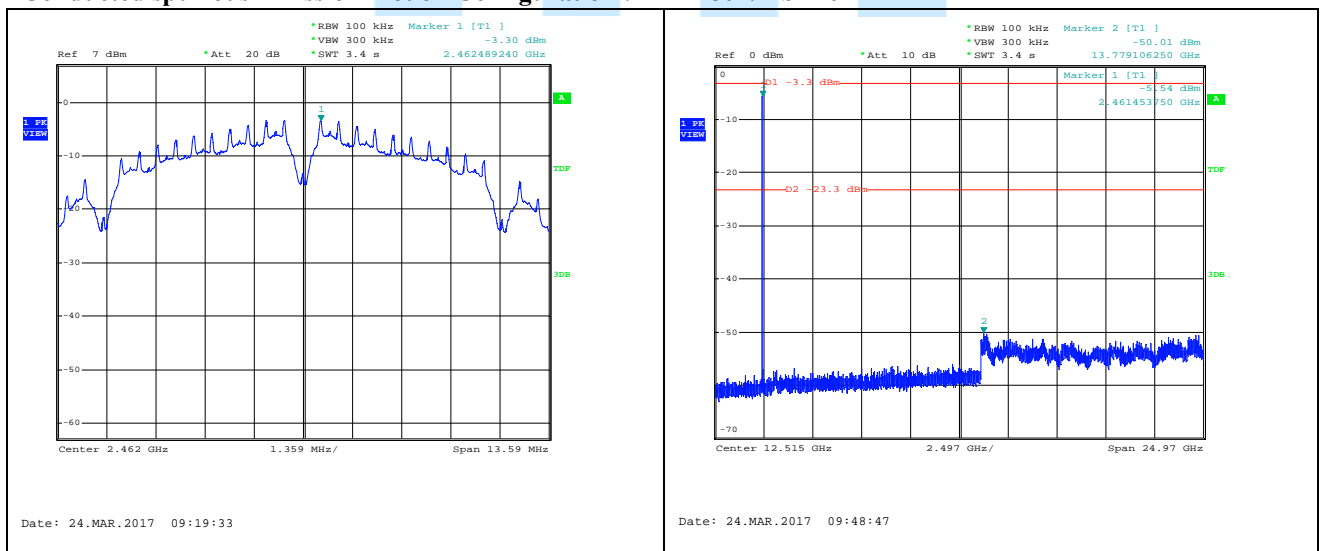




Conducted spurious Emission Plot on Configuration : IEEE 802.11g 1ch

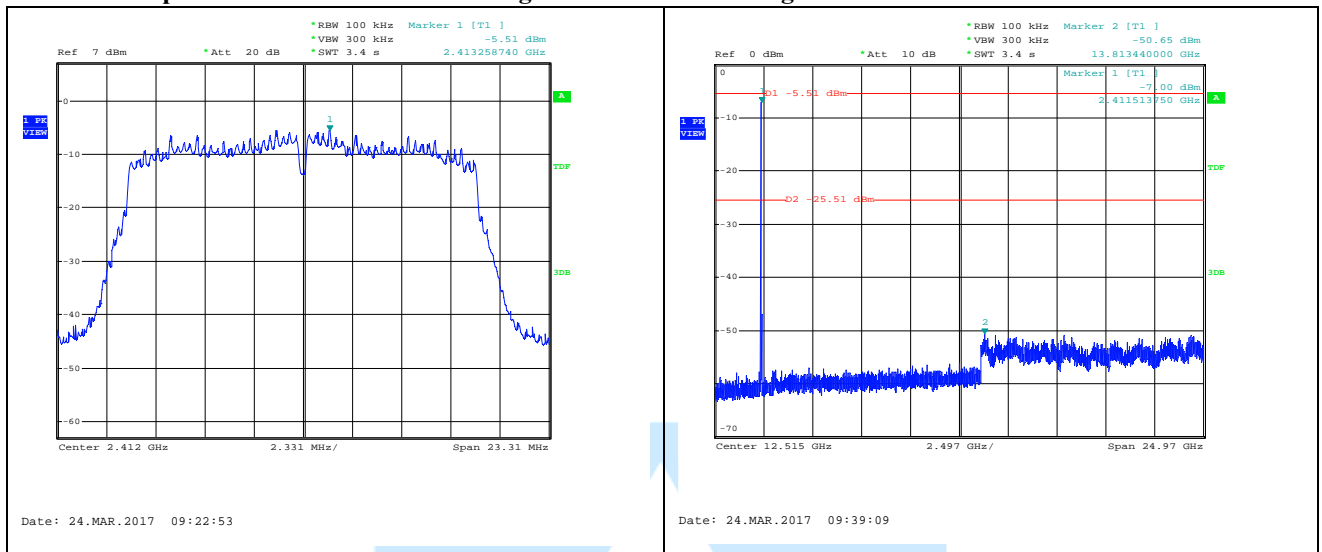


Conducted spurious Emission Plot on Configuration : IEEE 802.11g 6ch

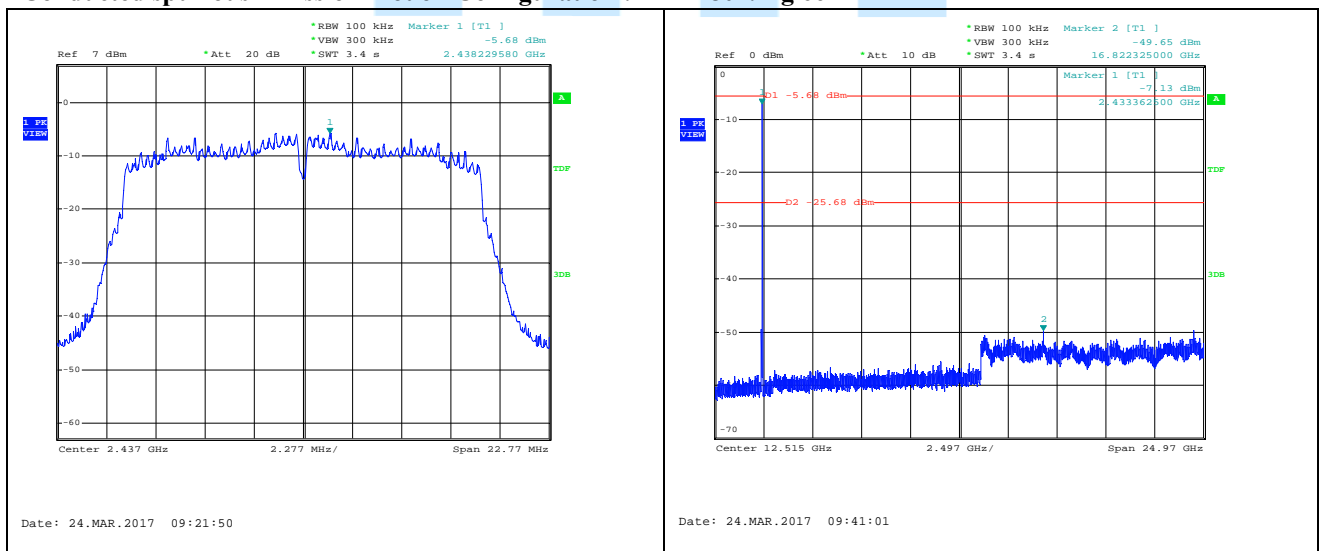




Conducted spurious Emission Plot on Configuration : IEEE 802.11g 11ch

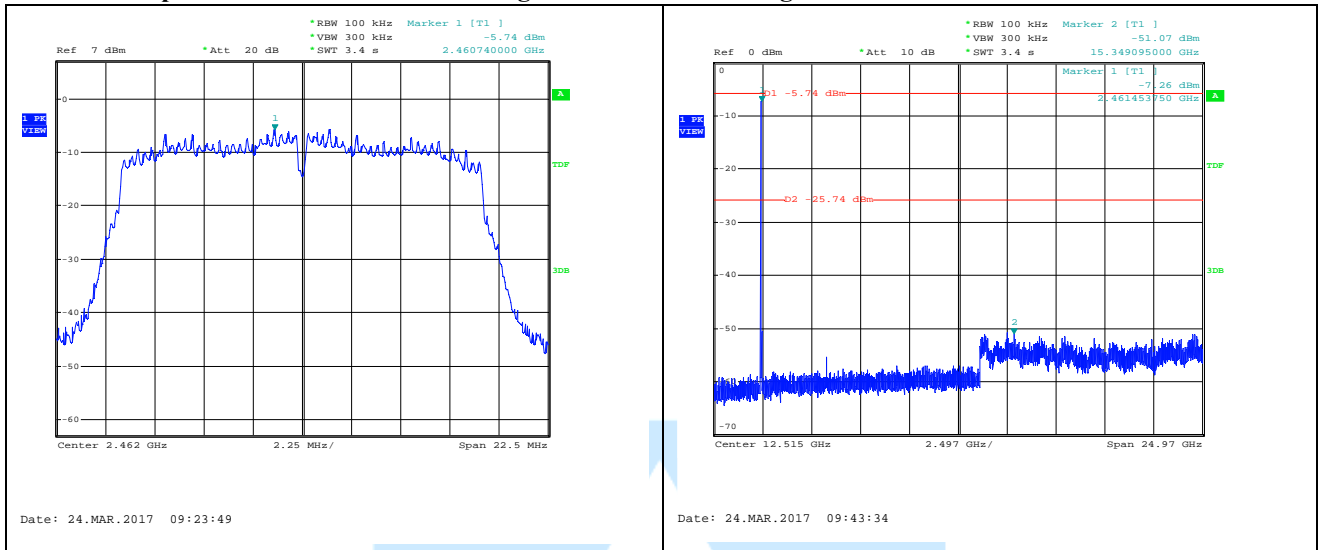


Conducted spurious Emission Plot on Configuration : IEEE 802.11n 1ch

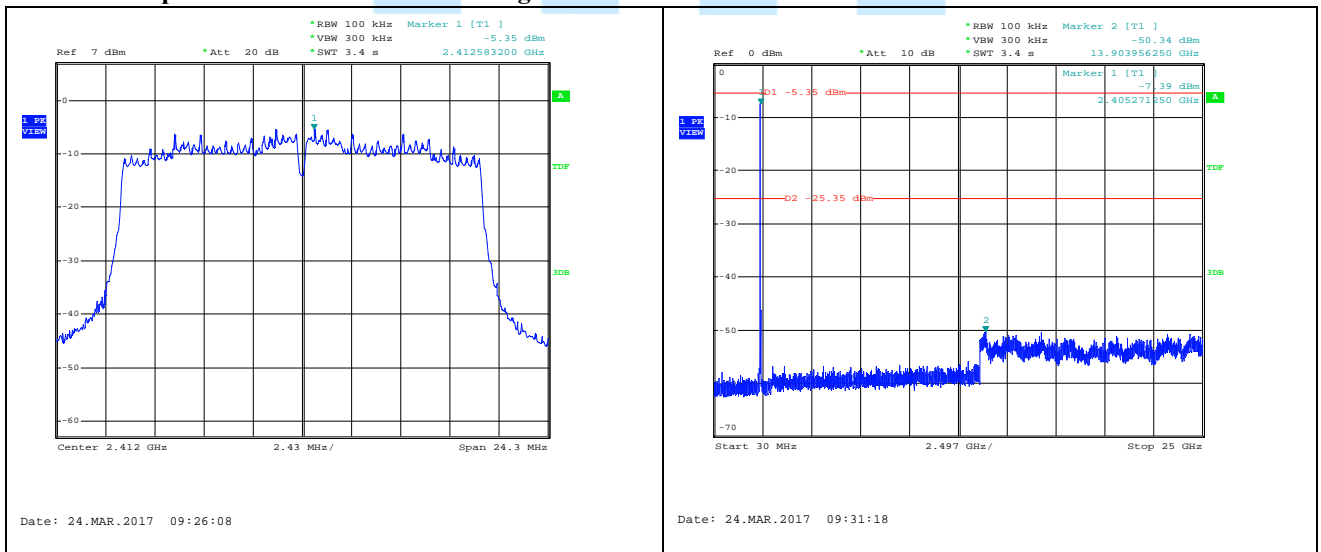




Conducted spurious Emission Plot on Configuration : IEEE 802.11n 6ch

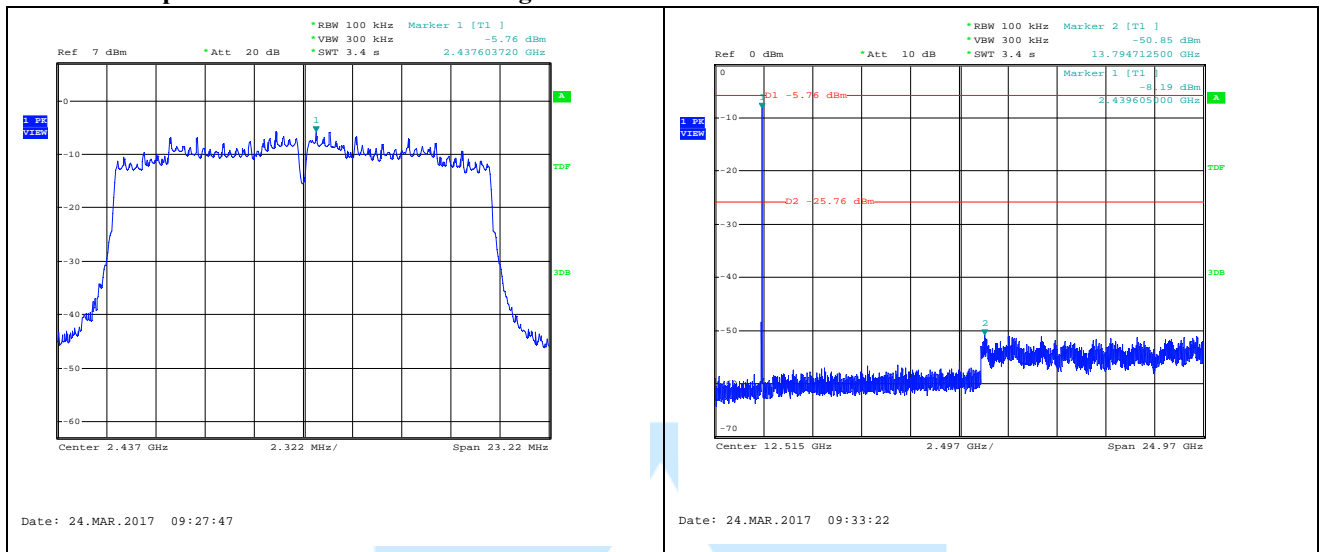


Conducted spurious Emission Plot on Configuration : IEEE 802.11n 11ch

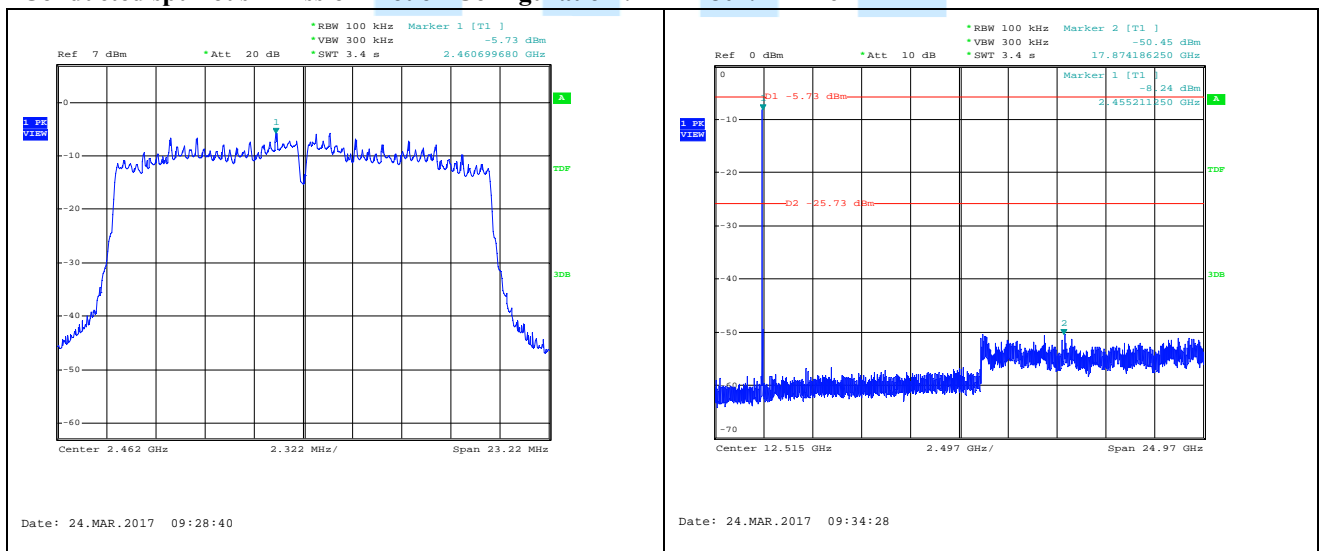




Low Band Edge Plot on Configuration : IEEE 802.11b 1ch

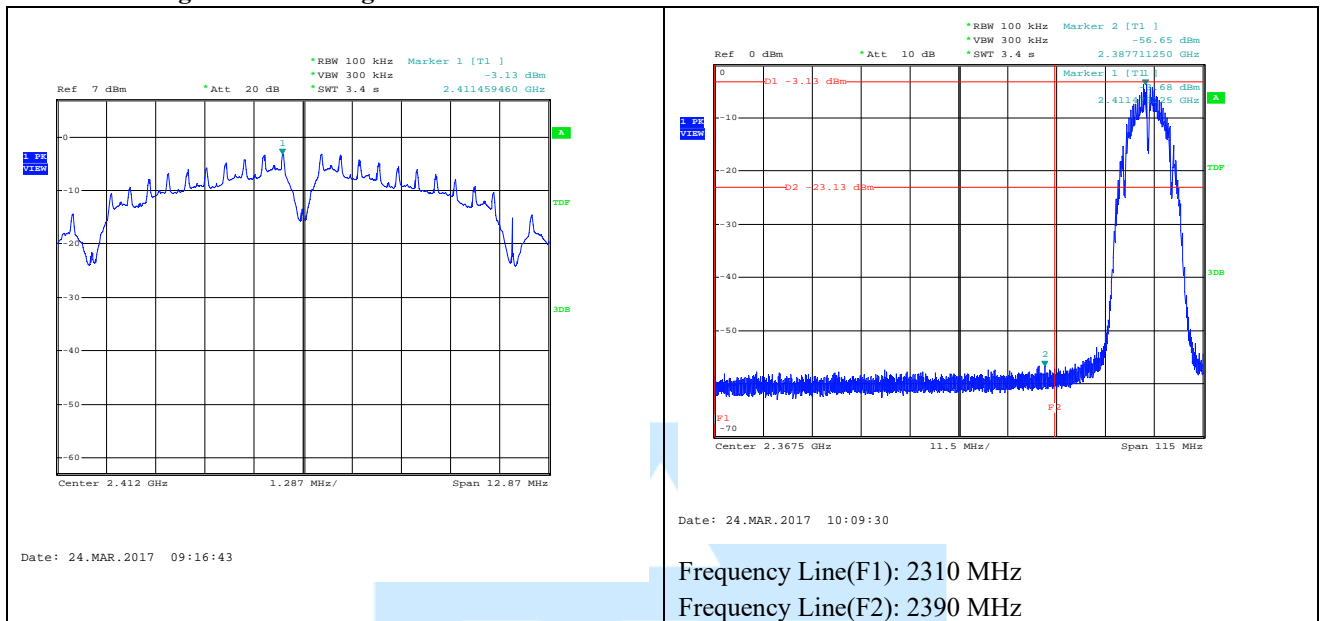


High Band Edge Plot on Configuration : IEEE 802.11b 11ch

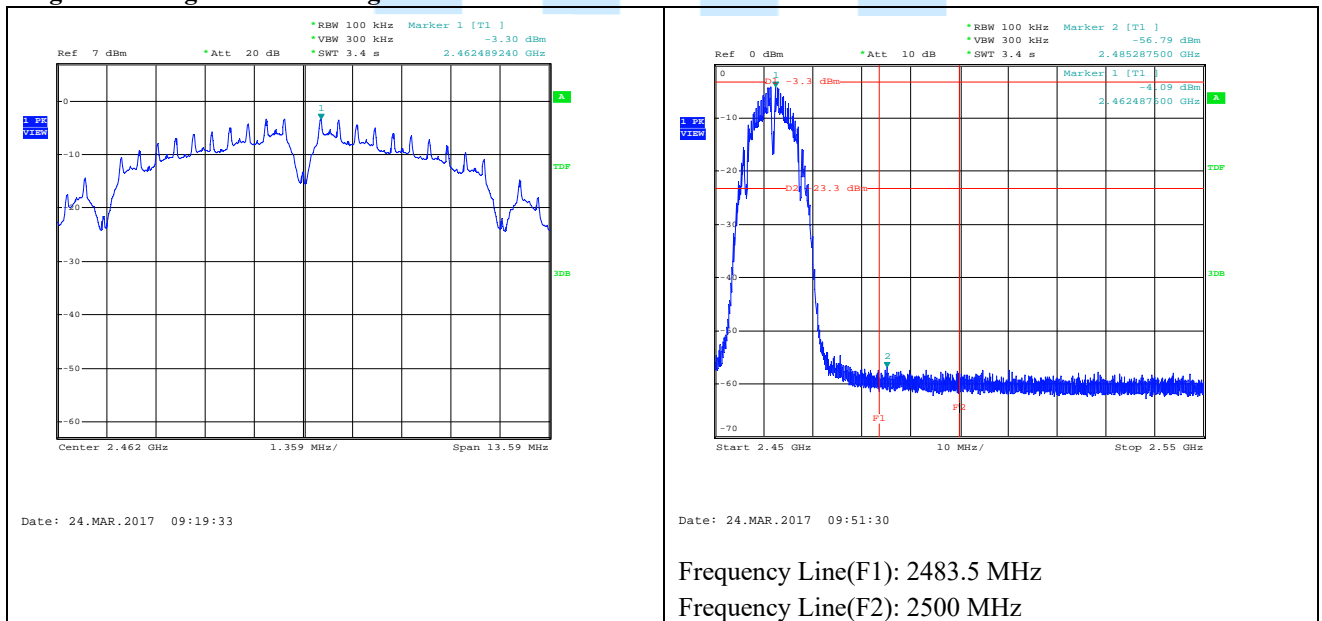




Low Band Edge Plot on Configuration : IEEE 802.11g 1ch

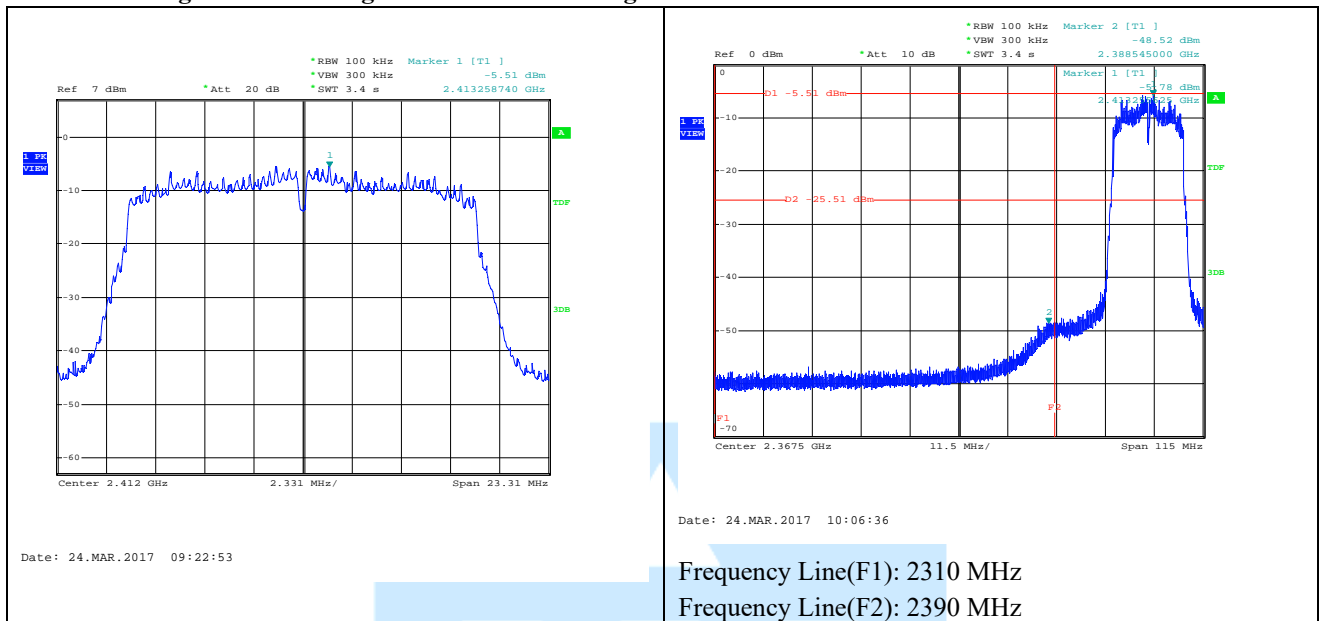


High Band Edge Plot on Configuration : IEEE 802.11g 11ch

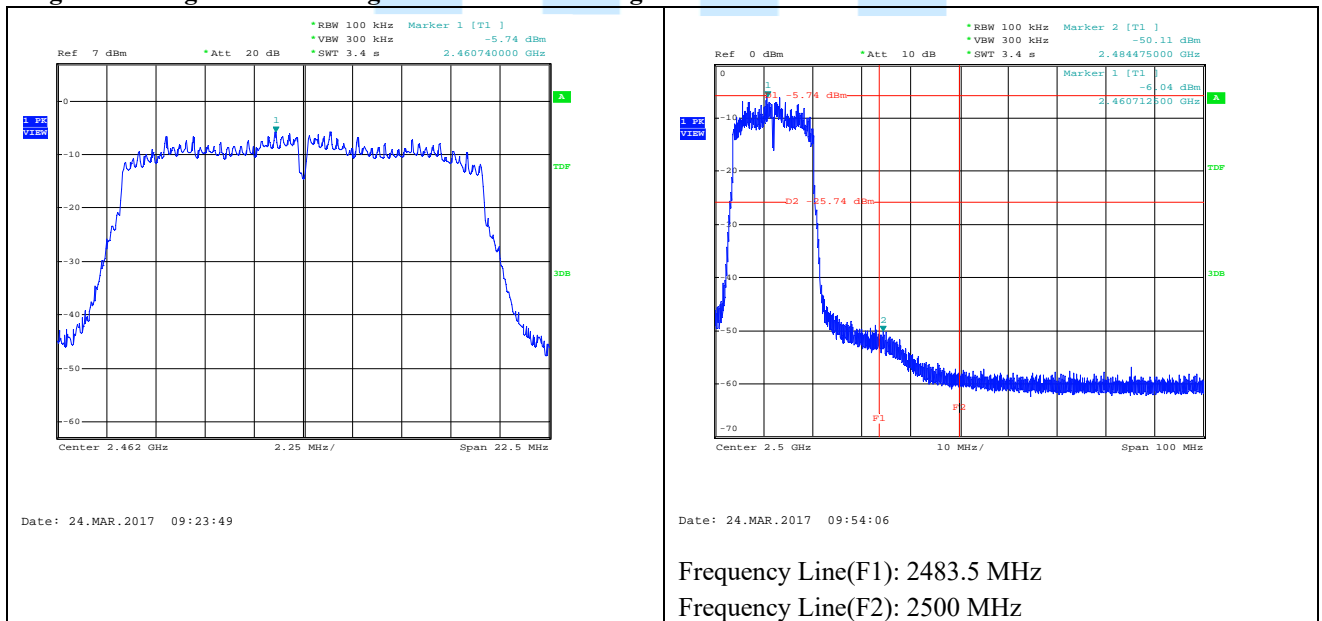




Low Band Edge Plot on Configuration : IEEE 802.11n 1ch

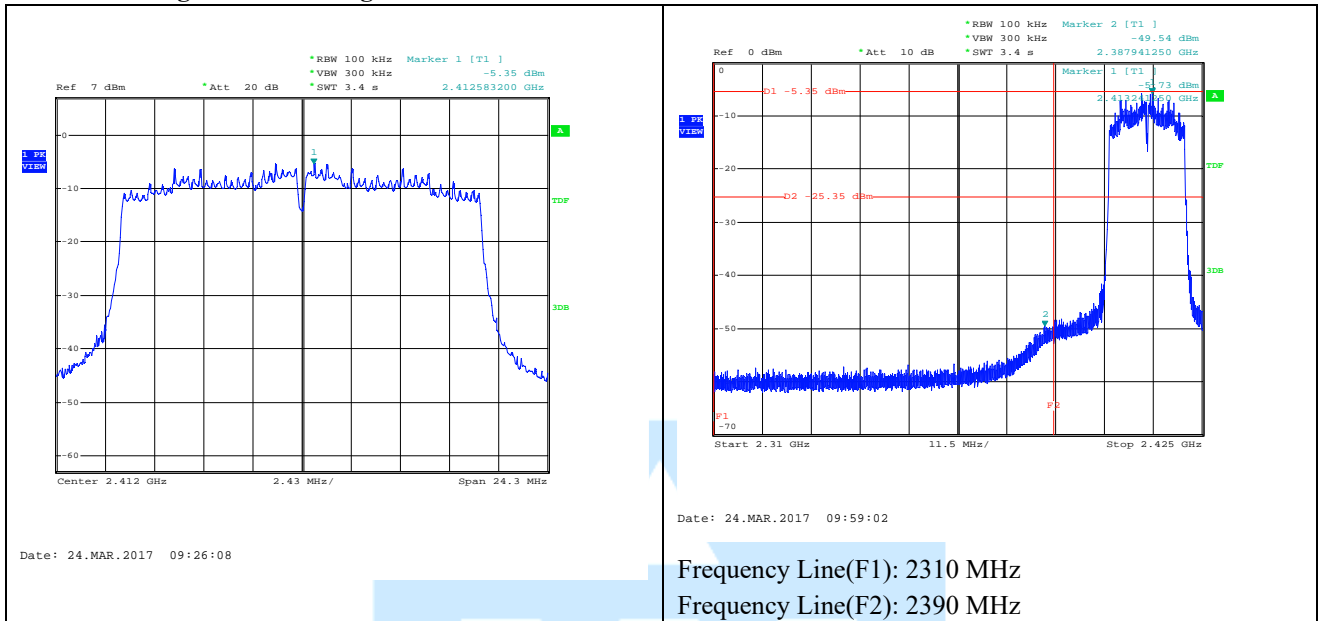

High Band Edge Plot on Configuration : IEEE 802.11n 11ch

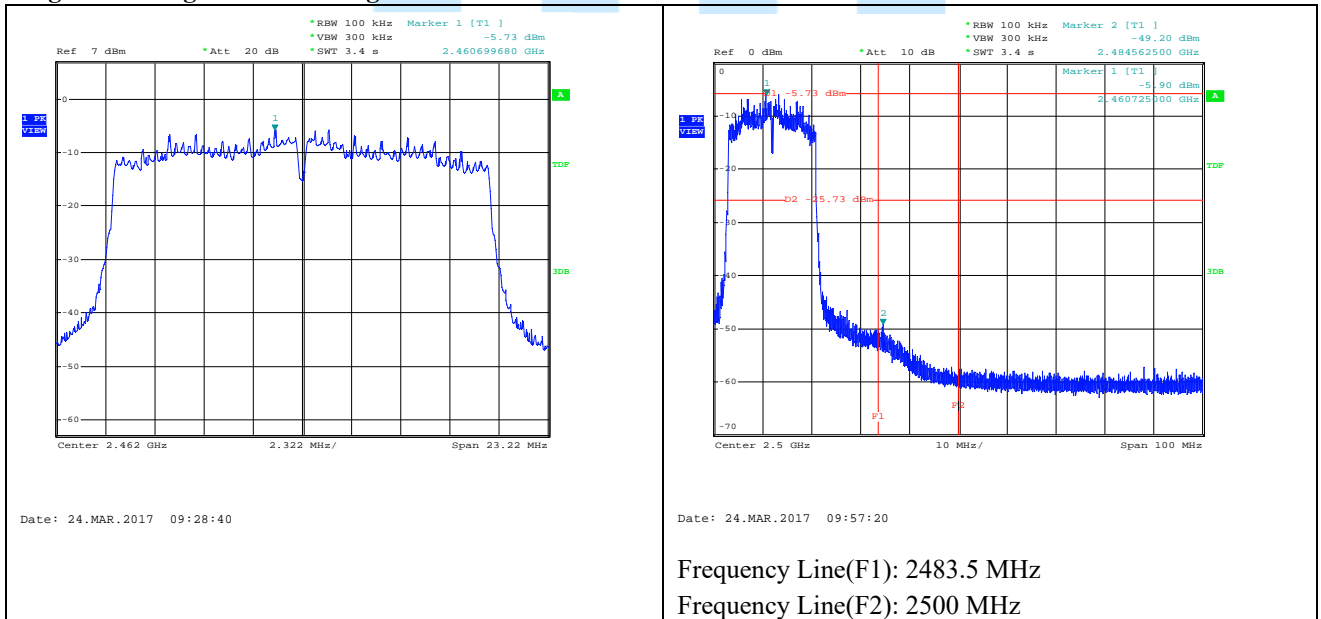



12. AC Power line Conducted emission

-Test Description

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (Test firm Registration Number: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

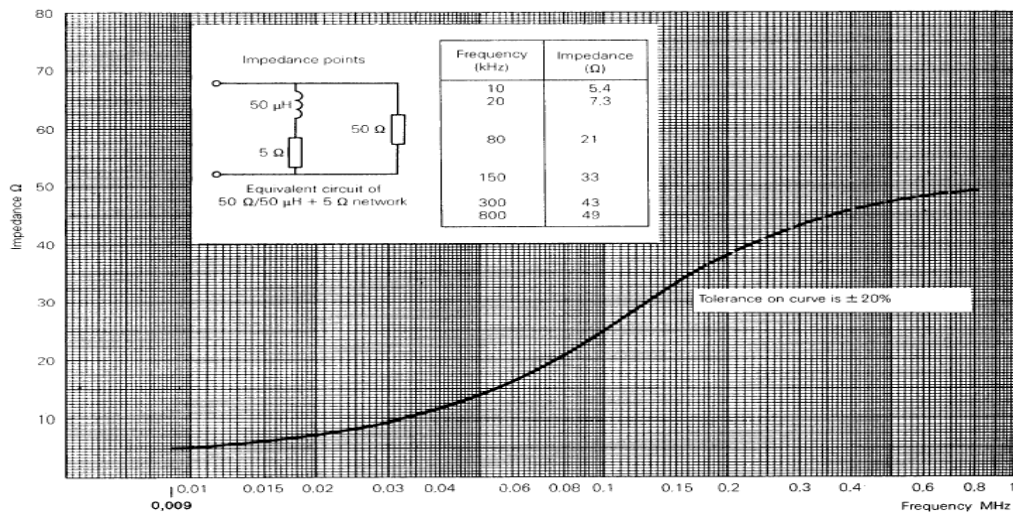


Fig 2. Impedance of LISN





12.1 Operating Environment

Temperature : 23.1 °C
 Relative Humidity : 38.8 % R.H.

12.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

12.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.85 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.32 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results





12.4 Limit

RFI Conducted	FCC Limit(dBμV/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

12.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■- ESCI	Rohde & Schwarz	EMI test receiver	100237	Apr 18. 2017
■- ENV216	Rohde & Schwarz	LISN	100172	Apr 19. 2017
□- ENV216	Rohde & Schwarz	LISN	100173	Apr 19. 2017
□ - ISN T8	TESEQ. GmbH	ISN	24568	Apr 22. 2017
■- EMC 32	Rohde & Schwarz	Testing Software	VER8.53	N/A

12.6 Test data for Conducted Emission


- Test Date : March 31, 2017
- Reference Standard : Part 15 Subpart C, Sec. 15.207
- Test Procedure(s) : ANSI C63.10 (2013)
- Operating Condition : RF transmitting mode
- Power Source : AC 120 V / 60 Hz
- Frequency rage : 0.15 MHz ~ 30 MHz
- Line : AC Power line(Live with Neutral)
- Comment : N/A





12.7 Test Result

Test Condition : IEEE 802.11b

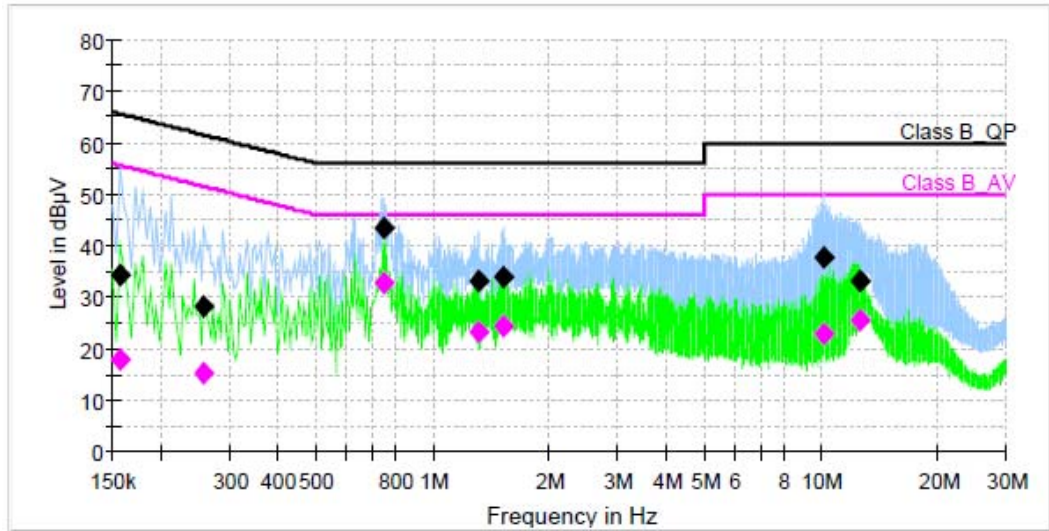

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.157463	34.4	200.0	9.000	Off	L1	9.6	31.2	65.6	
0.258206	28.2	200.0	9.000	Off	L1	9.6	33.3	61.5	
0.747000	43.4	200.0	9.000	Off	L1	9.7	12.6	56.0	
1.310419	33.0	200.0	9.000	Off	L1	9.7	23.0	56.0	
1.515638	33.8	200.0	9.000	Off	L1	9.7	22.2	56.0	
10.175869	37.6	200.0	9.000	Off	N	9.9	22.5	60.0	
12.552675	33.0	200.0	9.000	Off	N	9.9	27.0	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.157463	17.8	200.0	9.000	Off	L1	9.6	37.8	55.6	
0.258206	15.3	200.0	9.000	Off	L1	9.6	36.2	51.5	
0.747000	32.8	200.0	9.000	Off	L1	9.7	13.2	46.0	
1.310419	23.2	200.0	9.000	Off	L1	9.7	22.8	46.0	
1.515638	24.4	200.0	9.000	Off	L1	9.7	21.6	46.0	
10.175869	22.8	200.0	9.000	Off	N	9.9	27.2	50.0	
12.552675	25.4	200.0	9.000	Off	N	9.9	24.6	50.0	





Test Condition : IEEE 802.11g

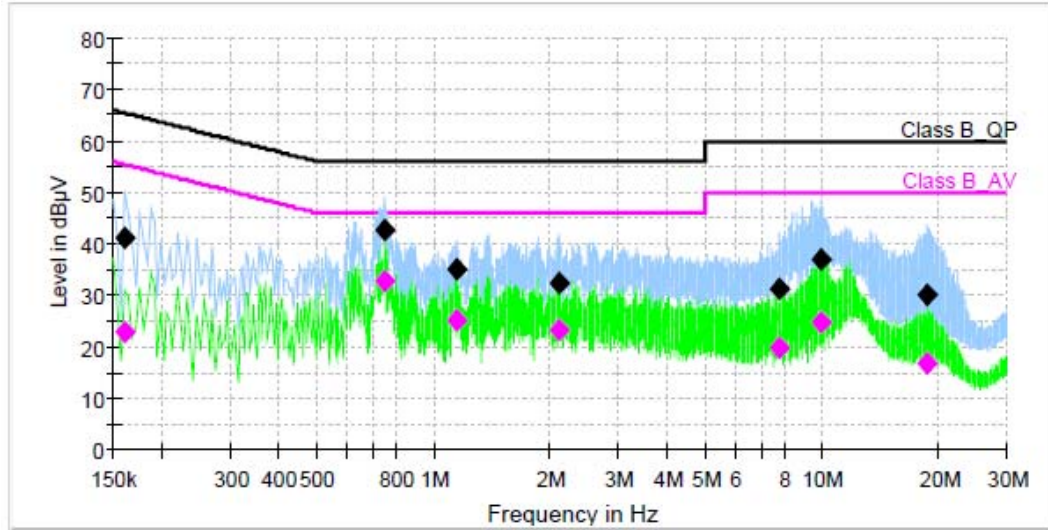

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.161194	41.3	200.0	9.000	Off	N	9.6	24.1	65.4	
0.747000	42.8	200.0	9.000	Off	L1	9.7	13.2	56.0	
1.146244	35.2	200.0	9.000	Off	L1	9.7	20.8	56.0	
2.101444	32.4	200.0	9.000	Off	L1	9.7	23.6	56.0	
7.769213	31.2	200.0	9.000	Off	L1	9.8	28.8	60.0	
9.948263	37.0	200.0	9.000	Off	L1	9.9	23.0	60.0	
18.619688	30.1	200.0	9.000	Off	L1	9.9	29.9	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.161194	22.9	200.0	9.000	Off	N	9.6	32.5	55.4	
0.747000	32.8	200.0	9.000	Off	L1	9.7	13.2	46.0	
1.146244	25.3	200.0	9.000	Off	L1	9.7	20.7	46.0	
2.101444	23.3	200.0	9.000	Off	L1	9.7	22.7	46.0	
7.769213	20.0	200.0	9.000	Off	L1	9.8	30.0	50.0	
9.948263	24.6	200.0	9.000	Off	L1	9.9	25.4	50.0	
18.619688	16.8	200.0	9.000	Off	L1	9.9	33.2	50.0	





Test Condition : IEEE 802.11n

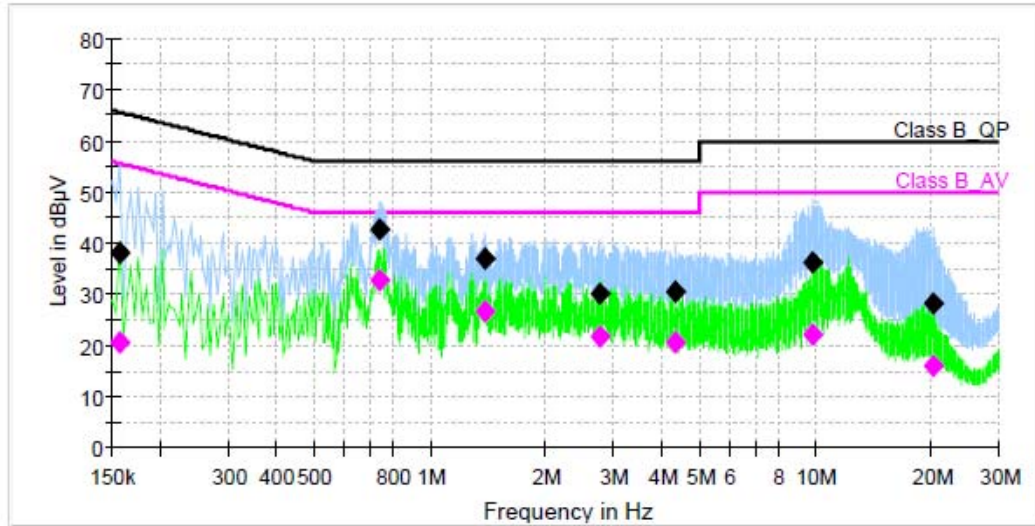

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.157463	38.1	200.0	9.000	Off	L1	9.6	27.5	65.6	
0.743269	42.7	200.0	9.000	Off	L1	9.7	13.3	56.0	
1.388775	36.9	200.0	9.000	Off	L1	9.7	19.1	56.0	
2.750681	30.2	200.0	9.000	Off	L1	9.7	25.8	56.0	
4.321538	30.6	200.0	9.000	Off	L1	9.8	25.4	56.0	
9.851250	36.1	200.0	9.000	Off	N	9.9	23.9	60.0	
20.224125	28.3	200.0	9.000	Off	L1	10.0	31.7	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.157463	20.4	200.0	9.000	Off	L1	9.6	35.2	55.6	
0.743269	32.6	200.0	9.000	Off	L1	9.7	13.4	46.0	
1.388775	26.7	200.0	9.000	Off	L1	9.7	19.3	46.0	
2.750681	21.8	200.0	9.000	Off	L1	9.7	24.2	46.0	
4.321538	20.4	200.0	9.000	Off	L1	9.8	25.6	46.0	
9.851250	21.9	200.0	9.000	Off	N	9.9	28.1	50.0	
20.224125	16.0	200.0	9.000	Off	L1	10.0	34.0	50.0	





13. Radiated Spurious & Restricted Band Edge Emission

Exploratory Radiated measurements were conducted at the 3m semi anechoic chamber in order to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Final measurements of below 1GHz were made at 3m or 10 m Chamber that complies with CISPR 16/ANSI C63.10. Above 1GHz final measurements were conducted at the 3m Chamber only.

For measurements above 1GHz, the bottom side of 3m chamber was installed with absorbers in order to meet SVSWR Limit.

Exploratory measurements were scanned using Peak mode of EMI Test receiver and final measurements were measured with Quasi-Peak mode (Below 1GHz) and Peak & Average mode (Above 1GHz).

The measurements were performed by rotating the EUT 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

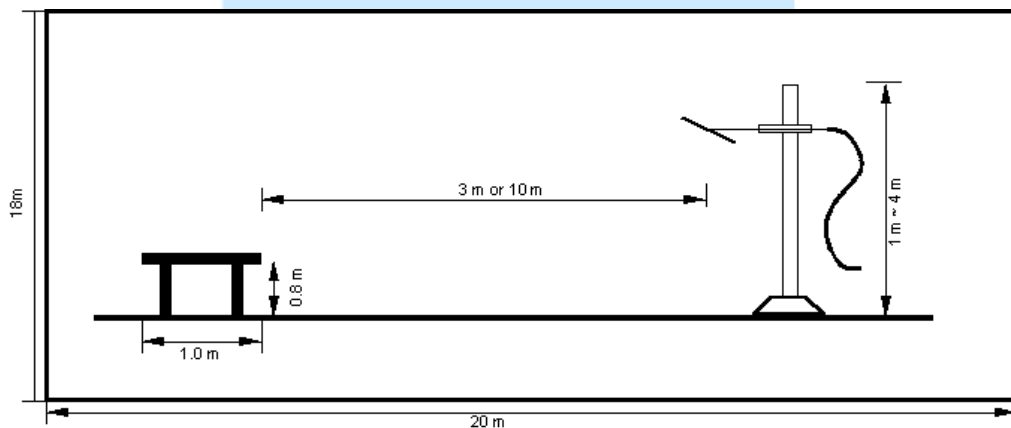


Fig 3. Dimensions of test site (Below 1GHz)

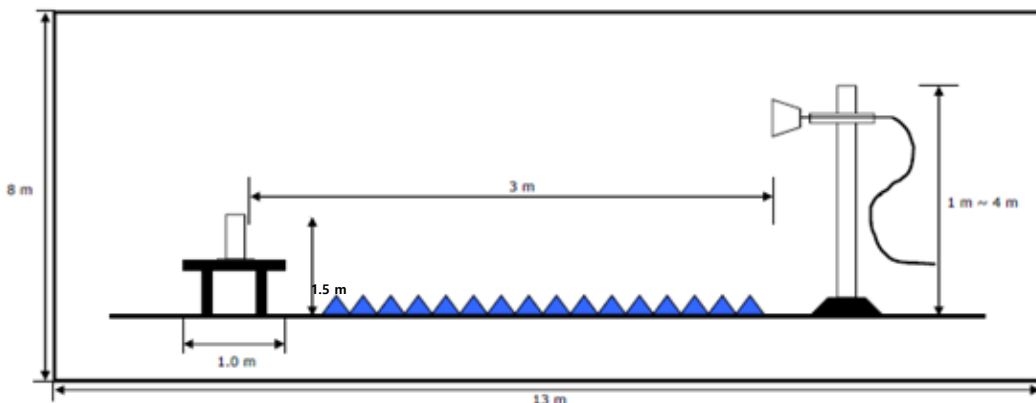


Fig 4. Dimensions of test site (Above 1GHz)





13.1 Operating environment

Temperature : 20.7 °C
 Relative humidity : 32.7 % R.H.

13.2 Test set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conducting table.

For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane.

For emission measurements above 1 GHz, the table height is 1.5 m above the reference ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

13.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.78 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.77 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	5.06 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.03 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m, V/H)	5.42 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (6 000 MHz ~ 18 000 MHz, 3 m, V/H)	5.64 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results





13.4 Limit

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2 400/F (kHz)	300
0.490 ~ 1.705	2 400/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

13.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESU40	Rohde & Schwarz	EMI Test Receiver	100266	Jul. 20, 2017
■ - HFH2-Z2	Rohde & Schwarz	Loop Antenna	100041	Dec. 21, 2017
■ - VULB9160	Schwarzbeck	Broadband Test Antenna	3099	Aug. 03. 2017
■ - BBHA9120D	Schwarzbeck	Horn Antenna	207	Oct. 14. 2017
■ - 3160-09	Schwarzbeck	Horn Antenna	LM3981	Oct. 27. 2017
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
■ - AM 4.0	maturo GmbH	Antenna Mast	1390308	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	Dec. 06. 2017
■ - SCU-F1826-G47-BZ42-CSS	BONN Elektronik	Preamplifier	10003	Dec. 09. 2017
■ - WHKX3.0/18G-10SS	WAINWRIGHT INSTRUMENTS	High pass filter	SN31	Apr. 19, 2017
■- EMC 32	Rohde & Schwarz	Testing Software	VER9.15	N/A






13.6 Test data for Radiated Spurious Emission

- Test Date : Mar. 28 ~ 30, 2017
- Reference Standard : Part 15 Subpart C, Sec. 15.247(d)
- Measuring Distance : 3 m
- Resolution Bandwidth : 200 Hz, 9 kHz(Below 30 MHz) / 120 kHz(30 MHz ~ 1GHz) / 1 MHz(Above 1GHz)
- Detector mode : Quasi Peak detector mode / Peak detector mode / Average detector mode
- Power Source : DC 3.7 V
- Note :

Radiated Spurious Emission (9 kHz to 30 MHz)

※ The emission level was not found.

Radiated Spurious Emission (30 MHz to 1 000 MHz)

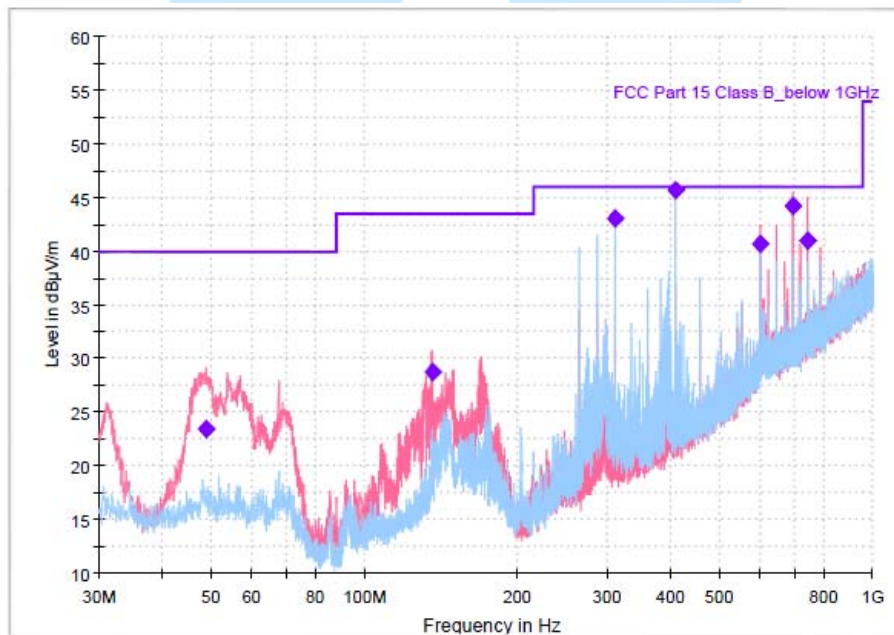

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
48.733125	23.44	40.00	16.56	1000.0	120.000	106.0	V	303.0	13.3
135.790625	28.72	43.50	14.78	1000.0	120.000	110.0	V	6.0	14.6
312.006875	43.04	46.00	2.96	1000.0	120.000	106.0	H	15.0	17.6
407.996875	45.63	46.00	0.37	1000.0	120.000	100.0	H	208.0	20.4
599.996250	40.73	46.00	5.27	1000.0	120.000	106.0	V	196.0	26.1
695.986250	44.29	46.00	1.71	1000.0	120.000	100.0	V	315.0	27.7
744.001250	40.92	46.00	5.08	1000.0	120.000	107.0	V	168.0	28.5





Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11b 1ch

Frequency (MHz)	Measurement Level						Limit (dBµV/m)		Margin (dB)		Positioning System			
	Reading Value (dBµV/m)		AF (dB/m)	AMP / CL (dB)	Duty Cycle collection (dB)	Test Result (dBµV/m)					Pol (H/V)	Height (cm)	Angle (°)	
	Peak	Average				Peak	Average	Peak	Average					
1104.11	61.04	58.60	24.80	-38.33	-	47.51	45.07	74.00	54.00	26.49	8.93	V	165	112
1152.01	63.15	61.35	24.83	-38.33	-	49.65	47.85	74.00	54.00	24.35	6.15	V	153	122
1583.86	59.39	55.32	25.14	-37.53	-	47.00	42.93	74.00	54.00	27.00	11.07	V	106	80
1982.48	58.01	35.91	25.62	-37.33	-	46.30	24.20	74.00	54.00	27.70	29.80	H	137	100
14385.60	51.63	33.24	42.90	-34.10	-	60.43	42.04	74.00	54.00	13.57	11.96	H	113	21
17990.10	6.00	30.57	49.38	-34.10	-	58.43	45.85	74.00	54.00	15.57	8.15	V	125	268

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11b 6ch

Frequency (MHz)	Measurement Level						Limit (dBµV/m)		Margin (dB)		Positioning System			
	Reading Value (dBµV/m)		AF (dB/m)	AMP / CL (dB)	Duty Cycle collection (dB)	Test Result (dBµV/m)					Pol (H/V)	Height (cm)	Angle (°)	
	Peak	Average				Peak	Average	Peak	Average					
1103.96	60.61	58.55	24.80	-38.33	-	47.08	45.02	74.00	54.00	26.92	8.98	V	175	104
1151.90	62.47	60.53	24.83	-38.33	-	48.97	47.03	74.00	54.00	25.03	6.97	V	154	123
1583.93	58.54	55.40	25.14	-37.53	-	46.15	43.01	74.00	54.00	27.85	10.99	V	106	88
1980.19	59.05	47.61	25.62	-37.33	-	47.34	35.90	74.00	54.00	26.66	18.10	H	175	140
14890.50	44.65	31.41	42.77	-34.10	-	53.32	40.08	74.00	54.00	20.68	13.92	H	125	123
17986.20	41.61	28.47	49.33	-34.10	-	56.84	43.70	74.00	54.00	17.16	10.30	H	175	43

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11b 11ch

Frequency (MHz)	Measurement Level						Limit (dBµV/m)		Margin (dB)		Positioning System			
	Reading Value (dBµV/m)		AF (dB/m)	AMP / CL (dB)	Duty Cycle collection (dB)	Test Result (dBµV/m)					Pol (H/V)	Height (cm)	Angle (°)	
	Peak	Average				Peak	Average	Peak	Average					
1104.01	60.49	58.54	24.80	-38.33	-	46.96	45.01	74.00	54.00	27.04	8.99	V	168	97
1152.06	62.90	61.08	24.83	-38.33	-	49.40	47.58	74.00	54.00	24.60	6.42	V	151	119
1583.87	58.38	55.42	25.14	-37.53	-	45.99	43.03	74.00	54.00	28.01	10.97	V	100	73
1806.17	57.30	35.52	25.41	-37.30	-	45.41	23.63	74.00	54.00	28.59	30.37	H	125	120
14380.60	45.07	32.40	42.88	-34.10	-	53.85	41.18	74.00	54.00	20.15	12.82	H	125	15
17973.70	42.89	29.84	49.16	-34.10	-	57.95	44.90	74.00	54.00	16.05	9.10	V	125	152

Note:

If the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

Test result = Reading: + AF+AMP / CL

Where, AF : Antenna Collection Factor,

AMP / CL = Cable loss + Preamplifier gain + High Pass filter.

※ High Pass filter use to range of 3 GHz to 18 GHz

Pol.: H(Horizontal), V(Vertical)





Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11g 1ch

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF (dB/m)	AMP / CL (dB)	Duty Cycle collection (dB)	Test Result (dBµV/m)						Pol (H/V)	Height (cm)	Angle (°)
	Peak	Average				Peak	Average	Peak	Average					
1104.07	60.11	57.74	24.80	-38.33	-	46.58	44.21	74.00	54.00	27.42	9.79	V	154	108
1151.94	62.05	59.91	24.83	-38.33	-	48.55	46.41	74.00	54.00	25.45	7.59	V	154	111
1536.02	57.69	54.70	25.08	-37.53	-	45.24	42.25	74.00	54.00	28.76	11.75	V	109	63
1583.89	60.72	56.58	25.14	-37.53	-	48.33	44.19	74.00	54.00	25.67	9.81	V	100	90
14870.30	45.12	31.75	42.80	-34.10	-	53.82	40.45	74.00	54.00	20.18	13.55	V	125	15
17984.00	6.00	29.20	49.30	-34.10	-	57.13	44.40	74.00	54.00	16.87	9.60	H	154	135

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11g 6ch

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF (dB/m)	AMP / CL (dB)	Duty Cycle collection (dB)	Test Result (dBµV/m)						Pol (H/V)	Height (cm)	Angle (°)
	Peak	Average				Peak	Average	Peak	Average					
1104.08	60.62	58.39	24.80	-38.33	-	47.09	44.86	74.00	54.00	26.91	9.14	V	175	112
1151.99	62.48	60.57	24.83	-38.33	-	48.98	47.07	74.00	54.00	25.02	6.93	V	155	128
1536.01	57.53	53.81	25.08	-37.53	-	45.08	41.36	74.00	54.00	28.92	12.64	H	175	98
1584.03	57.26	53.49	25.14	-37.53	-	44.87	41.10	74.00	54.00	29.13	12.90	V	125	81
14841.50	43.22	30.27	42.84	-34.10	-	51.96	39.01	74.00	54.00	22.04	14.99	V	215	205
17998.50	42.15	28.84	49.49	-34.10	-	57.54	44.23	74.00	54.00	16.46	9.77	H	175	155

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11g 11ch

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF (dB/m)	AMP / CL (dB)	Duty Cycle collection (dB)	Test Result (dBµV/m)						Pol (H/V)	Height (cm)	Angle (°)
	Peak	Average				Peak	Average	Peak	Average					
1103.94	60.14	58.06	24.80	-38.33	-	46.61	44.53	74.00	54.00	27.39	9.47	V	175	102
1151.90	62.03	60.16	24.83	-38.33	-	48.53	46.66	74.00	54.00	25.47	7.34	V	153	125
1583.88	58.21	54.97	25.14	-37.53	-	45.82	42.58	74.00	54.00	28.18	11.42	V	125	86
1980.16	54.80	49.59	25.62	-37.33	-	43.09	37.88	74.00	54.00	30.91	16.12	V	125	121
14478.60	44.10	30.68	43.29	-34.10	-	53.29	39.87	74.00	54.00	20.71	14.13	H	225	13
17986.40	42.32	29.56	49.33	-34.10	-	57.55	44.79	74.00	54.00	16.45	9.21	H	175	254

Note:

If the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

Test result = Reading: + AF+AMP / CL

Where, AF : Antenna Collection Factor,

AMP / CL = Cable loss + Preamplifier gain + High Pass filter.

※ High Pass filter use to range of 3 GHz to 18 GHz

Pol.: H(Horizontal), V(Vertical)





Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11n 1ch

Frequency (MHz)	Measurement Level					Limit (dBµV/m)	Margin (dB)		Positioning System					
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection		Test Result (dBµV/m)		Peak	Average	Peak	Average	Pol (H/V)	Height (cm)
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average							
1104.11	60.11	58.15	24.80	-38.33	-	46.58	44.62	74.00	54.00	27.42	9.38	V	169	114
1151.91	62.42	60.35	24.83	-38.33	-	48.92	46.85	74.00	54.00	25.08	7.15	V	150	122
1535.85	57.33	53.48	25.08	-37.53	-	44.88	41.03	74.00	54.00	29.12	12.97	H	147	90
1583.97	60.03	56.96	25.14	-37.53	-	47.64	44.57	74.00	54.00	26.36	9.43	V	100	82
11206.00	45.28	32.54	39.83	-34.10	-	51.01	38.27	74.00	54.00	22.99	15.73	H	169	43
17991.00	6.00	28.71	49.39	-34.10	-	56.46	44.00	74.00	54.00	17.54	10.00	V	125	113

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11n 6ch

Frequency (MHz)	Measurement Level					Limit (dBµV/m)	Margin (dB)		Positioning System					
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection		Test Result (dBµV/m)		Peak	Average	Peak	Average	Pol (H/V)	Height (cm)
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average							
1104.10	60.30	58.09	24.80	-38.33	-	46.77	44.56	74.00	54.00	27.23	9.44	V	175	116
1152.04	62.43	60.47	24.83	-38.33	-	48.93	46.97	74.00	54.00	25.07	7.03	V	154	125
1583.98	60.53	54.02	25.14	-37.53	-	48.14	41.63	74.00	54.00	25.86	12.37	V	125	95
1776.06	56.83	37.54	25.37	-37.46	-	44.74	25.45	74.00	54.00	29.26	28.55	H	175	131
14852.90	44.11	31.42	42.82	-34.10	-	52.83	40.14	74.00	54.00	21.17	13.86	V	107	322
17986.00	42.14	29.17	49.33	-34.10	-	57.37	44.40	74.00	54.00	16.63	9.60	V	120	-15

Radiated Spurious Emission (1 GHz to 25 GHz): IEEE 802.11n 11ch

Frequency (MHz)	Measurement Level					Limit (dBµV/m)	Margin (dB)		Positioning System					
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection		Test Result (dBµV/m)		Peak	Average	Peak	Average	Pol (H/V)	Height (cm)
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average							
1104.01	59.98	57.88	24.80	-38.33	-	46.45	44.35	74.00	54.00	27.55	9.65	V	170	102
1152.08	62.19	60.10	24.83	-38.33	-	48.69	46.60	74.00	54.00	25.31	7.40	V	149	116
1584.05	60.16	52.94	25.14	-37.53	-	47.77	40.55	74.00	54.00	26.23	13.45	V	125	80
1979.94	56.24	48.94	25.62	-37.33	-	44.53	37.23	74.00	54.00	29.47	16.77	H	135	90
12127.10	45.32	32.51	38.88	-34.10	-	50.10	37.29	74.00	54.00	23.90	16.71	V	125	296
14448.50	48.67	31.49	43.16	-34.10	-	57.73	40.55	74.00	54.00	16.27	13.45	H	181	187

Note:

If the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

Test result = Reading: + AF+AMP / CL

Where, AF : Antenna Collection Factor,

AMP / CL = Cable loss + Preamplifier gain + High Pass filter.

※ High Pass filter use to range of 3 GHz to 18 GHz

Pol.: H(Horizontal), V(Vertical)





13.7 Test data for Radiated Restricted Band Edge Emission

- Test Date : March 28~29, 2017
- Reference Standard : Part 15 Subpart C, Sec. 15.247(d)
- Measuring Distance : 3 m
- Resolution Bandwidth : 1 MHz
- Detector mode : Peak detector mode / Average detector mode
- Power Source : DC 3.7 V
- Note : Through three orthogonal axes were investigated and the worst case is report

IEEE 802.11b (1ch, 11ch)

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
2389.48	56.58	44.95	26.91	-36.99	-	46.50	34.87	74.00	54.00	27.50	19.13	H	200	56

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
2483.69	55.03	41.92	27.21	-36.95	-	45.29	32.18	74.00	54.00	28.71	21.82	H	189	62

IEEE 802.11g(1ch, 11ch)

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
2389.99	79.49	61.21	26.91	-36.99	-	69.41	51.13	74.00	54.00	4.59	2.87	H	159	56

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
2483.56	78.90	60.58	27.21	-36.95	-	69.16	50.84	74.00	54.00	4.84	3.16	H	160	52

IEEE 802.11n(1ch, 11ch)

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
2389.95	81.14	63.01	26.91	-36.99	-	71.06	52.93	74.00	54.00	2.94	1.07	H	180	59

Frequency (MHz)	Measurement Level							Limit (dBµV/m)		Margin (dB)		Positioning System		
	Reading Value (dBµV/m)		AF	AMP / CL	Duty Cycle collection	Test Result (dBµV/m)						Pol.	Height	Angle
	Peak	Average	(dB/m)	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	(H/V)	(cm)	(°)
2483.51	80.09	63.10	27.21	-36.95	-	70.35	53.36	74.00	54.00	3.65	0.64	H	164	72

Note:

Test result = Reading: + Transducer Factor.

Where, ACF : Antenna Collection Factor,

CL = Cable loss + Preamplifier gain + High Pass filter

※ High Pass filter use to range of 3 GHz to 18 GHz

Pol.: H(Horizontal), V(Vertical)





14. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

14.1 Example 1 :


■ 20.3 MHz

Class B Limit = 250 μV = 48 dB μV

Reading = 39.2 dB μV

$10^{(39.2\text{dB}\mu\text{V}/20)}$ = 91.2 μV

Margin = 48 dB μV - 39.2 dB μV
 = 8.8 dB

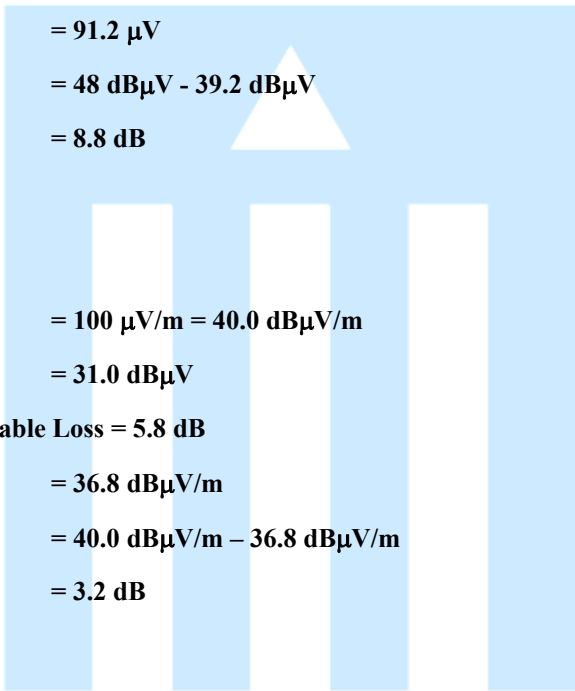

14.2 Example 2 :

■ 66.7 MHz

Class B Limit = 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$

Reading = 31.0 dB μV

Antenna Factor + Cable Loss = 5.8 dB

Total = 36.8 dB $\mu\text{V}/\text{m}$

Margin = 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$
 = 3.2 dB





15. Recommendation & Conclusion

The data collected shows that the **Ohsung Electronics Co., Ltd. Wireless Remote Controller (Model Name: TDC-7100)** was complies with §15.247 of the FCC Rules.

- The end -

