


1 2 3 4 5 6

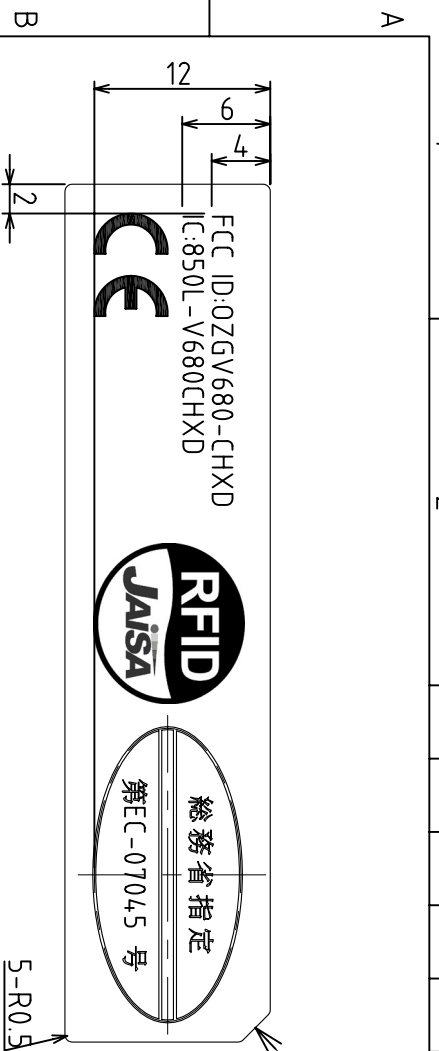


NOTE 1. LABEL PRINT IN INDICATED COLORS AS BELOW.  
 GROUND COLOR: 5Y7/1 (LIGHT GRAY)  
 CHARACTERS AND LINES: OCL-030 BLACK 1.5 (BLACK)

2. FROSTED LAMINATE TREATMENT  
 3. FONT STYLE SHALL BE FOLLOWED TO THE BELOW TABLE.

Representation	Font	Height(mm)
FCC ID:0ZGV680...	UNIVERSE 55	h = 1.5
IC:850L-V680...	UNIVERSE 55	h = 1.5
CE	SPECIFIED	h = 5
総務省指定, 第, 号	MING	h = 1.5
EC-07045	UNIVERSE 65	h = 1.5

- ADHESION TO BE PRESSURE-SENSITIVE ADHESIVE.
- MATERIALS THE LABELS TO BE ATTACHED TO IS ABS+PC.
- NO OUTER SHAPE LINES SHALL REMAIN AFTER FINISHING.

Line width 0.2

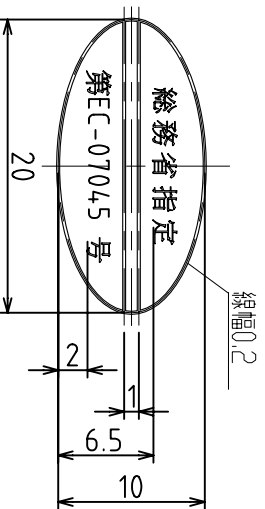

MARK DESIGNATED BY MIC

CE MARK

JAISA MARK

[Unit: mm]

寸法区分 (mm)	IT 14
0 < X ≤ 3	±0.125
3 < X ≤ 6	±0.150
6 < X ≤ 10	±0.180
10 < X ≤ 18	±0.215
18 < X ≤ 30	±0.260
30 < X ≤ 50	±0.310
50 < X ≤ 80	±0.370

MATERIAL T O. 05 PET WHT		SCALE 2:1		ラベル, キカク	
FINISH Reference Note. 1, 2		3RD ANGLE SHEET 1/3		LABEL, STANDARDS	
TOLERANCES UNLESS SPECIFIED		DRWG NO. XXXXX - X		A	
DESIGNED RF DEV. YAMASAKI		DESIGNED FOR V680-CH1D-PSI			
DATE	E/C CONTENTS	E/C NO.	SIGN		
IT 14					


1 2 3 4 5 6

NOTE 1. LABEL PRINT IN INDICATED COLORS AS BELOW.  
 GROUND COLOR: 5Y7/1 (LIGHT GRAY)  
 CHARACTERS AND LINES: OCL-030 BLACK 1.5 (BLACK)


2. FROSTED LAMINATE TREATMENT

3. FONT STYLE SHALL BE FOLLOWED TO THE BELOW TABLE.

Representation	Font	Height(mm)
FCC ID:0ZGV68...	UNIVERSE 55	h = 1.5
IC:850L-V680...	UNIVERSE 55	h = 1.5
<b>CE</b>	SPECIFIED	h = 5
総務省指定, 第, 号	MING	h = 1.5
EC-07044	UNIVERSE 65	h = 1.5

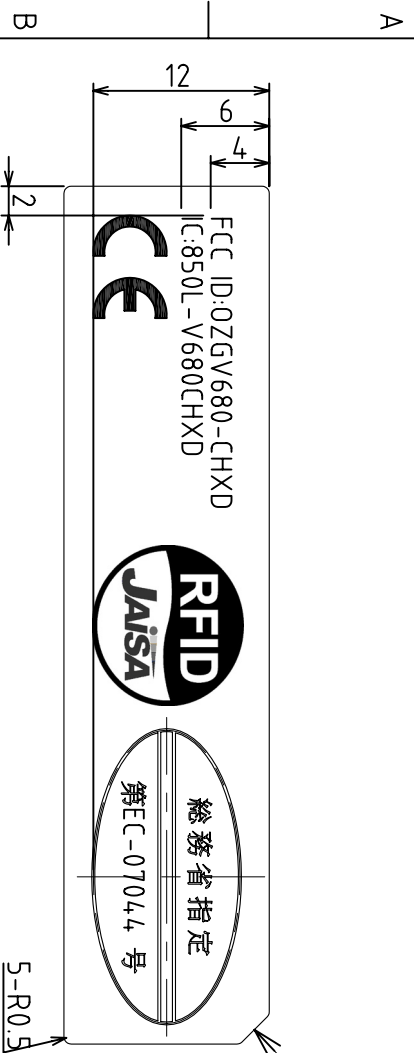

Line width 0.2

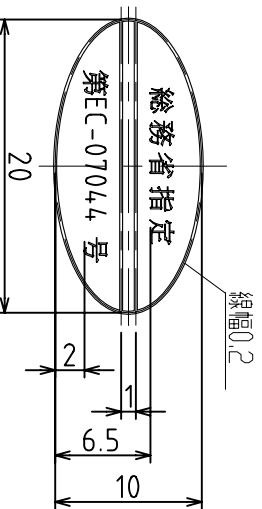

MARK DESIGNATED BY MIC



CE MARK



JAISA MARK

[Unit : mm]

寸法区分 (mm)	IT 14
0 < X ≤ 3	±0.125
3 < X ≤ 6	±0.150
6 < X ≤ 10	±0.180
10 < X ≤ 18	±0.215
18 < X ≤ 30	±0.260
30 < X ≤ 50	±0.310
50 < X ≤ 80	±0.370

MATERIAL 0.05 PET WHT		SCALE 2:1		ラベル, キタケ	
FINISH Reference Note. 1, 2		3RD ANGLE SHEET 1/3		LABEL, STANDARDS	
TOLERANCES UNLESS SPECIFIED		DRWG NO. XXXXX - X		A	
DESIGNED 07/09/11		RF DEV. YAMASAKI		DESIGNED FOR V680-CH1D	
DATE	E/C CONTENTS	E/C NO.	SIGN		
IT 14					


1 2 3 4 5 6

NOTE 1. LABEL PRINT IN INDICATED COLORS AS BELOW.  
GROUND COLOR: 5Y7/1 (LIGHT GRAY)  
CHARACTERS AND LINES: OCL-030 BLACK 1.5 (BLACK)

2. FROSTED LAMINATE TREATMENT


3. FONT STYLE SHALL BE FOLLOWED TO THE BELOW TABLE.

Representation	Font	Height(mm)
FCC ID:0ZGV680...	UNIVERSE 55	h = 1.5
IC:850L-V680...	UNIVERSE 55	h = 1.5
<b>CE</b>	SPECIFIED	h = 5
総務省指定, 第, 号	MING	h = 1.5
EC-07043	UNIVERSE 65	h = 1.5

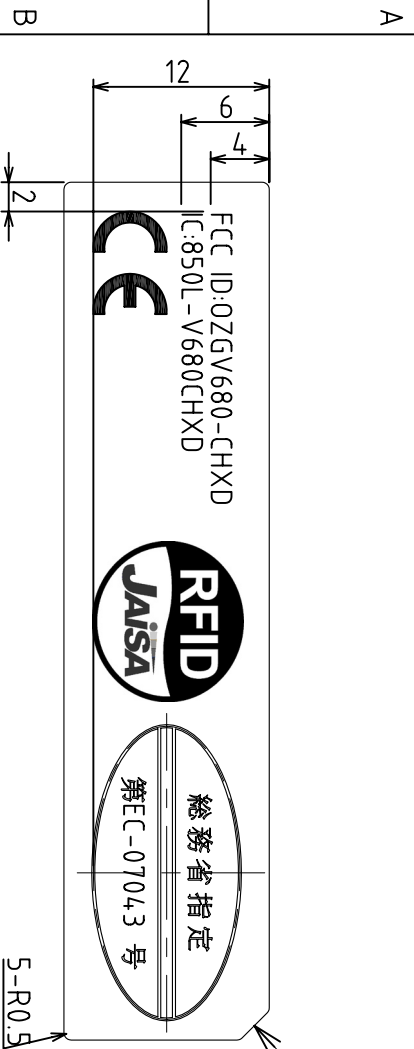

- ADHESION TO BE PRESSURE-SENSITIVE ADHESIVE.
- MATERIALS THE LABELS TO BE ATTACHED TO IS ABS+PC.
- NO OUTER SHAPE LINES SHALL REMAIN AFTER FINISHING.

Line width 0.2

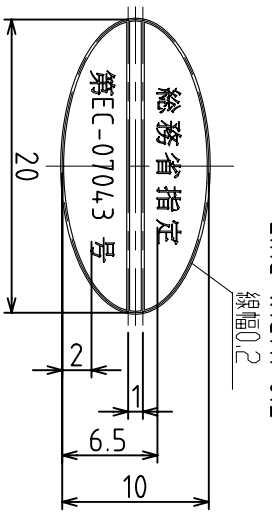

MARK DESIGNATED BY MIC



CE MARK



JAISA MARK

[Unit: mm]

寸法区分 (mm)	IT 14
0 < X ≤ 3	±0.125
3 < X ≤ 6	±0.150
6 < X ≤ 10	±0.180
10 < X ≤ 18	±0.215
18 < X ≤ 30	±0.260
30 < X ≤ 50	±0.310
50 < X ≤ 80	±0.370

MATERIAL T O. 05 PET WHT		SCALE 2:1		ラベル, キカク	
FINISH Reference Note. 1, 2		3RD ANGLE SHEET 1 / 3		LABEL, STANDARDS	
TOLERANCES UNLESS SPECIFIED		DRWG NO. XXXXX - X		DESIGNED FOR V680-CHUD	
DESIGNED		RF DEV. YAMASAKI		A	
I T 1 4					
E/C CONTENTS		E/C NO.		SIGN	
DATE					