

APPLICATION FOR CERTIFICATION  
On Behalf of

Mad Catz, Inc.

Rock Band Wireless Pro Drum Kit for Play Station 3

Model Number: 97710-C (RB3)

FCC ID: P25SU97710Y2510C

Prepared for : Mad Catz, Inc.  
7480 Mission Valley Road, Suite 101, San Diego,  
California, 92108, USA

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F10175  
Date of Test : Jul.12~13, 2010  
Date of Report : Jul.15, 2010

## TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>1-1</b>
1.1. Description of Standards and Results.....	1-1
<b>2. GENERAL INFORMATION.....</b>	<b>2-1</b>
2.1. Description of Device (EUT) .....	2-1
2.2. Test Facility.....	2-2
2.3. Test Uncertainty (95% confidence levels, k=2).....	2-2
<b>3. POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>3-1</b>
<b>4. RADIATED EMISSION TEST .....</b>	<b>4-1</b>
4.1. Test Equipment .....	4-1
4.2. Block Diagram of Test Setup.....	4-1
4.3. Radiated Emission Limit.....	4-2
4.4. EUT Configuration on Test.....	4-3
4.5. Operating Condition of EUT.....	4-3
4.6. Test Procedure.....	4-4
4.7. Radiated Emission Test Results .....	4-4
<b>5. BAND EDGE COMPLIANCE TEST .....</b>	<b>5-1</b>
5.1. Test Equipment .....	5-1
5.2. Limit.....	5-1
5.3. Test Produce .....	5-1
5.4. Test Results .....	5-1
<b>6. 20DB BANDWIDTH TEST .....</b>	<b>6-1</b>
6.1. Test Equipment .....	6-1
6.2. Limit.....	6-1
6.3. Test Results .....	6-1
<b>7. DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>7-1</b>
<b>8. PHOTOGRAPH OF TEST .....</b>	<b>8-1</b>
8.1. Photos of Radiated Emission Test (In Anechoic Chamber).....	8-1
<b>9. PHOTOGRAPH OF EUT .....</b>	<b>9-3</b>

## TEST REPORT CERTIFICATION

Applicant : Mad Catz, Inc.  
 EUT Description : Rock Band Wireless Pro Drum Kit for Play Station 3  
 MODEL NO. : 97710-C (RB3)  
 FCC ID : P25SU97710Y2510C  
 POWER SUPPLY : DC 4.5V  
 TEST VOLTAGE : DC 4.5V

## Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C 2008

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

Date of Test : \_\_\_\_\_ Jul.12~13, 2010

Prepared by : \_\_\_\_\_ Celia Feng  
Celia Feng / Assistant

Reviewer : \_\_\_\_\_ Jamy Yu  
Jamy Yu / Supervisor

Approved & Authorized Signer : \_\_\_\_\_ Ken Lu  
Ken Lu / Manager



## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15C: 15.207 ANSI C63.10-2009	N/A
Radiated Emission Test	FCC Part 15C: 15.209 FCC Part 15C: 15.249 ANSI C63.10-2009	PASS
Band Edge Compliance Test	FCC Part 15: 15.249 ANSI C63.10-2009	PASS
20dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10-2009	PASS
N/A is an abbreviation for Not Applicable.		

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Product name : Rock Band Wireless Pro Drum Kit for Play Station 3

Model Number : 97710-C (RB3)

FCC ID : P25SU97710Y2510C

Operation frequency : 2408MHz~2476MHz

Modulation : GFSK

Power Supply : DC 4.5V  
(Note: Batteries were full charged for all the test.)

Applicant : Mad Catz, Inc.  
7480 Mission Valley Road, Suite 101, San Diego, California,  
92108, USA

Date of Test : Jul.12~13, 2010

Date of Receipt : Jul.06, 2010

Sample Type : Prototype production

## 2.2. Test Facility

Site Description	
Name of Firm	: Audix Technology (Shenzhen) Co., Ltd. No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park,Nantou, Shenzhen, Guangdong, China
3m Anechoic Chamber	: Mar.31, 2009 File on Federal Communication Commission Registration Number: 90454
3m & 10m Anechoic Chamber	: Dec. 30, 2009 File on Federal Communication Commission Registration Number: 794232
EMC Lab.	: Accredited by DATech, German Registration Number: DAT-P-091/99-01 Feb. 02, 2009
	Accredited by NVLAP, USA NVLAP Code: 200372-0 Apr. 01, 2010

## 2.3. Test Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Radiation Emission test in 3m chamber	4.20 dB (Polarize: V)
	4.66 dB (Polarize: H)
Uncertainty for Radiated Spurious Emission test in RF chamber	2.70 dB (Bilog antenna 30M~1000MHz)
	2.27 dB (Horn antenna 1000M~12750MHz)
Uncertainty for Bandwidth test	$1 \times 10^{-9}$
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.3°C
	2%

### **3. POWER LINE CONDUCTED EMISSION TEST**

According to Paragraph (c) of FCC Part 15 section 15.207, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipment

Frequency rang: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Dec.05,09	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 10	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 10	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 10	1 Year
5	Bilog Antenna	Schaffner	CBL6111C	2598	Dec.14, 09	1 Year
6	RF Cable	MIYAZAKI	8D-FB	3# Chamber No.1	May.08, 10	1 Year
7	Coaxial Switch	Anritsu	MP59B	M73989	May.08, 10	1 Year

Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 10	1 Year
2	Horn Antenna	EMCO	3115	9607-4877	Nov.25, 09	1.5 Year
3	Horn Antenna	EMCO	3116	00060089	Nov.25, 09	1.5 Year
4	Amplifier	Agilent	8449B	3008A00863	May.08, 10	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	May.08, 10	1 Year
6	RF Cable	Hubersuhner	SUCOFLEX102	29091/2	May.08, 10	1 Year

### 4.2. Block Diagram of Test Setup


#### 4.2.1. Block Diagram of connection between EUT and simulators



(EUT: Rock Band Wireless Pro Drum Kit for Play Station 3)

#### 4.2.2. Anechoic Chamber Setup Diagram

##### ANTENNA TOWER

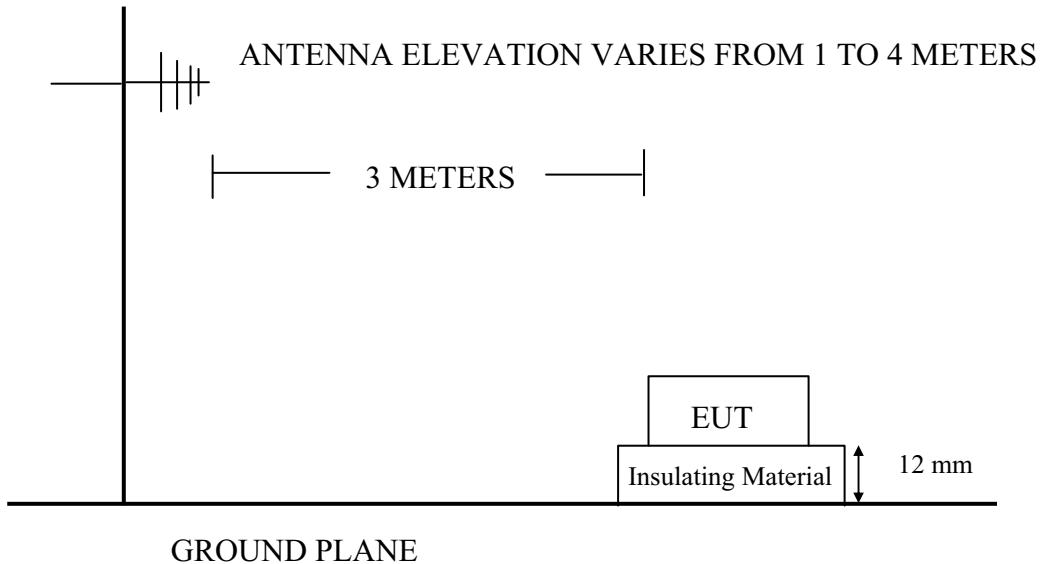

#### 4.3. Radiated Emission Limit

##### 4.3.1.15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 960MHz	3	74.0 dB( $\mu\text{V}$ )/m (Peak) 54.0 dB( $\mu\text{V}$ )/m (Average)	

- Remark :
- (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 4.4.1. Rock Band Wireless Pro Drum Kit for Play Station 3(EUT)

Model Number : 97710-C (RB3)  
 Serial Number : N/A

#### 4.4.2. Support Equipment: As Tested Supporting System Detail, in Section 2.2.

### 4.5. Operating Condition of EUT

4.5.1. Setup the EUT as shown in Section 4.2..

4.5.2. Turned on the power of all equipment.

4.5.3. Let the EUT worked in test mode (Tx Mode) and tested it.

#### 4.6. Test Procedure

EUT and its simulators are placed on 12mm thick insulating material above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz

This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.



#### 4.7. Radiated Emission Test Results

**PASS**

All the emissions from 30MHz to 25 GHz are comply with 15.209 limits

Duty cycle:  $0.8167\text{us} \times 13\text{times} / 100\text{ms} \times 100\% = 10.6\%$

Duty cycle factor =  $20\log(1/\text{duty cycle}) = 19.49\text{dB}$

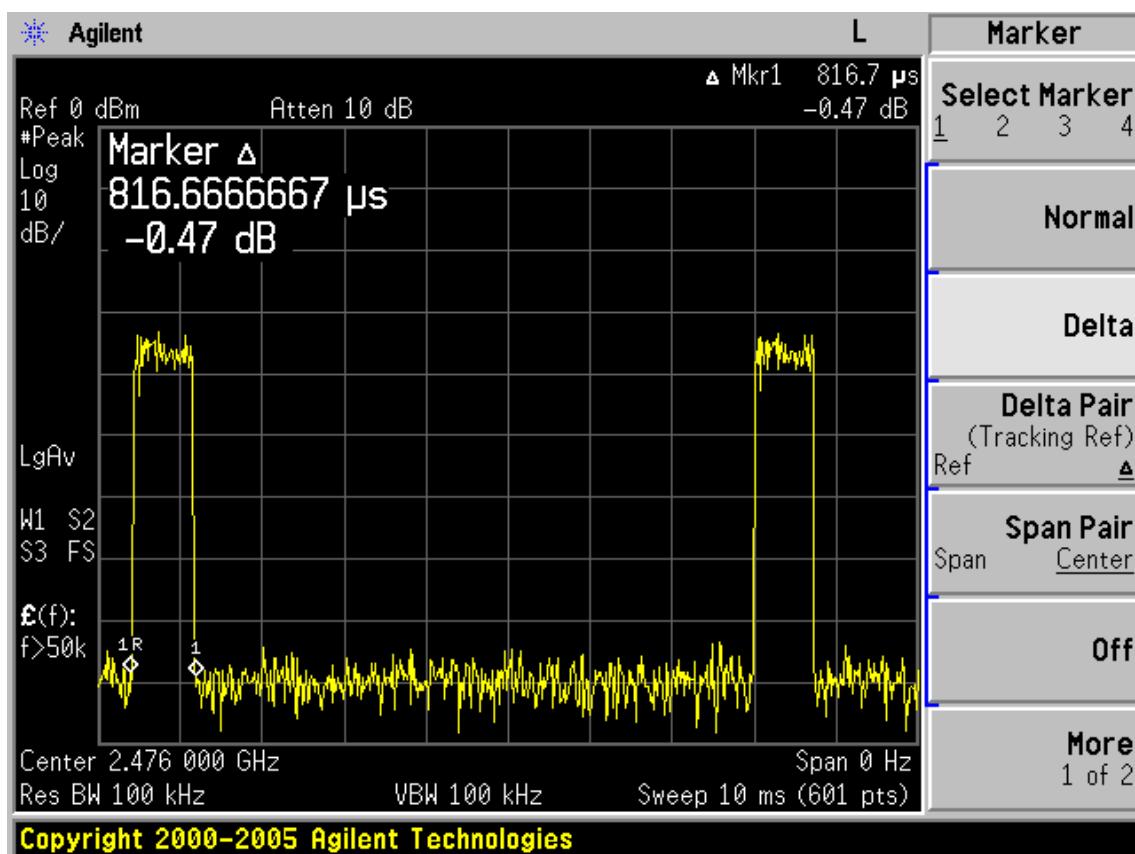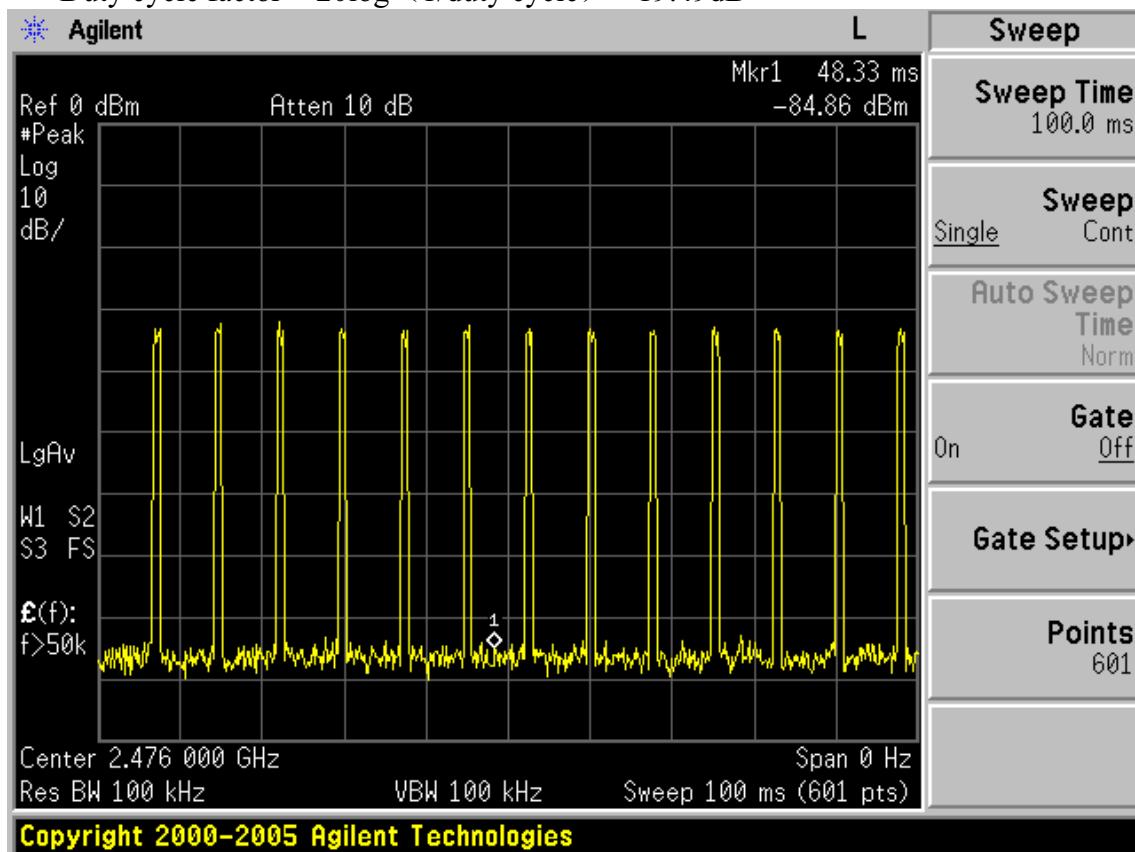


## Radiated spurious emissions from 30MHz to 1GHz test result



No.6 Ke Feng Road, Block 52,  
ShenZhen Science & Industry Park  
Noutou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 2 File: D:\2010 Report Data\MI\Mad Catz\ACS10QH166.EM6 (12)

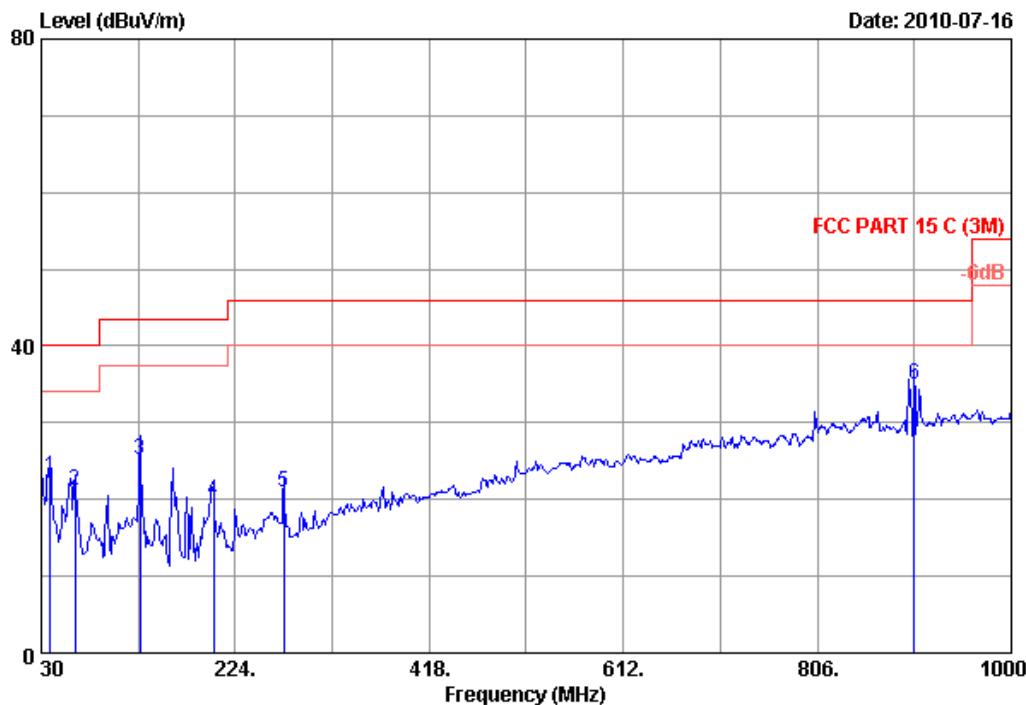

Site no. : 3m Chamber Data no. : 2  
Dis. / Ant. : 3m 2010 CBL6111C Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 24°C/56% Engineer : Leo-Li  
EUT : Rock Band Wireless Pro Drum Kit for Play Station 3  
Power : DC 4.5V  
Test mode : Tx  
M/N : 97710-C (RB3)


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission			
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
1	38.730	15.04	0.68	7.31	23.03	40.00	16.97 QP
2	63.950	6.00	0.88	14.27	21.15	40.00	18.85 QP
3	128.940	12.18	1.13	11.96	25.27	43.50	18.23 QP
4	202.660	10.06	1.75	8.00	19.81	43.50	23.69 QP
5	272.500	13.25	2.31	5.44	21.00	46.00	25.00 QP
6	903.000	22.89	5.21	6.99	35.09	46.00	10.91 QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 1 File: D:\2010 Report Data\MMad Catz\ACS10QH166.EM6 (12)

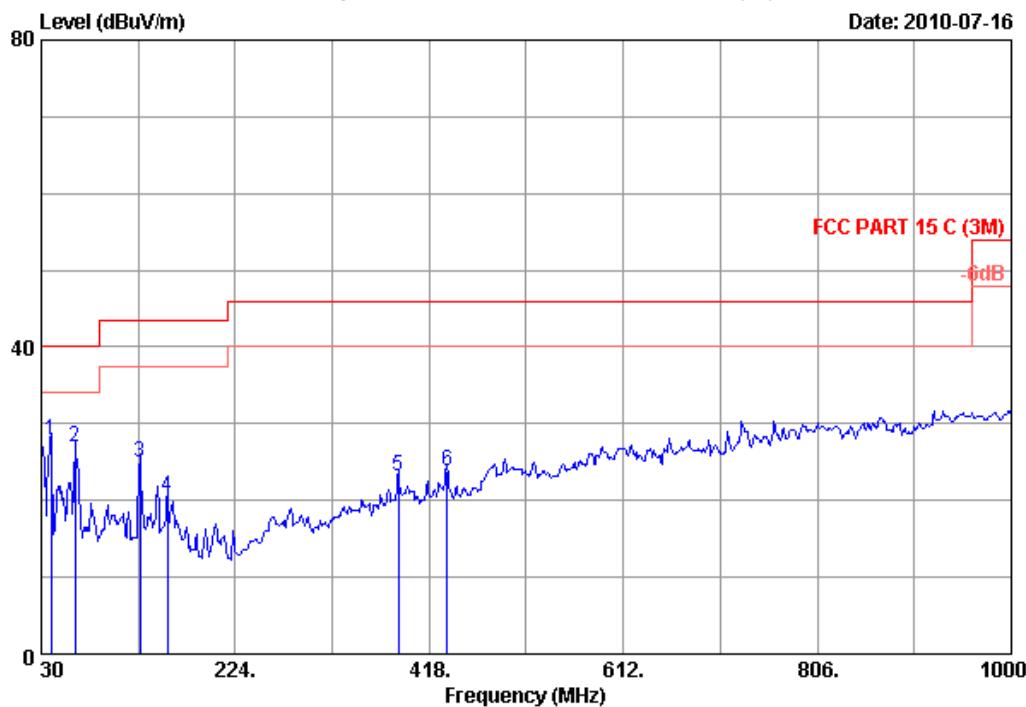

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 2010 CBL6111C Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24°C/56% Engineer : Leo-Li  
 EUT : Rock Band Wireless Pro Drum Kit for Play Station 3  
 Power : DC 4.5V  
 Test mode : Tx  
 M/N : 97710-C (RB3)

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission				
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	39.700	14.50	0.69	12.65	27.84	40.00	12.16	QP
2	63.950	6.00	0.88	20.05	26.93	40.00	13.07	QP
3	128.940	12.18	1.13	11.71	25.02	43.50	18.48	QP
4	156.100	11.26	1.21	8.07	20.54	43.50	22.96	QP
5	386.960	16.12	2.86	4.14	23.12	46.00	22.88	QP
6	435.460	17.34	3.14	3.29	23.77	46.00	22.23	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

## Radiated emissions from 1GHz to 18GHz (include fundamental) test result



No.6 Ke Feng Road, Block 52,  
ShenZhen Science & Industry Park  
Noutou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 1 File: E:\2010 report data\W\Madcatz\ACS10QH166.EM6 (16)

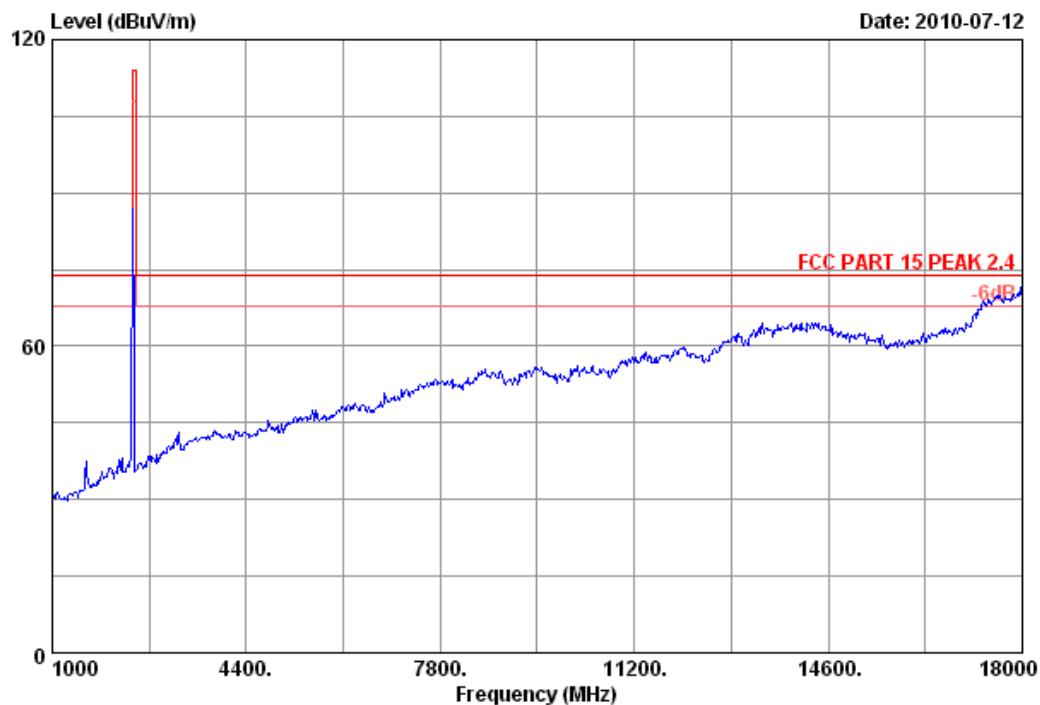


Site no.	:	10m Chamber	Data no.	:	1
Dis. / Ant.	:	3m 3115(0911)	Ant. pol.	:	HORIZONTAL
Limit	:	FCC PART 15 PEAK 2.4			
Env. / Ins.	:	23°C/54%	Engineer	:	Paul Tian
EUT	:	Rock Band Wireless Pro Drum Kit for Play Station 3			
Power	:	DC 4.5V			
Test mode	:	Tx 2408MHz			
M/N	:	97710-C (RB3)			



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 2 File: E:\2010 report data\W\Madcatz\ACS10QH166.EM6 (16)

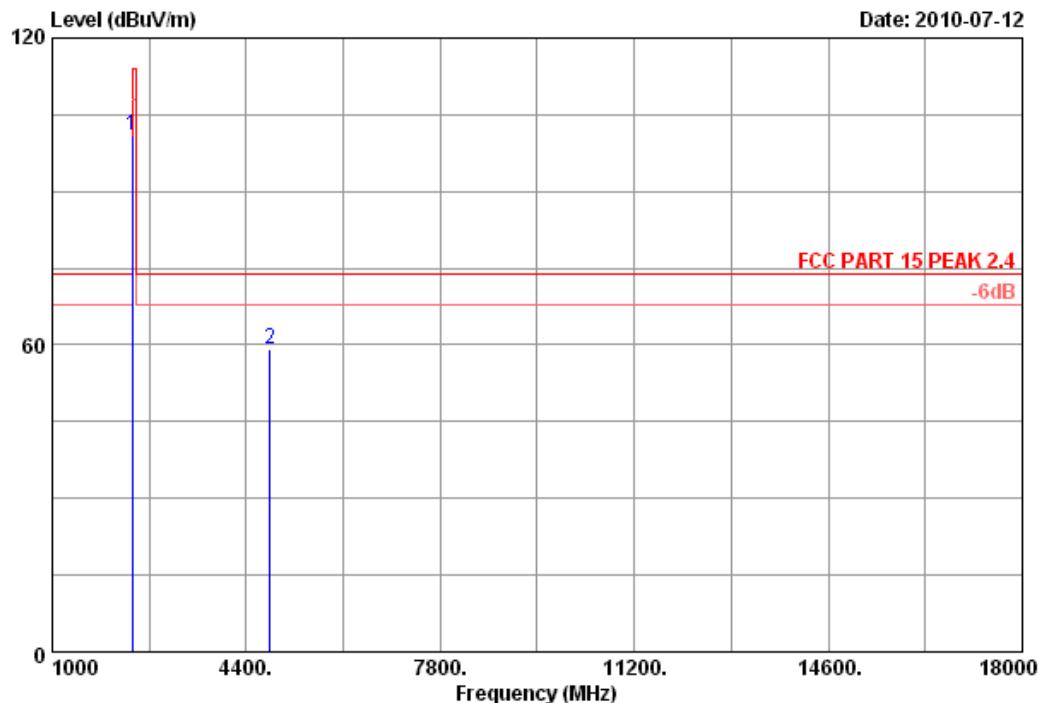

Site no. : 10m Chamber Data no. : 2  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Paul Tian  
EUT : Rock Band Wireless Pro Drum Kit for Play Station 3  
Power : DC 4.5V  
Test mode : Tx 2408MHz  
M/N : 97710-C (RB3)

	Ant.	Cable	Amp.	Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
1	2408.000	29.45	7.43	36.62	100.80	101.06	114.00
2	4816.000	34.30	10.62	35.08	49.29	59.13	74.00

## Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	PK measured level (dBuV/m)	Duty cycle factor (dB)	Average level (dBuV/m)	Average Limit (dBuV/m)	Result
2408	101.06	19.49	81.57	94	PASS
4816	59.13	19.49	39.64	54	PASS



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 3 File: E:\2010 report data\W\Madcatz\ACS10QH166.EM6 (16)

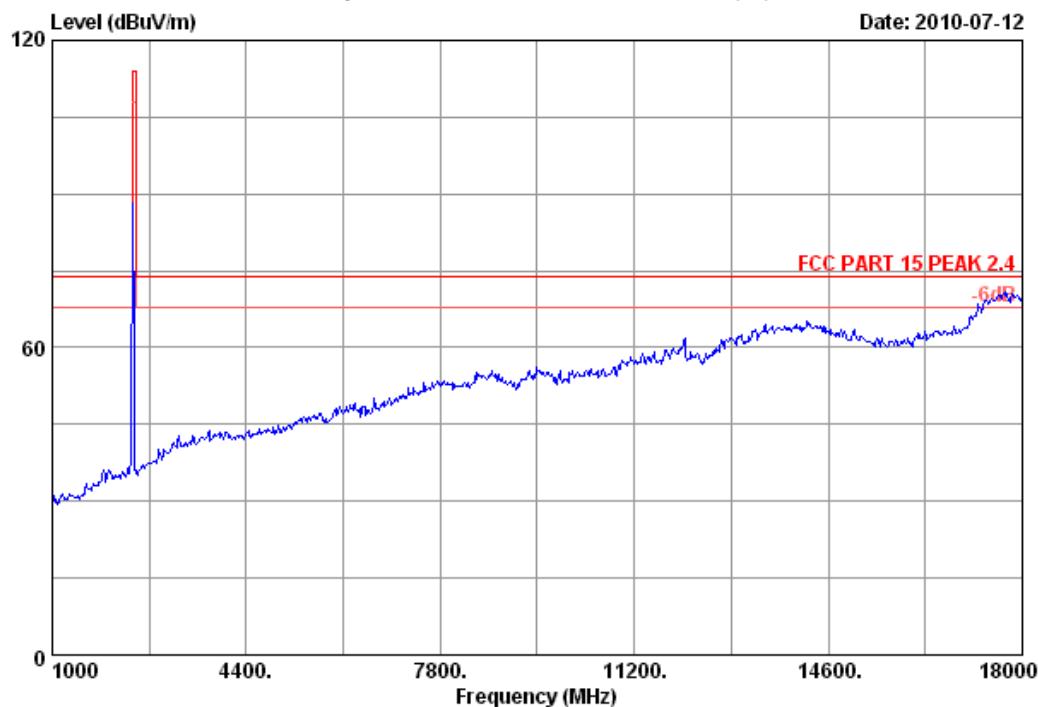


Site no.	:	10m Chamber	Data no. :	3
Dis. / Ant.	:	3m 3115(0911)	Ant. pol. :	VERTICAL
Limit	:	FCC PART 15 PEAK 2.4		
Env. / Ins.	:	23°C/54%	Engineer :	Paul Tian
EUT	:	Rock Band Wireless Pro Drum Kit for Play Station 3		
Power	:	DC 4.5V		
Test mode	:	Tx 2408MHz		
M/N	:	97710-C (RB3)		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 4 File: E:\2010 report data\W\Madcatz\ACS10QH166.EM6 (16)

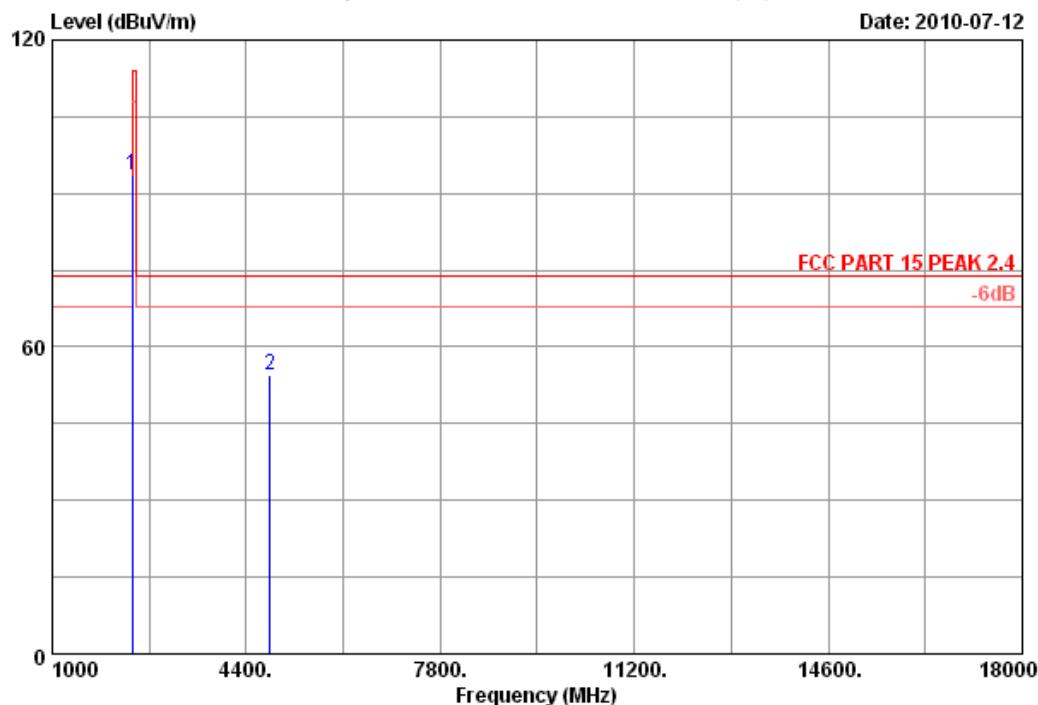

Site no. : 10m Chamber Data no. : 4  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Paul Tian  
EUT : Rock Band Wireless Pro Drum Kit for Play Station 3  
Power : DC 4.5V  
Test mode : Tx 2408MHz  
M/N : 97710-C (RB3)

	Ant.	Cable	Amp.	Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
1	2408.000	29.45	7.43	36.62	93.45	93.71	20.29
2	4816.000	34.30	10.62	35.08	44.56	54.40	19.60

## Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	PK measured level (dBuV/m)	Duty cycle factor (dB)	Average level (dBuV/m)	Average Limit (dBuV/m)	Result
2408	93.71	19.49	74.22	94	PASS
4816	54.40	19.49	34.91	54	PASS



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 9 File: E:\2010 report data\W\Madcatz\ACS10QH166.EM6 (16)

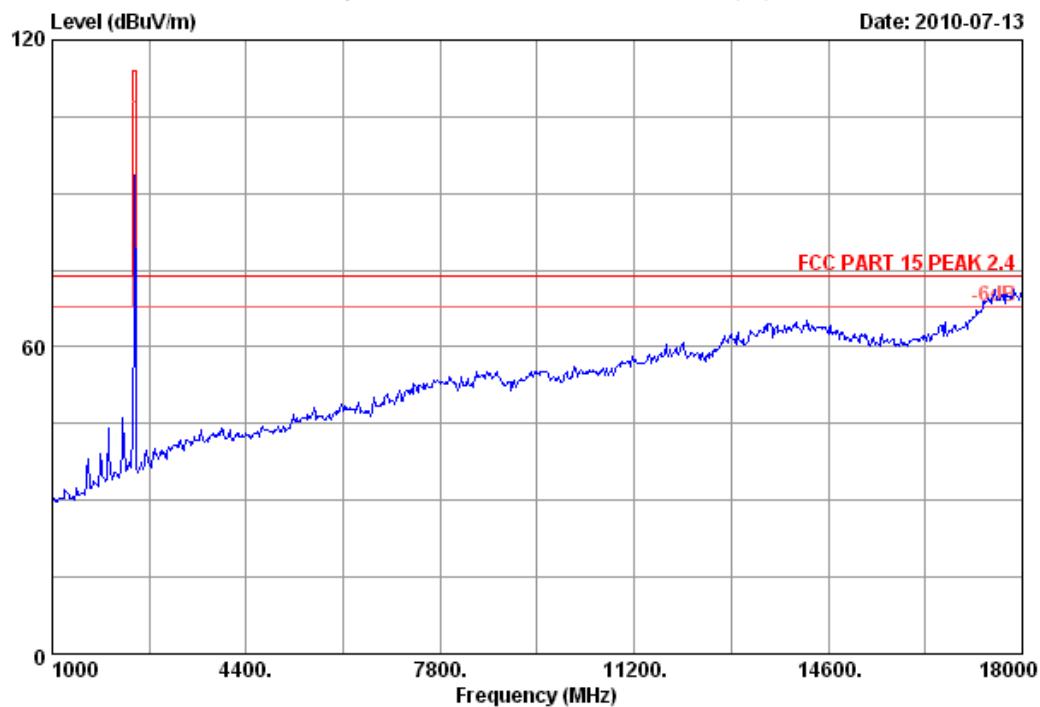


Site no.	:	10m Chamber	Data no. :	9
Dis. / Ant.	:	3m 3115(0911)	Ant. pol. :	HORIZONTAL
Limit	:	FCC PART 15 PEAK 2.4		
Env. / Ins.	:	23°C/54%	Engineer :	Paul Tian
EUT	:	Rock Band Wireless Pro Drum Kit for Play Station 3		
Power	:	DC 4.5V		
Test mode	:	Tx 2440MHz		
M/N	:	97710-C (RB3)		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 10 File: E:\2010 report data\W\Madcatz\ACS10QH166.EM6 (16)

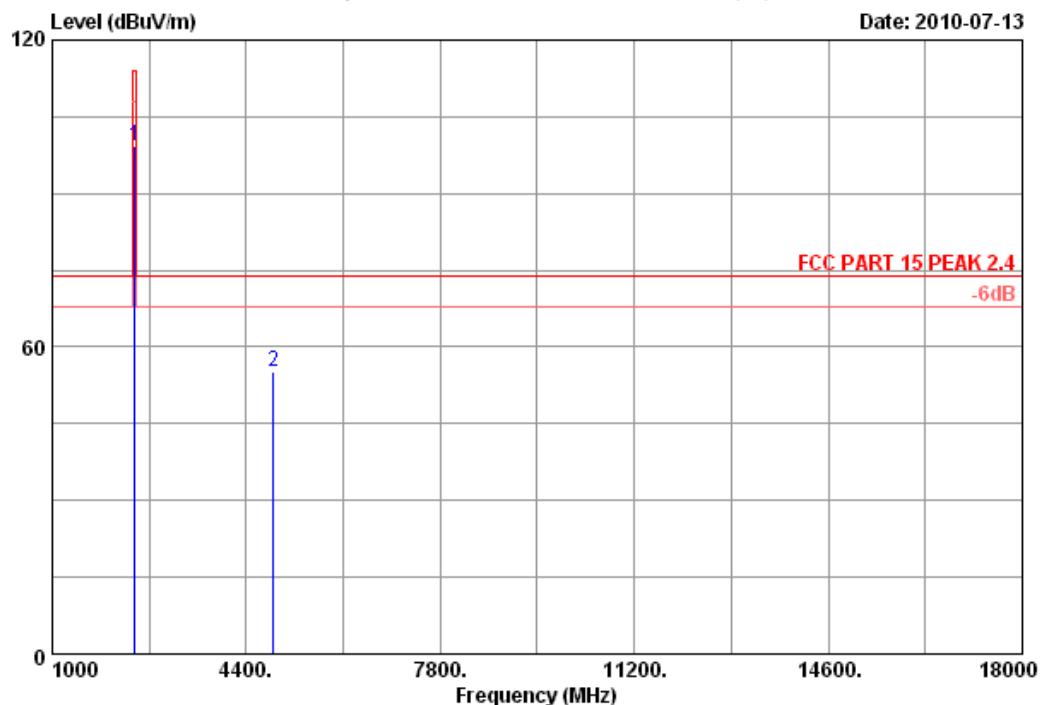

Site no. : 10m Chamber Data no. : 10  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23°C/54% Engineer : Paul Tian  
 EUT : Rock Band Wireless Pro Drum Kit for Play Station 3  
 Power : DC 4.5V  
 Test mode : Tx 2440MHz  
 M/N : 97710-C (RB3)

	Ant.	Cable	Amp.	Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
1	2440.000	29.47	7.50	36.61	99.02	99.38	114.00
2	4880.000	34.41	10.71	35.03	45.16	55.25	74.00

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	PK measured level (dBuV/m)	Duty cycle factor (dB)	Average level (dBuV/m)	Average Limit (dBuV/m)	Result
2440	99.38	19.49	79.89	94	PASS
4880	55.25	19.49	35.76	54	PASS




No.6 Ke Feng Road, Block 52,  
ShenZhen Science & Industry Park  
Noutou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 7

File: E:\2010 report data\1\Madcatz\ACS10QH166.EM6 (16)

Date: 2010-07-13

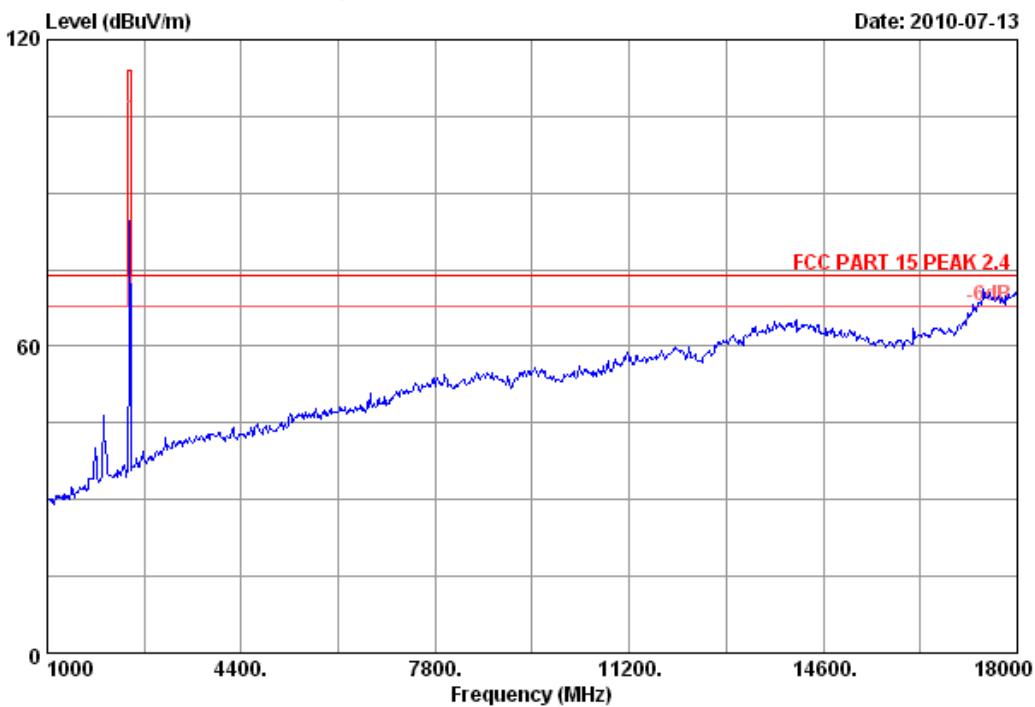


Site no.	:	10m Chamber	Data no.	:	7
Dis. / Ant.	:	3m 3115(0911)	Ant. pol.	:	VERTICAL
Limit	:	FCC PART 15 PEAK 2.4			
Env. / Ins.	:	23°C/54%	Engineer	:	Paul Tian
EUT	:	Rock Band Wireless Pro Drum Kit for Play Station 3			
Power	:	DC 4.5V			
Test mode	:	Tx 2440MHz			
M/N	:	97710-C (RB3)			



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 8 File: E:\2010 report data\W\Madcatz\ACS10QH166.EM6 (16)

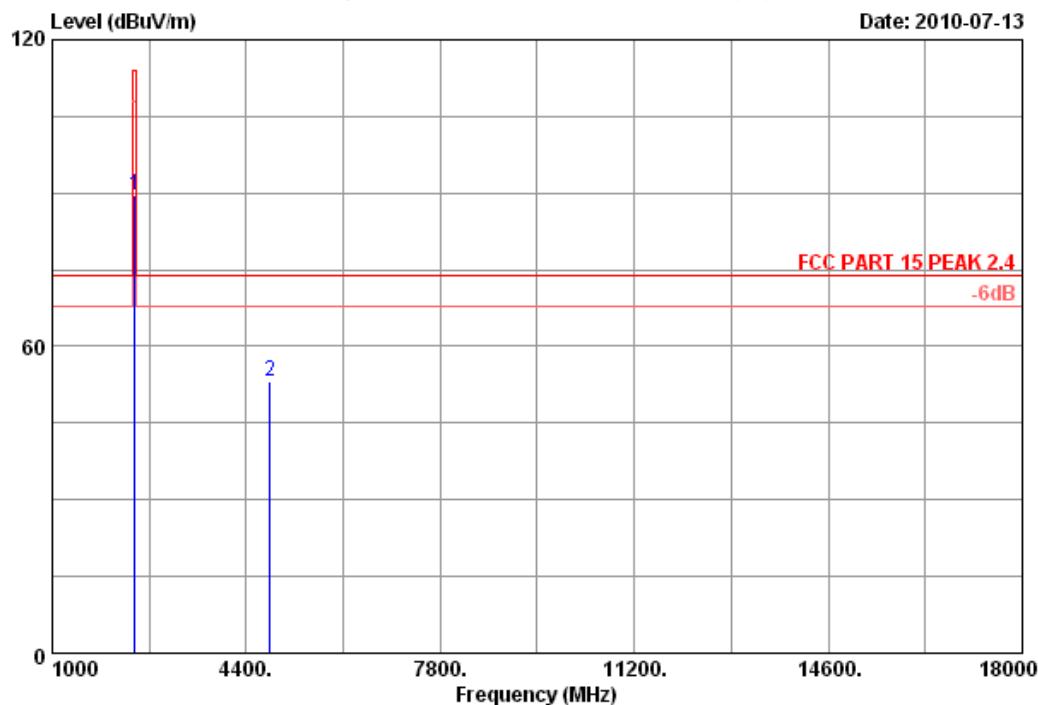

Site no. : 10m Chamber Data no. : 8  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Paul Tian  
EUT : Rock Band Wireless Pro Drum Kit for Play Station 3  
Power : DC 4.5V  
Test mode : Tx 2440MHz  
M/N : 97710-C (RB3)

	Ant.	Cable	Amp.	Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
1	2440.000	29.47	7.50	36.61	89.18	89.54	114.00
2	4816.000	34.30	10.62	35.08	43.18	53.02	74.00

## Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	PK measured level (dBuV/m)	Duty cycle factor (dB)	Average level (dBuV/m)	Average Limit (dBuV/m)	Result
2440	89.54	19.49	70.05	94	PASS
4816	53.02	19.49	33.53	54	PASS



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 11 File: E:\2010 report data\W\Madcatz\ACS10QH166.EM6 (16)

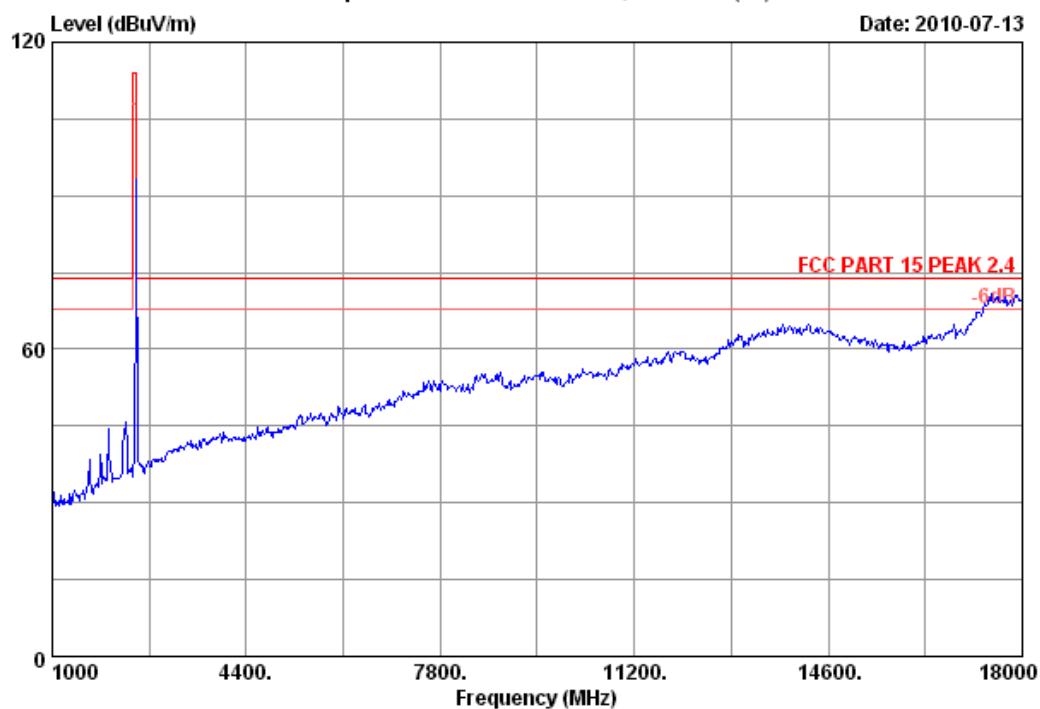


Site no.	:	10m Chamber	Data no. :	11
Dis. / Ant.	:	3m 3115(0911)	Ant. pol. :	HORIZONTAL
Limit	:	FCC PART 15 PEAK 2.4		
Env. / Ins.	:	23°C/54%	Engineer :	Paul Tian
EUT	:	Rock Band Wireless Pro Drum Kit for Play Station 3		
Power	:	DC 4.5V		
Test mode	:	Tx 2476MHz		
M/N	:	97710-C (RB3)		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 12 File: E:\2010 report data\W\Madcatz\ACS10QH166.EM6 (16)

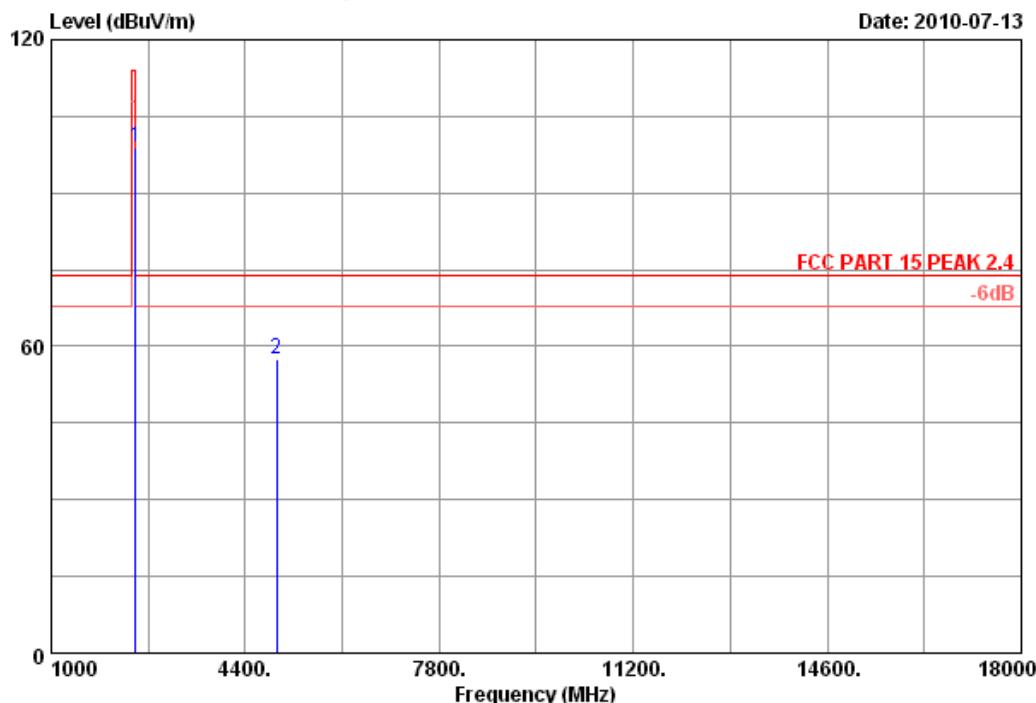

Site no. : 10m Chamber Data no. : 12  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23°C/54% Engineer : Paul Tian  
 EUT : Rock Band Wireless Pro Drum Kit for Play Station 3  
 Power : DC 4.5V  
 Test mode : Tx 2476MHz  
 M/N : 97710-C (RB3)

	Ant.	Cable	Amp.	Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
1	2476.000	29.49	7.54	36.60	98.62	99.05	114.00
2	4952.000	34.52	10.78	34.95	46.98	57.33	74.00

## Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	PK measured level (dBuV/m)	Duty cycle factor (dB)	Average level (dBuV/m)	Average Limit (dBuV/m)	Result
2476	99.05	19.49	79.56	94	PASS
4952	57.33	19.49	37.84	54	PASS



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 14 File: E:\2010 report data\W\Madcatz\ACS10QH166.EM6 (16)

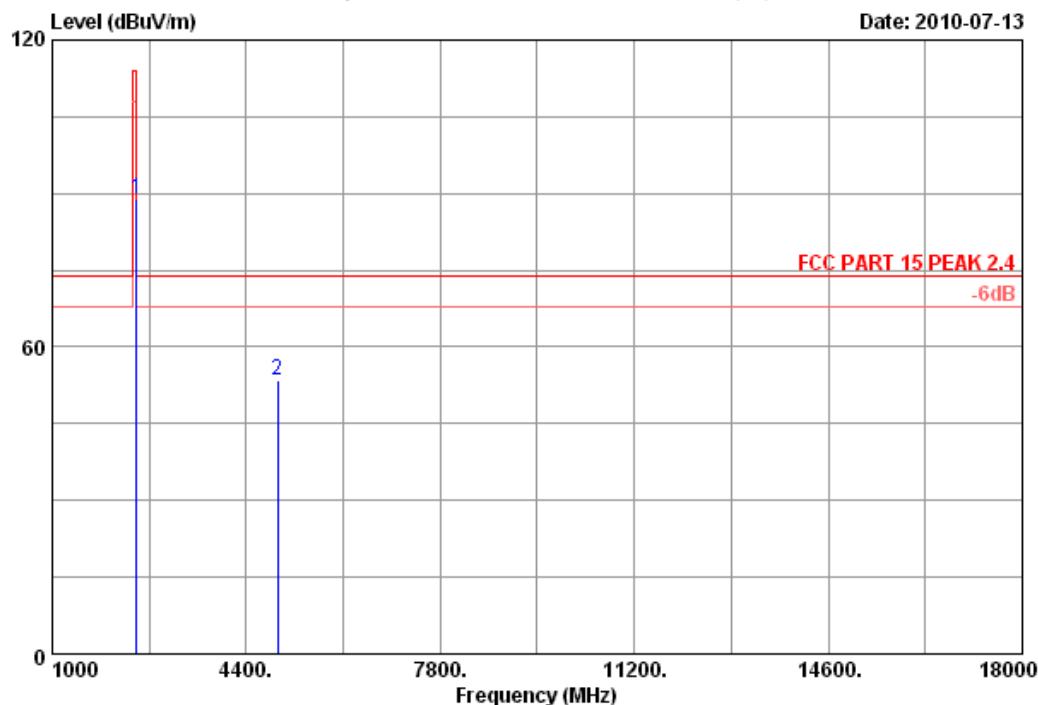

Site no. : 10m Chamber Data no. : 14  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Paul Tian  
EUT : Rock Band Wireless Pro Drum Kit for Play Station 3  
Power : DC 4.5V  
Test mode : Tx 2476MHz  
M/N : 97710-C (RB3)

	Ant.	Cable	Amp.	Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
1	2476.000	29.49	7.58	36.60	88.28	88.75	114.00
2	4952.000	34.52	10.78	34.95	43.15	53.50	74.00

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	PK measured level (dBuV/m)	Duty cycle factor (dB)	Average level (dBuV/m)	Average Limit (dBuV/m)	Result
2476	88.75	19.49	69.26	94	PASS
4952	53.50	19.49	34.01	54	PASS

## 5. BAND EDGE COMPLIANCE TEST

### 5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,10	1 Year
2.	Horn Antenna	EMCO	3115	9607-4877	Nov.25, 09	1.5 Year
3.	Amplifier	Agilent	8449B	3008A02495	May.08, 10	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	May.08,10	1 Year
5.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,10	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX102	28610/2	May.08,10	1 Year

### 5.2. Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in section 15.209, which is the lesser attenuation.

### 5.3. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
  - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
  - (b) This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.


### 5.4. Test Results

Pass (The testing data was attached in the next pages.)



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 6 File: E:\2010 report data\MMadcatz\ACS10QH166.EM6 (16)

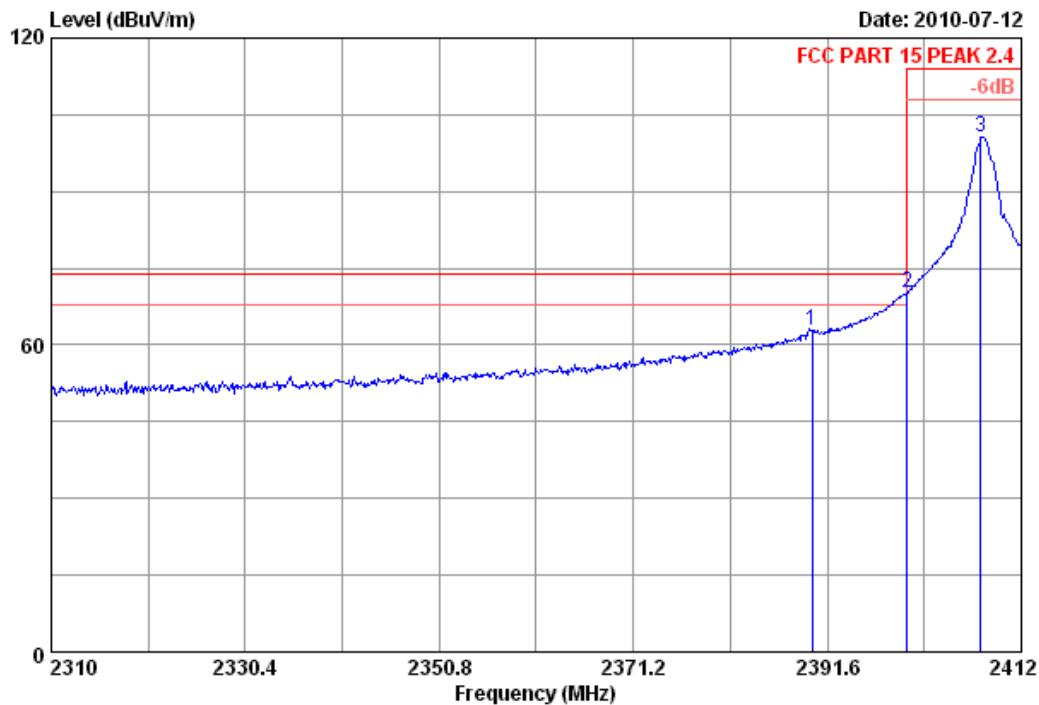

Site no.	: 10m Chamber	Data no. :	6
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	HORIZONTAL
Limit	: FCC PART 15 PEAK 2.4		
Env. / Ins.	: 23°C/54%	Engineer :	Paul Tian
EUT	: Rock Band Wireless Pro Drum Kit for Play Station 3		
Power	: DC 4.5V		
Test mode	: Tx 2408MHz		
M/N	: 97710-C (RB3)		

Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission			
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
1 2390.000	29.44	7.39	36.62	62.60	62.81	74.00	11.19 Peak
2 2400.000	29.44	7.43	36.62	69.97	70.22	74.00	3.78 Peak
3 2407.716	29.45	7.43	36.62	100.49	100.75	114.00	13.25 Peak

## Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	PK measured level (dBuV/m)	Duty cycle factor (dB)	Average level (dBuV/m)	Average Limit (dBuV/m)	Result
2390	62.81	19.49	43.32	54	PASS
2400	70.22	19.49	50.73	54	PASS
2407	100.75	19.49	81.26	94	PASS



No.6 Ke Feng Road, Block 52,  
ShenZhen Science & Industry Park  
Noutou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 5 File: E:\2010 report data\1\Madcatz\ACS10QH166.EM6 (16)

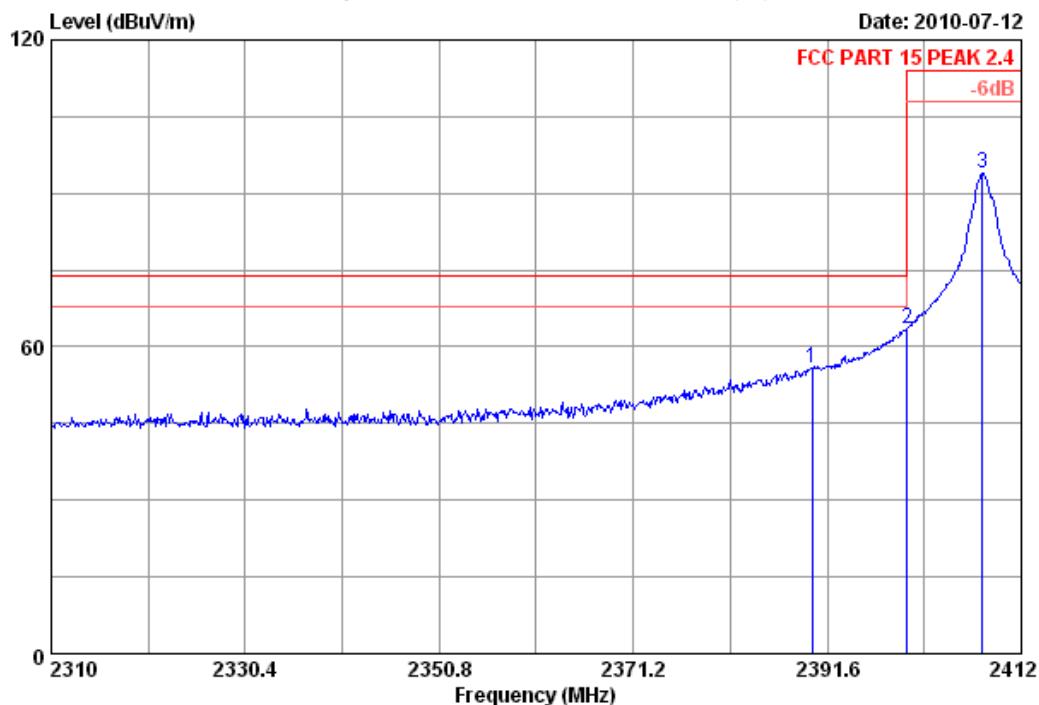

Site no. : 10m Chamber Data no. : 5  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15 PEAK 2.4  
 Env. / Ins. : 23°C/54% Engineer : Paul Tian  
 EUT : Rock Band Wireless Pro Drum Kit for Play Station 3  
 Power : DC 4.5V  
 Test mode : Tx 2408MHz  
 M/N : 97710-C (RB3)

	Ant.	Cable	Amp.	Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
1	2390.000	29.44	7.39	36.62	55.50	55.71	18.29
2	2400.000	29.44	7.43	36.62	63.38	63.63	10.37
3	2407.920	29.45	7.43	36.62	93.55	93.81	20.19

## Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	PK measured level (dBuV/m)	Duty cycle factor (dB)	Average level (dBuV/m)	Average Limit (dBuV/m)	Result
2390	55.71	19.49	36.22	54	PASS
2400	63.63	19.49	44.14	54	PASS
2407.92	93.81	19.49	74.32	94	PASS



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 16 File: E:\2010 report data\1\Madcatz\ACS10QH166.EM6 (16)

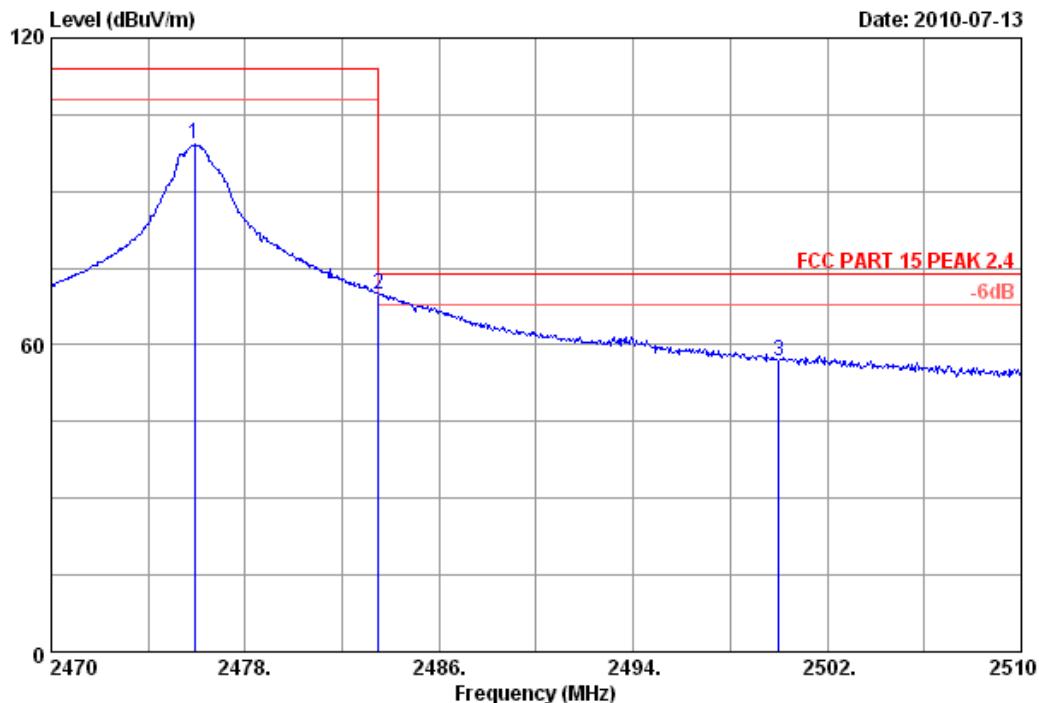

Site no.	:	10m Chamber	Data no.	:	16
Dis. / Ant.	:	3m 3115(0911)	Ant. pol.	:	HORIZONTAL
Limit	:	FCC PART 15 PEAK 2.4			
Env. / Ins.	:	23°C/54%	Engineer	:	Paul Tian
EUT	:	Rock Band Wireless Pro Drum Kit for Play Station 3			
Power	:	DC 4.5V			
Test mode	:	Tx 2476MHz			
M/N	:	97710-C (RB3)			

Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission			
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
1 2475.920	29.49	7.54	36.60	98.78	99.21	114.00	14.79 Peak
2 2483.500	29.49	7.58	36.60	69.39	69.86	74.00	4.14 Peak
3 2500.000	29.50	7.62	36.60	56.34	56.86	74.00	17.14 Peak

## Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	PK measured level (dBuV/m)	Duty cycle factor (dB)	Average level (dBuV/m)	Average Limit (dBuV/m)	Result
2475.92	99.21	19.49	79.72	94	PASS
2483.5	69.86	19.49	50.37	54	PASS
2500	56.86	19.49	37.37	54	PASS



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 15 File: E:\2010 report data\1\Madcatz\ACS10QH166.EM6 (16)

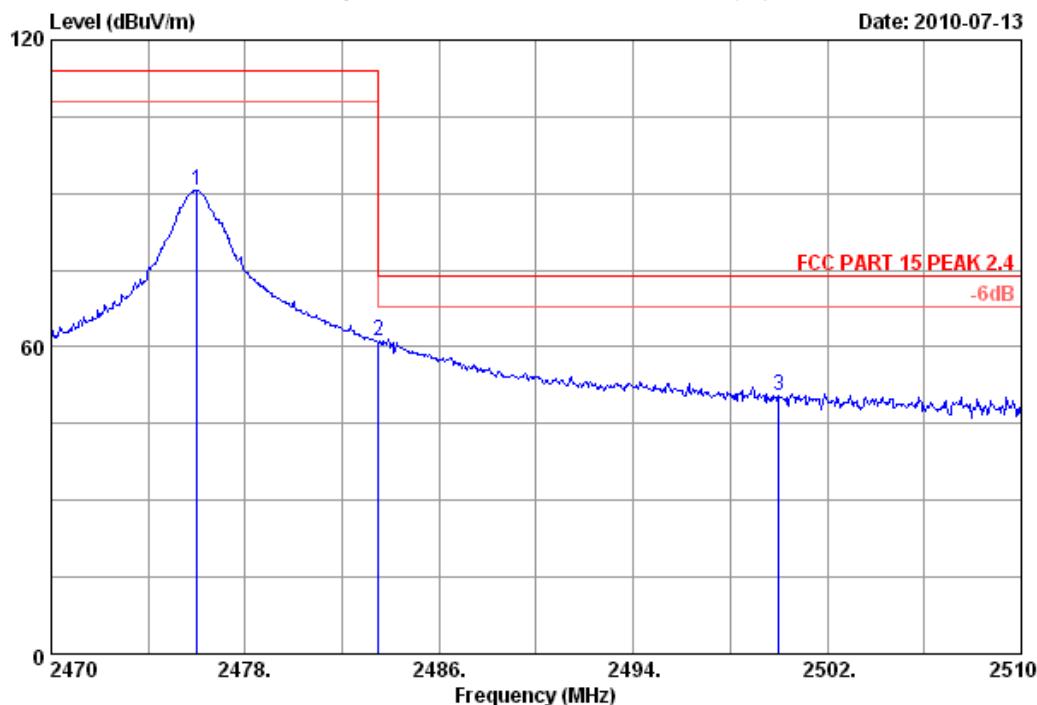

Site no. : 10m Chamber Data no. : 15  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15 PEAK 2.4  
Env. / Ins. : 23°C/54% Engineer : Paul Tian  
EUT : Rock Band Wireless Pro Drum Kit for Play Station 3  
Power : DC 4.5V  
Test mode : Tx 2476MHz  
M/N : 97710-C (RB3)

	Ant.	Cable	Amp.	Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
1	2476.000	29.49	7.54	36.60	90.12	90.55	114.00
2	2483.500	29.49	7.58	36.60	60.72	61.19	74.00
3	2500.000	29.50	7.62	36.60	49.83	50.35	74.00

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	PK measured level (dBuV/m)	Duty cycle factor (dB)	Average level (dBuV/m)	Average Limit (dBuV/m)	Result
2476	90.55	19.49	71.06	94	PASS
2483.5	61.19	19.49	41.70	54	PASS
2500	50.35	19.49	30.86	54	PASS

## 6. 20DB BANDWIDTH TEST

### 6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,10	1 Year

### 6.2. Limit


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 6.3. Test Results


EUT: Rock Band Wireless Pro Drum Kit for Play Station 3		
M/N: 97710-C (RB3)		
Test date:2010-07-13	Pressure:100.5 kpa	Humidity:57 %
Tested by:Paul Tian	Test site: RF site	Temperature: 25 °C

Frequency	20% bandwidth (KHz)	Limit (KHz)
2408	1061	N/A
2440	1057	N/A
2476	1060	N/A
Conclusion: PASS		


Test Frequency: 2408MHz

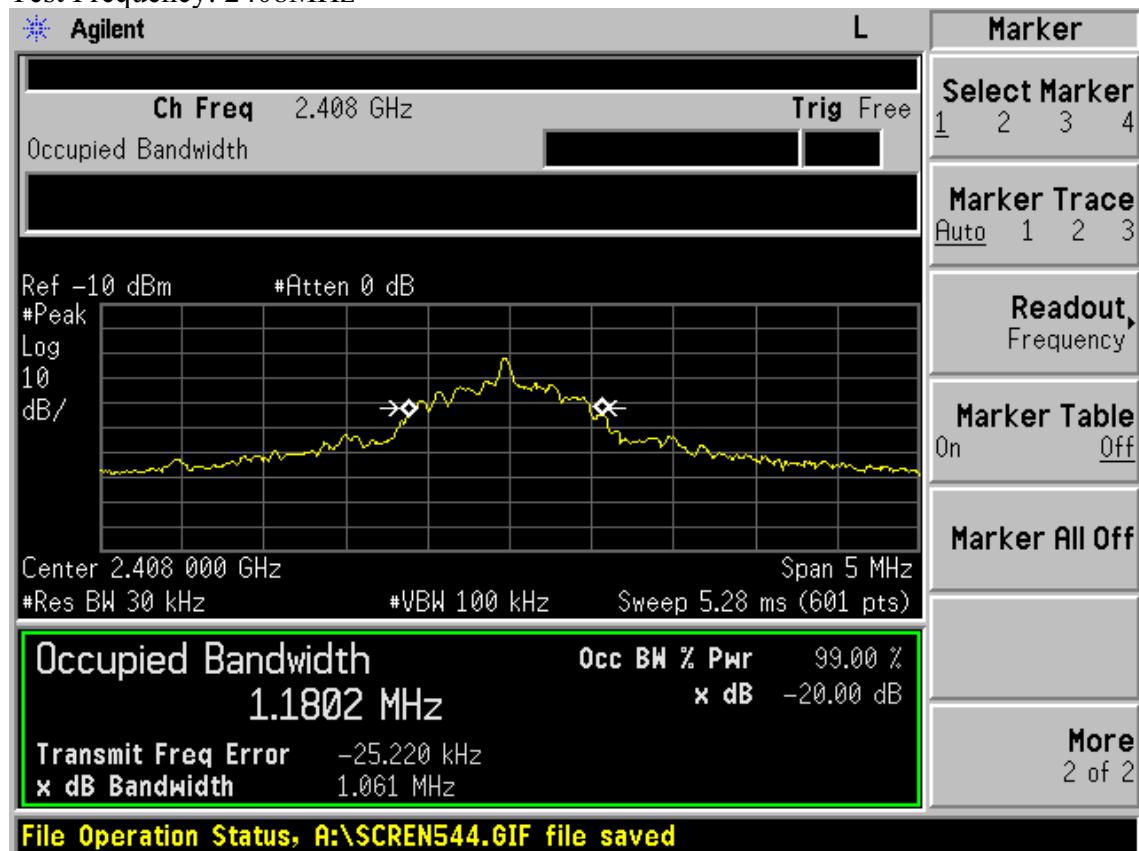

Test Frequency: 2440MHz

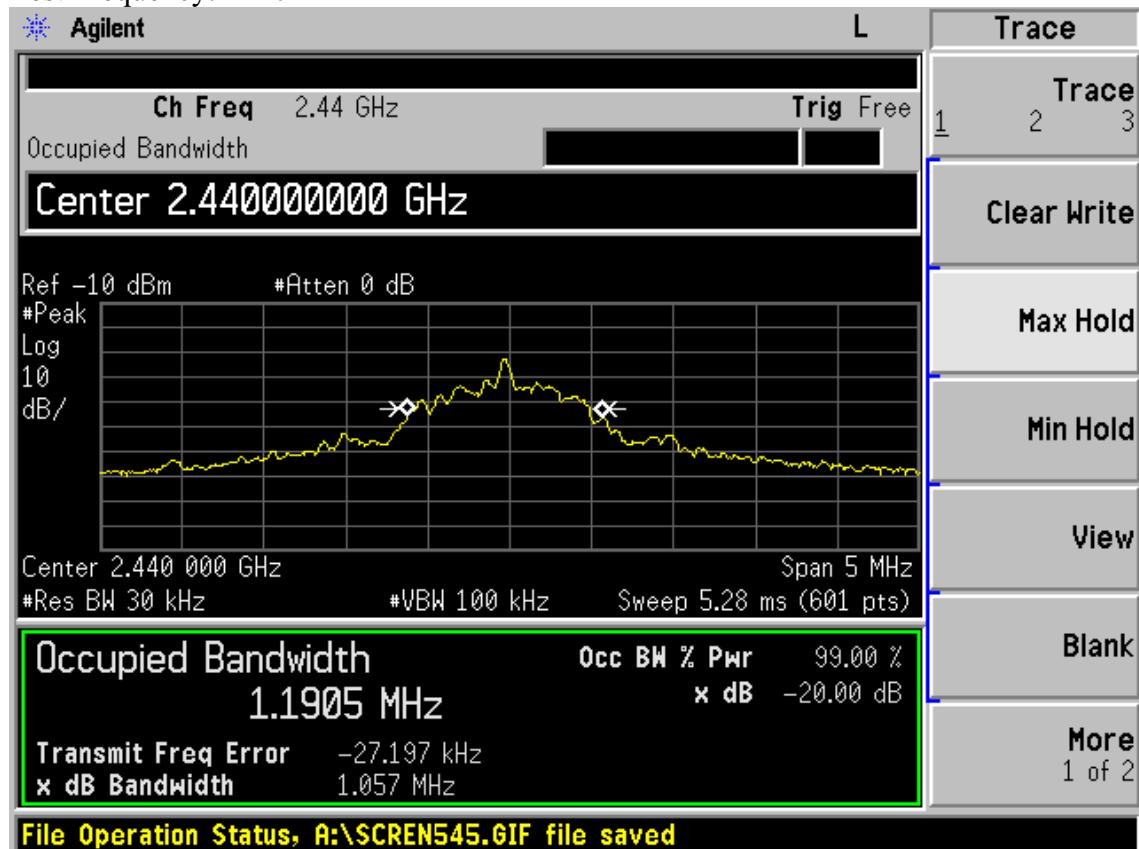

Test Frequency: 2476MHz

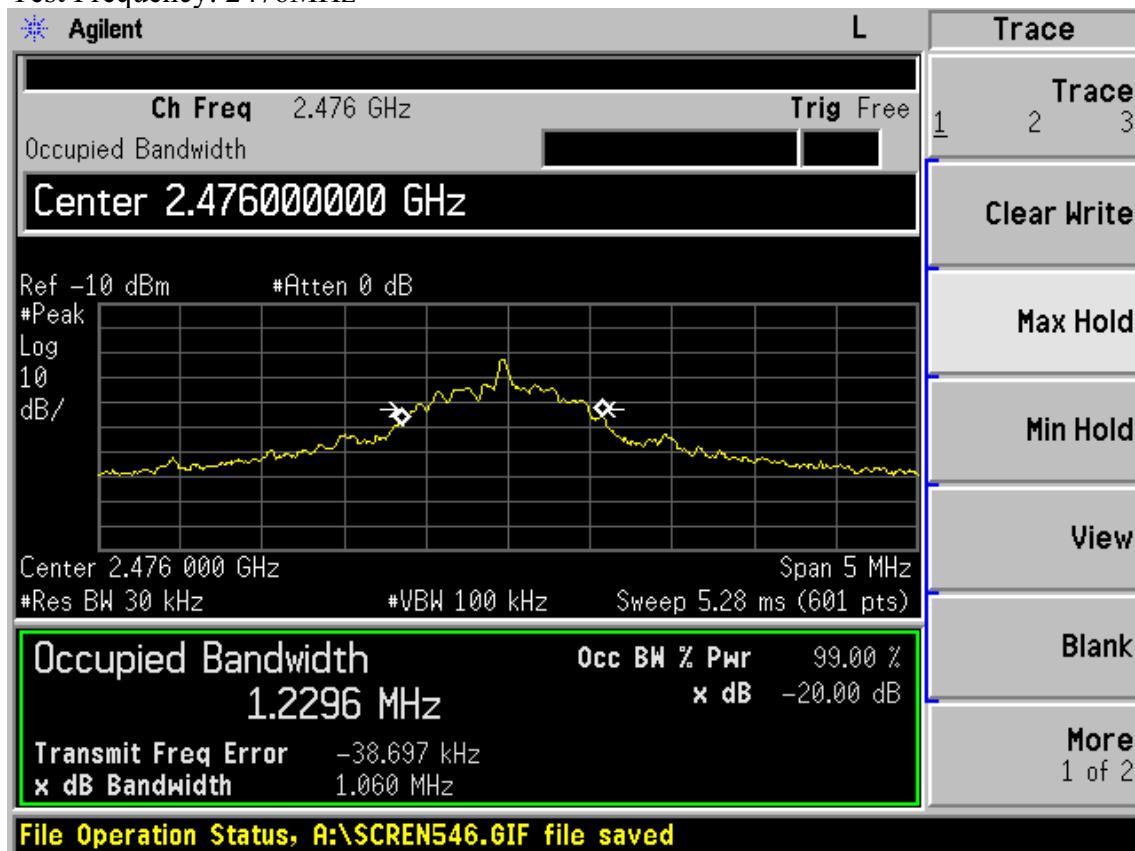

## 7. DEVIATION TO TEST SPECIFICATIONS

[ NONE]