



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless Print Server, Wireless MFP Adapter

Trade Name: SerComm

Model: PS801Hv2

Issued to

SerComm Corporation
8F, No.3-1, YuanQu St., NanKang,
Taipei 115, Taiwan, R.O.C.

Issued by

Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com





TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION.....3**
- 2. EUT DESCRIPTION4**
- 3. TEST METHODOLOGY5**
 - 3.1 EUT CONFIGURATION5
 - 3.2 EUT EXERCISE.....5
 - 3.3 GENERAL TEST PROCEDURES.....5
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6
 - 3.5 DESCRIPTION OF TEST MODES7
- 4. INSTRUMENT CALIBRATION.....8**
 - 4.1 MEASURING INSTRUMENT CALIBRATION.....8
 - 4.2 MEASUREMENT EQUIPMENT USED.....8
- 5. FACILITIES AND ACCREDITATIONS9**
 - 5.1 FACILITIES.....9
 - 5.2 EQUIPMENT.....9
 - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....10
- 6. SETUP OF EQUIPMENT UNDER TEST11**
 - 6.1 SETUP CONFIGURATION OF EUT.....11
 - 6.2 SUPPORT EQUIPMENT.....11
- 7. FCC PART 15.247 REQUIREMENTS.....12**
 - 7.1 6DB BANDWIDTH.....12
 - 7.2 PEAK POWER.....17
 - 7.3 AVERAGE POWER.....21
 - 7.4 BAND EDGES MEASUREMENT.....25
 - 7.5 PEAK POWER SPECTRAL DENSITY.....34
 - 7.6 SPURIOUS EMISSIONS39
 - 7.7 POWERLINE CONDUCTED EMISSIONS.....53
- APPENDIX I RADIO FREQUENCY EXPOSURE56**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP58**



1. TEST RESULT CERTIFICATION

Applicant: SerComm Corporation
8F, No.3-1, YuanQu St., NanKang,
Taipei 115, Taiwan, R.O.C.

Equipment Under Test: Wireless Print Server, Wireless MFP Adapter

Trade Name: SerComm

Model: PS801Hv2

Date of Test: June 1 ~ 15, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted
Deviation from Applicable Standard	
The Powerline Conducted Emissions was tested at Compliance Certification Services. (Hsintien Lab.) The test equipments were listed in page 8 and the test data were recorded in page 54~55.	

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Johnny Liu
Section Manager
Compliance Certification Services Inc.

Amanda Wu
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wireless Print Server, Wireless MFP Adapter
Trade Name	SerComm
Model Number	PS801Hv2
Model Discrepancy	N/A
Power Supply	Power Adapter LINKSYS Model: MT10-1050200-A1 I/P: 100-120V, 50-60Hz, 0.5A O/P: DC 5.0V, 2.0A
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b: 16.55 dBm IEEE 802.11g: 14.76 dBm
Modulation Technique	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps
Number of Channels	11 Channels
Antenna Specification	Gain: 3.3 dBi (without cable loss 0.6dB)
Antenna Designation	Dipole Antenna

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **P270WT01** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: PS801Hv2) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

The worst case data rate is determined as the data rate with highest output power.

IEEE802.11b mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 6Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/30/2008

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	08/02/2007
Test Receiver	Rohde&Schwarz	ESCI	100064	11/13/2007
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2008
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2008
Horn-Antenna	TRC	HA-0502	06	06/06/2008
Horn-Antenna	TRC	HA-0801	04	05/05/2008
Horn-Antenna	TRC	HA-1201A	01	07/10/2008
Horn-Antenna	TRC	HA-1301A	01	07/18/2008
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/09/2008
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/25/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/-2.0065 dB (30MHz ~ 1GHz), +/-3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESHS10	843743/015	03/28/2008
LISN (EUT)	EMCO	3825/2	9106-1810	01/03/2008
LISN	EMCO	3825/2	1382	01/03/2008
BNC CABLE	MIYAZAKI	5D-FB	BNC B1	07/13/2008
Pulse Limiter	R&S	ESH3-Z2	100374	08/24/2007
THERMO-HYGRO METER	TOP	HA-202	9303-3	02/04/2008
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	04/01/2008
Test S/W	EMI 32.exe			

Remark: The measurement uncertainty is less than +/- 3.4510 dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT








Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 2324C-3, IC 2324C-5) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	 IC 2324C-3 IC 2324C-5 IC 6106

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Monitor	SAMSUNG	710V	GS17H9NXA05853A	FCC DOC BSMI: R33475	Shielded, 1.8m with two cores	Unshielded, 1.8m
2.	Host PC	HP	xw4400	N/A	FCC DOC BSMI: R33001	Unshielded, 1.2m	Unshielded, 1.8m
3.	Notebook PC	Dell	PP05L	7T390 A03	E2K5HCKT	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
4.	Modem	TOP- SOLUTION	5JEG4033MKO	L0063CG2D007181	5RJTAI-35500-M5-E	Shielded, 1.8m	Unshielded, 1.8m
5.	Printer	HP	HP1015	N/A	FCC DOC	Shielded, 1.2m	Unshielded, 1.8m
6.	Printer	EPSON	C60	N/A	BSMI ID: 3902E006	Shielded, 1.8m	Unshielded, 1.8m
7.	PS/2 Keyboard	DELL	SK-8110	N/A	FCC DOC BSMI: T3A002	Shielded, 1.8m	N/A
8.	PS/2 Mouse	DELL	M071KC	443029525	FCC DOC BSMI: R41108	Shielded, 1.8m	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration

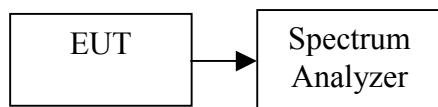

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	10080	>500	PASS
Mid	2437	11330		PASS
High	2462	10170		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16500	>500	PASS
Mid	2437	16580		PASS
High	2462	16580		PASS



Test Plot


IEEE 802.11b

6dB Bandwidth (CH Low)

Agilent 11:56:52 Jun 12, 2007

R T

Δ Mkr1 10.08 MHz
-0.91 dB

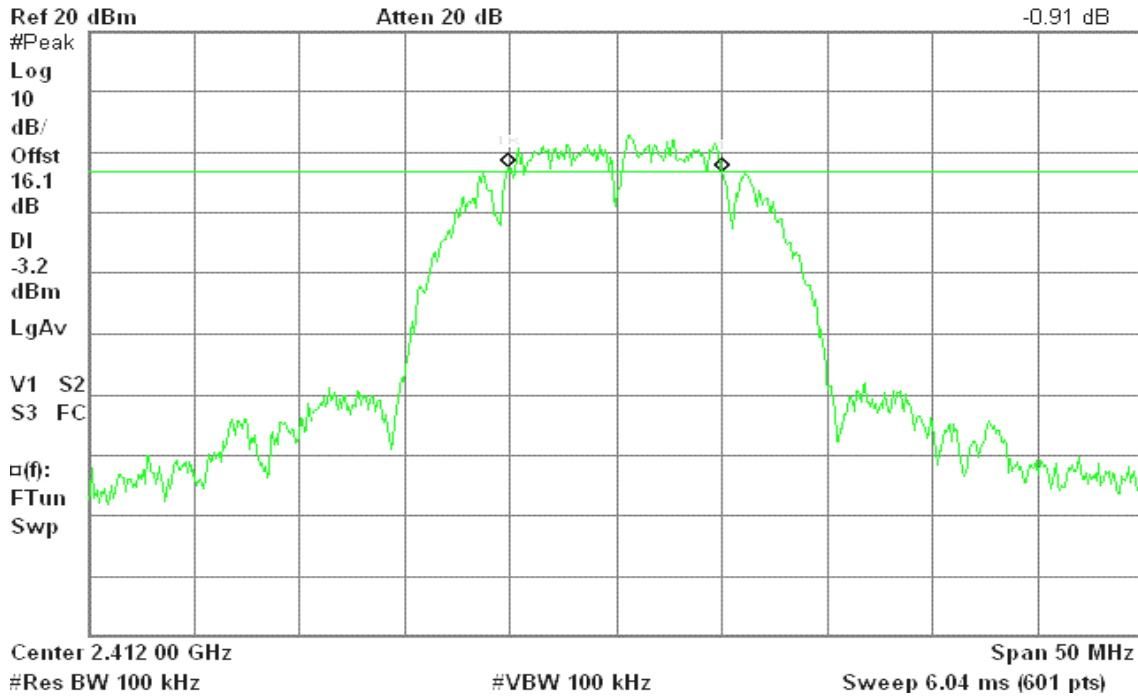


6dB Bandwidth (CH Mid)

Agilent 11:50:20 Jun 12, 2007

R T

Δ Mkr1 11.33 MHz
-0.55 dB

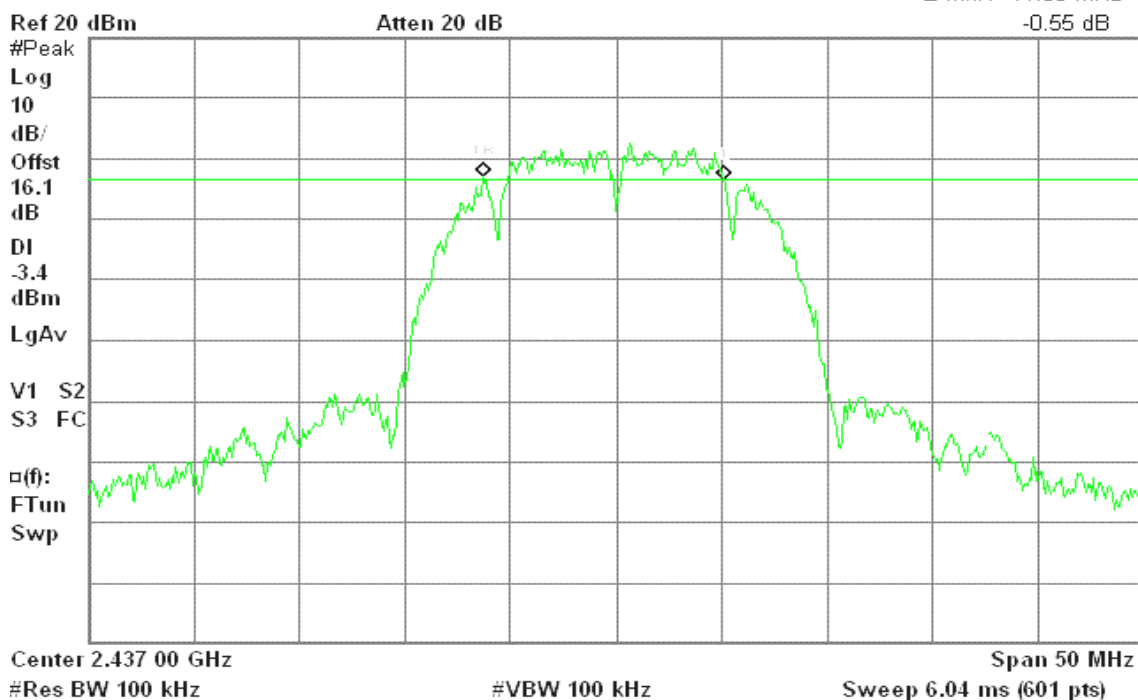




6dB Bandwidth (CH High)

Agilent 11:41:07 Jun 12, 2007

R T

Δ Mkr1 10.17 MHz
0.53 dB

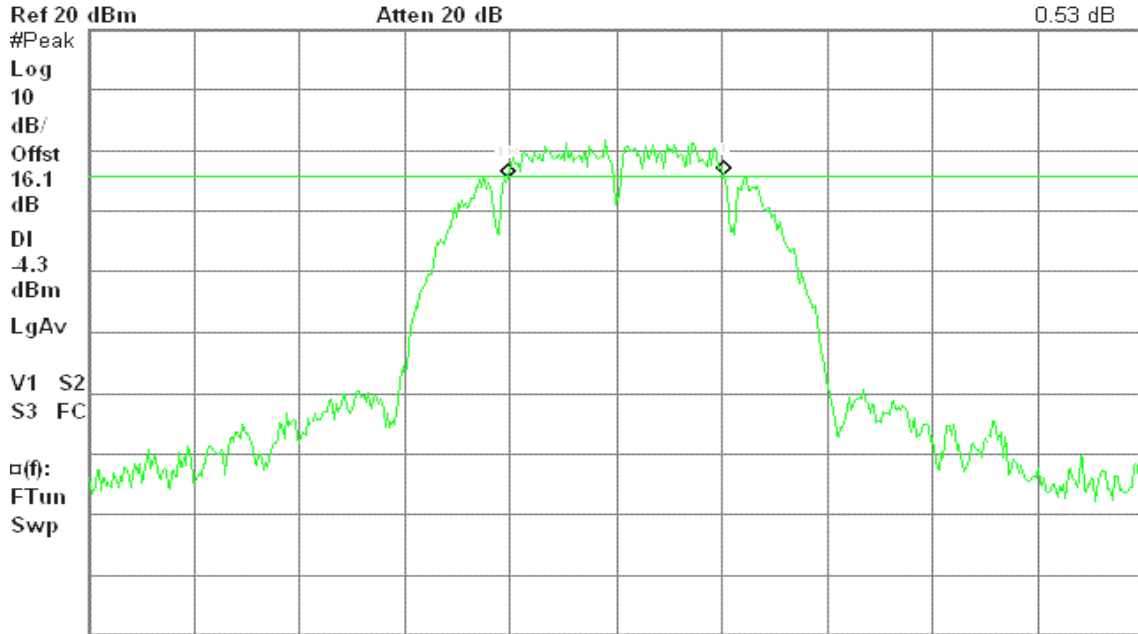

Center 2.462 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)


IEEE 802.11g

6dB Bandwidth (CH Low)

Agilent 13:07:26 Jun 12, 2007

R T

Δ Mkr1 16.50 MHz
0.38 dB

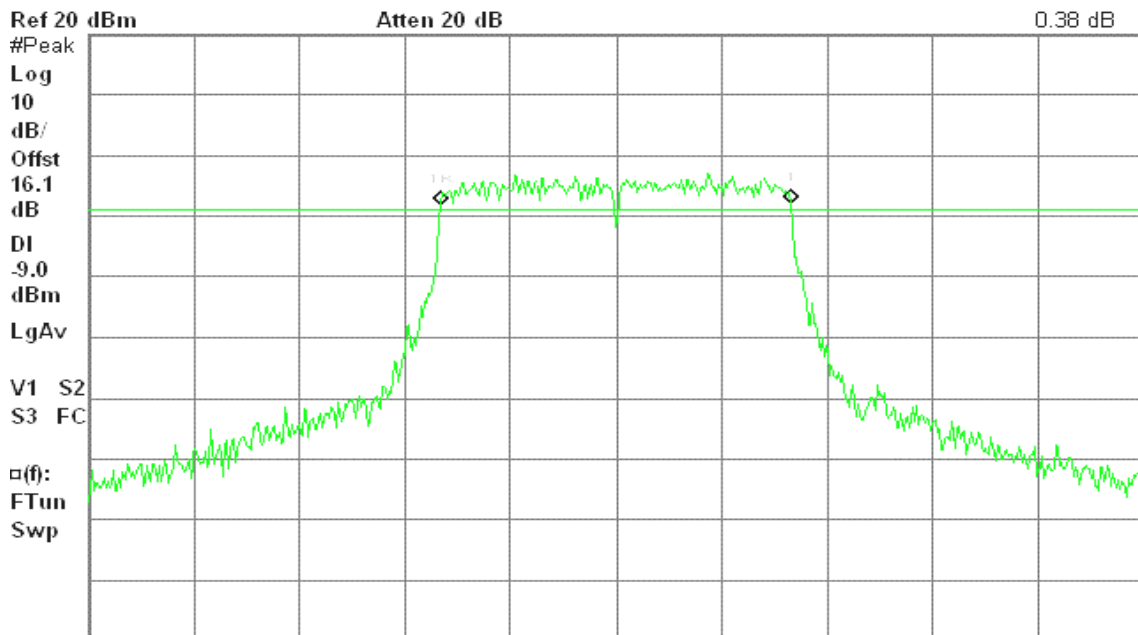

Center 2.412 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)




6dB Bandwidth (CH Mid)

Agilent 13:15:37 Jun 12, 2007

R T

Δ Mkr1 16.58 MHz
1.61 dB

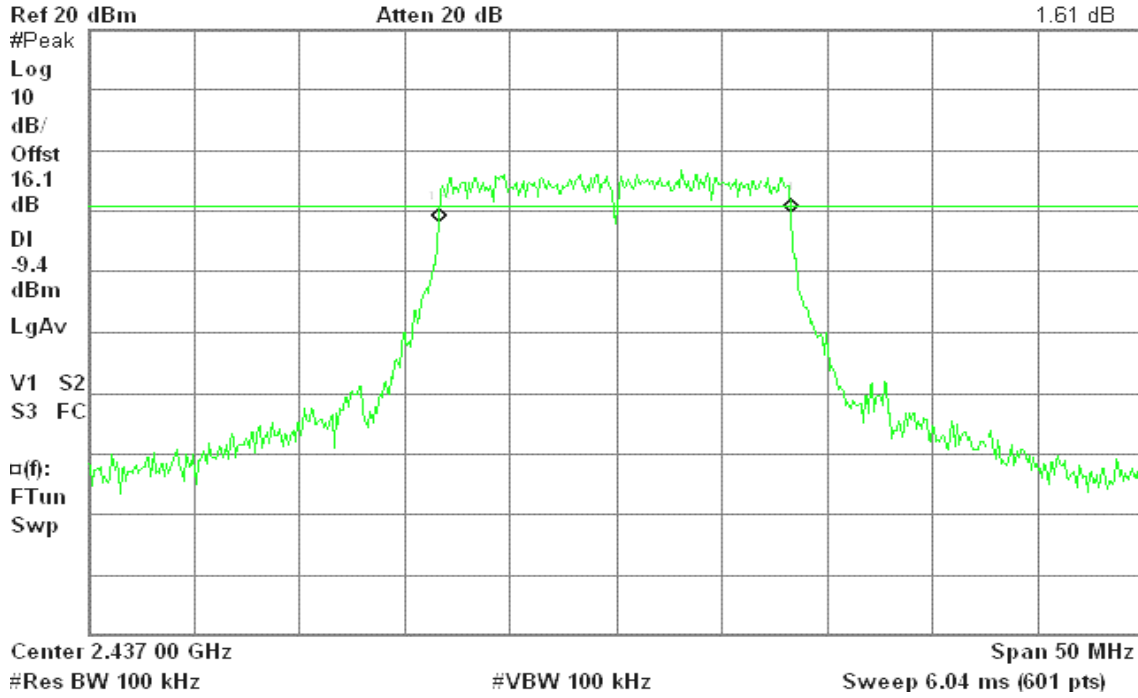


6dB Bandwidth (CH High)

Agilent 13:28:08 Jun 12, 2007

R T

Δ Mkr1 16.58 MHz
1.08 dB

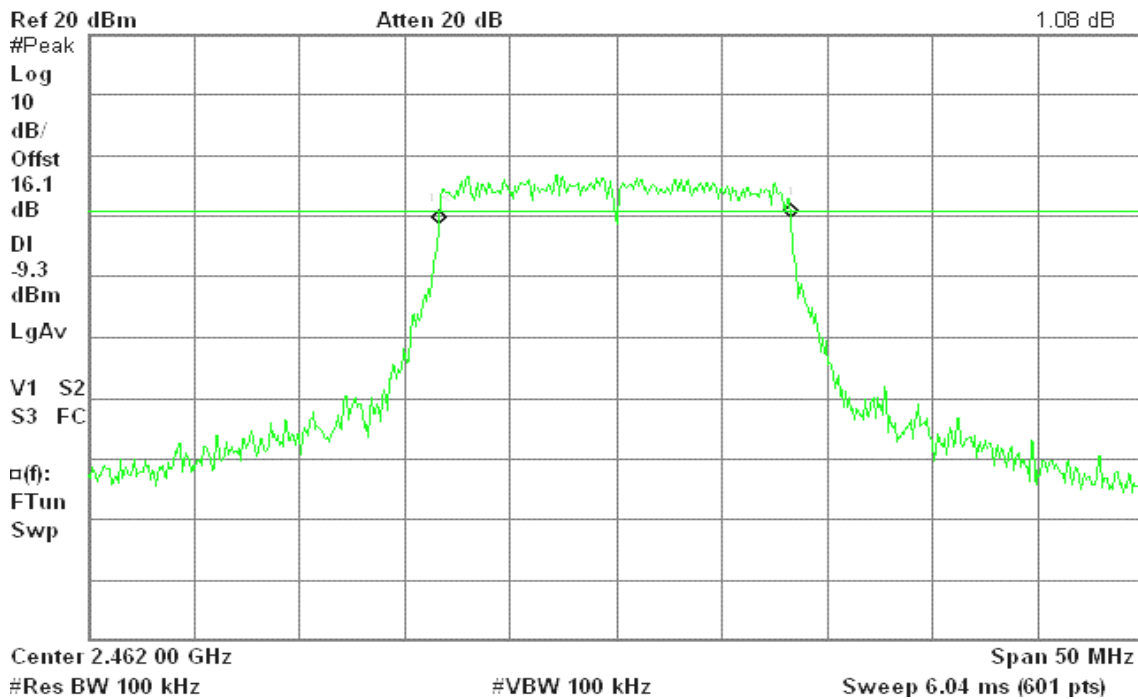




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

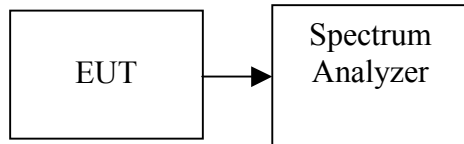

TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.55	0.04519	1.00	PASS
Mid	2437	16.36	0.04325		PASS
High	2462	16.04	0.04018		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	14.76	0.02992	1.00	PASS
Mid	2437	14.68	0.02938		PASS
High	2462	14.68	0.02938		PASS




Test Plot

IEEE 802.11b

Peak Power (CH Low)

Agilent 11:57:59 Jun 12, 2007

R T

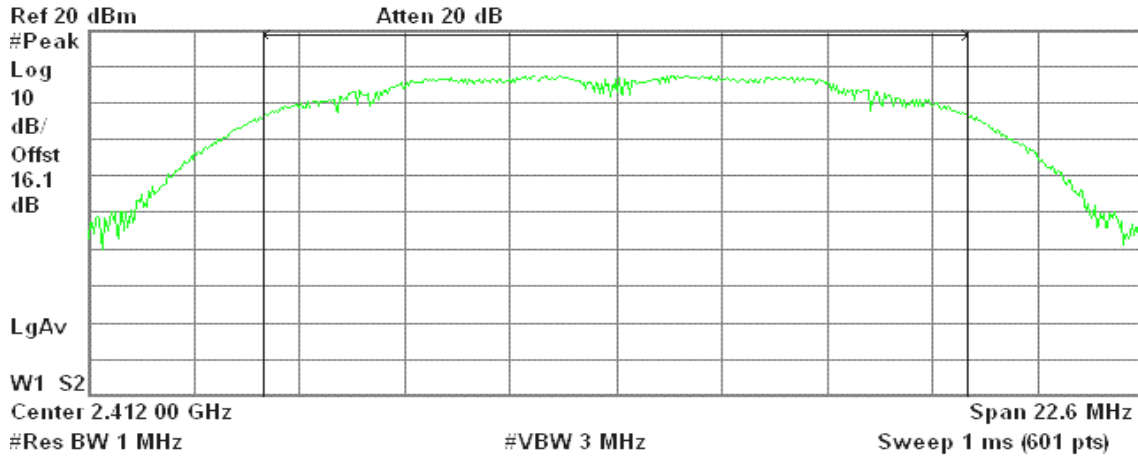

Channel Power

16.55 dBm / 15.0640 MHz


Power Spectral Density

-55.23 dBm/Hz

Peak Power (CH Mid)

Agilent 11:51:06 Jun 12, 2007

R T

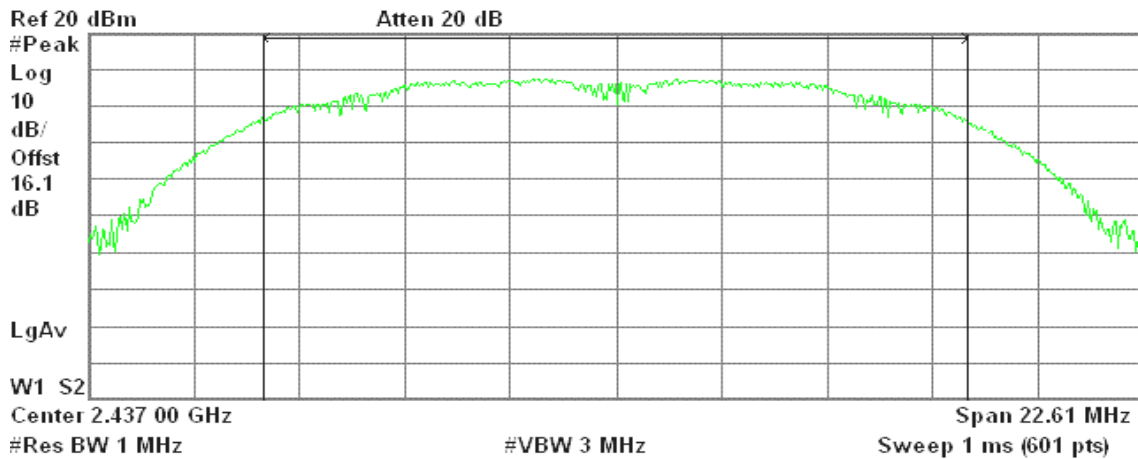

Channel Power

16.36 dBm / 15.0730 MHz

Power Spectral Density


-55.42 dBm/Hz



Peak Power (CH High)

Agilent 11:41:55 Jun 12, 2007

R T

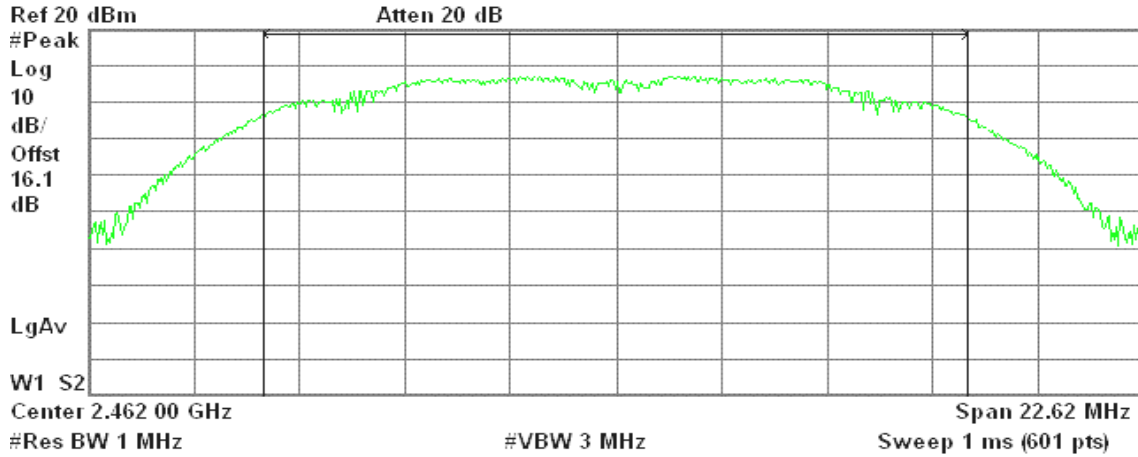

Channel Power

16.04 dBm / 15.0830 MHz

Power Spectral Density

-55.75 dBm/Hz


IEEE 802.11g

Peak Power (CH Low)

Agilent 13:08:12 Jun 12, 2007

R T

Peak Output Power (DTS), g Mode Low Ch.

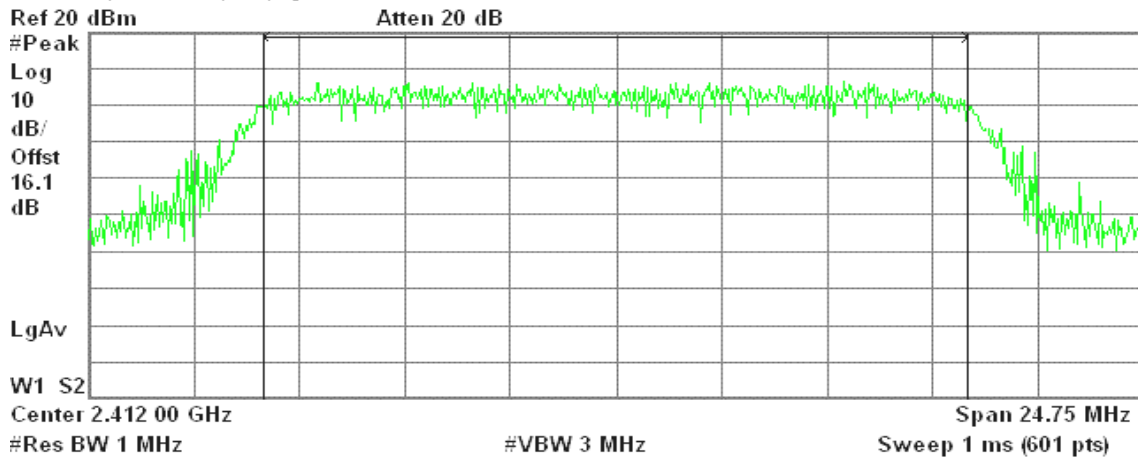

Channel Power

14.76 dBm / 16.5020 MHz

Power Spectral Density

-57.42 dBm/Hz



Peak Power (CH Mid)


Agilent 13:16:24 Jun 12, 2007

R T

Peak Output Power (DTS), g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

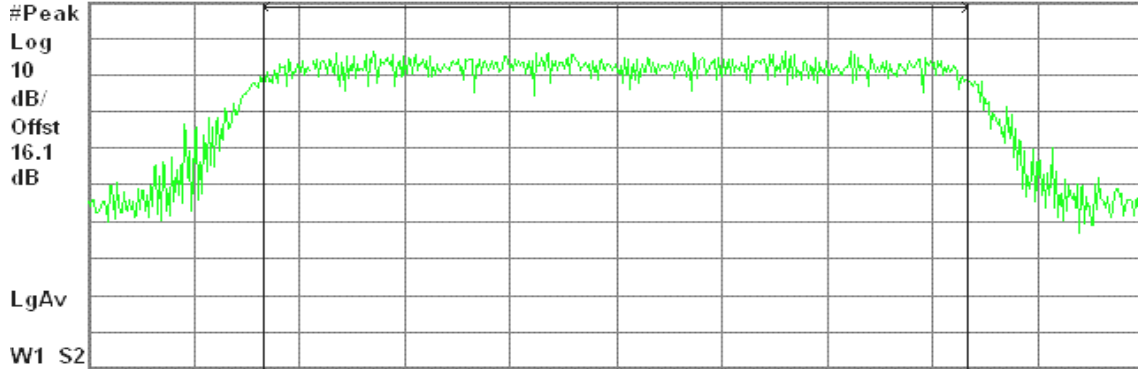

Center 2.437 00 GHz

Span 24.76 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

14.68 dBm / 16.5050 MHz

-57.50 dBm/Hz


Peak Power (CH High)

Agilent 13:29:27 Jun 12, 2007

R T

Ref 20 dBm

Atten 20 dB

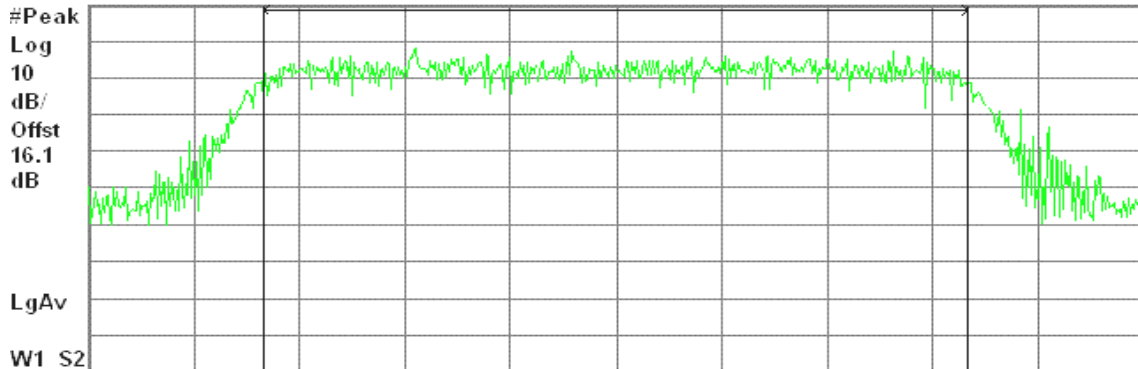

Center 2.462 00 GHz

Span 24.76 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

14.68 dBm / 16.5090 MHz

-57.49 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration

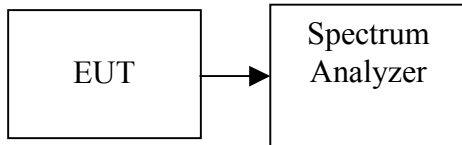

TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)
Low	2412	13.96
Mid	2437	13.60
High	2462	13.32

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)
Low	2412	11.11
Mid	2437	11.07
High	2462	10.79




Test Plot

IEEE 802.11b

CH Low

Agilent 11:58:28 Jun 12, 2007

R T

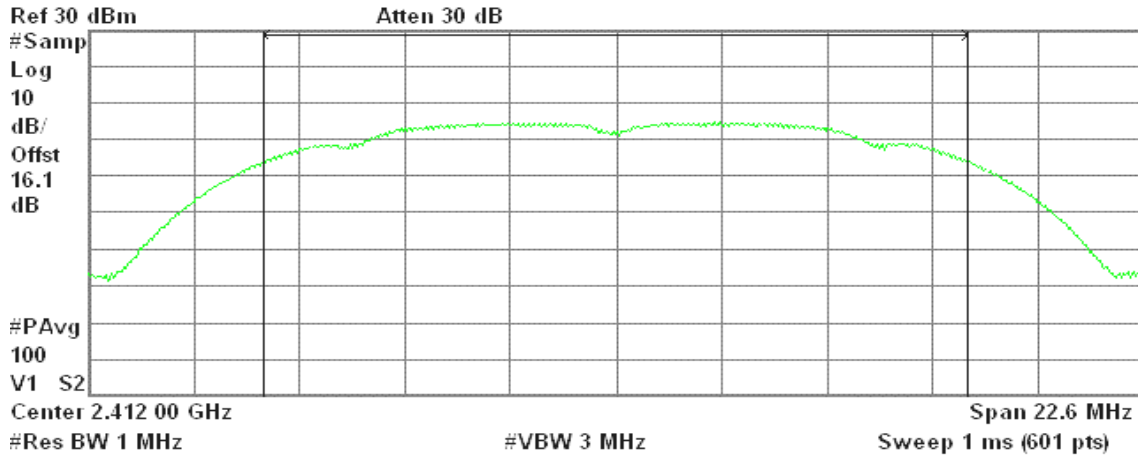

Channel Power

13.96 dBm / 15.0640 MHz


Power Spectral Density

-57.82 dBm/Hz

CH Mid

Agilent 11:51:36 Jun 12, 2007

R T

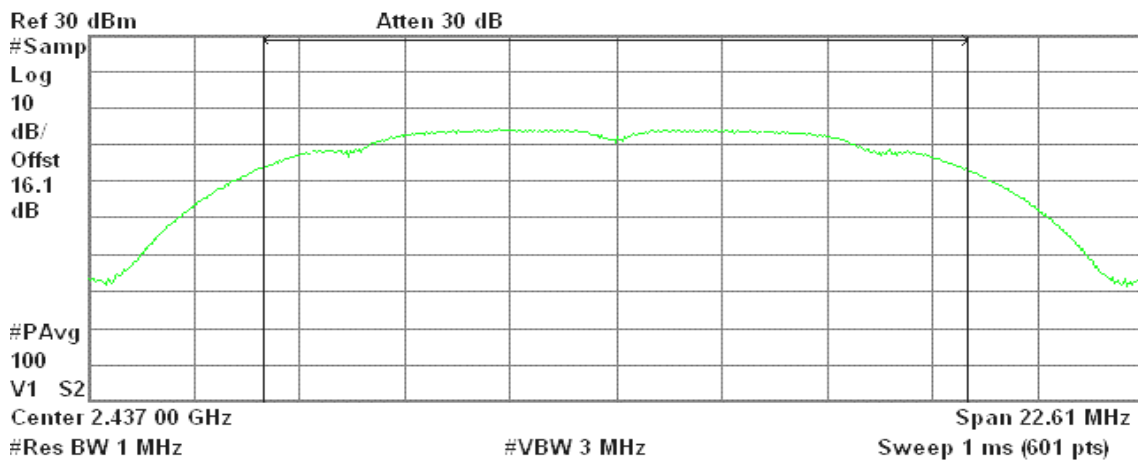

Channel Power

13.60 dBm / 15.0730 MHz

Power Spectral Density


-58.19 dBm/Hz



CH High

Agilent 11:42:25 Jun 12, 2007

R T

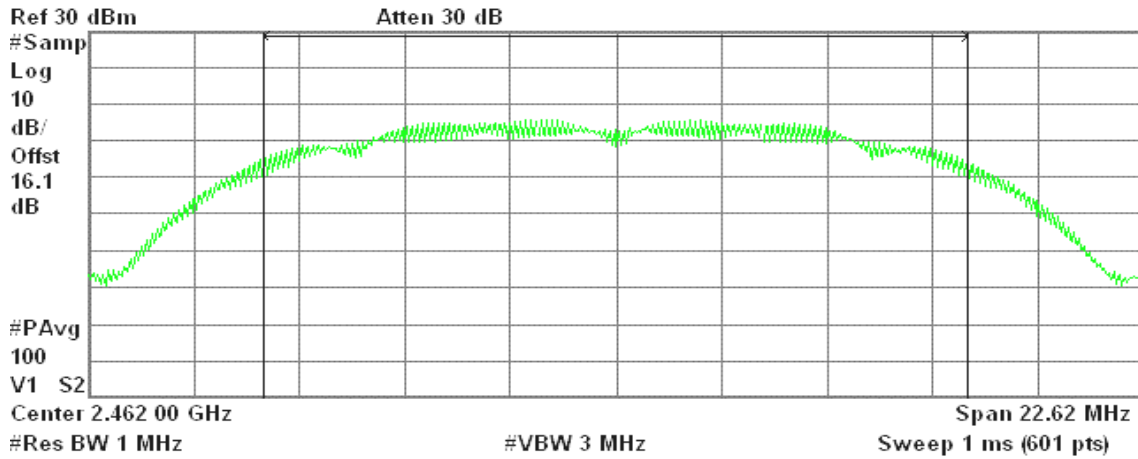

Channel Power

13.32 dBm / 15.0830 MHz

Power Spectral Density


-58.47 dBm/Hz

IEEE 802.11g

CH Low

Agilent 13:08:46 Jun 12, 2007

R T

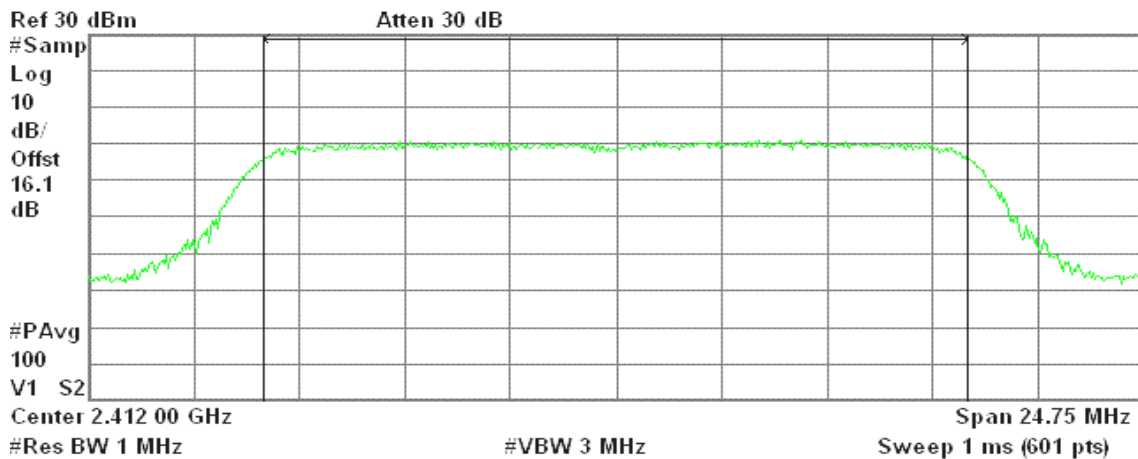

Channel Power

11.11 dBm / 16.5020 MHz

Power Spectral Density


-61.06 dBm/Hz



CH Mid

Agilent 13:16:53 Jun 12, 2007

R T

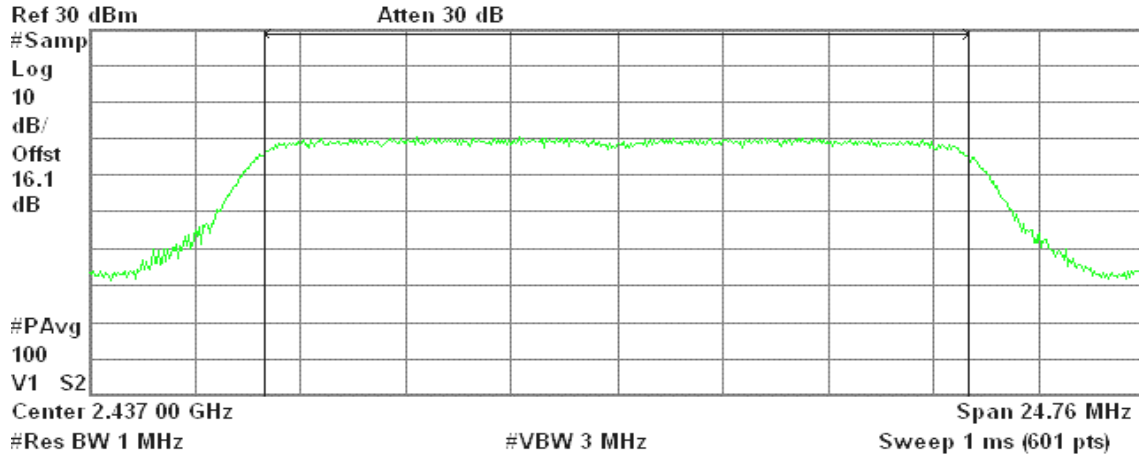

Channel Power

11.07 dBm / 16.5050 MHz


Power Spectral Density

-61.11 dBm/Hz

CH High

Agilent 13:30:01 Jun 12, 2007

R T

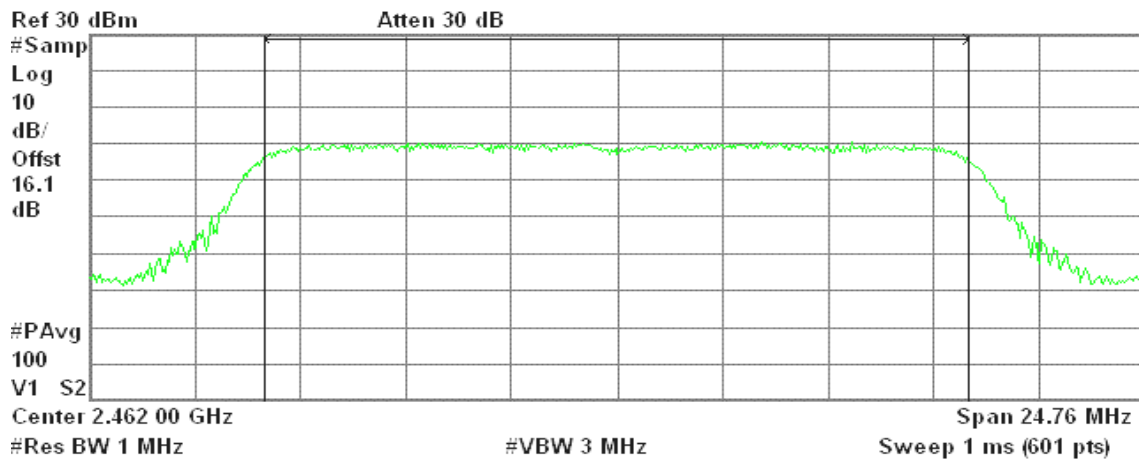

Channel Power

10.79 dBm / 16.5090 MHz

Power Spectral Density


-61.39 dBm/Hz

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

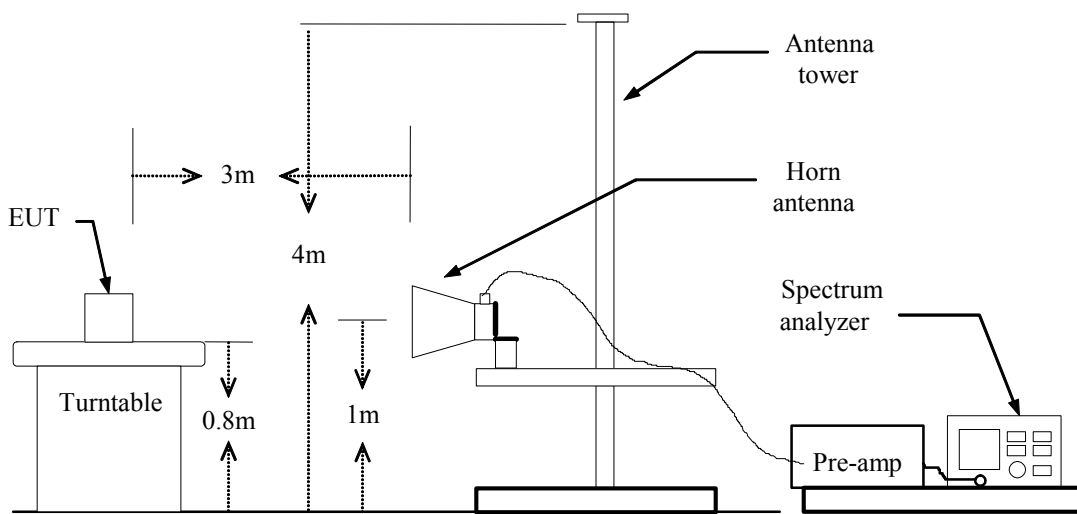

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Band Edges (IEEE 802.11b / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 16:32:14 Jun 13, 2007

R T

Mkr1 2.390 0 GHz
59.87 dBμV

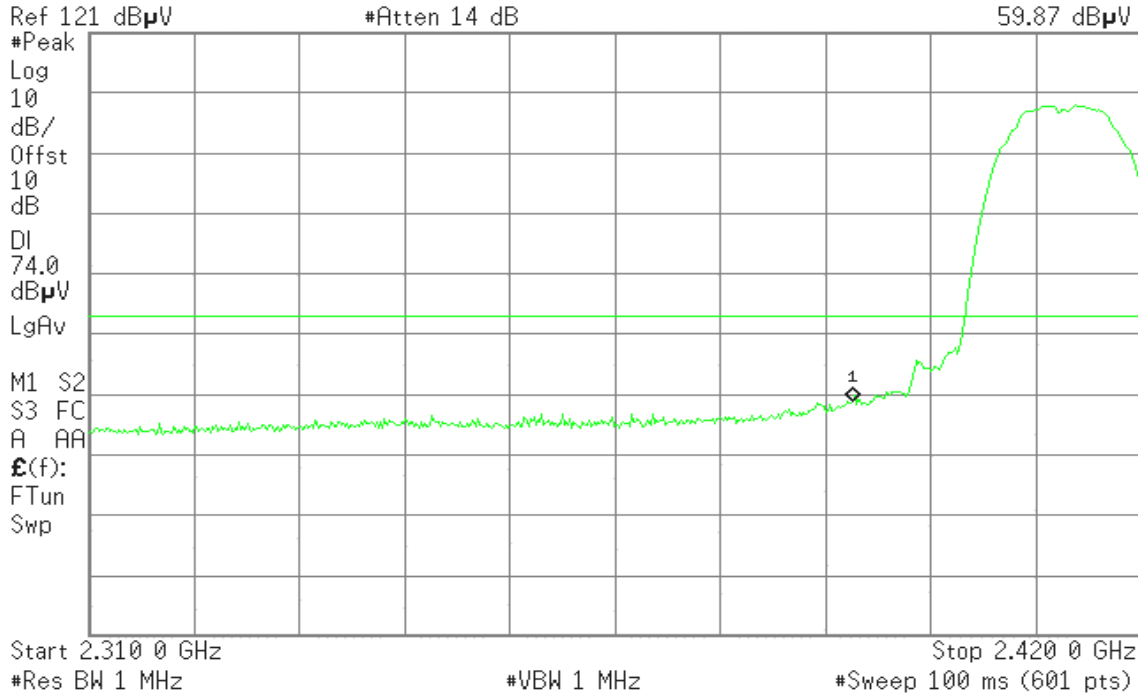


Detector mode: Average

Polarity: Vertical

Agilent 16:33:28 Jun 13, 2007

R T

Mkr1 2.390 0 GHz
48.75 dBμV

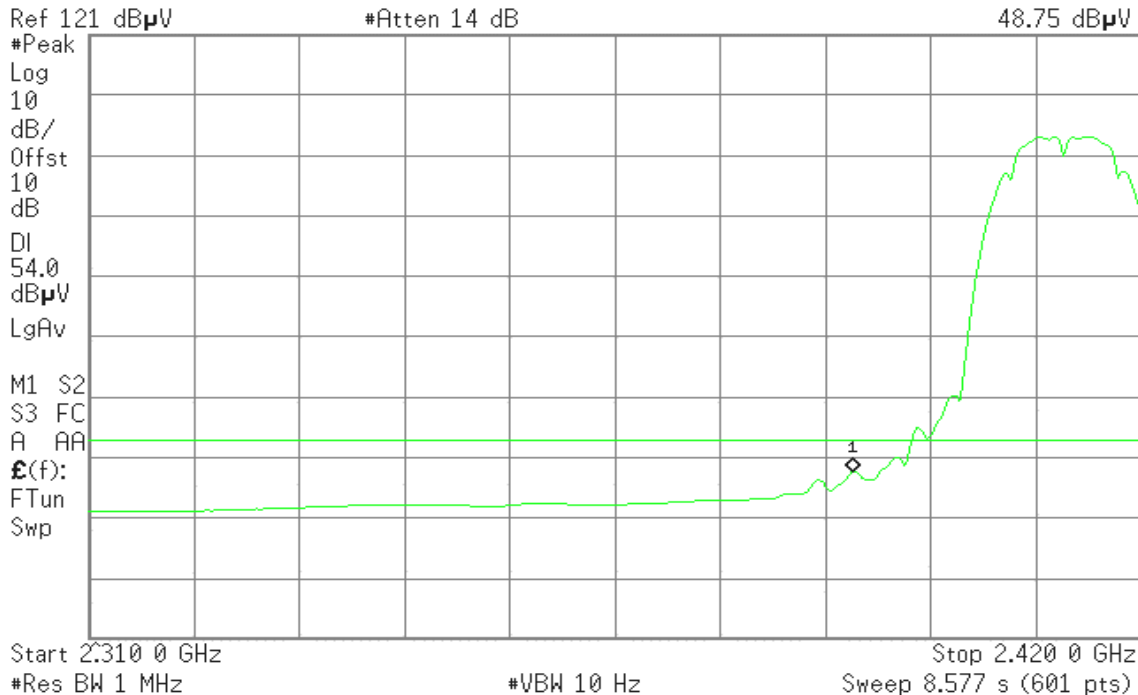




Detector mode: Peak

Polarity: Horizontal

Agilent 16:38:29 Jun 13, 2007

R T

Mkr1 2.390 0 GHz
57.23 dBμV

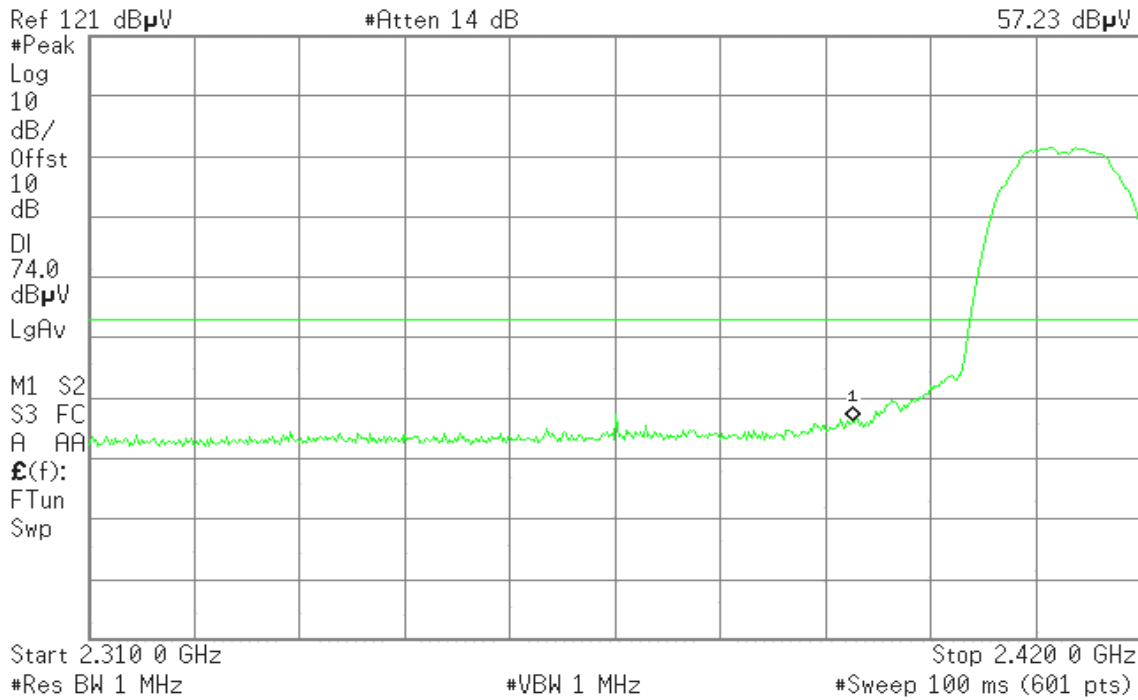


Detector mode: Average

Polarity: Horizontal

Agilent 16:39:01 Jun 13, 2007

R T

Mkr1 2.390 0 GHz
45.93 dBμV

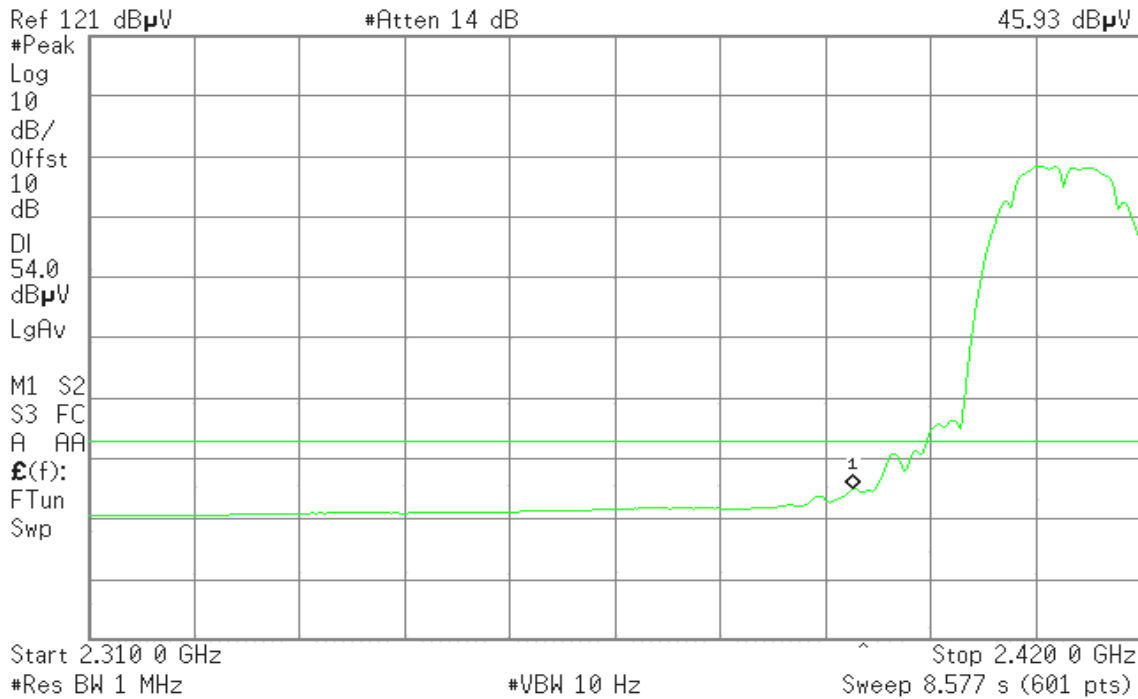



Band Edges (IEEE 802.11b / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 16:50:48 Jun 13, 2007

R T

Mkr1 2.483 50 GHz
57.98 dBμV

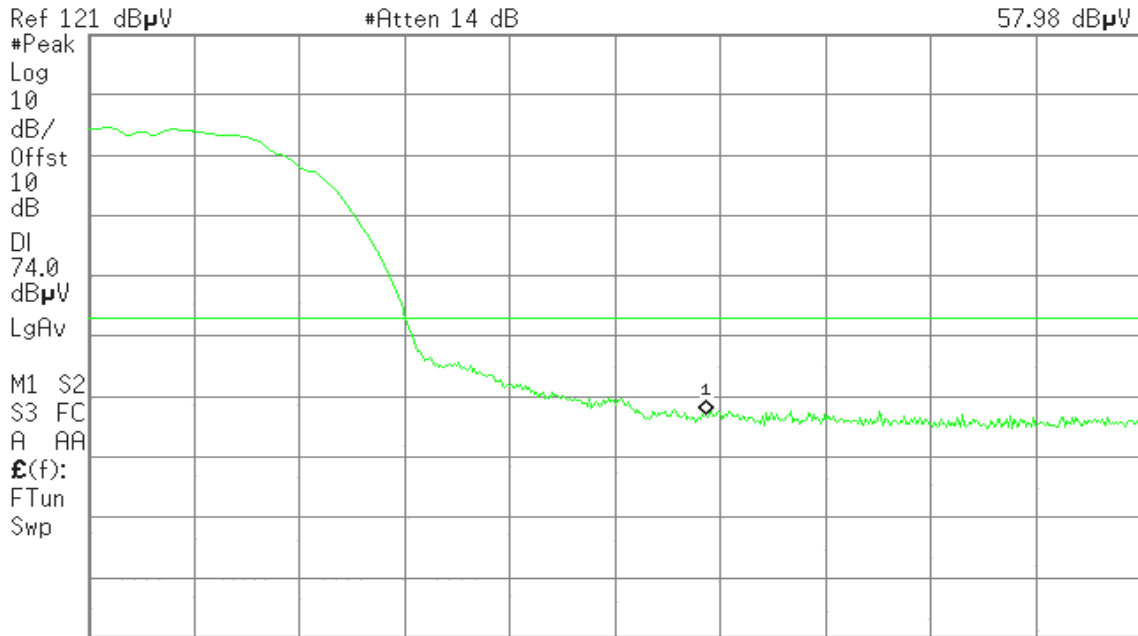


Detector mode: Average

Polarity: Vertical

Agilent 16:51:26 Jun 13, 2007

R T

Mkr1 2.483 50 GHz
45.96 dBμV

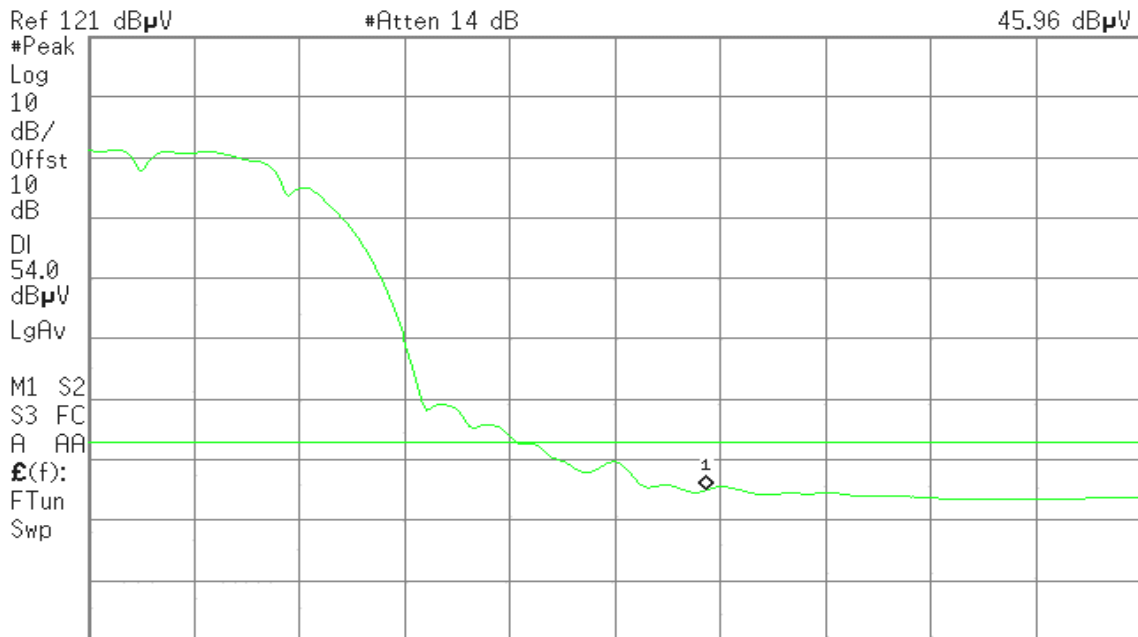




Detector mode: Peak

Polarity: Horizontal

Agilent 16:46:34 Jun 13, 2007

R T

Mkr1 2.483 50 GHz
55.89 dBμV

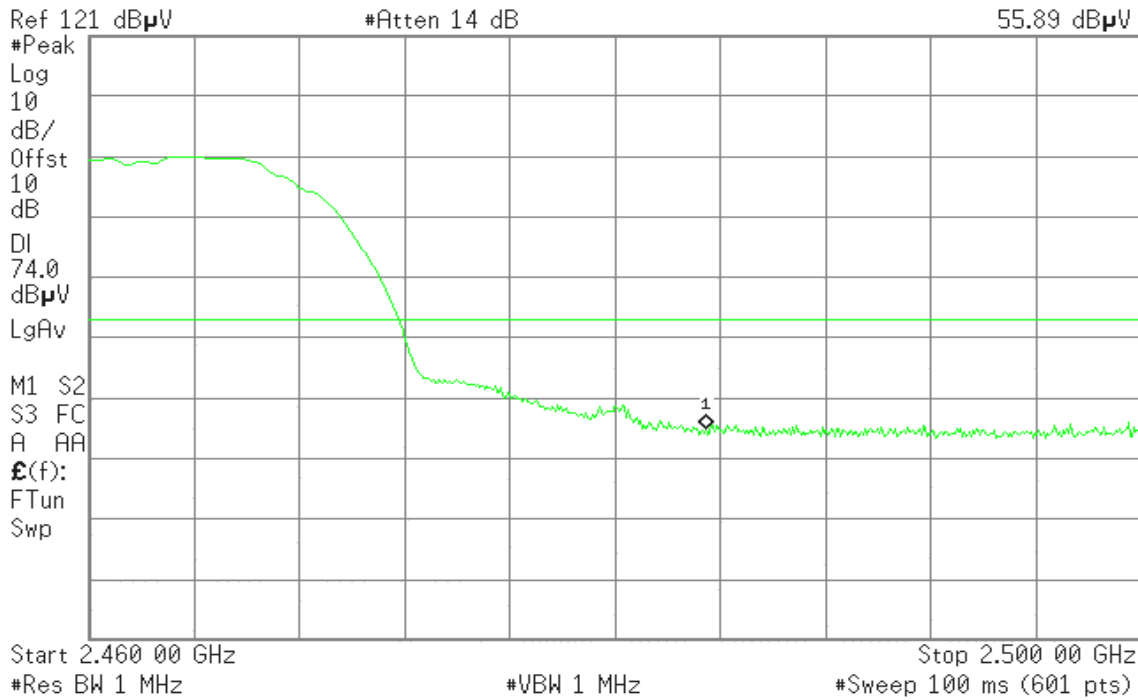


Detector mode: Average

Polarity: Horizontal

Agilent 16:47:06 Jun 13, 2007

R T

Mkr1 2.483 50 GHz
43.86 dBμV

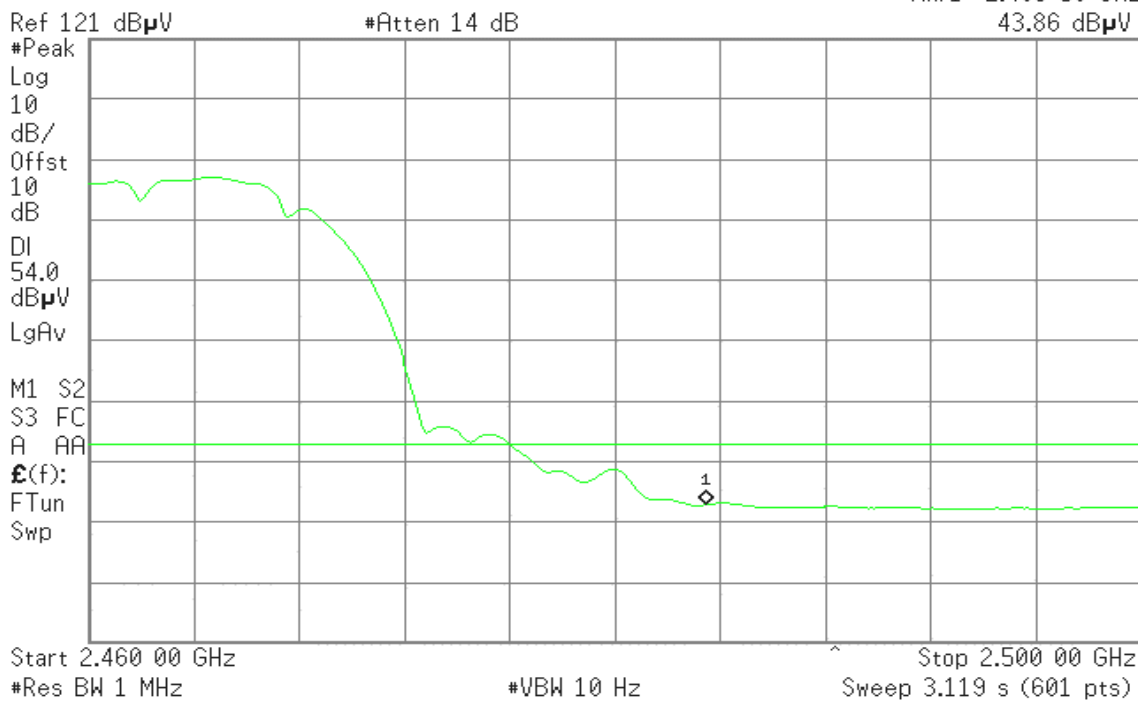



Band Edges (IEEE 802.11g / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 17:14:32 Jun 13, 2007

R T

Mkr1 2.390 0 GHz
61.48 dBμV

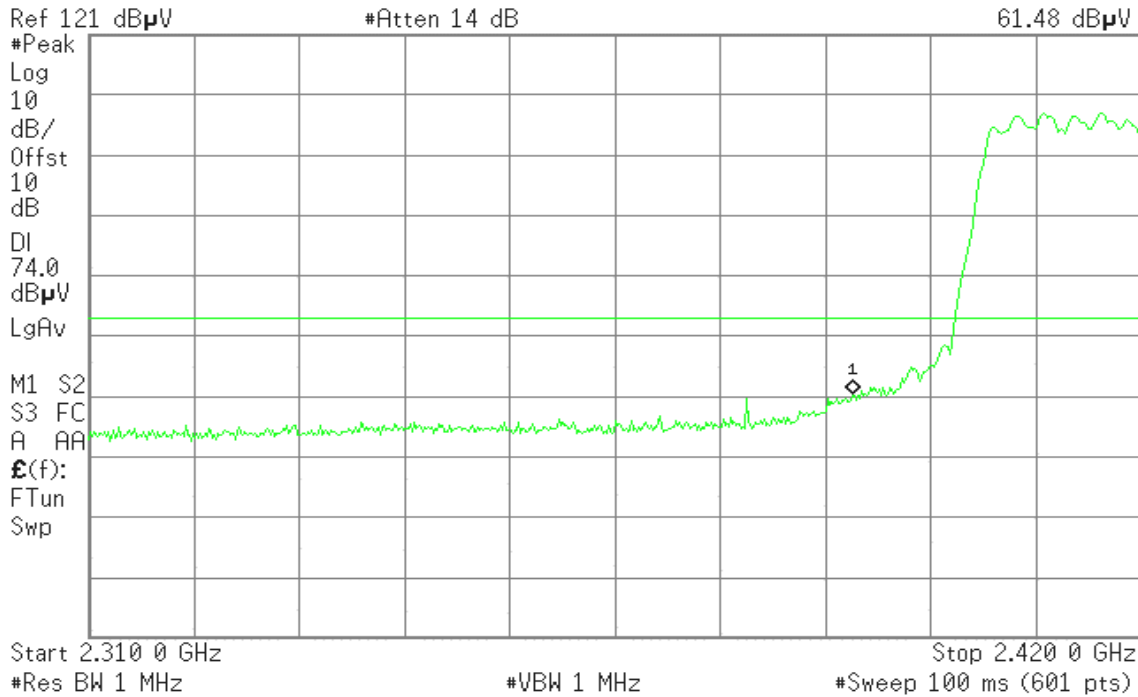


Detector mode: Average

Polarity: Vertical

Agilent 17:15:05 Jun 13, 2007

R T

Mkr1 2.390 0 GHz
46.72 dBμV

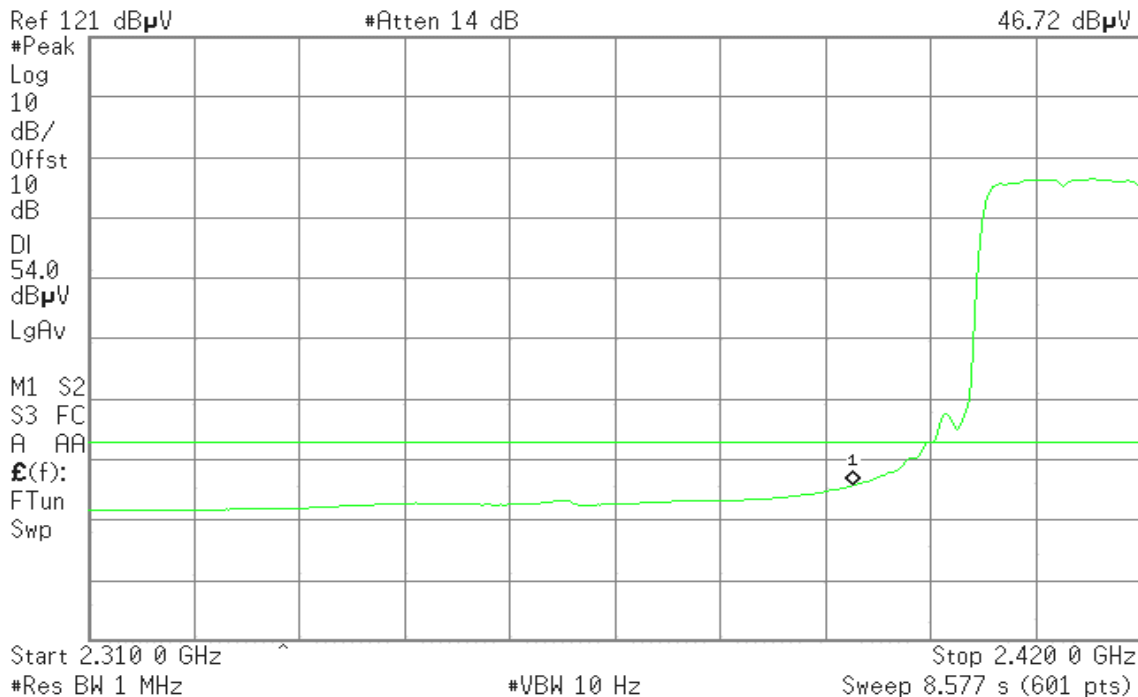




Detector mode: Peak

Polarity: Horizontal

Agilent 17:09:50 Jun 13, 2007

R T

Mkr1 2.390 0 GHz
56.77 dBµV

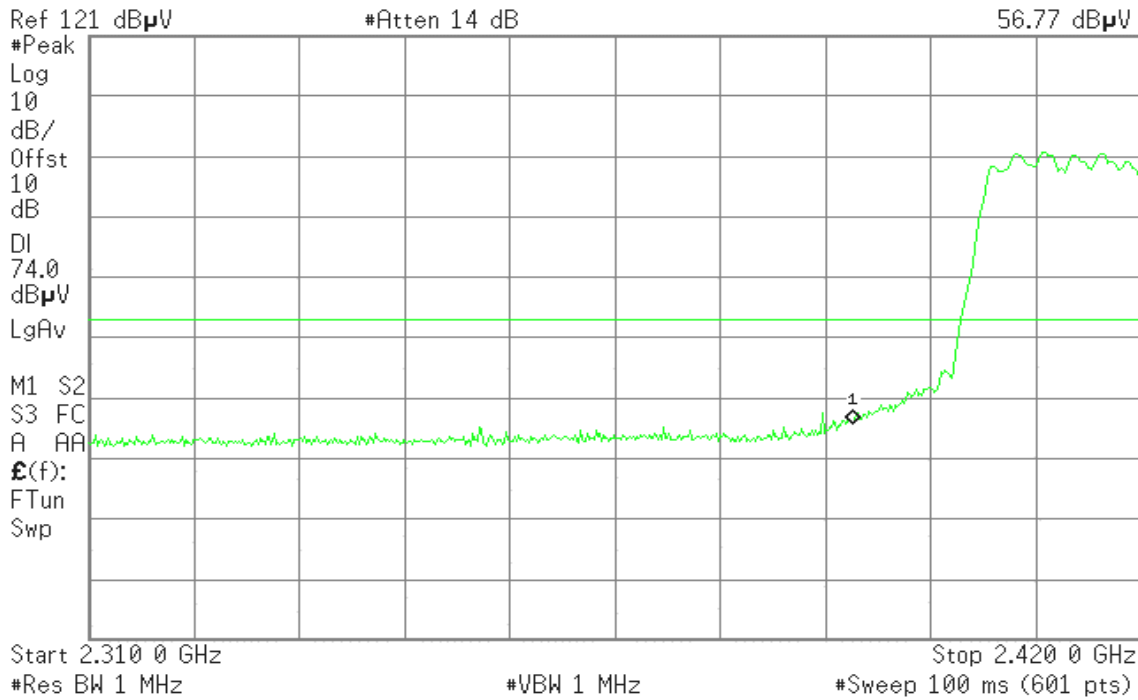


Detector mode: Average

Polarity: Horizontal

Agilent 17:10:39 Jun 13, 2007

R T

Mkr1 2.390 0 GHz
44.09 dBµV

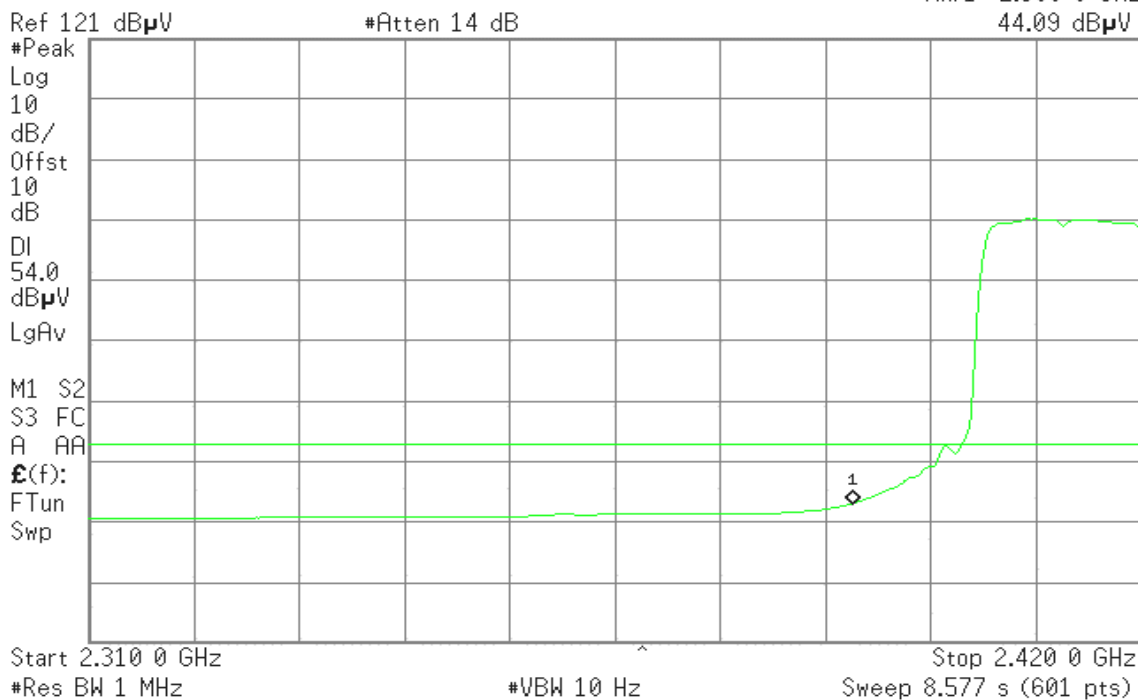



Band Edges (IEEE 802.11g / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 16:56:56 Jun 13, 2007

R T

Mkr1 2.483 50 GHz
58.24 dBμV

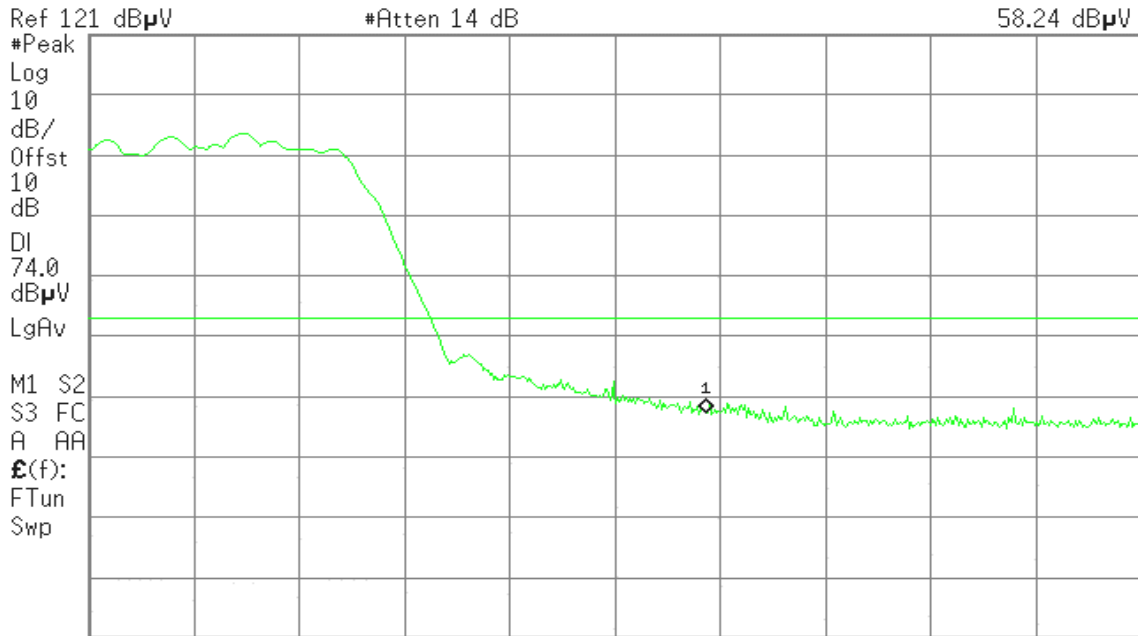

Start 2.460 00 GHz #Res BW 1 MHz #VBW 1 MHz Stop 2.500 00 GHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 16:57:28 Jun 13, 2007

R T

Mkr1 2.483 50 GHz
45.91 dBμV

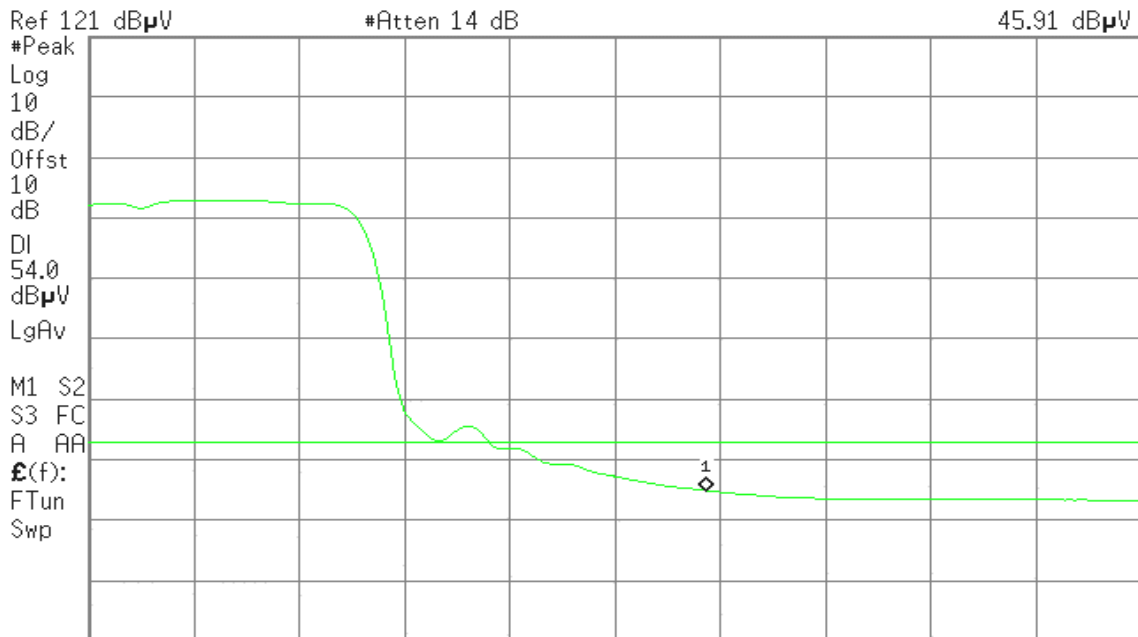

Start 2.460 00 GHz #Res BW 1 MHz #VBW 10 Hz Stop 2.500 00 GHz Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 17:02:51 Jun 13, 2007

R T

Mkr1 2.483 50 GHz
55.05 dBμV

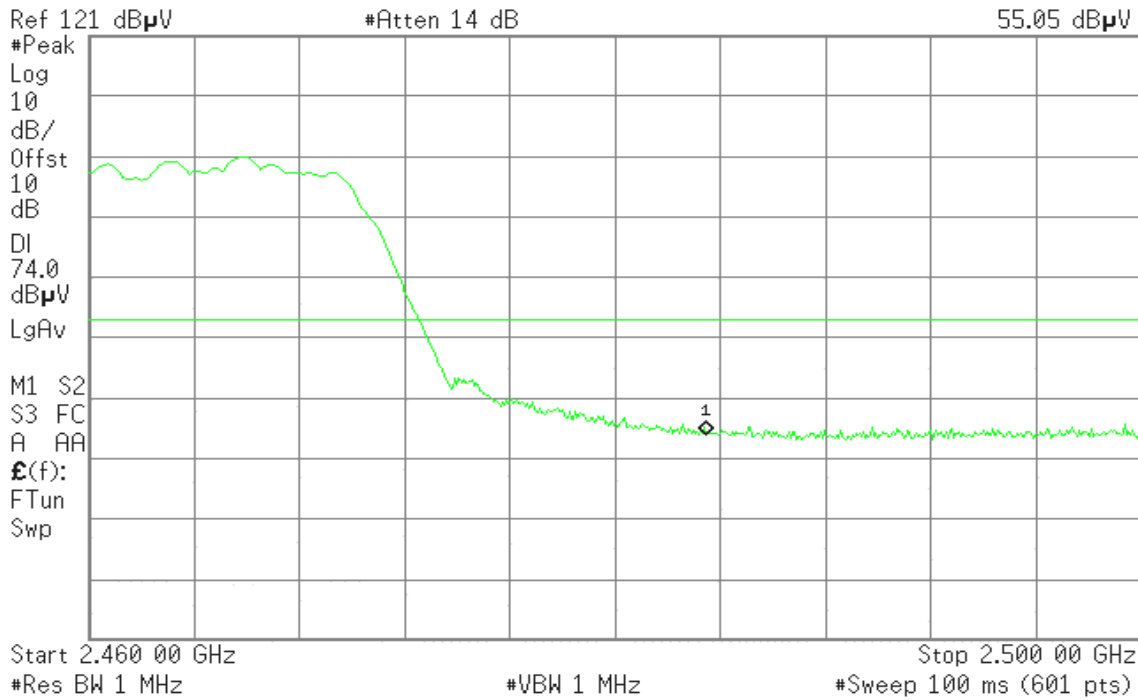


Detector mode: Average

Polarity: Horizontal

Agilent 17:03:22 Jun 13, 2007

R T

Mkr1 2.483 50 GHz
42.93 dBμV

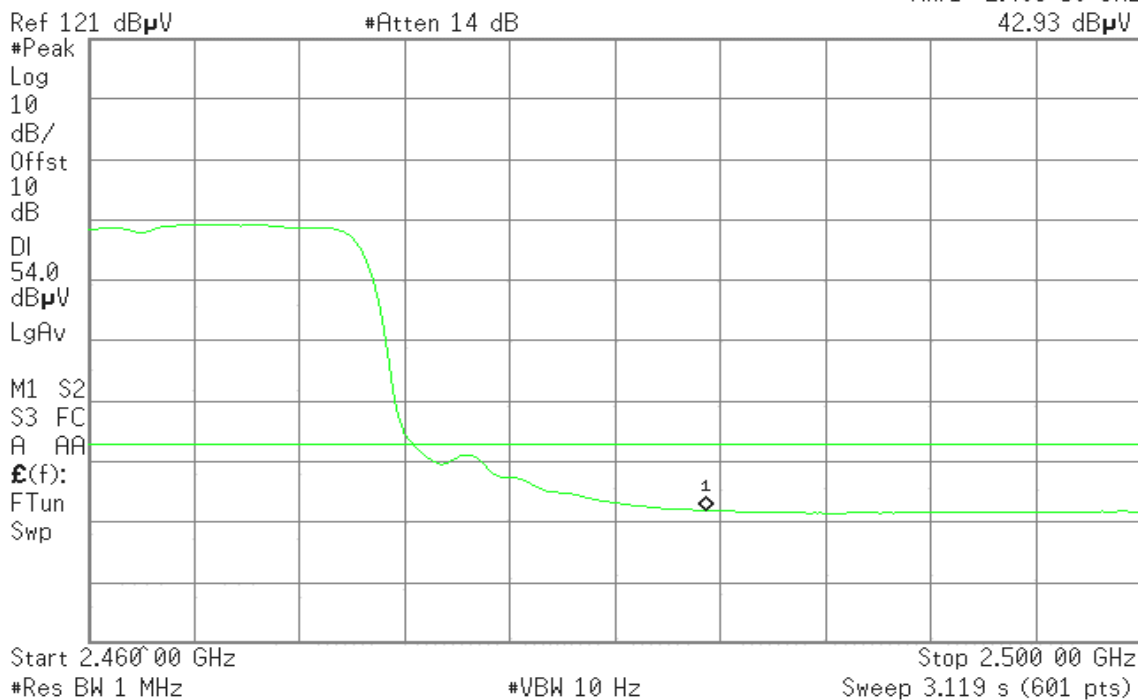


7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

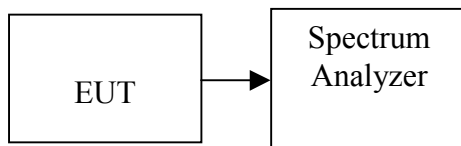

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-9.41	8.00	PASS
Mid	2437	-9.56		PASS
High	2462	-9.82		PASS

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-16.34	8.00	PASS
Mid	2437	-16.89		PASS
High	2462	-16.50		PASS




Test Plot

IEEE 802.11b

PPSD (CH Low)

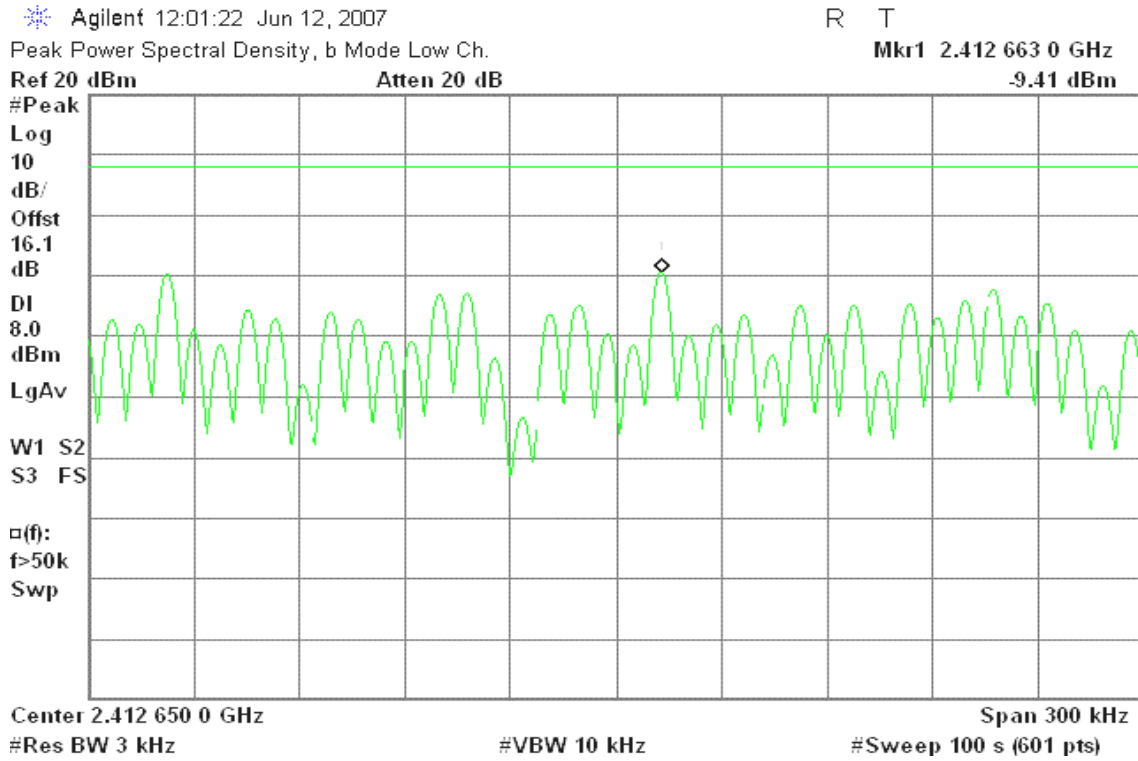

PPSD (CH Mid)

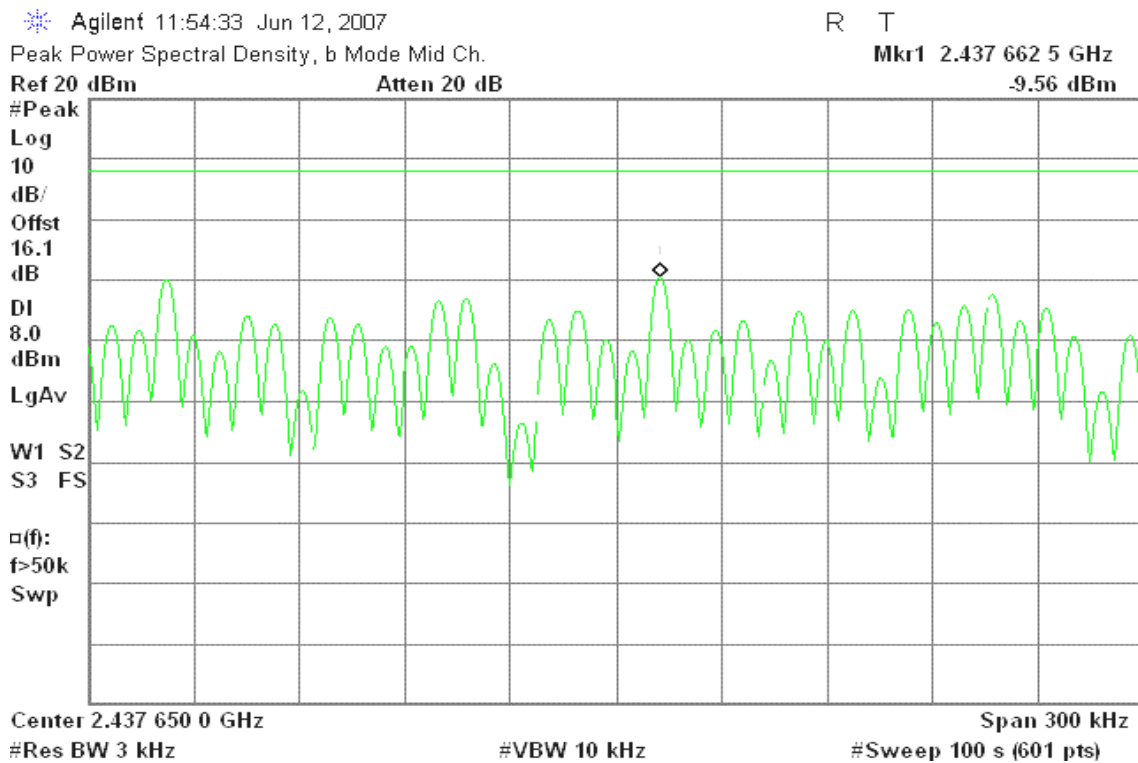



PPSD (CH High)

Agilent 11:45:10 Jun 12, 2007

R T


Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.462 662 1 GHz

Ref 20 dBm

Atten 20 dB

-9.82 dBm

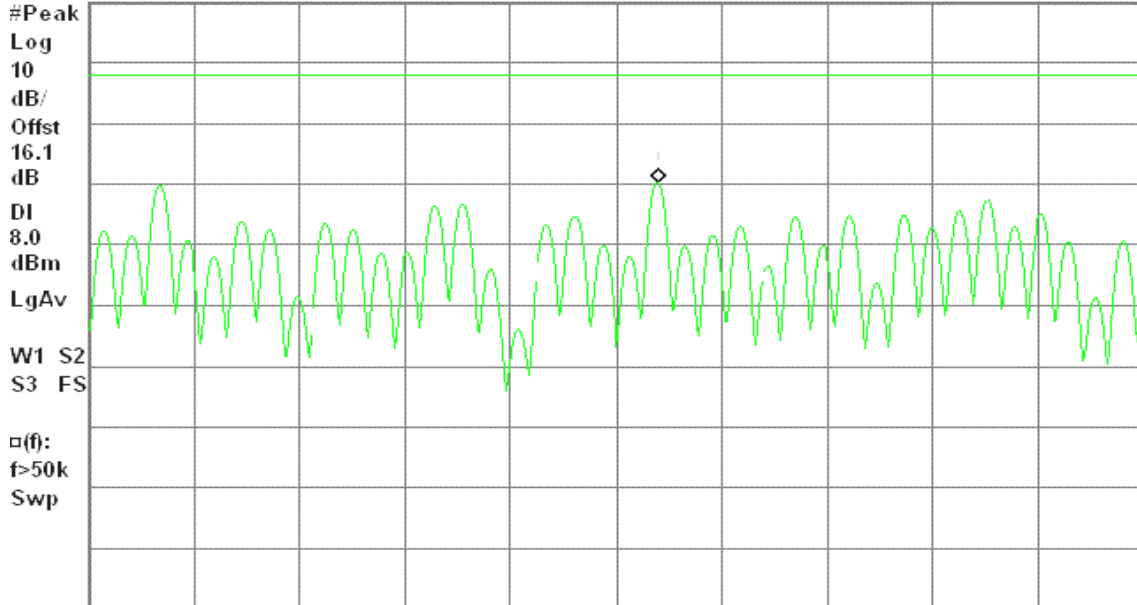

Center 2.462 650 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

IEEE 802.11g

PPSD (CH Low)

Agilent 13:11:28 Jun 12, 2007


R T

Mkr1 2.416 681 4 GHz

Ref 20 dBm

Atten 20 dB

-16.34 dBm

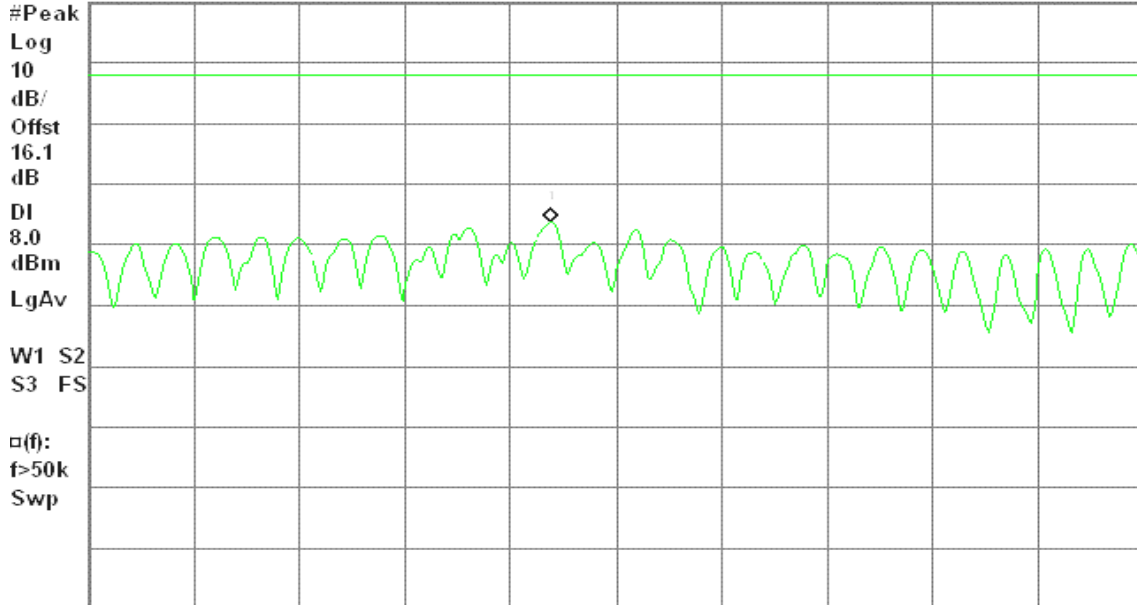

Center 2.416 700 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




PPSD (CH Mid)

Agilent 13:24:31 Jun 12, 2007

R T

Mkr1 2.441 680 9 GHz
-16.89 dBm

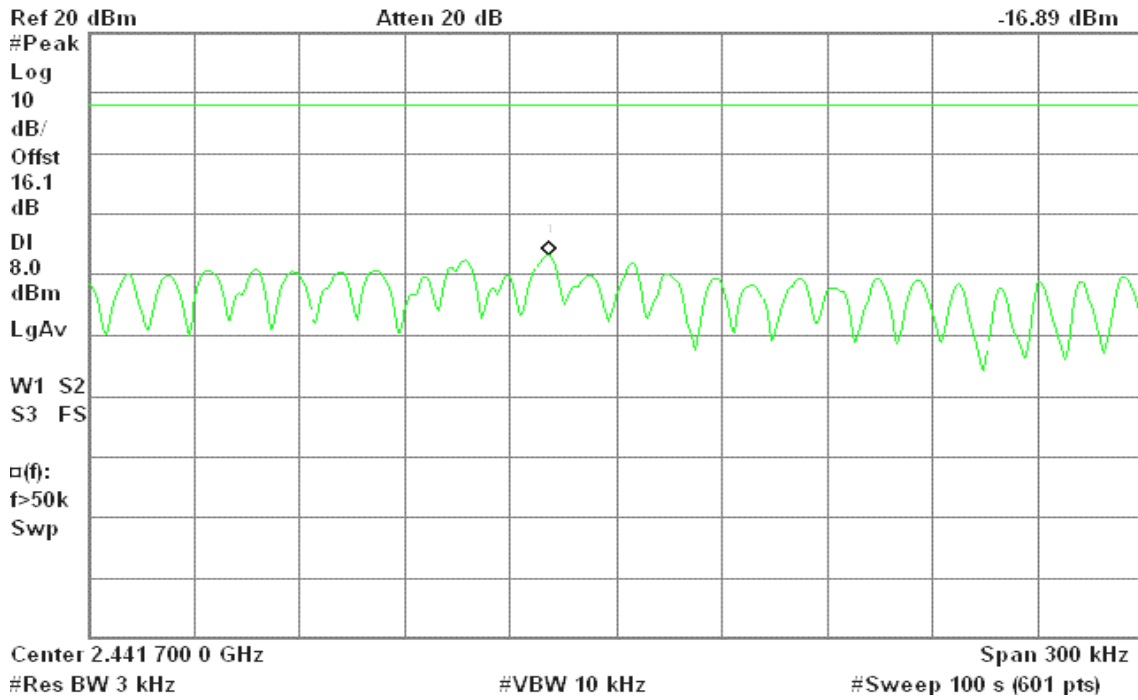


PPSD (CH High)

Agilent 13:32:59 Jun 12, 2007

R T

Mkr1 2.459 454 0 GHz
-16.50 dBm

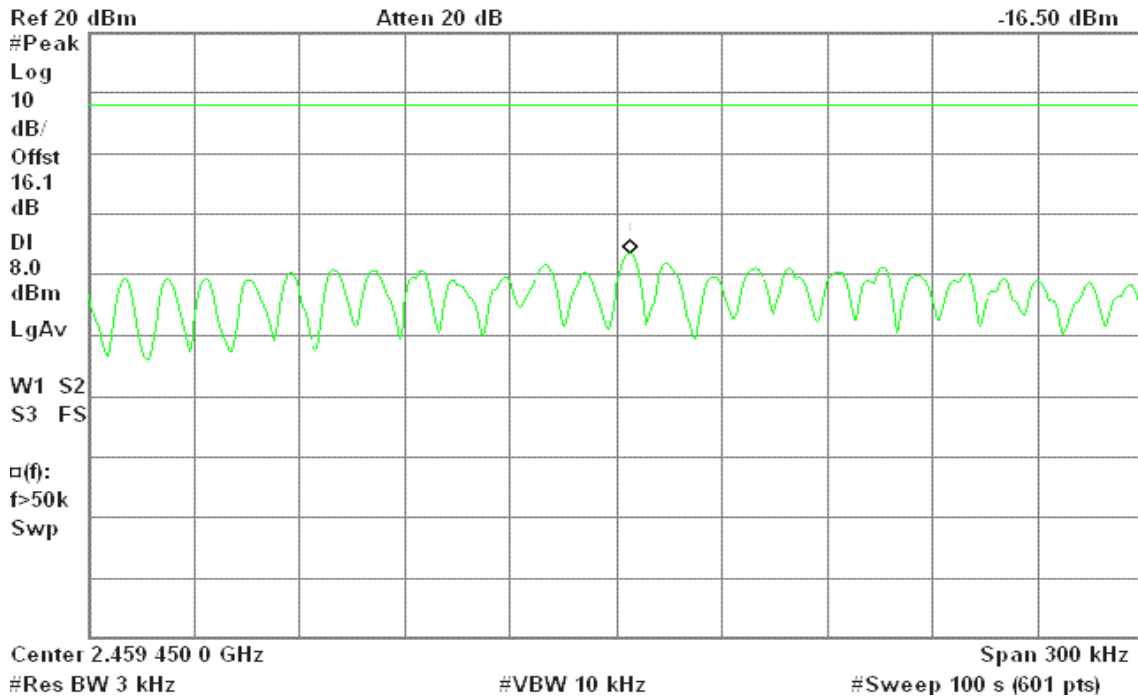




7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

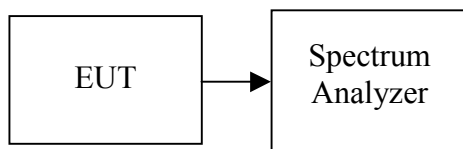

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 13GHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted




Test Plot

IEEE 802.11b

CH Low

Agilent 12:02:45 Jun 12, 2007


R T

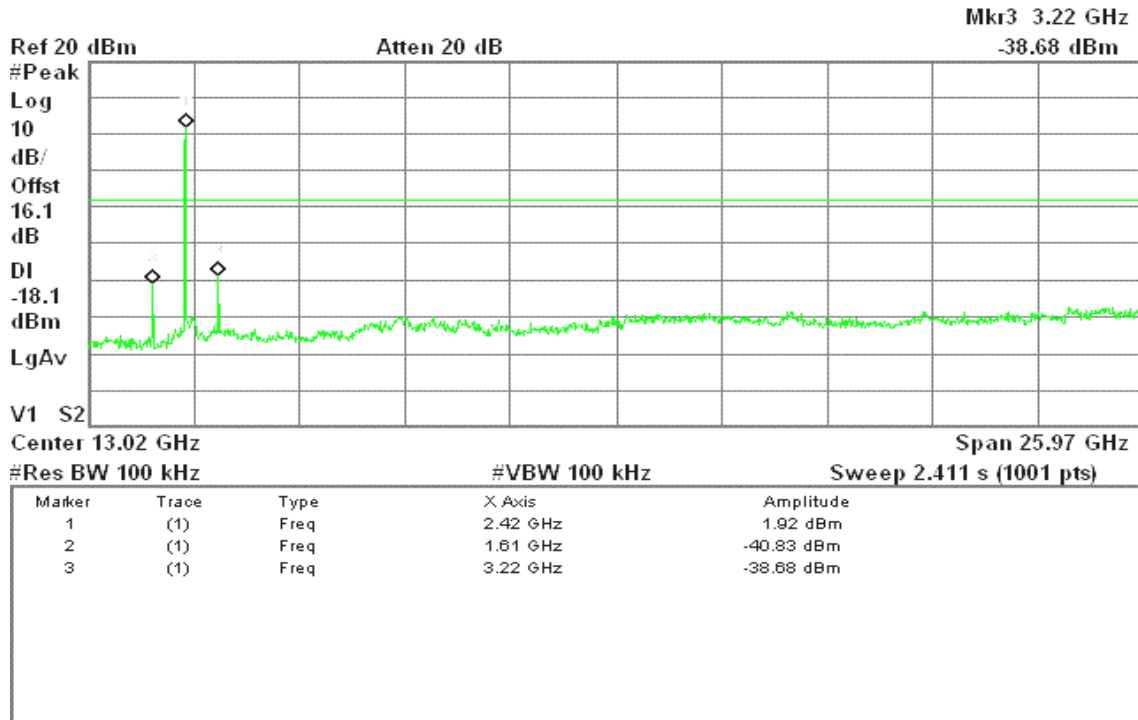

CH Mid

Agilent 11:56:00 Jun 12, 2007

R T

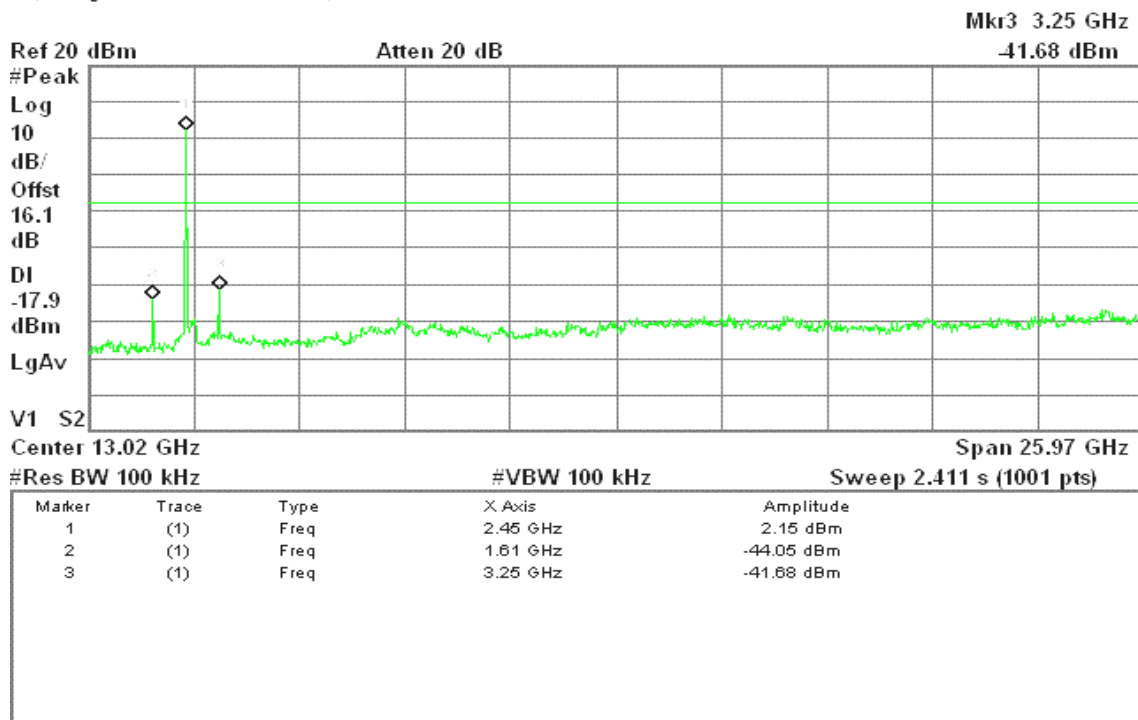



7.6.2 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

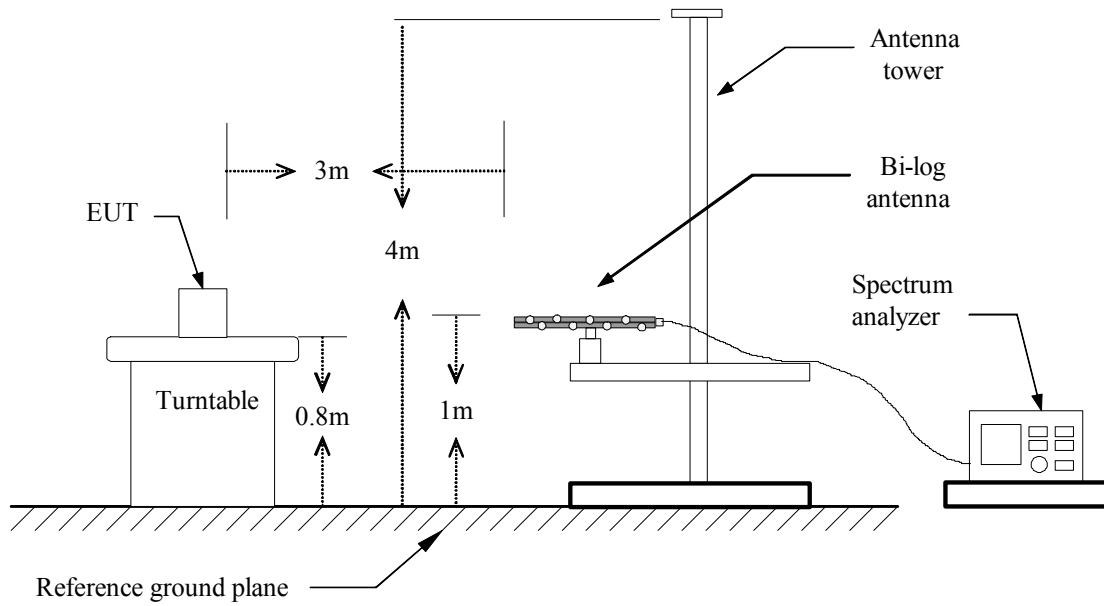

Above 1 GHz

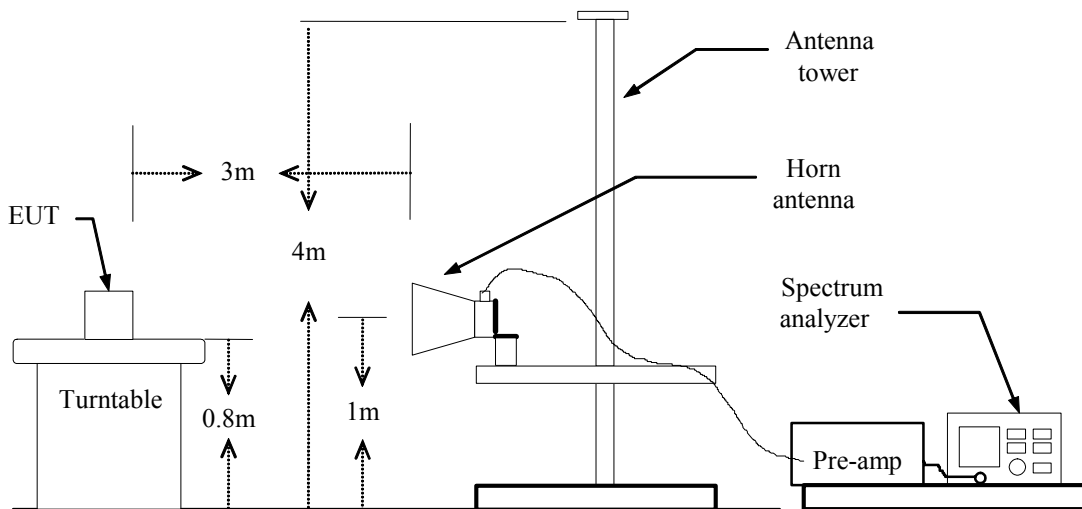



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS***No non-compliance noted***Below 1GHz****Operation Mode:** Normal Link**Test Date:** June 26, 2007**Temperature:** 25°C**Tested by:** Wolf Huang**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
57.48	V	52.50	-19.39	33.11	40.00	-6.89	Peak
167.42	V	53.65	-14.59	39.07	43.50	-4.43	Peak
400.22	V	48.97	-10.00	38.97	46.00	-7.03	Peak
666.97	V	39.59	-4.89	34.70	46.00	-11.30	Peak
799.53	V	40.88	-3.16	37.72	46.00	-8.28	Peak
933.72	V	39.75	-1.39	38.36	46.00	-7.64	Peak
167.42	H	49.19	-14.59	34.61	43.50	-8.89	Peak
249.87	H	50.55	-14.56	35.99	46.00	-10.01	Peak
400.22	H	47.68	-10.00	37.67	46.00	-8.33	Peak
500.45	H	47.42	-7.86	39.57	46.00	-6.43	Peak
666.97	H	40.92	-4.89	36.02	46.00	-9.98	Peak
933.72	H	40.03	-1.39	38.64	46.00	-7.36	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** June 15, 2007**Temperature:** 25°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1070.00	V	56.53	---	-10.68	45.86	---	74.00	54.00	-8.14	Peak
1606.67	V	62.31	---	-8.91	53.39	---	74.00	54.00	-0.61	Peak
2166.67	V	46.77	---	-4.59	42.18	---	74.00	54.00	-11.82	Peak
3216.67	V	58.04	55.30	-2.17	55.87	53.13	74.00	54.00	-0.87	AVG
4826.67	V	45.27	---	0.56	45.82	---	74.00	54.00	-8.18	Peak
N/A										
2412.00	H	104.47	101.42	-3.97	100.50	97.45	Fundamental			
1070.00	H	52.65	---	-10.68	41.97	---	74.00	54.00	-12.03	Peak
1338.33	H	52.15	---	-10.24	41.91	---	74.00	54.00	-12.09	Peak
1606.67	H	57.41	---	-8.91	48.50	---	74.00	54.00	-5.50	Peak
3216.67	H	59.49	57.41	-2.17	57.32	55.24	80.50	77.45	-21.01	20dBc AVG Fundamental
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power; based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** June 15, 2007**Temperature:** 25°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2437.00	V	108.88	106.00	-3.92	104.96	102.08	Fundamental			
1070.00	V	56.77	---	-10.68	46.10	---	74.00	54.00	-7.90	Peak
1630.00	V	61.51	---	-8.68	52.83	---	74.00	54.00	-1.17	Peak
3251.67	V	59.19	57.07	-2.13	57.06	54.94	84.96	82.08	-25.77	20dBc AVG Fundamental
4873.33	V	45.93	---	0.60	46.53	---	74.00	54.00	-7.47	Peak
6553.33	V	49.63	---	3.09	52.73	---	74.00	54.00	-1.27	Peak
N/A										
1070.00	H	53.73	---	-10.68	43.05	---	74.00	54.00	-10.95	Peak
1338.33	H	51.79	---	-10.24	41.55	---	74.00	54.00	-12.45	Peak
1630.00	H	55.46	---	-8.68	46.77	---	74.00	54.00	-7.23	Peak
3251.67	H	56.03	---	-2.13	53.90	---	74.00	54.00	-0.10	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** June 15, 2007**Temperature:** 25°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1070.00	V	56.11	---	-10.68	45.43	---	74.00	54.00	-8.57	Peak
1641.67	V	59.99	---	-8.57	51.42	---	74.00	54.00	-2.58	Peak
3286.67	V	58.12	55.69	-2.09	56.03	53.60	74.00	54.00	-0.40	AVG
4920.00	V	46.80	---	0.65	47.44	---	74.00	54.00	-6.56	Peak
6506.67	V	46.99	---	3.00	49.99	---	74.00	54.00	-4.01	Peak
N/A										
1070.00	H	52.30	---	-10.68	41.62	---	74.00	54.00	-12.38	Peak
1338.33	H	52.75	---	-10.24	42.52	---	74.00	54.00	-11.48	Peak
1641.67	H	53.47	---	-8.57	44.90	---	74.00	54.00	-9.10	Peak
3286.67	H	54.15	---	-2.09	52.06	---	74.00	54.00	-1.94	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: June 15, 2007

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2412.00	V	110.77	100.84	-3.97	106.80	96.87	Fundamental			
1070.00	V	56.67	---	-10.68	46.00	---	74.00	54.00	-8.00	Peak
1198.33	V	52.00	---	-10.47	41.54	---	74.00	54.00	-12.46	Peak
1606.67	V	51.34	---	-8.91	42.43	---	74.00	54.00	-11.57	Peak
3216.67	V	60.97	59.03	-2.17	58.80	56.86	86.80	76.87	-25.83	20dBc AVG Fundamental
N/A										
1070.00	H	52.30	---	-10.68	41.63	---	74.00	54.00	-12.37	Peak
1338.33	H	51.95	---	-10.24	41.71	---	74.00	54.00	-12.29	Peak
3216.67	H	58.54	56.02	-2.17	56.37	53.85	74.00	54.00	-0.15	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** June 15, 2007**Temperature:** 25°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2437.00	V	110.77	100.87	-3.92	106.85	96.95	Fundamental			
1070.00	V	56.20	---	-10.68	45.53	---	74.00	54.00	-8.47	Peak
1630.00	V	51.80	---	-8.68	43.11	---	74.00	54.00	-10.89	Peak
3251.67	V	58.88	56.52	-2.13	56.75	54.39	86.85	76.95	-27.77	20dBc AVG Fundamental
6576.67	V	50.48	---	3.14	53.62	---	74.00	54.00	-0.38	Peak
N/A										
1070.00	H	53.22	---	-10.68	42.54	---	74.00	54.00	-11.46	Peak
1338.33	H	51.89	---	-10.24	41.65	---	74.00	54.00	-12.35	Peak
1630.00	H	47.03	---	-8.68	38.35	---	74.00	54.00	-15.65	Peak
3251.67	H	58.06	55.56	-2.13	55.93	53.43	74.00	54.00	-0.57	AVG
6495.00	H	47.42	---	2.98	50.40	---	74.00	54.00	-3.60	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** June 15, 2007**Temperature:** 25°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2462.00	V	110.98	100.48	-3.33	107.65	97.15	Fundamental			
1070.00	V	56.48	---	-10.68	45.80	---	74.00	54.00	-8.20	Peak
1641.67	V	50.48	---	-8.57	41.91	---	74.00	54.00	-12.09	Peak
3286.67	V	58.38	56.14	-2.09	56.29	54.05	87.65	77.15	-29.27	30dBc AVG Fundamental
6448.33	V	47.14	---	2.89	50.04	---	74.00	54.00	-3.96	Peak
N/A										
1070.00	H	53.09	---	-10.68	42.41	---	74.00	54.00	-11.59	Peak
1338.33	H	50.34	---	-10.24	40.10	---	74.00	54.00	-13.90	Peak
1641.67	H	47.41	---	-8.57	38.84	---	74.00	54.00	-15.16	Peak
3286.67	H	51.82	---	-2.09	49.74	---	74.00	54.00	-4.26	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** June 1, 2007
Temperature: 25°C **Tested by:** John Yen
Humidity: 55% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.192	45.77	34.96	9.86	55.63	44.81	63.93	53.93	-8.30	-9.12	L1
0.253	38.00	---	9.86	47.86	---	61.64	---	-13.79	---	L1
0.318	33.40	---	9.86	43.26	---	59.75	---	-16.49	---	L1
0.516	30.88	---	9.87	40.75	---	56.00	---	-15.25	---	L1
2.435	29.27	---	9.91	39.18	---	56.00	---	-16.82	---	L1
12.920	33.70	---	10.09	43.79	---	60.00	---	-16.21	---	L1
0.192	44.89	33.70	9.96	54.85	43.66	63.93	53.93	-9.08	-10.27	L2
0.253	36.93	---	9.92	46.85	---	61.64	---	-14.79	---	L2
0.383	34.01	---	9.87	43.88	---	58.21	---	-14.33	---	L2
0.510	31.30	---	9.87	41.17	---	56.00	---	-14.83	---	L2
2.461	29.65	---	9.91	39.56	---	56.00	---	-16.44	---	L2
14.063	34.33	---	10.28	44.61	---	60.00	---	-15.39	---	L2

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

Data#: 11 File#: 70522207CB.EMI

Date: 2007-06-01 Time: 21:04:00

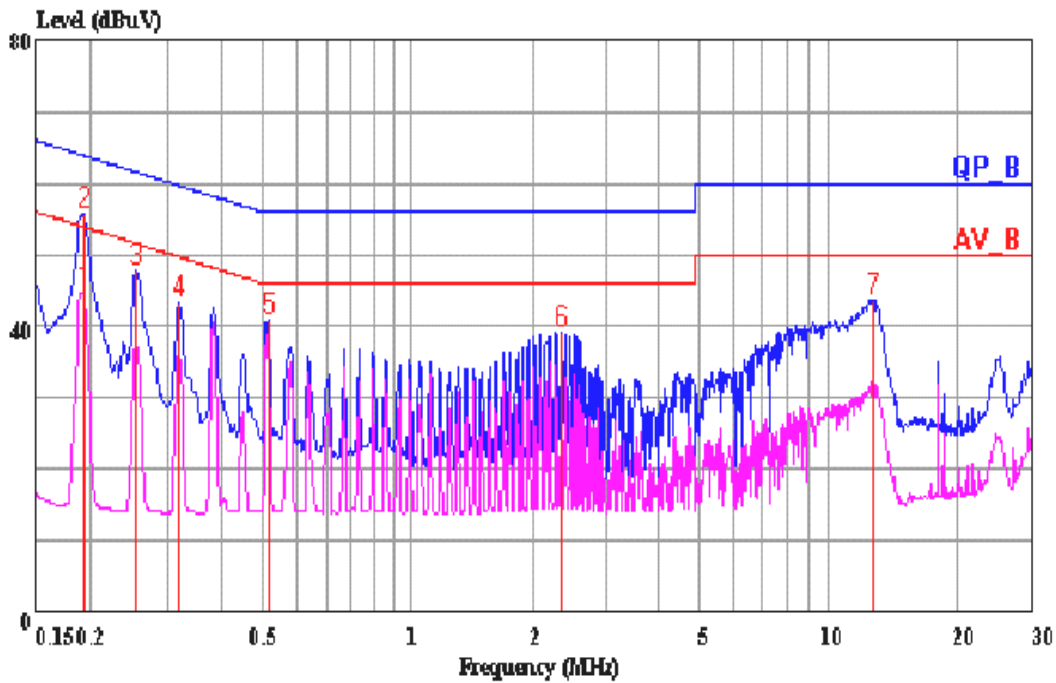


(CCS Conduction B)

Conducted emissions (Line 2)

Data#: 22 File#: 70522207CB.EMI

Date: 2007-06-01 Time: 21:14:56

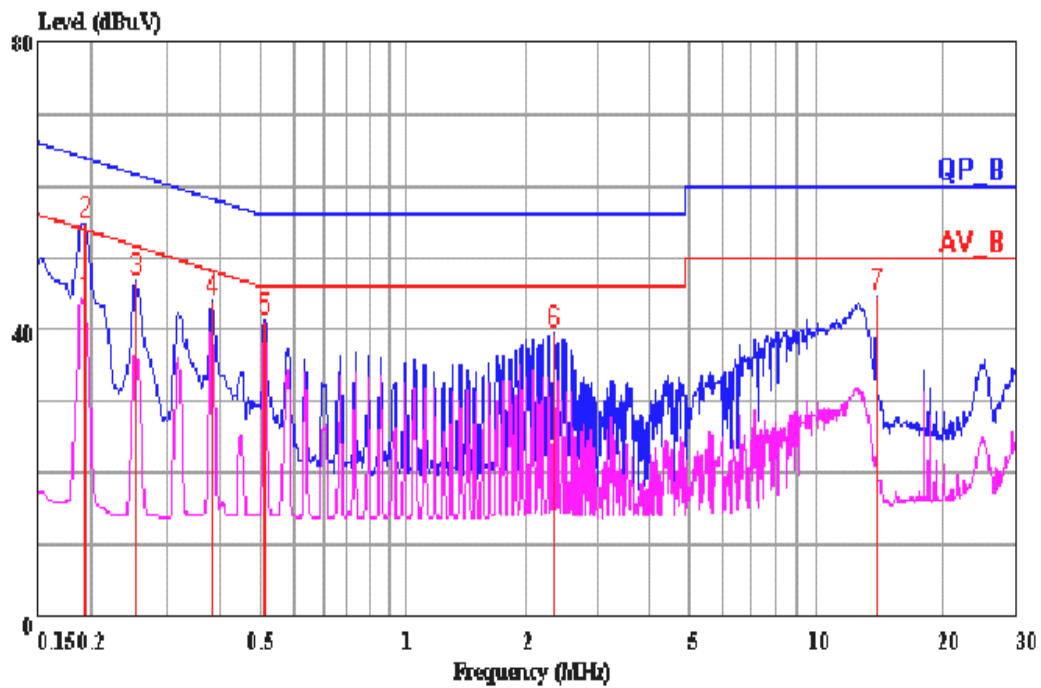

(CCS Conduction B)