

**PPSD (CH Mid)**

\* Agilent 15:22:22 Jun 13, 2008

R T

Peak Power Spectral Density, b Mode Mid Ch.

Mkr1 2.434 222 6 GHz

Ref 20 dBm

Atten 30 dB

-11.27 dBm

#Peak

Log

10

dB/

Offst

7.5

dB

DI

8.0

dBm

LgAv


W1 S2

S3 FS

 $\alpha(f)$ :

f&gt;50k

Swp

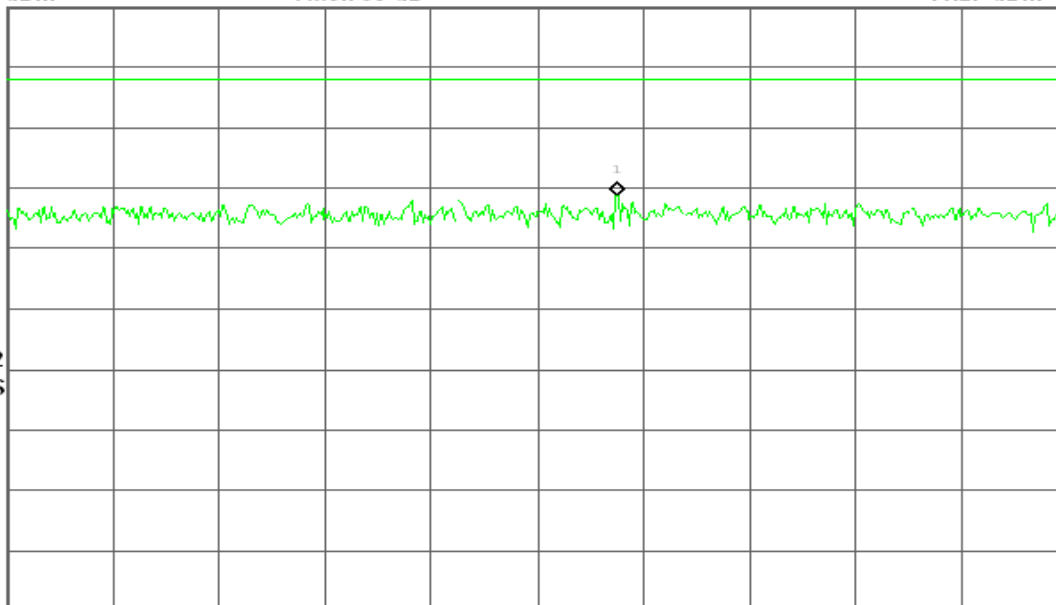

Center 2.434 200 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

**PPSD (CH High)**

\* Agilent 15:29:58 Jun 13, 2008

R T

Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.461 222 4 GHz

Ref 20 dBm

Atten 30 dB

-10.70 dBm

#Peak

Log

10

dB/

Offst

7.5

dB

DI

8.0

dBm

LgAv


W1 S2

S3 FS

 $\alpha(f)$ :

f&gt;50k

Swp

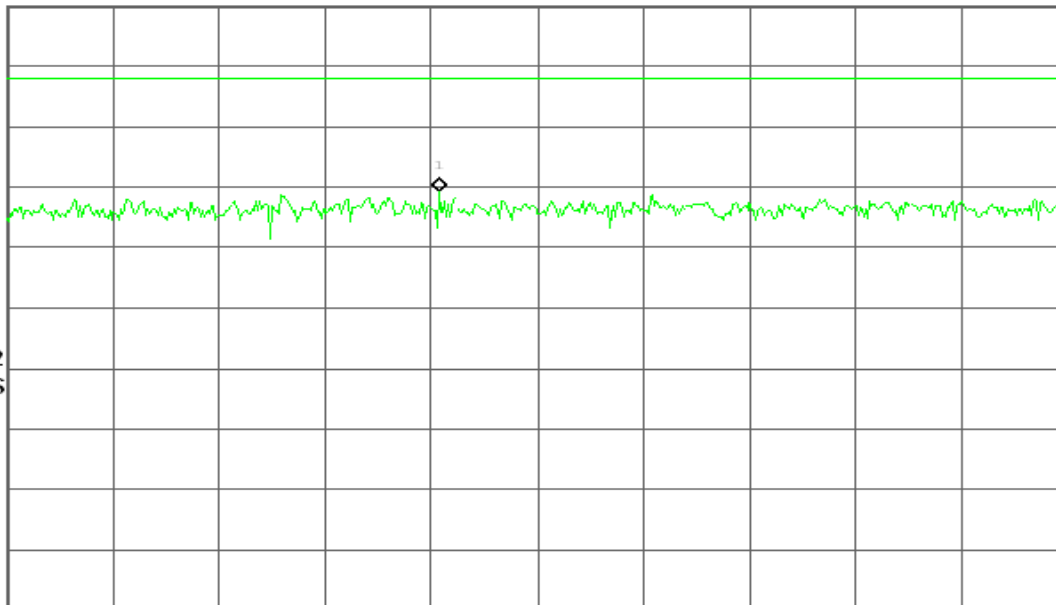



Center 2.461 250 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

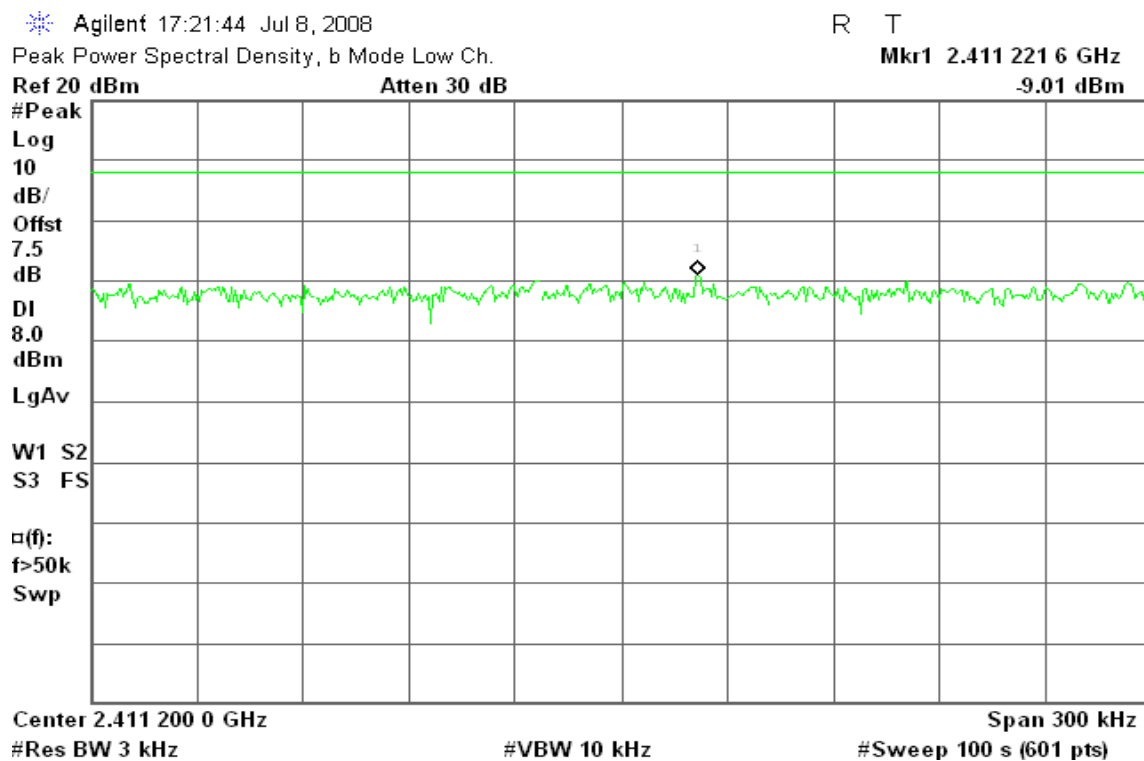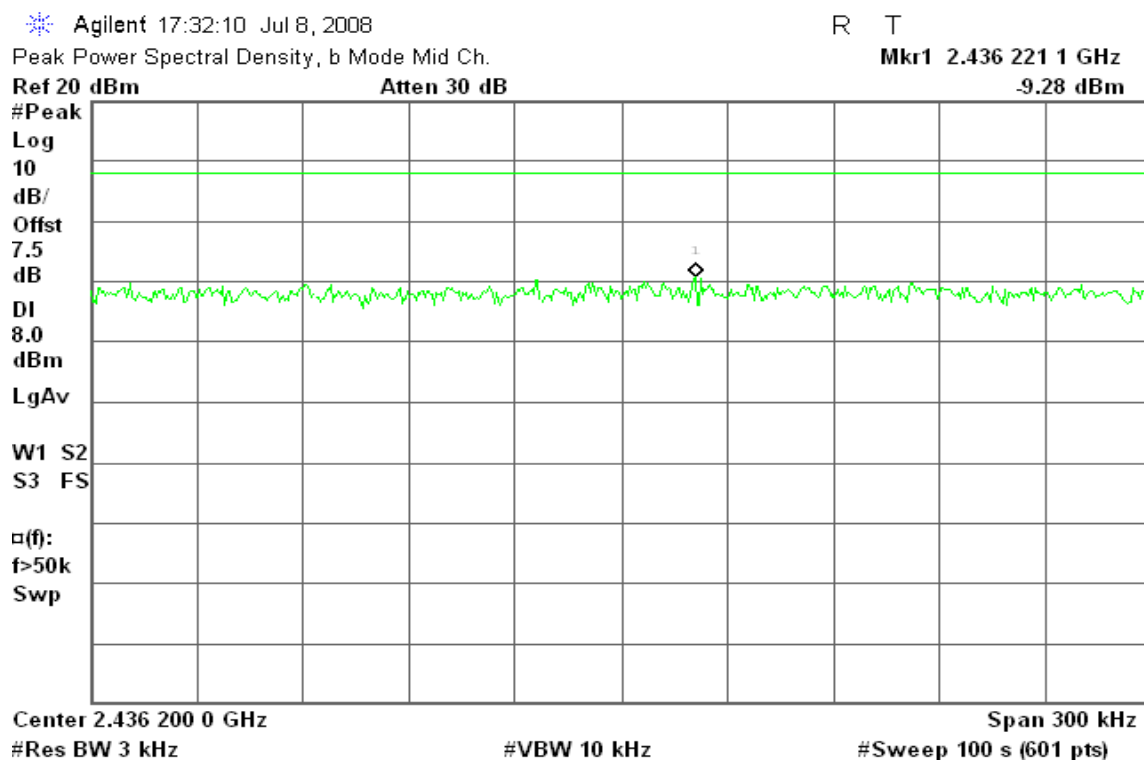**IEEE 802.11b mode / Chain 2****PPSD (CH Low)****PPSD (CH Mid)**



## PPSD (CH High)

\* Agilent 17:40:35 Jul 8, 2008

R T

Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.461 222 4 GHz

Ref 20 dBm

Atten 30 dB

-9.37 dBm

#Peak

Log

10

dB/

Offst

7.5

dB

DI

8.0

dBm

LgAv


W1 S2

S3 FS

α(f):

f&gt;50k

Swp

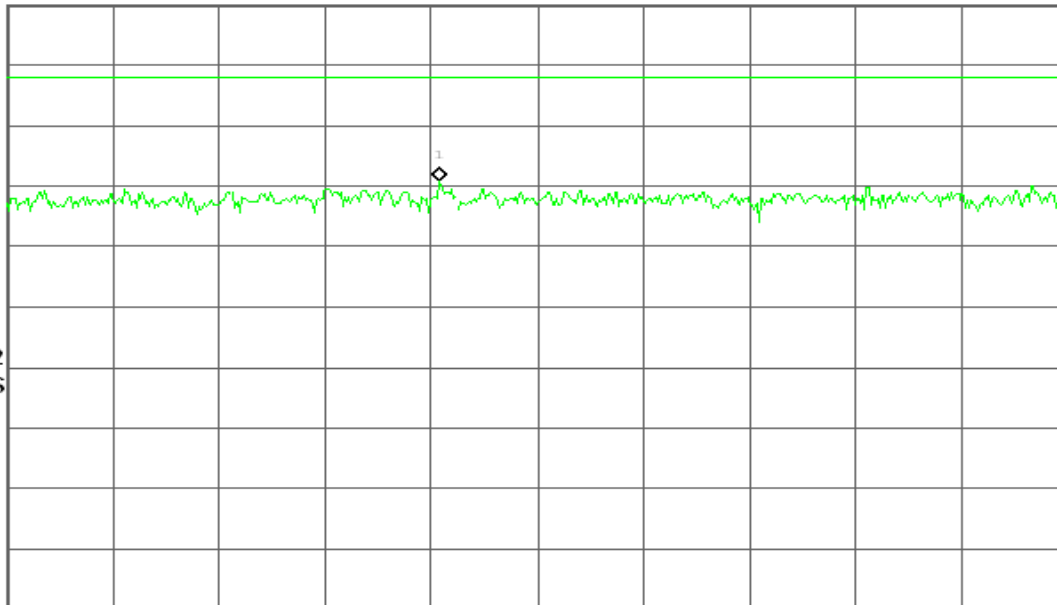



Center 2.461 250 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

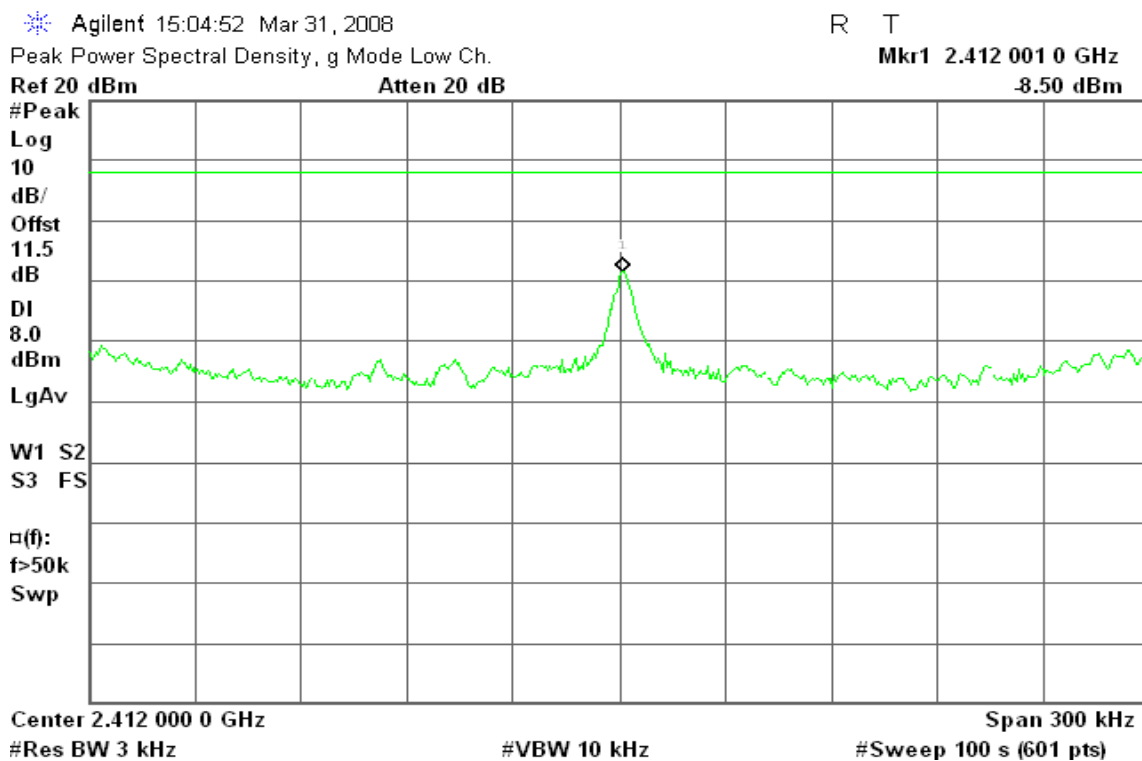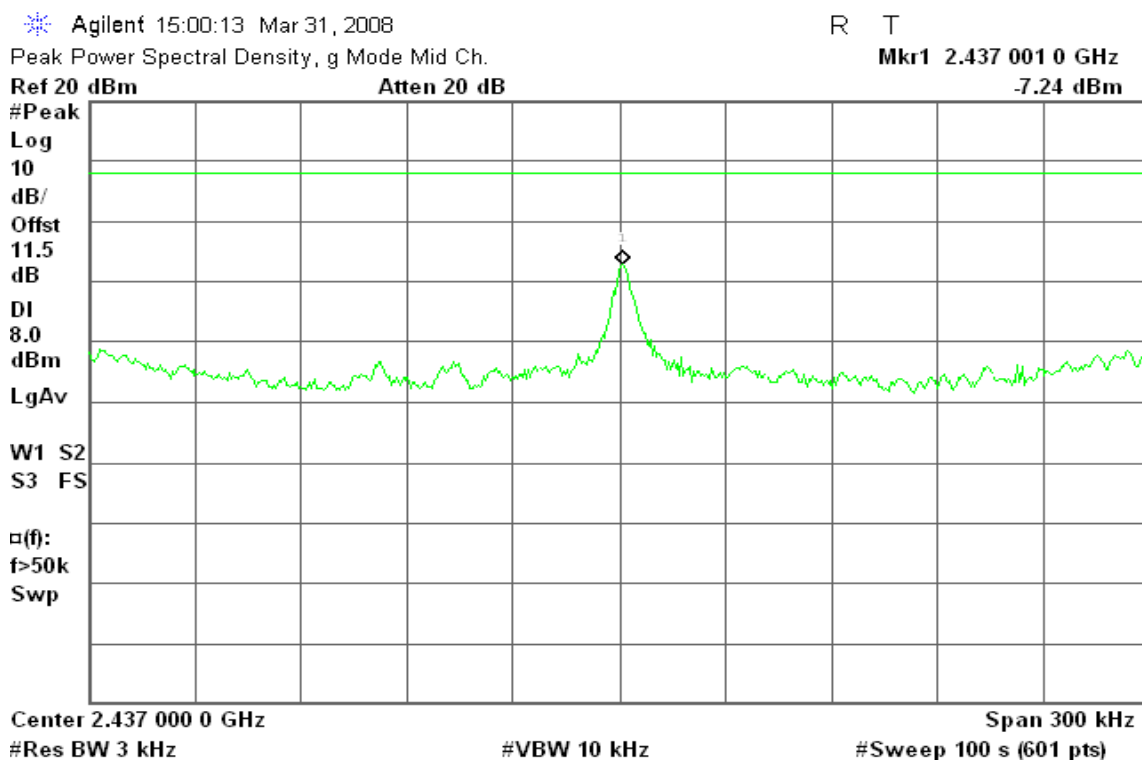**IEEE 802.11g mode / Chain 0****PPSD (CH Low)****PPSD (CH Mid)**

**PPSD (CH High)**

\* Agilent 15:09:33 Mar 31, 2008

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.462 001 5 GHz

Ref 20 dBm

Atten 20 dB

-8.06 dBm

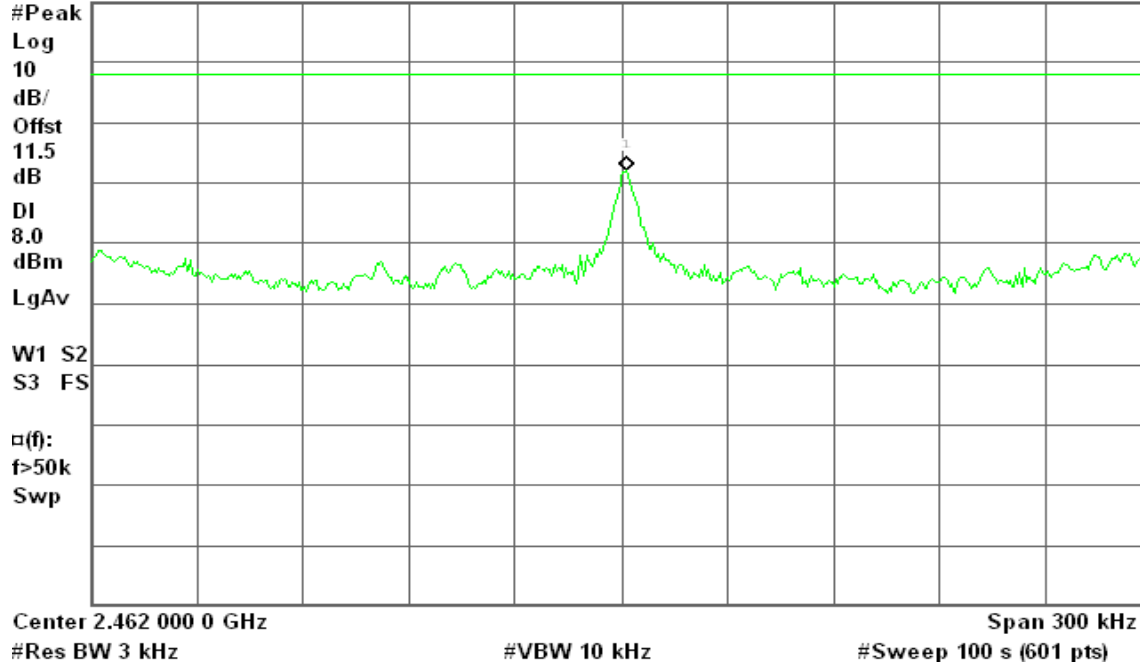**IEEE 802.11g mode / Chain 1****PPSD (CH Low)**

\* Agilent 16:47:13 Jun 13, 2008

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.412 001 5 GHz

Ref 20 dBm

Atten 30 dB

-10.04 dBm

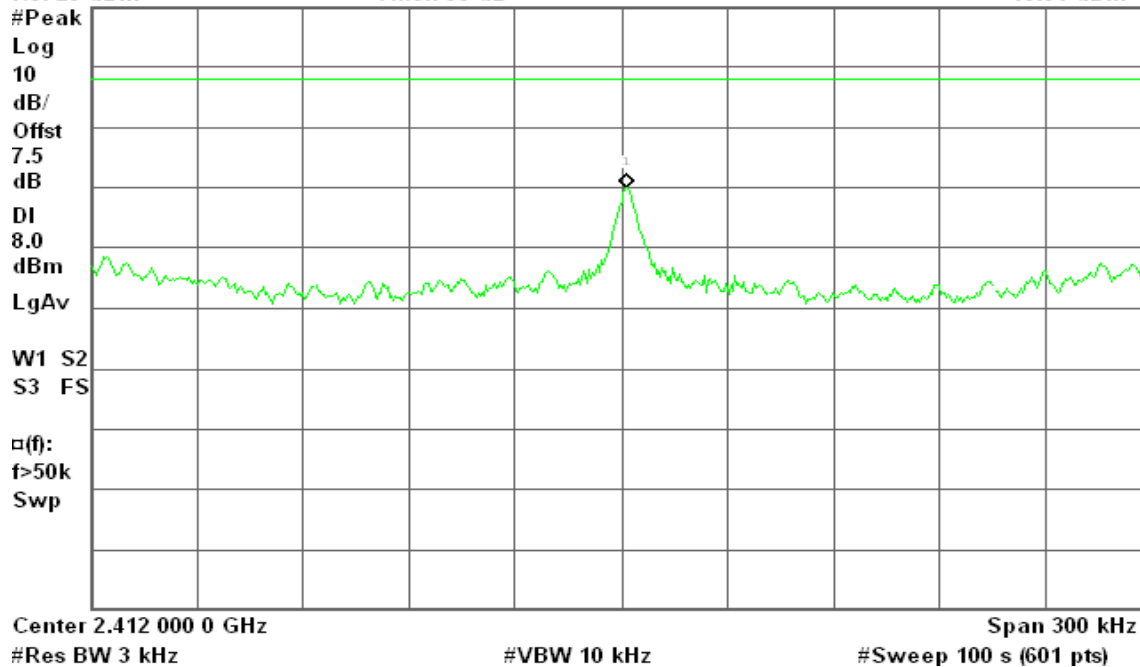

**PPSD (CH Mid)**

\* Agilent 16:53:19 Jun 13, 2008

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.437 001 5 GHz

Ref 20 dBm

Atten 30 dB

-9.95 dBm

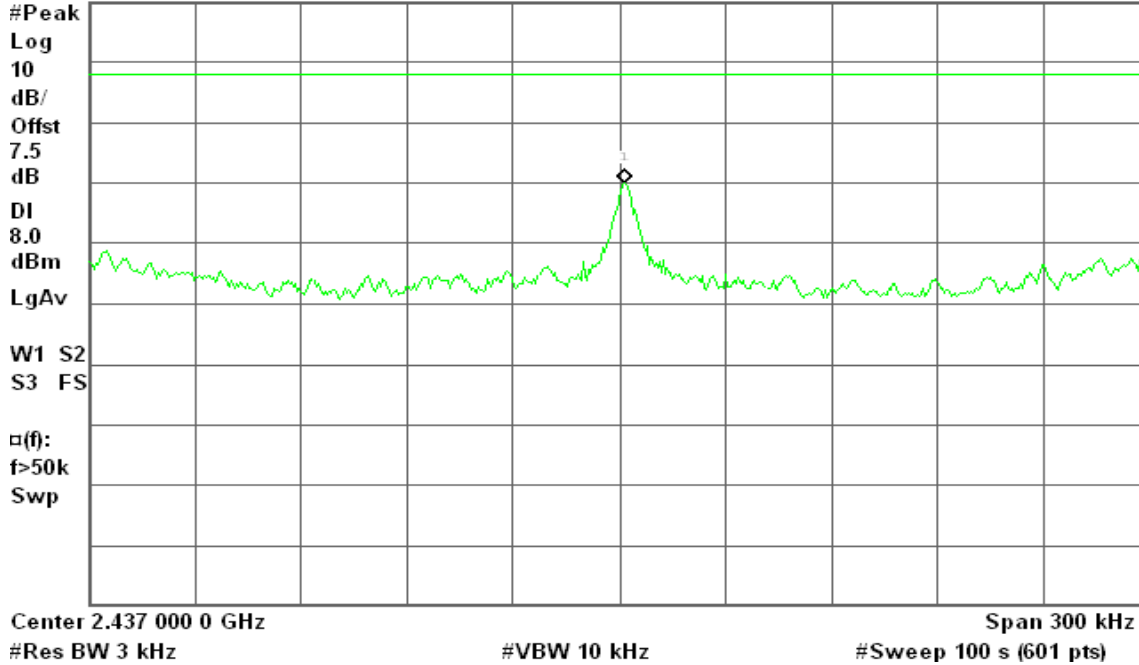**PPSD (CH High)**

\* Agilent 16:58:04 Jun 13, 2008

R L


Peak Power Spectral Density, g Mode High Ch.



Mkr1 2.462 001 5 GHz

Ref 20 dBm

Atten 30 dB

-10.35 dBm

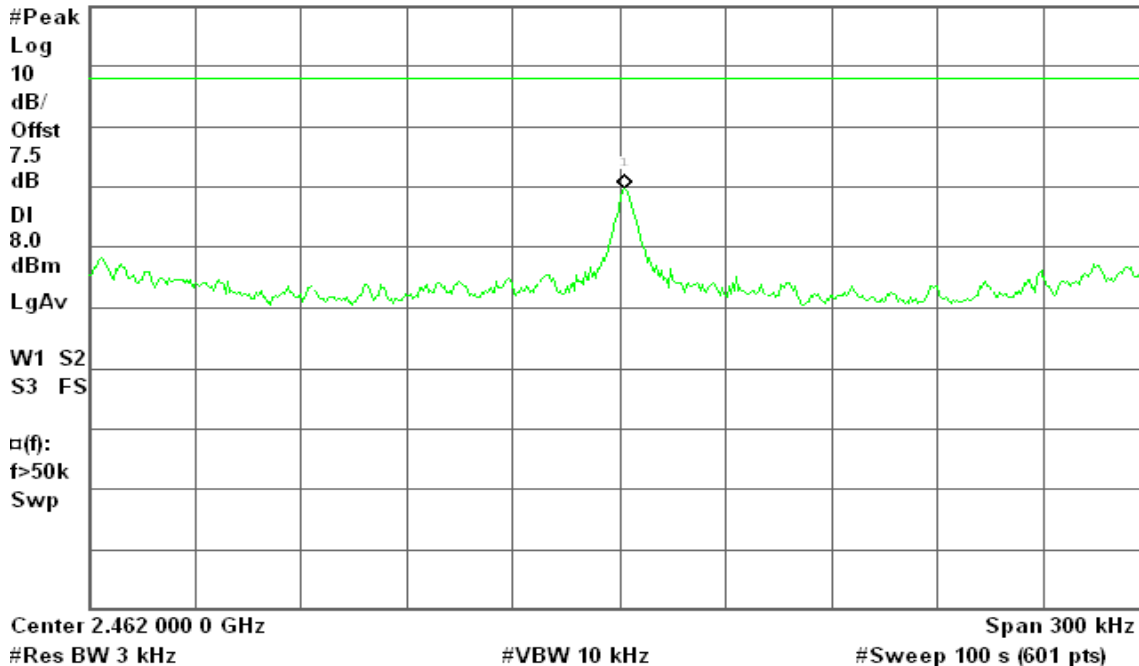

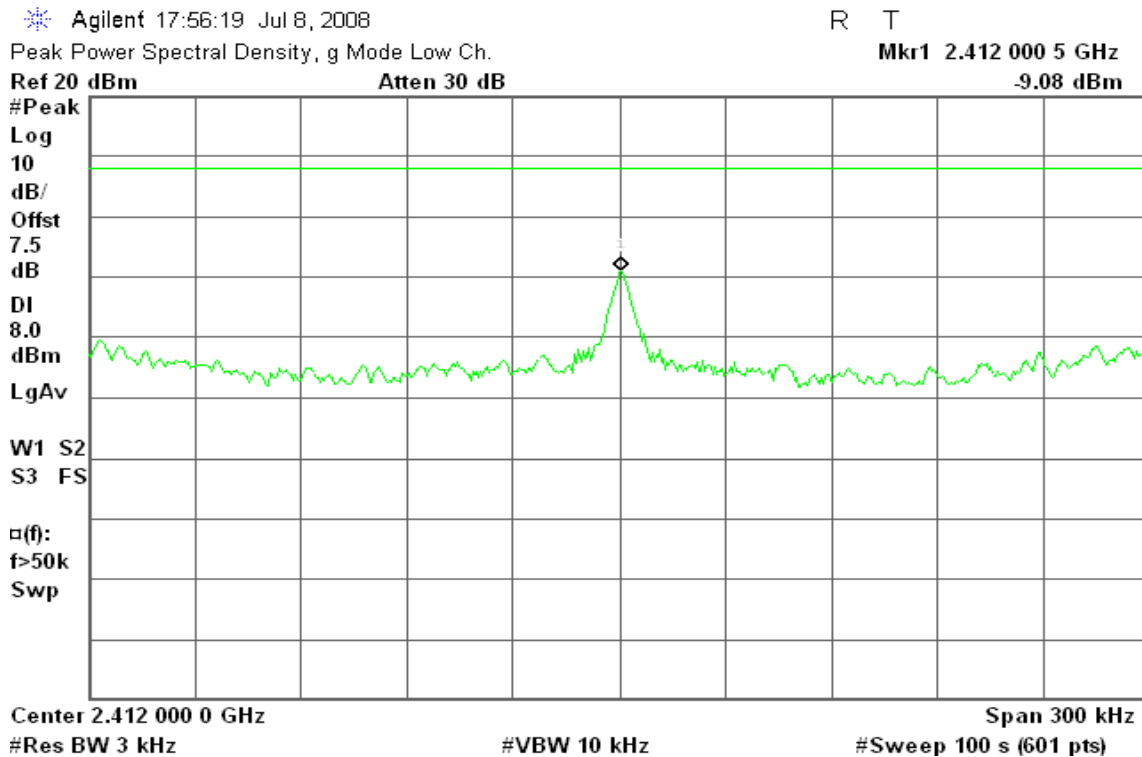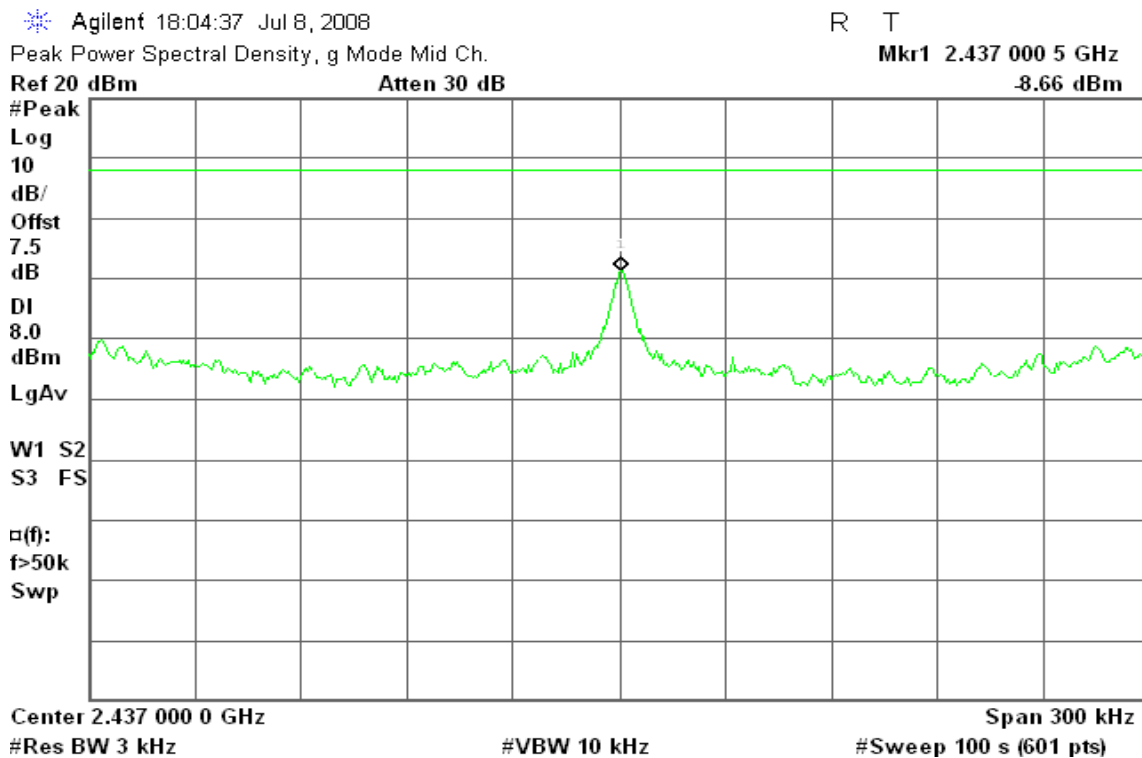**IEEE 802.11g mode / Chain 2****PPSD (CH Low)****PPSD (CH Mid)**

**PPSD (CH High)**

\* Agilent 18:16:48 Jul 8, 2008

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.462 001 0 GHz

Ref 20 dBm

Atten 30 dB

-8.87 dBm

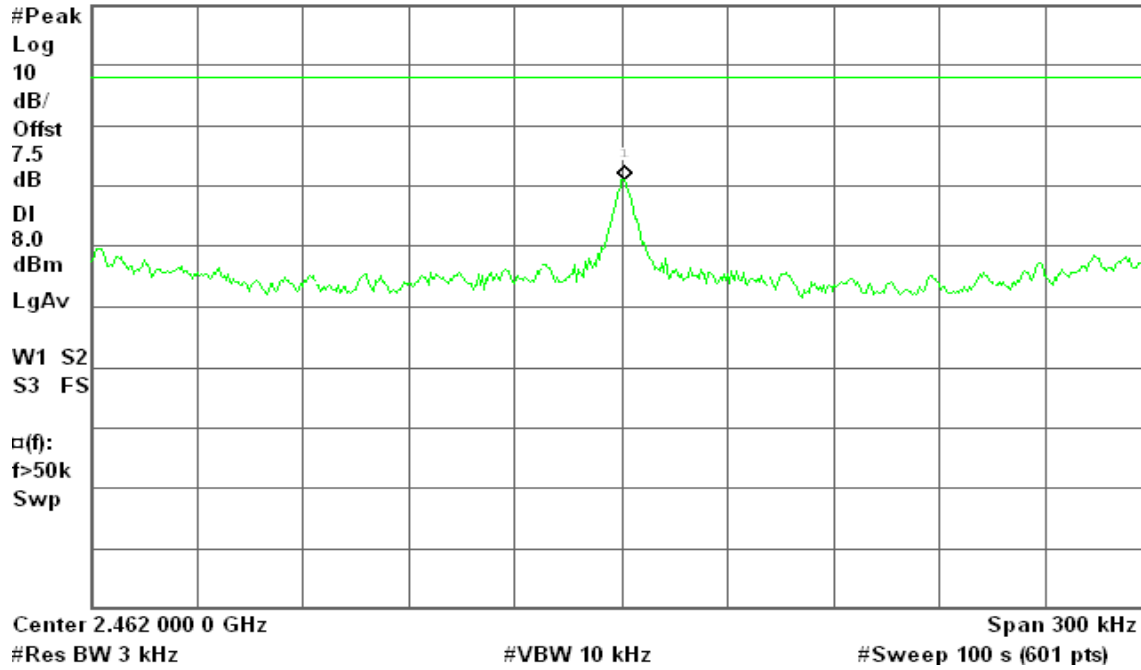




**draft 802.11n Standard-20 MHz Channel mode / Chain 0****PPSD (CH Low)**

\* Agilent 15:37:07 Mar 31, 2008

R T

Mkr1 2.411 998 5 GHz

-7.70 dBm

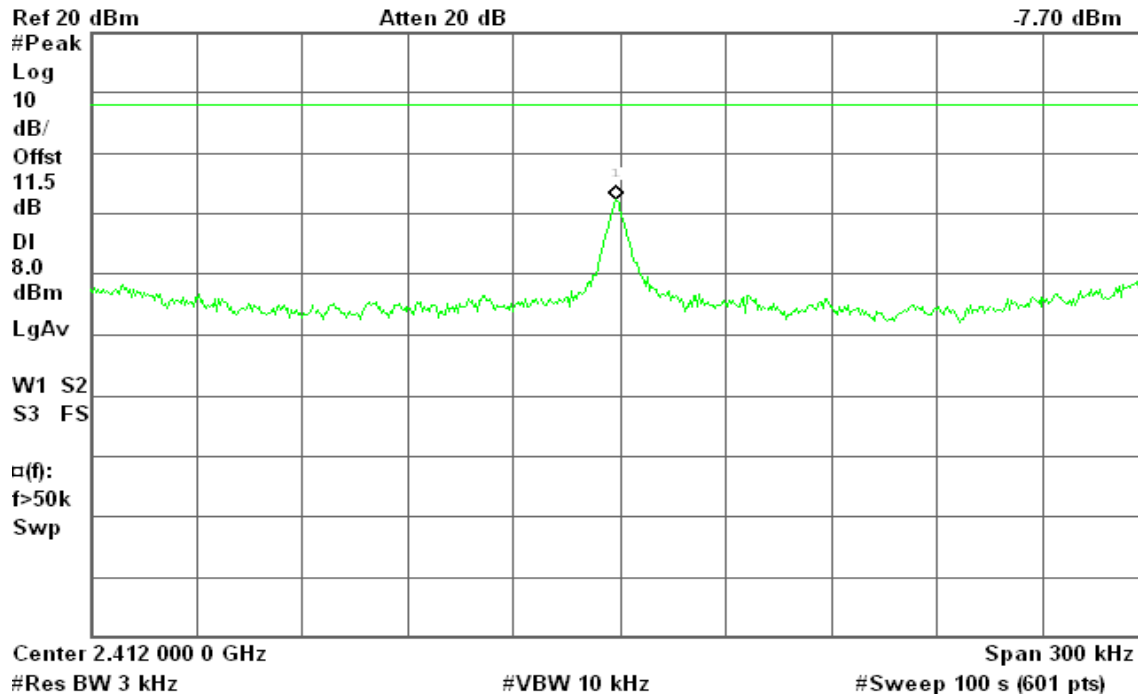
**PPSD (CH Mid)**

\* Agilent 15:41:58 Mar 31, 2008

R T

Mkr1 2.436 998 5 GHz

-8.40 dBm

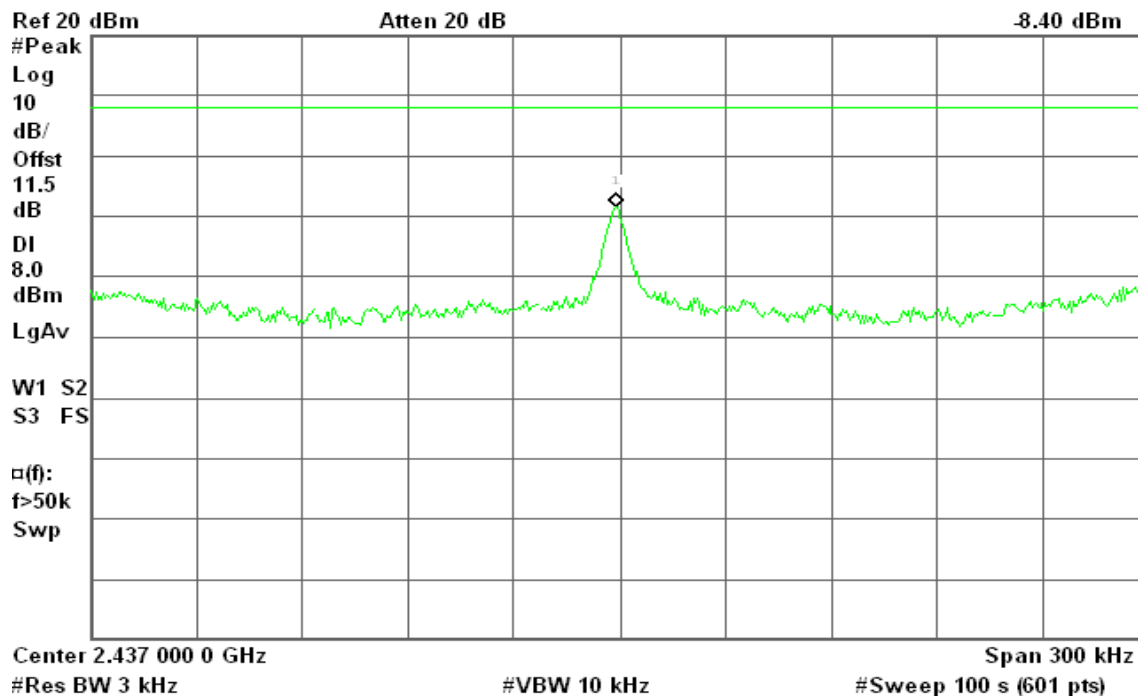


**PPSD (CH High)**

\* Agilent 15:46:34 Mar 31, 2008

R T

Mkr1 2.461 998 5 GHz

-8.02 dBm

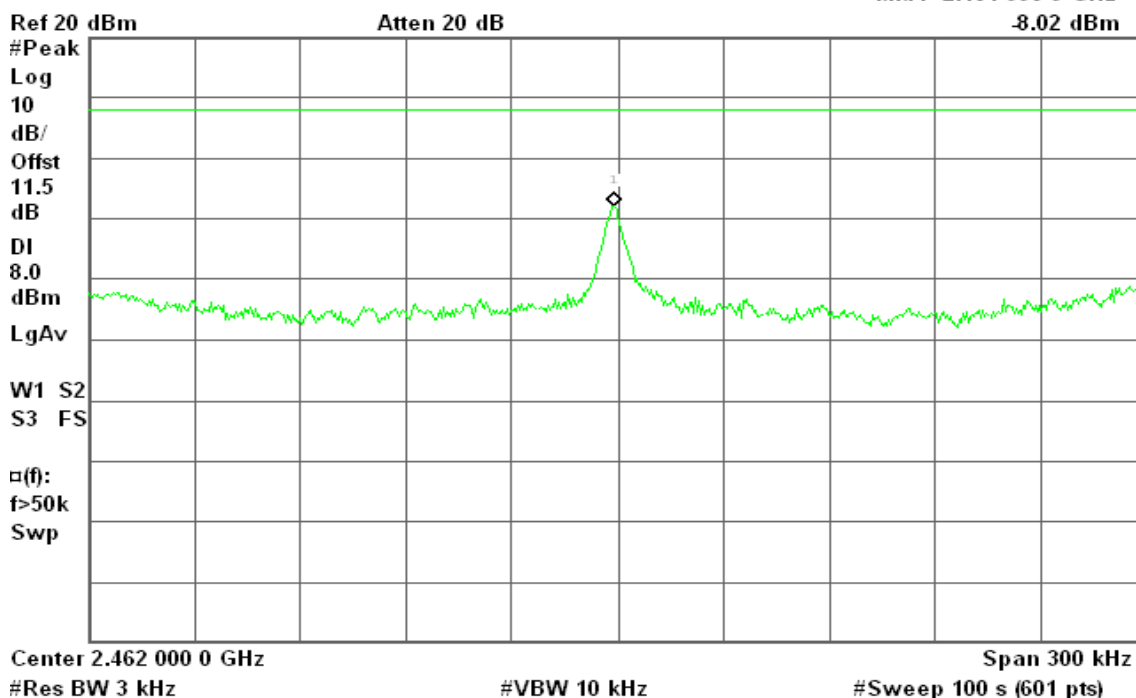
**draft 802.11n Standard-20 MHz Channel mode / Chain 1****PPSD (CH Low)**

\* Agilent 16:06:35 Mar 31, 2008

R T

Mkr1 2.411 997 0 GHz

-11.60 dBm

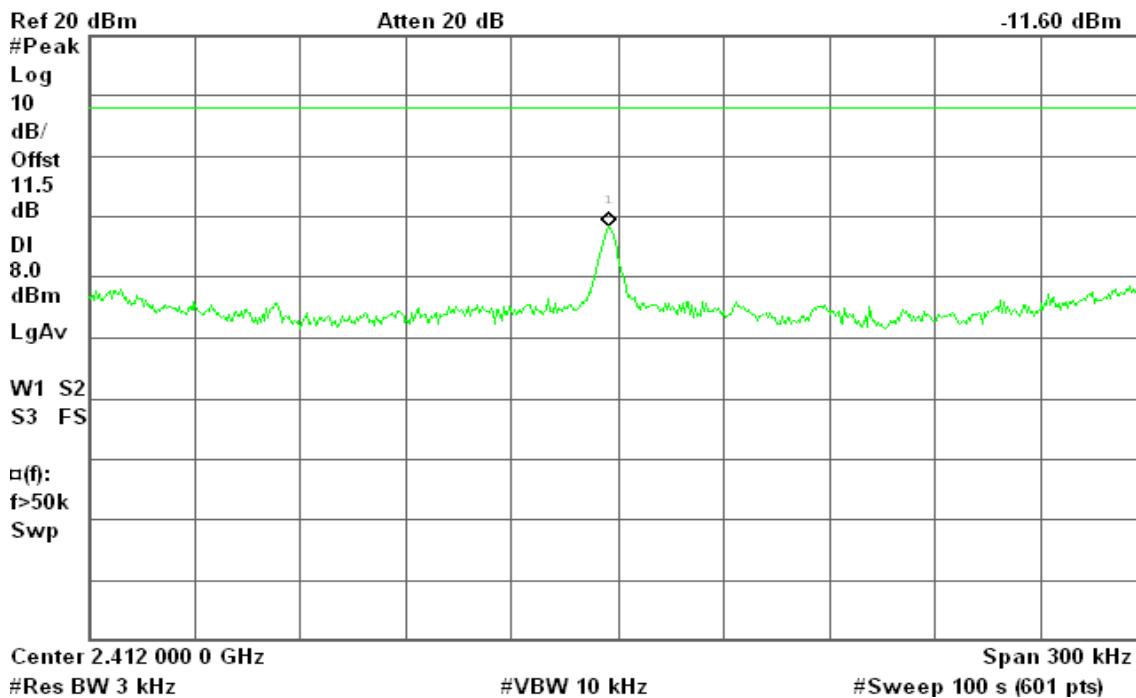

**PPSD (CH Mid)**

\* Agilent 16:02:02 Mar 31, 2008

R T

Mkr1 2.436 997 5 GHz

-13.11 dBm

Ref 20 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

11.5

dB

DI

8.0

dBm

LgAv

M1 S2

S3 FC

 $\square(f)$ :

f&gt;50k

Swp

Center 2.437 000 0 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 100 s (601 pts)

**PPSD (CH High)**

\* Agilent 15:52:40 Mar 31, 2008

R T

Mkr1 2.461 998 0 GHz

-11.79 dBm

Ref 20 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

11.5

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

 $\square(f)$ :

f&gt;50k

Swp

Center 2.462 000 0 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 100 s (601 pts)


**draft 802.11n Standard-20 MHz Channel mode / Chain 2****PPSD (CH Low)**

\* Agilent 14:58:21 Jul 7, 2008

R T

Mkr1 2.411 999 5 GHz

-9.21 dBm

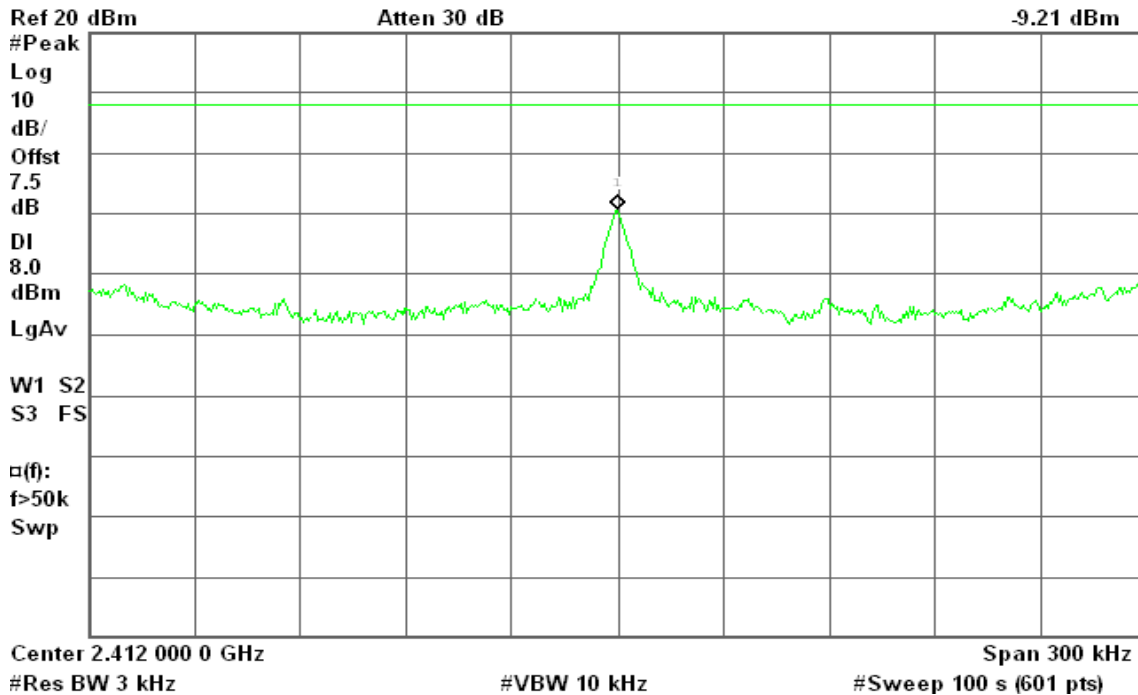
**PPSD (CH Mid)**

\* Agilent 15:08:15 Jul 7, 2008

R T

Mkr1 2.436 999 5 GHz

-9.35 dBm

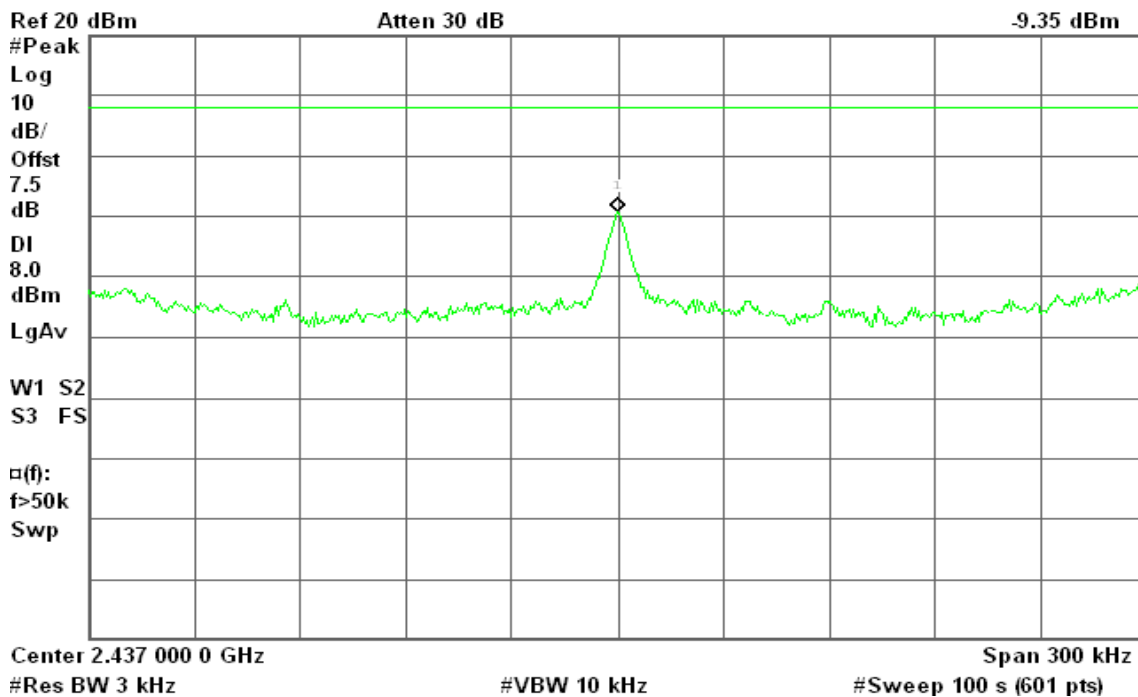



## PPSD (CH High)

Agilent 15:13:19 Jul 7, 2008

R T

Mkr1 2.462 000 0 GHz

-9.92 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7.5

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

□(f):

f>50k

Swp


Center 2.462 000 0 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 100 s (601 pts)

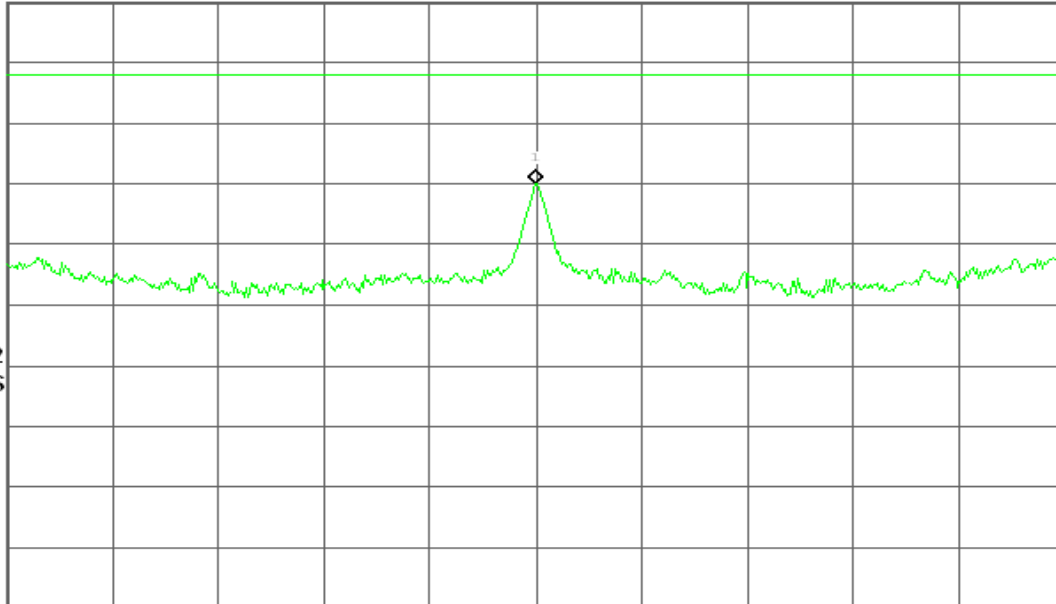


**draft 802.11n Wide-40 MHz Channel mode / Chain 0****PPSD (CH Low)**

\* Agilent 16:38:32 Mar 31, 2008

R T

Mkr1 2.421 997 5 GHz

-10.20 dBm

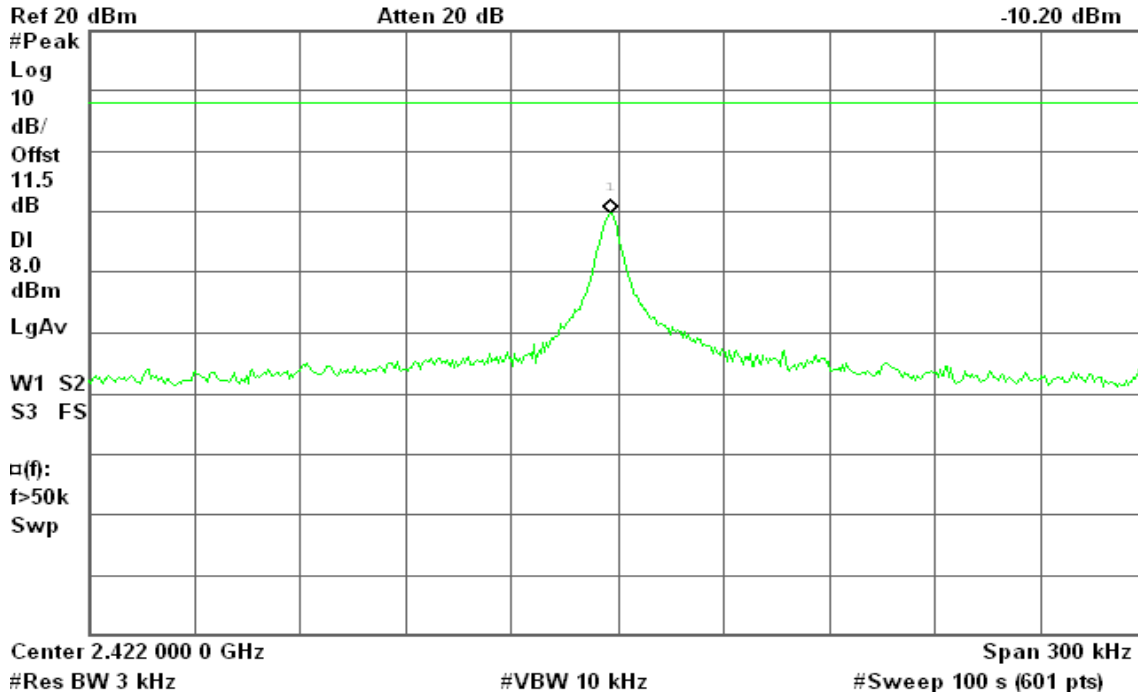
**PPSD (CH Mid)**

\* Agilent 16:34:02 Mar 31, 2008

R T

Mkr1 2.436 998 0 GHz


-9.15 dBm

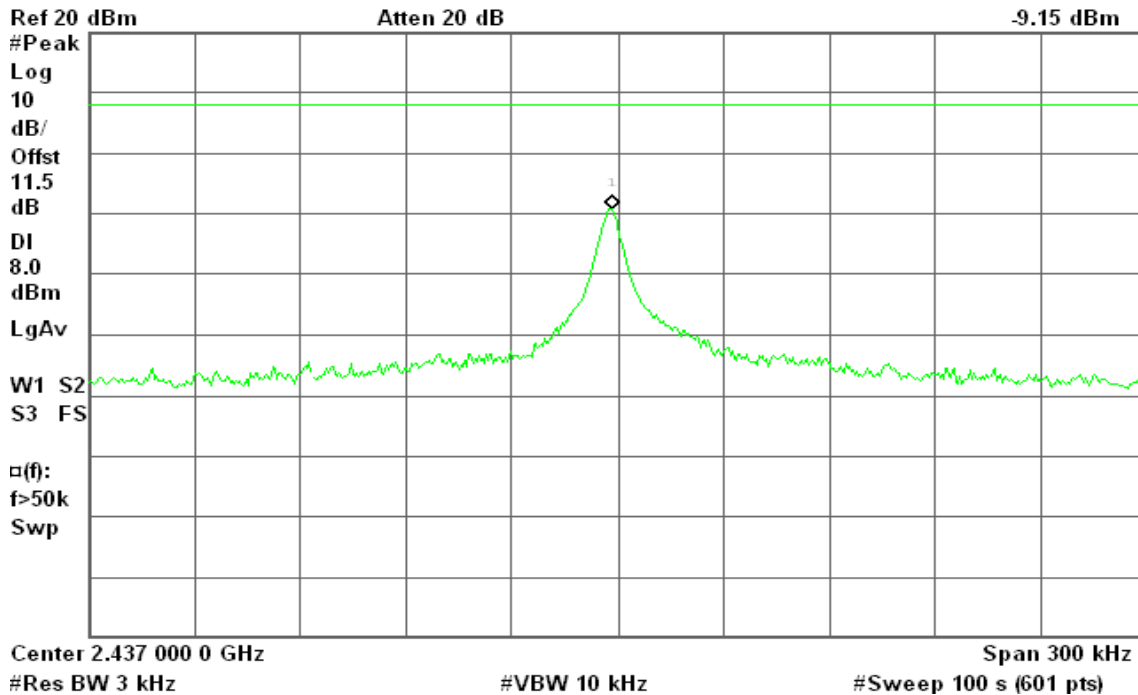

**PPSD (CH High)**


\* Agilent 16:29:28 Mar 31, 2008

R T

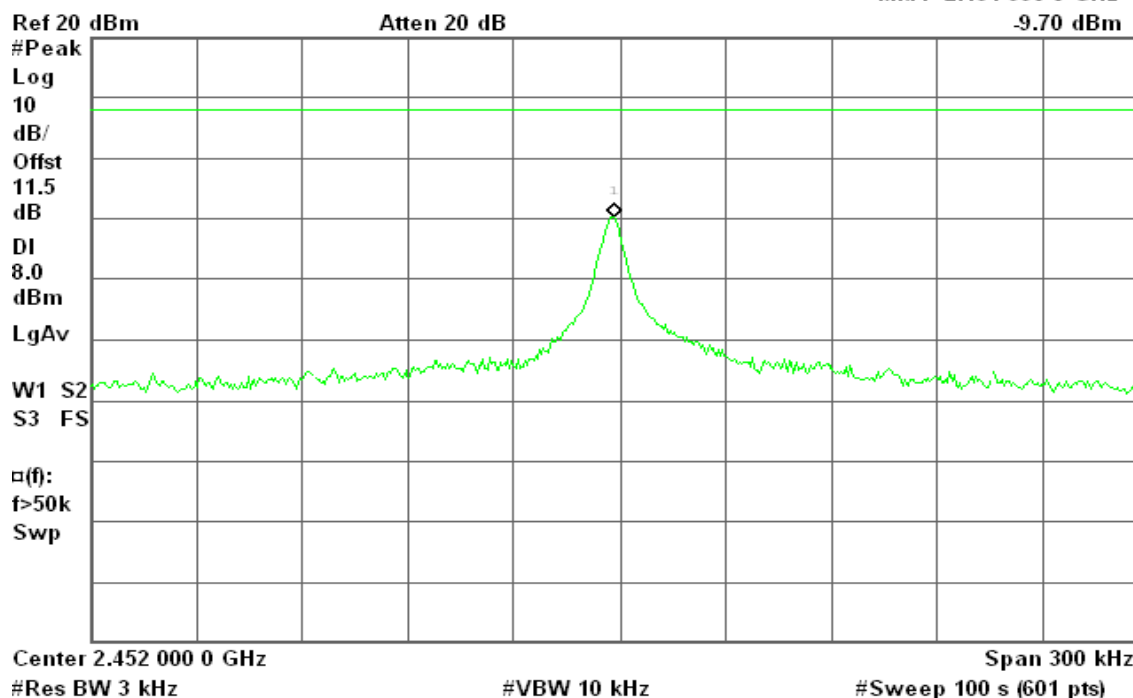Mkr1 2.451 998 0 GHz  
-9.70 dBm**draft 802.11n Wide-40 MHz Channel mode / Chain 1****PPSD (CH Low)**

\* Agilent 16:14:28 Mar 31, 2008

R T

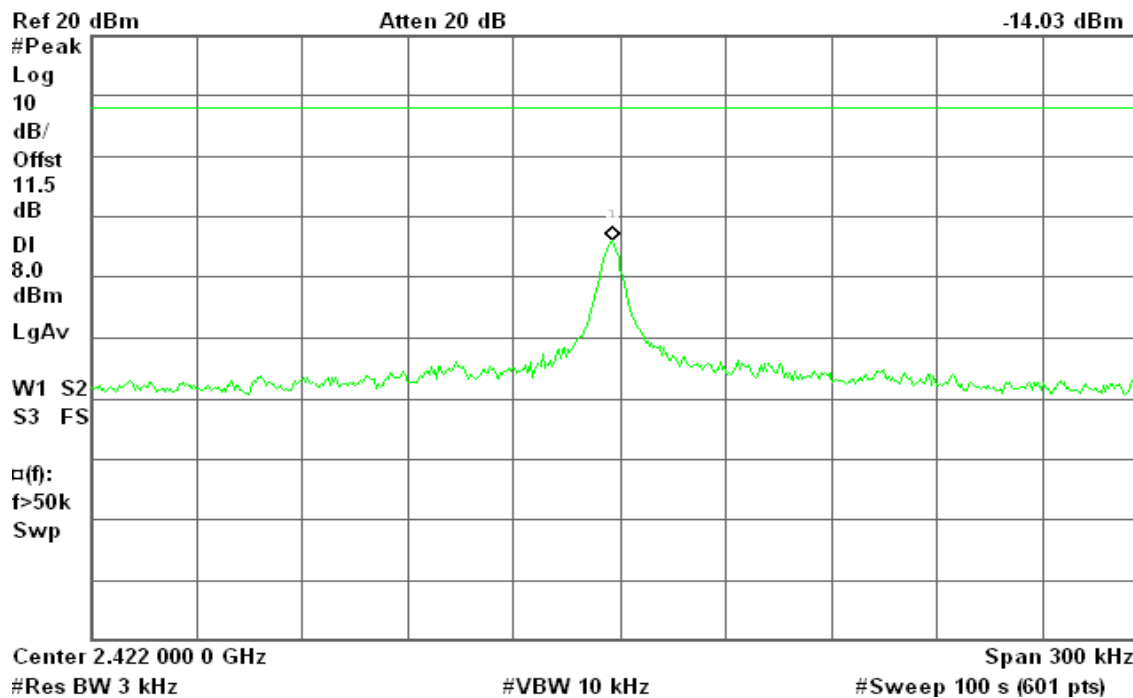Mkr1 2.421 997 5 GHz  
-14.03 dBm



## PPSD (CH Mid)

\* Agilent 16:19:47 Mar 31, 2008

R T

Mkr1 2.436 997 0 GHz

-13.98 dBm

Ref 20 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

11.5

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

□(f):

f&gt;50k

Swp

Center 2.437 000 0 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 100 s (601 pts)

## PPSD (CH High)

\* Agilent 16:24:25 Mar 31, 2008

R T

Mkr1 2.451 997 0 GHz

-13.88 dBm

Ref 20 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

11.5

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

□(f):

f&gt;50k

Swp

Center 2.452 000 0 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 100 s (601 pts)




**draft 802.11n Wide-40 MHz Channel mode / Chain 2****PPSD (CH Low)**

\* Agilent 16:26:20 Jul 7, 2008

R T

Mkr1 2.422 000 5 GHz

-9.69 dBm

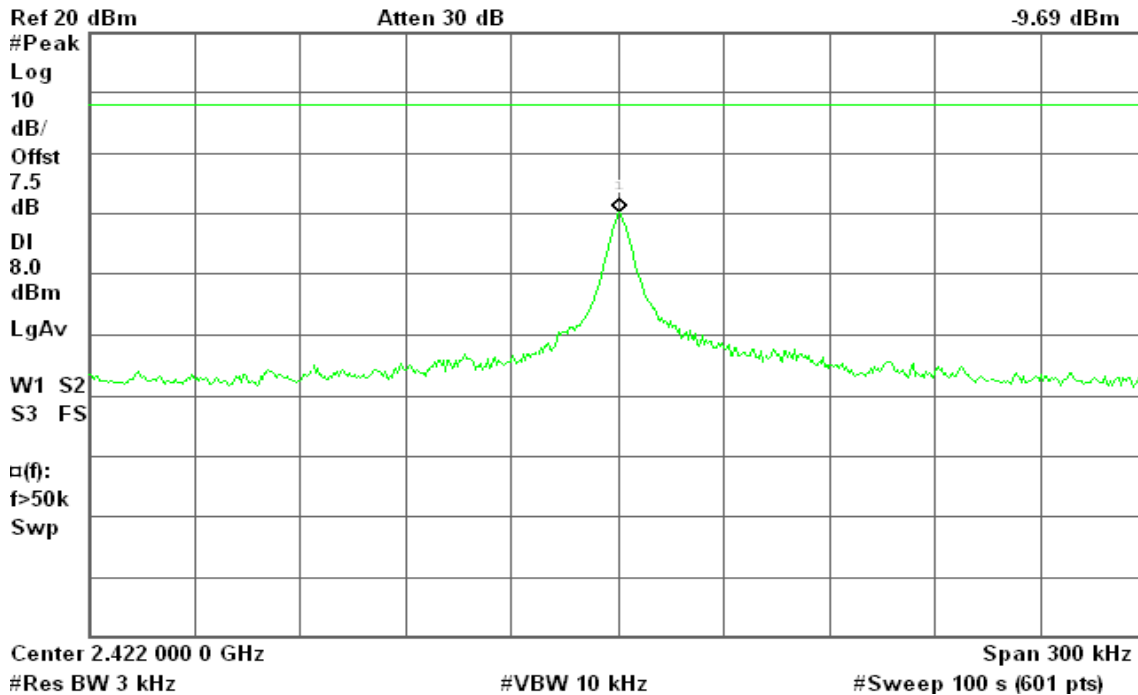
**PPSD (CH Mid)**

\* Agilent 16:35:45 Jul 7, 2008

R T

Mkr1 2.437 000 0 GHz

-9.82 dBm

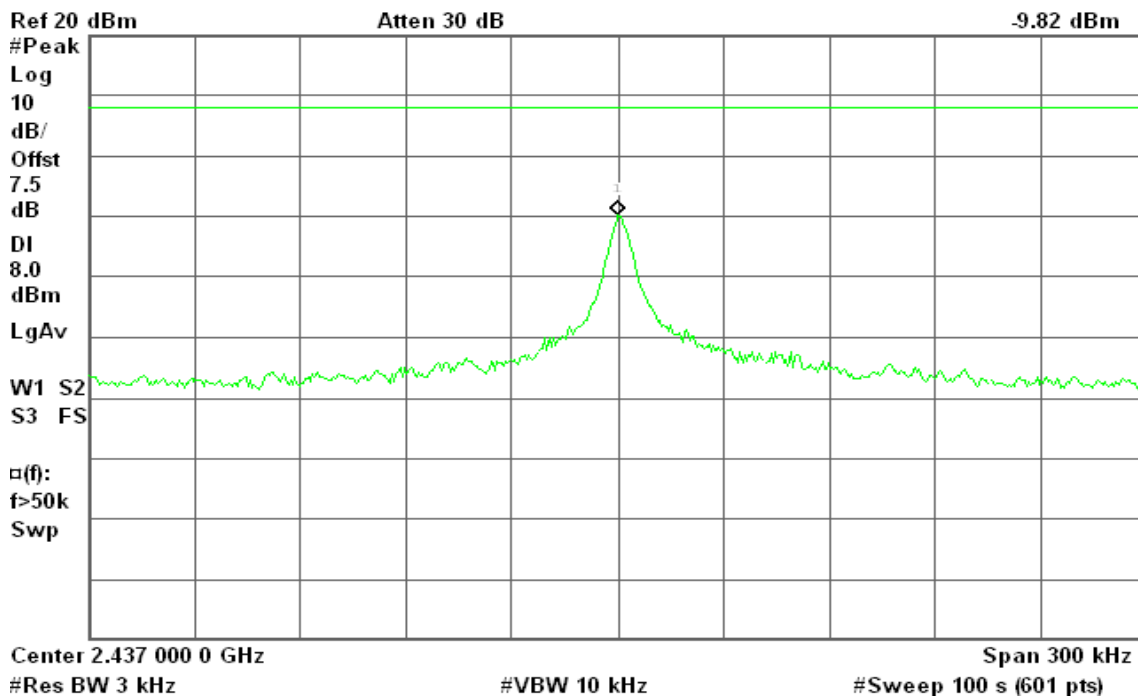



## PPSD (CH High)

Agilent 16:50:10 Jul 7, 2008

R T

Mkr1 2.452 000 5 GHz

-10.07 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7.5

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

□(f):

f>50k

Swp


Center 2.452 000 0 GHz



#Res BW 3 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 100 s (601 pts)

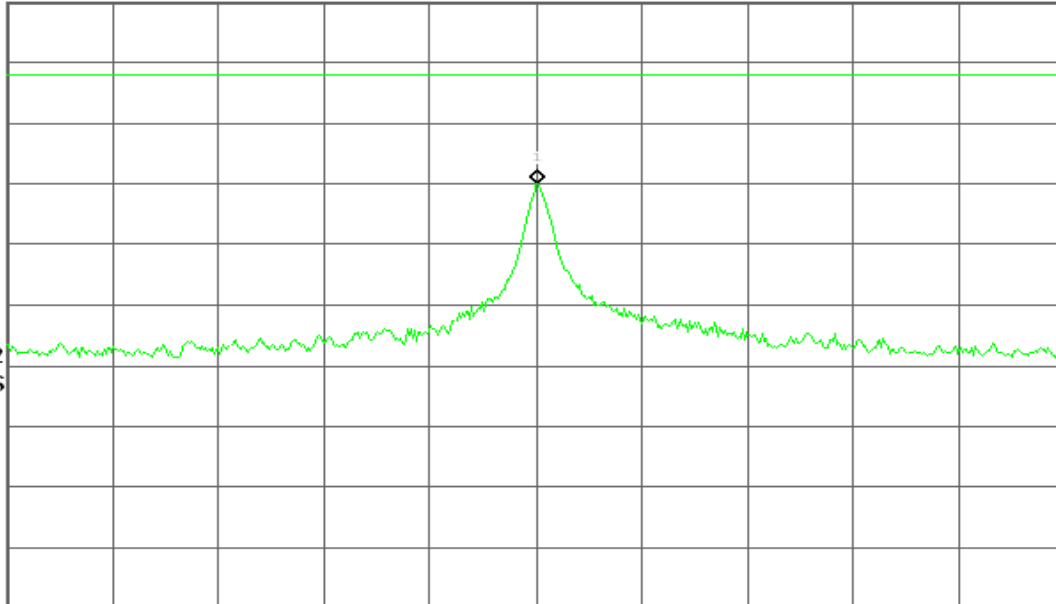

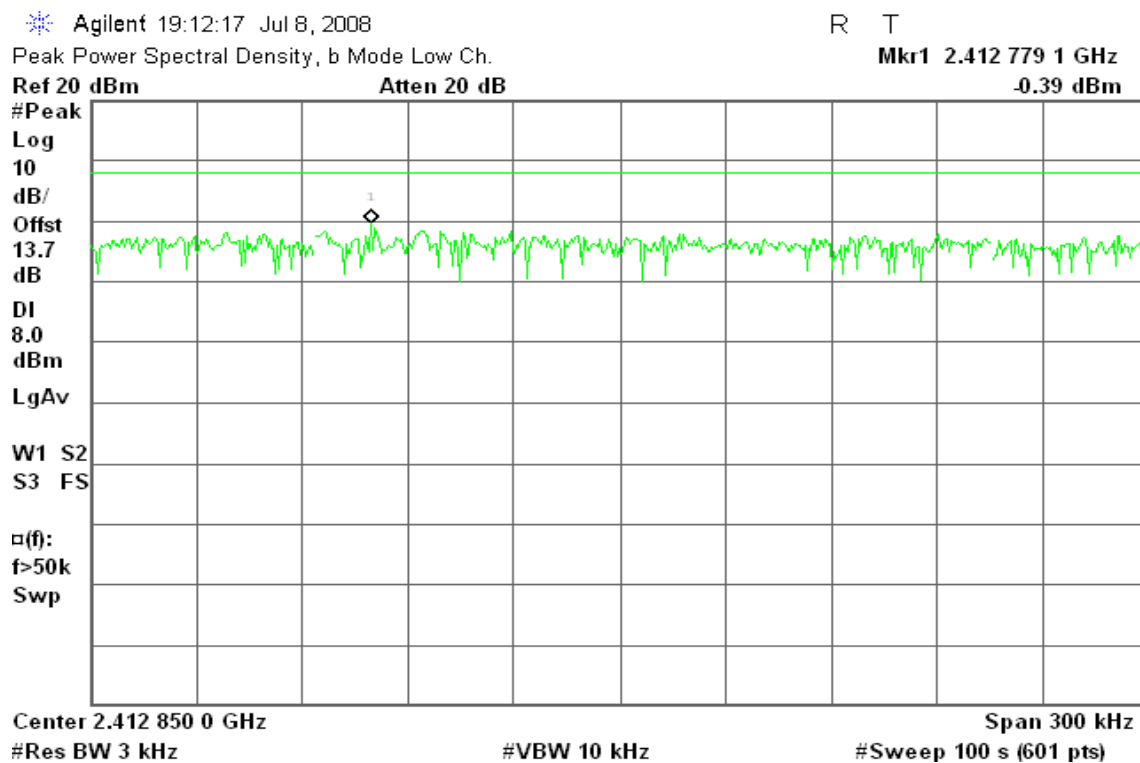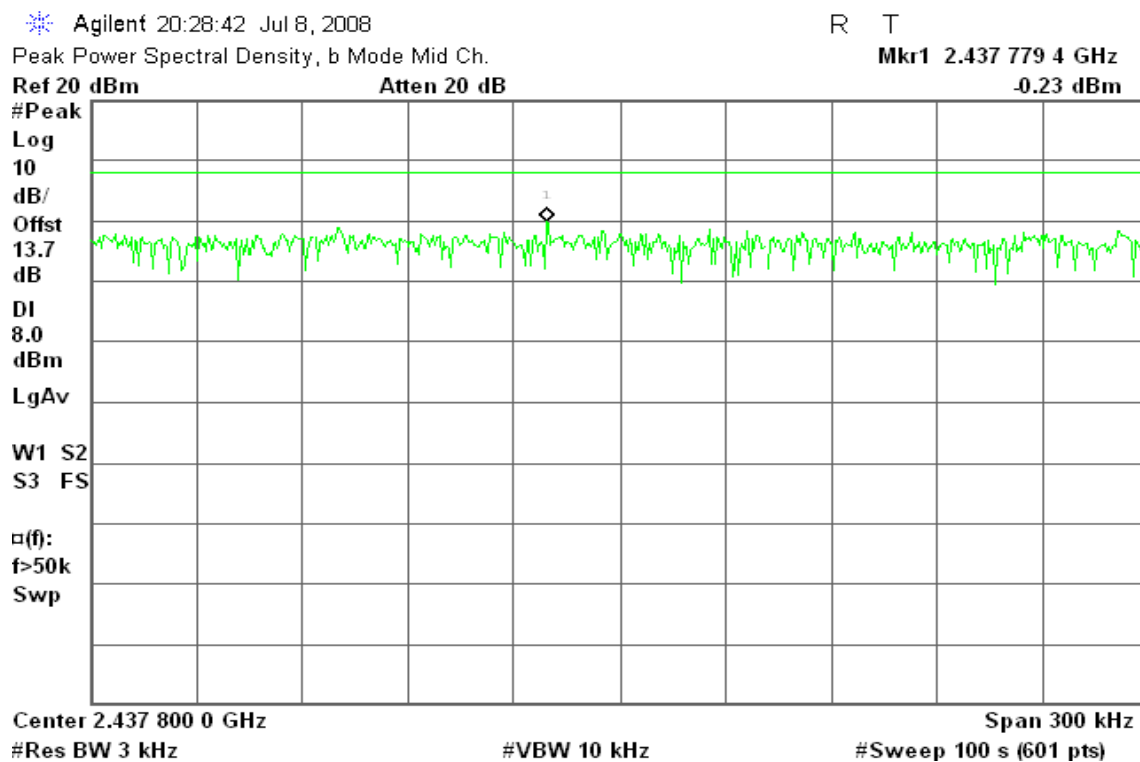**IEEE 802.11b mode with combiner****PPSD (CH Low)****PPSD (CH Mid)**

**PPSD (CH High)**

\* Agilent 20:50:58 Jul 8, 2008

R T


Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.459 001 7 GHz

Ref 20 dBm

Atten 20 dB

-2.70 dBm

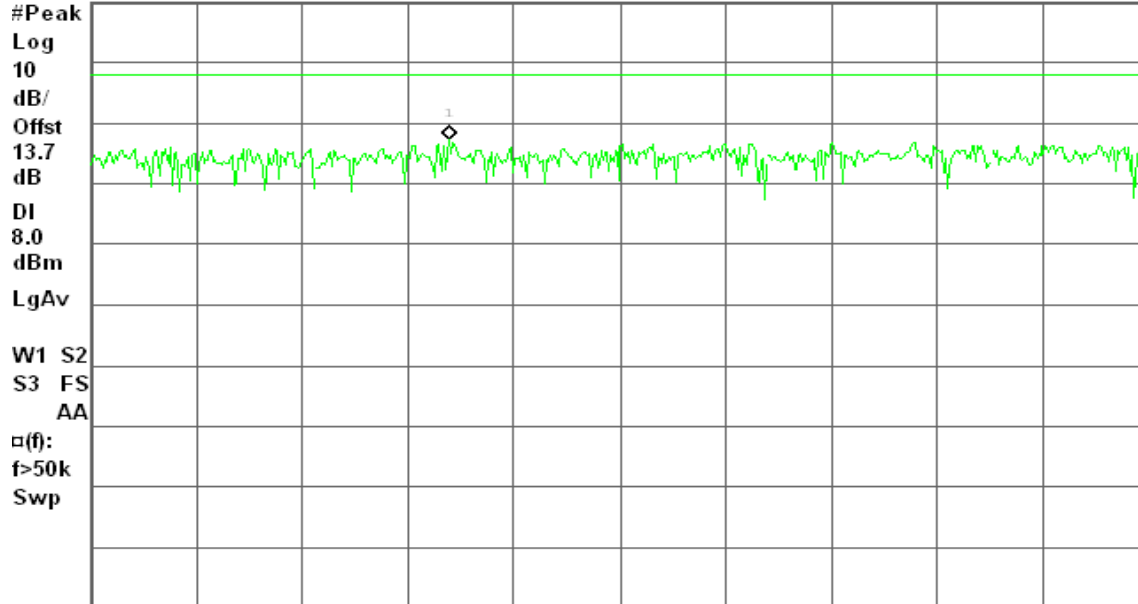

Center 2.459 050 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

**IEEE 802.11g mode with combiner****PPSD (CH Low)**

\* Agilent 18:36:55 Jul 8, 2008

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.412 001 0 GHz

Ref 20 dBm

Atten 20 dB

-0.22 dBm

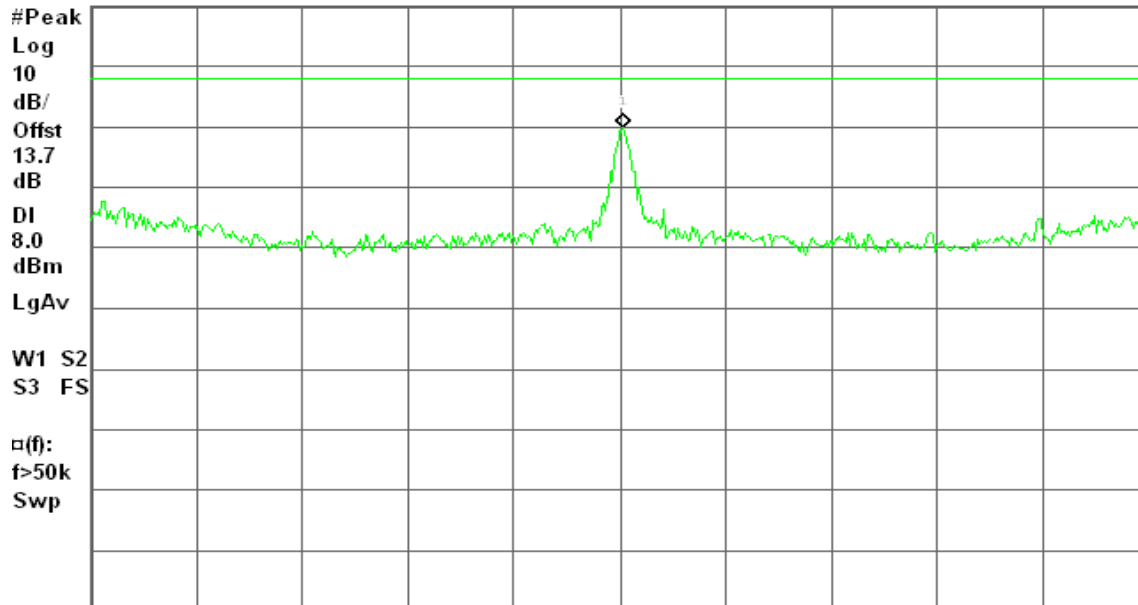



Center 2.412 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

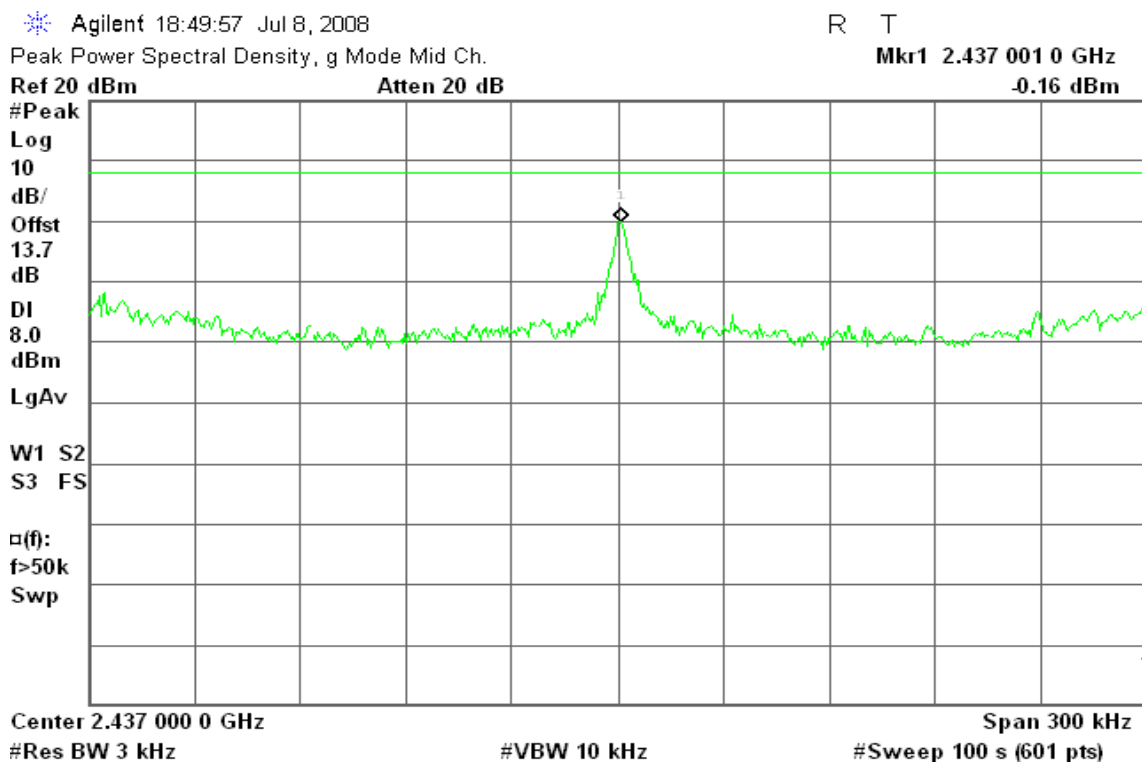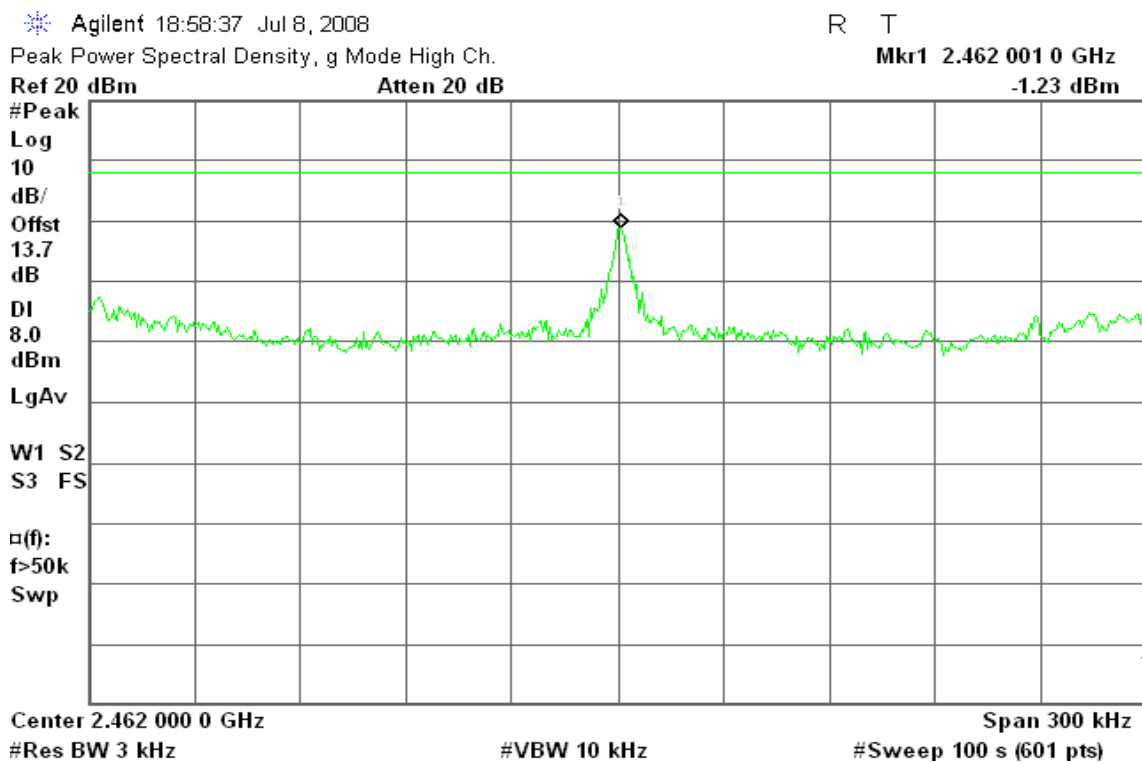**PPSD (CH Mid)****PPSD (CH High)**


**draft 802.11n Standard-20 MHz Channel mode with combiner****PPSD (CH Low)**

\* Agilent 17:51:32 Jul 7, 2008

R T

Mkr1 2.405 752 3 GHz

-6.77 dBm

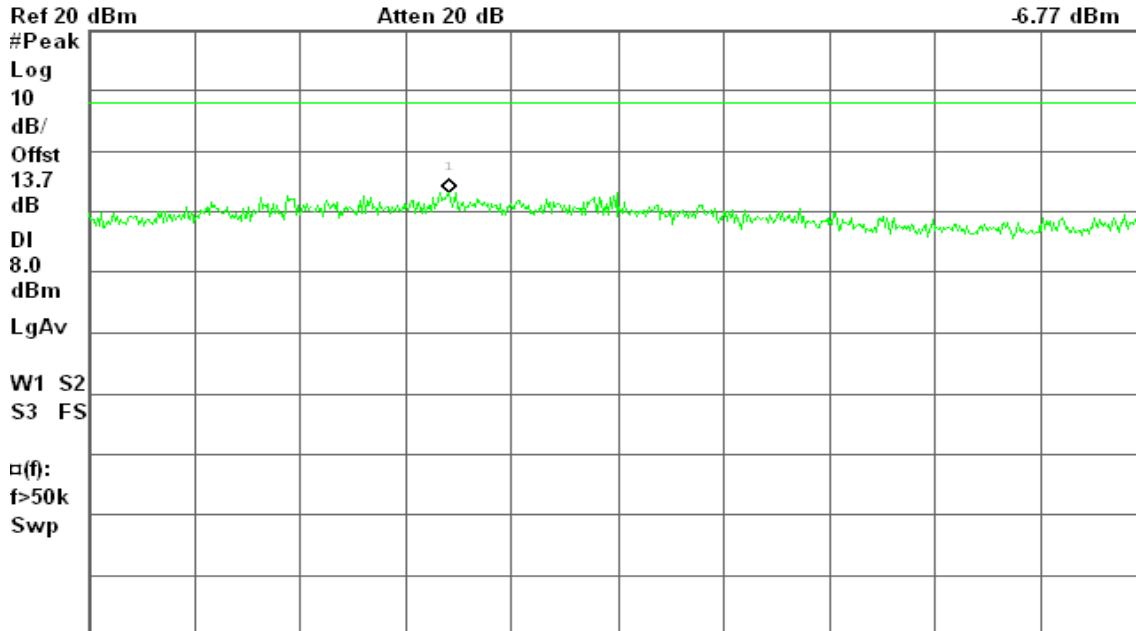

Center 2.405 800 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)


**PPSD (CH Mid)**

\* Agilent 17:58:18 Jul 7, 2008

R T

Mkr1 2.437 000 5 GHz

-2.25 dBm

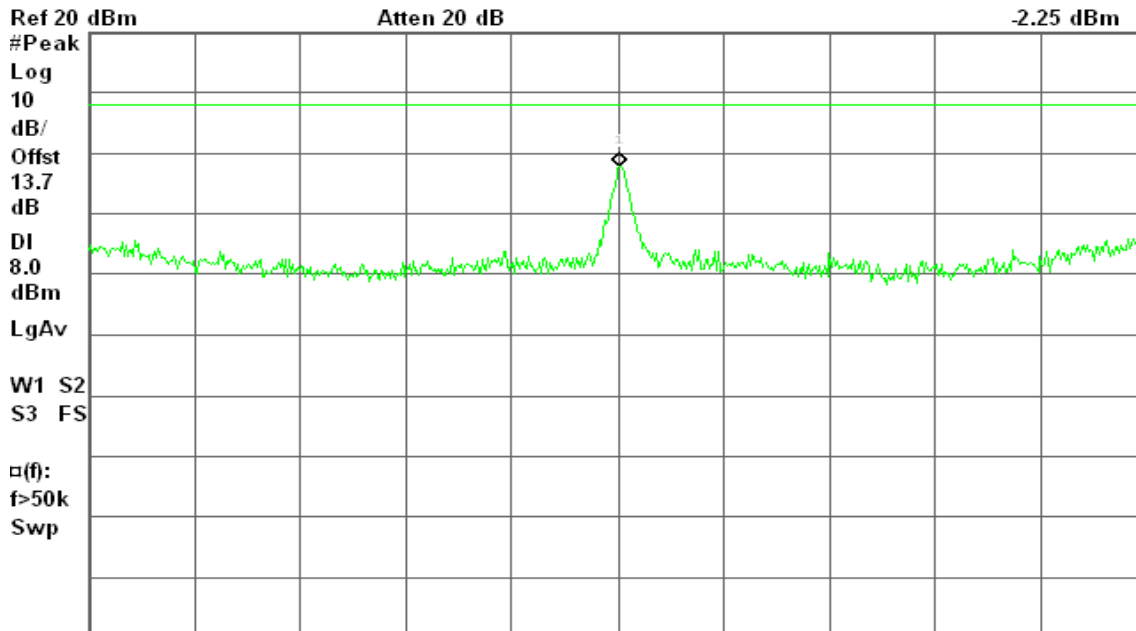

Center 2.437 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)


**PPSD (CH High)**

\* Agilent 18:10:20 Jul 7, 2008

R T

Mkr1 2.462 000 5 GHz

-2.29 dBm

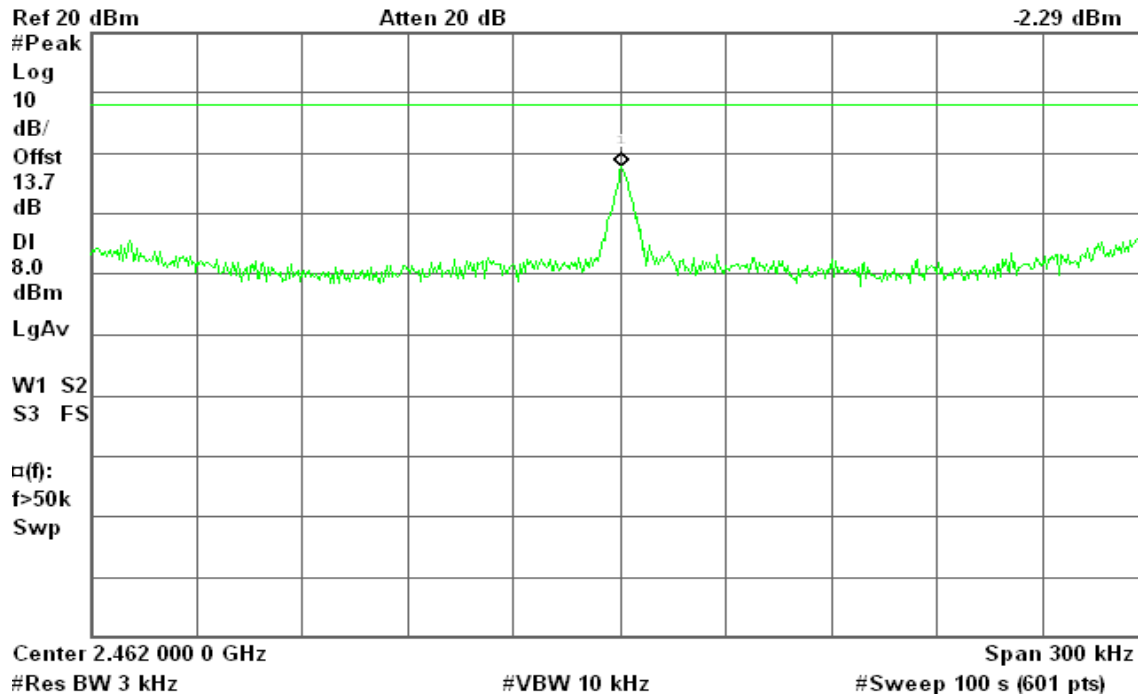
**draft 802.11n Wide-40 MHz Channel mode with combiner****PPSD (CH Low)**

\* Agilent 17:16:22 Jul 7, 2008

R T

Mkr1 2.422 000 5 GHz

-3.23 dBm

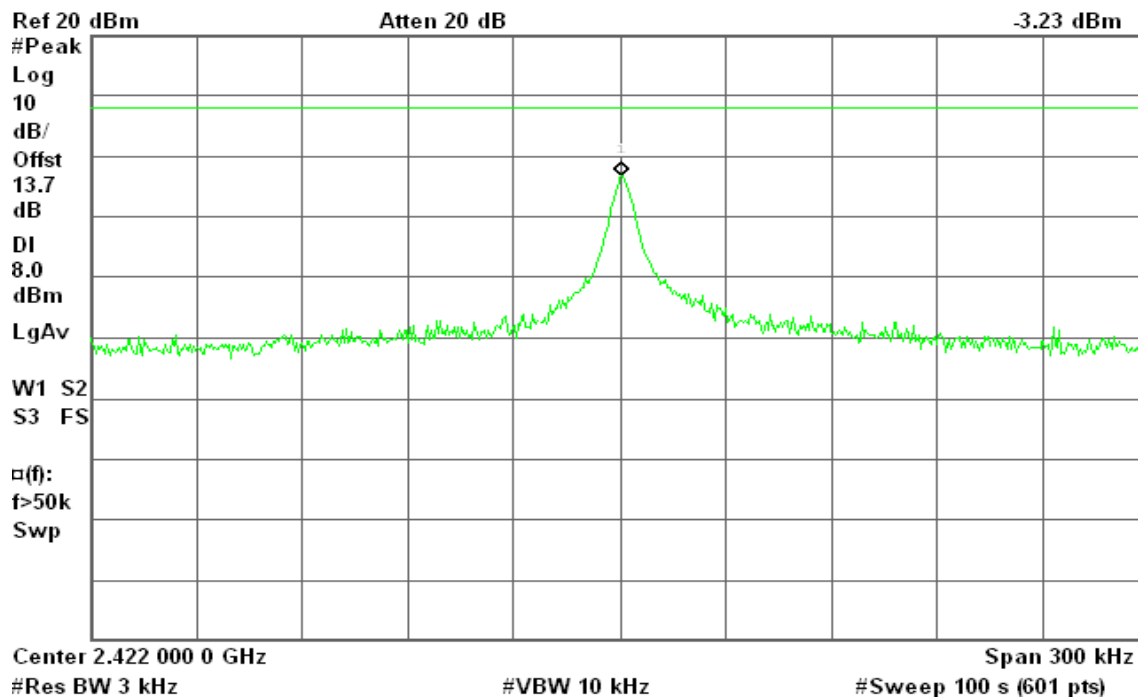



## PPSD (CH Mid)

\* Agilent 17:30:54 Jul 7, 2008

R T

Mkr1 2.437 001 0 GHz

-2.97 dBm

Ref 20 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

13.7

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

 $\square(f)$ :

f&gt;50k

Swp

Center 2.437 000 0 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 100 s (601 pts)

## PPSD (CH High)

\* Agilent 17:40:06 Jul 7, 2008

R T

Mkr1 2.452 001 0 GHz

-3.21 dBm

Ref 20 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

13.7

dB

DI

8.0

dBm

LgAv

W1 S2

S3 FS

 $\square(f)$ :

f&gt;50k

Swp

Center 2.452 000 0 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 300 kHz

#Sweep 100 s (601 pts)






## 7.6 SPURIOUS EMISSIONS

### 7.6.1 Conducted Measurement

#### **LIMIT**

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### **Test Configuration**



#### **TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### **TEST RESULTS**

*No non-compliance noted*



## Test Plot

### IEEE 802.11b mode / Chain 0

#### CH Low

\* Agilent 15:16:16 Mar 31, 2008

R T

Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

1.94 dBm

#Peak

Log

10

dB/

Offst

11.5

dB

DI

-18.1

dBm

LgAv


V1 S2

S3 FC

a(f):

FTun

Swp

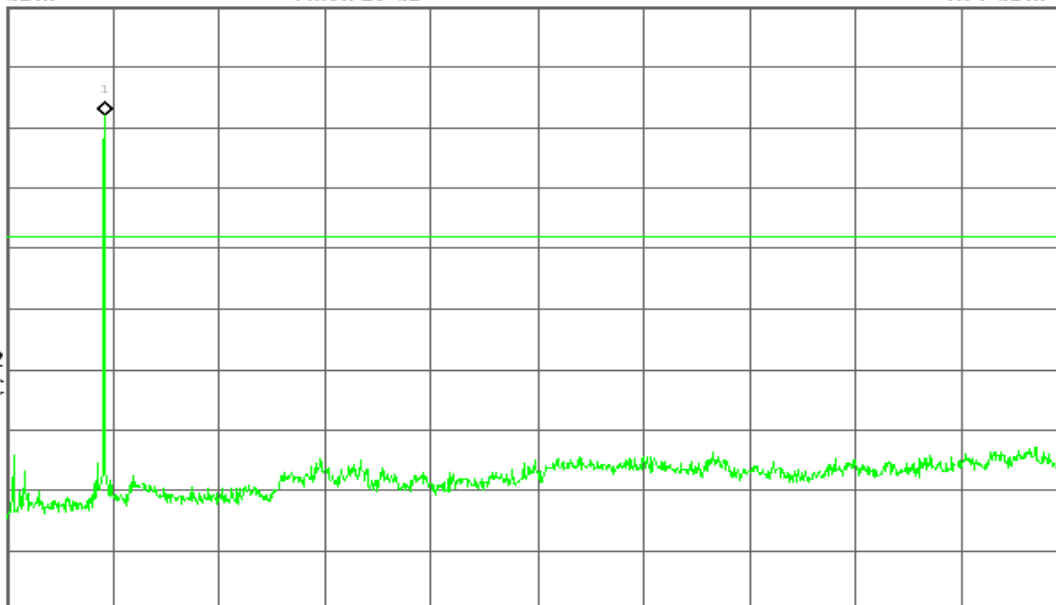

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

#### CH Mid

\* Agilent 15:21:26 Mar 31, 2008

R T

Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

2.02 dBm

#Peak

Log

10

dB/

Offst

11.5

dB

DI

-18.0

dBm

LgAv


V1 S2

S3 FC

a(f):

FTun

Swp

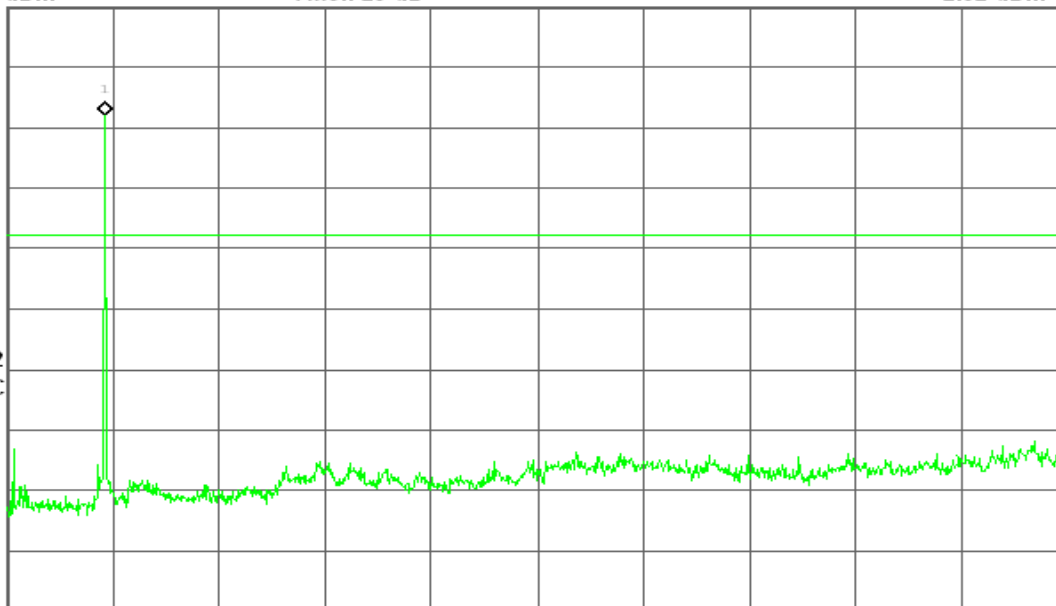

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



## CH High

\* Agilent 15:26:54 Mar 31, 2008

R T


Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

1.98 dBm

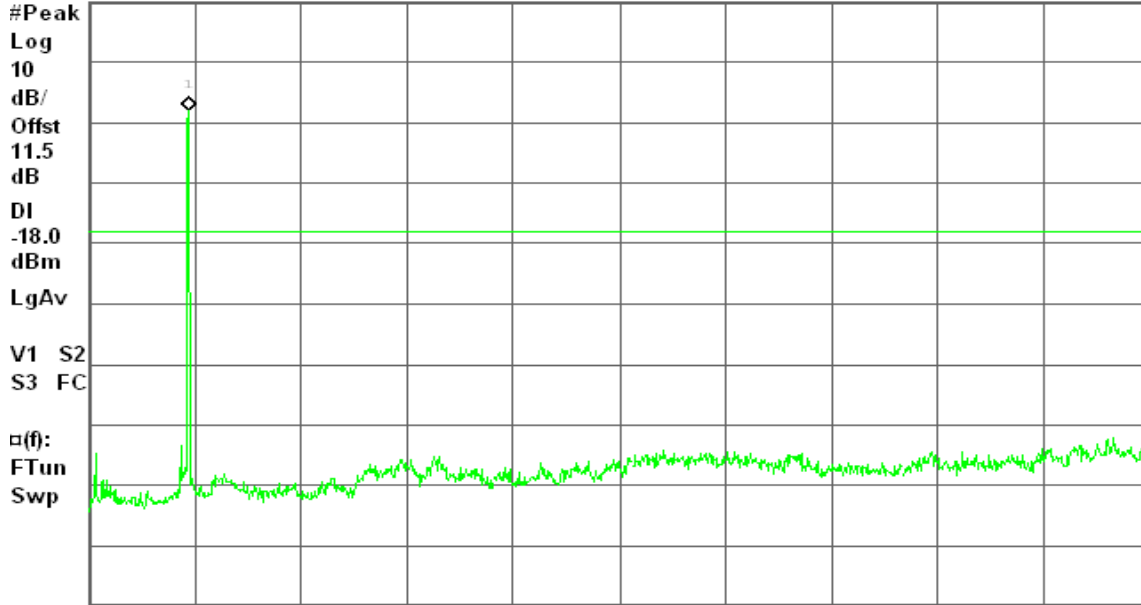

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

## IEEE 802.11b mode / Chain 1

### CH Low

\* Agilent 15:17:03 Jun 13, 2008

R T


Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 30 dB

0.09 dBm

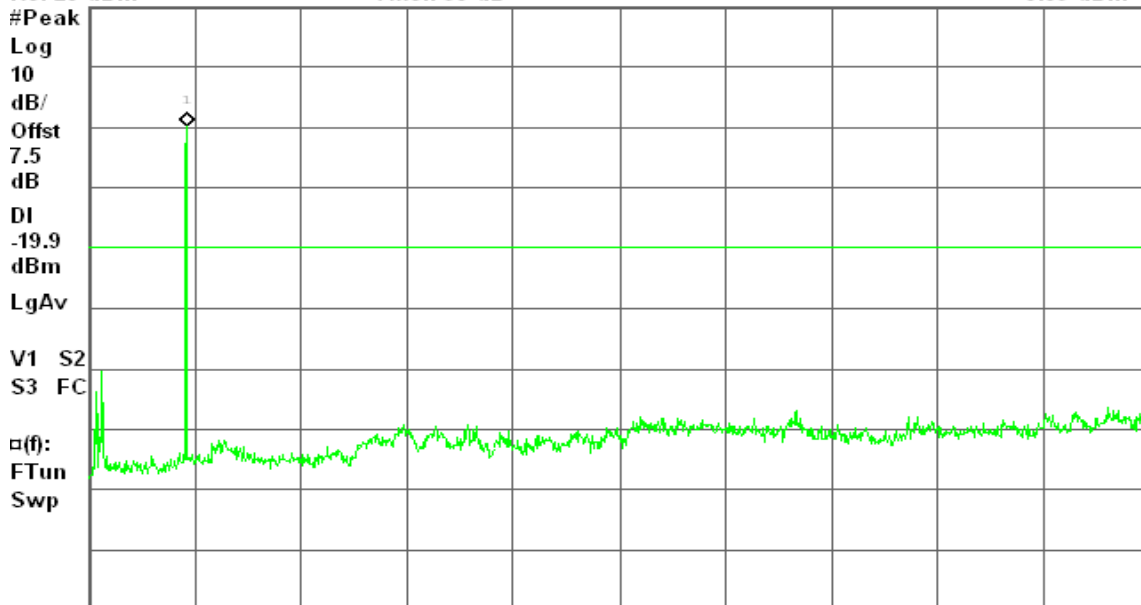

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**CH Mid**

\* Agilent 15:24:47 Jun 13, 2008

R T


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 30 dB

1.24 dBm

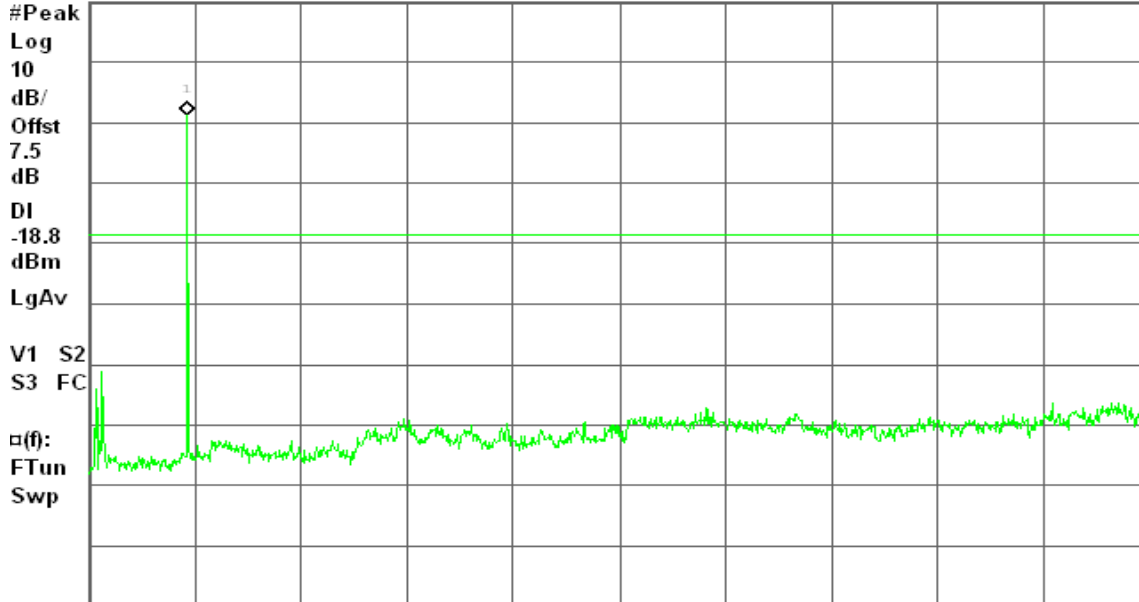

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**CH High**

\* Agilent 15:30:46 Jun 13, 2008

R T


Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 30 dB

-0.32 dBm

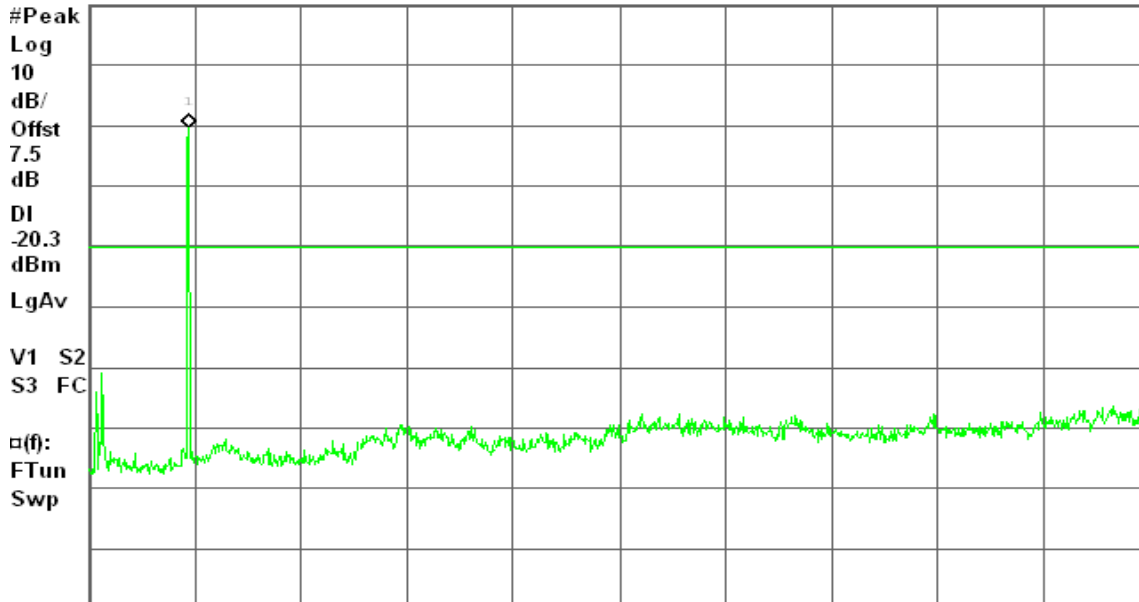

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**IEEE 802.11b mode / Chain 2****CH Low**

\* Agilent 17:22:59 Jul 8, 2008

R T


Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 30 dB

0.56 dBm

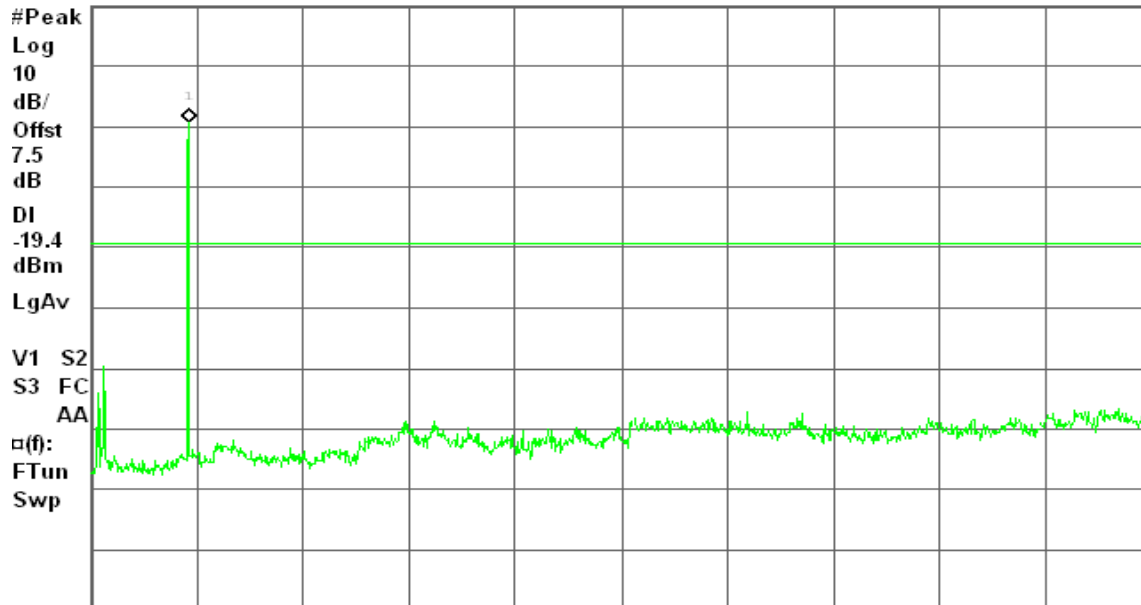

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**CH Mid**

\* Agilent 17:33:38 Jul 8, 2008

R T


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 30 dB

2.71 dBm

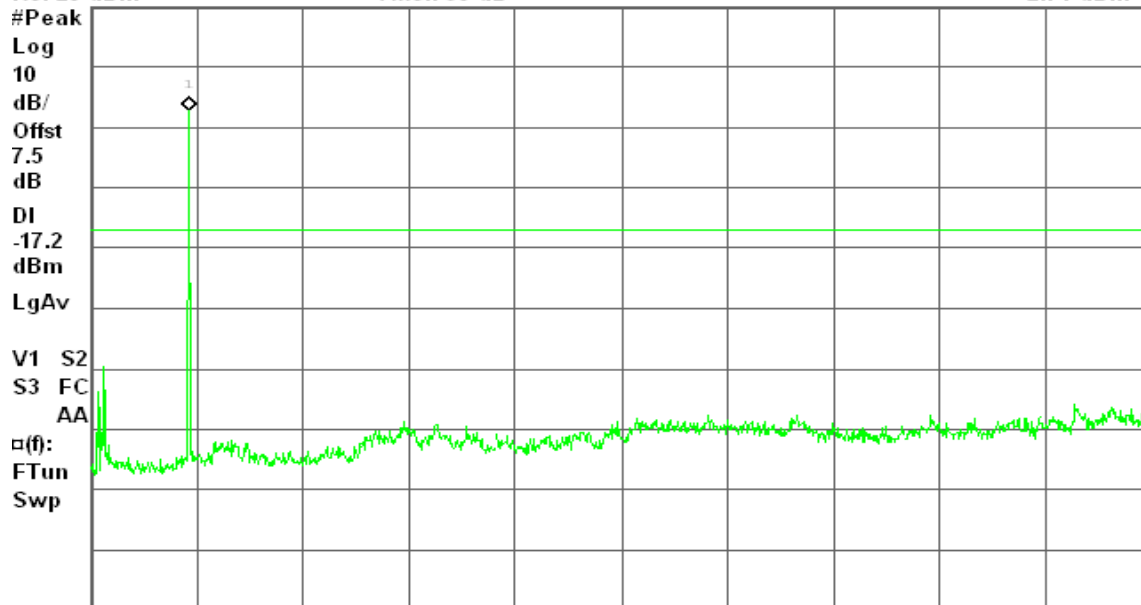

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**CH High**

\* Agilent 17:42:34 Jul 8, 2008

R T

Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 30 dB

1.50 dBm

#Peak

Log

10

dB/

Offst

7.5

dB

DI

-18.5

dBm

LgAv

V1 S2


S3 FC

AA

α(f):

FTun

Swp

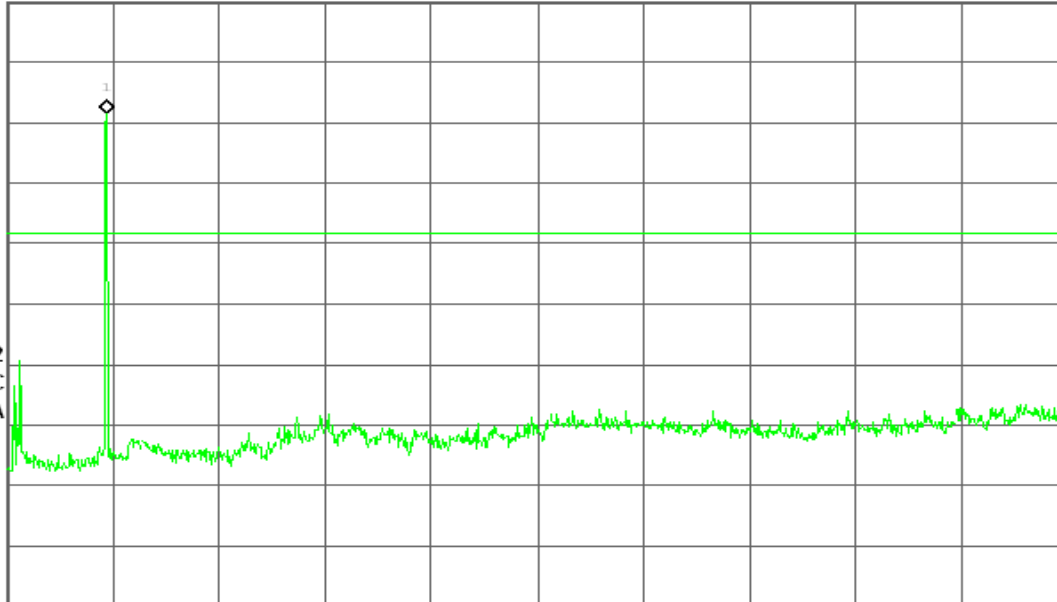

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**IEEE 802.11g mode / Chain 0****CH Low**

Agilent 15:05:30 Mar 31, 2008

R T


Spurious, g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

Mkr1 2.42 GHz

-2.94 dBm

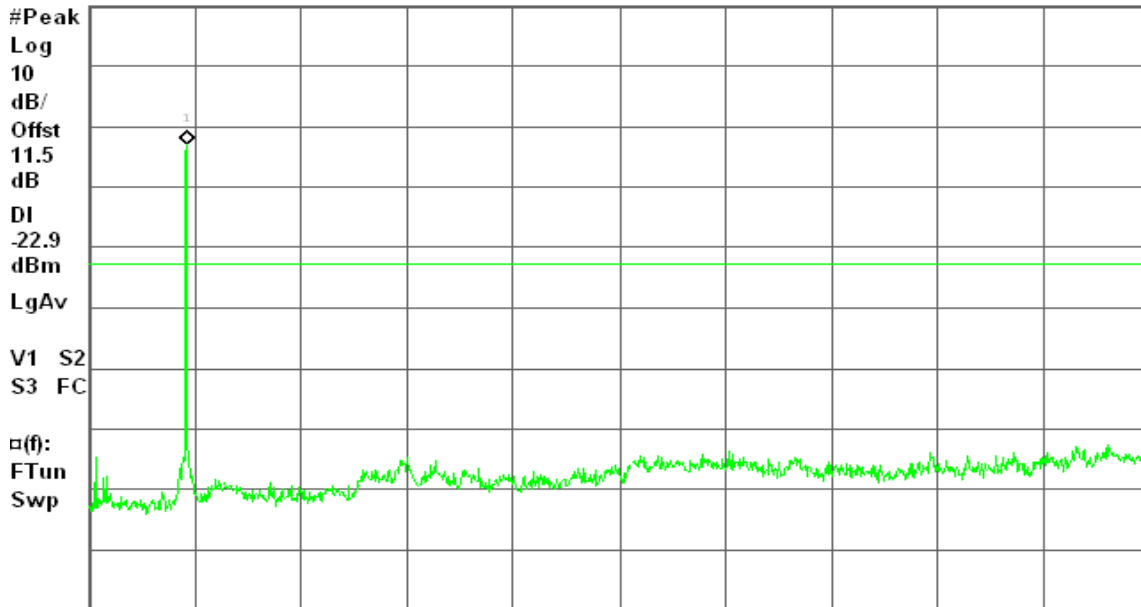

Center 13.02 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 25.97 GHz

Sweep 3.131 s (1001 pts)

**CH Mid**

Agilent 15:00:55 Mar 31, 2008

R T


Spurious, g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

Mkr1 2.45 GHz

-3.76 dBm

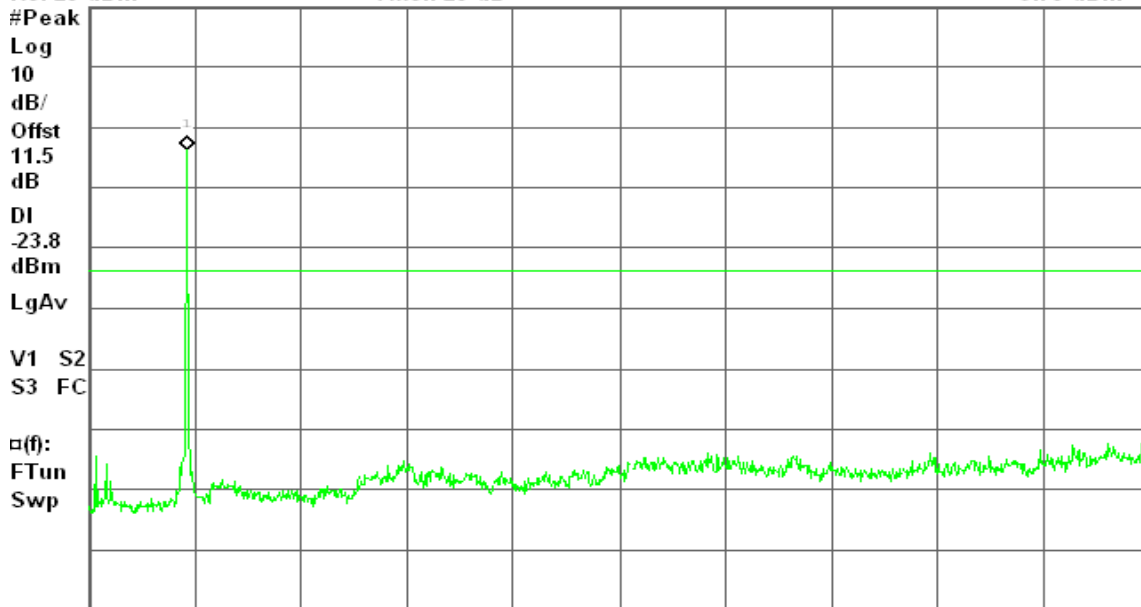

Center 13.02 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 25.97 GHz

Sweep 3.131 s (1001 pts)

**CH High**

\* Agilent 15:10:52 Mar 31, 2008

R T


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

-2.58 dBm

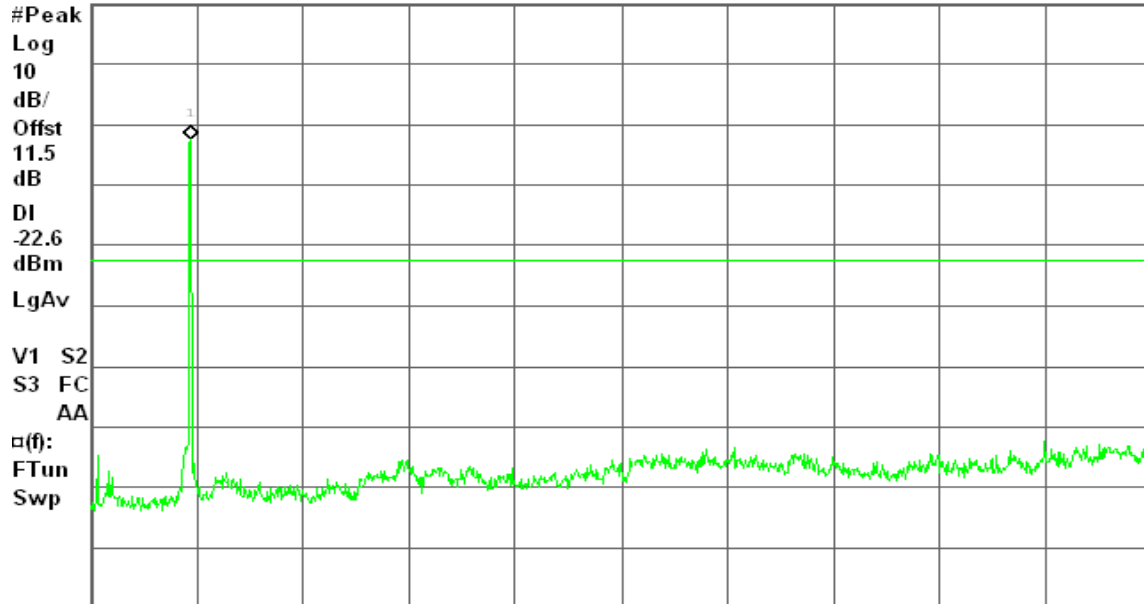

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**IEEE 802.11g mode / Chain 1****CH Low**

\* Agilent 16:48:11 Jun 13, 2008

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 30 dB

-4.70 dBm

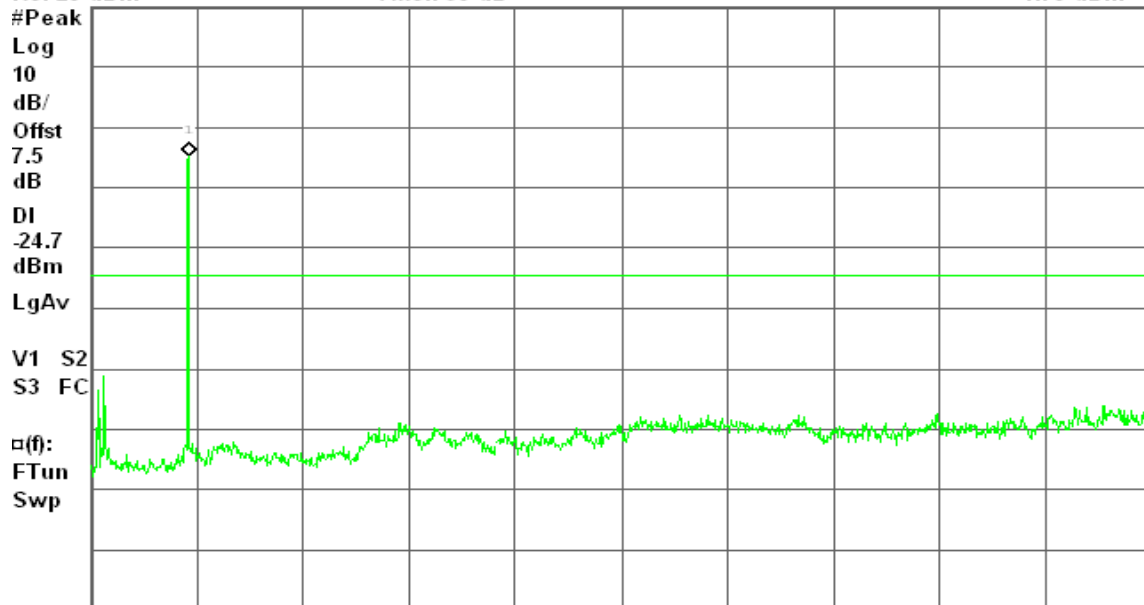

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)





## CH Mid

\* Agilent 16:54:02 Jun 13, 2008

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 30 dB

-4.92 dBm

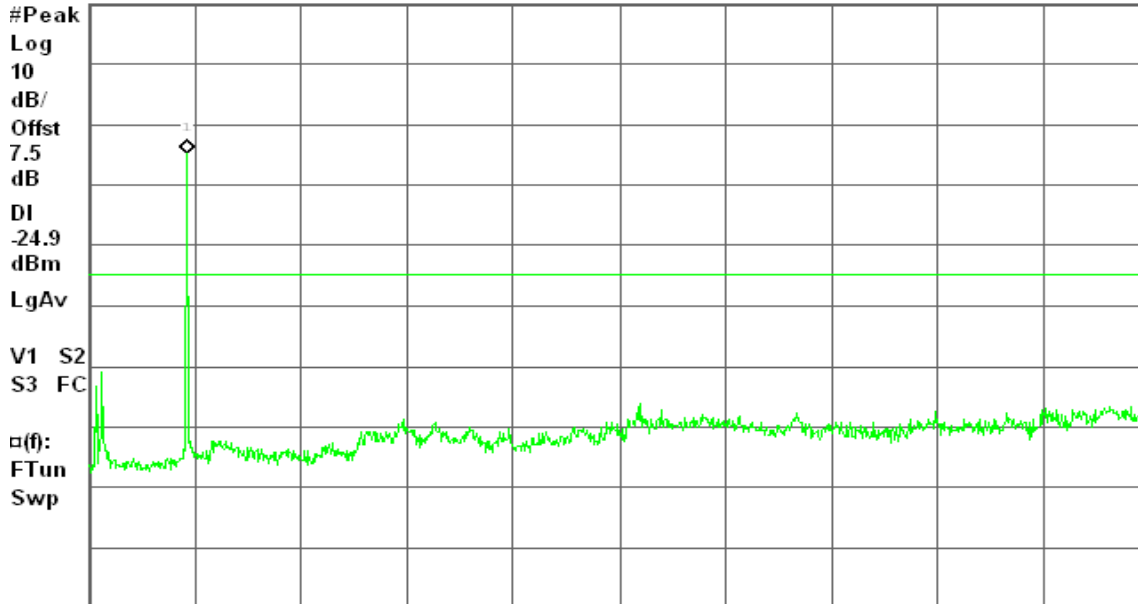

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

## CH High

\* Agilent 16:58:53 Jun 13, 2008

R T


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 30 dB

-4.48 dBm

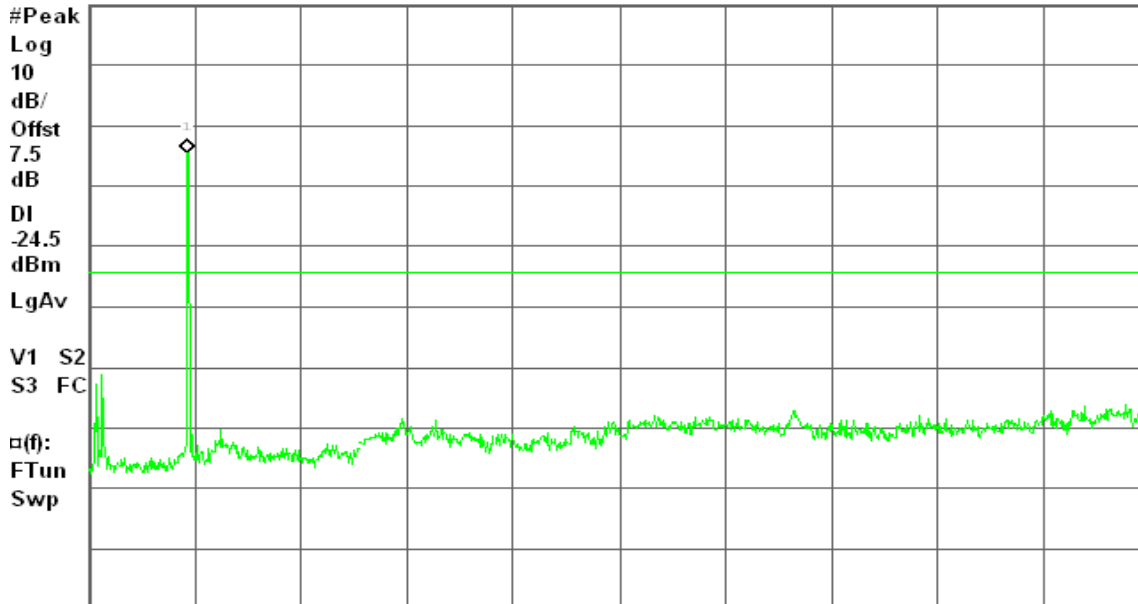

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**IEEE 802.11g mode / Chain 2****CH Low**

Agilent 17:57:22 Jul 8, 2008

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 30 dB

-2.92 dBm

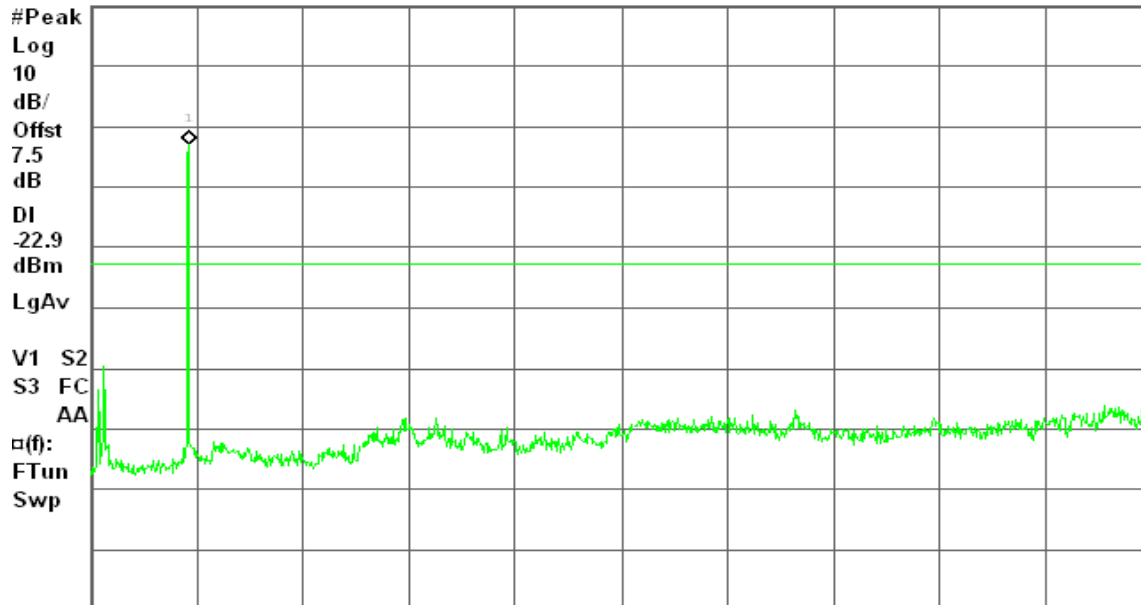

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**CH Mid**

Agilent 18:06:27 Jul 8, 2008

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 30 dB

-2.98 dBm

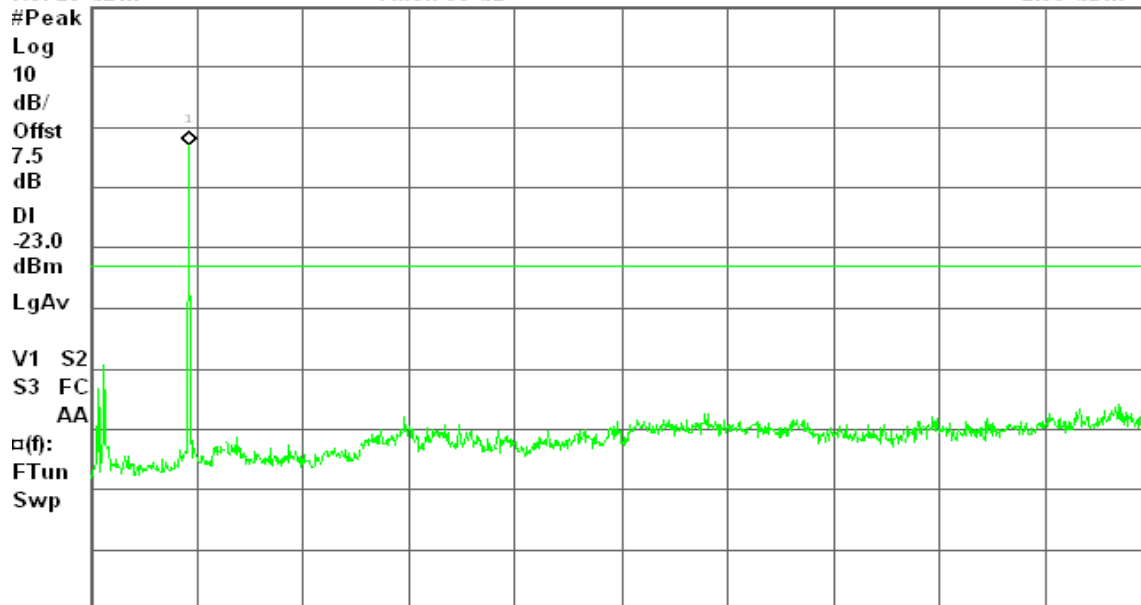

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**CH High**

\* Agilent 18:17:50 Jul 8, 2008

R T

Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 30 dB

-3.09 dBm

#Peak

Log

10

dB/

Offst

7.5

dB

DI

-23.1

dBm

LgAv

V1 S2


S3 FC

AA

α(f):

FTun

Swp

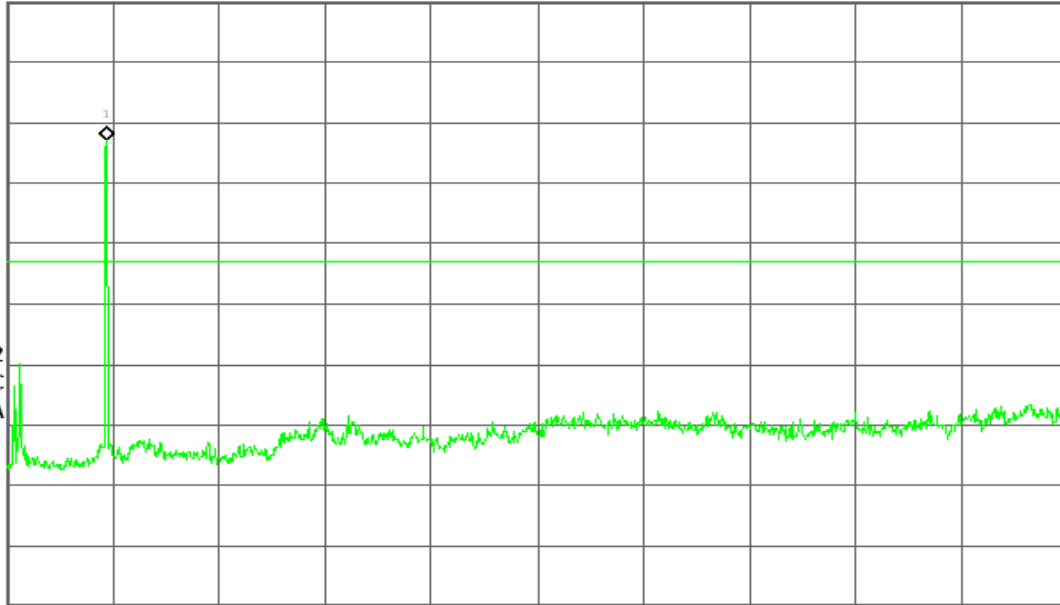

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz


#VBW 100 kHz

Sweep 3.131 s (1001 pts)

**draft 802.11n Standard-20 MHz Channel mode / Chain 0****CH Low**


\* Agilent 15:37:50 Mar 31, 2008

R T

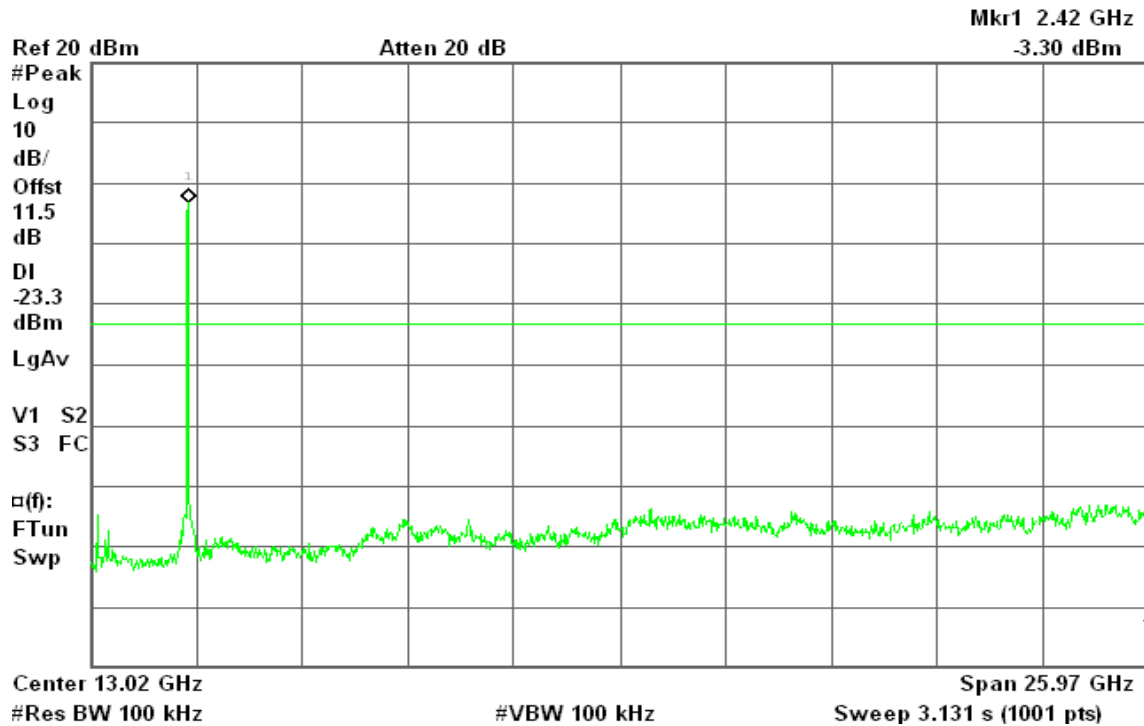**CH Mid**

\* Agilent 15:42:37 Mar 31, 2008


R T

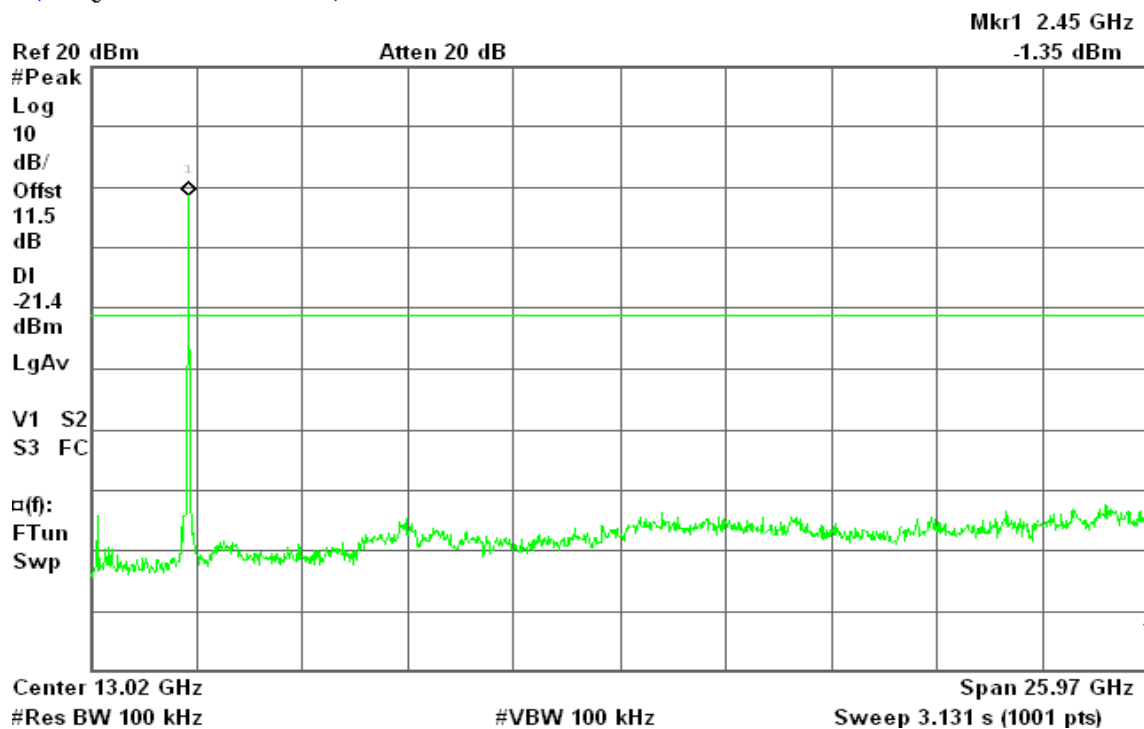

**CH High**


\* Agilent 15:47:15 Mar 31, 2008

R T

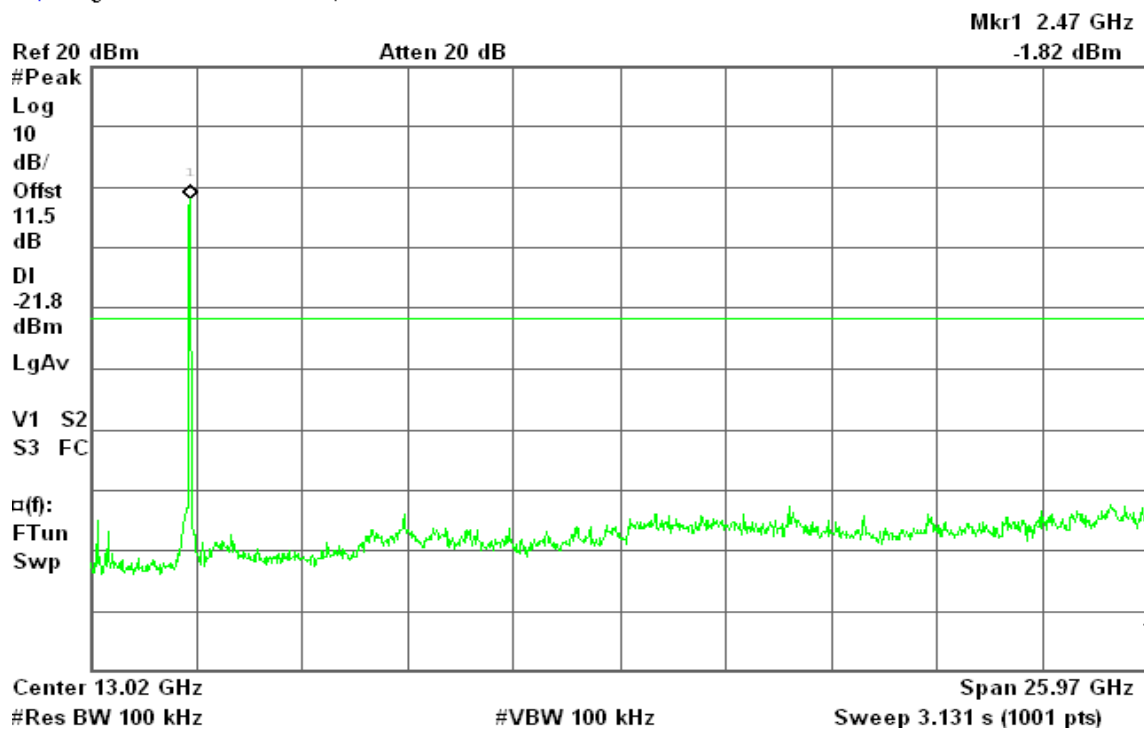**draft 802.11n Standard-20 MHz Channel mode / Chain 1****CH Low**

\* Agilent 16:07:13 Mar 31, 2008

R T

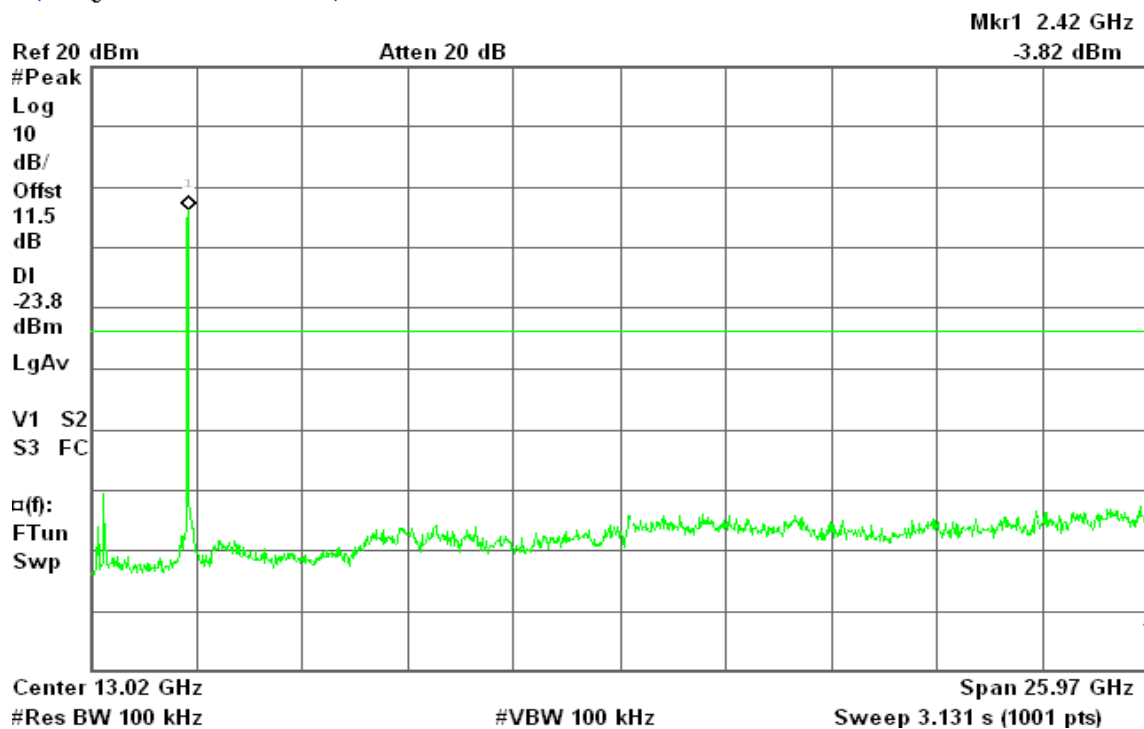




## CH Mid

\* Agilent 16:02:39 Mar 31, 2008


R T

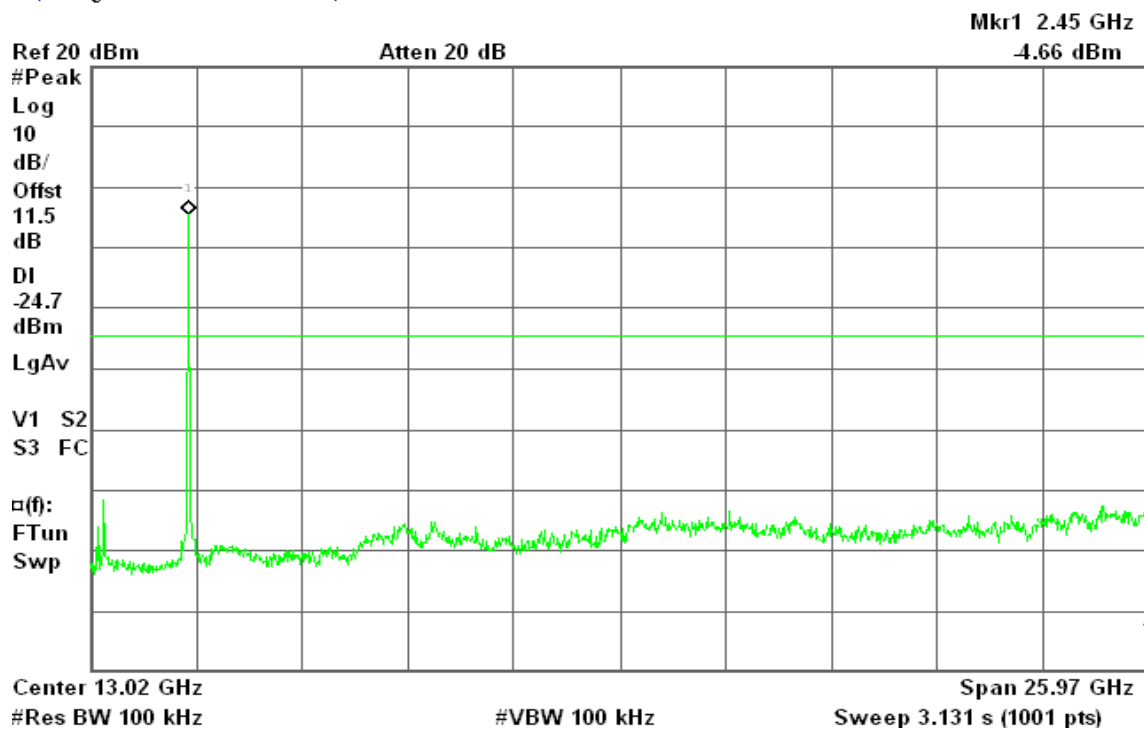

## CH High

\* Agilent 15:53:30 Mar 31, 2008


R T

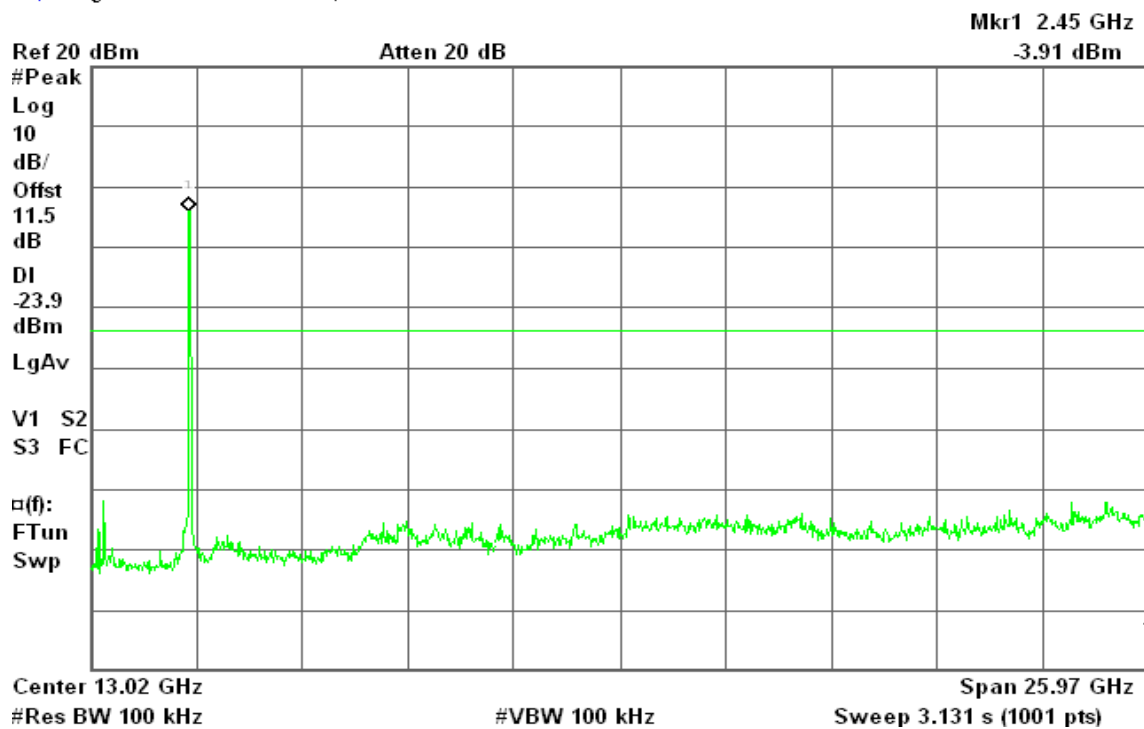

**draft 802.11n Standard-20 MHz Channel mode / Chain 2****CH Low**


\* Agilent 14:59:04 Jul 7, 2008

R T

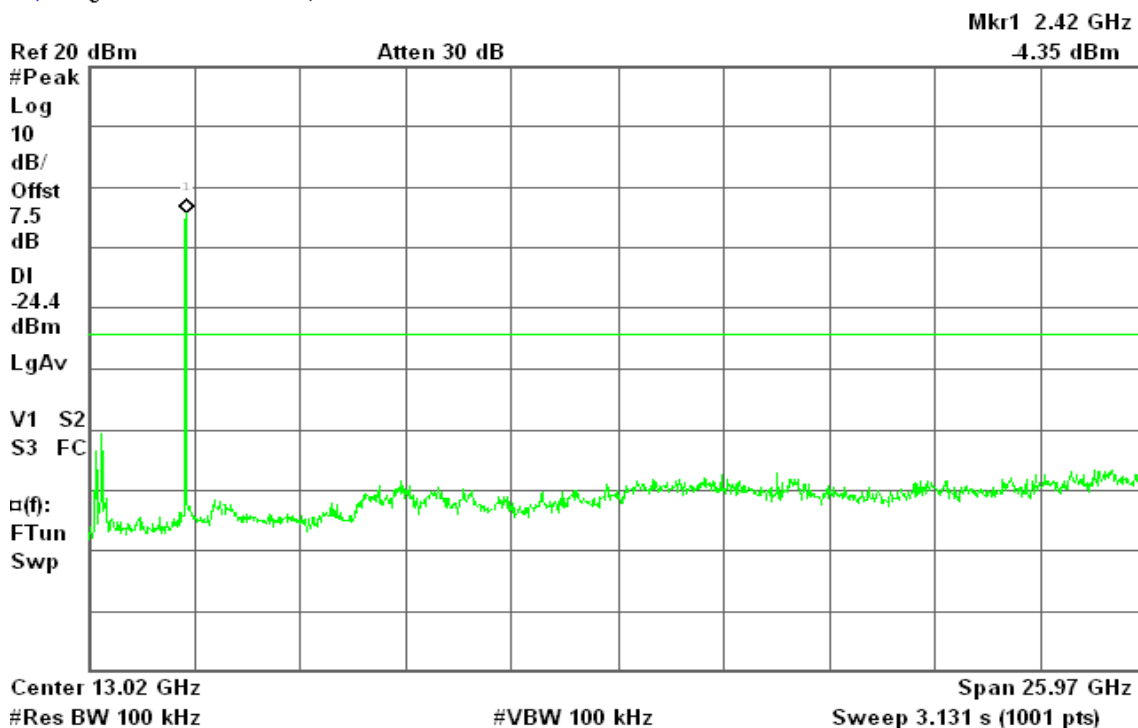**CH Mid**

\* Agilent 15:08:55 Jul 7, 2008

R T

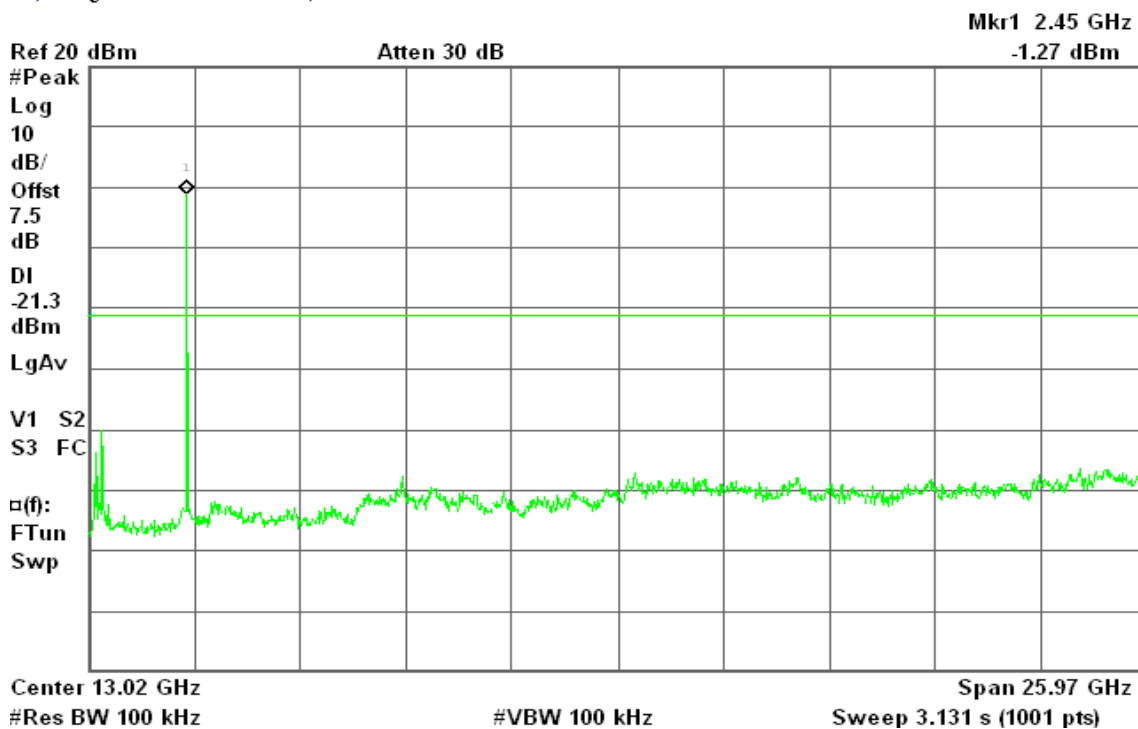




## CH High

Agilent 15:14:54 Jul 7, 2008

R T

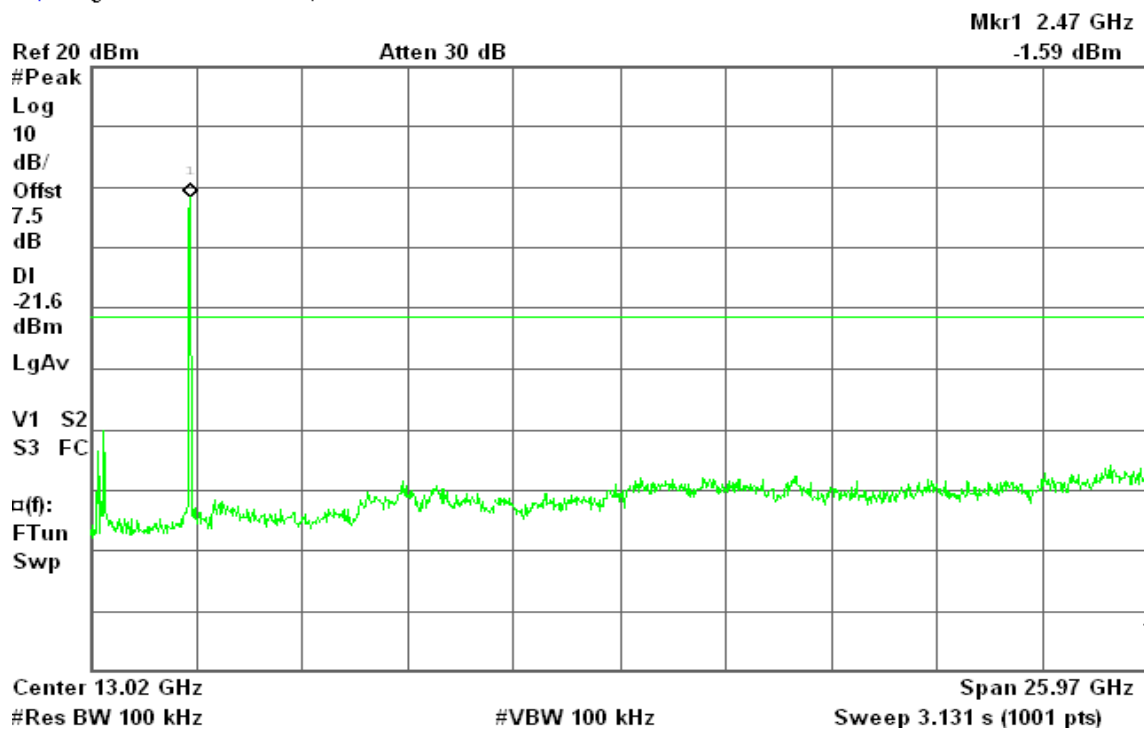




**draft 802.11n Wide-40 MHz Channel mode / Chain 0****CH Low**


\* Agilent 16:39:13 Mar 31, 2008

R T

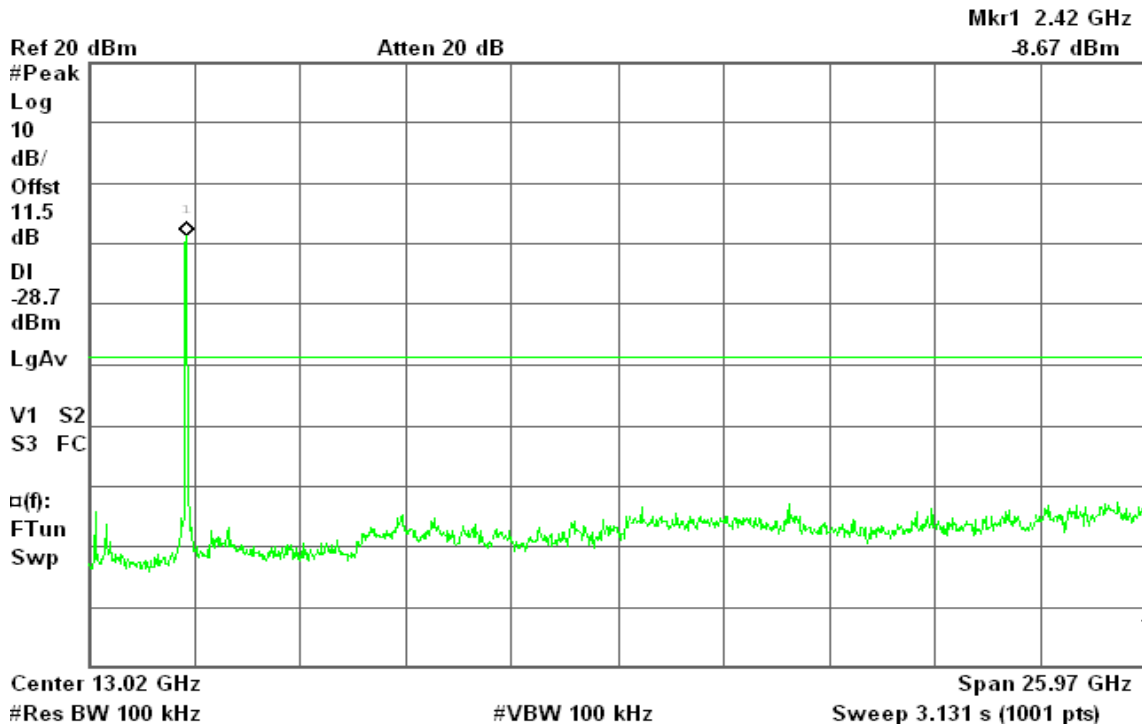**CH Mid**

\* Agilent 16:34:43 Mar 31, 2008


R T

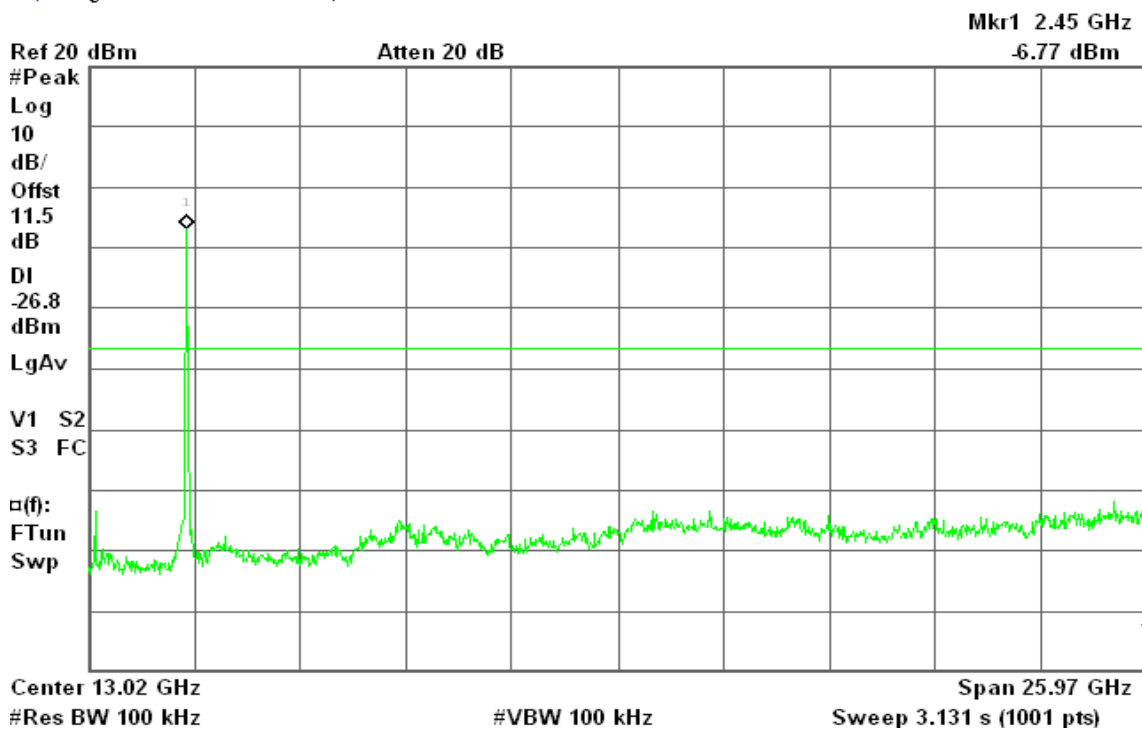

**CH High**


\* Agilent 16:30:06 Mar 31, 2008

R T

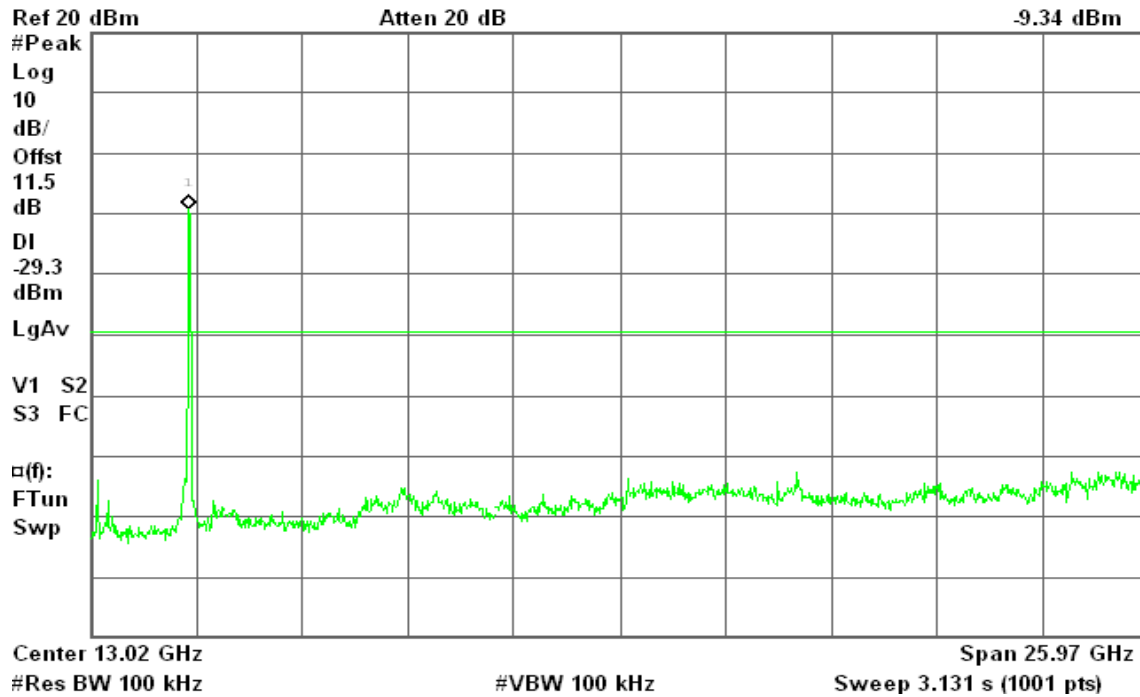Mkr1 2.45 GHz  
-9.34 dBm**draft 802.11n Wide-40 MHz Channel mode / Chain 1****CH Low**

\* Agilent 16:15:09 Mar 31, 2008

R T

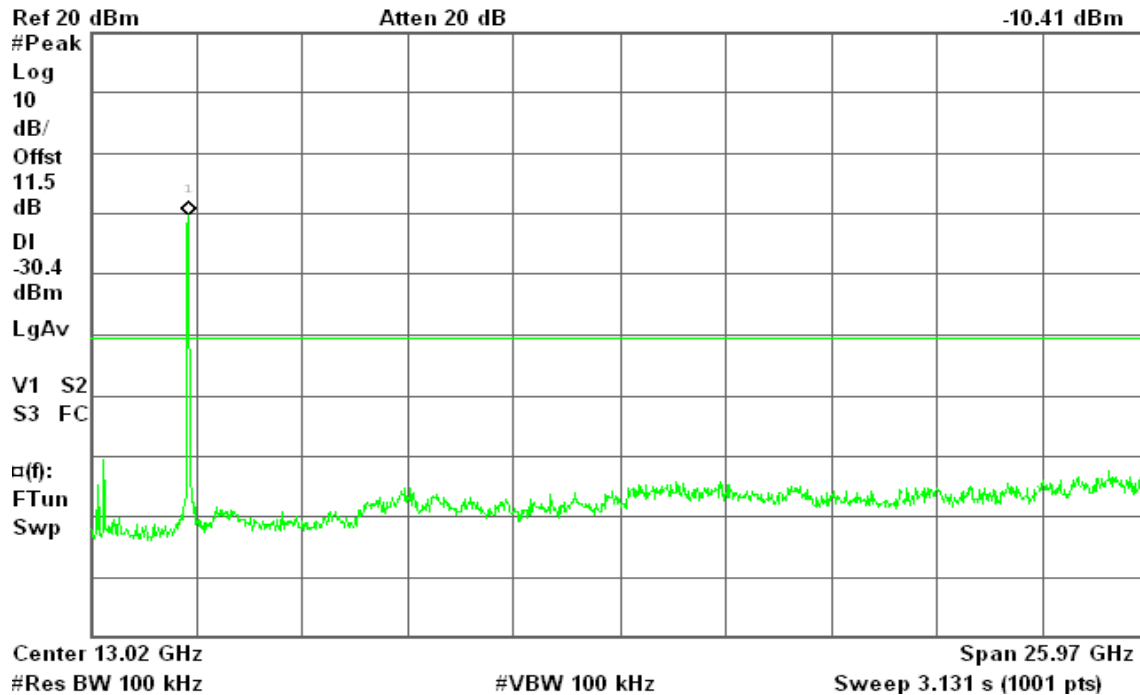
Mkr1 2.42 GHz  
-10.41 dBm



## CH Mid

\* Agilent 16:20:27 Mar 31, 2008


R T

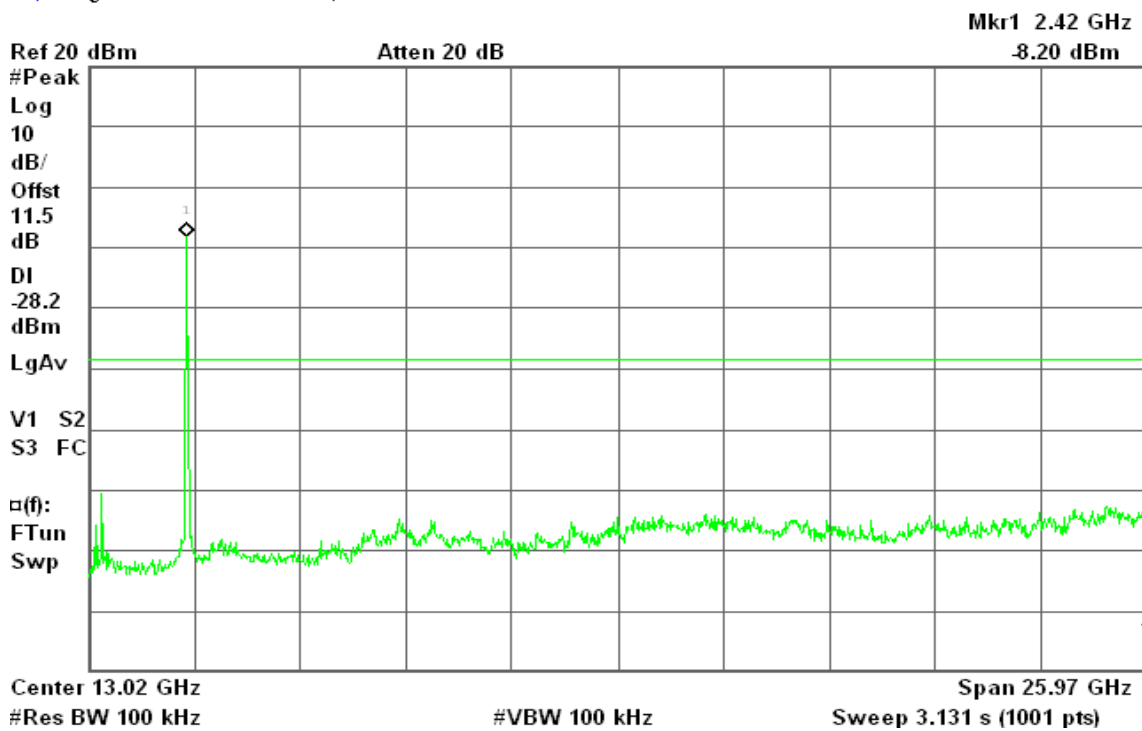

## CH High

\* Agilent 16:25:03 Mar 31, 2008


R T

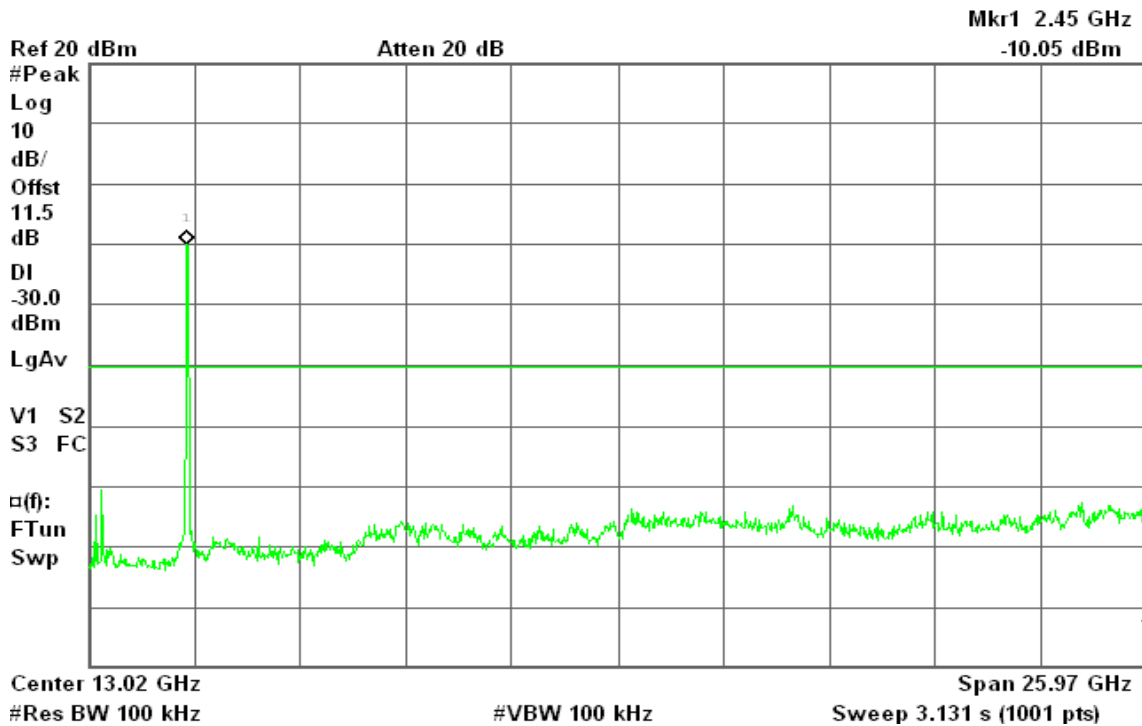

**draft 802.11n Wide-40 MHz Channel mode / Chain 2****CH Low**


\* Agilent 16:28:22 Jul 7, 2008

R T

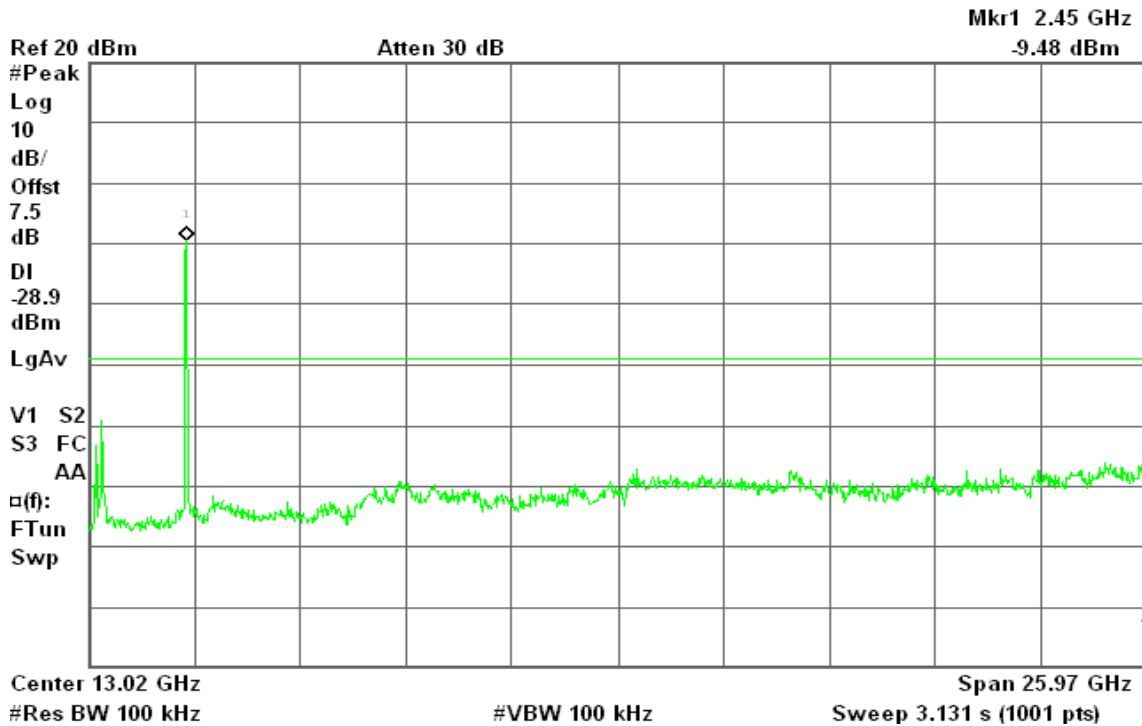**CH Mid**

\* Agilent 16:38:19 Jul 7, 2008

R T

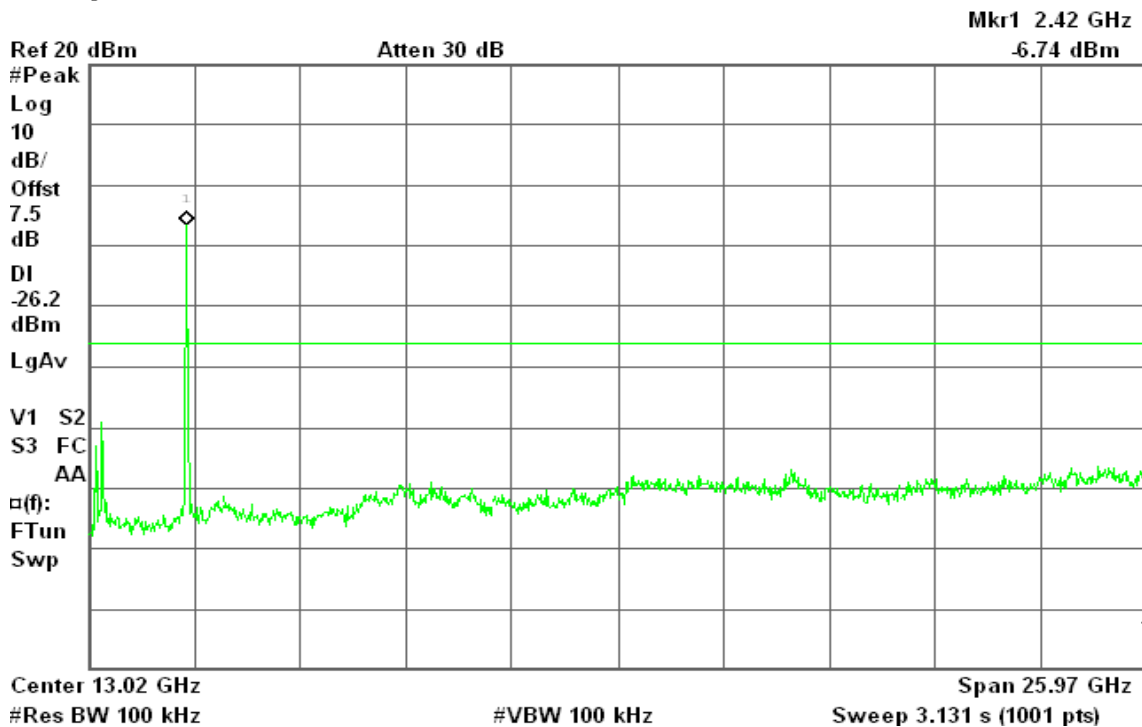




## CH High

Agilent 16:51:44 Jul 7, 2008

R T

Mkr1 2.45 GHz  
-8.62 dBm

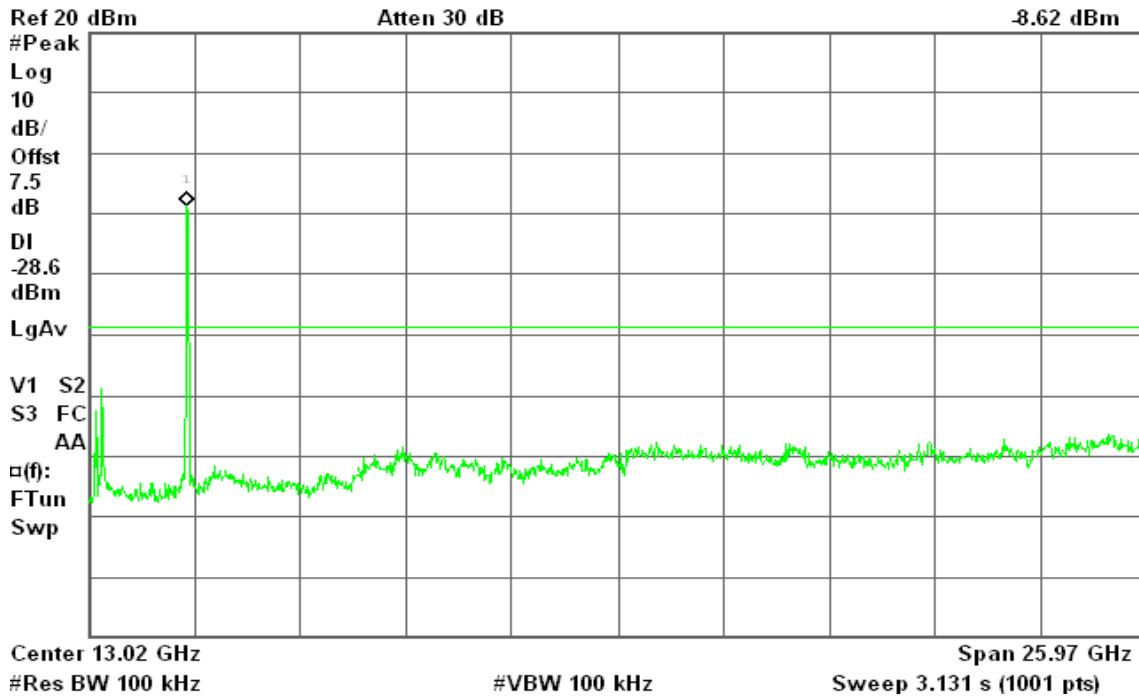

**IEEE 802.11b mode with combiner****CH Low**

\* Agilent 19:13:28 Jul 8, 2008

R T


Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

8.17 dBm

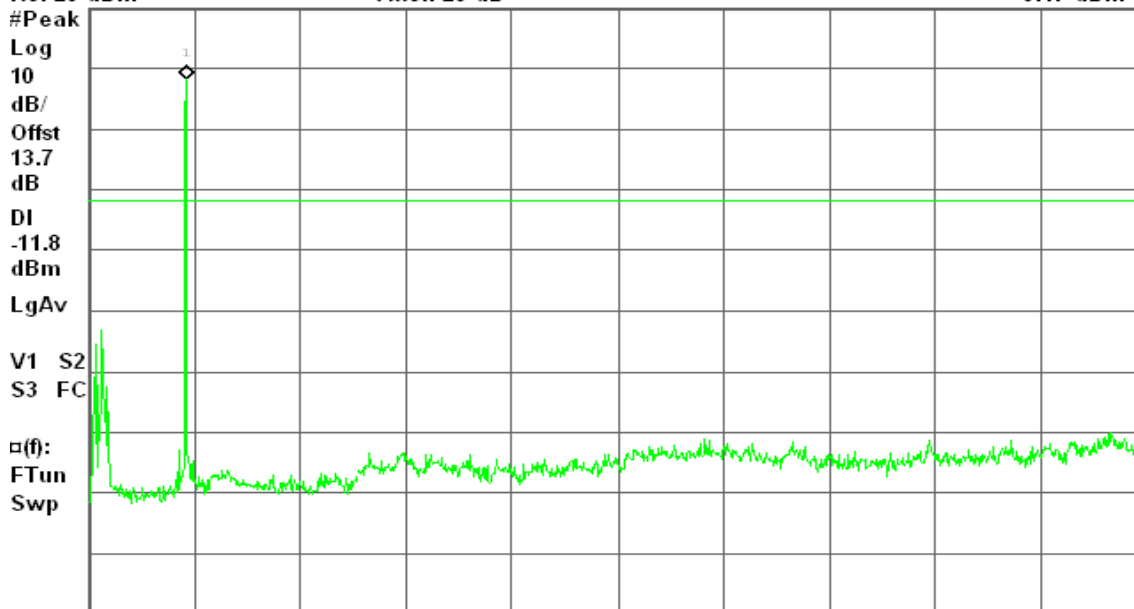

Center 13.02 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 25.97 GHz

Sweep 3.131 s (1001 pts)

**CH Mid**

\* Agilent 20:44:33 Jul 8, 2008

R T


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

8.64 dBm

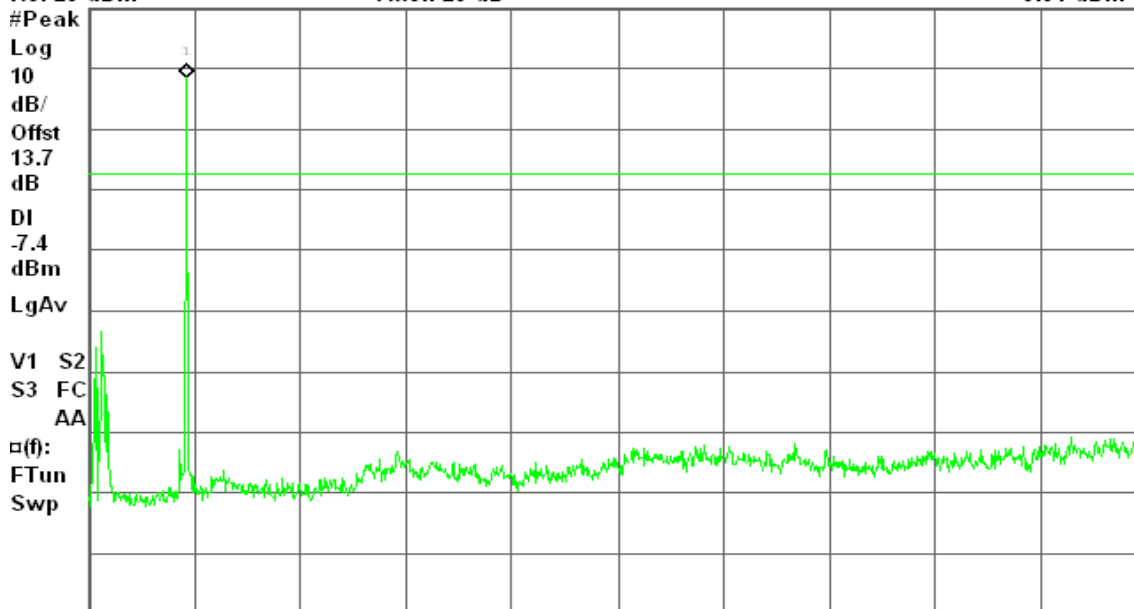

Center 13.02 GHz

#Res BW 100 kHz

#VBW 100 kHz

Span 25.97 GHz

Sweep 3.131 s (1001 pts)



## CH High

\* Agilent 20:35:59 Jul 8, 2008

R T


Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

8.63 dBm

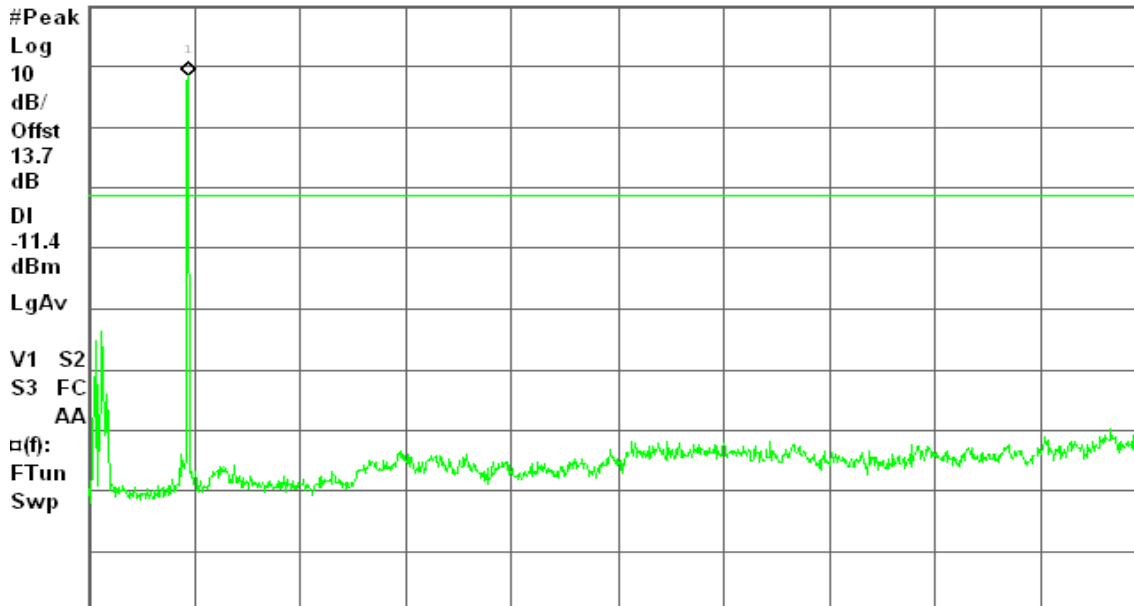

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

## IEEE 802.11g mode with combiner

### CH Low

\* Agilent 18:38:43 Jul 8, 2008

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

4.89 dBm

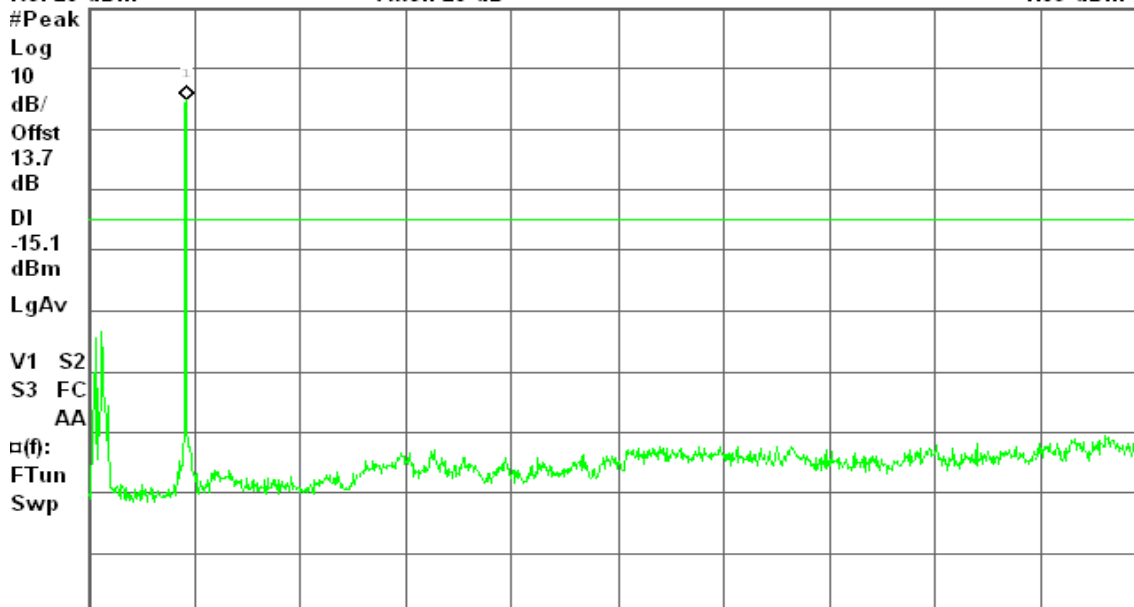

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



## CH Mid

\* Agilent 18:53:11 Jul 8, 2008

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

2.96 dBm

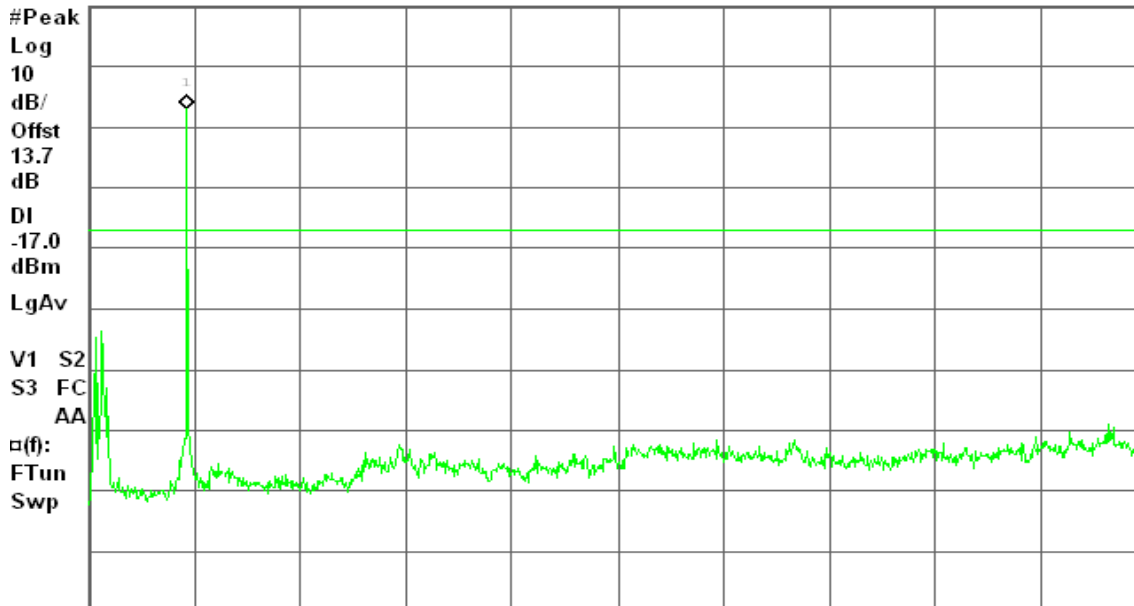

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

## CH High

\* Agilent 19:00:07 Jul 8, 2008

R T


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

2.93 dBm

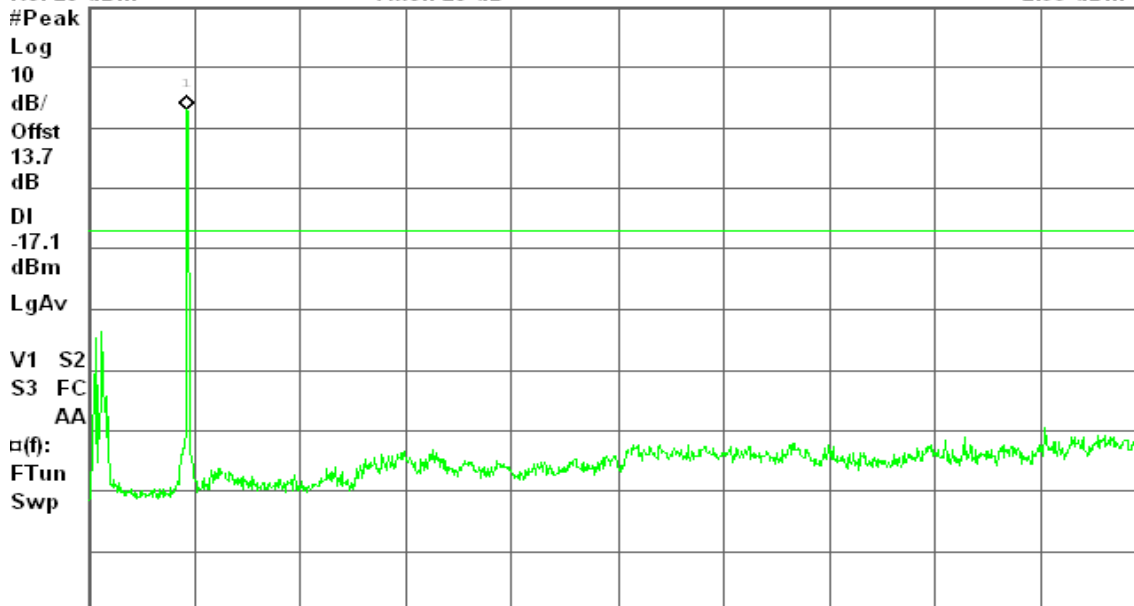

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz


Sweep 3.131 s (1001 pts)



**draft 802.11n Standard-20 MHz Channel mode with combiner****CH Low**


\* Agilent 17:52:53 Jul 7, 2008

R T

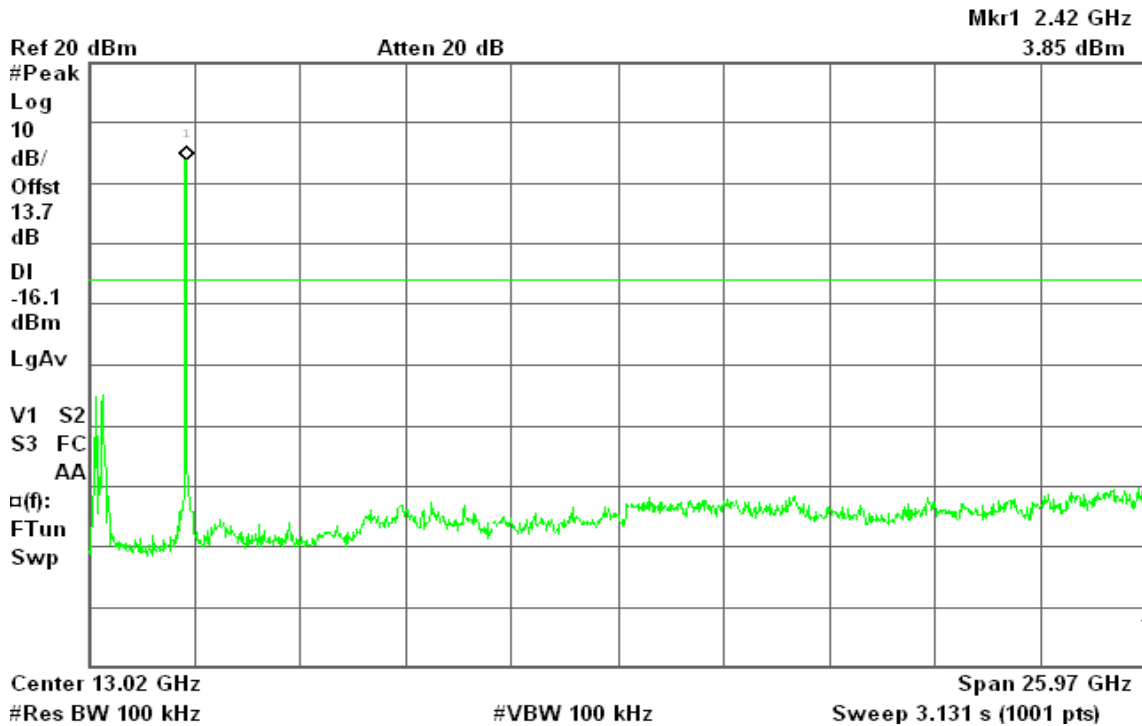**CH Mid**

\* Agilent 18:03:25 Jul 7, 2008


R T

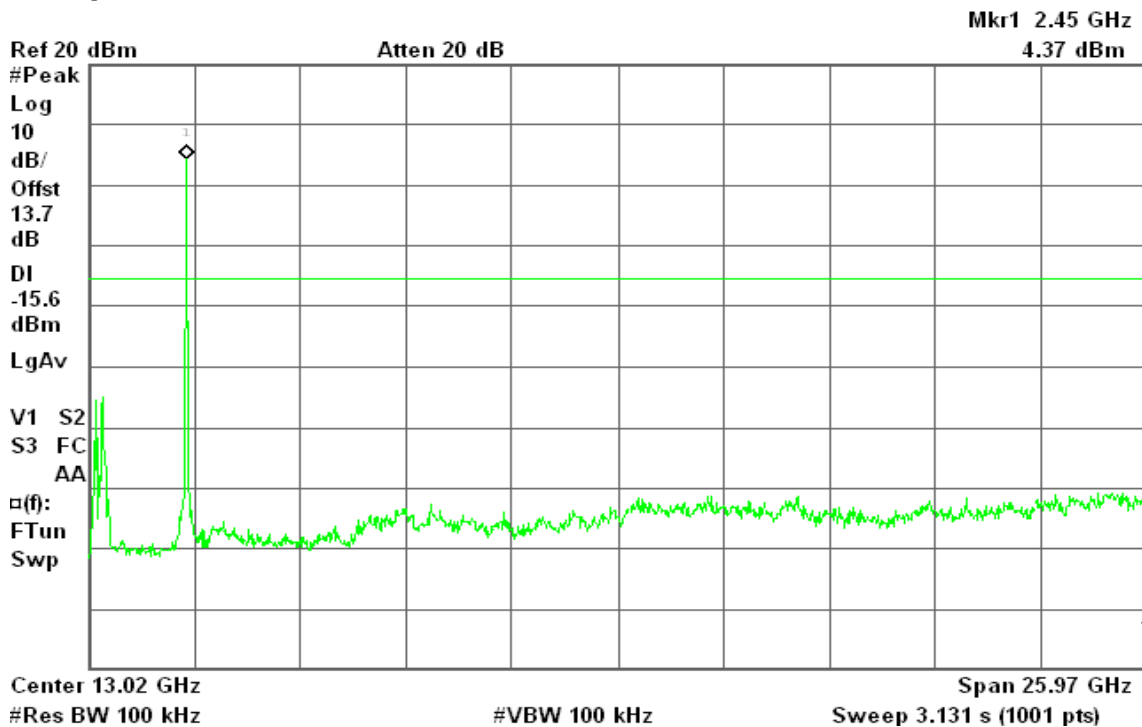

**CH High**


\* Agilent 18:11:36 Jul 7, 2008

R T

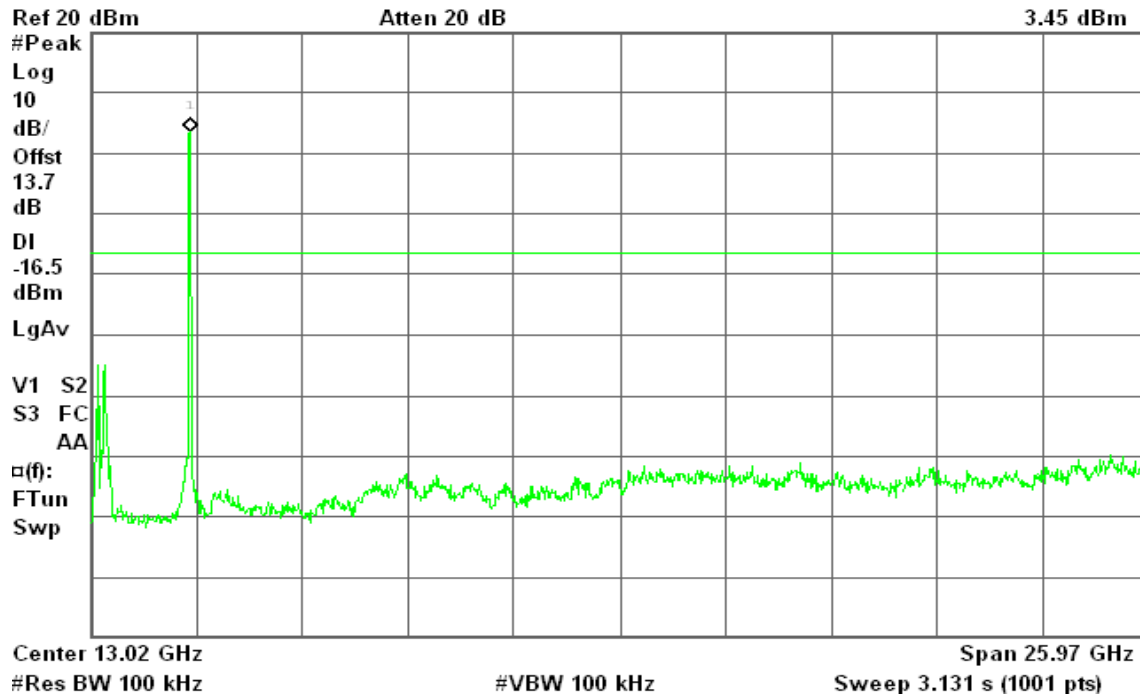Mkr1 2.47 GHz  
3.45 dBm**draft 802.11n Wide-40 MHz Channel mode with combiner****CH Low**

\* Agilent 17:22:08 Jul 7, 2008

R T

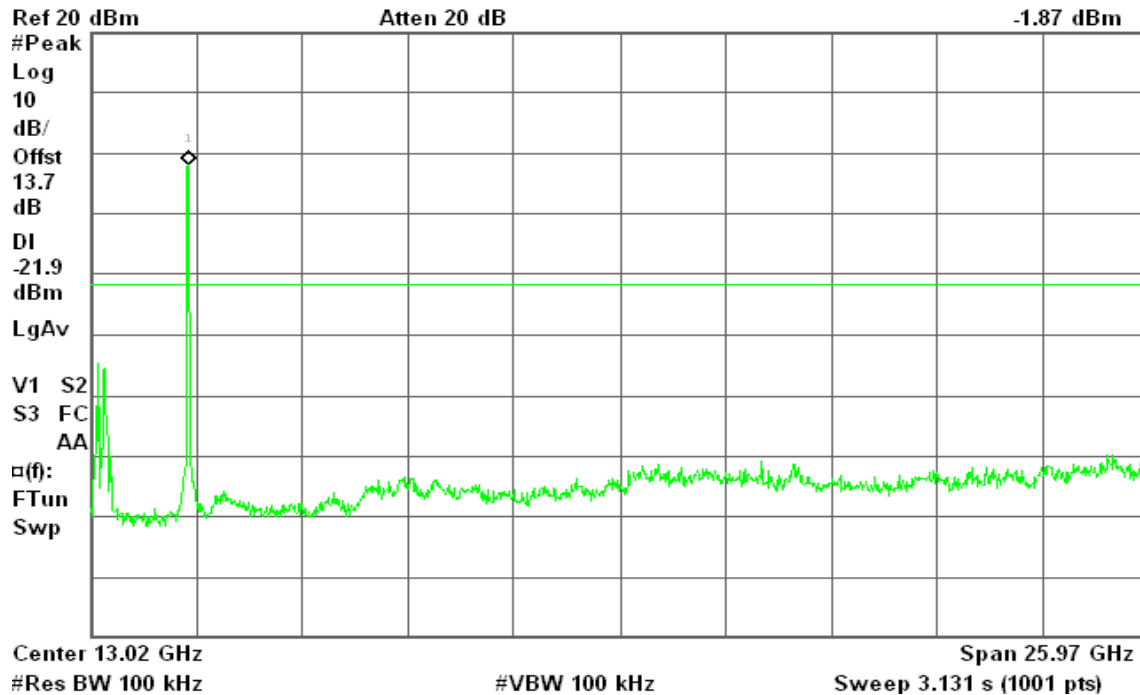
Mkr1 2.42 GHz  
-1.87 dBm



## CH Mid

\* Agilent 17:33:20 Jul 7, 2008


R T

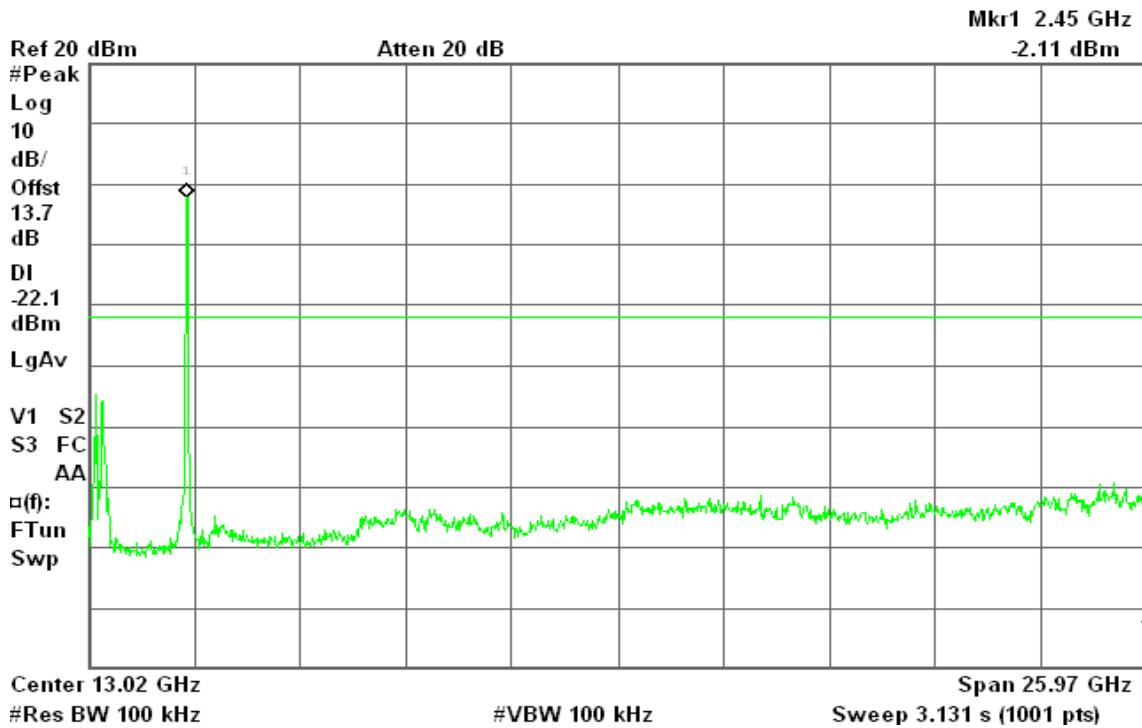

## CH High

\* Agilent 17:42:22 Jul 7, 2008

R T

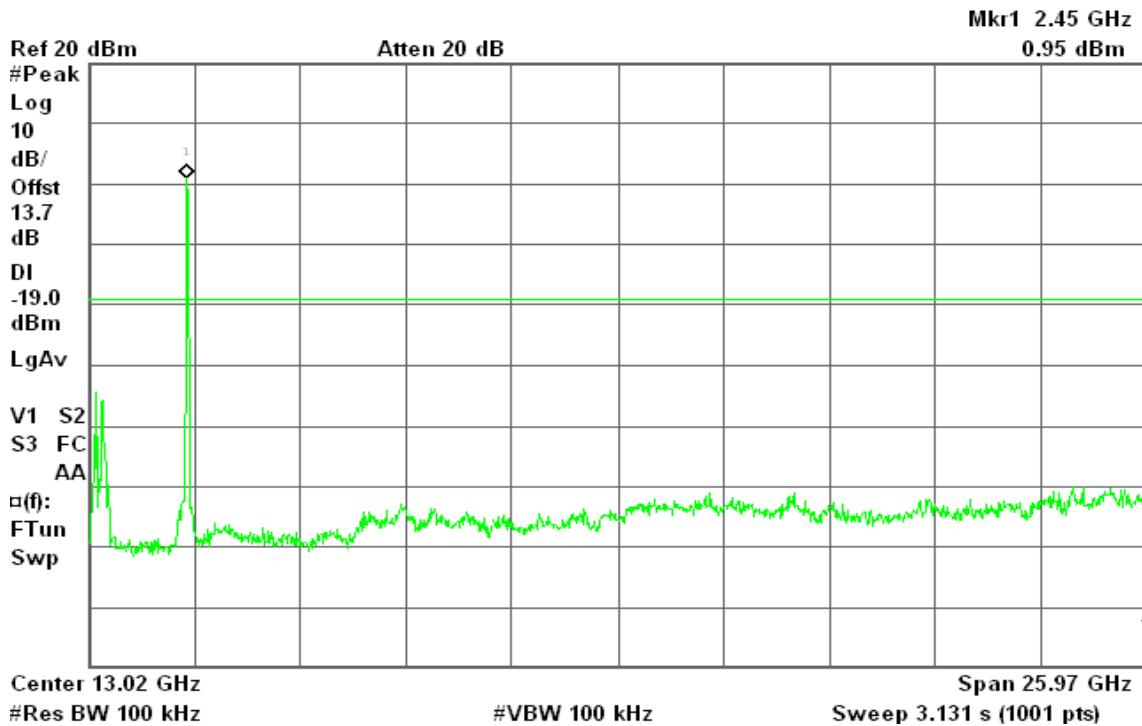



## 7.7 RADIATED EMISSIONS

### LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

## Test Configuration

### **Below 1 GHz**

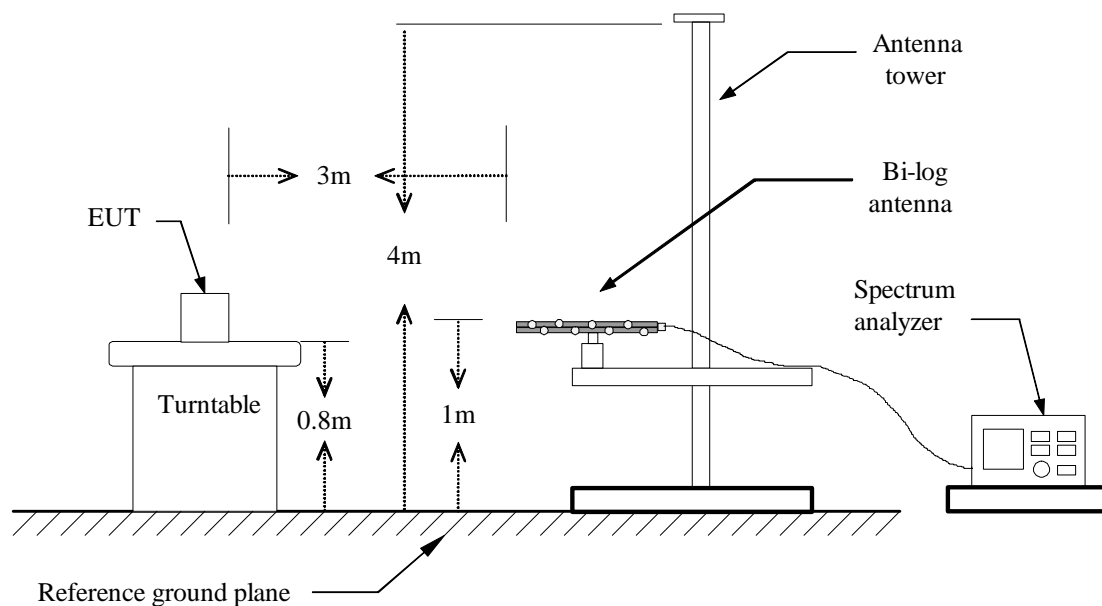

### **Above 1 GHz**

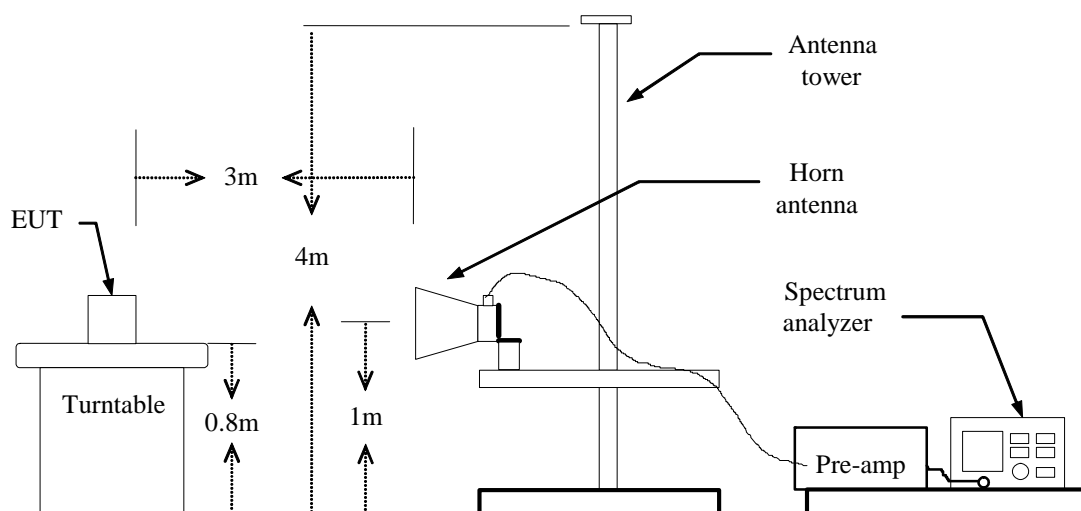



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:  
Below 1GHz:  
RBW=100kHz / VBW=300kHz / Sweep=AUTO  
Above 1GHz:  
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1GHz****Operation Mode:** Normal Link**Test Date:** April 3, 2008**Temperature:** 25°C**Tested by:** Mimic Young**Humidity:** 55% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
324.23	V	45.62	-11.43	34.19	46.00	-11.81	Peak
400.22	V	46.43	-10.00	36.43	46.00	-9.57	Peak
424.47	V	45.35	-9.10	36.26	46.00	-9.74	Peak
474.58	V	43.77	-7.69	36.07	46.00	-9.93	Peak
500.45	V	51.81	-7.86	43.95	46.00	-2.05	QP
574.82	V	43.20	-6.19	37.01	46.00	-8.99	Peak
324.23	H	48.21	-11.43	36.78	46.00	-9.22	Peak
400.22	H	45.37	-10.00	35.37	46.00	-10.63	Peak
500.45	H	47.83	-7.86	39.97	46.00	-6.03	Peak
574.82	H	40.09	-6.19	33.90	46.00	-12.10	Peak
725.17	H	39.12	-4.15	34.98	46.00	-11.02	Peak
825.40	H	39.08	-2.52	36.56	46.00	-9.44	Peak

***Remark:***

- Measuring frequencies from 30 MHz to the 1GHz.*
- Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.*
- Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
- Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).*

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** March 27, 2008**Temperature:** 23°C**Tested by:** Mimic Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2236.67	V	65.37	54.81	-4.41	60.96	50.40	74.00	54.00	-3.60	AVG
4825.00	V	55.11	50.19	0.55	55.66	50.74	74.00	54.00	-3.26	AVG
7233.33	V	51.68	43.04	3.55	55.23	46.59	74.00	54.00	-7.41	AVG
N/A										
1183.33	H	62.69	---	-10.49	52.20	---	74.00	54.00	-1.80	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** March 27, 2008**Temperature:** 25°C**Tested by:** Mimic Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2263.33	V	66.16	55.60	-4.35	61.81	51.25	74.00	54.00	-2.75	AVG
4875.00	V	55.16	50.18	0.60	55.76	50.78	74.00	54.00	-3.22	AVG
7308.33	V	52.85	43.60	3.41	56.26	47.01	74.00	54.00	-6.99	AVG
N/A										
1313.33	H	62.54	---	-10.28	52.26	---	74.00	54.00	-1.74	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** March 27, 2008**Temperature:** 25°C**Tested by:** Mimic Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2283.33	V	65.16	54.50	-4.30	60.86	50.20	74.00	54.00	-3.80	AVG
4925.00	V	54.08	46.20	0.65	54.73	46.85	74.00	54.00	-7.15	AVG
7383.33	V	55.67	48.14	3.27	58.94	51.41	74.00	54.00	-2.59	AVG
N/A										
1246.67	H	62.40	---	-10.39	52.01	---	74.00	54.00	-1.99	Peak
7391.67	H	52.06	42.23	3.25	55.31	45.48	74.00	54.00	-8.52	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** March 27, 2008**Temperature:** 25°C**Tested by:** Mimic Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1266.67	V	61.59	---	-10.36	51.23	---	74.00	54.00	-2.77	Peak
7233.33	V	55.39	38.92	3.55	58.94	42.47	74.00	54.00	-11.53	AVG
N/A										
1396.67	H	62.00	---	-10.14	51.86	---	74.00	54.00	-2.14	Peak
7241.67	H	48.92	---	3.54	52.46	---	74.00	54.00	-1.54	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** March 27, 2008**Temperature:** 25°C**Tested by:** Mimic Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1346.67	V	61.27	---	-10.22	51.05	---	74.00	54.00	-2.95	Peak
7308.33	V	55.20	39.42	3.41	58.61	42.83	74.00	54.00	-11.17	AVG
N/A										
1320.00	H	62.03	---	-10.27	51.76	---	74.00	54.00	-2.24	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** March 27, 2008**Temperature:** 25°C**Tested by:** Mimic Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1416.67	V	60.95	---	-10.11	50.84	---	74.00	54.00	-3.16	Peak
7383.33	V	57.63	40.94	3.27	60.90	44.21	74.00	54.00	-9.79	AVG
N/A										
1163.33	H	62.18	---	-10.52	51.66	---	74.00	54.00	-2.34	Peak
7375.00	H	51.14	36.75	3.28	54.42	40.03	74.00	54.00	-13.97	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

**Test Date:** March 27, 2008

**Temperature:** 25°C

**Tested by:** Mimic Young

**Humidity:** 55 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1443.33	V	61.96	---	-10.07	51.90	---	74.00	54.00	-2.10	Peak
7233.33	V	53.03	38.88	3.55	56.58	42.43	74.00	54.00	-11.57	AVG
N/A										
1216.67	H	62.48	---	-10.44	52.04	---	74.00	54.00	-1.96	Peak
7233.33	H	48.60	---	3.55	52.15	---	74.00	54.00	-1.85	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

**Test Date:** March 27, 2008

**Temperature:** 25°C

**Tested by:** Mimic Young

**Humidity:** 55 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1413.33	V	61.54	---	-10.12	51.42	---	74.00	54.00	-2.58	Peak
7308.33	V	53.83	37.83	3.41	57.24	41.24	74.00	54.00	-12.76	AVG
N/A										
1253.33	H	62.25	---	-10.38	51.87	---	74.00	54.00	-2.13	Peak
7308.33	H	48.97	---	3.41	52.38	---	74.00	54.00	-1.62	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Standard-20 MHz Channel mode / CH High

**Test Date:** March 27, 2008

**Temperature:** 25°C

**Tested by:** Mimic Young

**Humidity:** 55 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1356.67	V	62.08	---	-10.21	51.87	---	74.00	54.00	-2.13	Peak
7391.67	V	54.55	40.73	3.25	57.80	43.98	74.00	54.00	-10.02	AVG
N/A										
1293.33	H	62.12	---	-10.31	51.81	---	74.00	54.00	-2.19	Peak
7383.33	H	54.25	38.46	3.27	57.52	41.73	74.00	54.00	-12.27	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





**Operation Mode:** TX / draft 802.11n Wide-40 MHz Channel mode  
/ CH Low

**Test Date:** March 27, 2008

**Temperature:** 25°C

**Tested by:** Mimic Young

**Humidity:** 55 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1453.33	V	61.21	---	-10.05	51.16	---	74.00	54.00	-2.84	Peak
N/A										
1300.00	H	62.31	---	-10.30	52.01	---	74.00	54.00	-1.99	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Wide-40 MHz Channel mode  
/ CH Mid

**Test Date:** March 27, 2008

**Temperature:** 25°C

**Tested by:** Mimic Young

**Humidity:** 55 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1243.33	V	61.67	---	-10.39	51.28	---	74.00	54.00	-2.72	Peak
N/A										
1303.33	H	62.47	---	-10.30	52.17	---	74.00	54.00	-1.83	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Wide-40 MHz Channel mode  
/ CH High

**Test Date:** March 27, 2008

**Temperature:** 25°C

**Tested by:** Mimic Young

**Humidity:** 55 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1253.33	V	62.50	---	-10.38	52.12	---	74.00	54.00	-1.88	Peak
N/A										
1273.33	H	61.87	---	-10.34	51.53	---	74.00	54.00	-2.47	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

## 7.8POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

**Operation Mode:** Normal Link      **Test Date:** April 18, 2008  
**Temperature:** 19°C      **Tested by:** Jason Lee  
**Humidity:** 72% RH


Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.426	53.16	42.01	0.13	53.29	42.14	57.33	47.33	-4.04	-5.19	L1
1.016	49.38	30.57	0.16	49.54	30.73	56.00	46.00	-6.46	-15.27	L1
N/A										
0.150	59.14	27.05	0.14	59.28	27.19	66.00	55.96	-6.72	-28.77	L2
0.428	53.10	42.40	0.14	53.24	42.54	57.29	47.29	-4.05	-4.75	L2
0.679	49.46	32.83	0.12	49.58	32.95	56.00	46.00	-6.42	-13.05	L2
3.491	48.38	33.75	0.36	48.74	34.11	56.00	46.00	-7.26	-11.89	L2
N/A										

### Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

## Test Plots

### Conducted emissions (Line 1)

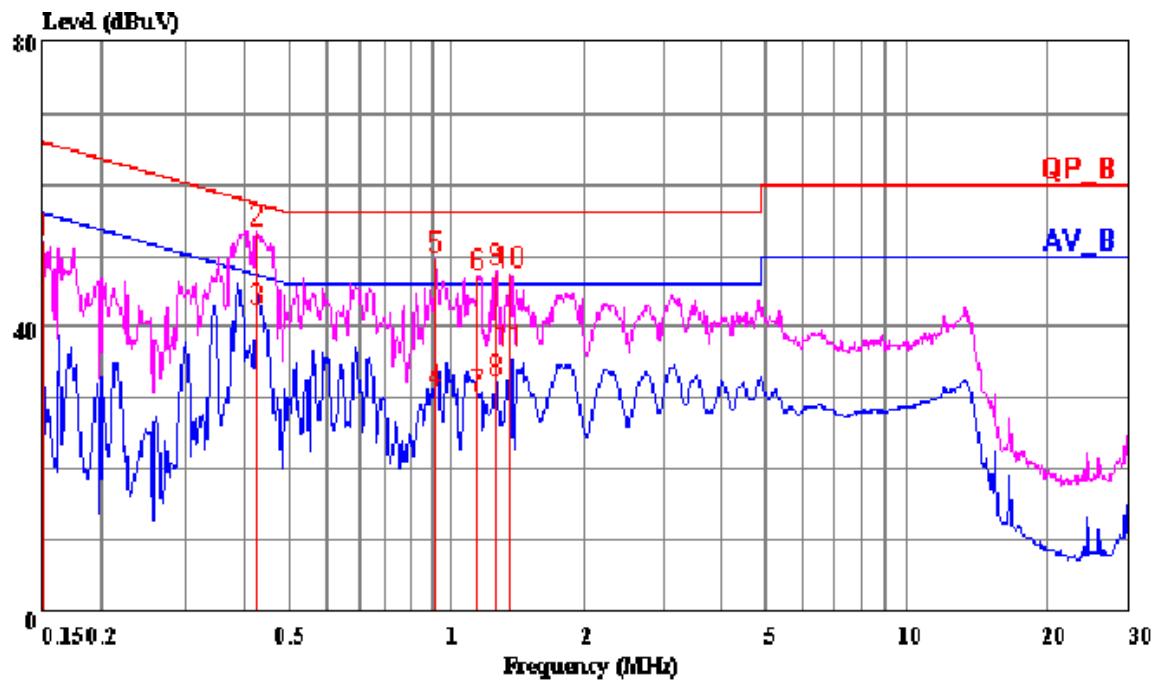

### Conducted emissions (Line 2)

