

FCC RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

Test Standard	FCC Part 15.247
Brand name	Sercomm
Product name	Wireless Full HD Battery Camera
Model No.	BC852yxxxxxx (y should be "blank" or "-"; x could be 0 to 9, A to Z, a to z, "blank" or "-", for marketing purpose)
Test Result	Pass
Statements of Conformity	Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.


The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)

Approved by:



Kevin Tsai
Deputy Manager

Tested by:



Dally Hong
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190711D16-RP

Page 2 / 78
Rev. 00

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	September 25, 2019	Initial Issue	ALL	Allison Chen

Table of contents

1.	GENERAL INFORMATION	4
1.1	EUT INFORMATION.....	4
1.2	EUT CHANNEL INFORMATION	5
1.3	ANTENNA INFORMATION	5
1.4	MEASUREMENT UNCERTAINTY	6
1.5	FACILITIES AND TEST LOCATION.....	7
1.6	INSTRUMENT CALIBRATION.....	7
1.7	SUPPORT AND EUT ACCESSORIES EQUIPMENT	9
1.8	TEST METHODOLOGY AND APPLIED STANDARDS	9
2.	TEST SUMMERY	10
3.	DESCRIPTION OF TEST MODES	11
3.1	THE WORST MODE OF OPERATING CONDITION	11
3.2	THE WORST MODE OF MEASUREMENT.....	12
3.3	EUT DUTY CYCLE.....	13
4.	TEST RESULT.....	14
4.1	AC POWER LINE CONDUCTED EMISSION.....	14
4.2	6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%).....	17
4.3	OUTPUT POWER MEASUREMENT.....	25
4.4	POWER SPECTRAL DENSITY.....	28
4.5	CONDUCTED BANDEDGE AND SPURIOUS EMISSION	33
4.6	RADIATION BANDEDGE AND SPURIOUS EMISSION	43
 APPENDIX 1 - PHOTOGRAPHS OF EUT		

Report No.: T190711D16-RP

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	Sercomm Corporation 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan
Manufacturer	Sercomm Corporation 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan
Equipment	Wireless Full HD Battery Camera
Model Name	BC852yxxxxxxx (y should be "blank" or "-"; x could be 0 to 9, A to Z, a to z, "blank" or "-", for marketing purpose)
Model Discrepancy	All the above models are identical except for the designation of model numbers. The suffix of (y should be "blank" or "-"; x could be 0 to 9, A to Z, a to z, "blank" or "-", for marketing purpose) on model number is just for marketing purpose only.
Received Date	July 11, 2019
Date of Test	July 31 ~ September 9, 2019
Output Power (W)	IEEE 802.11b mode: 0.2624 IEEE 802.11g mode: 0.5117 IEEE 802.11n HT 20 mode: 0.5047
Power Supply	1. Power from AC Adapter. (1) LUCENT TRANS / 1A52-UB52A Input: 100-240V~0.3A 50-60Hz Output: 5Vdc, 2.0A (2) PHIHONG / PSAF10A-050Q Input: 100-240V~0.3A 50-60Hz Output: 5Vdc, 2.0A 2. Power from Battery. Rating: 450mA, 1.3A and 450mA only.

Report No.: T190711D16-RP

1.2 EUT CHANNEL INFORMATION

Frequency Range	2412MHz-2462MHz
Modulation Type	1. IEEE 802.11b Mode: DSSS(DBPSK/DQPSK/CCK) 2. IEEE 802.11g Mode: OFDM (BPSK/QPSK/16QAM/64QAM) 3. IEEE 802.11n HT20 Mode : OFDM (BPSK/QPSK/16QAM/64QAM)
Number of channels	1. IEEE 802.11b mode: 11 Channels 2. IEEE 802.11g mode: 11 Channels 3. IEEE 802.11n HT 20 MHz mode: 11 Channels

Remark:

Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	<input type="checkbox"/> PIFA <input type="checkbox"/> PCB <input checked="" type="checkbox"/> Dipole <input type="checkbox"/> Coils
Antenna Gain	Gain: 2.97dBi
Antenna connector	I-PEX

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

Report No.: T190711D16-RP

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Dally Hong	-
Radiation	Jerry Lu	-
RF Conducted	Dally Hong	-

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Power Meter	Anritsu	ML2495A	1149001	02/12/2019	02/11/2020
Power Seneor	Anritsu	MA2491A	030982	02/12/2019	02/11/2020
Signal Analyzer	R&S	FSV 40	101073	09/27/2018	09/26/2019
Software	N/A				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020
Bilog Antenna	Sunol Sciences	JB3	A030105	07/26/2019	07/25/2020
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019
Loop Ant	COM-POWER	AL-130	121051	03/22/2019	03/21/2020
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

AC Conducted Emissions Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
CABLE	EMCI	CFD300-NL	CERF	06/27/2019	06/26/2020
EMI Test Receiver	R&S	ESCI	100064	07/26/2019	07/25/2020
LISN	SCHWARZBECK	NSLK 8127	8127-541	01/31/2019	01/30/2020
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020
Software	EZ-EMC(CCS-3A1-CE-Wugu)				

Remark: 1. Each piece of equipment is scheduled for calibration once a year.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(H)	Acer	Aspire 4320 series	R33142	QDS-BRCM1018

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074 D01

2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(a)(2)	4.2	6 dB Bandwidth	Pass
-	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(3)	4.3	Output Power Measurement	Pass
15.247(e)	4.4	Power Spectral Density	Pass
15.247(d)	4.5	Conducted Band Edge	Pass
15.247(d)	4.5	Conducted Spurious Emission	Pass
15.247(d)	4.6	Radiation Band Edge	Pass
15.247(d)	4.6	Radiation Spurious Emission	Pass

Report No.: T190711D16-RP

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

<p>Operation mode</p>	<p>IEEE 802.11b mode :1Mbps IEEE 802.11g mode :6Mbps IEEE 802.11n HT20 mode: MCS0</p>
<p>Test Channel Frequencies</p>	<p>IEEE 802.11b mode: 1. Lowest Channel: 2412MHz 2. Middle Channel: 2437MHz 3. Highest Channel: 2462MHz IEEE 802.11g mode: 1. Lowest Channel: 2412MHz 2. Middle Channel: 2437MHz 3. Highest Channel: 2462MHz IEEE 802.11n HT20 mode: 1. Lowest Channel: 2412MHz 2. Middle Channel: 2437MHz 3. Highest Channel: 2462MHz</p>
<p>Operation Transmitter</p>	<p>IEEE 802.11b mode :1T1R IEEE 802.11g mode :1T1R IEEE 802.11n HT20 mode :1T1R</p>

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

Report No.: T190711D16-RP

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1:EUT power by Adapter(LUCENT) + Battery (450mA) Mode 2:EUT power by Adapter(LUCENT) + Battery (1.3A&450mA) Mode 3:EUT power by Adapter(PHIHONG) + Battery (1.3A&450mA) Mode 4:EUT power by Adapter(PHIHONG) + Battery (450mA)
Worst Mode	<input type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input checked="" type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1:EUT power by Battery only(450mA) Mode 2:EUT power by Battery (1.3A&450mA) Mode 3:EUT power by Adapter(LUCENT) + Battery (450mA) Mode 4:EUT power by Adapter(LUCENT) + Battery (1.3A&450mA) Mode 5:EUT power by Adapter(PHIHONG) + Battery (1.3A&450mA) Mode 6:EUT power by Adapter(PHIHONG) + Battery (450mA)
Worst Mode	<input type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input checked="" type="checkbox"/> Mode 4 <input type="checkbox"/> Mode 5 <input type="checkbox"/> Mode 6
Worst Position	<input type="checkbox"/> Placed in fixed position. <input type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input checked="" type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input type="checkbox"/> Horizontal <input checked="" type="checkbox"/> Vertical

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1:EUT power by Battery only(450mA) Mode 2:EUT power by Battery (1.3A&450mA) Mode 3:EUT power by Adapter(LUCENT) + Battery (450mA) Mode 4:EUT power by Adapter(LUCENT) + Battery (1.3A&450mA) Mode 5:EUT power by Adapter(PHIHONG) + Battery (1.3A&450mA) Mode 6:EUT power by Adapter(PHIHONG) + Battery (450mA)
Worst Mode	<input type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input checked="" type="checkbox"/> Mode 4 <input type="checkbox"/> Mode 5 <input type="checkbox"/> Mode 6


Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case(Z-Plane and Vertical) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

Report No.: T190711D16-RP

3.3 EUT DUTY CYCLE

Duty Cycle			
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)
802.11b	8.6957	8.7101	99.83%
802.11g	1.4638	1.5362	95.29%
802.11n HT20	1.9565	2.0145	97.12%

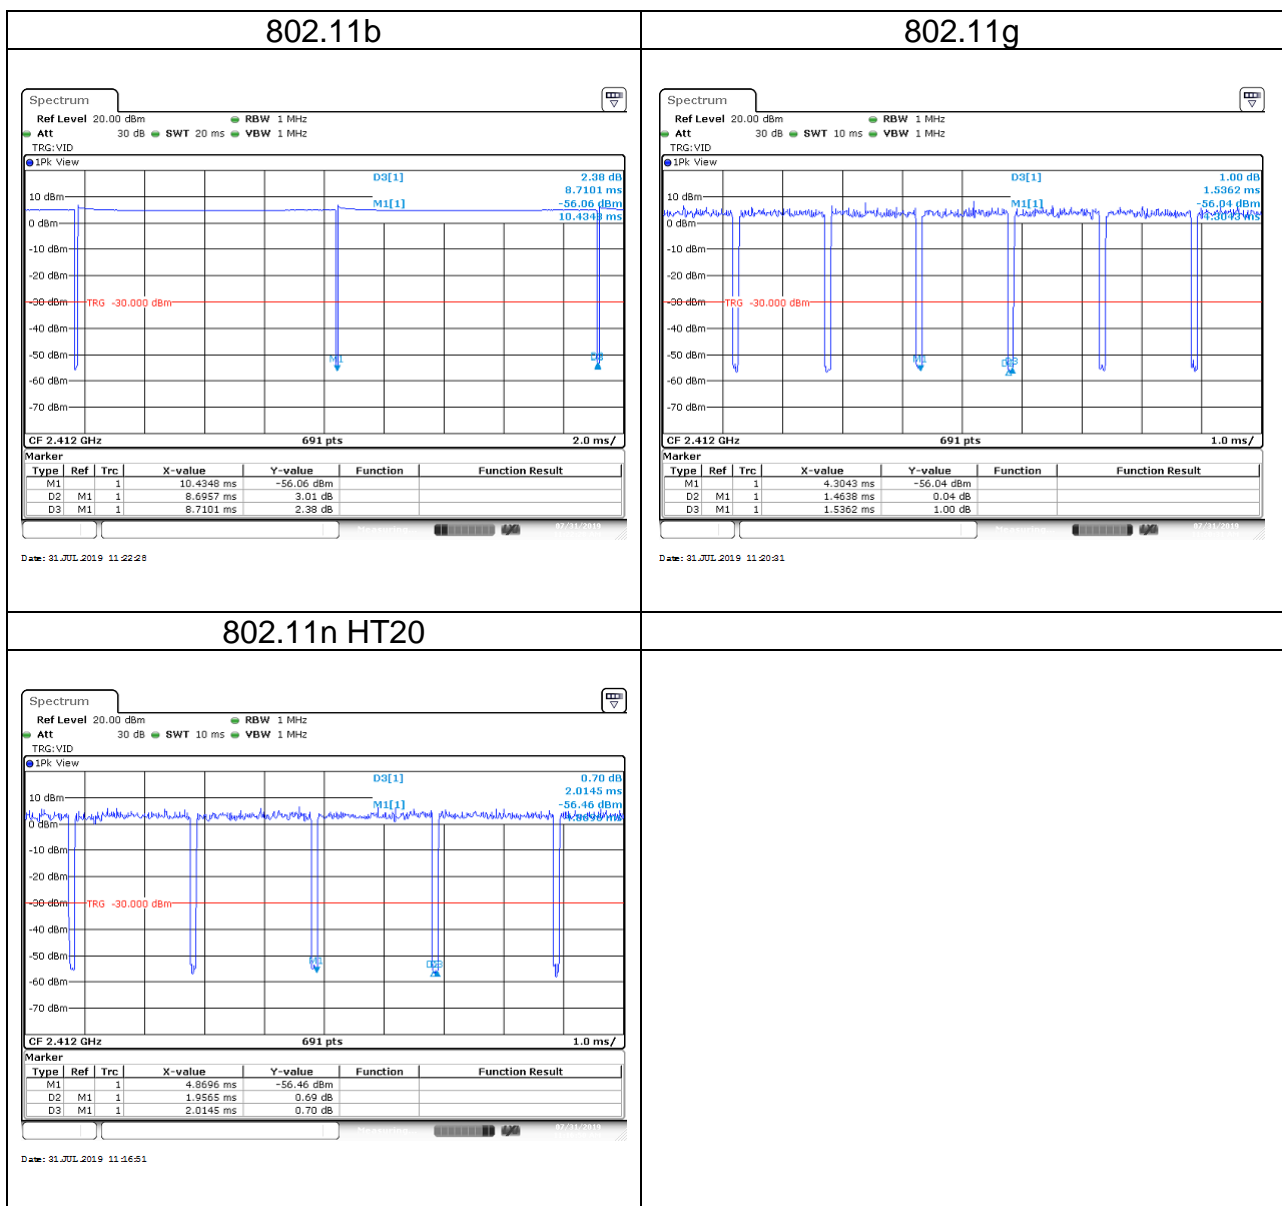

Report No.: T190711D16-RP

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a)(2)

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

4.1.3 Test Setup

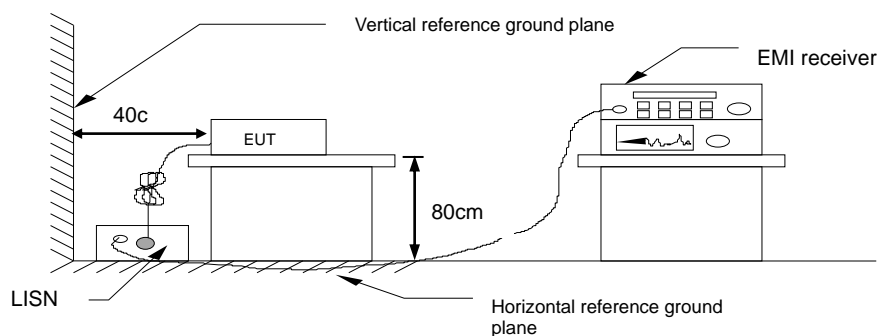


4.1.4 Test Result

Pass.

Report No.: T190711D16-RP

Test Data


Test Mode:	Mode 3	Temp/Hum	24(°C)/ 50%RH
Phase:	Line	Test Date	2019/09/09
		Test Engineer	Dally Hong

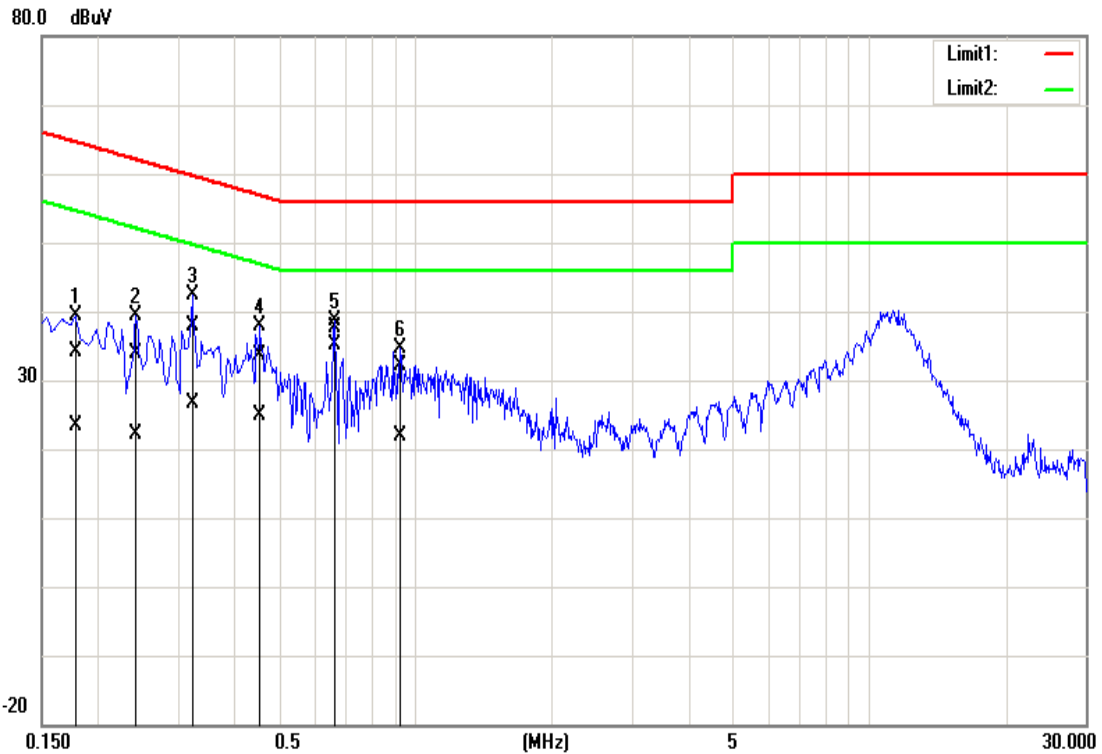

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
1	0.1780	24.07	13.29	10.13	34.20	23.42	64.58	54.58	-30.38	-31.16
2	0.2420	23.74	12.11	10.13	33.87	22.24	62.03	52.03	-28.16	-29.79
3	0.3220	27.66	16.48	10.14	37.80	26.62	59.66	49.66	-21.86	-23.04
4	0.4540	23.40	14.80	10.14	33.54	24.94	56.80	46.80	-23.26	-21.86
5*	0.6620	27.39	25.06	10.15	37.54	35.21	56.00	46.00	-18.46	-10.79
6	0.9260	21.89	11.66	10.17	32.06	21.83	56.00	46.00	-23.94	-24.17

Report No.: T190711D16-RP

Test Mode:	Mode 3	Temp/Hum	24(°C)/ 50%RH
Phase:	Neutral	Test Date	2019/09/09
		Test Engineer	Dally Hong

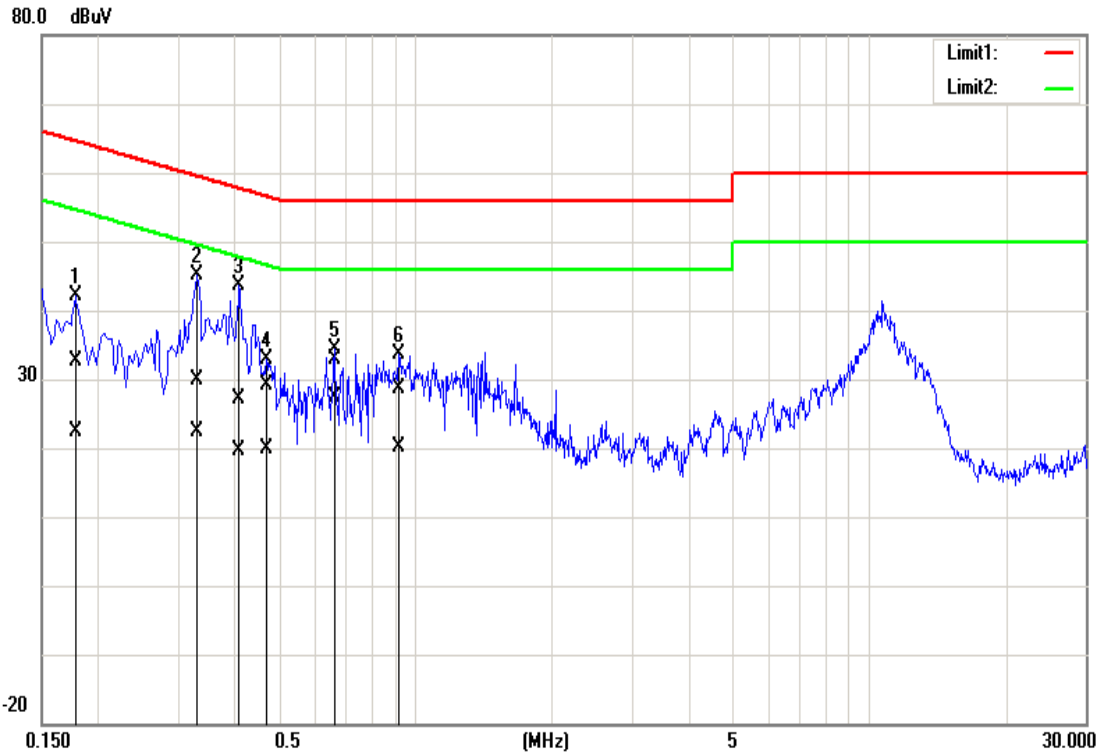

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
1	0.1780	22.55	12.27	10.02	32.57	22.29	64.58	54.58	-32.01	-32.29
2	0.3300	19.83	12.37	10.03	29.86	22.40	59.45	49.45	-29.59	-27.05
3	0.4100	17.22	9.67	10.03	27.25	19.70	57.65	47.65	-30.40	-27.95
4	0.4700	19.02	9.95	10.03	29.05	19.98	56.51	46.51	-27.46	-26.53
5*	0.6620	22.74	17.23	10.03	32.77	27.26	56.00	46.00	-23.23	-18.74
6	0.9220	18.66	10.13	10.04	28.70	20.17	56.00	46.00	-27.30	-25.83

Report No.: T190711D16-RP

4.2 6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)

4.2.1 Test Limit

According to §15.247(a)(2)

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as KDB 558074 D01 and ANSI C63.10: 2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100KHz , VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

4.2.3 Test Setup

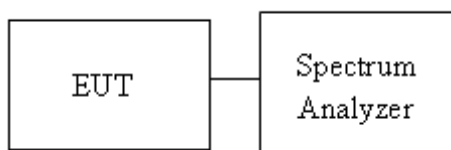

Report No.: T190711D16-RP

4.2.4 Test Result


Test mode: IEEE 802.11b mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	16.5846	-	10.087	-	≥500
Mid	2437	16.3241	-	10.087	-	
High	2462	16.2373	-	10.087	-	

Test mode: IEEE 802.11g mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	19.7973	-	15.3043	-	≥500
Mid	2437	19.6671	-	15.1304	-	
High	2462	19.0159	-	15.1304	-	

Test mode: IEEE 802.11n HT 20 mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	19.4066	-	15.1304	-	≥500
Mid	2437	19.0159	-	15.1304	-	
High	2462	19.8408	-	15.1304	-	


Report No.: T190711D16-RP

Test Data (6dB BANDWIDTH)

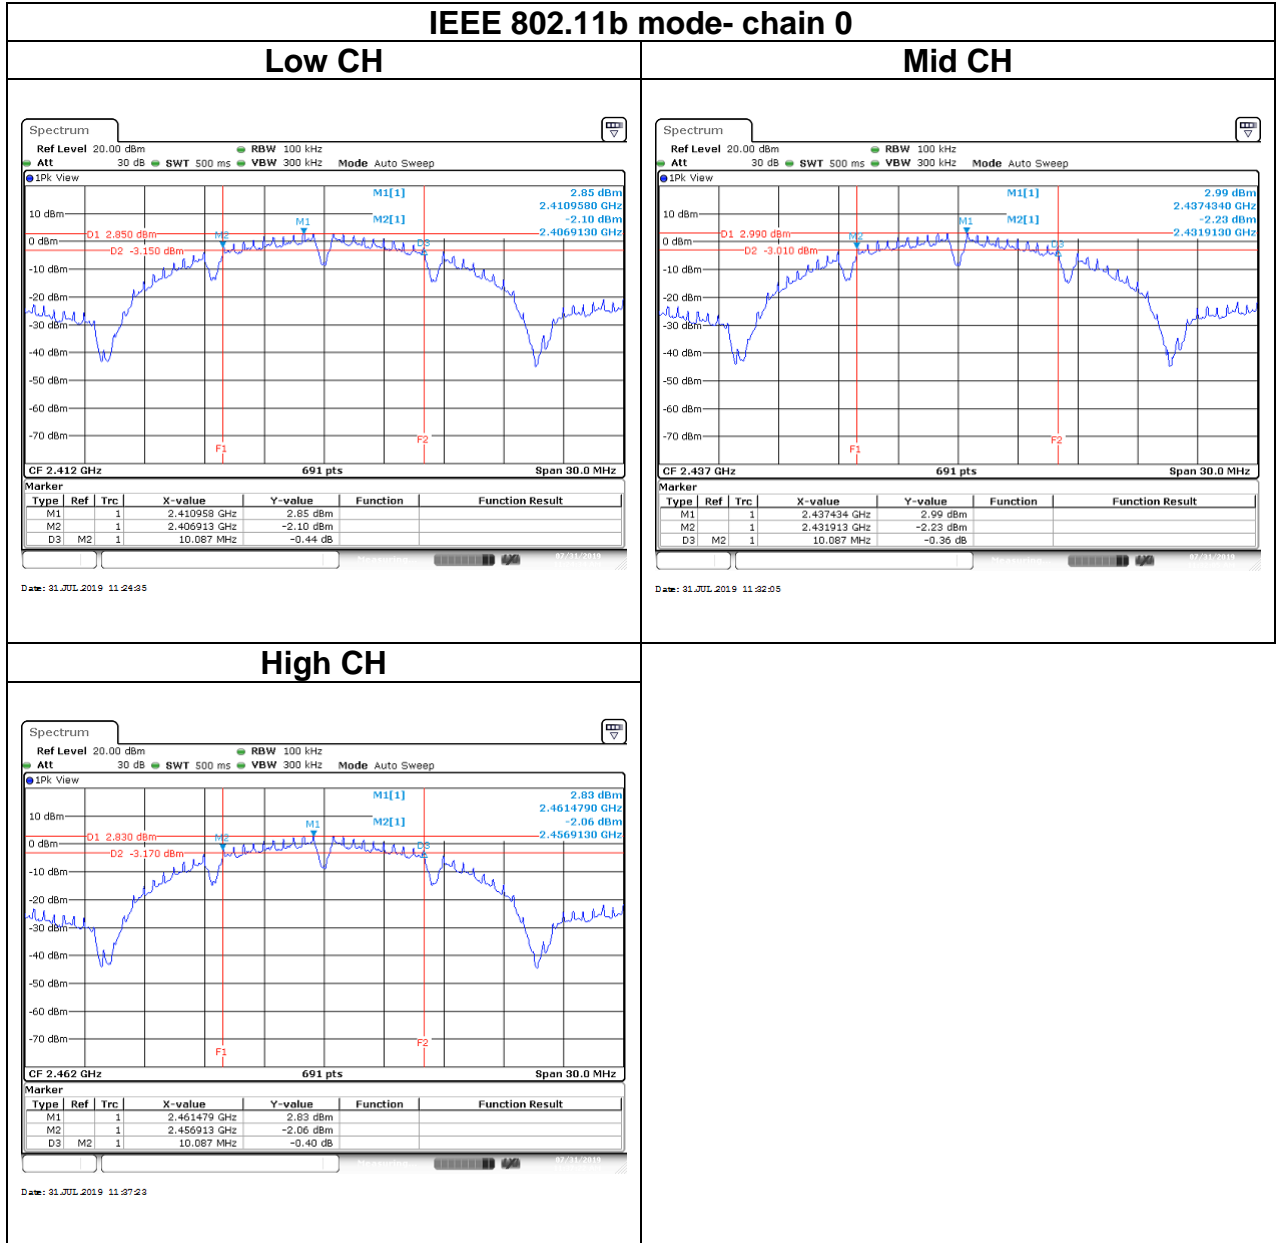


IEEE 802.11g mode- chain 0


Low CH

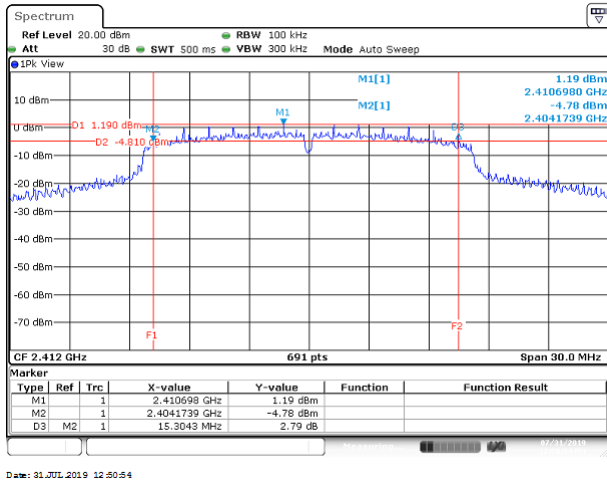

Mid CH

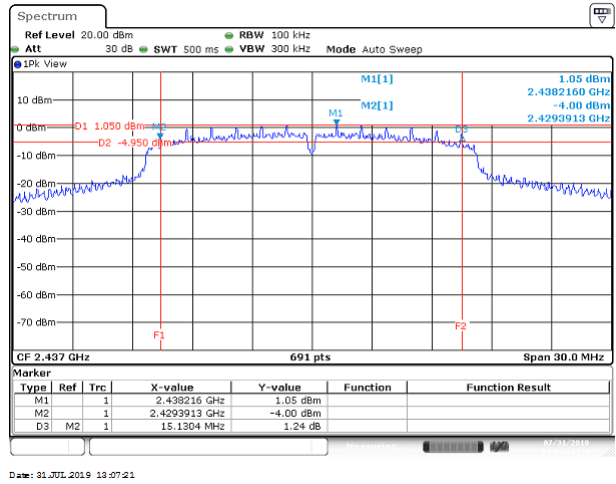


High CH

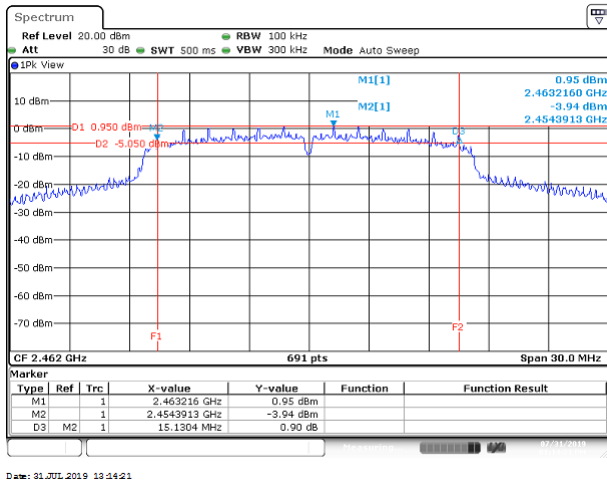


IEEE 802.11n HT20 mode- chain 0

Low CH

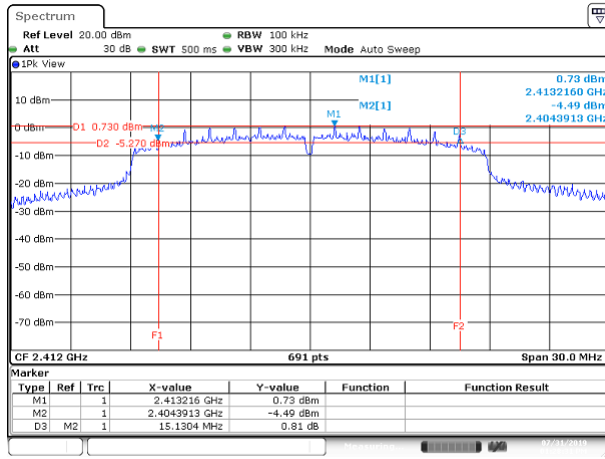


Date: 31 JUL 2019 13:28:21

Mid CH

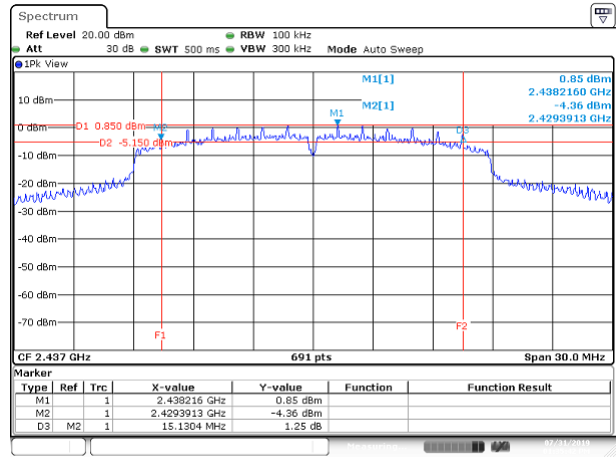


Date: 31 JUL 2019 13:25:43

High CH

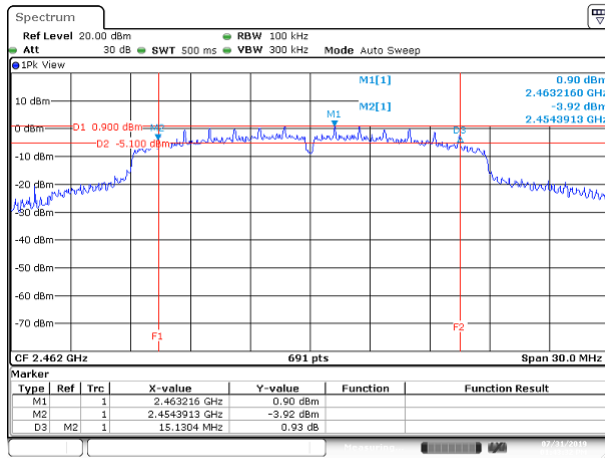


Date: 31 JUL 2019 13:43:22

Test Data (BANDWIDTH 99%)

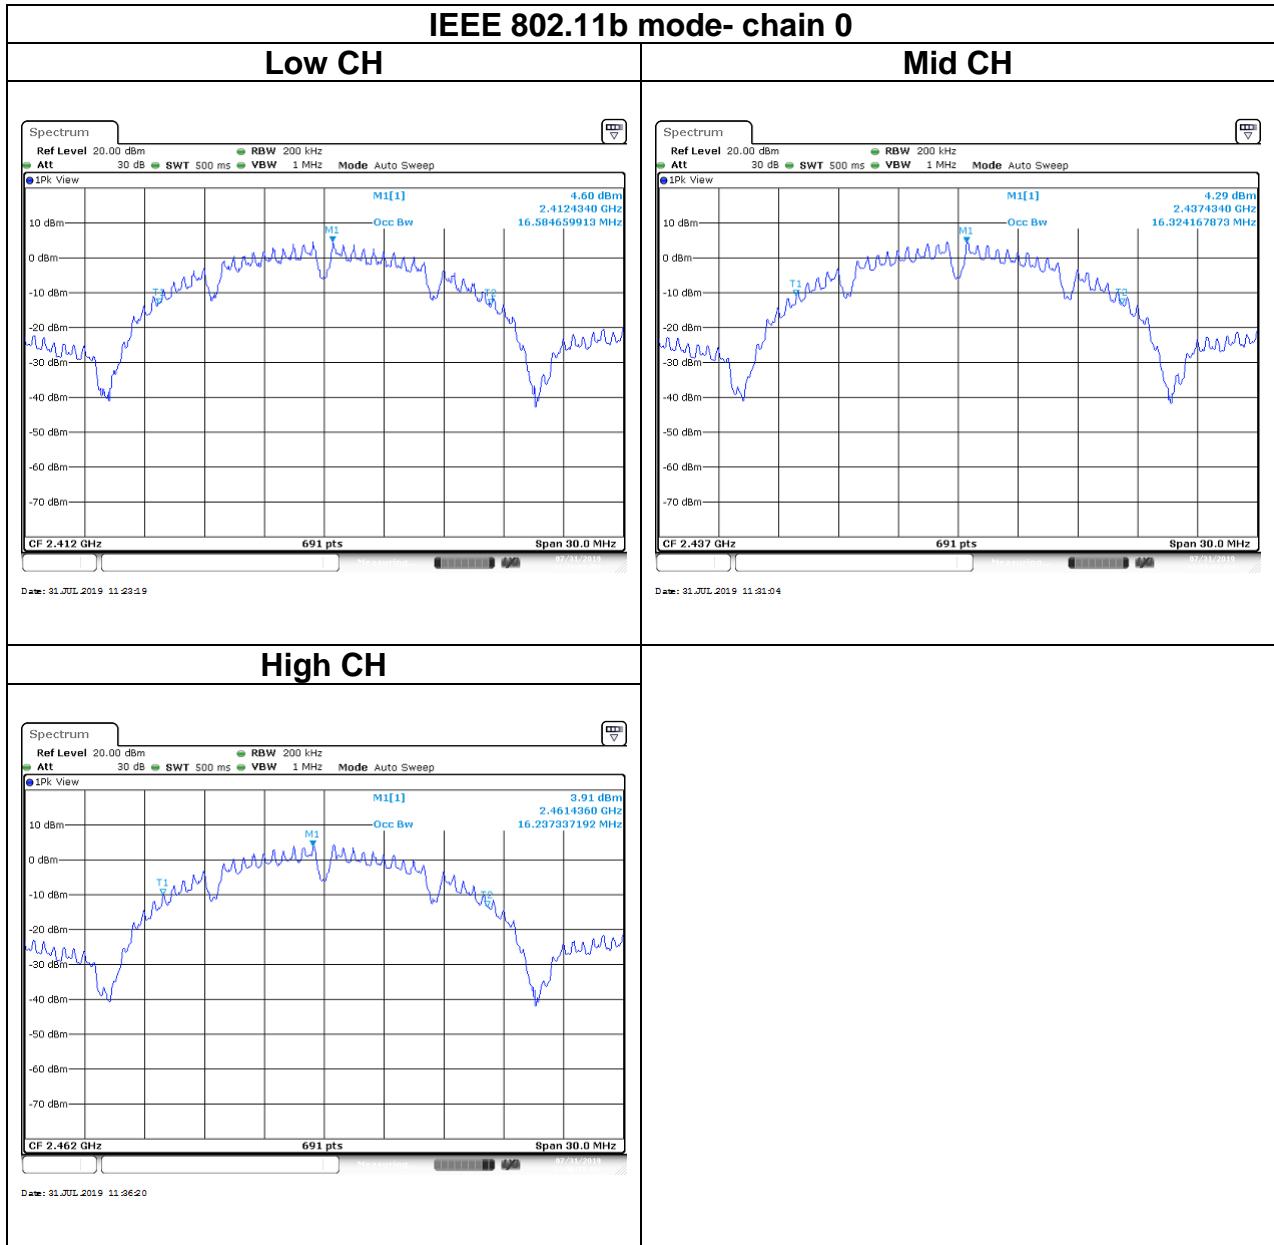


IEEE 802.11g mode- chain 0


Low CH

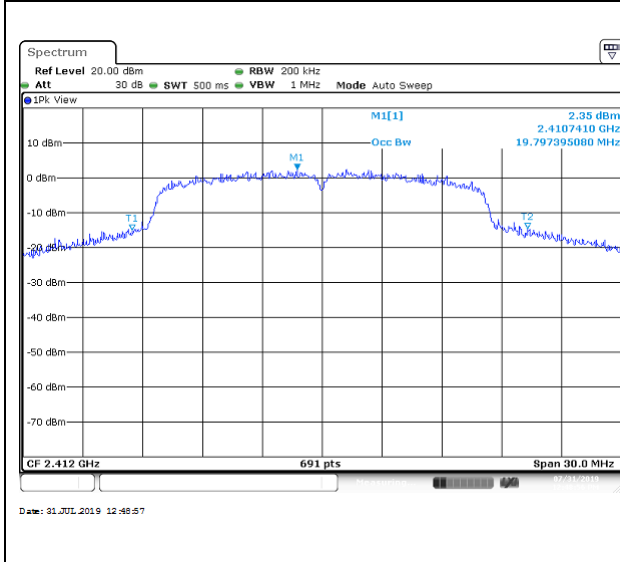


Mid CH

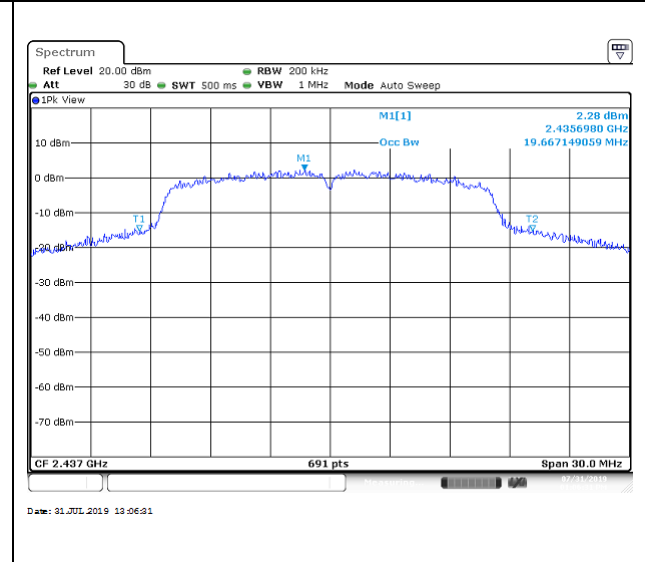

High CH

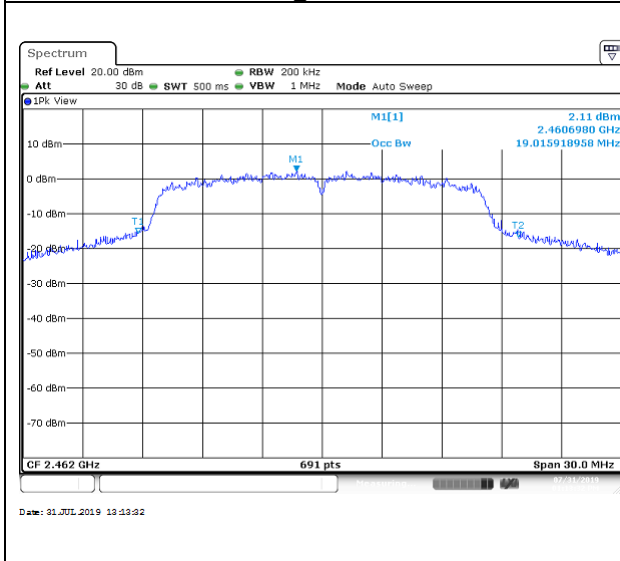

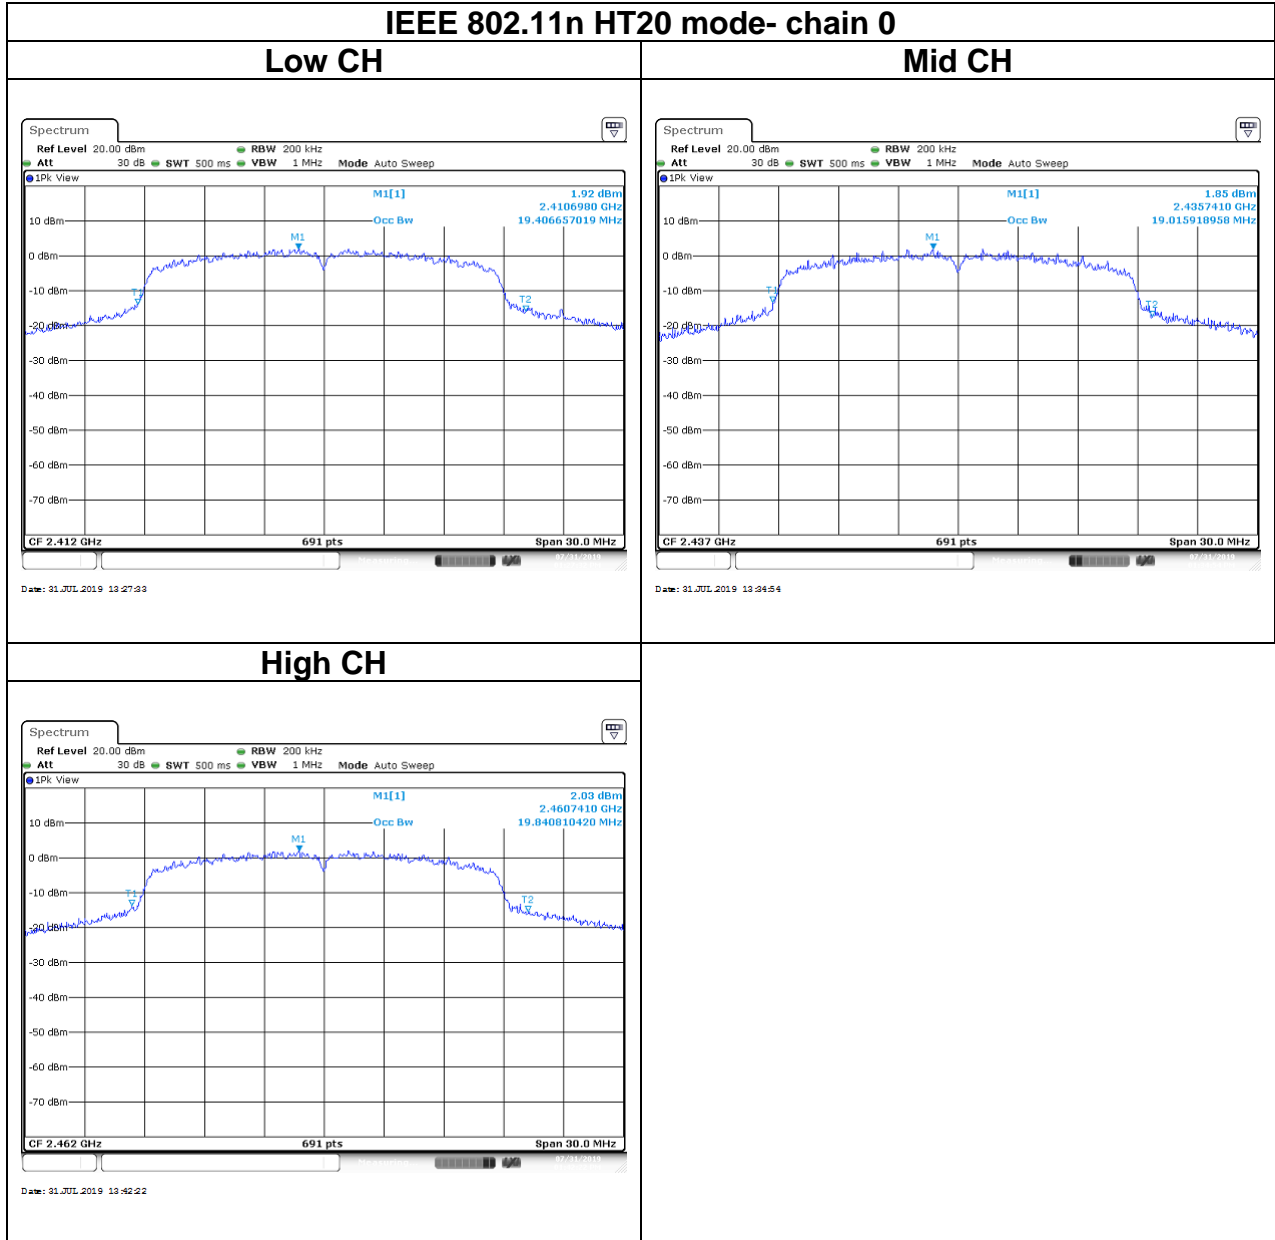

Report No.: T190711D16-RP

4.3 OUTPUT POWER MEASUREMENT

4.3.1 Test Limit

According to §15.247(b)

Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 30 – (DG – 6)] <input type="checkbox"/> Point-to-point operation :
-------	---


Average output power : For reporting purposes only.

4.3.2 Test Procedure

Test method Refer as KDB 558074 D01,

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

4.3.3 Test Setup



Report No.: T190711D16-RP

4.3.4 Test Result

Peak output power :

Wifi 2.4G						
Config	CH	Freq. (MHz)	power set	PK Power (dBm)	PK Power (W)	Limit (dBm)
IEEE 802.11b Data rate: 1Mbps	Low	2412	20	24.19	0.2624	30
	Mid	2437	20	24.09	0.2564	
	High	2462	20	24.05	0.2541	
IEEE 802.11g Data rate: 6Mbps	Low	2412	17	26.89	0.4887	
	Mid	2437	19	27.09	0.5117	
	High	2462	17	26.85	0.4842	
IEEE 802.11n HT20 Data rate: MCS0	Low	2412	17	26.75	0.4732	
	Mid	2437	19	27.03	0.5047	
	High	2462	16	26.56	0.4529	

Average output power :

Wifi 2.4G				
Config	CH	Freq. (MHz)	Power Setting	AV Power (dBm)
IEEE 802.11b Data rate: 1Mbps	Low	2412	20	21.72
	Mid	2437	20	21.57
	High	2462	20	21.52
IEEE 802.11g Data rate: 6Mbps	Low	2412	17	17.94
	Mid	2437	19	20.05
	High	2462	17	17.90
IEEE 802.11n HT20 Data rate: MCS0	Low	2412	17	17.78
	Mid	2437	19	19.84
	High	2462	16	16.70

Report No.: T190711D16-RP

4.4 POWER SPECTRAL DENSITY

4.4.1 Test Limit

According to §15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 8 – (DG – 6)] <input type="checkbox"/> Point-to-point operation :
-------	---

4.4.2 Test Procedure

Test method Refer as KDB 558074 D01

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss was compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

4.4.3 Test Setup



Report No.: T190711D16-RP

4.4.4 Test Result


Test mode: IEEE 802.11b mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PSSD (dBm)	Limit (dBm)
Low	2412	0.02	-	0.02	8
Mid	2437	-0.33	-	-0.33	
High	2462	-0.34	-	-0.34	

Test mode: IEEE 802.11g mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PSSD (dBm)	Limit (dBm)
Low	2412	-2.92	-	-2.92	8
Mid	2437	-2.89	-	-2.89	
High	2462	-2.68	-	-2.68	


Test mode: IEEE 802.11n HT 20 mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PSSD (dBm)	Limit (dBm)
Low	2412	-2.93	-	-2.93	8
Mid	2437	-2.31	-	-2.31	
High	2462	-2.79	-	-2.79	

Report No.: T190711D16-RP

Test Data

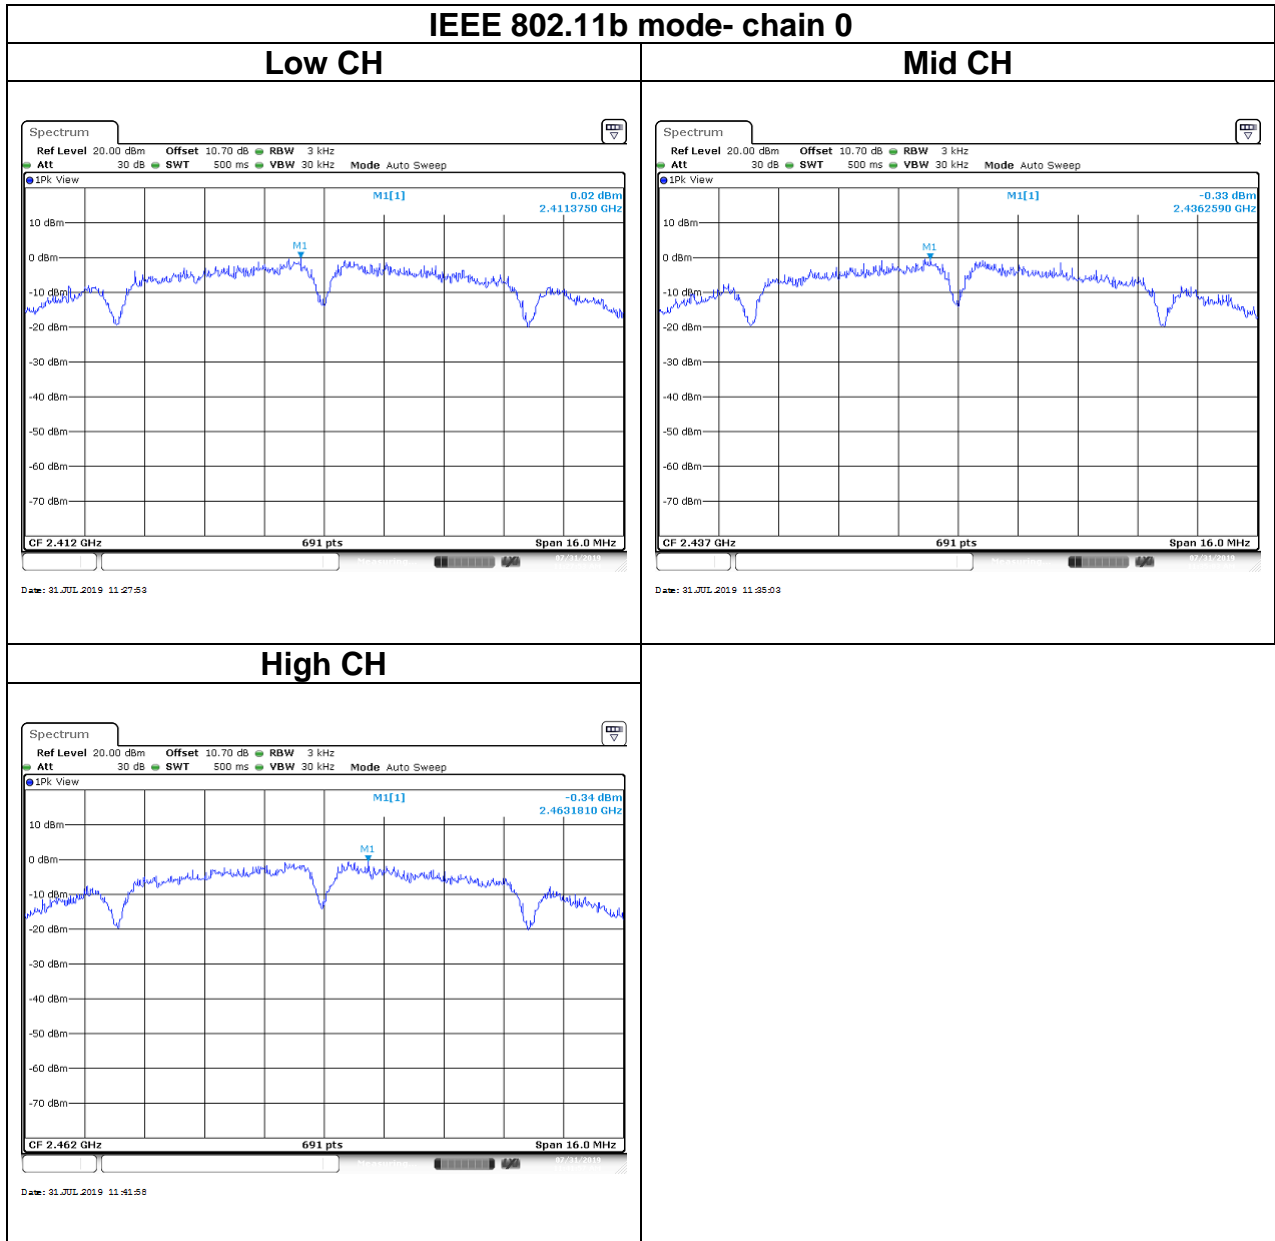


Report No.: T190711D16-RP

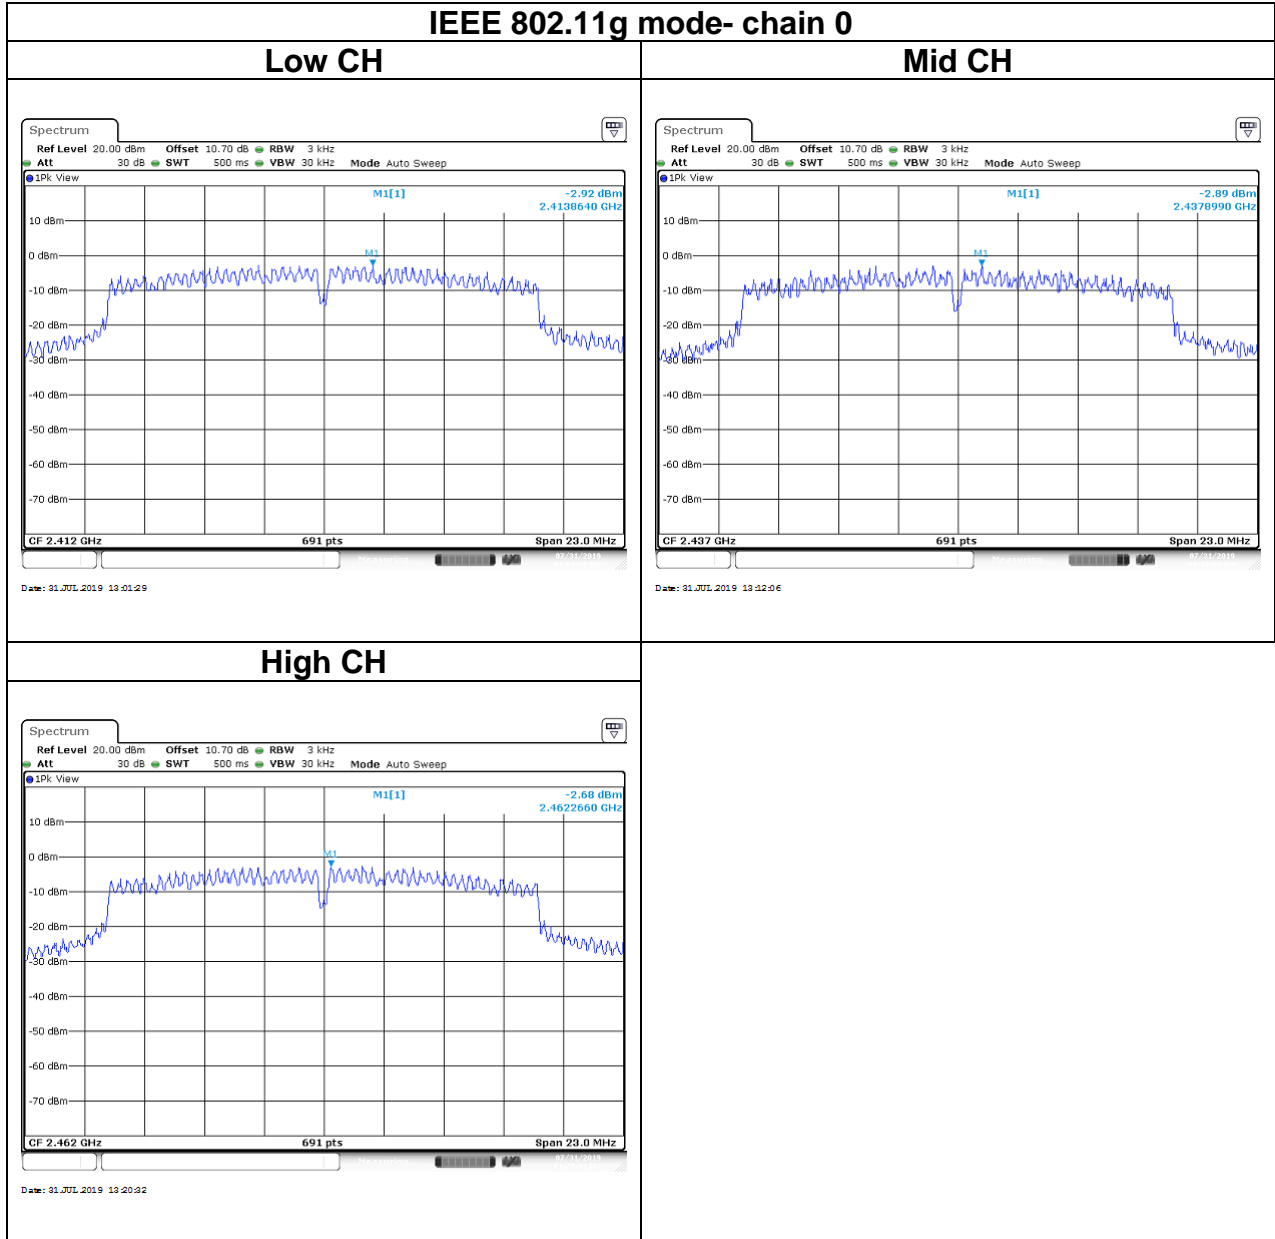


IEEE 802.11n HT20 mode- chain 0


Low CH

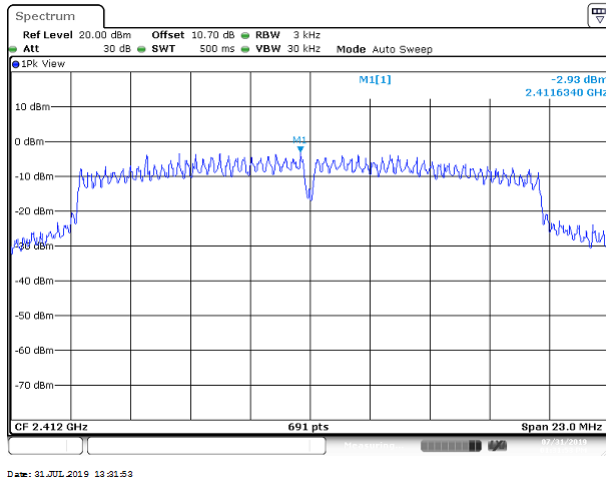

Mid CH

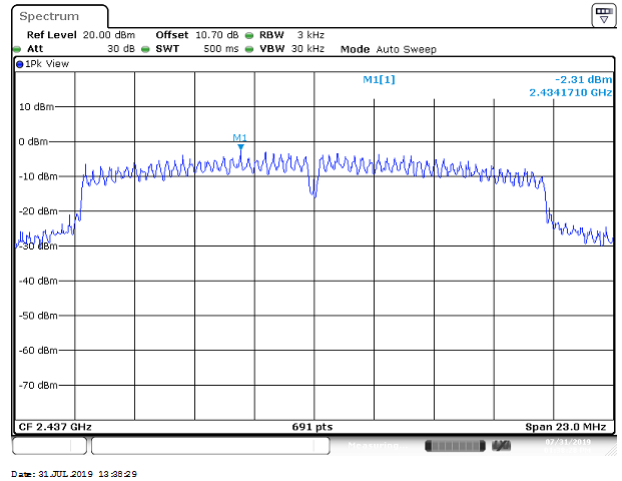

High CH

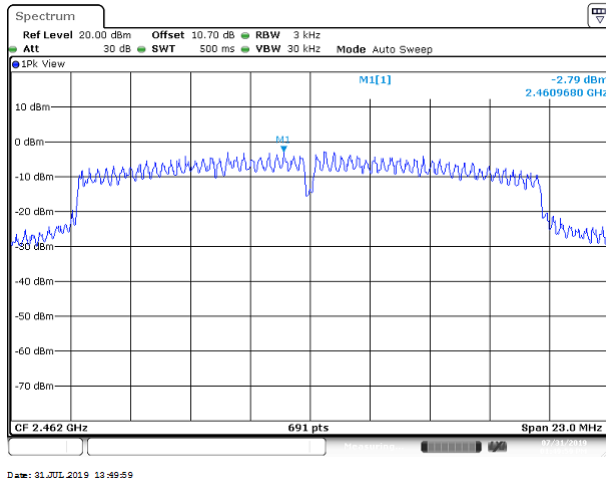

4.5 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

4.5.1 Test Limit

According to §15.247(d)

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

4.5.2 Test Procedure

Test method Refer as KDB 558074 D01

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


4.5.3 Test Setup




Report No.: T190711D16-RP

4.5.4 Test Result


Test Data

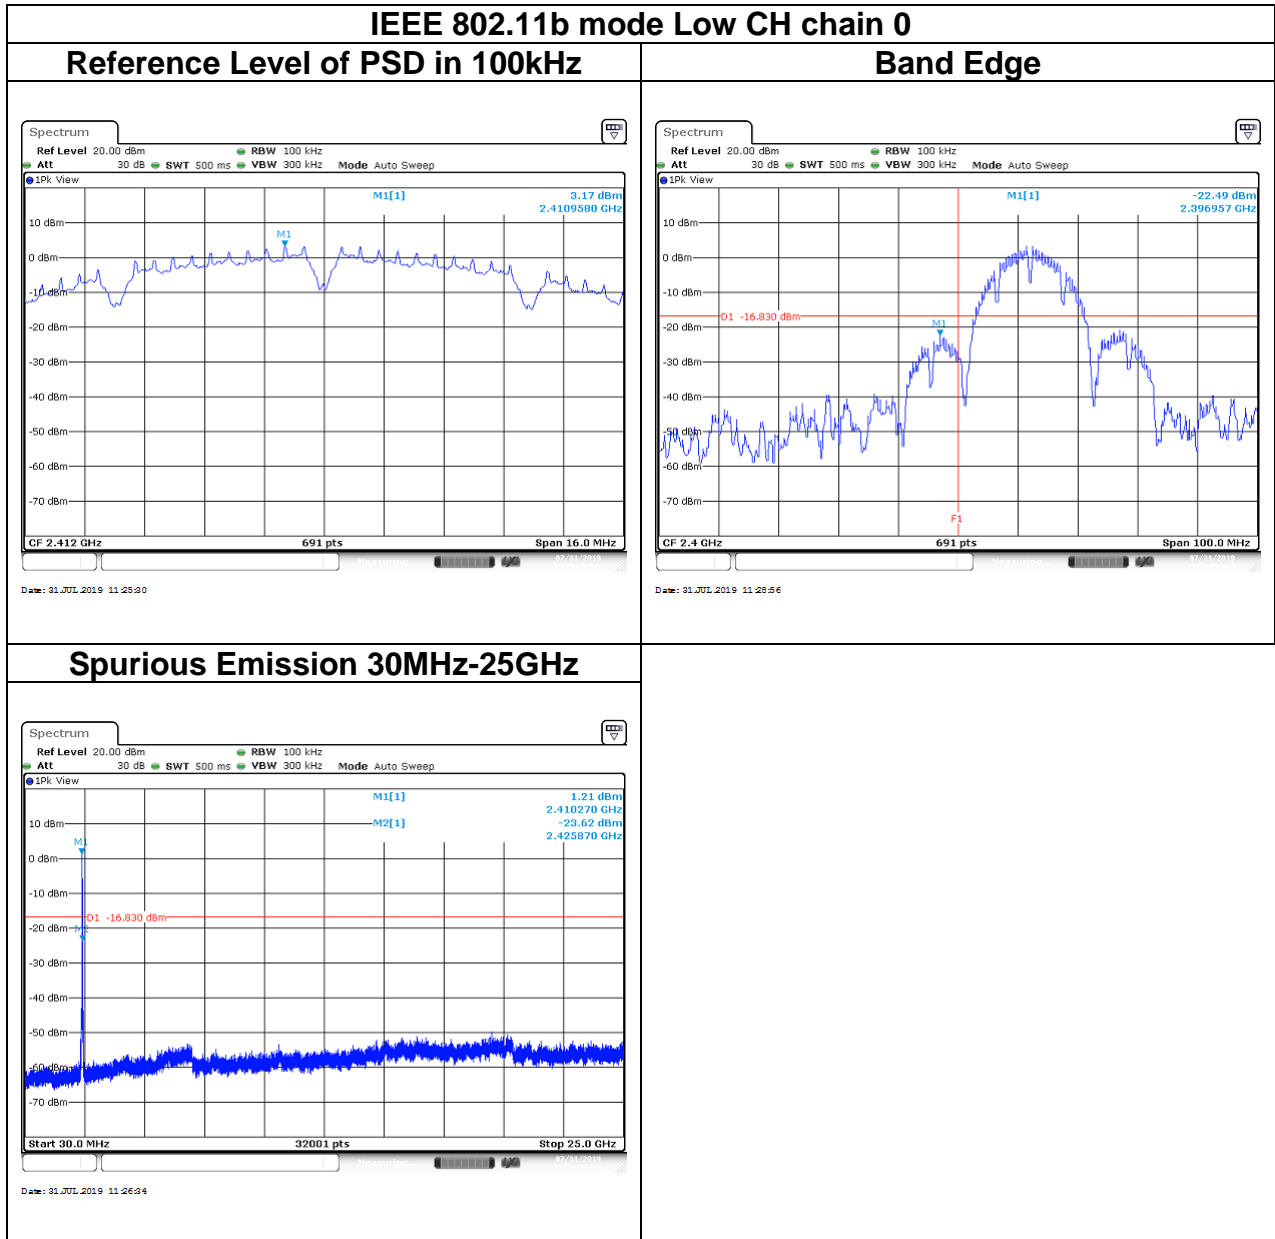


Report No.: T190711D16-RP

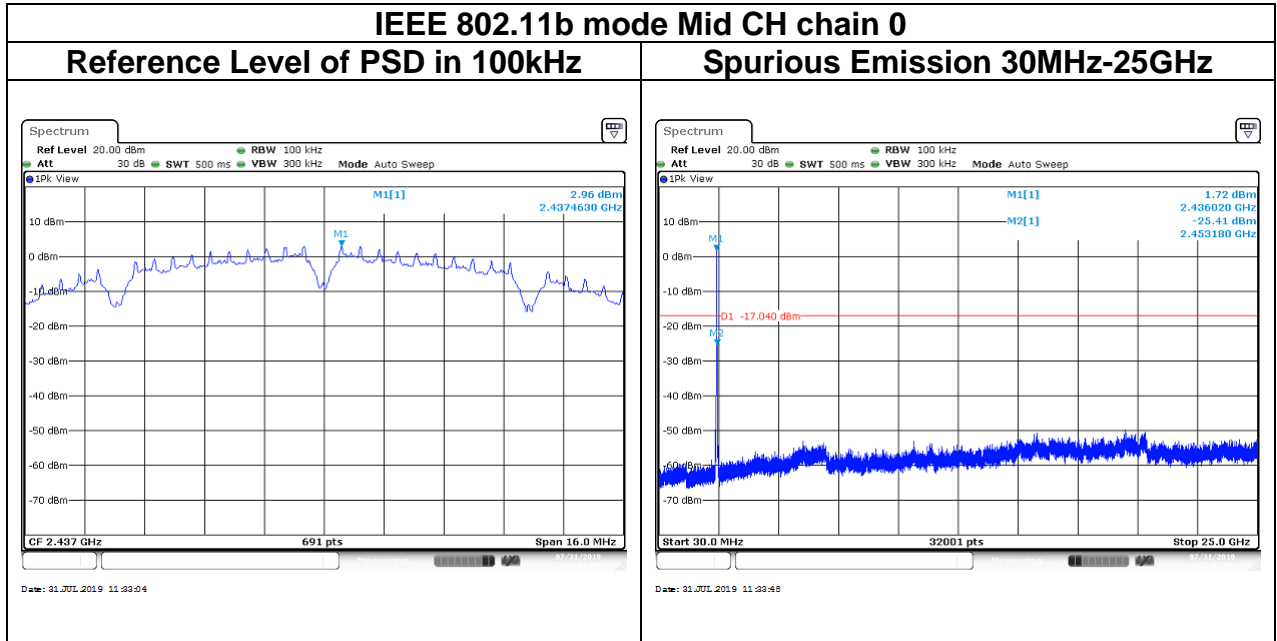


Report No.: T190711D16-RP

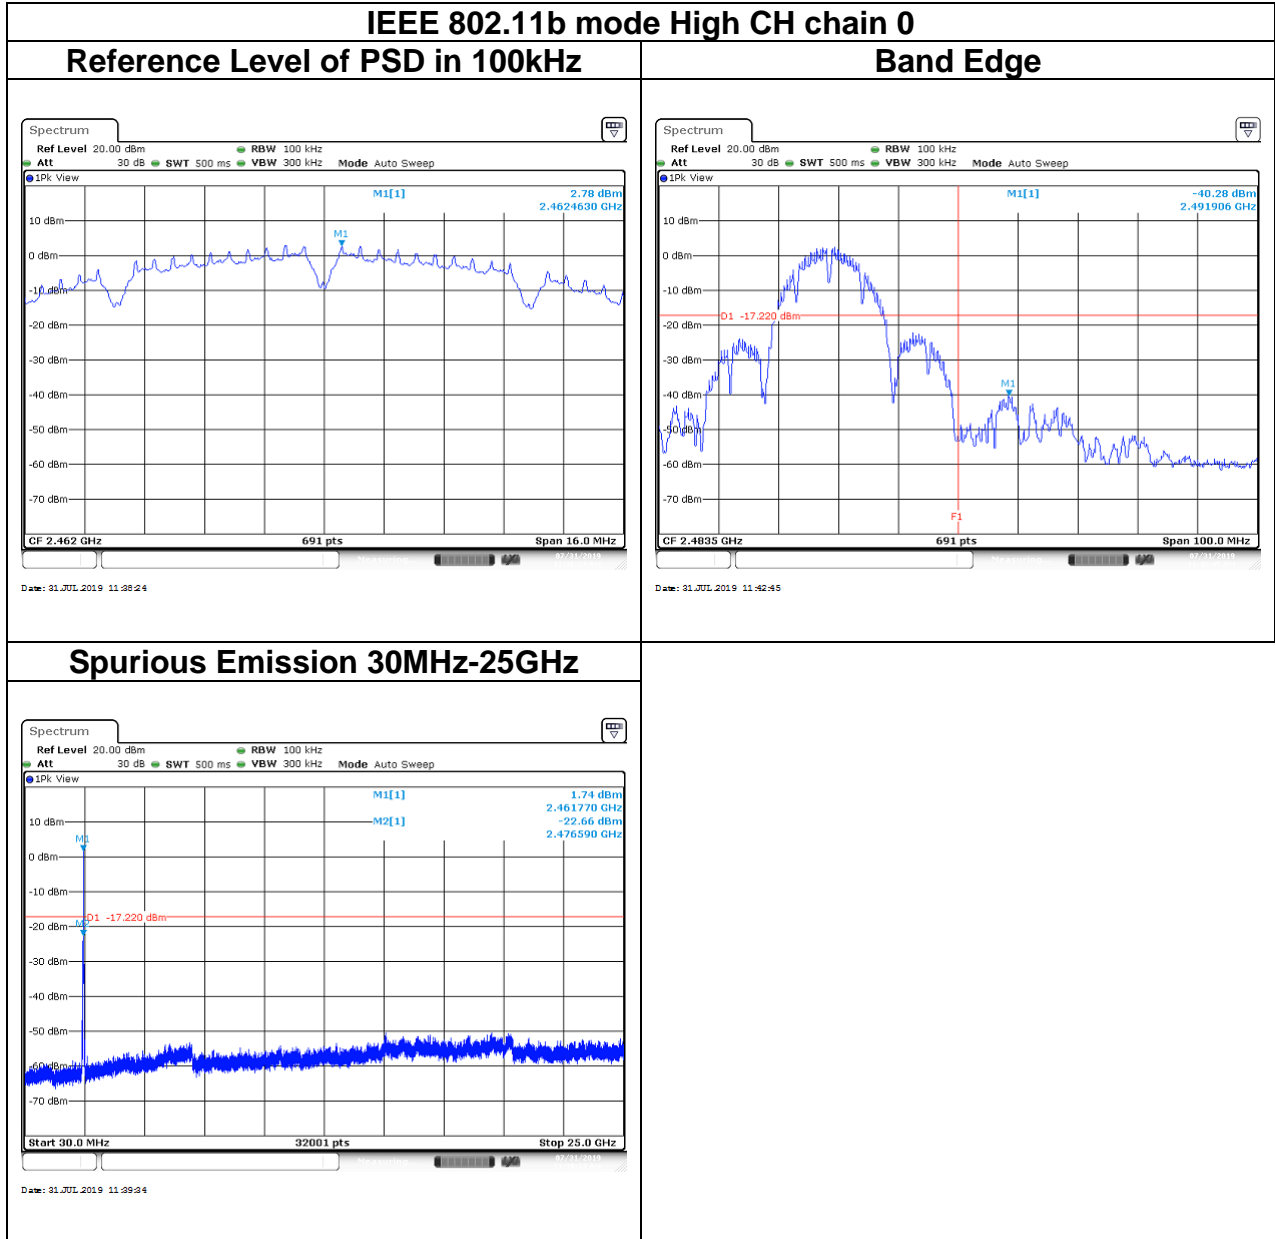

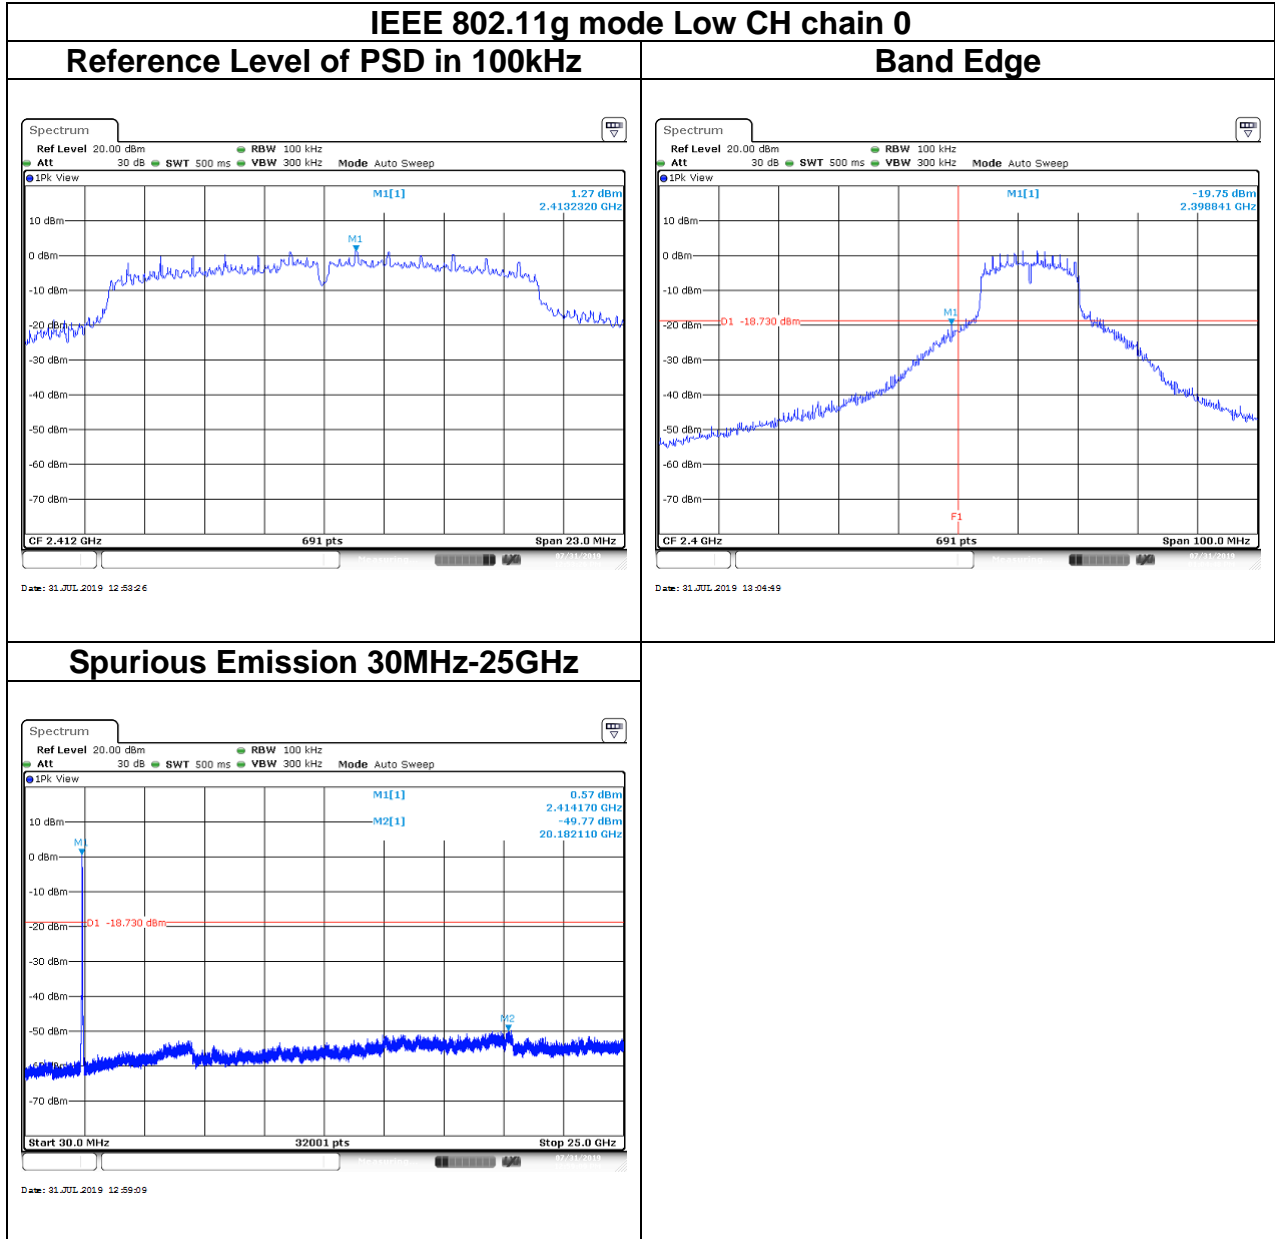


Report No.: T190711D16-RP

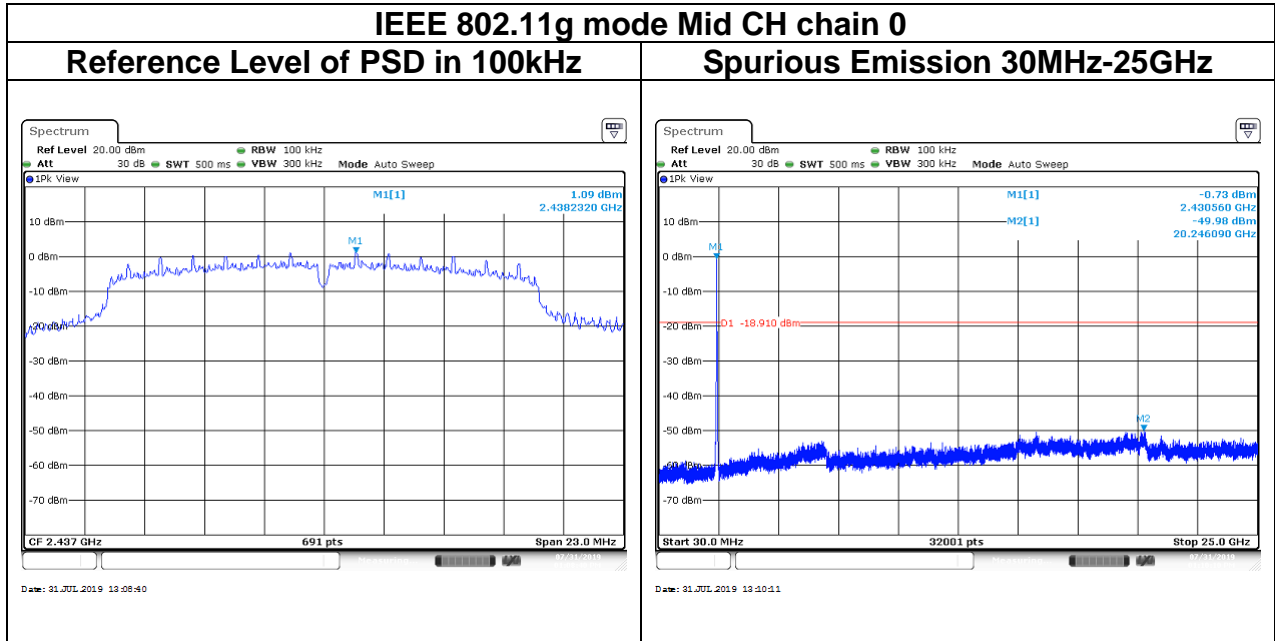

Report No.: T190711D16-RP


IEEE 802.11g mode High CH chain 0

Reference Level of PSD in 100kHz

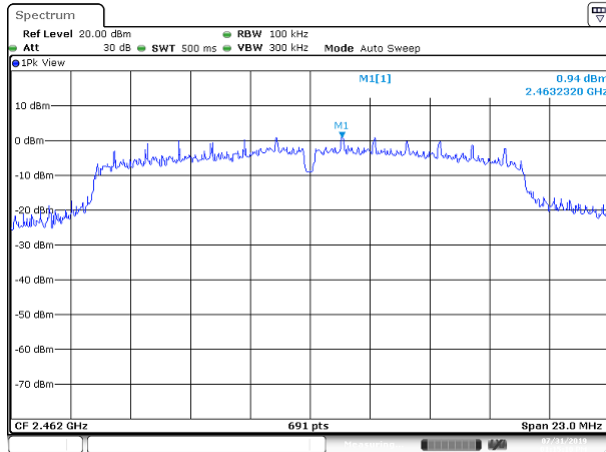


Date: 31 JUL 2019 13:25:10

Band Edge

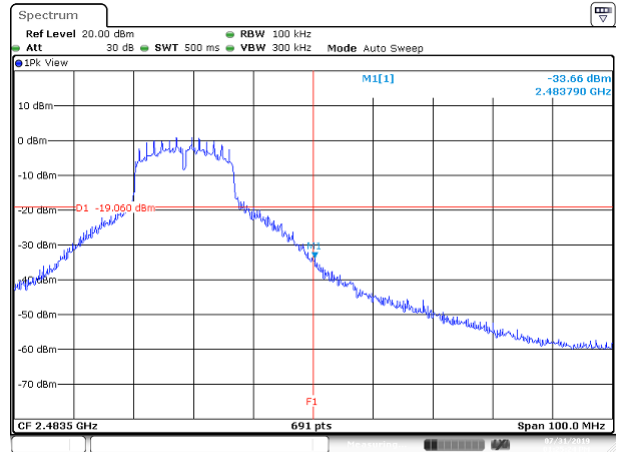


Date: 31 JUL 2019 13:25:24

Spurious Emission 30MHz-25GHz

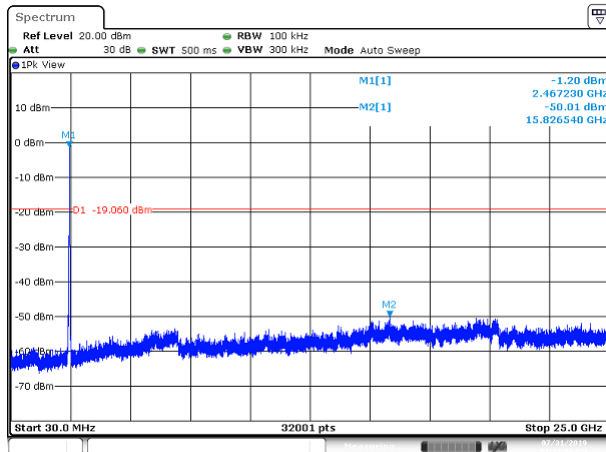



Date: 31 JUL 2019 13:27:07

Report No.: T190711D16-RP

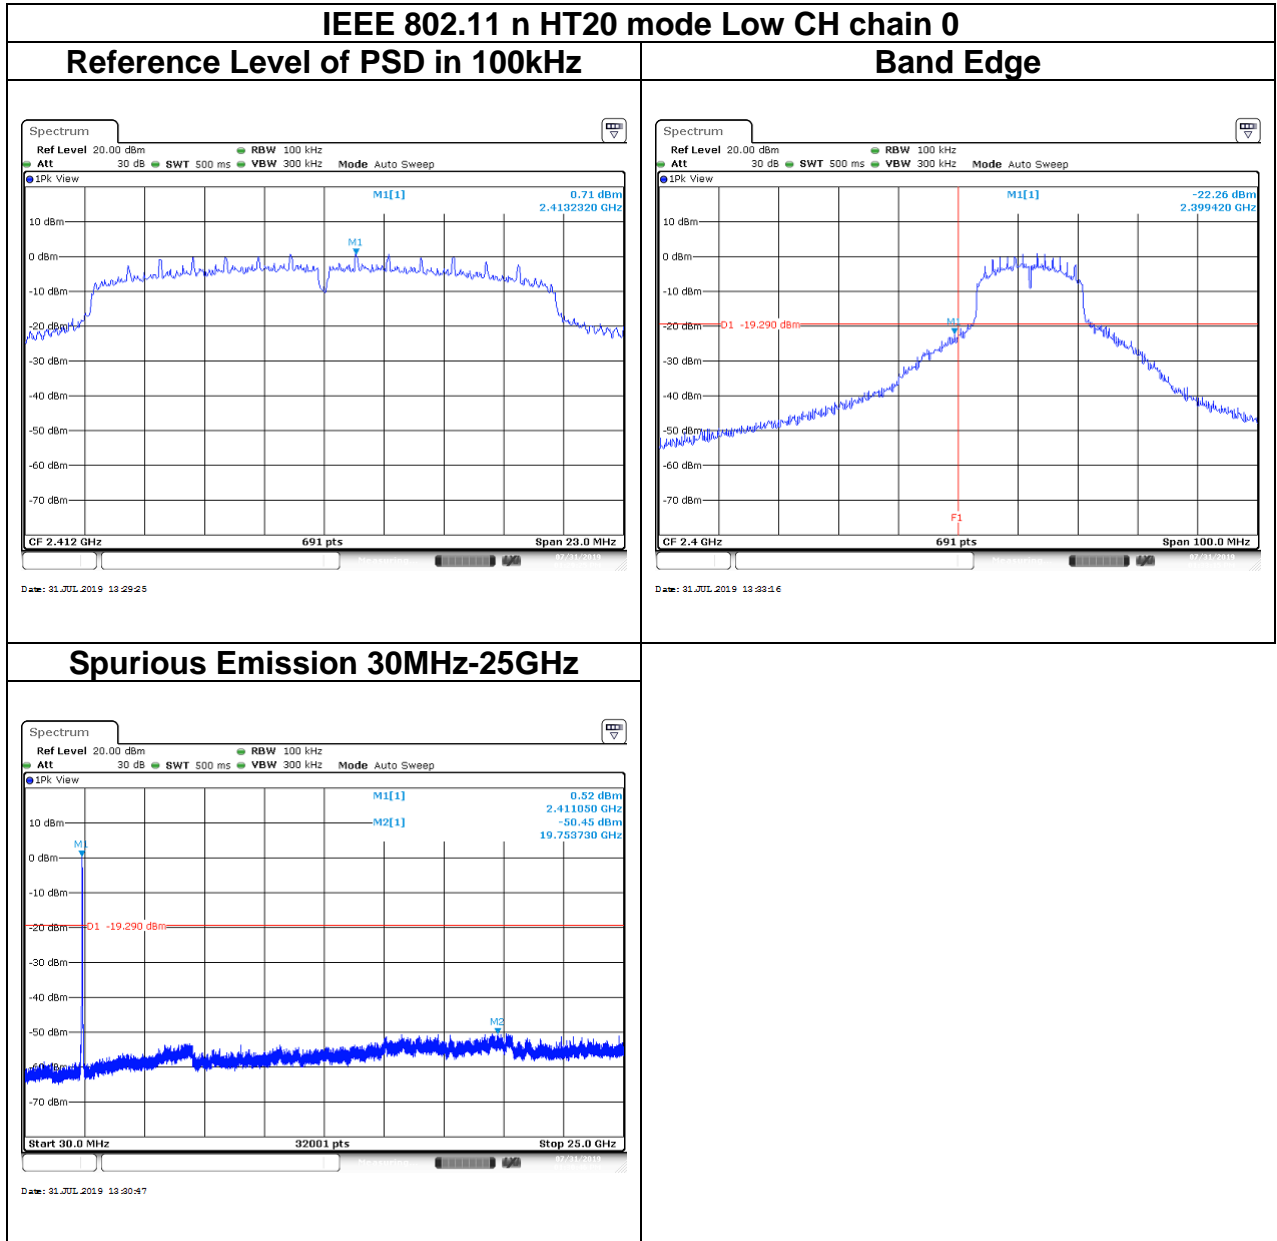

Report No.: T190711D16-RP

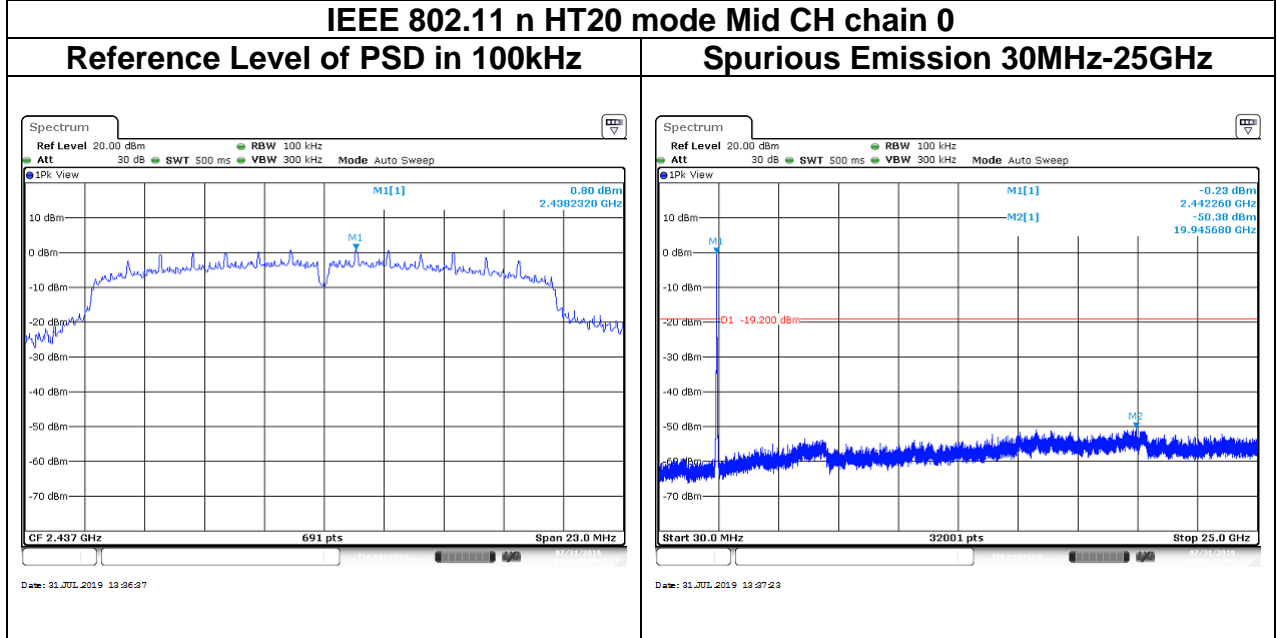

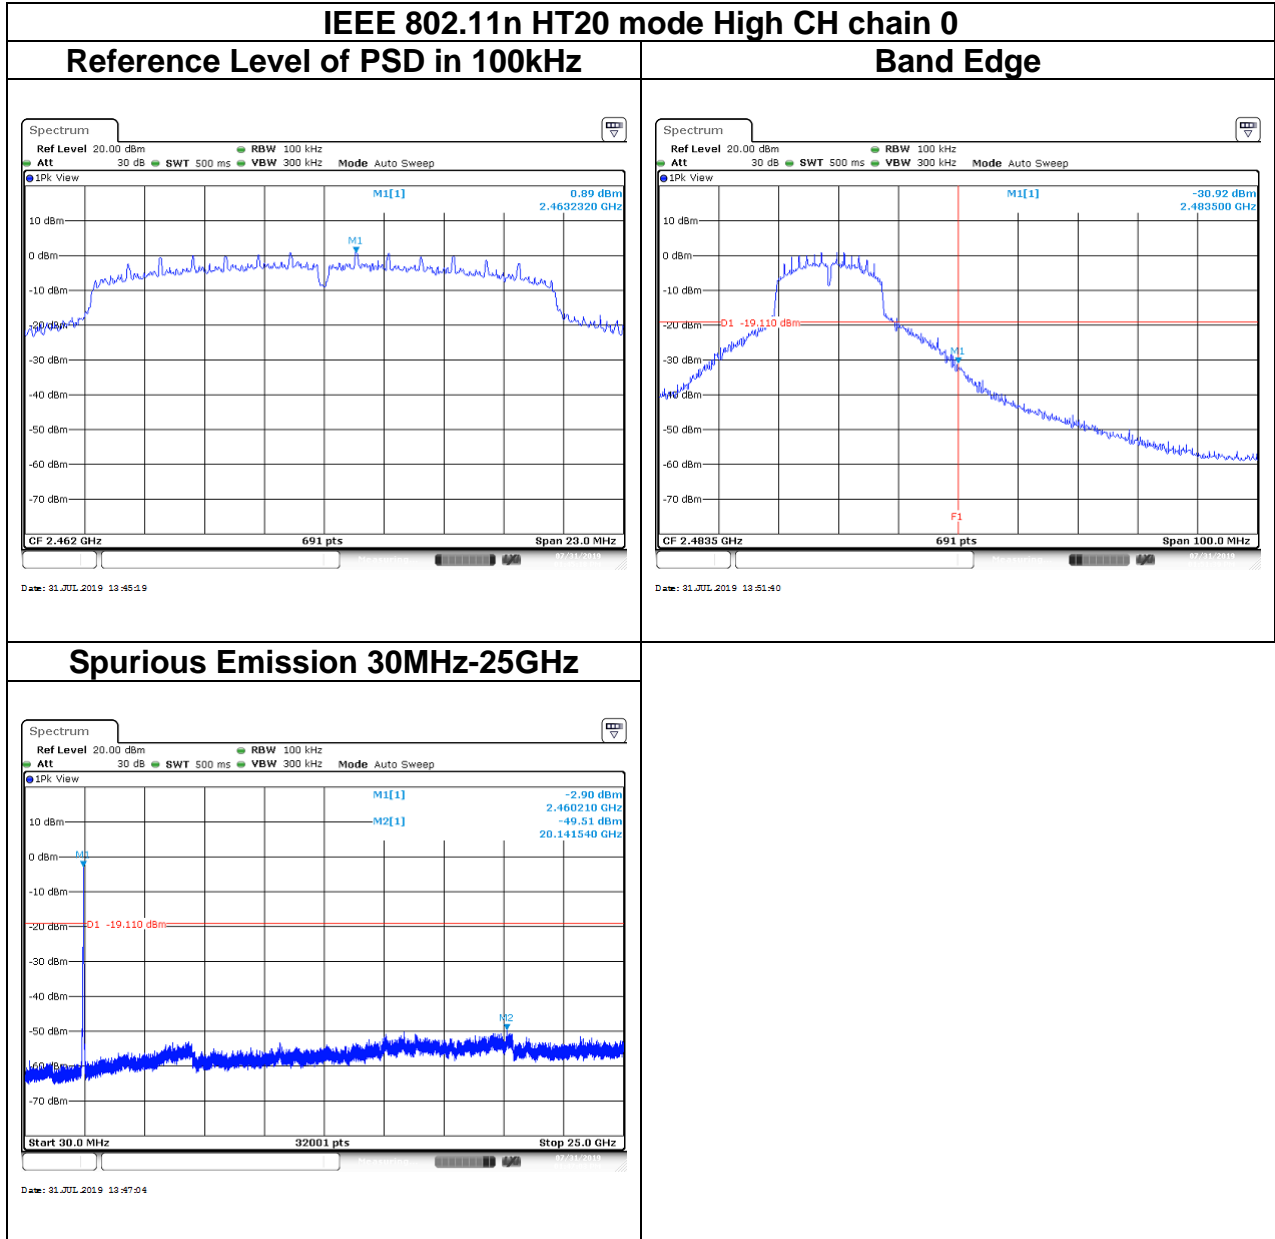

Report No.: T190711D16-RP

4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency	Field Strength (microvolts/m)	Measurement Distance (metres)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Report No.: T190711D16-RP

4.6.2 Test Procedure

Test method Refer as KDB 558074 D01

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 30MHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. The SA setting following :
 - (1) Below 1G : RBW = 100kHz, VBW \geq 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW \geq 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - If Duty Cycle \geq 98%, VBW=10Hz.
 - If Duty Cycle < 98%, VBW=1/T.

Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW Setting
802.11b	99.83%	8.6957	-	10Hz
802.11g	95.29%	1.4638	0.683	750Hz
802.11n HT20	97.12%	1.9565	0.511	560Hz


Remark:

1. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
2. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)


Report No.: T190711D16-RP

4.6.3 Test Setup

9kHz ~ 30MHz

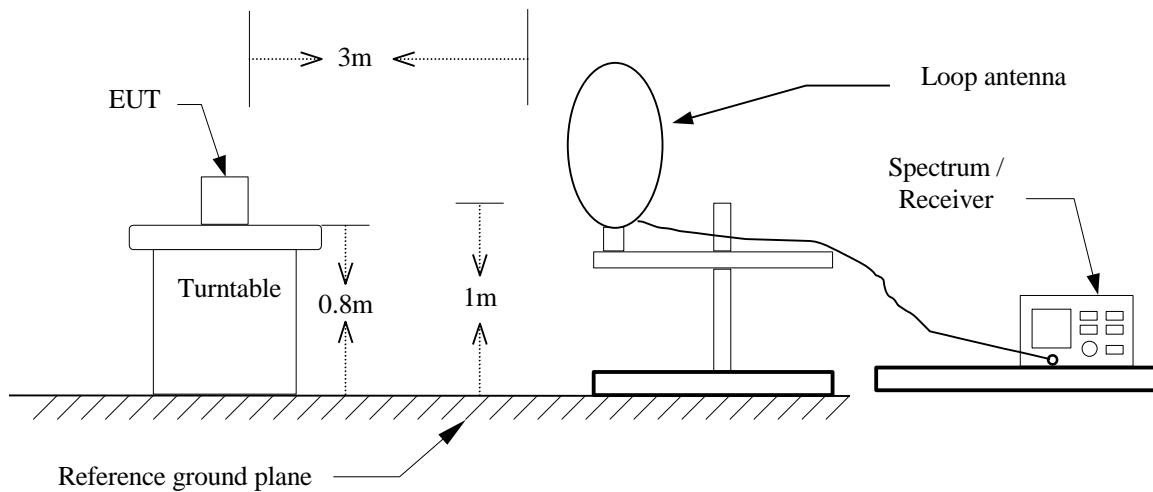


30MHz ~ 1GHz

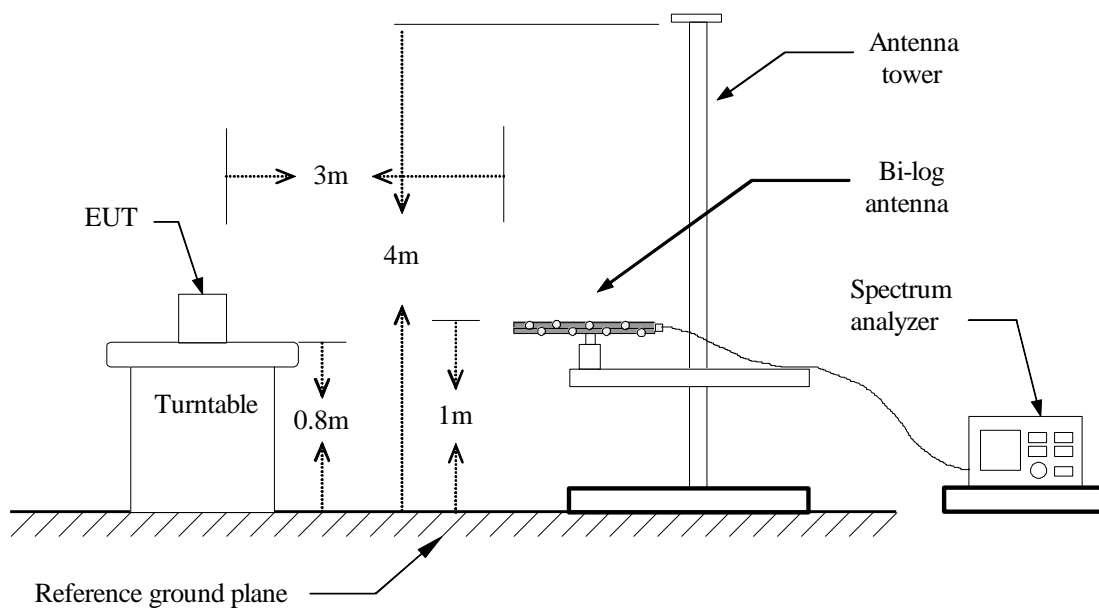

Report No.: T190711D16-RP

Above 1 GHz

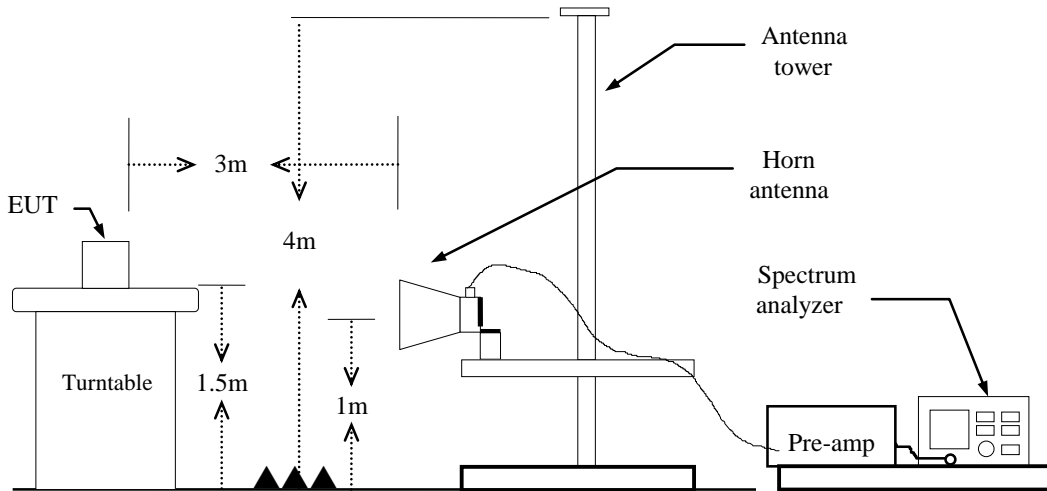


Report No.: T190711D16-RP

4.6.4 Test Result

Band Edge Test Data


Test Mode	IEEE 802.11b Low CH 2412MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak & Average		

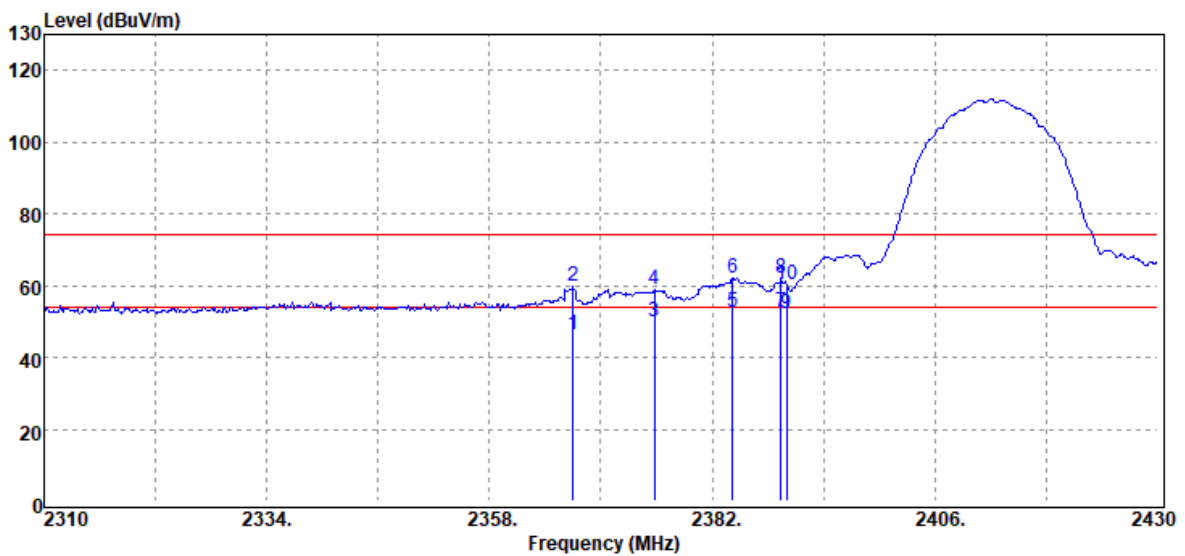

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2367.00	Average	49.50	-3.34	46.16	54.00	-7.84
2367.00	Peak	63.01	-3.34	59.67	74.00	-14.33
2375.76	Average	53.20	-3.36	49.84	54.00	-4.16
2375.76	Peak	62.41	-3.36	59.05	74.00	-14.95
2384.16	Average	56.17	-3.38	52.79	54.00	-1.21
2384.16	Peak	65.43	-3.38	62.05	74.00	-11.95
2389.44	Average	55.90	-3.39	52.51	54.00	-1.49
2389.44	Peak	65.25	-3.39	61.86	74.00	-12.14
2390.00	Average	55.65	-3.38	52.27	54.00	-1.73
2390.00	Peak	63.79	-3.38	60.41	74.00	-13.59

Report No.: T190711D16-RP


Test Mode	IEEE 802.11b Low CH 2412MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak & Average		

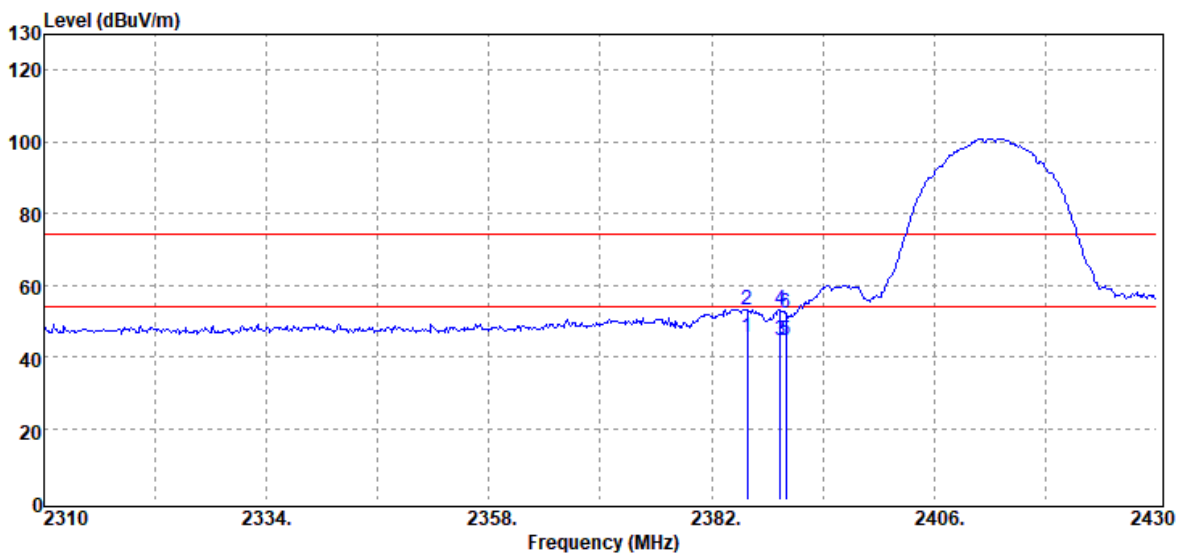

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2385.84	Average	48.82	-3.38	45.44	54.00	-8.56
2385.84	Peak	56.65	-3.38	53.27	74.00	-20.73
2389.44	Average	47.73	-3.39	44.34	54.00	-9.66
2389.44	Peak	56.57	-3.39	53.18	74.00	-20.82
2390.00	Average	48.07	-3.38	44.69	54.00	-9.31
2390.00	Peak	55.47	-3.38	52.09	74.00	-21.91

Report No.: T190711D16-RP


Test Mode	IEEE 802.11b High CH 2462MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak & Average		

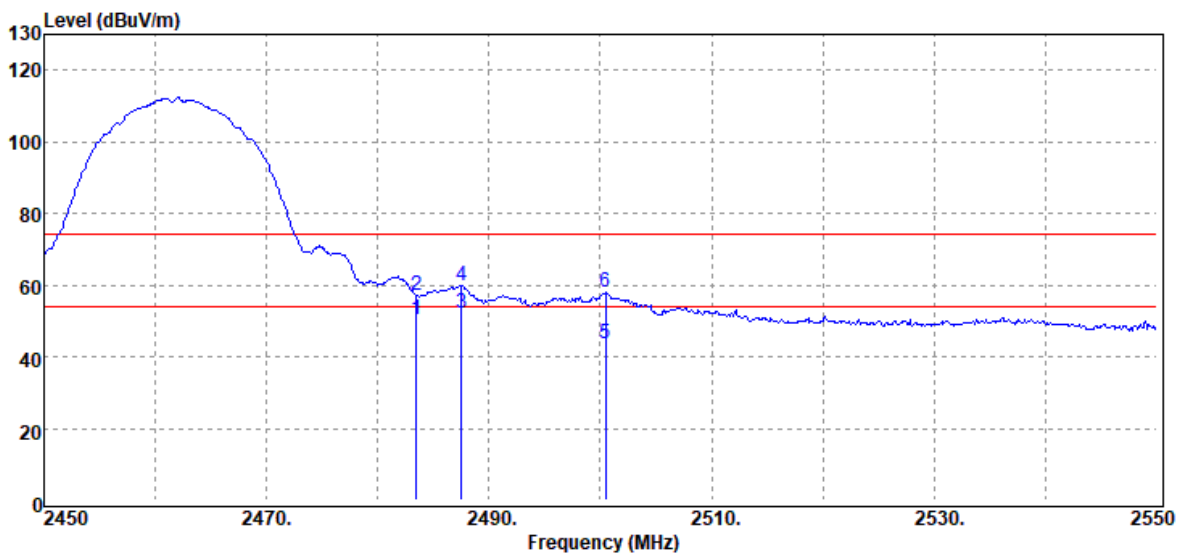

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2483.50	Average	53.28	-2.83	50.45	54.00	-3.55
2483.50	Peak	60.06	-2.83	57.23	74.00	-16.77
2487.50	Average	55.11	-2.80	52.31	54.00	-1.69
2487.50	Peak	62.71	-2.80	59.91	74.00	-14.09
2500.50	Average	46.20	-2.71	43.49	54.00	-10.51
2500.50	Peak	60.54	-2.71	57.83	74.00	-16.17

Report No.: T190711D16-RP


Test Mode	IEEE 802.11b High CH 2462MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak & Average		

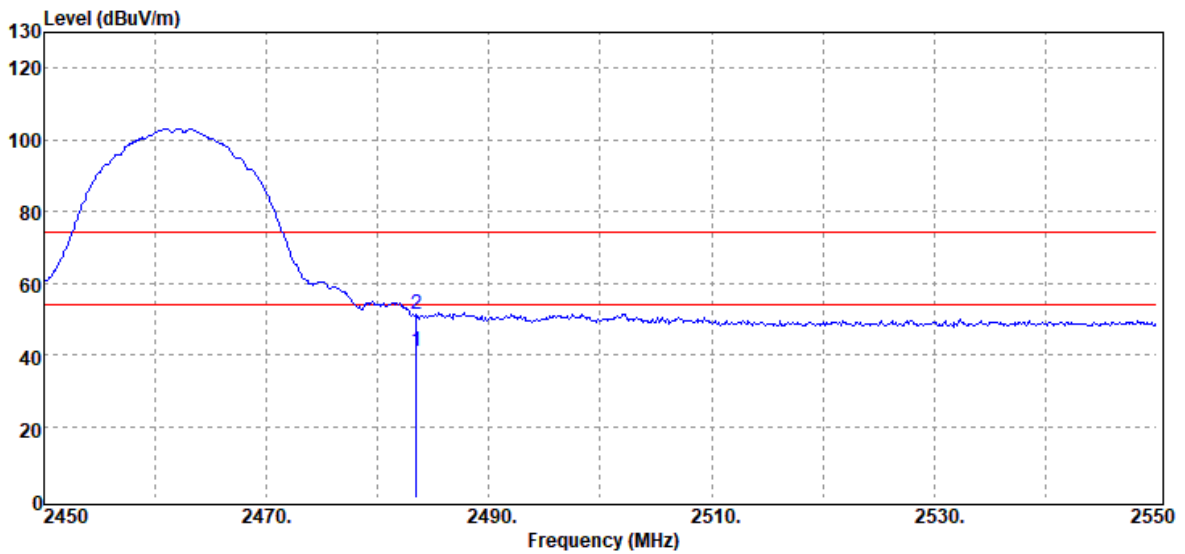

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2483.50	Average	43.60	-2.83	40.77	54.00	-13.23
2483.50	Peak	54.29	-2.83	51.46	74.00	-22.54

Report No.: T190711D16-RP


Test Mode	IEEE 802.11g Low CH 2412MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak & Average		

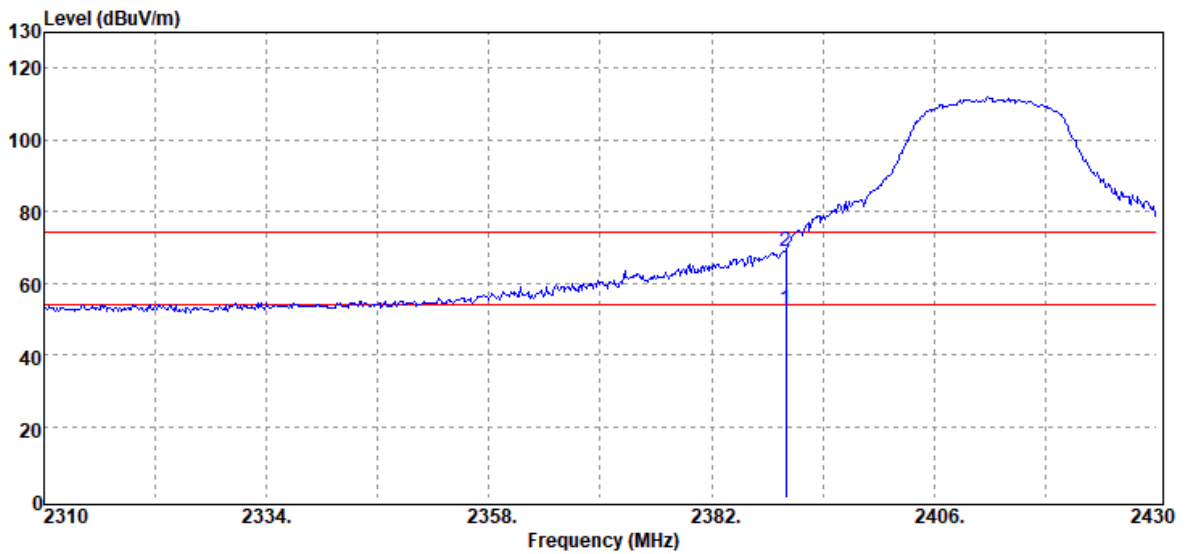

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
2390.00	Average	56.10	-3.38	52.72	54.00	-1.28
2390.00	Peak	72.20	-3.38	68.82	74.00	-5.18

Report No.: T190711D16-RP


Test Mode	IEEE 802.11g Low CH 2412MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak & Average		

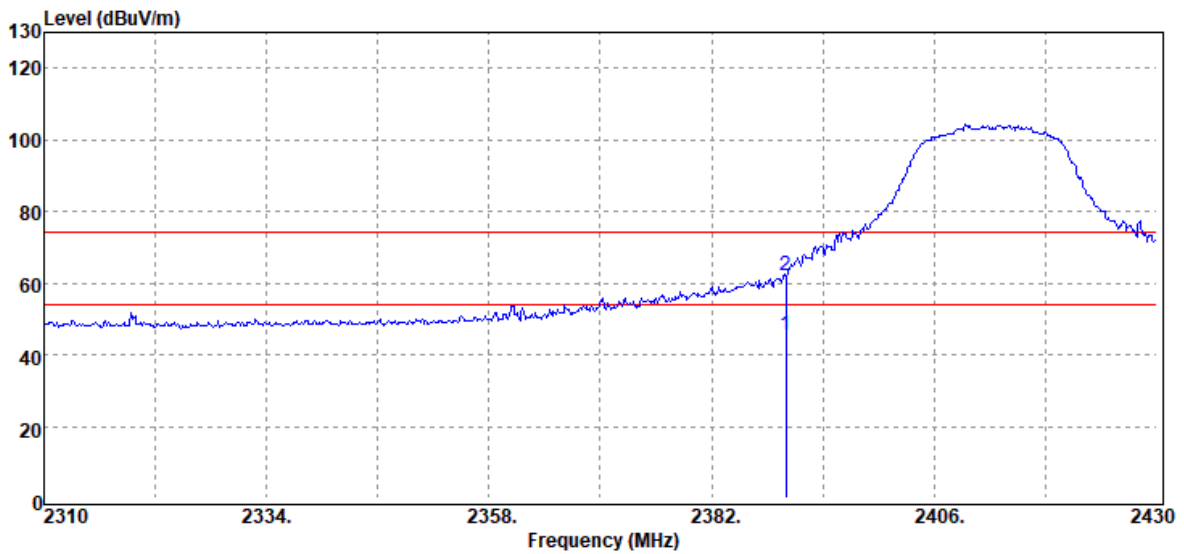

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
2390.00	Average	48.74	-3.38	45.36	54.00	-8.64
2390.00	Peak	65.35	-3.38	61.97	74.00	-12.03

Report No.: T190711D16-RP


Test Mode	IEEE 802.11g High CH 2462MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak & Average		

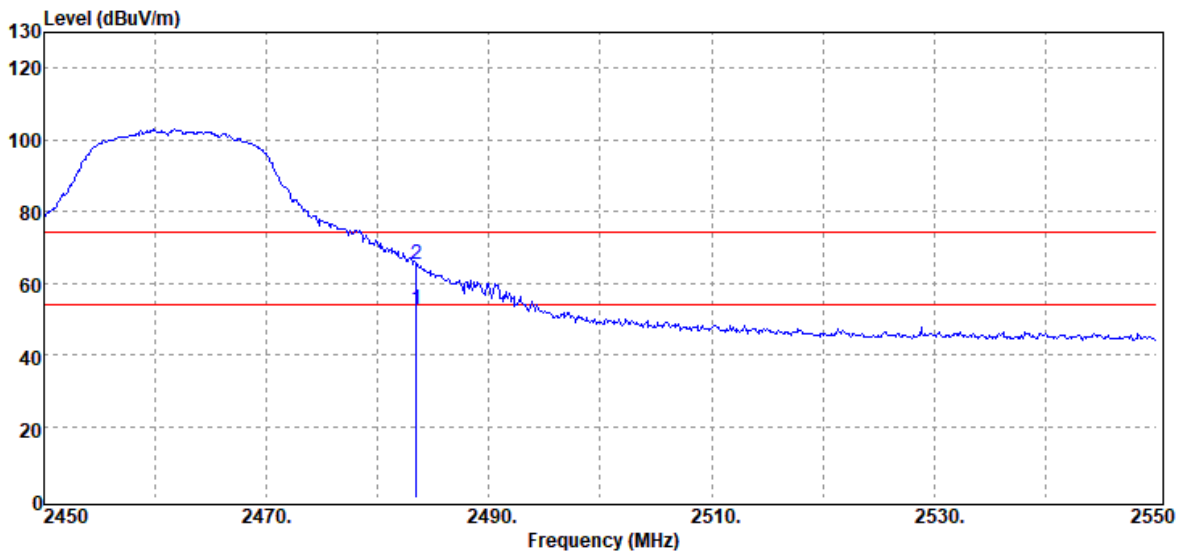

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
2483.50	Average	55.52	-2.83	52.69	54.00	-1.31
2483.50	Peak	68.03	-2.83	65.20	74.00	-8.80

Report No.: T190711D16-RP


Test Mode	IEEE 802.11g High CH 2462MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak & Average		

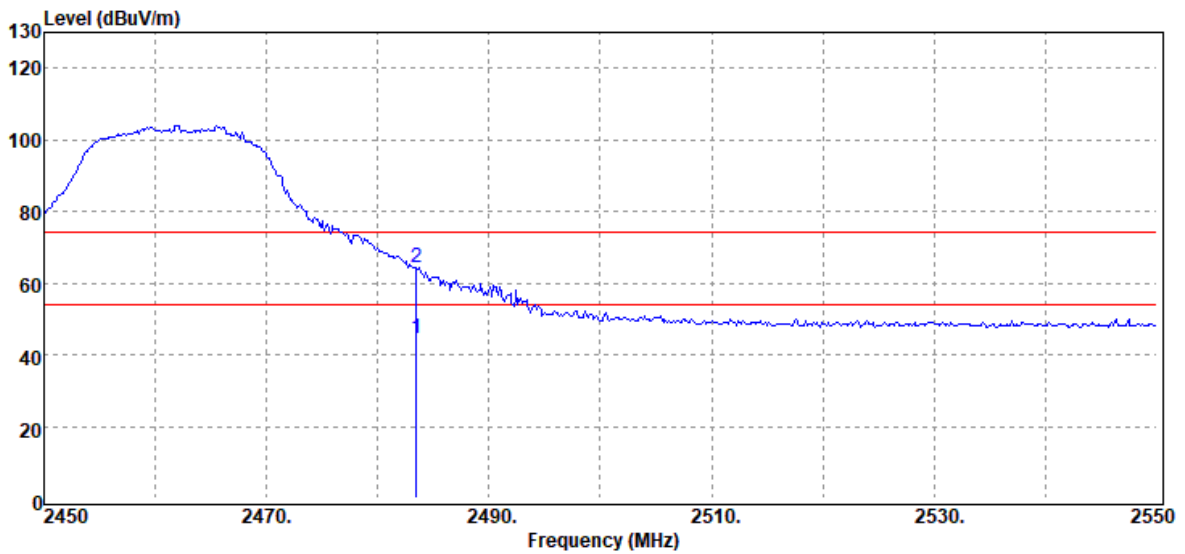

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
2483.50	Average	47.53	-2.83	44.70	54.00	-9.30
2483.50	Peak	67.25	-2.83	64.42	74.00	-9.58

Report No.: T190711D16-RP


Test Mode	IEEE 802.11n20 Low CH 2412MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak & Average		

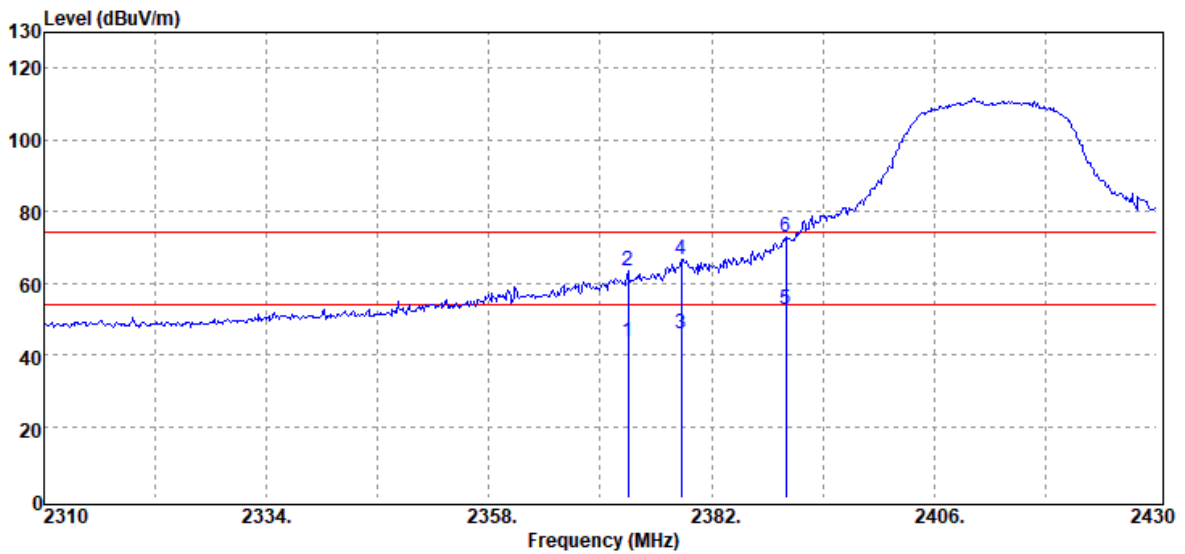

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
2373.00	Average	47.12	-3.36	43.76	54.00	-10.24
2373.00	Peak	66.60	-3.36	63.24	74.00	-10.76
2378.76	Average	49.28	-3.37	45.91	54.00	-8.09
2378.76	Peak	70.16	-3.37	66.79	74.00	-7.21
2390.00	Average	56.14	-3.38	52.76	54.00	-1.24
2390.00	Peak	76.10	-3.38	72.72	74.00	-1.28

Report No.: T190711D16-RP


Test Mode	IEEE 802.11 n20 Low CH 2412MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak & Average		

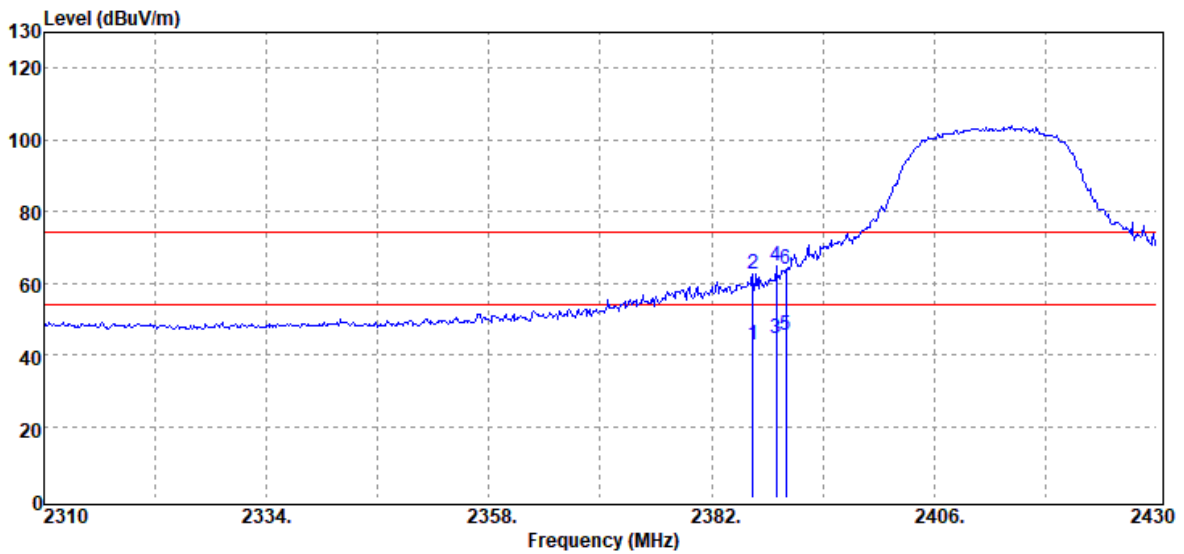

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
2386.44	Average	45.99	-3.38	42.61	54.00	-11.39
2386.44	Peak	65.73	-3.38	62.35	74.00	-11.65
2388.96	Average	47.72	-3.39	44.33	54.00	-9.67
2388.96	Peak	68.04	-3.39	64.65	74.00	-9.35
2390.00	Average	48.62	-3.38	45.24	54.00	-8.76
2390.00	Peak	67.41	-3.38	64.03	74.00	-9.97

Report No.: T190711D16-RP


Test Mode	IEEE 802.11n20 High CH 2462MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak & Average		

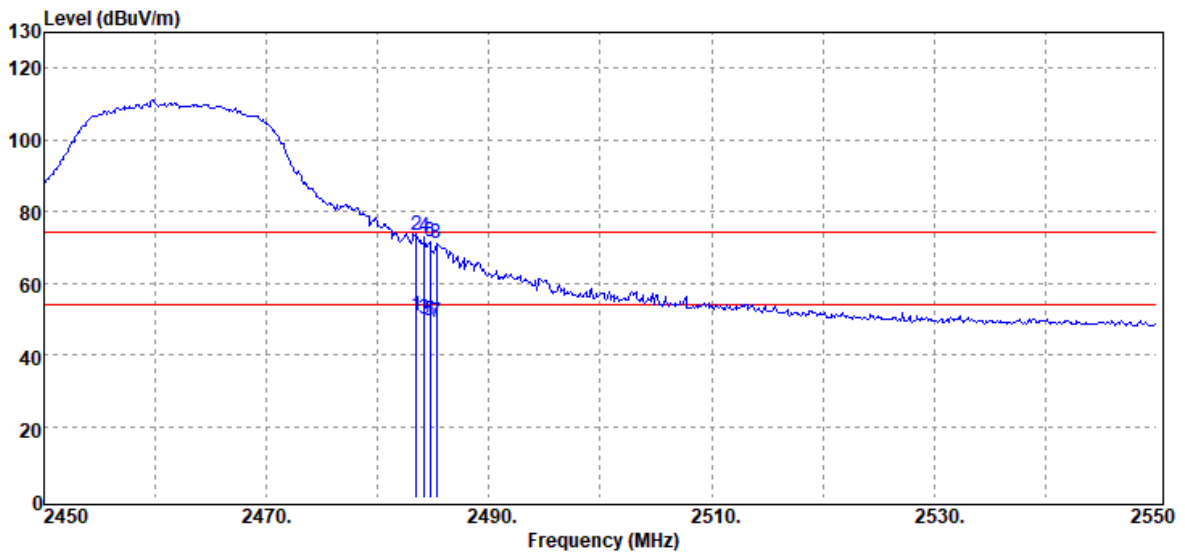

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
2483.50	Average	53.82	-2.83	50.99	54.00	-3.01
2483.50	Peak	75.97	-2.83	73.14	74.00	-0.86
2484.20	Average	52.54	-2.82	49.72	54.00	-4.28
2484.20	Peak	75.50	-2.82	72.68	74.00	-1.32
2484.70	Average	52.49	-2.82	49.67	54.00	-4.33
2484.70	Peak	74.51	-2.82	71.69	74.00	-2.31
2485.30	Average	51.96	-2.82	49.14	54.00	-4.86
2485.30	Peak	73.78	-2.82	70.96	74.00	-3.04

Report No.: T190711D16-RP

Test Mode	IEEE 802.11n20 High CH 2462MHz	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Band Edge	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak & Average		

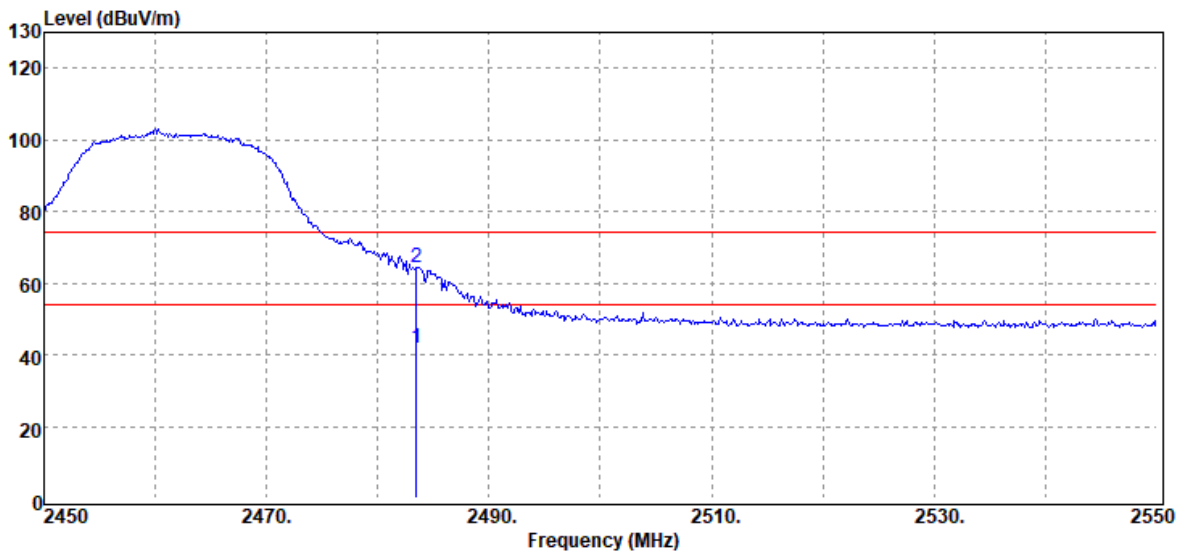


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
2483.50	Average	44.51	-2.83	41.68	54.00	-12.32
2483.50	Peak	67.32	-2.83	64.49	74.00	-9.51

Report No.: T190711D16-RP

Below 1G Test Data


Test Mode	Mode 4	Temp/Hum	24.5(°C)/ 43%RH
Test Item	30MHz-1GHz	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak		

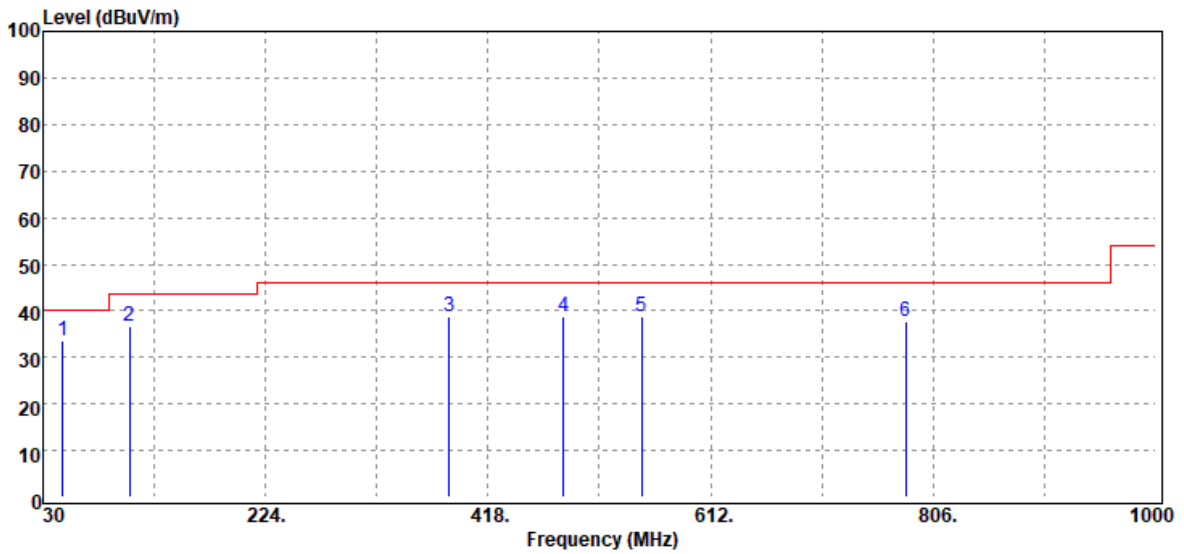

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
47.46	Peak	47.91	-14.26	33.65	40.00	-6.35
105.66	Peak	47.58	-11.02	36.56	43.50	-6.94
384.05	Peak	45.00	-6.24	38.76	46.00	-7.24
483.96	Peak	41.75	-3.03	38.72	46.00	-7.28
551.86	Peak	41.06	-2.22	38.84	46.00	-7.16
781.75	Peak	36.56	1.21	37.77	46.00	-8.23

Report No.: T190711D16-RP

Test Mode	Mode 4	Temp/Hum	24.5(°C)/ 43%RH
Test Item	30MHz-1GHz	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak		

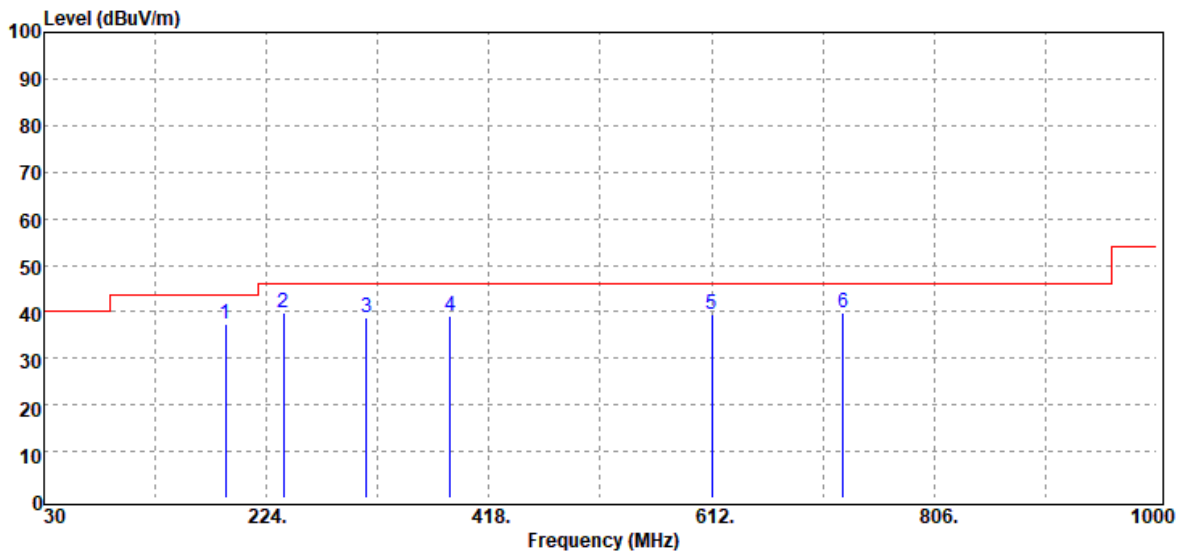


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
188.11	Peak	48.31	-10.97	37.34	43.50	-6.16
238.55	Peak	50.32	-10.38	39.94	46.00	-6.06
311.30	Peak	46.58	-7.86	38.72	46.00	-7.28
384.05	Peak	45.29	-6.24	39.05	46.00	-6.95
612.00	Peak	40.55	-1.03	39.52	46.00	-6.48
726.46	Peak	38.94	0.86	39.80	46.00	-6.20

Report No.: T190711D16-RP

Above 1G Test Data

Test Mode	IEEE 802.11b Low CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak and Average		

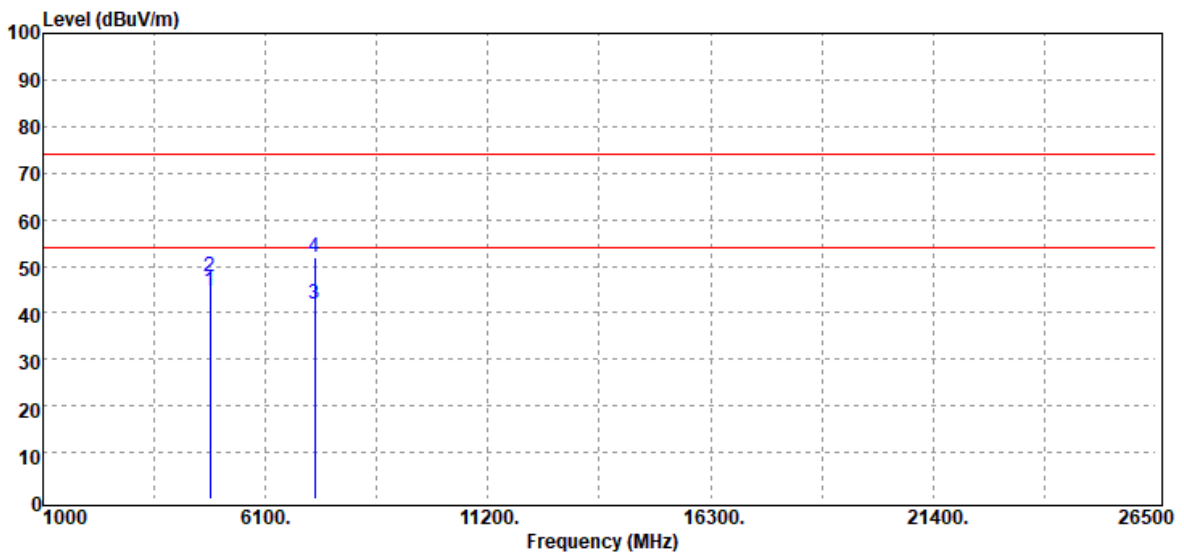


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4824.00	Average	41.61	3.05	44.66	54.00	-9.34
4824.00	Peak	44.57	3.05	47.62	74.00	-26.38
7236.00	Average	31.33	10.60	41.93	54.00	-12.07
7236.00	Peak	41.29	10.60	51.89	74.00	-22.11

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11b Low CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak and Average		

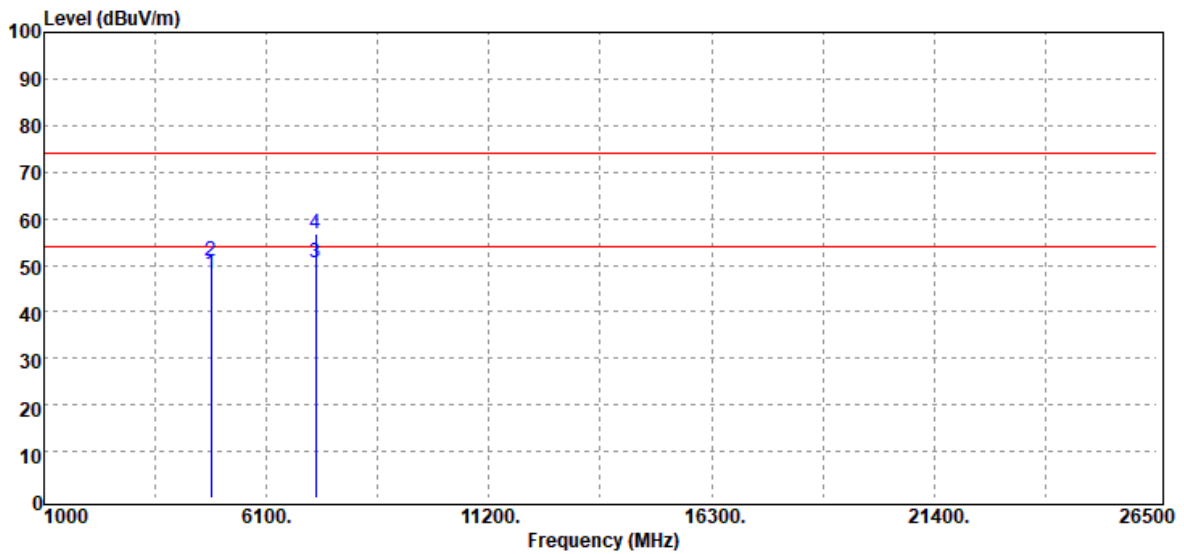


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4824.00	Average	45.00	3.05	48.05	54.00	-5.95
4824.00	Peak	47.88	3.05	50.93	74.00	-23.07
7236.00	Average	39.77	10.60	50.37	54.00	-3.63
7236.00	Peak	46.12	10.60	56.72	74.00	-17.28

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak and Average		

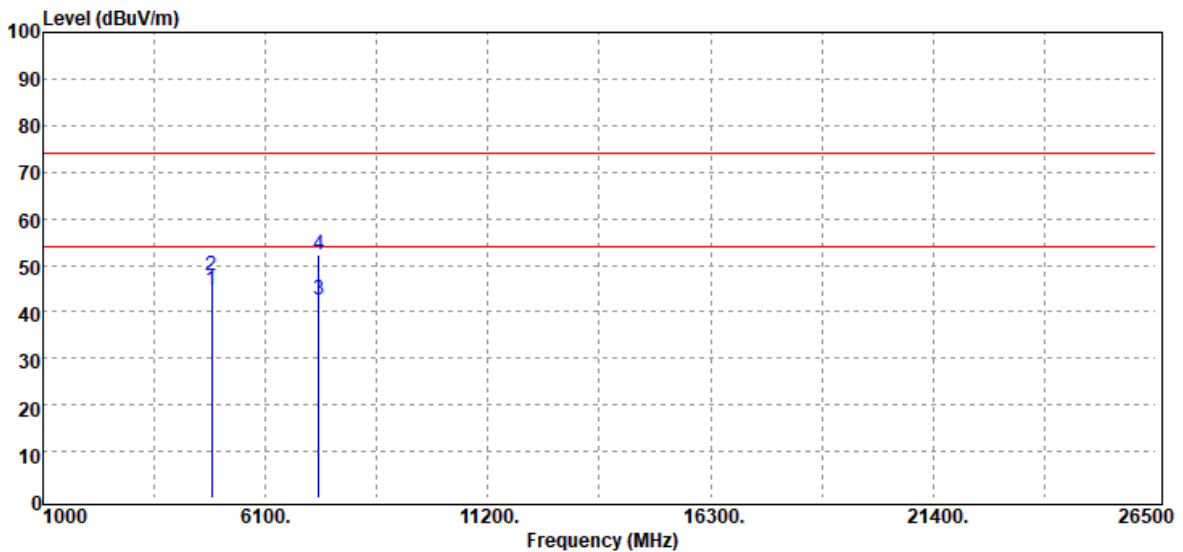


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4874.00	Average	41.38	3.31	44.69	54.00	-9.31
4874.00	Peak	44.40	3.31	47.71	74.00	-26.29
7311.00	Average	31.51	10.93	42.44	54.00	-11.56
7311.00	Peak	41.38	10.93	52.31	74.00	-21.69

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak and Average		

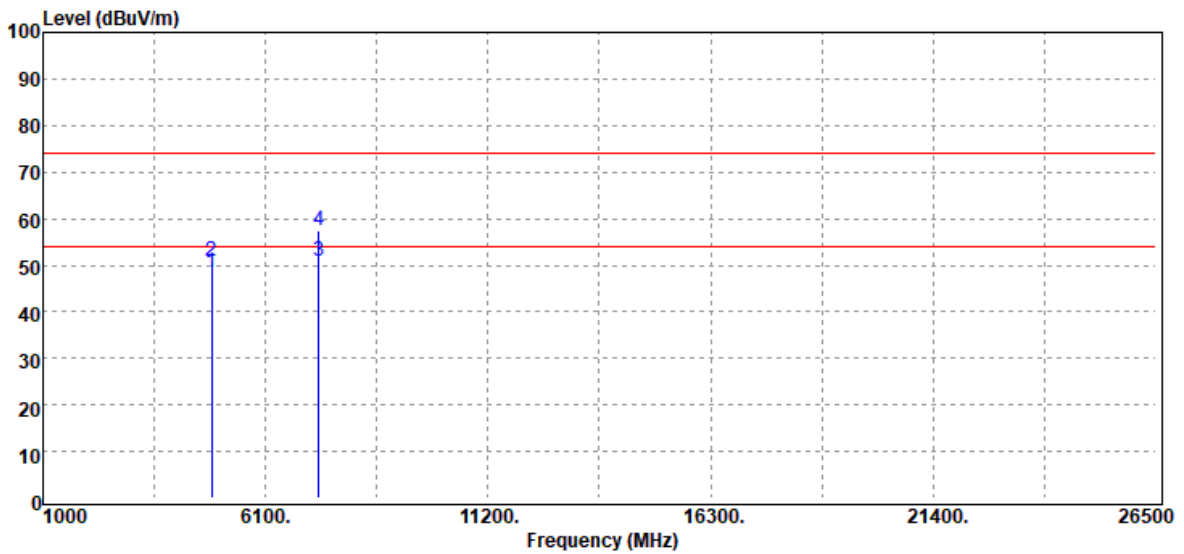


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4874.00	Average	45.22	3.31	48.53	54.00	-5.47
4874.00	Peak	47.54	3.31	50.85	74.00	-23.15
7311.00	Average	39.81	10.93	50.74	54.00	-3.26
7311.00	Peak	46.39	10.93	57.32	74.00	-16.68

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11b High CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak and Average		

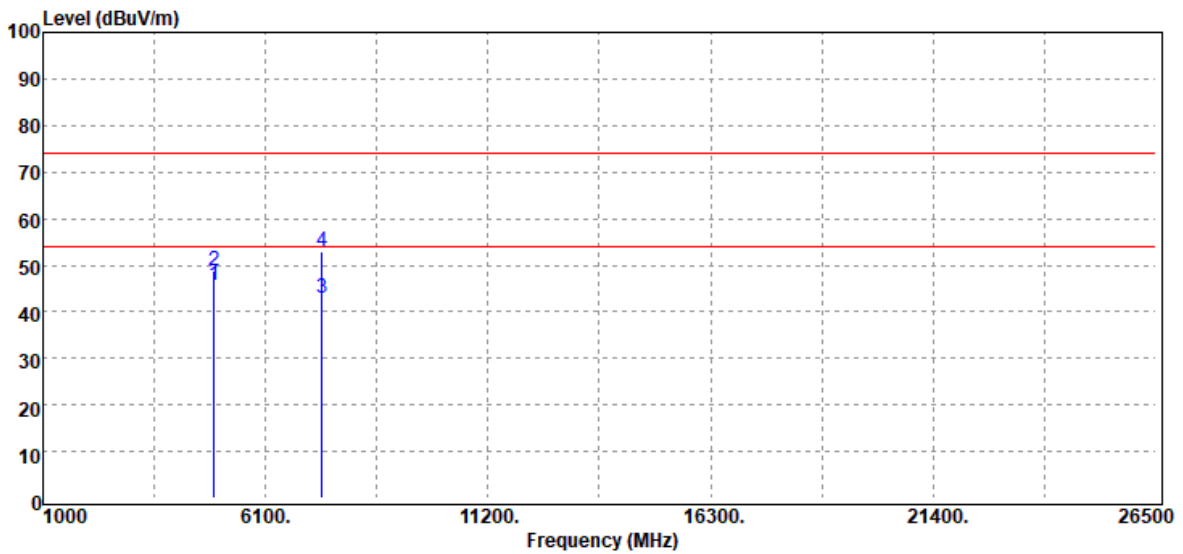


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4924.00	Average	41.83	3.75	45.58	54.00	-8.42
4924.00	Peak	45.04	3.75	48.79	74.00	-25.21
7386.00	Average	31.62	11.17	42.79	54.00	-11.21
7386.00	Peak	41.87	11.17	53.04	74.00	-20.96

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11b High CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak and Average		

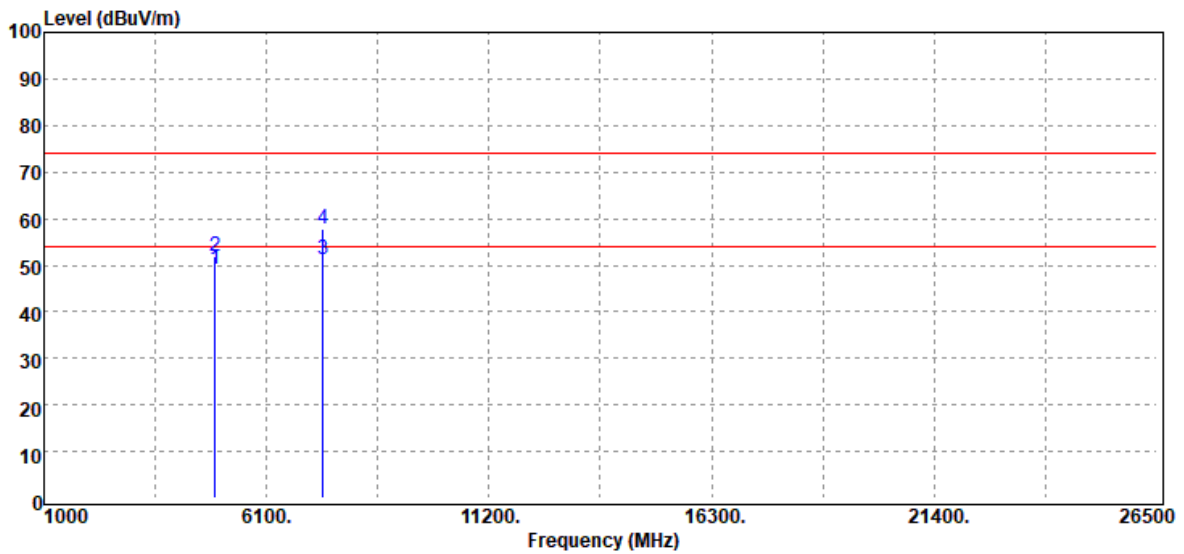


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4924.00	Average	45.40	3.75	49.15	54.00	-4.85
4924.00	Peak	48.26	3.75	52.01	74.00	-21.99
7386.00	Average	40.05	11.17	51.22	54.00	-2.78
7386.00	Peak	46.73	11.17	57.90	74.00	-16.10

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11g Low CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak and Average		

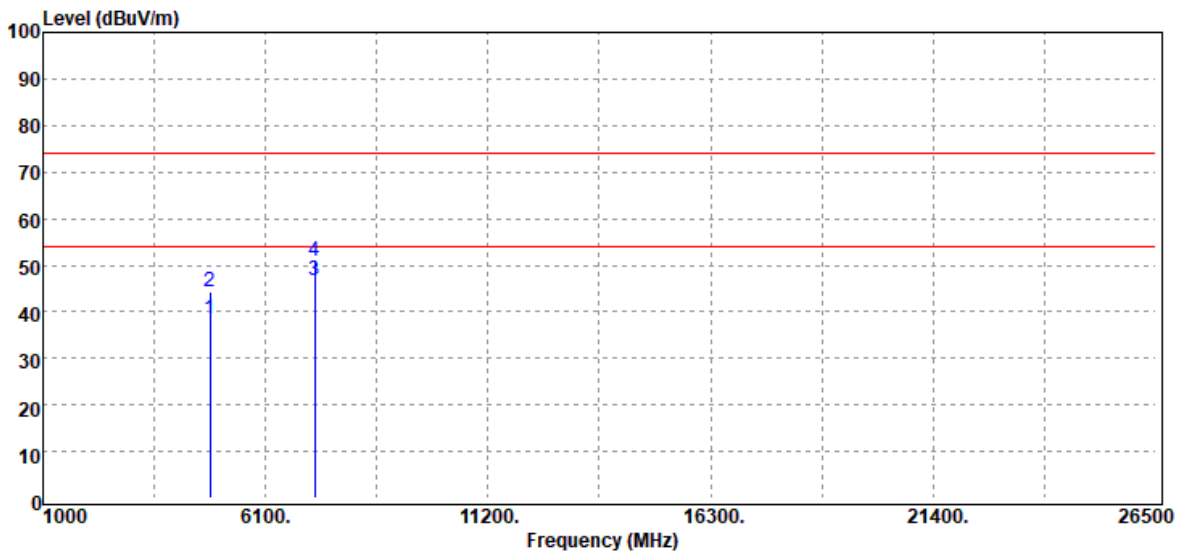


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4824.00	Average	35.21	3.05	38.26	54.00	-15.74
4824.00	Peak	41.24	3.05	44.29	74.00	-29.71
7236.00	Average	36.21	10.60	46.81	54.00	-7.19
7236.00	Peak	40.17	10.60	50.77	74.00	-23.23

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11g Low CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak and Average		

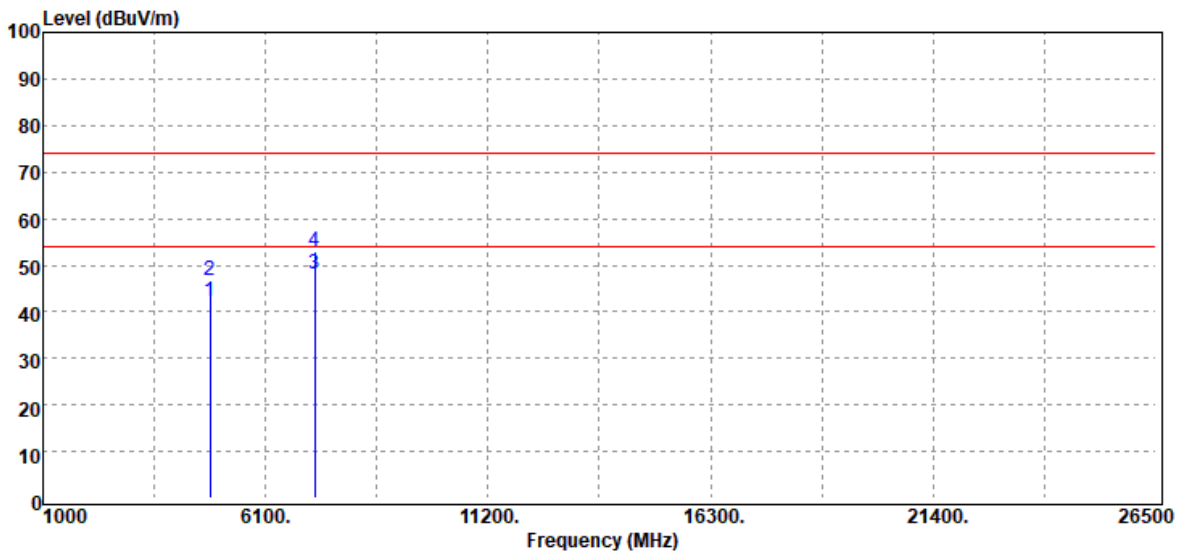


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4824.00	Average	39.25	3.05	42.30	54.00	-11.70
4824.00	Peak	43.52	3.05	46.57	74.00	-27.43
7236.00	Average	37.65	10.60	48.25	54.00	-5.75
7236.00	Peak	42.28	10.60	52.88	74.00	-21.12

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak and Average		

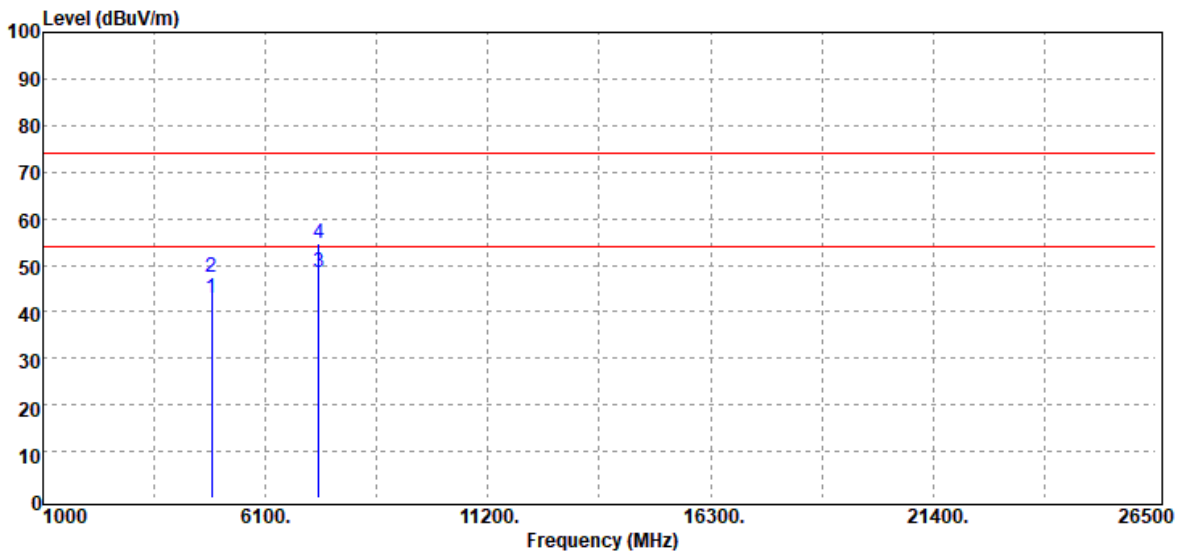


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4874.00	Average	39.52	3.31	42.83	54.00	-11.17
4874.00	Peak	44.26	3.31	47.57	74.00	-26.43
7311.00	Average	37.53	10.93	48.46	54.00	-5.54
7311.00	Peak	43.59	10.93	54.52	74.00	-19.48

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak and Average		

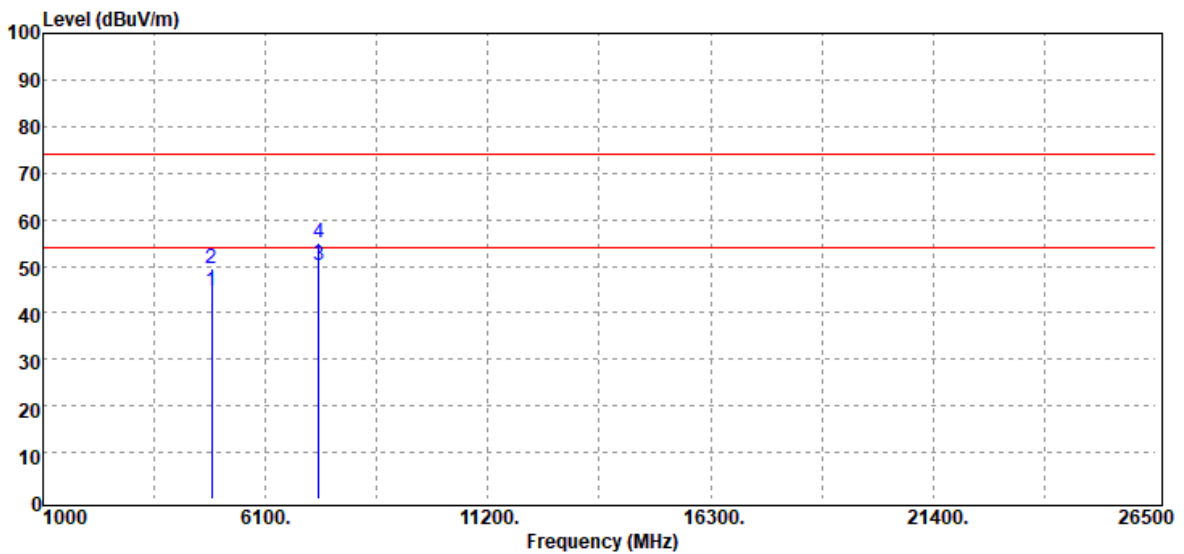


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4874.00	Average	41.27	3.31	44.58	54.00	-9.42
4874.00	Peak	46.28	3.31	49.59	74.00	-24.41
7311.00	Average	39.28	10.93	50.21	54.00	-3.79
7311.00	Peak	44.13	10.93	55.06	74.00	-18.94

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11g High CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak and Average		

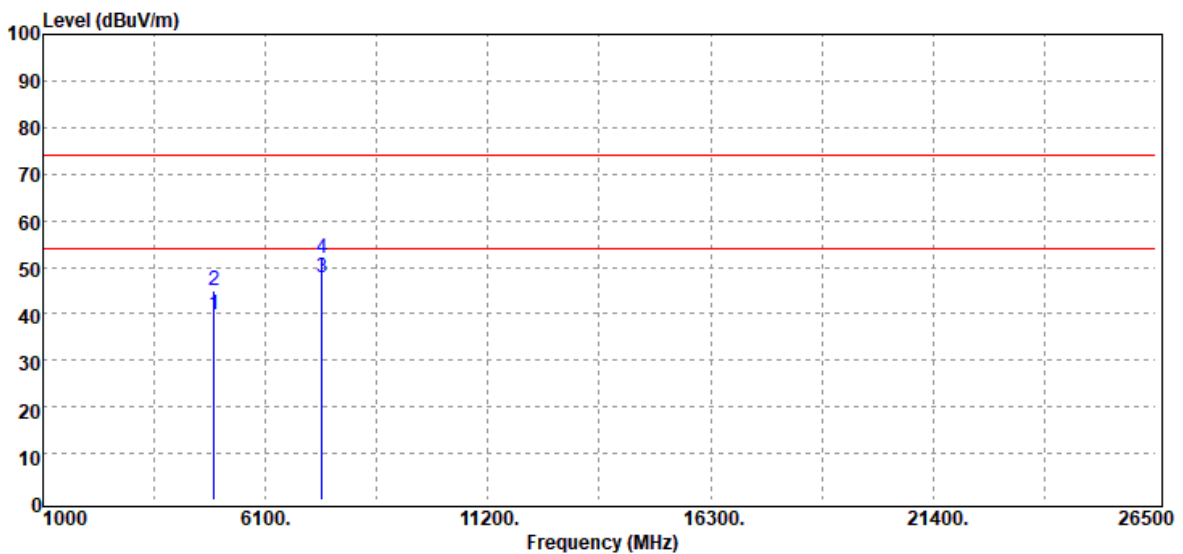


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4924.00	Average	35.90	3.75	39.65	54.00	-14.35
4924.00	Peak	41.27	3.75	45.02	74.00	-28.98
7386.00	Average	36.61	11.17	47.78	54.00	-6.22
7386.00	Peak	40.73	11.17	51.90	74.00	-22.10

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11g High CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak and Average		

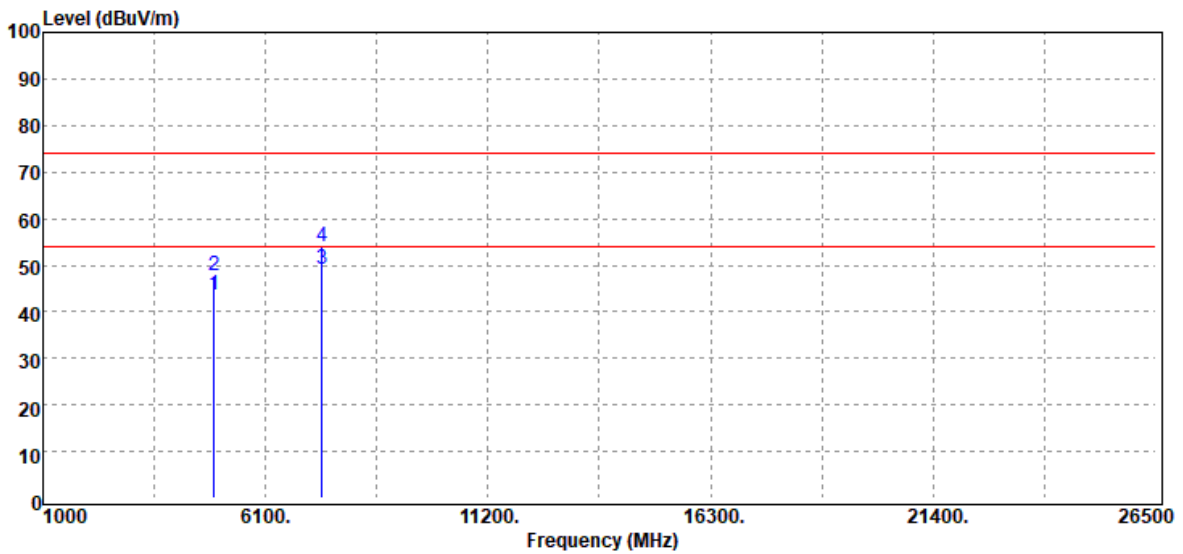


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4924.00	Average	39.69	3.75	43.44	54.00	-10.56
4924.00	Peak	44.13	3.75	47.88	74.00	-26.12
7386.00	Average	37.91	11.17	49.08	54.00	-4.92
7386.00	Peak	42.87	11.17	54.04	74.00	-19.96

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak and Average		

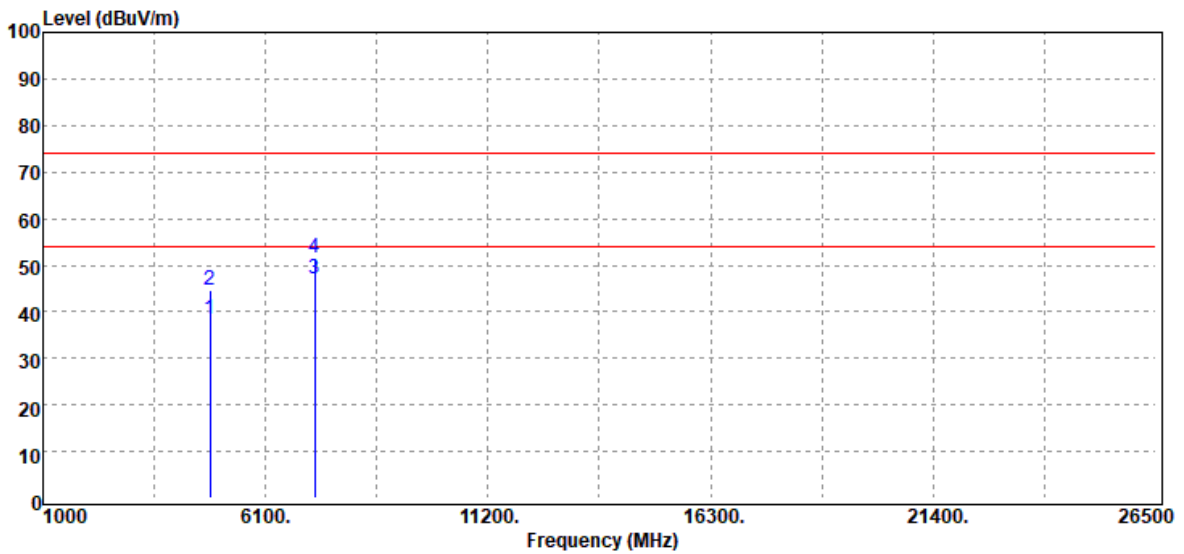


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4824.00	Average	35.52	3.05	38.57	54.00	-15.43
4824.00	Peak	41.58	3.05	44.63	74.00	-29.37
7236.00	Average	36.39	10.60	46.99	54.00	-7.01
7236.00	Peak	40.88	10.60	51.48	74.00	-22.52

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak and Average		

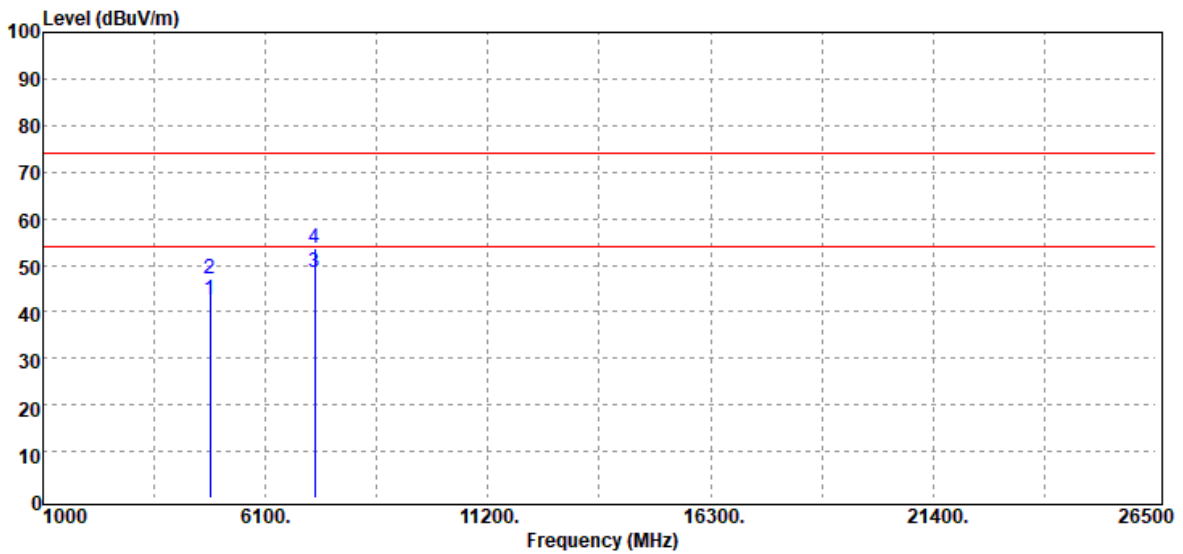


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4824.00	Average	39.56	3.05	42.61	54.00	-11.39
4824.00	Peak	44.01	3.05	47.06	74.00	-26.94
7236.00	Average	37.93	10.60	48.53	54.00	-5.47
7236.00	Peak	43.19	10.60	53.79	74.00	-20.21

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak and Average		

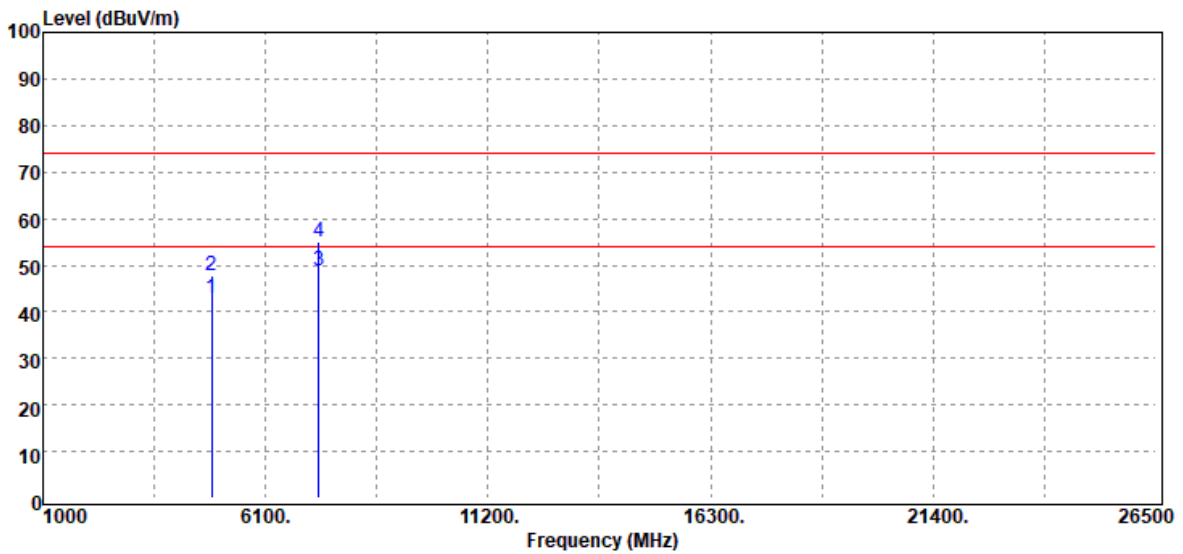


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4874.00	Average	39.68	3.31	42.99	54.00	-11.01
4874.00	Peak	44.52	3.31	47.83	74.00	-26.17
7311.00	Average	37.82	10.93	48.75	54.00	-5.25
7311.00	Peak	43.98	10.93	54.91	74.00	-19.09

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak and Average		

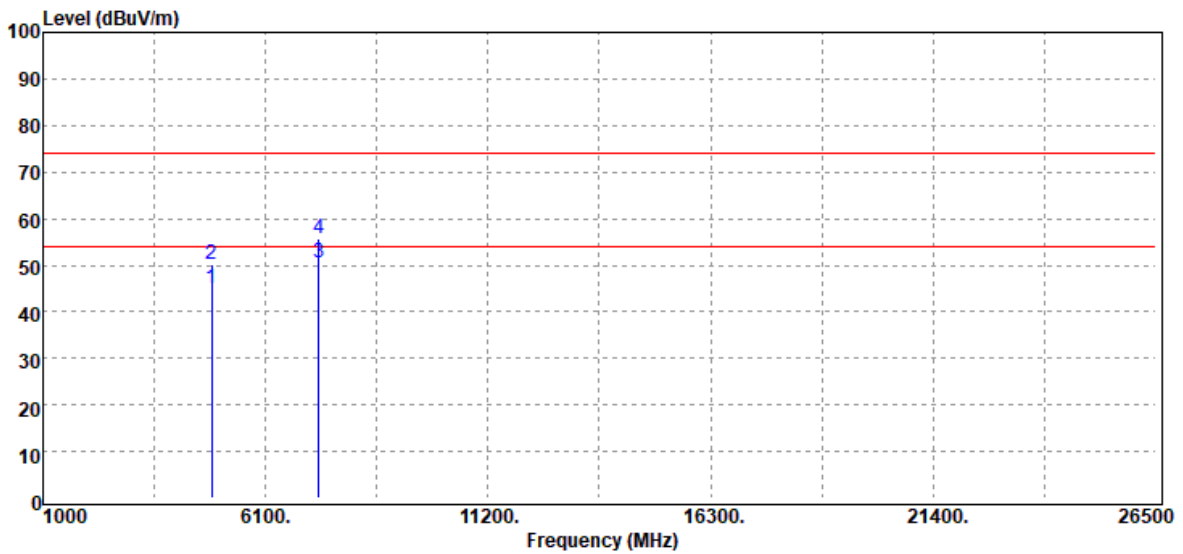


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4874.00	Average	41.62	3.31	44.93	54.00	-9.07
4874.00	Peak	46.80	3.31	50.11	74.00	-23.89
7311.00	Average	39.50	10.93	50.43	54.00	-3.57
7311.00	Peak	44.82	10.93	55.75	74.00	-18.25

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Vertical	Test Engineer	Jerry Lu
Detector	Peak and Average		

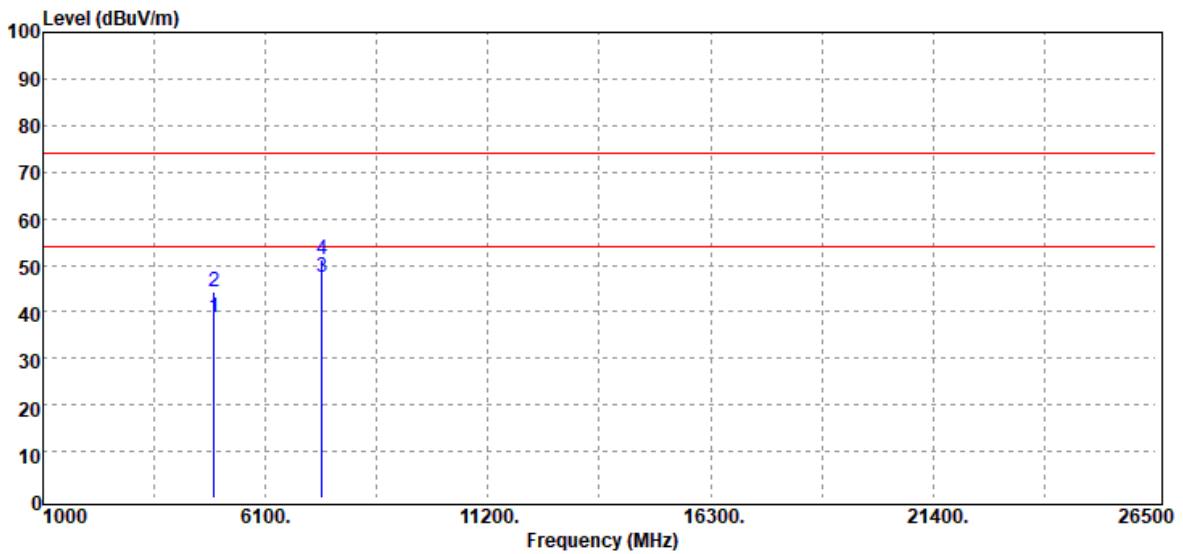


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4924.00	Average	35.12	3.75	38.87	54.00	-15.13
4924.00	Peak	40.54	3.75	44.29	74.00	-29.71
7386.00	Average	36.08	11.17	47.25	54.00	-6.75
7386.00	Peak	40.12	11.17	51.29	74.00	-22.71

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190711D16-RP

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	24.5(°C)/ 43%RH
Test Item	Harmonic	Test Date	August 2, 2019
Polarize	Horizontal	Test Engineer	Jerry Lu
Detector	Peak and Average		

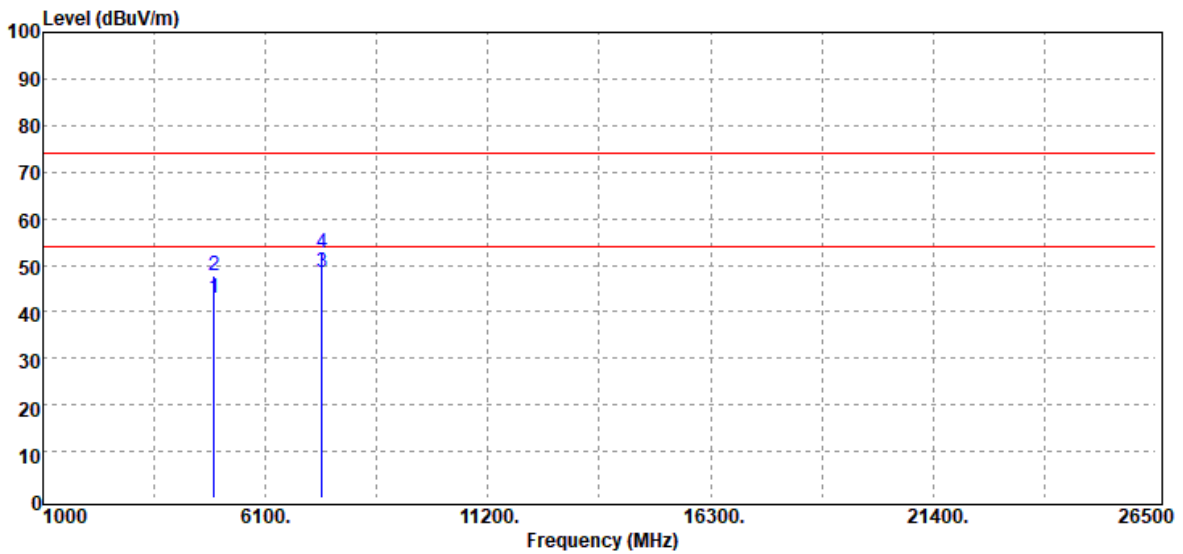

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
4924.00	Average	39.16	3.75	42.91	54.00	-11.09
4924.00	Peak	43.88	3.75	47.63	74.00	-26.37
7386.00	Average	37.25	11.17	48.42	54.00	-5.58
7386.00	Peak	41.53	11.17	52.70	74.00	-21.30

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- End of Test Report -