

---

**IEEE C95.1 2005  
KDB 447498 D01 V06  
47 C.F.R. Part 1, Subpart I, Section 1.1310  
47 C.F.R. Part 2, Subpart J, Section 2.1091**

**RF EXPOSURE REPORT**

**For**

**Wireless HD DoorBell Camera**

**Model: DBC835**

**Trade Name: ADT**

*Issued to*

**Sercomm Corporation  
8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.**

*Issued by*

**Compliance Certification Services Inc.  
No.11, Wugong 6th Rd., Wugu Dist.,  
New Taipei City 24891, Taiwan. (R.O.C.)  
<http://www.ccsrf.com>  
[service@ccsrf.com](mailto:service@ccsrf.com)  
Issued Date: December 7, 2017**



**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	December 7, 2017	Initial Issue	ALL	Allison Chen

**TABLE OF CONTENTS**

1. TEST RESULT CERTIFICATION..... 4

2. LIMIT ..... 5

3. EUT SPECIFICATION ..... 5

4. TEST RESULTS..... 6

5. MAXIMUM PERMISSIBLE EXPOSURE ..... 7


# 1. TEST RESULT CERTIFICATION

**We hereby certify that:**

The equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirement of the applicable standards. The test record, data evaluation and Equipment under Test (EUT) configurations represented herein are true and accurate accounts of the measurement of the sample’s RF characteristics under the conditions specified in this report.

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
IEEE C95.1 2005 KDB 447498 D03 47 C.F.R. Part 1, Subpart I, Section 1.1310 47 C.F.R. Part 2, Subpart J, Section 2.1091	No non-compliance noted


Approved by:

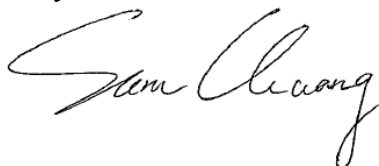


---

Sam Chuang  
 Manager  
 Compliance Certification Services Inc.

Prepared by:




---

Allison Chen  
 Report coordinator  
 Compliance Certification Services Inc.

## 2. LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

## 3. EUT SPECIFICATION

<b>Product</b>	Wireless HD DoorBell Camera
<b>Model</b>	DBC835
<b>Brand name</b>	ADT
<b>Model Discrepancy</b>	N/A
<b>Frequency band (Operating)</b>	<input type="checkbox"/> Bluetooth 2.1 + EDR / 4.0: 2402 MHz ~ 2480 MHz <input checked="" type="checkbox"/> 802.11b/g/n HT20: 2412MHz ~ 2462MHz <input type="checkbox"/> 802.11n HT40: 2422MHz ~ 2452MHz <input type="checkbox"/> Others
<b>Device category</b>	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm <sup>2</sup> ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm <sup>2</sup> )
<b>Antenna Specification</b>	<p><b>2.4G</b>            PIFA Antenna / Gain: 0dBi</p> <p>2.4GHz: Antenna Gain : 0.00 dBi (Numeric gain: 1.00) Worst</p>
<b>Maximum Tune up Power</b>	IEEE 802.11b Mode: 24.00 dBm (251.19 mW) IEEE 802.11g Mode: 20.00 dBm (100.00 mW) IEEE 802.11n HT 20 Mode: 20.00 dBm (100.00 mW)
<b>Evaluation applied</b>	<input checked="" type="checkbox"/> MPE Evaluation* <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

## 4. TEST RESULTS

No non-compliance noted.

### Calculation

Given  $E = \frac{\sqrt{30 \times P \times G}}{d}$  &  $S = \frac{E^2}{377}$

Where  $E =$  Field strength in Volts / meter

$P =$  Power in Watts

$G =$  Numeric antenna gain

$d =$  Distance in meters

$S =$  Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{377d^2}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = d \text{ (m)} / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{377 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where  $d =$  Distance in cm

$P =$  Power in mW

$G =$  Numeric antenna gain

$S =$  Power density in mW / cm<sup>2</sup>

## 5. MAXIMUM PERMISSIBLE EXPOSURE

Substituting the MPE safe distance using  $d = 20$  cm into Equation 1:

$$S = 0.000199 \times P \times G$$

Where  $P =$  Power in mW

$G =$  Numeric antenna gain

$S =$  Power density in mW / cm<sup>2</sup>

### IEEE 802.11b mode:

Ch.	Frq.(MHz)	P (mW)	Gain (num.)	D (cm)	Power density in mW / cm <sup>2</sup>	Limit (mW/cm2)
6	2437	251.19	1.00	20	0.0500	1

### IEEE 802.11g mode:

Ch.	Frq.(MHz)	P (mW)	Gain (num.)	D (cm)	Power density in mW / cm <sup>2</sup>	Limit (mW/cm2)
6	2437	100	1.00	20	0.0199	1

### IEEE 802.11n HT 20 mode:

Ch.	Frq.(MHz)	P (mW)	Gain (num.)	D (cm)	Power density in mW / cm <sup>2</sup>	Limit (mW/cm2)
6	2437	100	1.00	20	0.0199	1