

## FCC Test Report (Zigbee)

**Report No.:** RF151111D09-2

**FCC ID:** P27NA502

**Test Model:** NA502

**Series Model:** NA502xxxxxxx, G450xxxxx, VeraPlusxxxxx (The "x" in model name can be 0 to 9, A to Z, blank or "-", for marking purpose)

**Received Date:** Nov. 11, 2015

**Test Date:** Nov. 20 ~ Dec. 18, 2015

**Issued Date:** Dec. 25, 2015

**Applicant:** Sercomm Corp.

**Address:** 8F, No. 3-1, YuangQu St., NanKang, Taipei 115, Taiwan, R.O.C. (NanKang Software Park)

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes .....	8
3.2.1 Test Mode Applicability and Tested Channel Detail .....	9
3.3 Duty Cycle of Test Signal .....	10
3.4 Description of Support Units .....	11
3.4.1 Configuration of System under Test .....	12
3.5 General Description of Applied Standards .....	13
<b>4 Test Types and Results</b> .....	<b>14</b>
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	14
4.1.2 Test Instruments .....	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard .....	16
4.1.5 Test Set Up .....	17
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results .....	18
4.2 Conducted Emission Measurement .....	23
4.2.1 Limits of Conducted Emission Measurement .....	23
4.2.2 Test Instruments .....	23
4.2.3 Test Procedures.....	24
4.2.4 Deviation from Test Standard .....	24
4.2.5 Test Setup.....	24
4.2.6 EUT Operating Conditions.....	24
4.2.7 Test Results .....	25
4.3 6dB Bandwidth Measurement .....	27
4.3.1 Limits of 6dB Bandwidth Measurement .....	27
4.3.2 Test Setup.....	27
4.3.3 Test Instruments .....	27
4.3.4 Test Procedure .....	27
4.3.5 Deviation from Test Standard .....	27
4.3.6 EUT Operating Conditions.....	27
4.3.7 Test Result.....	28
4.4 Conducted Output Power Measurement.....	29
4.4.1 Limits of Conducted Output Power Measurement .....	29
4.4.2 Test Setup.....	29
4.4.3 Test Instruments .....	29
4.4.4 Test Procedures.....	29
4.4.5 Deviation from Test Standard .....	29
4.4.6 EUT Operating Conditions.....	29
4.4.7 Test Results .....	30
4.5 Power Spectral Density Measurement.....	31
4.5.1 Limits of Power Spectral Density Measurement.....	31
4.5.2 Test Setup.....	31
4.5.3 Test Instruments .....	31
4.5.4 Test Procedure .....	31
4.5.5 Deviation from Test Standard .....	31



4.5.6 EUT Operating Condition .....	31
4.5.7 Test Results .....	32
4.6 Conducted Out of Band Emission Measurement.....	33
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	33
4.6.2 Test Setup.....	33
4.6.3 Test Instruments .....	33
4.6.4 Test Procedure .....	33
4.6.5 Deviation from Test Standard .....	33
4.6.6 EUT Operating Condition .....	33
4.6.7 Test Results .....	33
<b>5 Pictures of Test Arrangements.....</b>	<b>36</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>37</b>



### Release Control Record

Issue No.	Description	Date Issued
RF151111D09-2	Original release.	Dec. 25, 2015



## 1 Certificate of Conformity

**Product:** Multiple RF Home Gateway

**Brand:** Sercomm, MiOS

**Test Model:** NA502

**Series Model:** NA502xxxxxxx, G450xxxxx, VeraPlusxxxxx (The "x" in model name can be 0 to 9, A to Z, blank or "-", for marking purpose)

**Sample Status:** Engineering sample

**Applicant:** Sercomm Corp.

**Test Date:** Nov. 20 ~ Dec. 18, 2015

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Annie Chang , **Date:** Dec. 25, 2015  
Annie Chang / Senior Specialist

**Approved by :** Rex Lai , **Date:** Dec. 25, 2015  
Rex Lai / Assistant Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.24 dB at 0.26328 MHz
15.205 & 209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.1dB at 12025.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.7dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I-PEX not a standard connector.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.78 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	4.00 dB
Radiated Emissions above 1 GHz	1GHz ~ 40GHz	3.36 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Multiple RF Home Gateway
Brand	Sercomm, MiOS
Test Model	NA502
Series Model	NA502xxxxxxxx, G450xxxxx, VeraPlusxxxxx (The "x" in model name can be 0 to 9, A to Z, blank or "-", for marking purpose)
Model Difference	Refer to note as below
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	OQPSK
Transfer Rate	250Kbps/ 500Kbps/ 1Mbps/ 2Mbps
Operating Frequency	2405 ~ 2480MHz
Number of Channel	16
Output Power	77.446mW
Antenna Type	Dipole antenna with 4dBi gain
Antenna Connector	I-PEX connector
Accessory Device	Adapter
Data Cable Supplied	N/A

Note:

1. All models are listed as below.

Brand	Model	Difference
Sercomm	NA502xxxxxxxx	The "x" in model name can be 0 to 9, A to Z, blank or "-", for marking purpose
MiOS	G450xxxxx, VeraPlusxxxxx	

2. The EUT uses following adapter.

Adapter	1	2
Brand	APD	LEI
Model	WB-18D12FG-ELAA	MU18A2120150-C5
AC Input Power	100~240V, 0.5A, 50-60Hz	100~240V, 0.5A, 50/60Hz
DC Output Power	12V, 1.5A	12V, 1.5A
Plug Type	EU Plug	EU Plug
Power Cord	Non-shielded DC cable (1.5m)	Non-shielded DC cable (1.5m)

After pre-tested, the **Adapter 1** was the worst case, therefore, only its test data was recorded in this report.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

16 channels are provided to this EUT:

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
11	2405MHz	19	2445MHz
12	2410MHz	20	2450MHz
13	2415MHz	21	2455MHz
14	2420MHz	22	2460MHz
15	2425MHz	23	2465MHz
16	2430MHz	24	2470MHz
17	2435MHz	25	2475MHz
18	2440MHz	26	2480MHz



### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

#### **Radiated Emission Test (Above 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Kbps)
-	11 to 26	11, 19, 25, 26	OQPSK	250

#### **Radiated Emission Test (Below 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Kbps)
-	11 to 26	11	OQPSK	250

#### **Power Line Conducted Emission Test:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Kbps)
-	11 to 26	11	OQPSK	250

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.


EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Kbps)
-	11 to 26	11, 19, 25, 26	OQPSK	250

**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (PoE)	TESTED BY
RE≥1G	26deg. C, 71%RH	120Vac, 60Hz	Aaron You
RE<1G	23deg. C, 72%RH	120Vac, 60Hz	Aaron You
PLC	27deg. C, 81%RH	120Vac, 60Hz	Kobe Lu
APCM	25deg. C, 60%RH	120Vac, 60Hz	Dalen Dai

**3.3 Duty Cycle of Test Signal**

Duty cycle of test signal is 100 %, duty factor is not required.

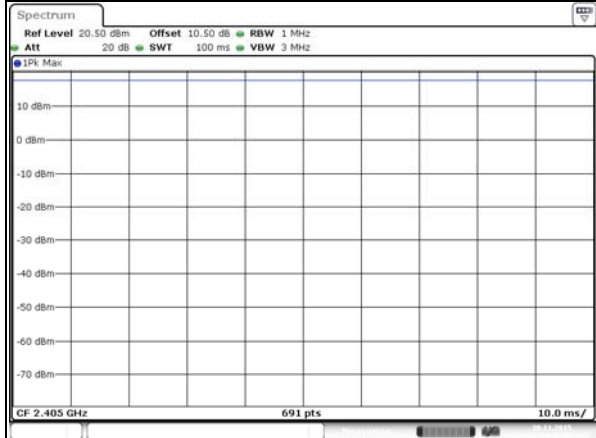

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	USB 3.0 Flash Drive	HP	v250w	N/A	FCC DoC Approved	Provided by Lab
B.	RJ45 Connector	N/A	N/A	N/A	N/A	Provided by Lab
C.	Notebook PC	SONY	SVS151A12P	275548477001024	FCC DoC Approved	Provided by Lab
D.	Wireless Broadband Router	D-LINK	DIR-815	PVK21B1000238	KA2IR815A1	Provided by Lab
E.	Z-Wave	EVERSPRING	AD131-2	N/A	N/A	Supplied by client
F.	Zigbee	N/A	CK77 94V-0	N/A	N/A	Supplied by client
G.	BLE	N/A	SmartRF V2.6	N/A	N/A	Supplied by client
H.	Notebook PC	SONY	SVS151A12P	275548477001087	FCC DoC Approved	Provided by Lab
I.	Notebook PC	DELL	PP27L	8SNZ12S	FCC DoC Approved	Provided by Lab

Note:


1. All power cords of the above support units are non-shielded (1.8m).
2. Items C~I acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC cable	1	1.5	N	0	Supplied by client
2.	LAN cable	1	1.5	N	0	Supplied by client
3.	LAN cable	1	10	N	0	Provided by Lab


Note: The core(s) is(are) originally attached to the cable(s).

### 3.4.1 Configuration of System under Test

For Conduction emission test only:

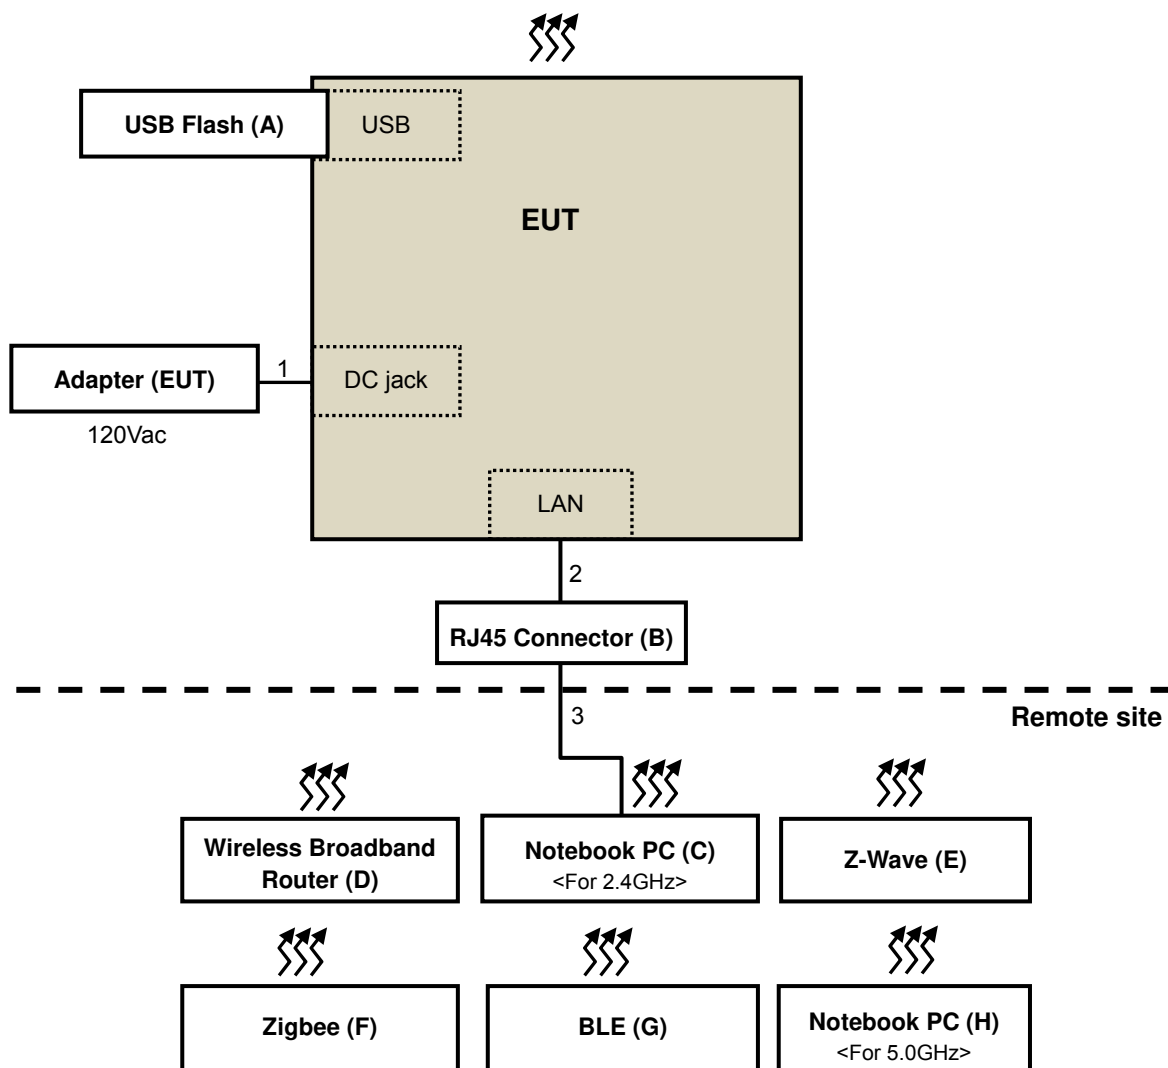

**For Radiated emission test:**

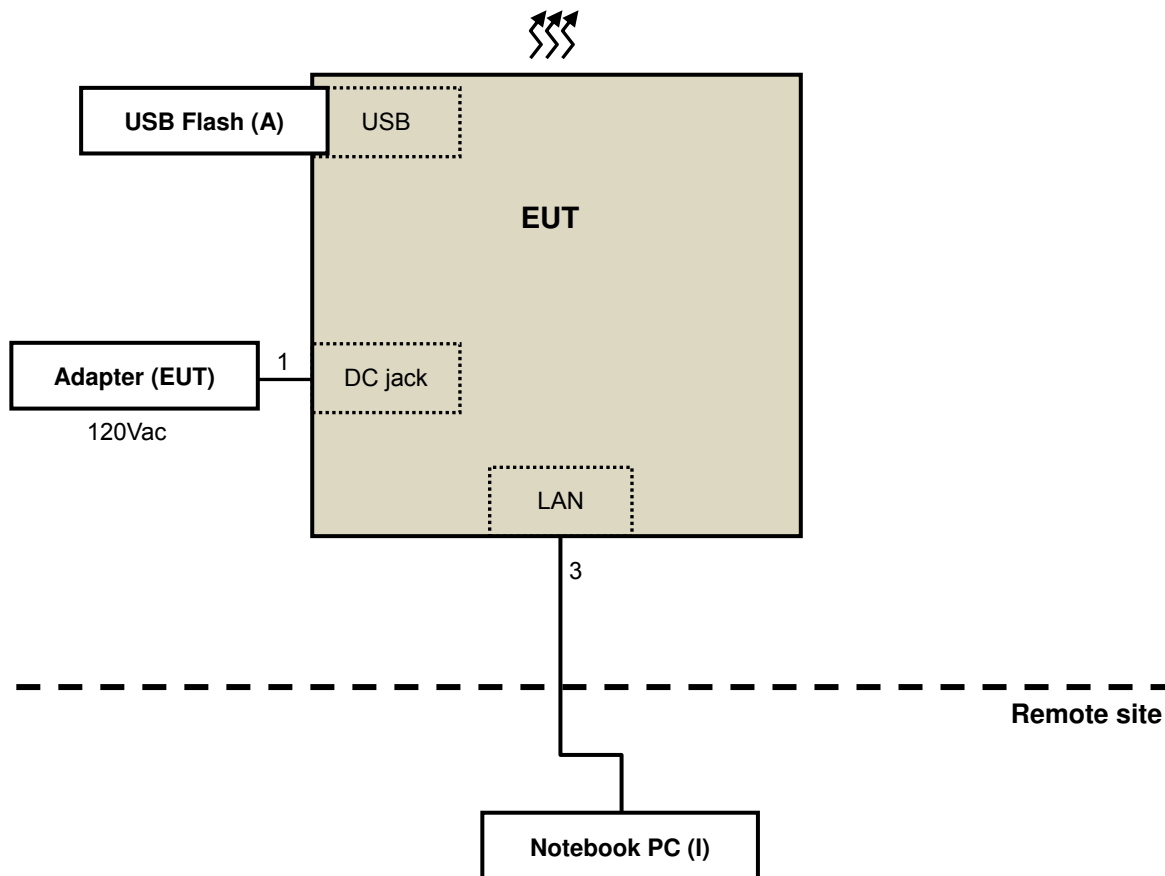

**3.5 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- FCC Part 15, Subpart C (15.247)**
- 558074 D01 DTS Meas Guidance v03r04**
- ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 26, 2015	Feb. 25, 2016
HP Preamplifier	8449B	3008A01201	Feb. 26, 2015	Feb. 25, 2016
MITEQ Preamplifier	AMF-6F-260400-33-8 P	892164	Mar. 01, 2015	Feb. 28, 2016
Agilent Spectrum	E4446A	MY51100050		
Agilent TEST RECEIVER	N9038A	MY51210129	Jan. 20, 2015	Jan. 19, 2016
Schwarzbeck Antenna	VULB 9168	139	Feb. 04, 2015	Feb. 03, 2016
Schwarzbeck Antenna	VHBA 9123	480	May 29, 2015	May 28, 2017
Schwarzbeck Horn Antenna	BBHA-9170	212	Feb. 09, 2015	Feb. 08, 2016
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Feb. 10, 2015	Feb. 09, 2016
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9. 4	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF104	CABLE-CH6	Aug. 15, 2015	Aug. 14, 2016
SUHNER RF cable With 3dB PAD	SF102	Cable-CH8-3.6m	Aug. 15, 2015	Aug. 14, 2016
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	May 04, 2015	May 03, 2016
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 14, 2015	Jul. 13, 2016
EMCO Horn Antenna	3115	00028257	Feb. 05, 2015	Feb. 04, 2016
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 23, 2015	Sep. 22, 2016
Anritsu Power Sensor	MA2411B	0738404	Apr. 21, 2015	Apr. 20, 2016
Anritsu Power Meter	ML2495A	0842014	Apr. 21, 2015	Apr. 20, 2016

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  3. The test was performed in Chamber No. 6.
  4. The Industry Canada Reference No. IC 7450E-6.
  5. The FCC Site Registration No. is 447212.

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


#### 4.1.4 Deviation from Test Standard

No deviation.




#### 4.1.5 Test Set Up

##### <Frequency Range below 1GHz>

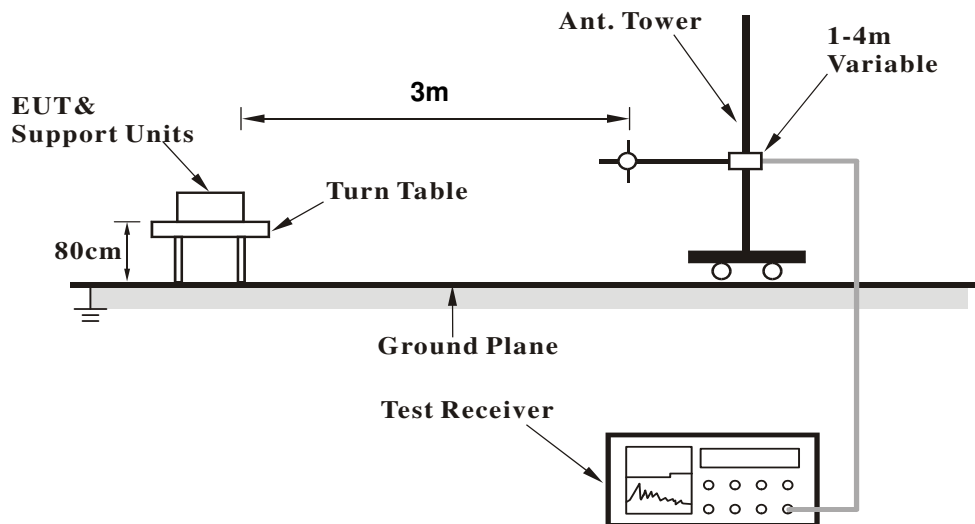

##### <Frequency Range above 1GHz>

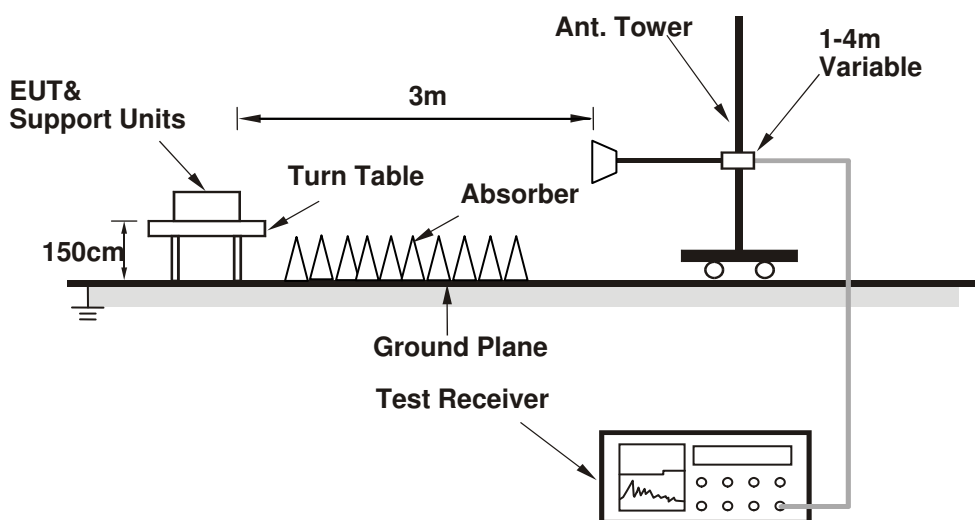

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared notebooks to act as communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the system in full functions.

#### 4.1.7 Test Results

#### ABOVE 1GHz DATA

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	2.41 H	183	57.62	0.52
2	2390.00	47.4 AV	54.0	-6.6	2.41 H	183	46.92	0.52
3	*2405.00	114.0 PK			2.41 H	183	113.33	0.62
4	*2405.00	110.6 AV			2.41 H	183	109.99	0.62
5	4810.00	54.0 PK	74.0	-20.0	1.16 H	207	46.22	7.80
6	4810.00	43.8 AV	54.0	-10.3	1.16 H	207	35.95	7.80
7	#7215.00	57.5 PK	74.0	-16.5	3.32 H	149	42.87	14.61
8	#7215.00	46.4 AV	54.0	-7.6	3.32 H	149	31.81	14.61
9	12025.00	63.9 PK	74.0	-10.1	3.73 H	214	43.16	20.70
10	12025.00	52.9 AV	54.0	-1.1	3.73 H	214	32.21	20.70

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	2.27 V	194	55.12	0.52
2	2390.00	43.0 AV	54.0	-11.0	2.27 V	194	42.44	0.52
3	*2405.00	105.7 PK			2.27 V	194	105.08	0.62
4	*2405.00	102.3 AV			2.27 V	194	101.72	0.62
5	4810.00	57.5 PK	74.0	-16.6	3.22 V	30	49.65	7.80
6	4810.00	47.3 AV	54.0	-6.7	3.22 V	30	39.49	7.80
7	#7215.00	59.0 PK	74.0	-15.0	3.69 V	248	44.38	14.61
8	#7215.00	48.0 AV	54.0	-6.0	3.69 V	248	33.42	14.61
9	12025.00	63.7 PK	74.0	-10.3	2.39 V	244	42.98	20.70
10	12025.00	51.5 AV	54.0	-2.5	2.39 V	244	30.76	20.70

#### REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 19	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2445.00	114.0 PK			2.34 H	179	113.19	0.80
2	*2445.00	110.6 AV			2.34 H	179	109.84	0.80
3	4890.00	54.6 PK	74.0	-19.4	1.29 H	228	46.64	7.96
4	4890.00	44.3 AV	54.0	-9.7	1.29 H	228	36.34	7.96
5	7335.00	58.3 PK	74.0	-15.7	1.71 H	160	43.40	14.94
6	7335.00	47.0 AV	54.0	-7.1	1.71 H	160	32.01	14.94
7	12225.00	63.0 PK	74.0	-11.0	3.65 H	210	42.83	20.16
8	12225.00	52.9 AV	54.0	-1.1	3.65 H	210	32.71	20.16

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2445.00	107.5 PK			4.00 V	65	106.68	0.80
2	*2445.00	104.1 AV			4.00 V	65	103.32	0.80
3	4890.00	56.4 PK	74.0	-17.6	2.02 V	246	48.48	7.96
4	4890.00	46.4 AV	54.0	-7.6	2.02 V	246	38.42	7.96
5	7335.00	59.4 PK	74.0	-14.6	1.49 V	148	44.46	14.94
6	7335.00	48.3 AV	54.0	-5.7	1.49 V	148	33.38	14.94
7	12225.00	62.1 PK	74.0	-11.9	2.36 V	245	41.90	20.16
8	12225.00	50.1 AV	54.0	-3.9	2.36 V	245	29.91	20.16

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 25	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2475.00	111.6 PK			2.09 H	204	110.66	0.93
2	*2475.00	108.3 AV			2.09 H	204	107.33	0.93
3	2483.50	64.7 PK	74.0	-9.3	2.09 H	204	63.75	0.98
4	<b>2483.50</b>	<b>53.3 AV</b>	<b>54.0</b>	<b>-0.7</b>	<b>2.09 H</b>	<b>204</b>	<b>52.31</b>	<b>0.98</b>
5	4950.00	52.6 PK	74.0	-21.4	1.08 H	226	44.38	8.18
6	4950.00	38.3 AV	54.0	-15.7	1.08 H	226	30.15	8.18
7	7425.00	56.1 PK	74.0	-17.9	1.90 H	136	41.17	14.96
8	7425.00	45.6 AV	54.0	-8.4	1.90 H	136	30.65	14.96
9	12375.00	60.5 PK	74.0	-13.5	3.27 H	210	40.17	20.34
10	12375.00	49.9 AV	54.0	-4.1	3.27 H	210	29.55	20.34

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2475.00	101.2 PK			3.85 V	63	100.27	0.93
2	*2475.00	99.1 AV			3.85 V	63	98.14	0.93
3	2483.50	60.3 PK	74.0	-13.7	3.85 V	63	59.32	0.98
4	2483.50	43.1 AV	54.0	-10.9	3.85 V	63	42.11	0.98
5	4950.00	53.4 PK	74.0	-20.6	1.97 V	220	45.26	8.18
6	4950.00	40.5 AV	54.0	-13.5	1.97 V	220	32.33	8.18
7	7425.00	57.1 PK	74.0	-16.9	1.55 V	152	42.15	14.96
8	7425.00	46.6 AV	54.0	-7.4	1.55 V	152	31.62	14.96
9	12375.00	59.8 PK	74.0	-14.2	2.13 V	233	39.49	20.34
10	12375.00	49.1 AV	54.0	-4.9	2.13 V	233	28.74	20.34

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 26	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	90.4 PK			2.53 H	182	89.46	0.95
2	*2480.00	85.8 AV			2.53 H	182	84.86	0.95
3	2483.50	60.1 PK	74.0	-14.0	2.53 H	182	59.07	0.98
4	2483.50	52.8 AV	54.0	-1.2	2.53 H	182	51.84	0.98
5	4960.00	49.0 PK	74.0	-25.0	1.33 H	221	40.82	8.22
6	4960.00	36.2 AV	54.0	-17.9	1.33 H	221	27.93	8.22
7	7440.00	54.6 PK	74.0	-19.4	1.88 H	149	39.57	15.00
8	7440.00	42.1 AV	54.0	-11.9	1.88 H	149	27.06	15.00
9	12400.00	60.3 PK	74.0	-13.7	3.36 H	208	39.96	20.34
10	12400.00	47.1 AV	54.0	-6.9	3.36 H	208	26.78	20.34

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	81.8 PK			3.93 V	64	80.84	0.95
2	*2480.00	78.2 AV			3.93 V	64	77.25	0.95
3	2483.50	54.8 PK	74.0	-19.2	3.93 V	64	53.85	0.98
4	2483.50	42.6 AV	54.0	-11.4	3.93 V	64	41.66	0.98
5	4960.00	49.8 PK	74.0	-24.2	1.99 V	238	41.59	8.22
6	4960.00	37.0 AV	54.0	-17.0	1.99 V	238	28.77	8.22
7	7440.00	55.8 PK	74.0	-18.2	1.62 V	157	40.82	15.00
8	7440.00	43.9 AV	54.0	-10.1	1.62 V	157	28.88	15.00
9	12400.00	59.3 PK	74.0	-14.7	2.28 V	243	38.96	20.34
10	12400.00	46.2 AV	54.0	-7.8	2.28 V	243	25.88	20.34

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**BELOW 1GHz WORST-CASE DATA**

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	71.95	29.4 QP	40.0	-10.6	4.00 H	318	40.65	-11.24
2	203.24	28.6 QP	43.5	-14.9	4.00 H	248	39.62	-10.98
3	303.37	29.7 QP	46.0	-16.4	2.98 H	97	36.38	-6.73
4	375.03	30.2 QP	46.0	-15.8	2.56 H	216	35.49	-5.32
5	500.01	31.2 QP	46.0	-14.9	1.55 H	42	33.81	-2.66
6	911.34	34.7 QP	46.0	-11.3	1.00 H	309	30.21	4.53

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.79	33.6 QP	40.0	-6.4	1.35 V	130	43.52	-9.96
2	55.22	33.7 QP	40.0	-6.3	1.20 V	135	42.51	-8.80
3	125.01	33.2 QP	43.5	-10.3	1.00 V	225	43.69	-10.52
4	310.18	27.3 QP	46.0	-18.7	1.53 V	218	33.95	-6.61
5	600.02	30.8 QP	46.0	-15.2	2.47 V	16	31.30	-0.54
6	913.82	33.9 QP	46.0	-12.1	1.96 V	332	29.31	4.62

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	100276	Apr. 01, 2015	Mar. 31, 2016
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ENV216	101197	Apr. 27, 2015	Apr. 26, 2016
LISN With Adapter (for EUT)	AD10	C10Ada-002	Apr. 27, 2015	Apr. 26, 2016
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Nov. 25, 2014	Nov. 24, 2015
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 06, 2015	May 05, 2016
Software	Cond_V7.3.7	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C10.01	Feb. 17, 2015	Feb. 16, 2016
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-011484	May 19, 2015	May 18, 2016
ROHDE & SCHWARZ Artificial Mains Network (For TV EUT)	ESH3-Z5	100220	Nov. 13, 2015	Nov. 12, 2016
LISN With Adapter (for TV EUT)	100220	N/A	Nov. 13, 2015	Nov. 12, 2016

Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 10.

3. The VCCI Site Registration No. C-1852.

4. Tested Date: Nov. 20, 2015

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

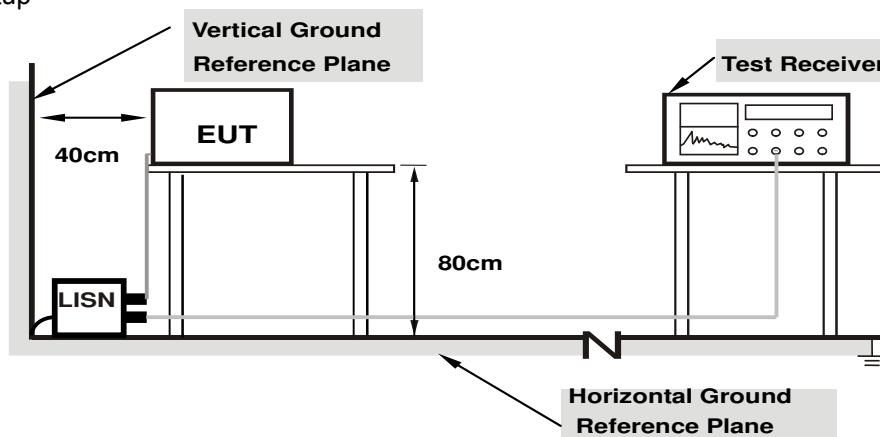

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.



## 4.2.7 Test Results


## CONDUCTED WORST-CASE DATA

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	9.68	31.03	22.63	40.71	32.31	64.61	54.61	-23.90	-22.30
2	0.26328	9.68	31.22	27.68	40.90	37.36	61.33	51.33	-20.42	-13.96
3	0.28281	9.68	29.12	26.21	38.80	35.89	60.73	50.73	-21.93	-14.84
4	0.54844	9.71	16.70	7.28	26.41	16.99	56.00	46.00	-29.59	-29.01
5	3.42188	9.92	18.57	9.23	28.49	19.15	56.00	46.00	-27.51	-26.85
6	15.39453	10.12	14.97	9.24	25.09	19.36	60.00	50.00	-34.91	-30.64

## Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

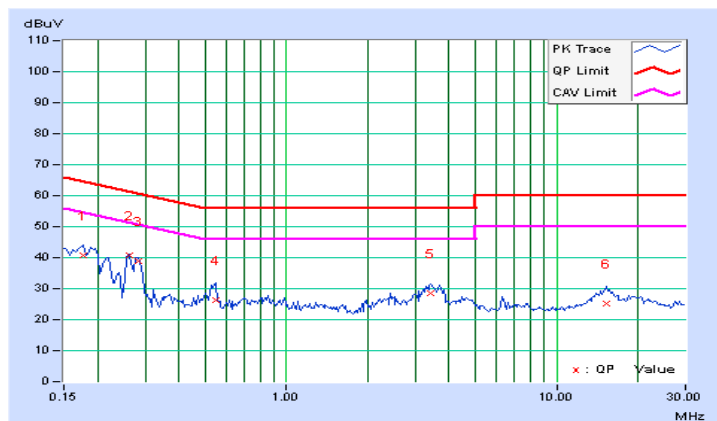


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.72	33.52	24.23	43.24	33.95	65.79	55.79	-22.55	-21.84
2	0.19297	9.73	32.12	26.11	41.85	35.84	63.91	53.91	-22.06	-18.07
<b>3</b>	<b>0.26328</b>	<b>9.73</b>	<b>35.60</b>	<b>33.35</b>	<b>45.33</b>	<b>43.08</b>	<b>61.33</b>	<b>51.33</b>	<b>-15.99</b>	<b>-8.24</b>
4	0.54063	9.75	17.60	11.38	27.35	21.13	56.00	46.00	-28.65	-24.87
5	3.39453	9.94	19.43	8.92	29.37	18.86	56.00	46.00	-26.63	-27.14
6	15.21484	10.20	15.26	9.91	25.46	20.11	60.00	50.00	-34.54	-29.89

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

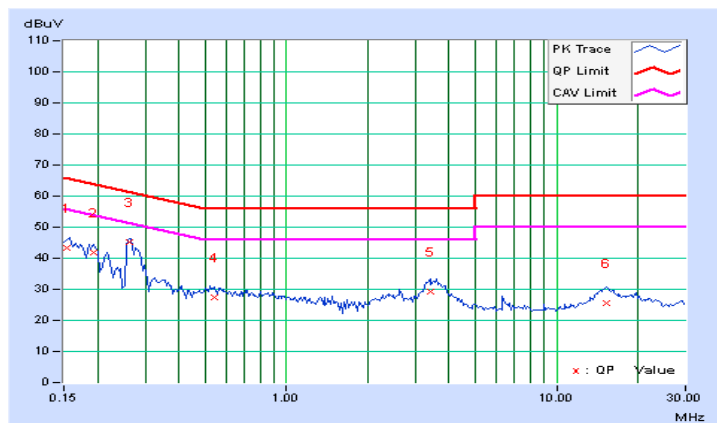


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard


No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 4.3.7 Test Result

Channel	Frequency (MHz)	6db Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
11	2405	1.64	0.5	PASS
19	2445	1.61	0.5	PASS
25	2475	1.63	0.5	PASS
26	2480	1.61	0.5	PASS

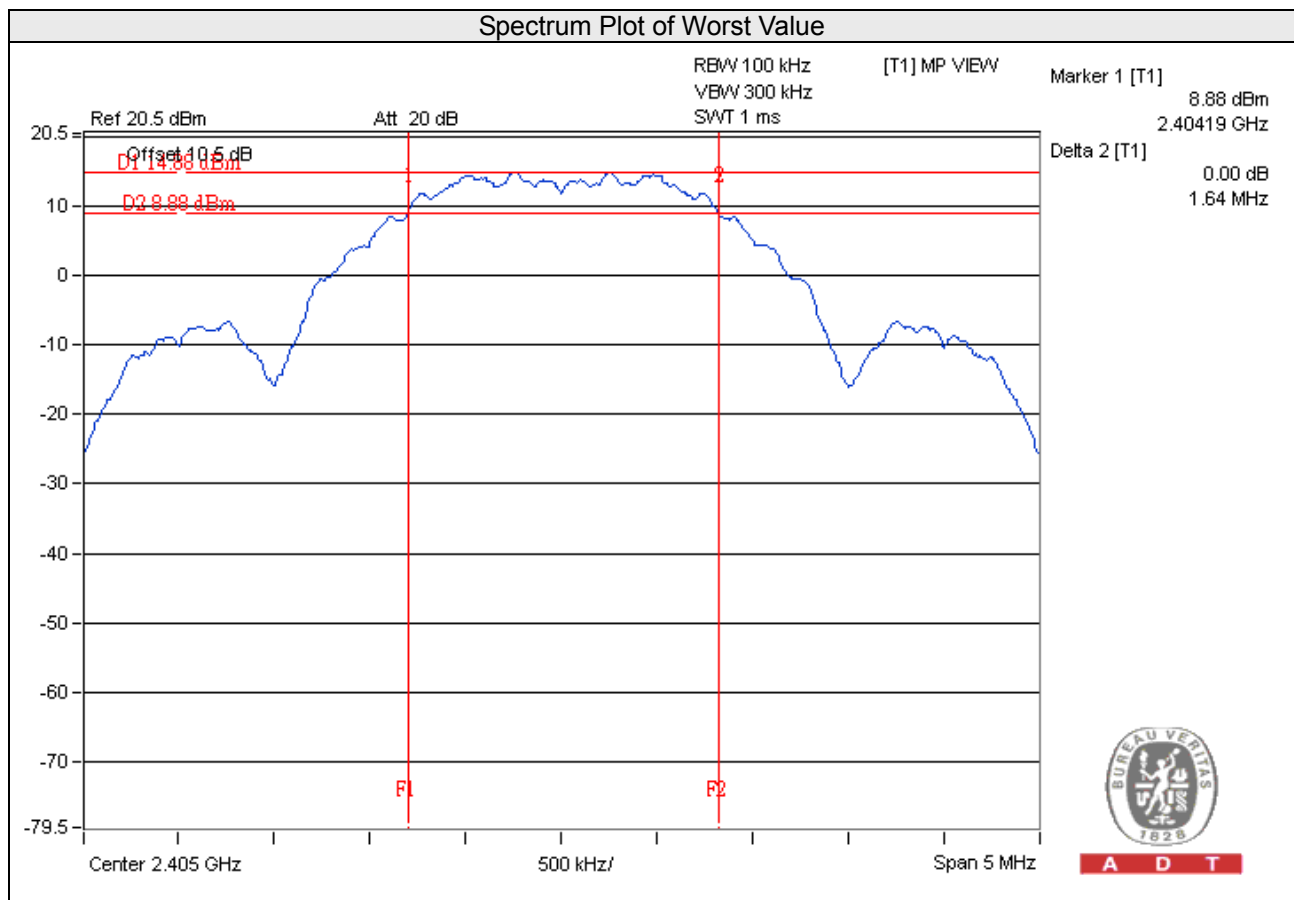


## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.



#### 4.4.7 Test Results

##### FOR PEAK POWER

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
11	2405	<b>77.446</b>	18.89	30	Pass
19	2445	73.961	18.69	30	Pass
25	2475	30.269	14.81	30	Pass
26	2480	0.268	-5.72	30	Pass

##### FOR AVERAGE POWER


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
11	2405	77.090	18.87
19	2445	73.621	18.67
25	2475	29.923	14.76
26	2480	0.223	-6.52

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.5.5 Deviation from Test Standard


No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results

Channel	Freq. (MHz)	PSD (dBm)	Limit (dBm)	Pass /Fail
11	2405	3.41	8	Pass
19	2445	3.64	8	Pass
25	2475	-0.45	8	Pass
26	2480	-22.24	8	Pass

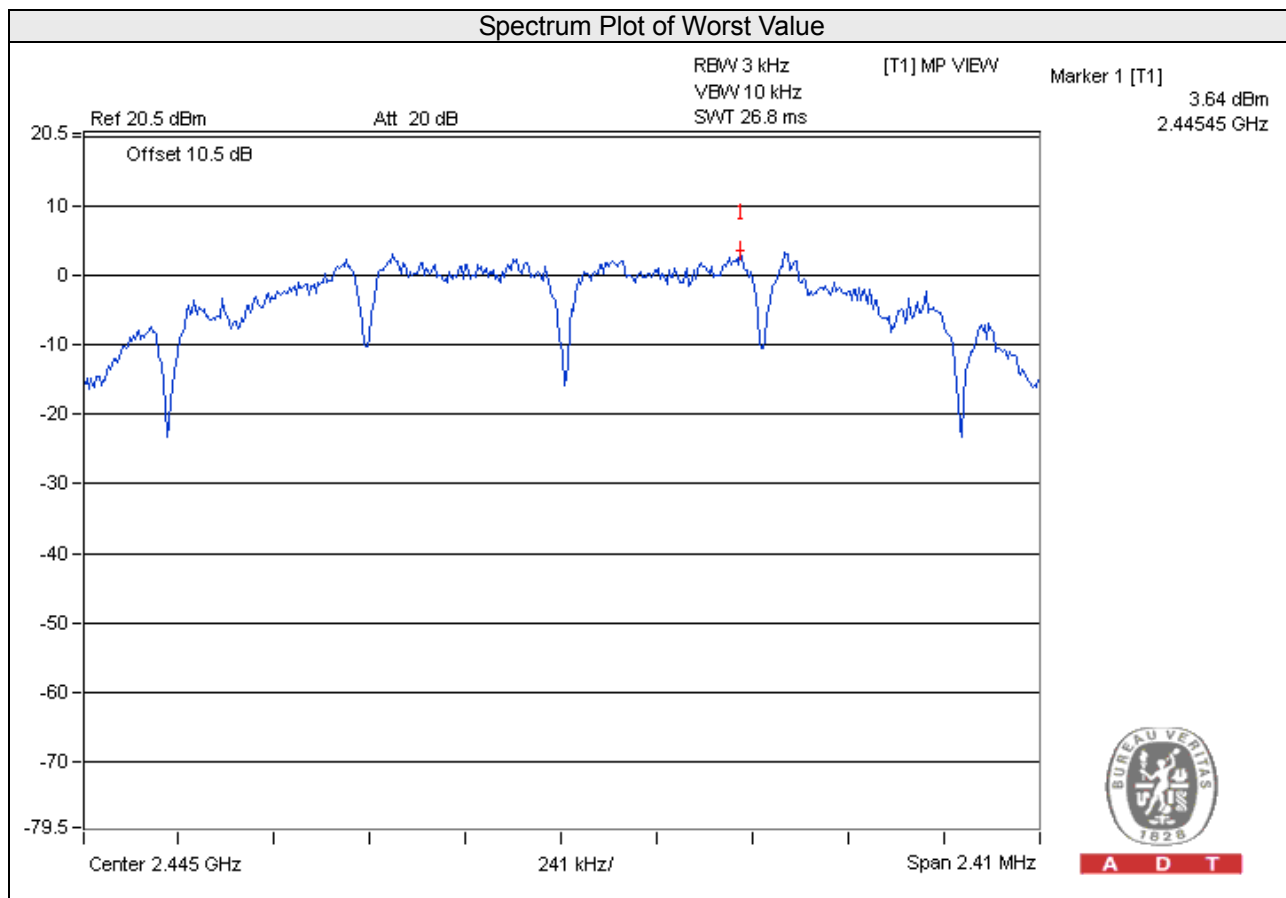




## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.



### 4.6.6 EUT Operating Condition

Same as Item 4.3.6



### 4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.



### CH 11

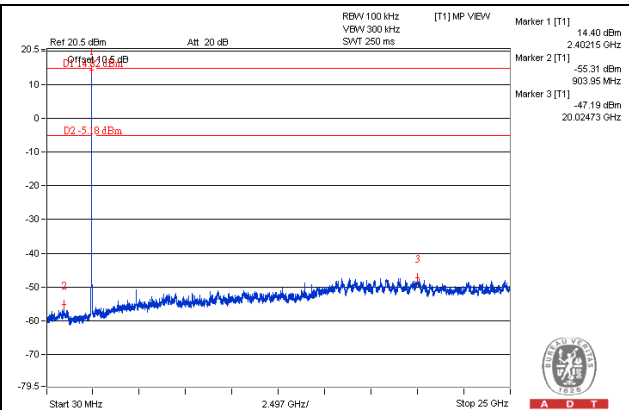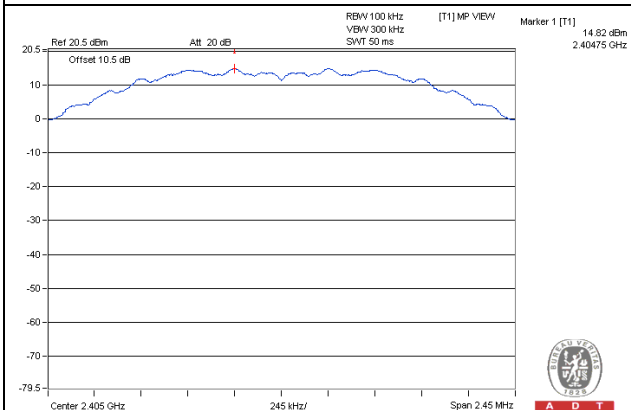



### CH 19

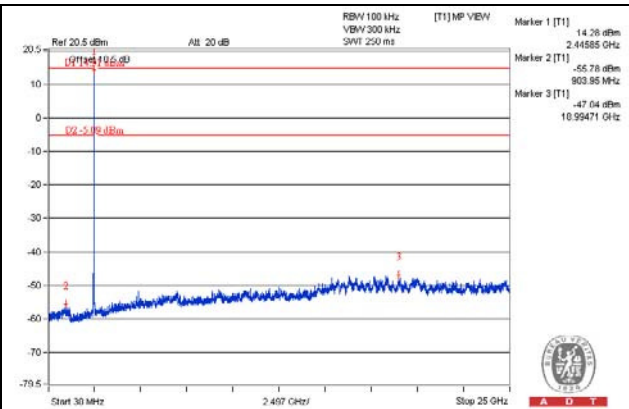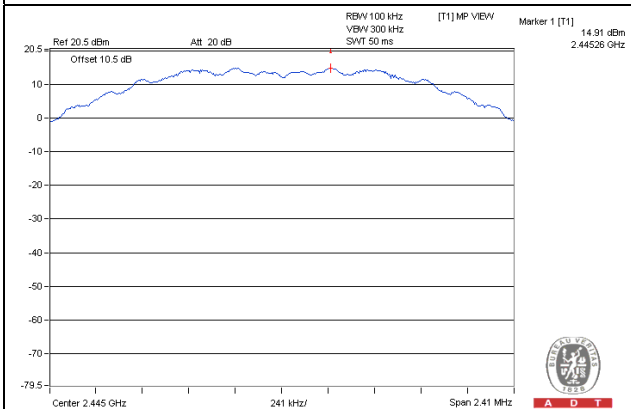


### CH 25

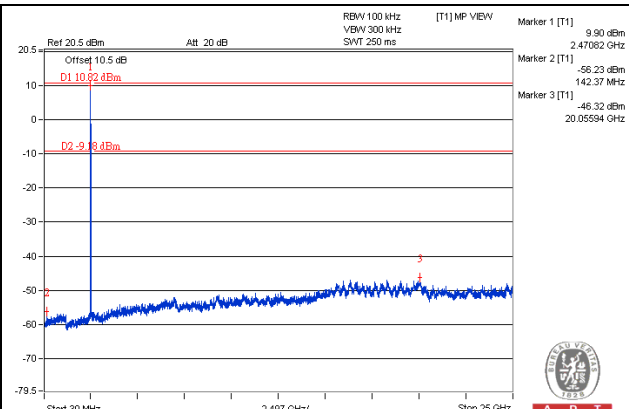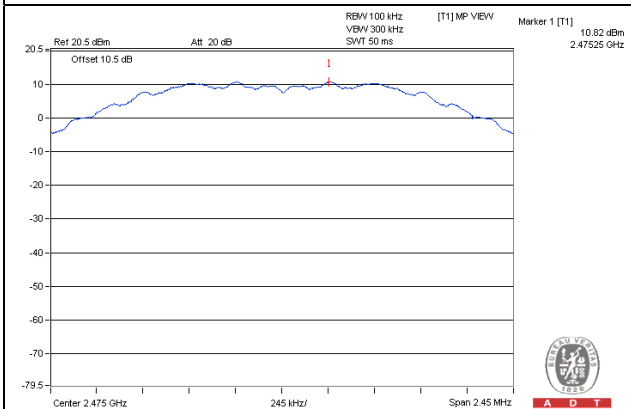


### CH 26

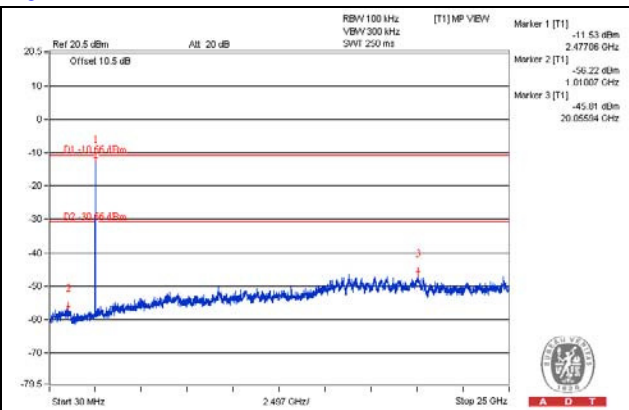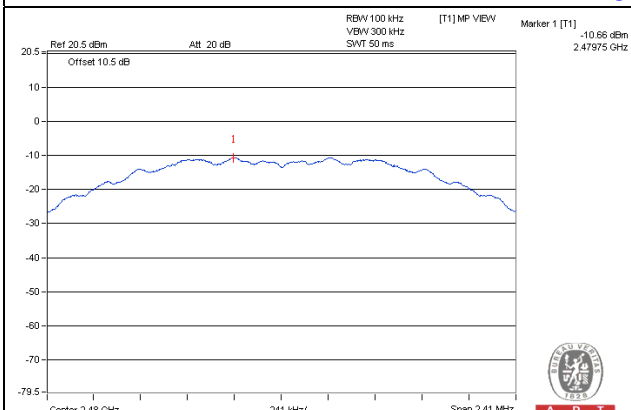


### CH 11 Band edge

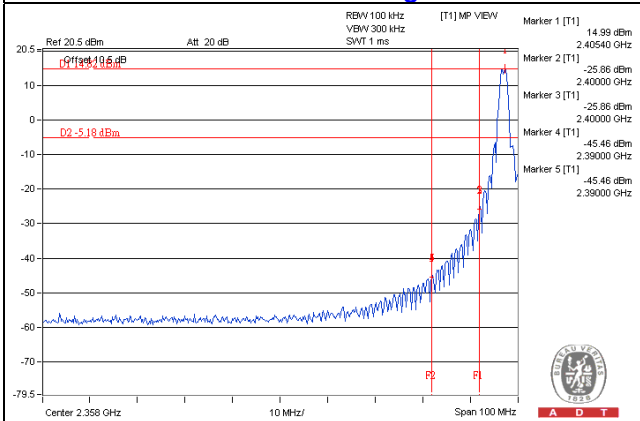


### CH 25 Band edge

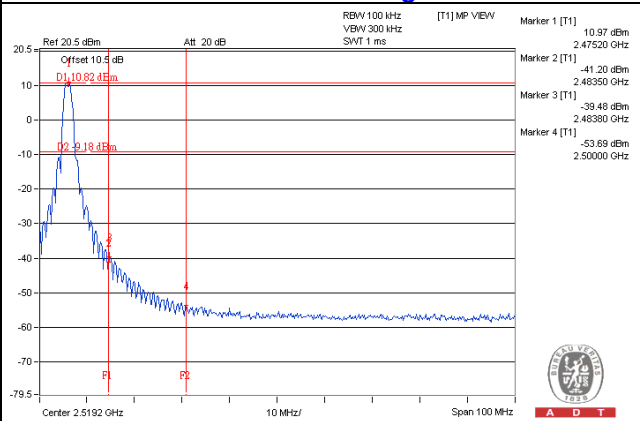

### CH 11 Band edge

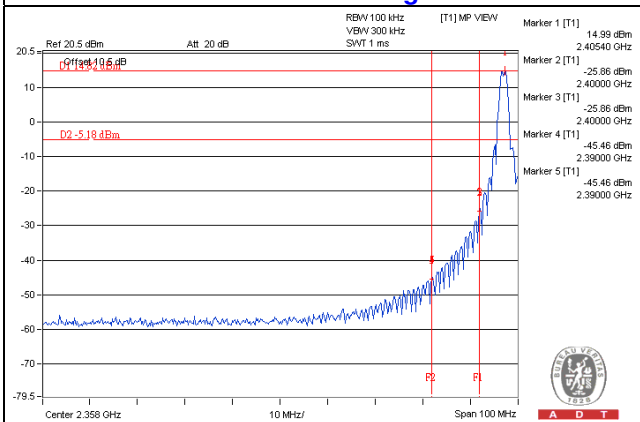

### CH 26 Band edge

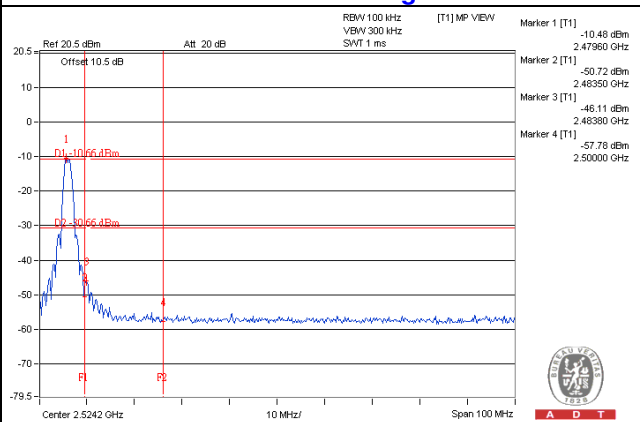

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).





## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---