

FCC Test Report

FCC ID : P27NA502S
Equipment : Multiple RF Home Gateway
Model No. : NA502S
Brand Name : Sercomm
Multiple Listing : Refer to item 1.1.1 for more details
Applicant : Sercomm Corporation
Address : 8F, No. 3-1, YuanQu St., NanKang, Taipei 115,
Taiwan, R.O.C.
Standard : 47 CFR FCC Part 24 Subpart E
Received Date : Nov. 21, 2016
Tested Date : Dec. 05 ~ Dec. 19, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:



Along Chen / Assistant Manager



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition and Location Information.....	10
2.2	The Worst Test Modes and Channel Details	10
3	TEST RESULTS.....	11
3.1	Equivalent Isotropically Radiated Power	11
3.2	Radiated Emissions.....	14
3.3	Conducted Emissions.....	20
3.4	Band Edge.....	23
3.5	Occupied Bandwidth	25
3.6	Peak to Average Ratio	27
3.7	Frequency Stability.....	29
4	TEST LABORATORY INFORMATION	31

Release Record

Report No.	Version	Description	Issued Date
FG6N2103P24	Rev. 01	Initial issue	Mar. 03, 2017

Summary of Test Results

FCC Rules	Test Items	Measured	Result
2.1046 / 24.232(c)	Equivalent Isotropically Radiated Power	Power[dBm] : GPRS: 31.12 WCDMA: 23.61	Pass
2.1053 / 24.238(a)	Radiated Emissions	Meet the requirement of limit	Pass
2.1051 / 24.238(a)	Conducted Emissions	Meet the requirement of limit	Pass
2.1051 / 24.238(a)	Band Edge	Meet the requirement of limit	Pass
2.1049	Occupied Bandwidth	Meet the requirement of limit	Pass
24.232(d)	Peak to average ratio	Meet the requirement of limit	Pass
2.1055 / 24.235	Frequency Stability	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
Sercomm	NA502Sxxxxxxxx	Multiple RF Home Gateway	the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, "blank" or "-", for marketing purpose.
MiOS	G550xxxxx	Multiple RF Home Gateway	
Nortek	GC1xxxxxxxx	Multiple RF Home Gateway	
Vera	VeraSecurexxxxx	Multiple RF Home Gateway	
Vera	VeraSecurexxxxx	Advanced Smart Home Security Controller	
<ul style="list-style-type: none"> ✦ All models are electrically identical, different model names are for marketing purpose. ✦ The above models, model NA502S was selected as a representative one for the final test and only its data was recorded in this report. 			

1.1.2 Specification of the Equipment under Test (EUT)

Operating Band	GPRS: 1850.2 ~ 1909.8 MHz WCDMA: 1852.4 ~ 1907.6 MHz
Modulation	GPRS: GMSK EDGE: 8PSK WCDMA / HSDPA / HSUPA: QPSK (uplink)
Multislot Class	10
3GPP Release Version	R5 / R6

1.1.3 Maximum EIRP, Frequency Tolerance and Emission Designator

System	Modulation	Maximum EIRP(W)	Frequency Tolerance (ppm)	Emission Designator
GPRS 1900	GMSK	1.294	0.029	249KGXW
WCDMA 1900	QPSK	0.230	0.023	4M07F9W

1.1.4 Antenna Details

Type	Gain (dBi)	Connector	Remark
PIFA	2	UFL	---

1.1.5 EUT Operational Condition

Supply Voltage	12Vdc from adapter		
Operational Voltage	<input checked="" type="checkbox"/> Vnom (120 V)	<input checked="" type="checkbox"/> Vmax (138 V)	<input checked="" type="checkbox"/> Vmin (102 V)
Operational Climatic	<input checked="" type="checkbox"/> Tnom (20°C)	<input checked="" type="checkbox"/> Tmax (50°C)	<input checked="" type="checkbox"/> Tmin (-30°C)

1.1.6 Accessories

Accessories		
No.	Equipment	Description
1	Adapter	Brand: LEI Model: MU24-Y120200-A2 I/P: 100-240Vac, 50/60Hz, 0.7A O/P: 12Vdc, 2A Power line: 1.5m non-shielded without core
2	Adapter	Brand: APD Model: WA-24Q12FU I/P: 100-240Vac, 50-60Hz, 0.7A O/P: 12Vdc, 2A Power line: 1.5m non-shielded without core
3	Lithium-ion Battery	Brand: Simple Technology Co. LTD. Model: A3EQ2009H Rating: 7.5Vdc, 2400mAh

1.1.7 Operating Channel List


GPRS		
	Channel	Frequency (MHz)
Low	512	1850.2
Middle	661	1880.0
High	810	1909.8

WCDMA		
	Channel	Frequency (MHz)
Low	9262	1852.4
Middle	9400	1880.0
High	9538	1907.6

1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	9ZFB4X1	DoC	RJ45, 10m non-shielded.
2	USB Flash	SONY	USM16GU	0000020	---	---

1.3 Test Setup Chart

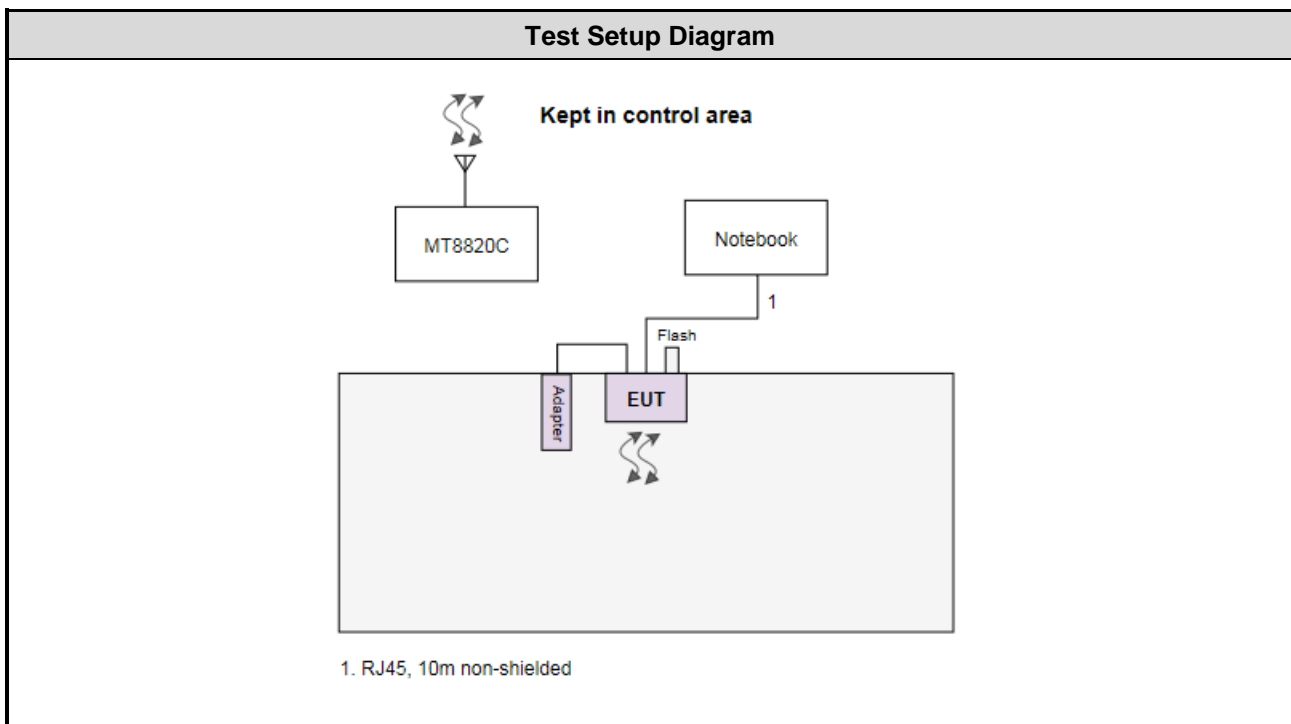

1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Dec. 05 ~ Dec. 06, 2016				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Radio Communication Analyzer	Anritsu	MT8820C	6201240341	Mar. 28, 2016	Mar. 27, 2017
Spectrum Analyzer	R&S	FSV40	101498	Nov. 25, 2016	Nov. 24, 2017
Receiver	R&S	ESR3	101658	Nov. 24, 2016	Nov. 23, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 04, 2016	Aug. 03, 2017
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 16, 2015	Dec. 15, 2016
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017
Preamplifier	EMC	EMC02325	980225	Aug. 05, 2016	Aug. 04, 2017
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2016	Oct. 05, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 10, 2015	Dec. 09, 2016
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	16052	Dec. 10, 2015	Dec. 09, 2016
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 10, 2015	Dec. 09, 2016
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 10, 2015	Dec. 09, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Dec. 19, 2016				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2016	Feb. 16, 2017
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 21, 2016	Nov. 20, 2017
Radio Communication Analyzer	Anritsu	MT8820C	6201240341	Mar. 28, 2016	Mar. 27, 2017
Power Meter	Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017
Power Sensor	Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards.

47 CFR FCC Part 24 Subpart E

ANSI C63.4-2014

ANSI/TIA-603-D 2010

FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.134 Hz
Conducted power	± 0.808 dB
Frequency error	± 34.134 Hz
Conducted emission	± 2.670 dB
Radiated emission ≤ 1 GHz	± 3.66 dB
Radiated emission > 1 GHz	± 5.63 dB
Temperature	± 0.6 °C

2 Test Configuration

2.1 Testing Condition and Location Information

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	21-24°C / 61-62%	Kevin Lee Vincent Yeh
RF Conducted	TH01-WS	22°C / 63%	Alex Huang

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test channel
E.I.R.P	GPRS WCDMA	512, 661, 810 9262, 9400, 9538
Radiated Emission ≤ 1GHz	GPRS WCDMA	661 9262
Radiated Emission > 1GHz	GPRS WCDMA	512, 661, 810 9262, 9400, 9538
Conducted Emissions	GPRS WCDMA	512, 661, 810 9262, 9400, 9538
Band Edge	GPRS WCDMA	512, 810 9262, 9538
Occupied Bandwidth	GPRS WCDMA	512, 661, 810 9262, 9400, 9538
Peak to average ratio	GPRS WCDMA	512, 661, 810 9262, 9400, 9538
Frequency Stability	GPRS WCDMA	661 9400

NOTE:

1. Two adapters (LEI & APD) had been covered during the pretest and found that **LEI adapter** was the worst case and was selected for final test.
2. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

3 Test Results

3.1 Equivalent Isotropically Radiated Power

3.1.1 Limit of Equivalent Isotropically Radiated Power

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 Test Procedures

For Conducted Power Measurement

1. The EUT links up with simulator and is set to maximum output power level at low / middle / high channel.
2. Measure the output power of low / middle / high channel of the EUT


For EIRP Measurement

EIPR can be calculated by below formula from KDB 412172 D01.

1. $EIRP = P_T + G_T - L_C$
 P_T = transmitter output power, in dBm.
 G_T = gain of the transmitting antenna, in dBi (EIRP).
 L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

3.1.3 Test Setup

Conducted Power Measurement



3.1.4 Test Result of Conducted power (dBm)

Band	GPRS 1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GPRS 8 (GMSK, 1 slot)	29.05	29.12	29.07
GPRS 10 (GMSK, 2 slots)	29.00	29.07	29.03
EDGE 8 (8PSK, 1 slot)	25.22	25.31	25.19
EDGE 10 (8PSK, 2 slots)	25.10	25.22	25.06

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2kbps	21.25	21.39	21.61
HSDPA Subtest-1	21.08	21.18	21.34
HSDPA Subtest-2	20.59	20.76	20.92
HSDPA Subtest-3	20.41	20.52	20.79
HSDPA Subtest-4	20.11	20.28	20.54
HSUPA Subtest-1	20.38	20.67	20.91
HSUPA Subtest-2	19.01	19.05	19.32
HSUPA Subtest-3	19.74	19.81	20.12
HSUPA Subtest-4	19.13	19.22	19.38
HSUPA Subtest-5	20.69	20.88	21.09

3.1.5 Test Result of Equivalent Isotropically Radiated Power (dBm)

Mode	GPRS					
Channel	Frequency (MHz)	Max Conducted Output Power (dBm)	Max Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)
512	1850.2	29.05	2	31.05	1.274	2
661	1880.0	29.12	2	31.12	1.294	2
810	1909.8	29.07	2	31.07	1.279	2

Mode	WCDMA					
Channel	Frequency (MHz)	Max Conducted Output Power (dBm)	Max Antenna Gain (dBi)	EIRP (dBm)	ERP (W)	Limit (W)
9262	1852.4	21.25	2	23.25	0.211	2
9400	1880.0	21.39	2	23.39	0.218	2
9538	1907.6	21.61	2	23.61	0.230	2

NOTE: EIRP = Conducted Output Power + Antenna Gain.

3.2 Radiated Emissions

3.2.1 Limit of Radiated Emissions


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.
4. After finding the max radiated emission, substitution method will be used for getting effective radiated power. EUT will be removed and substitution antenna will be placed at same position. Signal generator will output CW signal to substitution antenna through a RF cable. Rotate turntable and move antenna to find maximum radiated emission. Adjust output power of signal generator to let the maximum radiated emission is same as step 3. Record the output power level.
5. E.I.R.P = output power of step 4 + gain of substitution antenna – cable loss of RF cable.

3.2.3 Test Setup

Radiated Emissions below 1 GHz

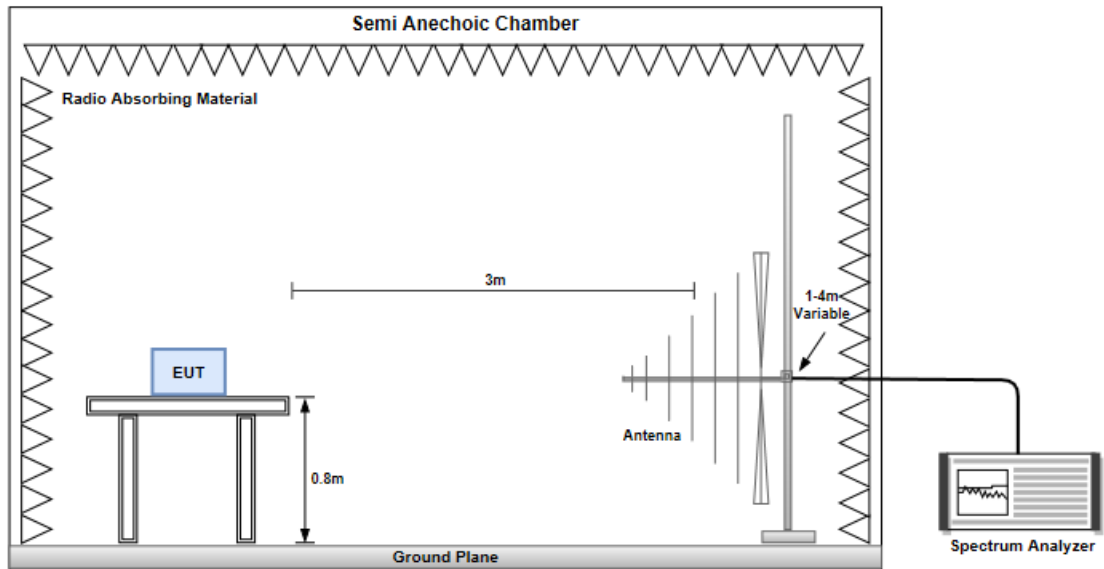

Radiated Emissions above 1 GHz

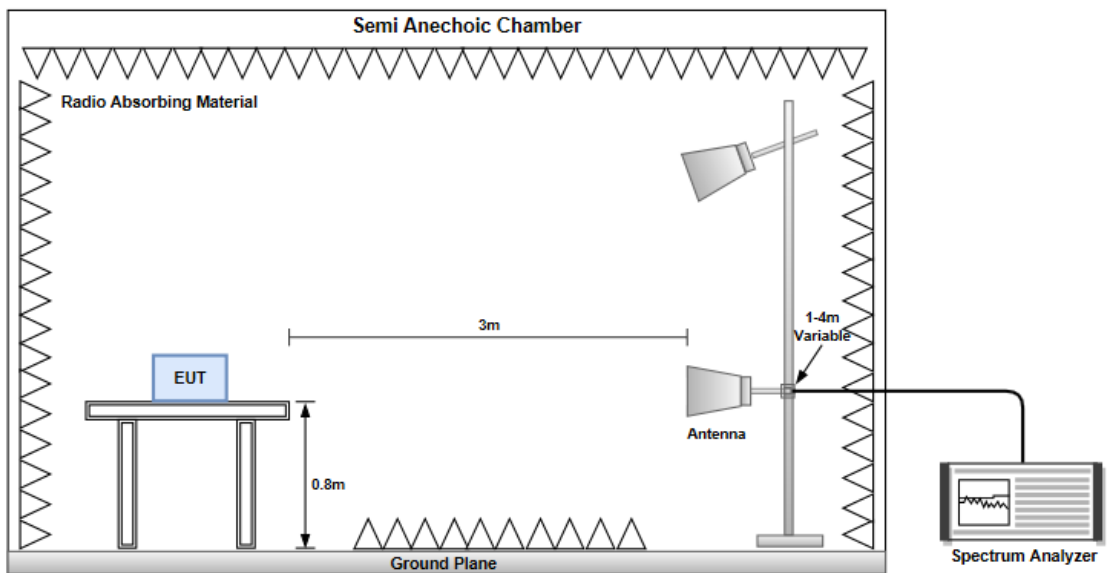

3.2.4 Test Result of Radiated Emissions below 1GHz

Mode		GPRS, Channel: 661					
Frequency (MHz)	Antenna Polarity	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
38.73	H	-56.73	-13.00	-43.73	-64.50	-44.26	-12.47
148.34	H	-49.30	-13.00	-36.30	-49.09	-48.40	-0.90
311.30	H	-59.24	-13.00	-46.24	-58.98	-63.53	4.29
380.17	H	-57.57	-13.00	-44.57	-60.16	-61.88	4.31
556.71	H	-60.90	-13.00	-47.90	-66.04	-64.81	3.91
708.03	H	-58.97	-13.00	-45.97	-66.29	-62.64	3.67
46.49	V	-49.80	-13.00	-36.80	-47.81	-38.40	-11.40
92.08	V	-51.67	-13.00	-38.67	-51.94	-52.36	0.69
135.73	V	-51.20	-13.00	-38.20	-52.27	-49.95	-1.25
226.91	V	-52.23	-13.00	-39.23	-54.40	-56.63	4.40
358.83	V	-57.58	-13.00	-44.58	-60.23	-61.91	4.33
584.84	V	-56.76	-13.00	-43.76	-65.62	-60.43	3.67

Note: EIRP = S.G Power value + Correction factor

Mode		WCDMA, Channel: 9538					
Frequency (MHz)	Antenna Polarity	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
38.73	H	-55.62	-13.00	-42.62	-63.39	-43.15	-12.47
151.25	H	-49.30	-13.00	-36.30	-49.05	-48.56	-0.74
291.90	H	-59.73	-13.00	-46.73	-58.53	-64.04	4.31
381.14	H	-58.35	-13.00	-45.35	-60.96	-62.66	4.31
637.22	H	-60.12	-13.00	-47.12	-66.39	-63.89	3.77
722.58	H	-58.20	-13.00	-45.20	-66.11	-61.79	3.59
54.25	V	-49.66	-13.00	-36.66	-47.67	-40.07	-9.59
90.14	V	-51.49	-13.00	-38.49	-51.74	-52.27	0.78
135.73	V	-52.19	-13.00	-39.19	-53.26	-50.94	-1.25
226.91	V	-50.51	-13.00	-37.51	-52.68	-54.91	4.40
370.47	V	-57.90	-13.00	-44.90	-60.66	-62.22	4.32
584.84	V	-57.90	-13.00	-44.90	-66.76	-61.57	3.67

Note: EIRP = S.G Power value + Correction factor

3.2.5 Test Result of Radiated Emissions above 1GHz

Mode	GPRS, Channel: 512						
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
3700.40	H	-39.74	-13.00	-26.74	-53.67	-46.46	6.72
5550.60	H	-43.68	-13.00	-30.68	-61.33	-49.91	6.23
7400.80	H	-27.26	-13.00	-14.26	-49.51	-30.17	2.91
9251.00	H	-38.23	-13.00	-25.23	-60.82	-40.43	2.20
11101.20	H	-35.78	-13.00	-22.78	-60.25	-36.41	0.63
3700.40	V	-45.37	-13.00	-32.37	-59.30	-52.09	6.72
5550.60	V	-44.18	-13.00	-31.18	-61.83	-50.41	6.23
7400.80	V	-31.12	-13.00	-18.12	-53.37	-34.03	2.91
9251.00	V	-37.07	-13.00	-24.07	-59.66	-39.27	2.20
11101.20	V	-37.04	-13.00	-24.04	-61.51	-37.67	0.63

Mode	GPRS, Channel: 661						
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
3760.00	H	-48.37	-13.00	-35.37	-62.08	-55.07	6.70
5640.00	H	-44.72	-13.00	-31.72	-62.18	-50.92	6.20
7520.00	H	-32.82	-13.00	-19.82	-53.60	-35.80	2.98
9400.00	H	-36.97	-13.00	-23.97	-61.02	-38.75	1.78
11280.00	H	-37.31	-13.00	-24.31	-61.47	-38.05	0.74
3760.00	V	-47.79	-13.00	-34.79	-61.82	-54.49	6.70
5640.00	V	-44.52	-13.00	-31.52	-62.37	-50.72	6.20
7520.00	V	-33.30	-13.00	-20.30	-55.15	-36.28	2.98
9400.00	V	-37.66	-13.00	-24.66	-59.84	-39.44	1.78
11280.00	V	-36.27	-13.00	-23.27	-61.28	-37.01	0.74

Mode	GPRS, Channel: 810						
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
3819.60	H	-45.91	-13.00	-32.91	-59.73	-52.60	6.69
5729.40	H	-39.32	-13.00	-26.32	-56.95	-45.45	6.13
7639.20	H	-34.37	-13.00	-21.37	-55.10	-37.41	3.04
9549.00	H	-37.65	-13.00	-24.65	-62.24	-39.35	1.70
11458.00	H	-34.22	-13.00	-21.22	-58.75	-35.07	0.85
3819.60	V	-46.53	-13.00	-33.53	-60.68	-53.22	6.69
5729.40	V	-42.23	-13.00	-29.23	-60.37	-48.36	6.13
7639.20	V	-33.43	-13.00	-20.43	-55.15	-36.47	3.04
9549.00	V	-38.70	-13.00	-25.70	-61.58	-40.40	1.70
11458.00	V	-34.86	-13.00	-21.86	-60.41	-35.71	0.85

Note: EIRP = S.G Power value + Correction factor

Mode		WCDMA, Channel: 9262					
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
3704.80	H	-43.47	-13.00	-30.47	-57.12	-50.19	6.72
5557.20	H	-54.36	-13.00	-41.36	-71.67	-60.59	6.23
7409.60	H	-49.21	-13.00	-36.21	-70.29	-52.13	2.92
3704.80	V	-43.47	-13.00	-30.47	-57.42	-50.19	6.72
5557.20	V	-56.86	-13.00	-43.86	-74.52	-63.09	6.23
7409.60	V	-52.38	-13.00	-39.38	-74.60	-55.30	2.92

Mode		WCDMA, Channel: 9400					
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
3760.00	H	-46.29	-13.00	-33.29	-60.00	-52.99	6.70
5640.00	H	-47.04	-13.00	-34.04	-64.50	-53.24	6.20
7520.00	H	-45.52	-13.00	-32.52	-66.30	-48.50	2.98
3760.00	V	-45.12	-13.00	-32.12	-59.15	-51.82	6.70
5640.00	V	-49.58	-13.00	-36.58	-67.43	-55.78	6.20
7520.00	V	-47.33	-13.00	-34.33	-69.18	-50.31	2.98

Mode		WCDMA, Channel: 9538					
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
3815.20	H	-43.15	-13.00	-30.15	-56.96	-49.84	6.69
5722.80	H	-42.85	-13.00	-29.85	-60.47	-48.99	6.14
7630.40	H	-36.24	-13.00	-23.24	-56.95	-39.28	3.04
3815.20	V	-43.15	-13.00	-30.15	-62.80	-49.84	6.69
5722.80	V	-42.85	-13.00	-29.85	-63.34	-48.99	6.14
7630.40	V	-36.24	-13.00	-23.24	-59.12	-39.28	3.04

Note: EIRP = S.G Power value + Correction factor

3.3 Conducted Emissions


3.3.1 Limit of Conducted Emissions

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.


3.3.2 Test Procedures


1. Lowest, middle and highest operating channels are tested for this item.
2. Scan frequency range is from 30MHz~19.1GHz.
3. Set RBW = 1MHz, VBW = 3MHz, detector = Peak, sweep time = auto.
4. Record the max trace value and capture the test plot of each sub frequency band.

3.3.3 Test Setup

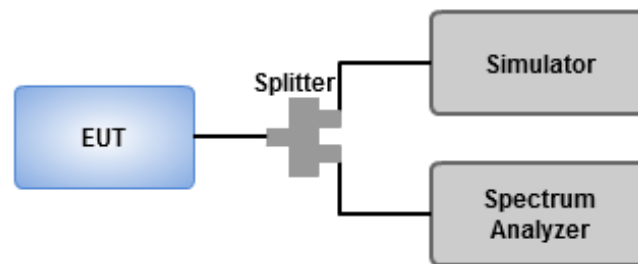

3.3.4 Test Result of Conducted Emissions

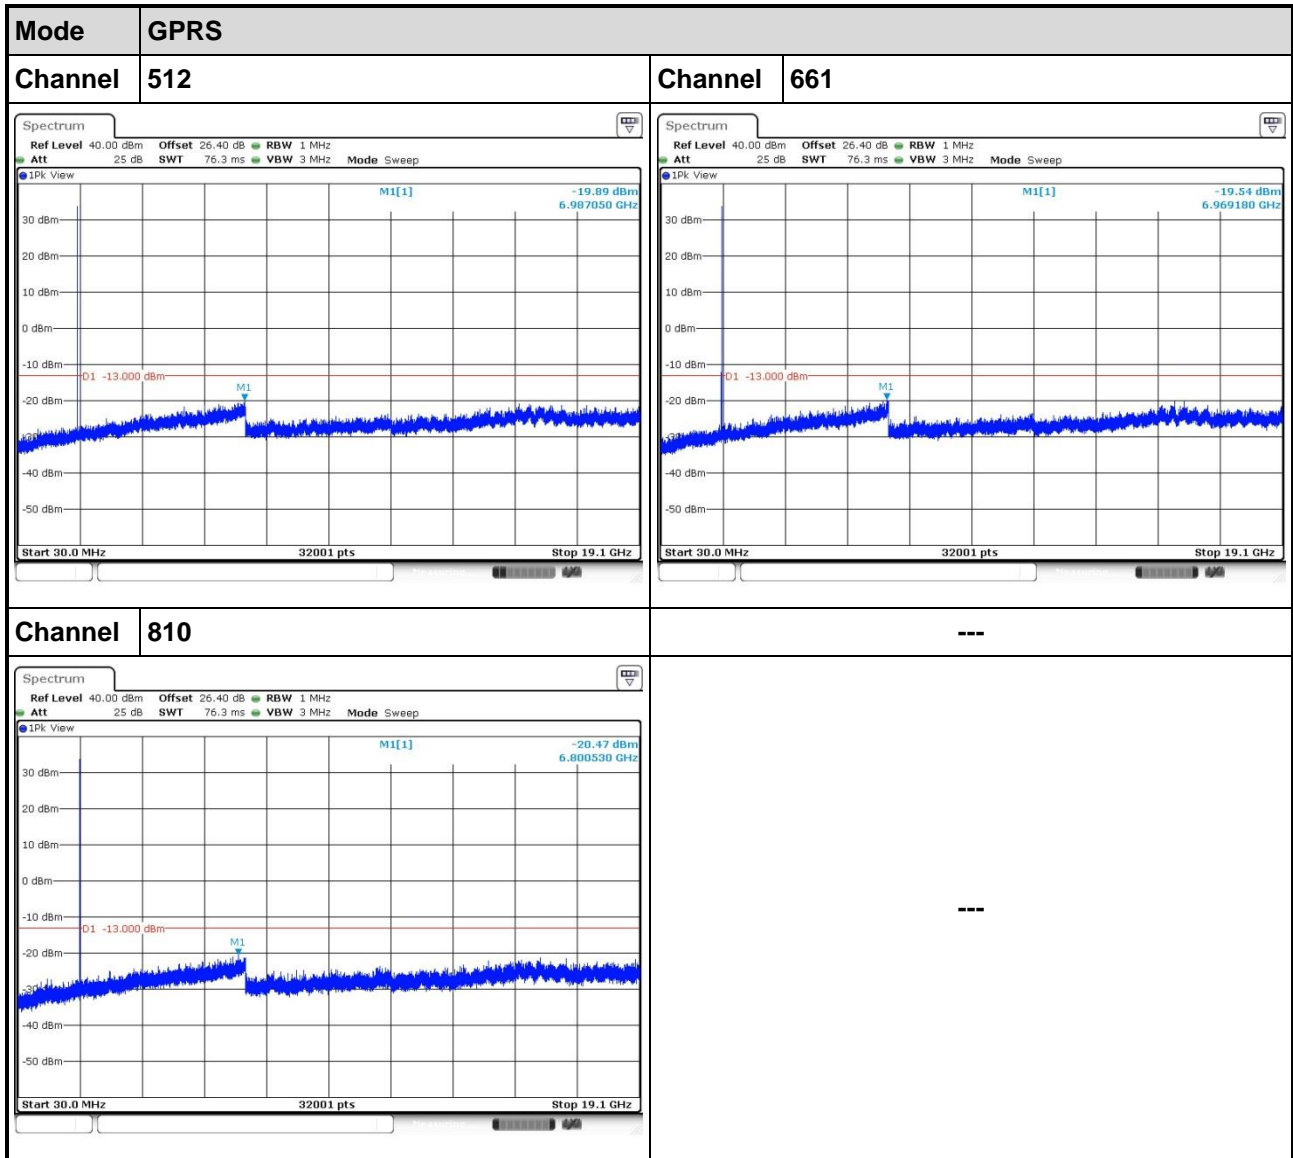

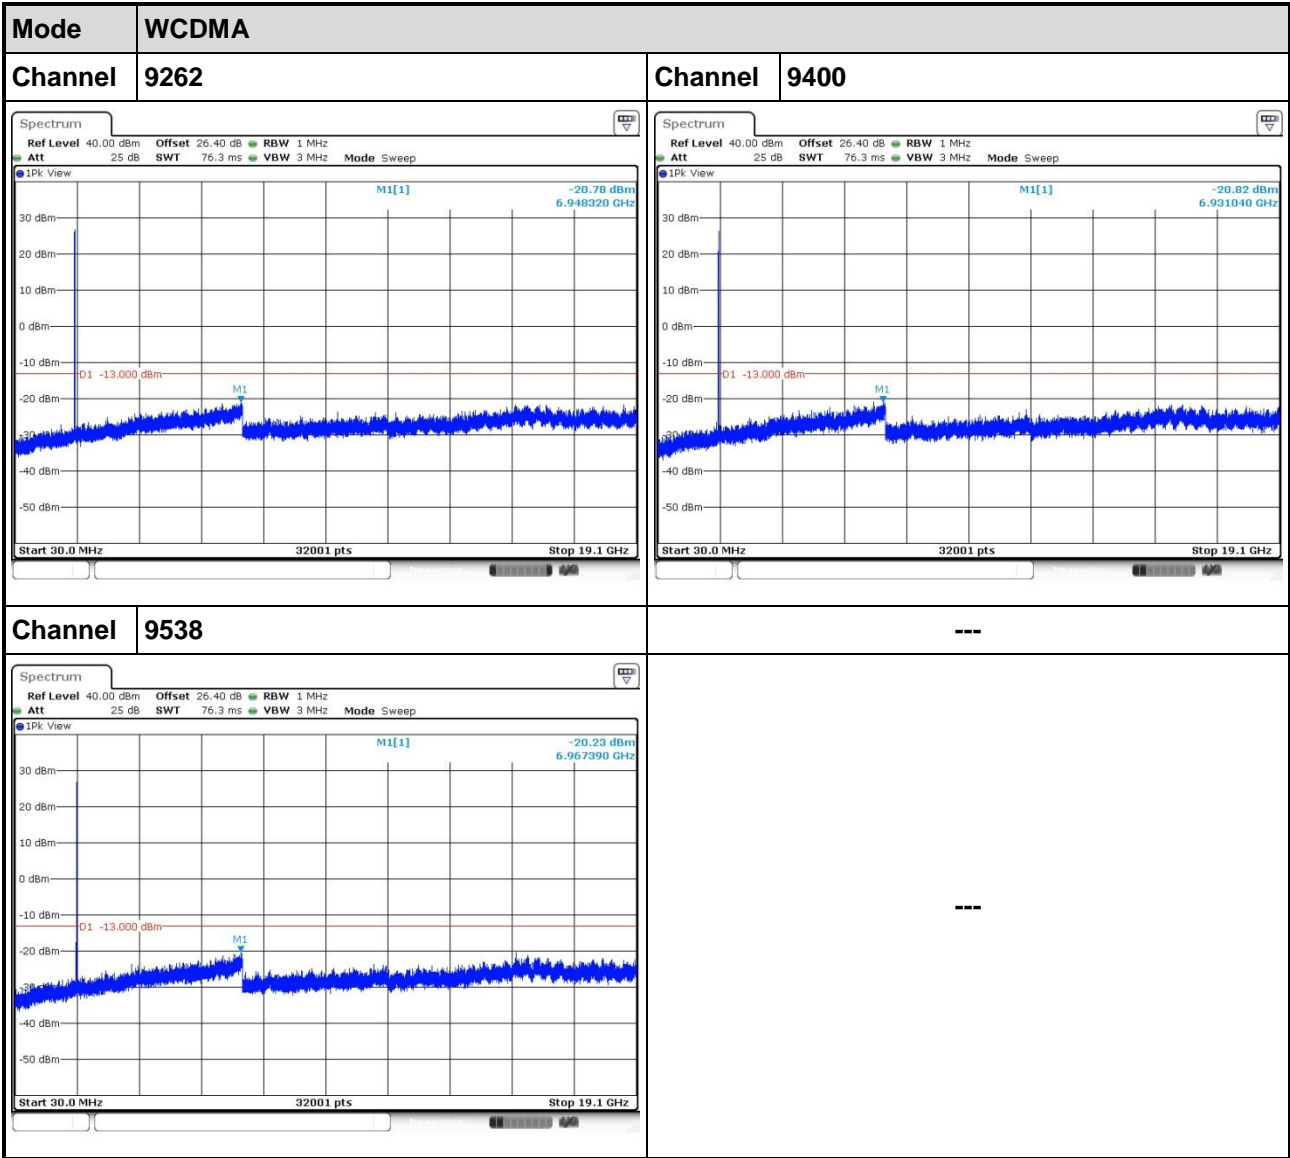

3.4 Band Edge


3.4.1 Limit of Band Edge

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.



3.4.2 Test Procedures

1. Lowest and highest operating channels are tested for this item.
2. The center frequency of spectrum analyzer will be set to 1850 and 1910 MHz.
3. Set RBW = 3kHz, VBW = 10kHz, span = 1 MHz, detector =RMS, sweep time = auto for GPRS.
Set RBW =100kHz, VBW = 300kHz, span = 5 MHz, detector = RMS, sweep time = auto for WCDMA.
4. Record the max trace value and capture the test plot.

3.4.3 Test Setup

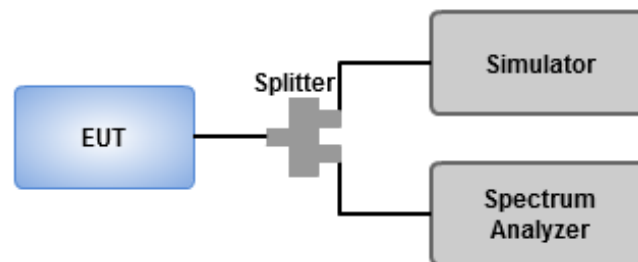

3.4.4 Test Result of Band Edge

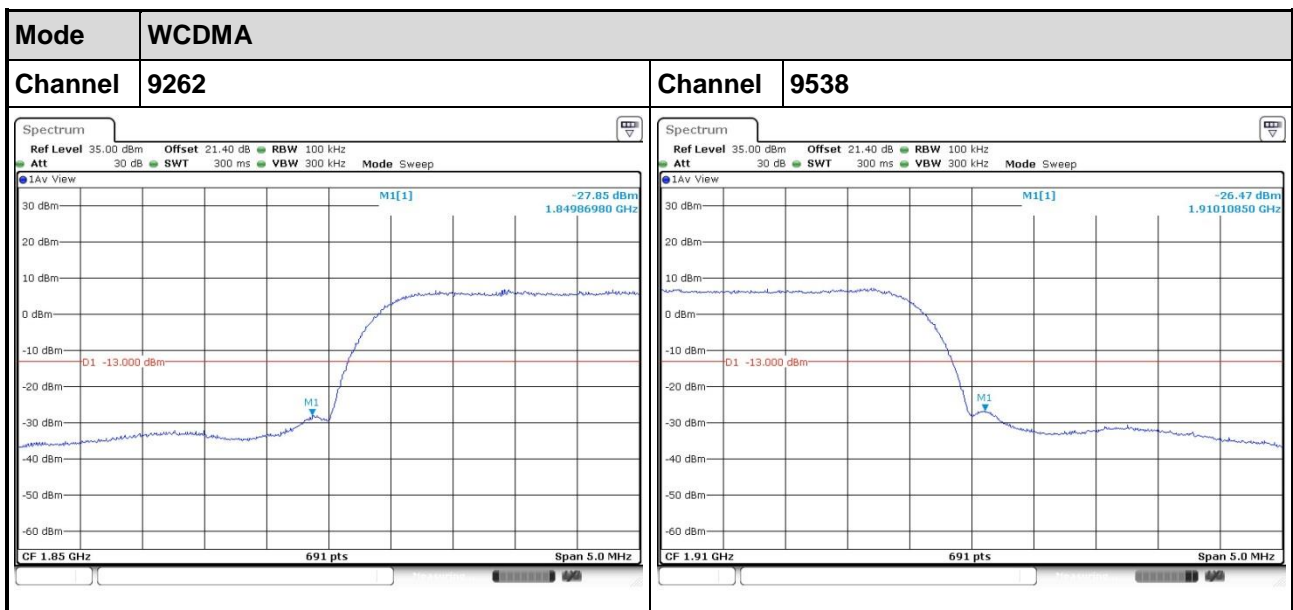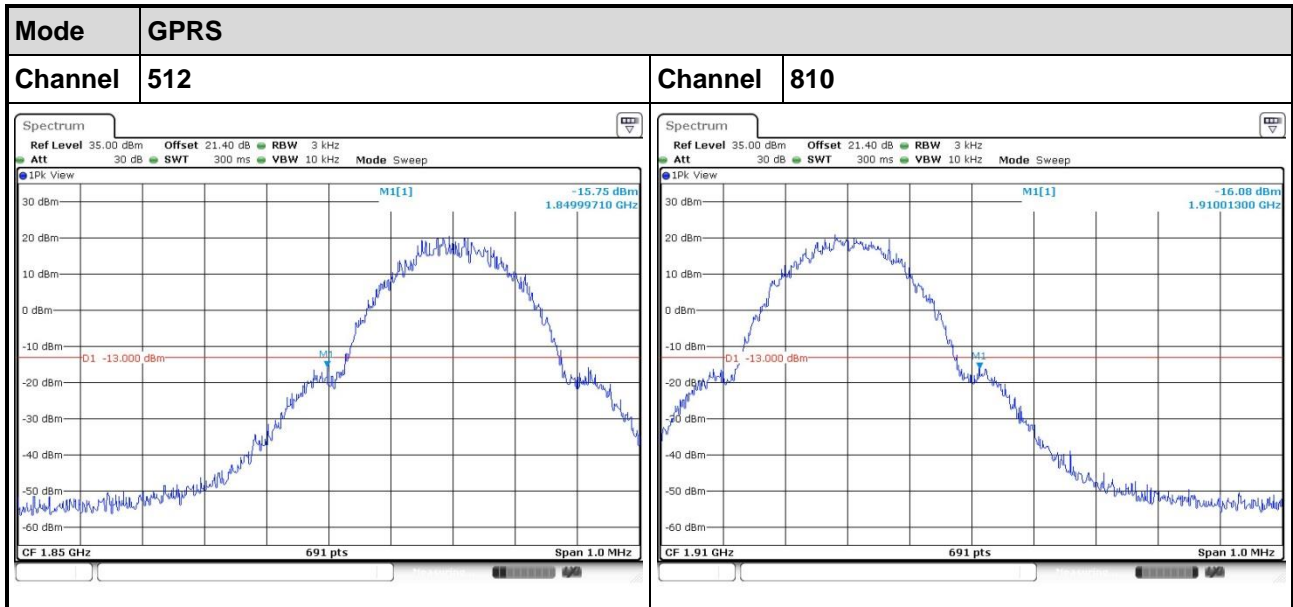


3.5 Occupied Bandwidth

3.5.1 Test Procedures


1. Set RBW = 10kHz, VBW = 30kHz for GPRS mode.
Set RBW = 100kHz, VBW = 300kHz for WCDMA mode.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Using occupied bandwidth measurement function of spectrum analyzer to measure occupied bandwidth.

3.5.2 Test Setup

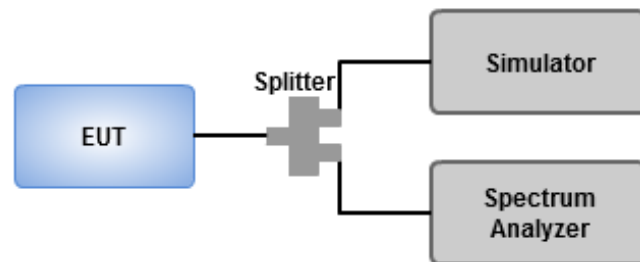


3.5.3 Test Result of Occupied Bandwidth

MODE	Channel	Frequency (MHz)	26dB BW (kHz)	99% OBW (kHz)
GPRS	512	1850.2	307.25	248.91
GPRS	661	1880.0	321.74	244.57
GPRS	810	1909.8	313.04	246.02

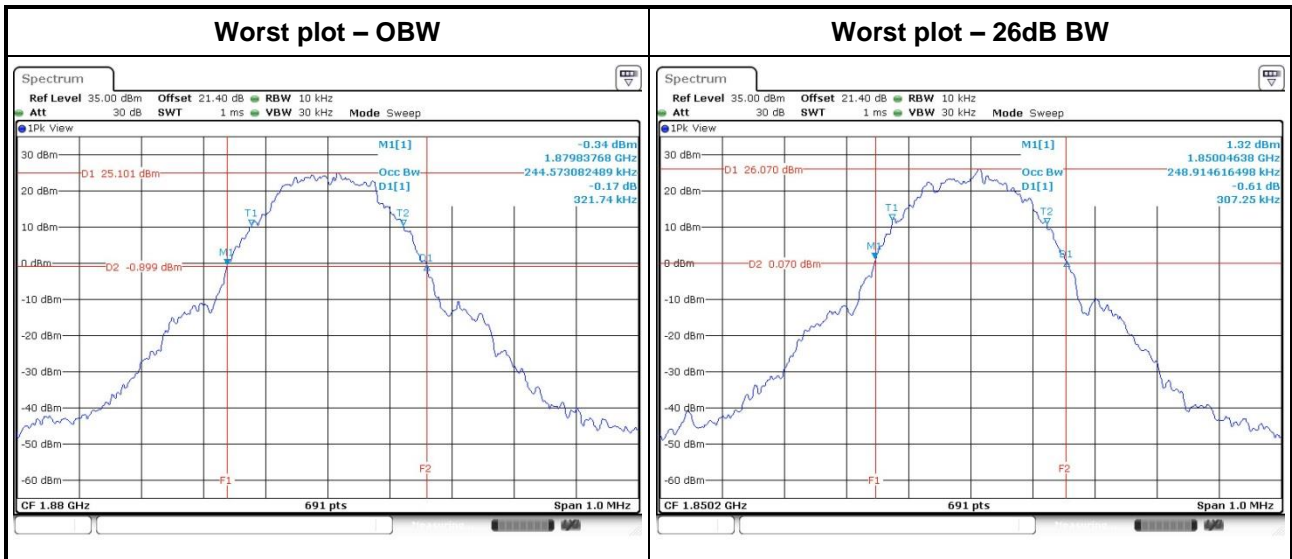

MODE	Channel	Frequency (MHz)	OBW (MHz)	26dB BW (MHz)
WCDMA	9262	1852.4	4.5942	4.07
WCDMA	9400	1880.0	4.6087	4.05
WCDMA	9538	1907.6	4.5942	4.05

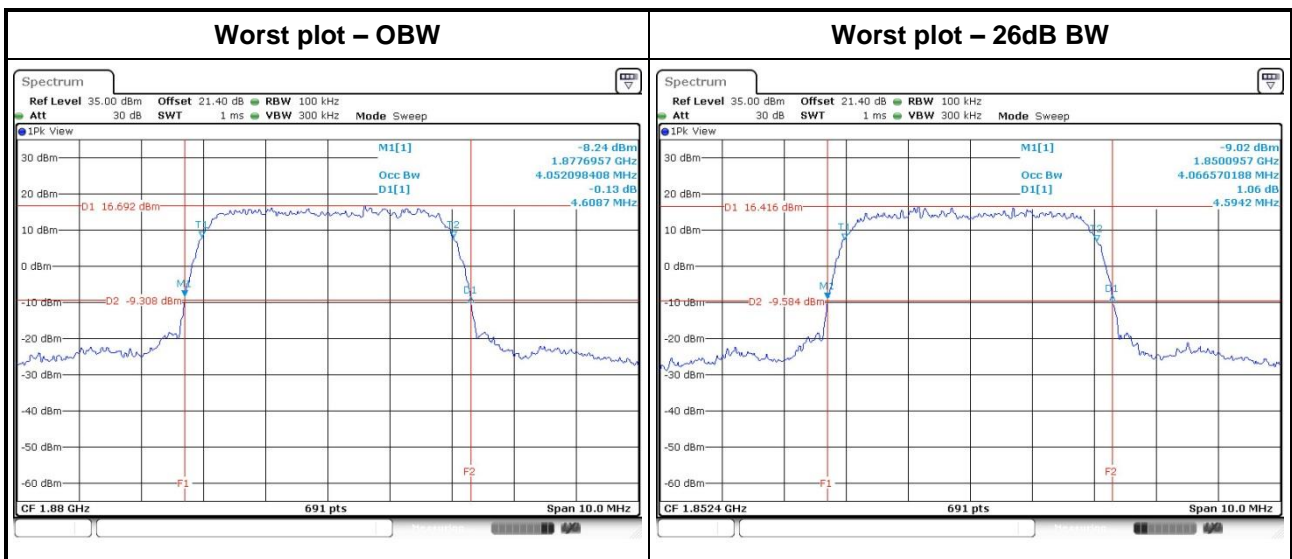

3.6 Peak to Average Ratio

3.6.1 Limit of Peak to Average Ratio

Peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

3.6.2 Test Procedures


For GPRS mode

1. Set RBW=1MHz, RBW=3MHz, Peak detector in Trace 1.
2. Set RBW=1MHz, RBW=3MHz, RMs detector in Trace 2.
3. Trigger function is enabled for measuring signal at burst on time. Measure the difference between trace1 and trace 2.

For WCDMA mode


1. Enable CCDF function of spectrum analyzer and set RBW=10MHz.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.6.3 Test Setup

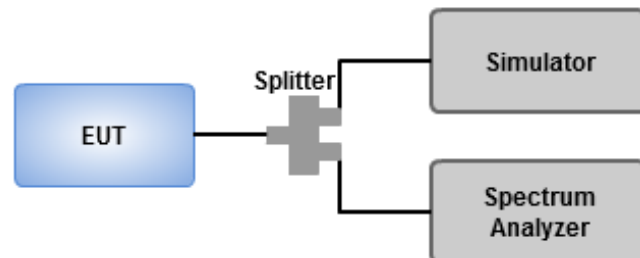

3.6.4 Test Result of Peak to Average ratio

MODE	Channel	Frequency (MHz)	Peak to Average ratio (dB)
GPRS	512	1850.2	0.03
GPRS	661	1880.0	0.01
GPRS	810	1909.8	0.02
WCDMA	9262	1852.4	3.3
WCDMA	9400	1880.0	3.3
WCDMA	9538	1907.6	3.42

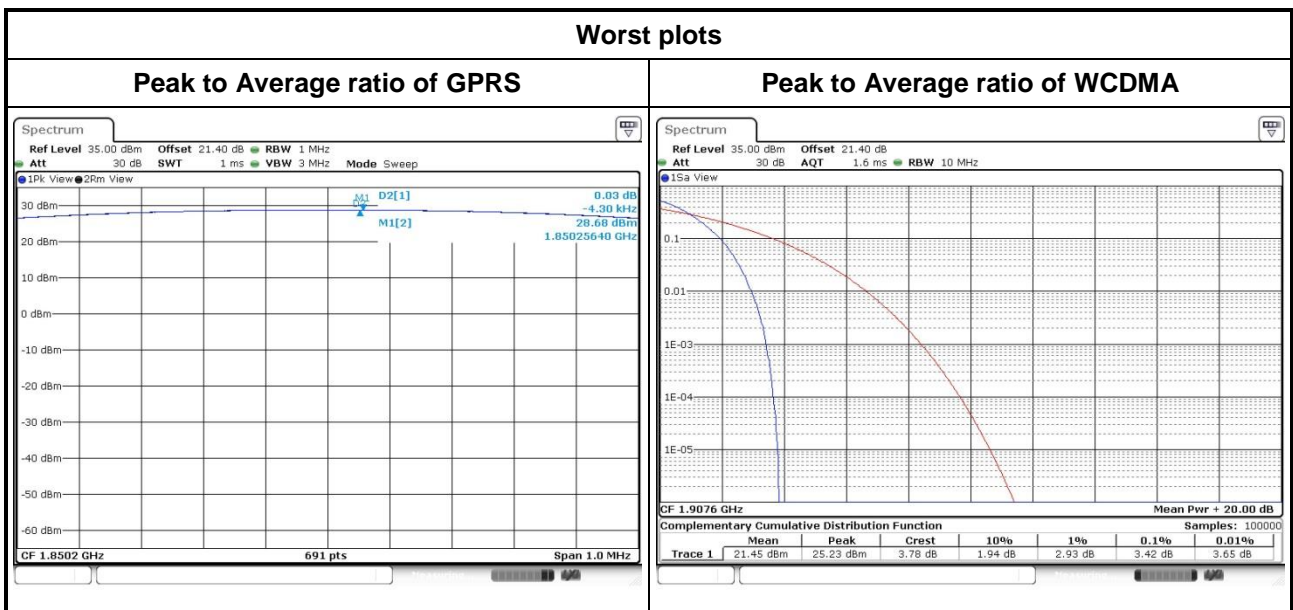

3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures

1. EUT was placed at temperature chamber and connected to an external power supply.
2. Temperature and voltage condition shall be tested to confirm frequency stability.
3. Temperature range is from -30~50°C and voltage range is from lowest to highest working voltage.
4. Tem Link up EUT and simulator. Confirm frequency drift value of simulator and record it.

3.7.3 Test Setup

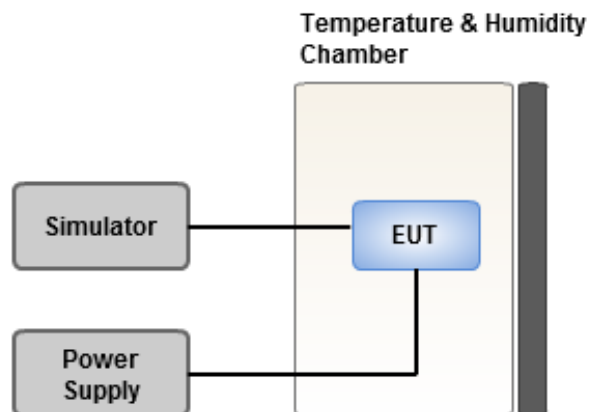

3.7.4 Test Result of Frequency Stability

Temperature (°C)	Voltage (ac)	Frequency Drift (ppm)		Limit (ppm)
		GPRS	WCDMA	
20	138	0.026	0.020	2.5
20	102	0.024	0.022	2.5
50	120	0.027	0.020	2.5
40	120	0.029	0.023	2.5
30	120	0.026	0.020	2.5
20	120	0.024	0.019	2.5
10	120	0.027	0.022	2.5
0	120	0.023	0.023	2.5
-10	120	0.026	0.021	2.5
-20	120	0.024	0.019	2.5
-30	120	0.024	0.021	2.5

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C..

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==