


EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

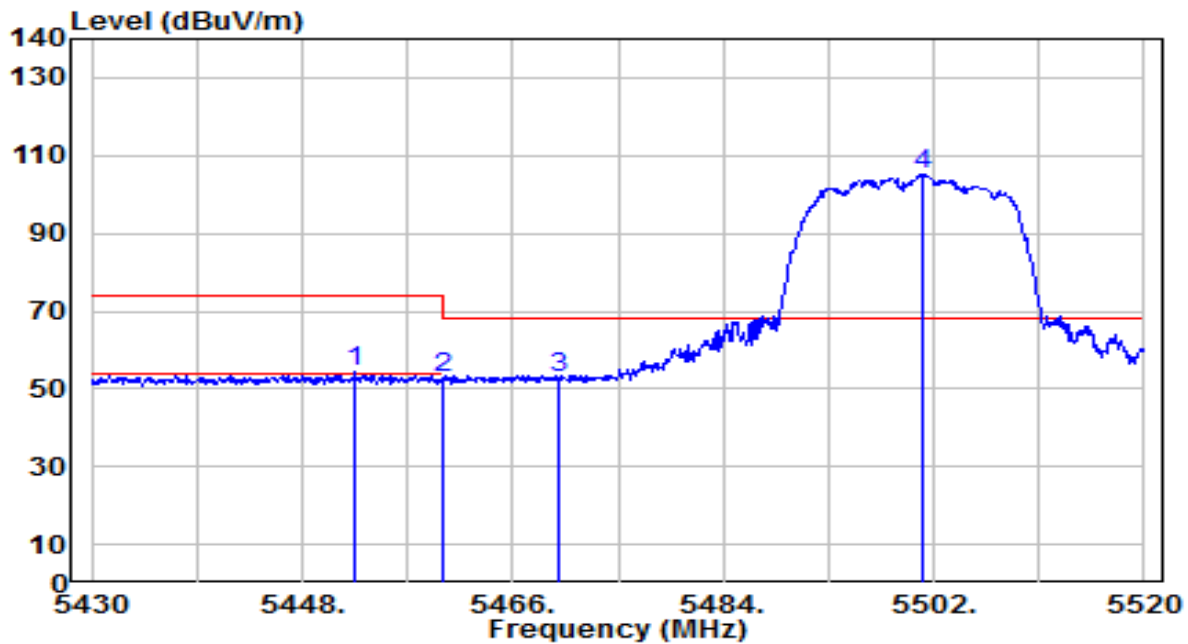


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.590	53.51	0.73	54.24	-19.76	74.00	230	235	Peak
2	5460.000	51.94	0.76	52.70	-21.30	74.00	230	235	Peak
3	* 5470.000	52.20	0.80	53.00	-15.20	68.20	230	235	Peak
4	5501.100	104.25	0.93	105.18	N/A	N/A	230	235	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

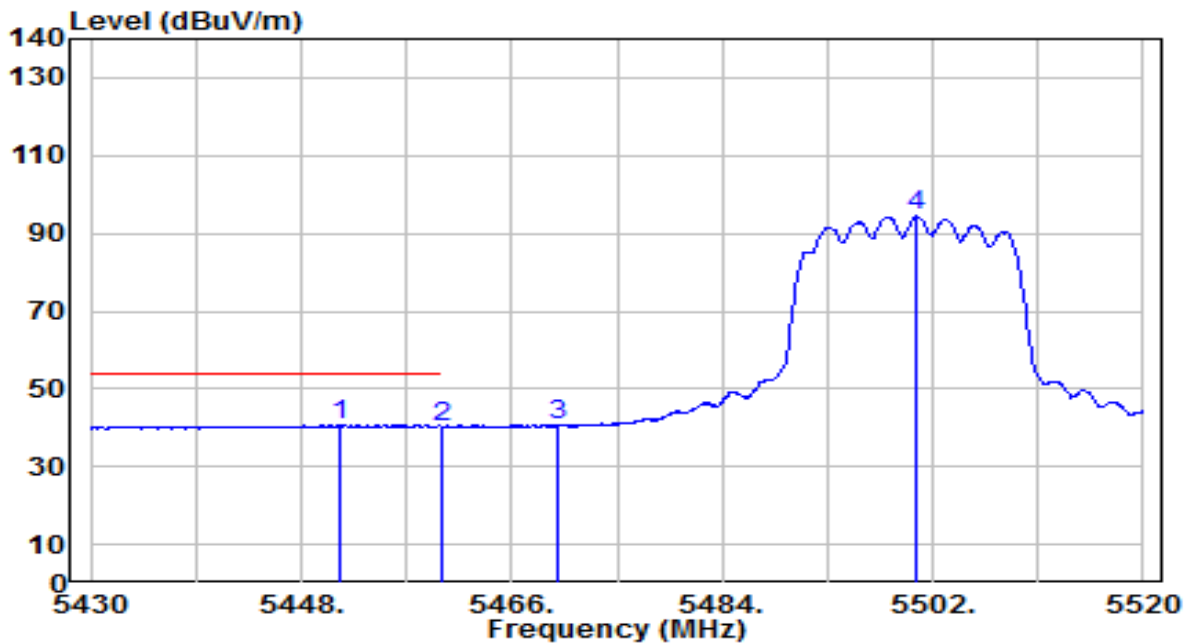


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5451.420	39.98	0.72	40.71	-13.29	54.00	230	235	Average
2	5460.000	39.57	0.76	40.33	-13.67	54.00	230	235	Average
3	5470.000	39.71	0.80	40.52	N/A	N/A	230	235	Average
4	5500.650	93.52	0.93	94.45	N/A	N/A	230	235	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

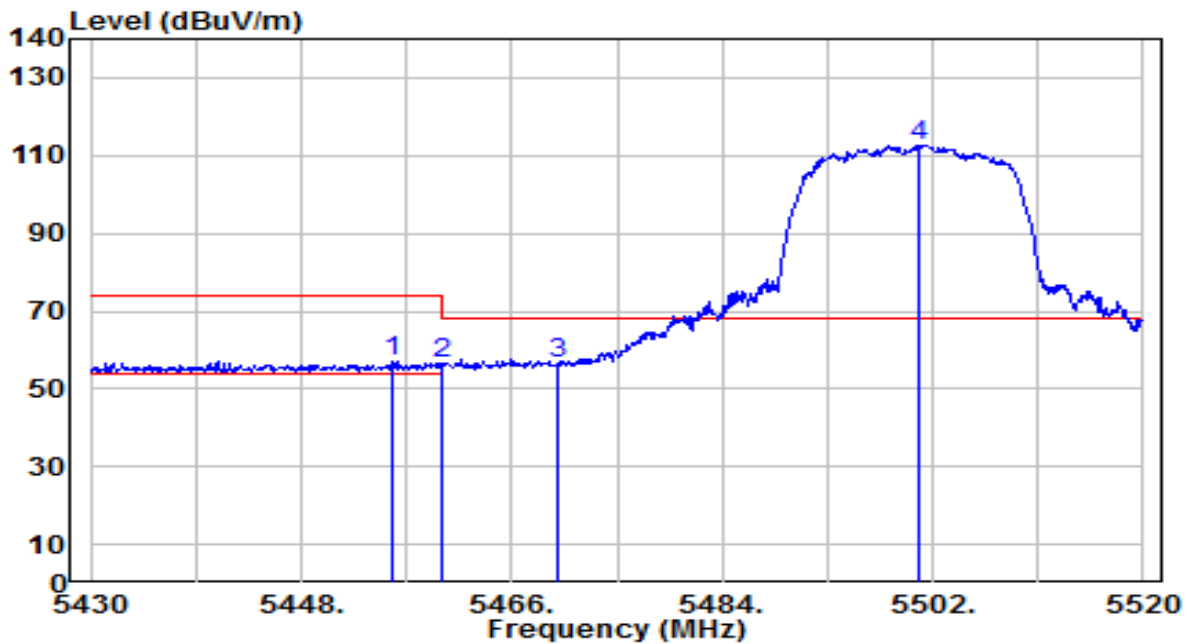


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.830	56.38	0.74	57.12	-16.88	74.00	235	95	Peak
2	5460.000	55.82	0.76	56.58	-17.42	74.00	235	95	Peak
3	* 5470.000	55.74	0.80	56.54	-11.66	68.20	235	95	Peak
4	5500.740	111.78	0.93	112.72	N/A	N/A	235	95	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

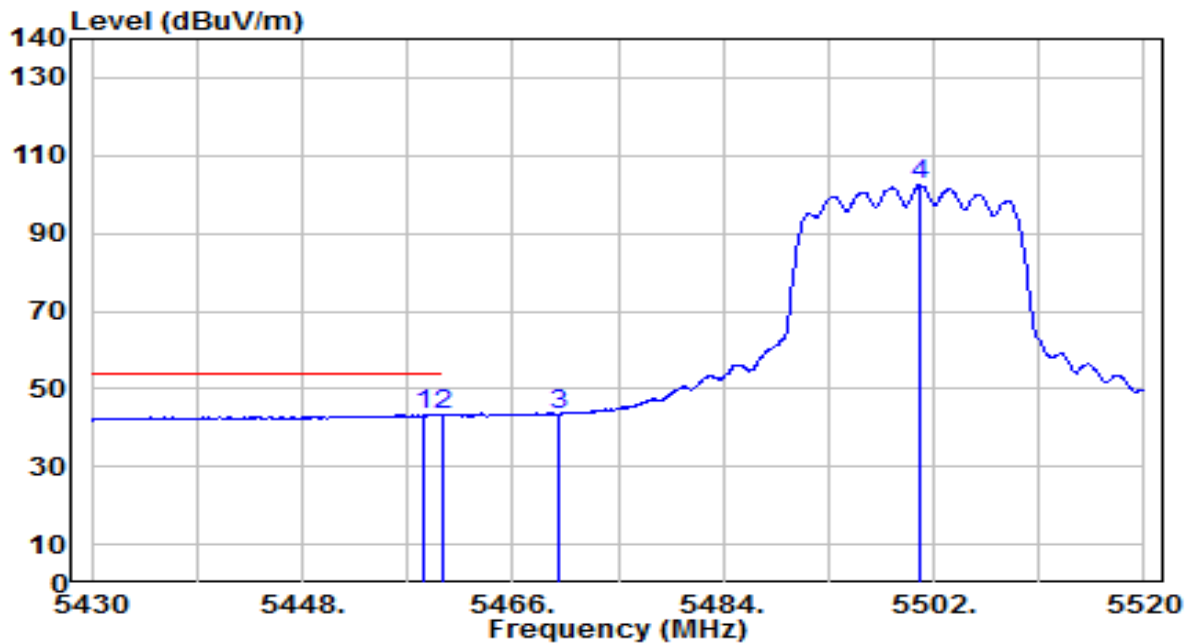


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.440	42.59	0.75	43.35	-10.65	54.00	235	95	Average
2	5460.000	42.47	0.76	43.23	-10.77	54.00	235	95	Average
3	5470.000	42.75	0.80	43.55	N/A	N/A	235	95	Average
4	5500.740	101.61	0.93	102.54	N/A	N/A	235	95	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_Band3_TX_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

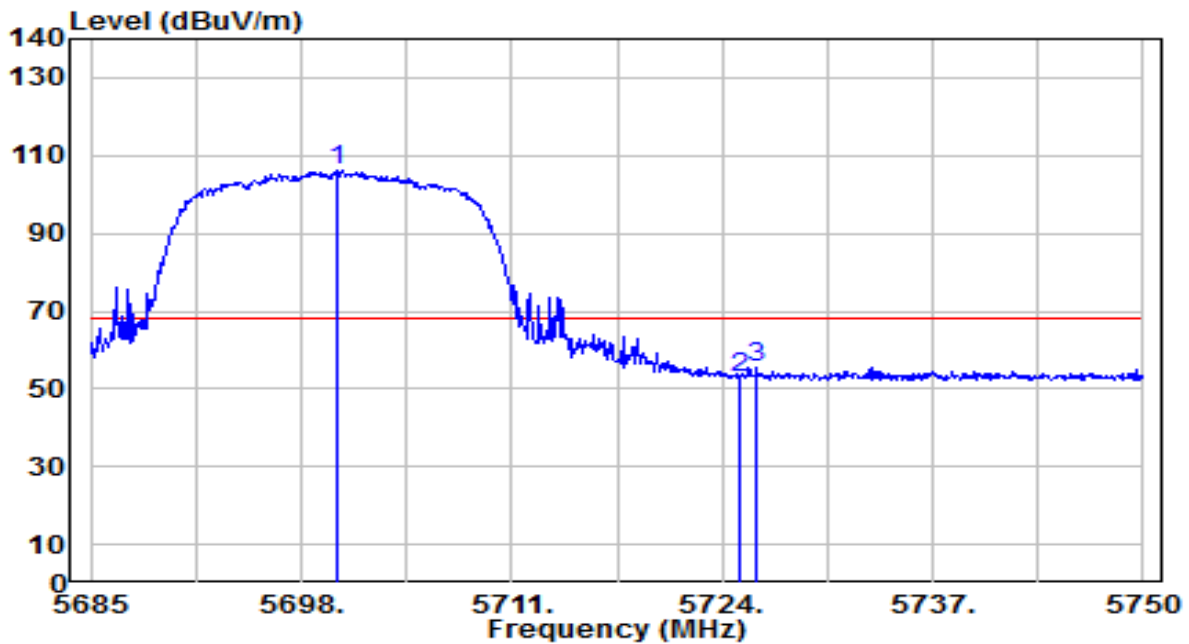


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.210	104.28	1.79	106.07	N/A	N/A	300	110	Peak
2	5725.000	51.17	1.89	53.06	-15.14	68.20	300	110	Peak
3	* 5726.145	53.41	1.89	55.31	-12.89	68.20	300	110	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_Band3_TX_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

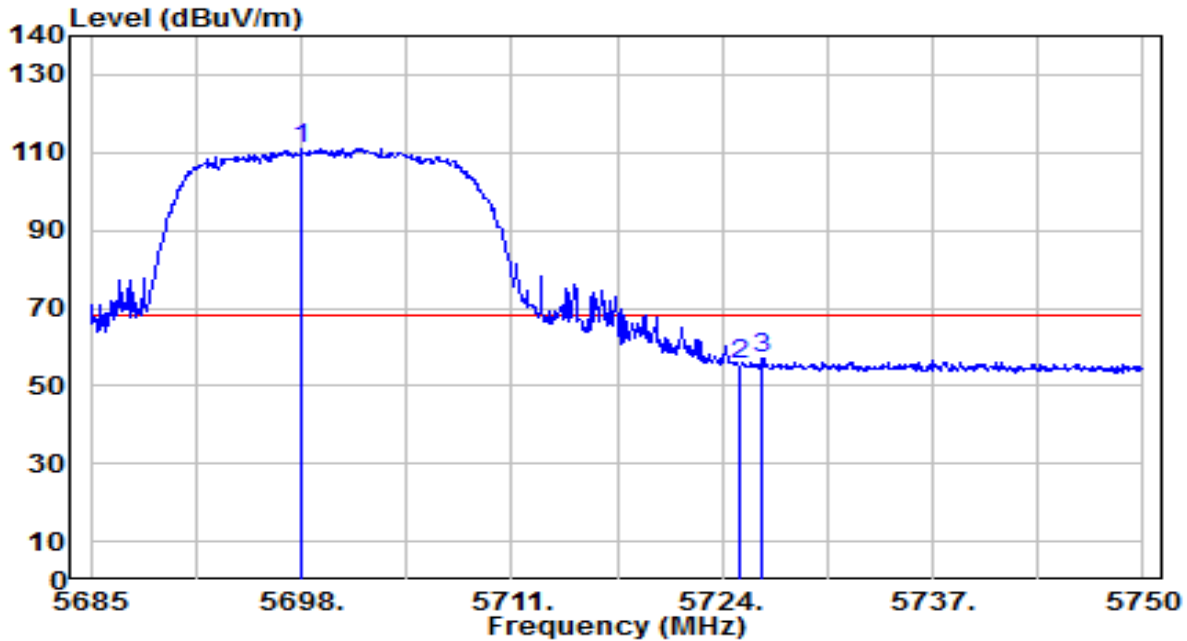


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.000	109.31	1.78	111.09	N/A	N/A	255	120	Peak
2	5725.000	53.41	1.89	55.29	-12.91	68.20	255	120	Peak
3	* 5726.470	55.30	1.89	57.20	-11.00	68.20	255	120	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_Band4_TX_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

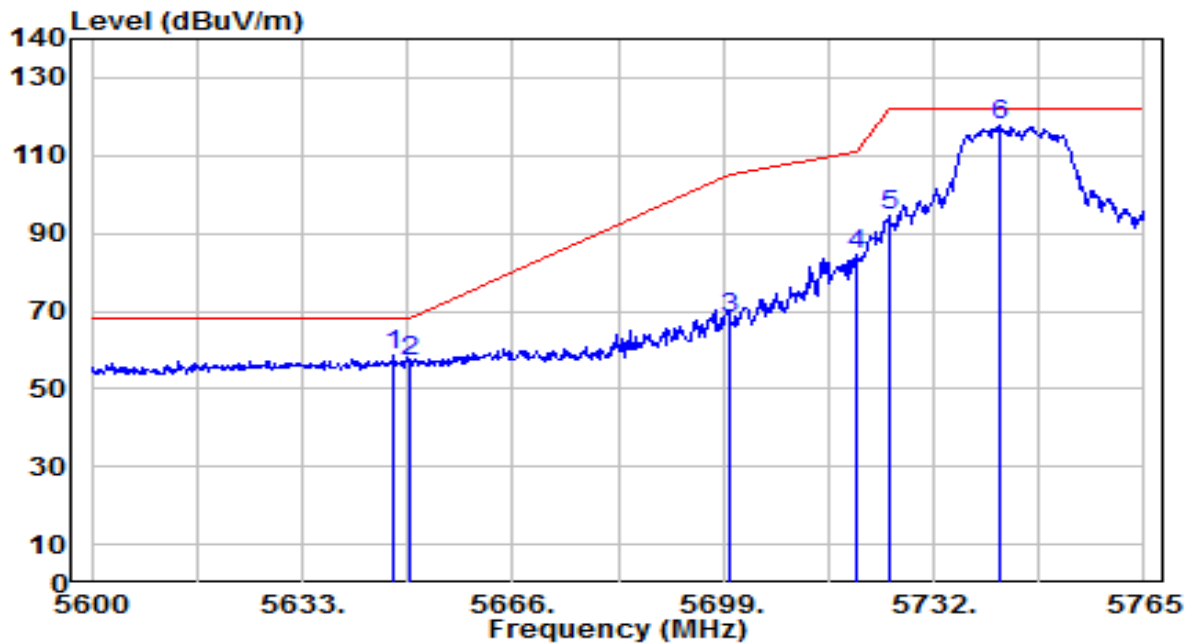


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5647.355	56.97	1.58	58.54	-9.66	68.20	235	115	Peak
2	5650.000	55.71	1.59	57.29	-10.91	68.20	235	115	Peak
3	5700.000	66.19	1.79	67.98	-37.22	105.20	235	115	Peak
4	5720.000	82.65	1.87	84.52	-26.28	110.80	235	115	Peak
5	5725.000	92.78	1.89	94.67	-27.53	122.20	235	115	Peak
6	5742.560	115.81	1.96	117.77	N/A	N/A	235	115	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_Band4_TX_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

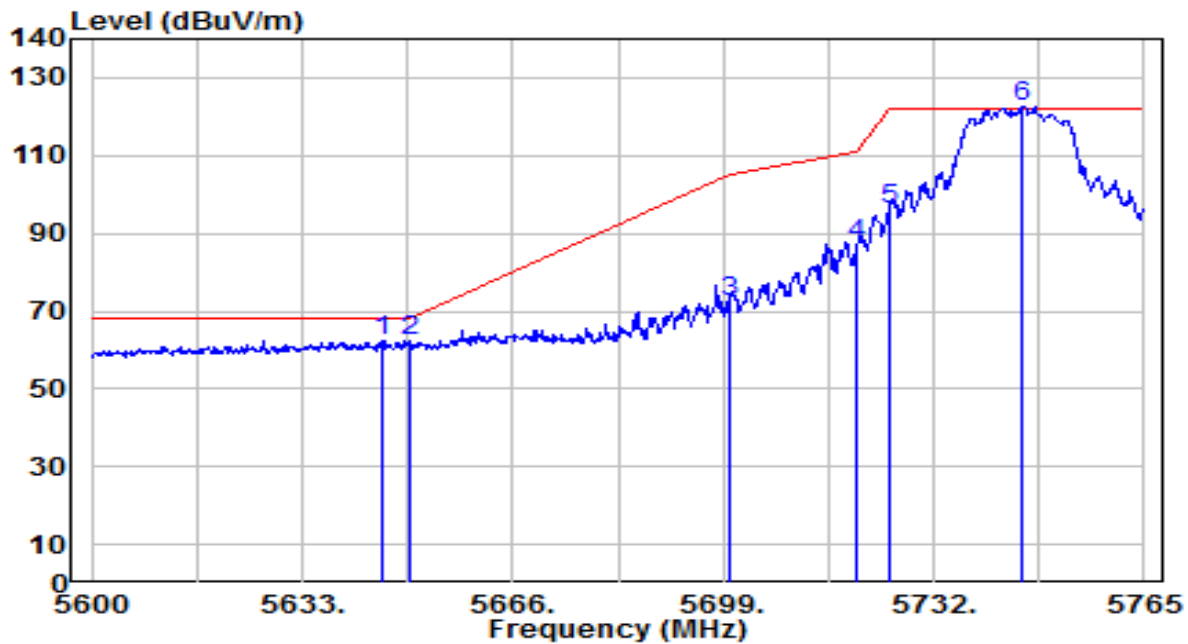


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5645.705	60.60	1.57	62.17	-6.03	68.20	180	275	Peak
2		5650.000	60.52	1.59	62.11	-6.09	68.20	180	275	Peak
3		5700.000	70.65	1.79	72.44	-32.76	105.20	180	275	Peak
4		5720.000	85.12	1.87	86.99	-23.81	110.80	180	275	Peak
5		5725.000	94.16	1.89	96.05	-26.15	122.20	180	275	Peak
6		5746.025	120.79	1.97	122.77	N/A	N/A	180	275	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_Band4_TX_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

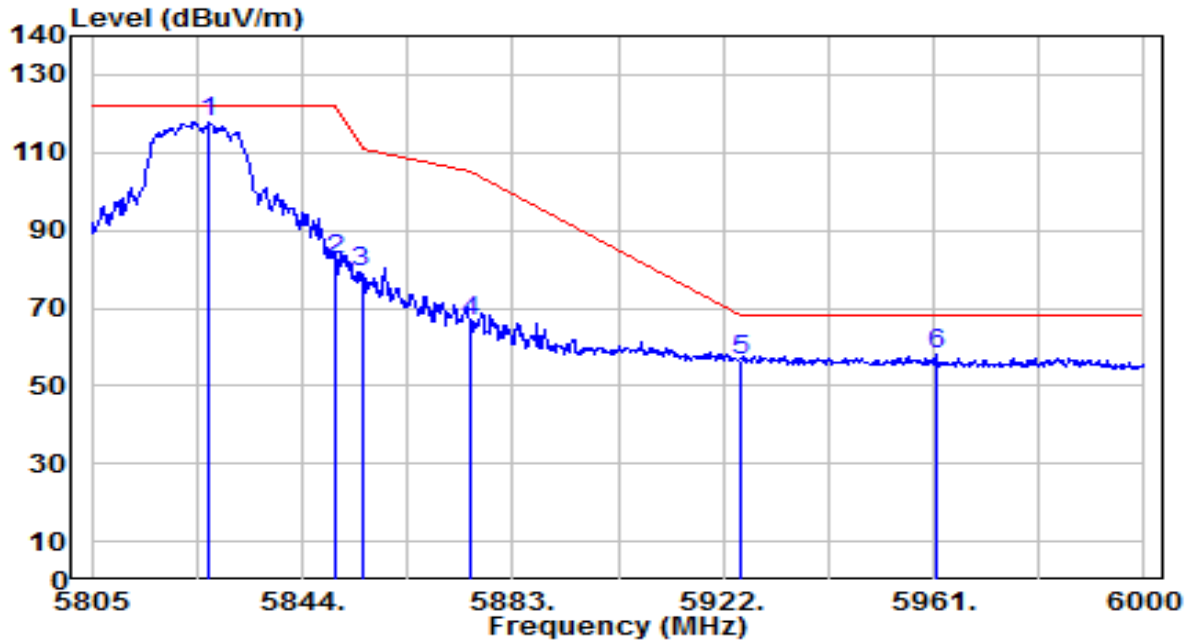


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.840	115.45	2.23	117.68	N/A	N/A	250	115	Peak
2	5850.000	80.05	2.27	82.32	-39.88	122.20	250	115	Peak
3	5855.000	77.11	2.28	79.39	-31.41	110.80	250	115	Peak
4	5875.000	64.04	2.31	66.34	-38.86	105.20	250	115	Peak
5	5925.000	54.25	2.38	56.64	-11.56	68.20	250	115	Peak
6	* 5961.390	55.58	2.44	58.02	-10.18	68.20	250	115	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_Band4_TX_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

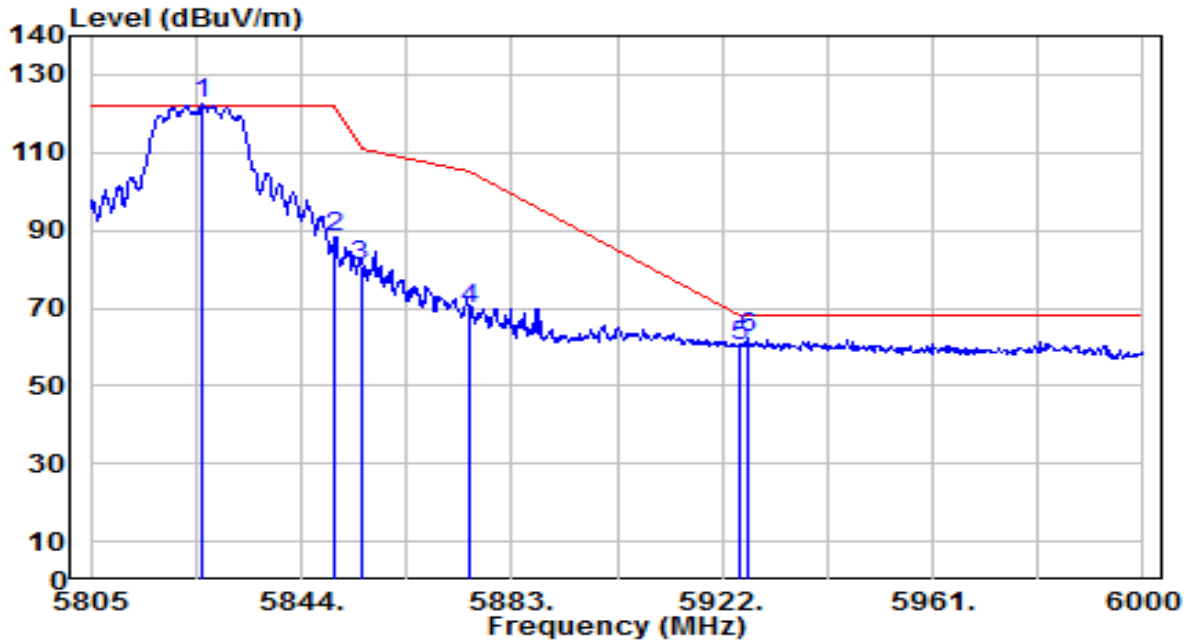


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.865	120.38	2.23	122.61	N/A	N/A	165	275	Peak
2	5850.000	85.86	2.27	88.13	-34.07	122.20	165	275	Peak
3	5855.000	78.31	2.28	80.59	-30.21	110.80	165	275	Peak
4	5875.000	67.53	2.31	69.84	-35.36	105.20	165	275	Peak
5	5925.000	57.62	2.38	60.00	-8.20	68.20	165	275	Peak
6	* 5926.875	60.21	2.39	62.60	-5.60	68.20	165	275	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

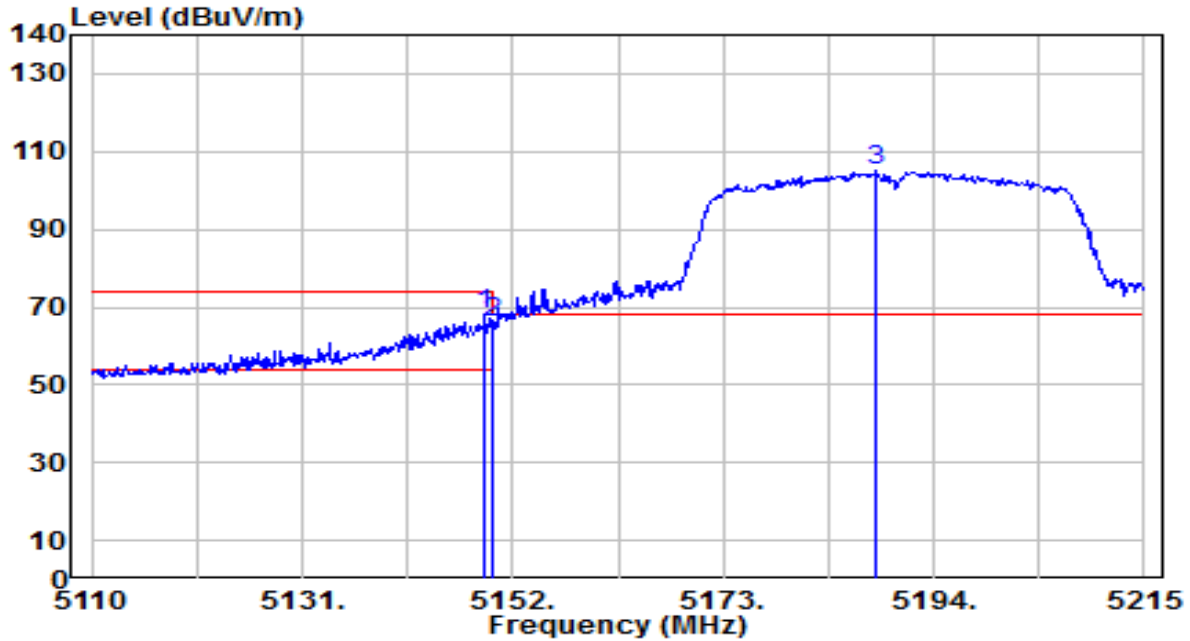


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.270	67.43	0.80	68.23	-5.77	74.00	250	140	Peak
2	5150.000	65.23	0.80	66.02	-7.98	74.00	250	140	Peak
3	5188.225	104.15	0.84	105.00	N/A	N/A	250	140	Peak

Note:

1. " \*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

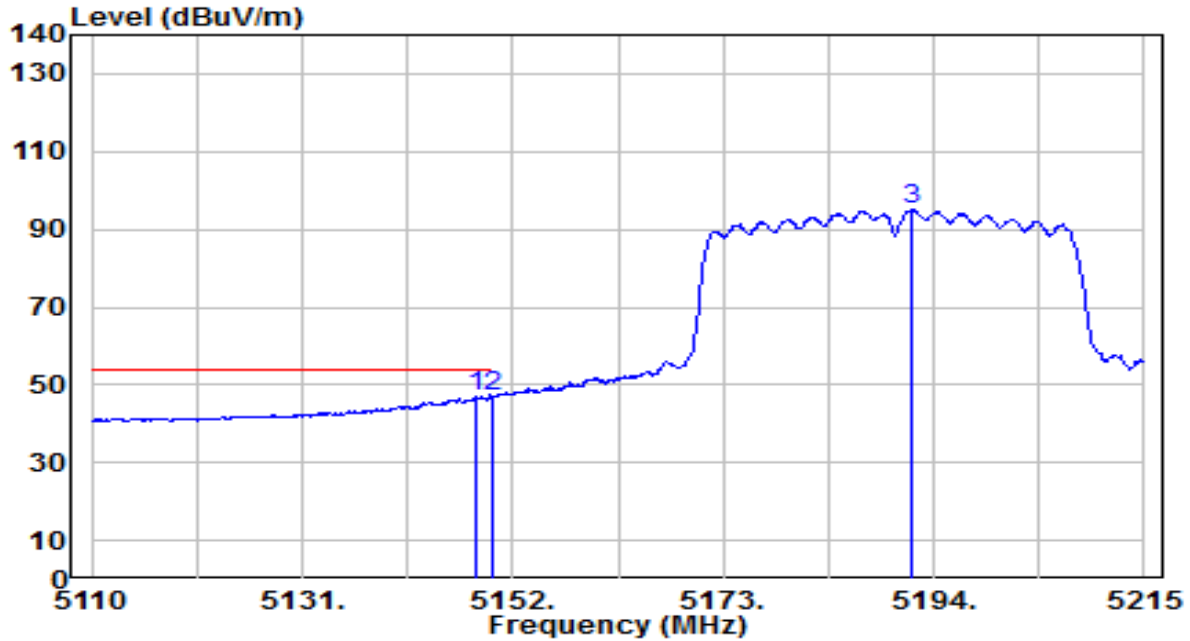


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.220	46.05	0.79	46.84	-7.16	54.00	250	140	Average
2	* 5150.000	46.38	0.80	47.18	-6.82	54.00	250	140	Average
3	5191.900	94.08	0.85	94.93	N/A	N/A	250	140	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

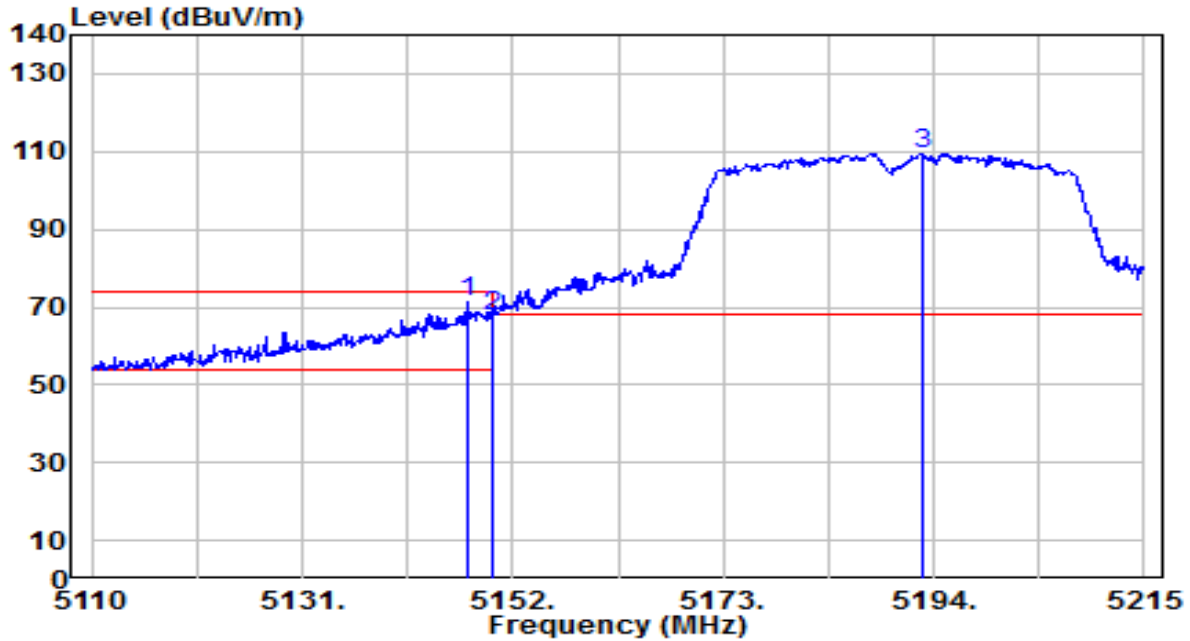


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.590	70.49	0.79	71.29	-2.71	74.00	200	115	Peak
2	5150.000	66.87	0.80	67.67	-6.33	74.00	200	115	Peak
3	5192.845	108.51	0.85	109.36	N/A	N/A	200	115	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

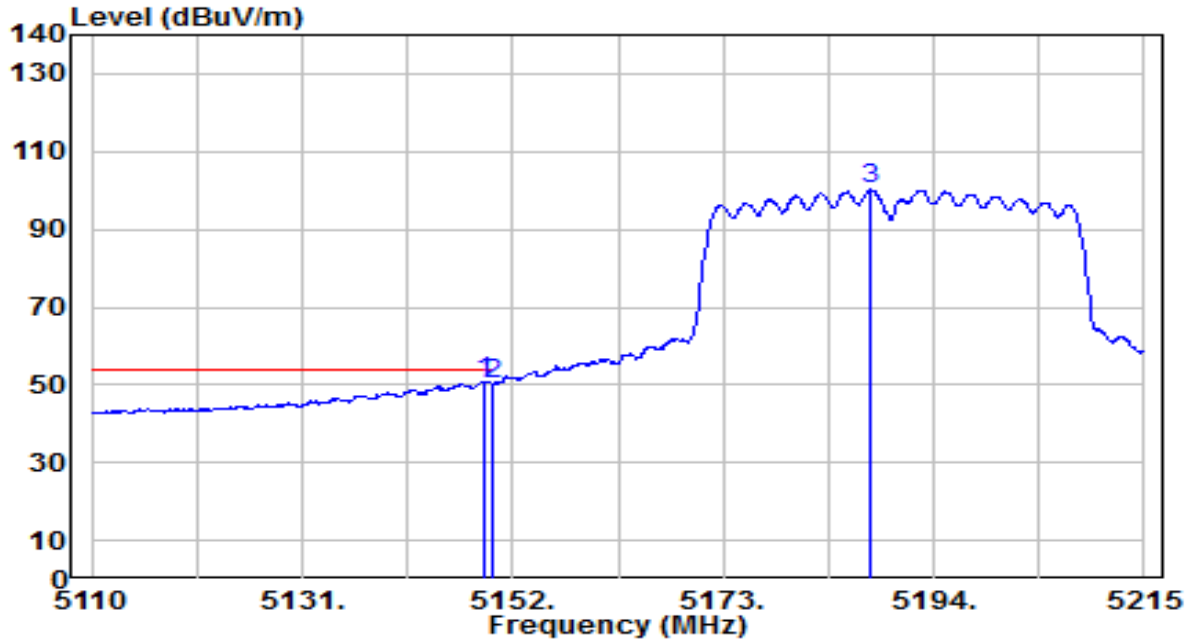


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.060	50.18	0.79	50.98	-3.02	54.00	200	115	Average
2	5150.000	49.55	0.80	50.35	-3.65	54.00	200	115	Average
3	5187.805	99.37	0.84	100.22	N/A	N/A	200	115	Average

Note:

1. " \*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

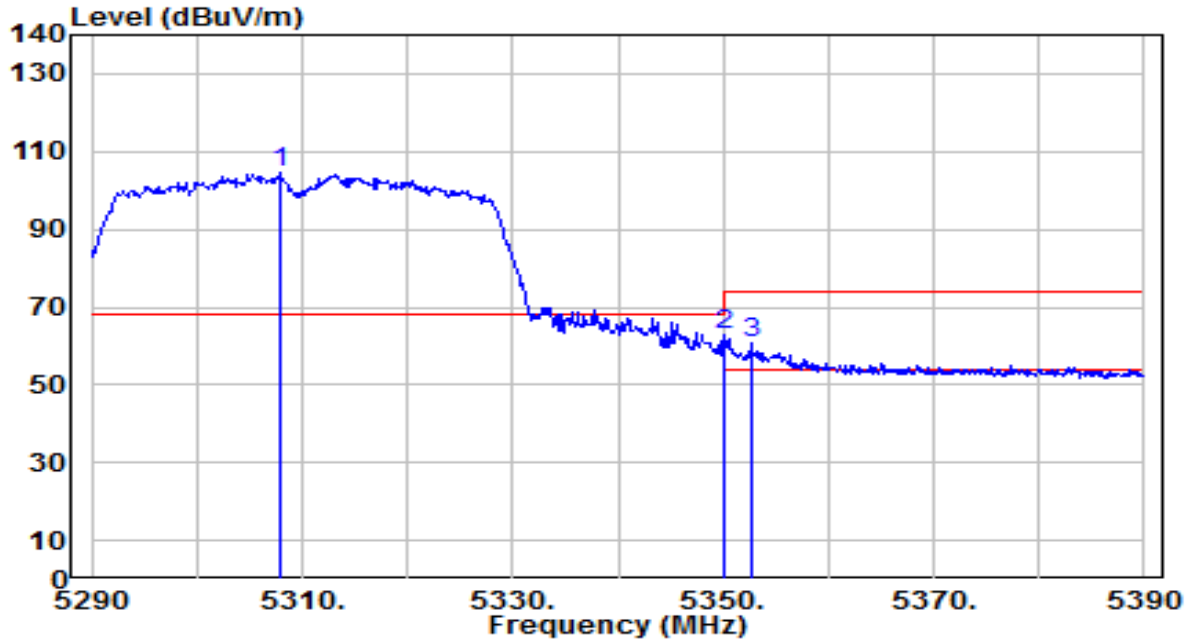


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.900	104.12	0.67	104.78	N/A	N/A	235	225	Peak
2	* 5350.000	62.33	0.59	62.93	-11.07	74.00	235	225	Peak
3	5352.700	60.11	0.59	60.70	-13.30	74.00	235	225	Peak

Note:

1. " \*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

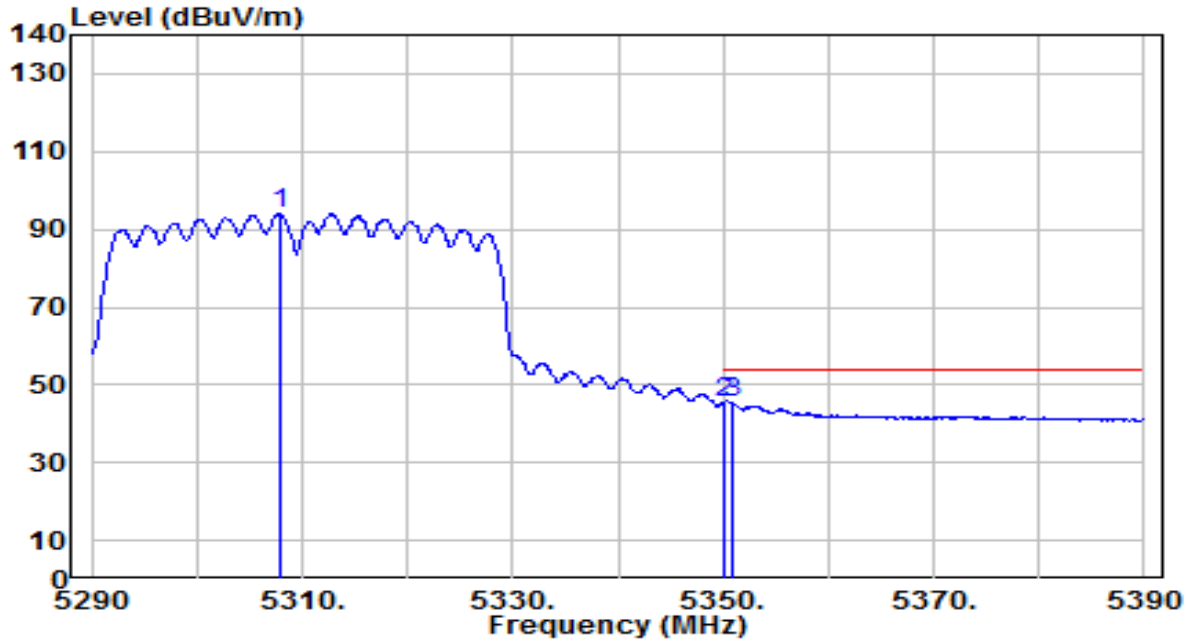


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.900	93.41	0.67	94.07	N/A	N/A	235	225	Average
2	5350.000	44.80	0.59	45.40	-8.60	54.00	235	225	Average
3	* 5351.000	44.82	0.59	45.42	-8.58	54.00	235	225	Average

Note:

1. " \*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

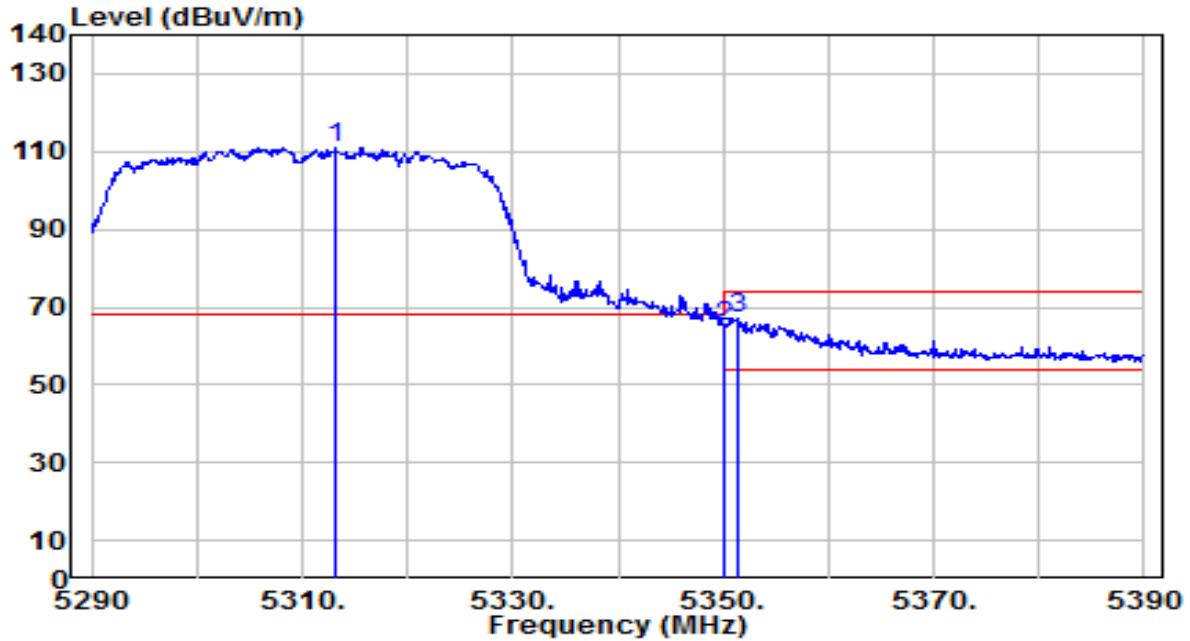


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.200	110.50	0.66	111.16	N/A	N/A	225	95	Peak
2	5350.000	64.45	0.59	65.04	-8.96	74.00	225	95	Peak
3	* 5351.400	66.49	0.59	67.08	-6.92	74.00	225	95	Peak

Note:

1. " \*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

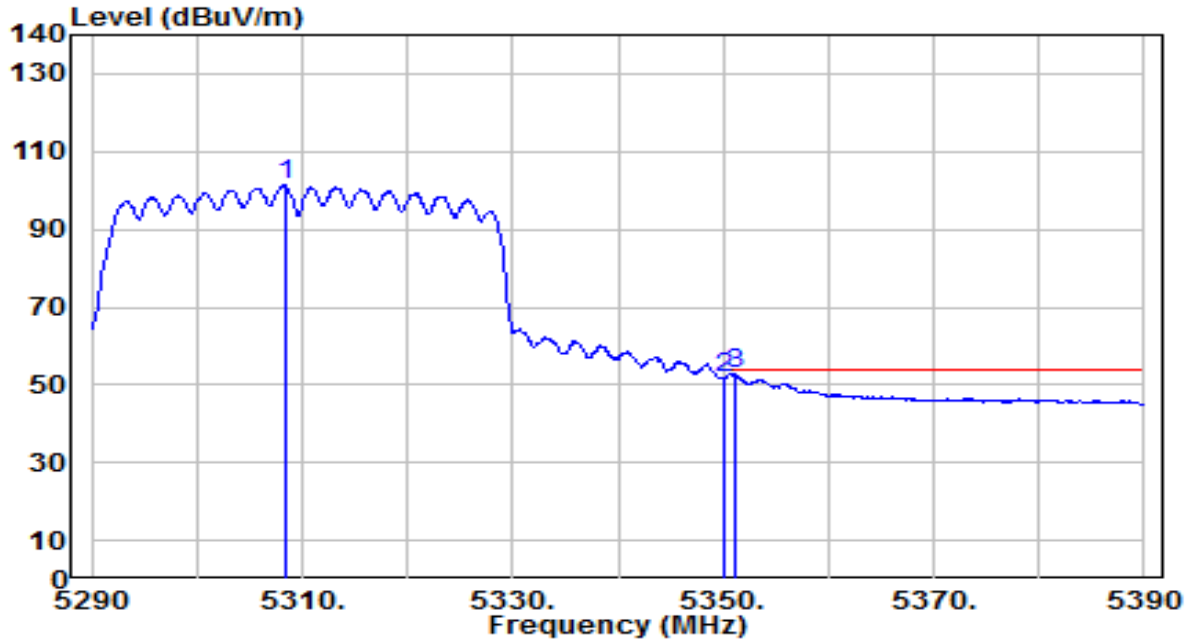


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.400	100.58	0.67	101.25	N/A	N/A	225	95	Average
2	5350.000	51.29	0.59	51.89	-2.11	54.00	225	95	Average
3	* 5351.100	52.33	0.59	52.92	-1.08	54.00	225	95	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

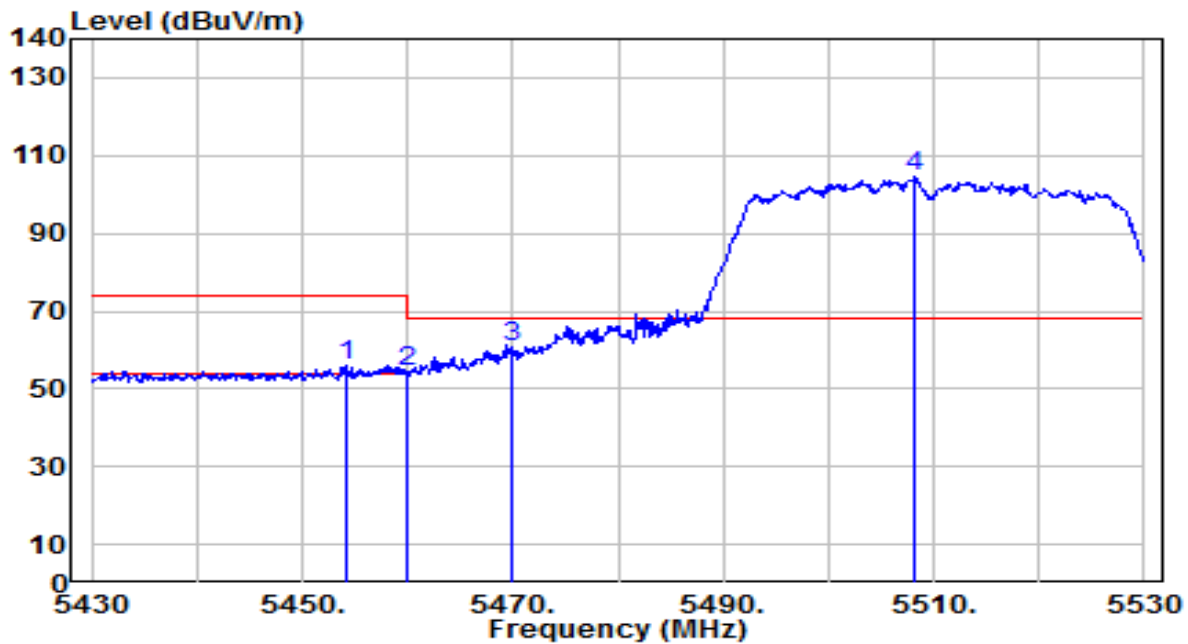


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.300	55.30	0.74	56.04	-17.96	74.00	250	205	Peak
2	5460.000	53.87	0.76	54.63	-19.37	74.00	250	205	Peak
3	* 5470.000	60.20	0.80	61.00	-7.20	68.20	250	205	Peak
4	5508.200	103.45	0.97	104.42	N/A	N/A	250	205	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

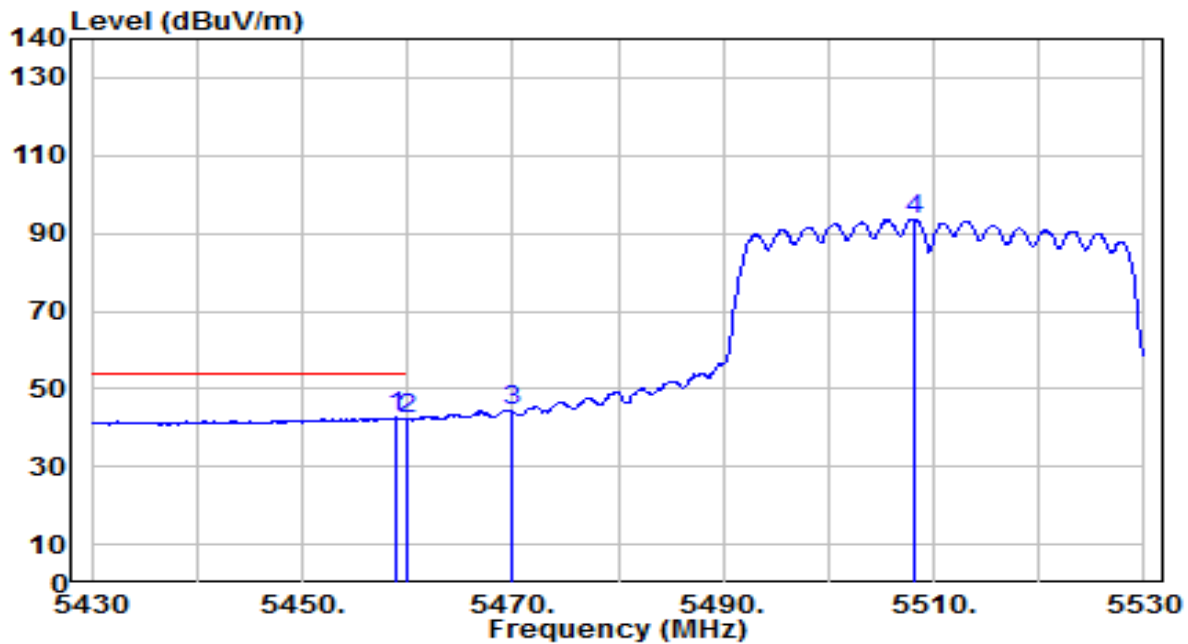


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5458.900	41.78	0.76	42.54	-11.46	54.00	250	205	Average
2		5460.000	41.46	0.76	42.22	-11.78	54.00	250	205	Average
3		5470.000	43.40	0.80	44.20	N/A	N/A	250	205	Average
4		5508.100	92.73	0.97	93.70	N/A	N/A	250	205	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

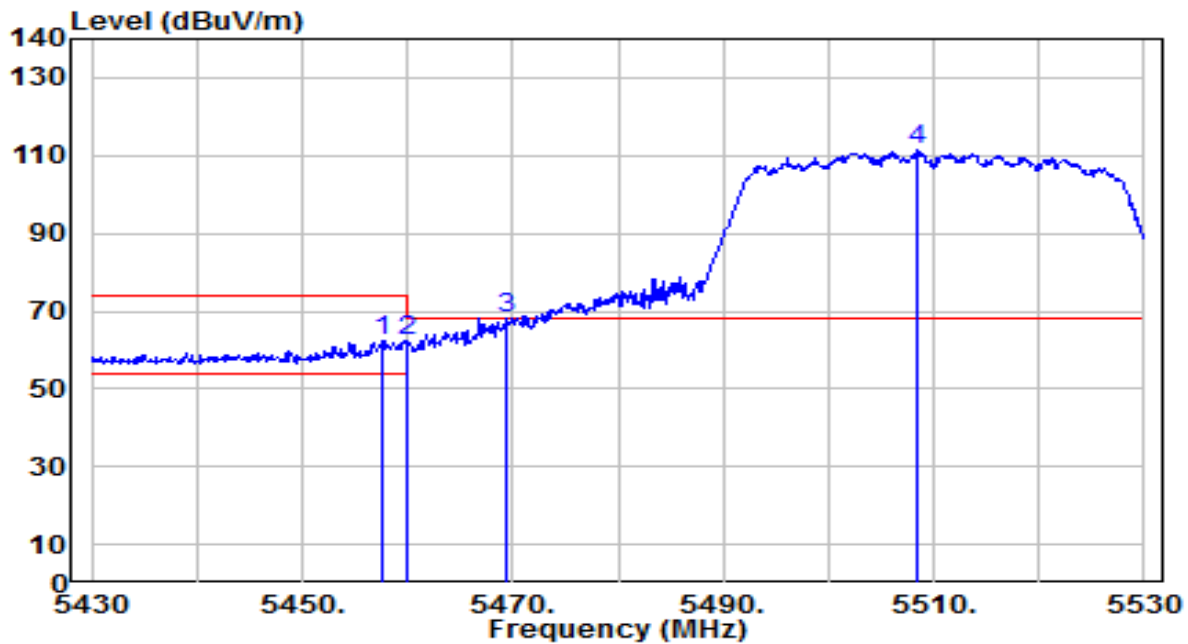


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.700	61.74	0.75	62.50	-11.51	74.00	150	90	Peak
2	5460.000	61.50	0.76	62.26	-11.74	74.00	150	90	Peak
3	* 5469.500	67.32	0.80	68.12	-0.08	68.20	150	90	Peak
4	5508.500	110.35	0.97	111.32	N/A	N/A	150	90	Peak

Note:

- "\*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

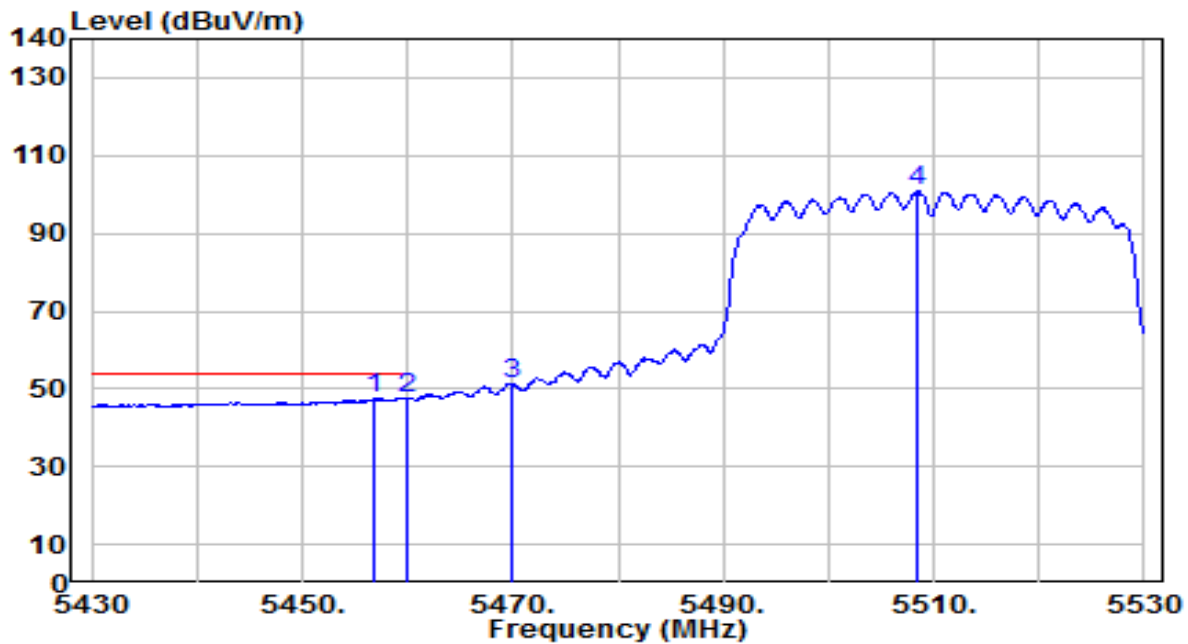


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.900	46.81	0.75	47.56	-6.44	54.00	150	90	Average
2	* 5460.000	46.94	0.76	47.70	-6.30	54.00	150	90	Average
3	5470.000	50.47	0.80	51.27	N/A	N/A	150	90	Average
4	5508.500	99.79	0.97	100.76	N/A	N/A	150	90	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band3_TX_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

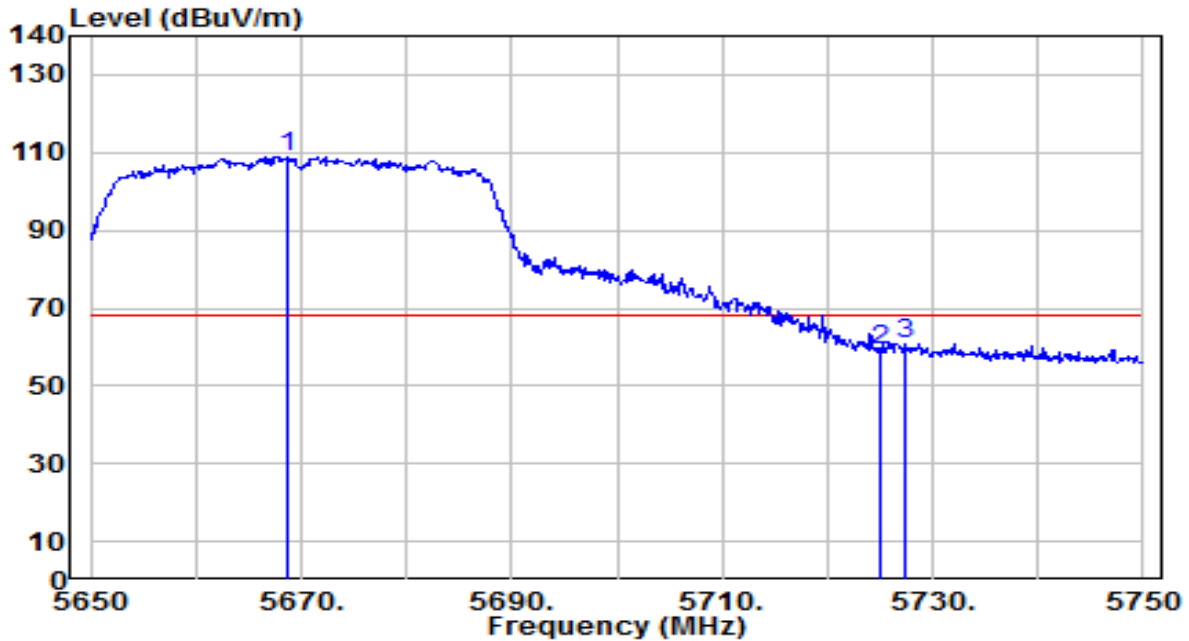


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.800	107.36	1.66	109.02	N/A	N/A	230	110	Peak
2	5725.000	57.31	1.89	59.20	-9.00	68.20	230	110	Peak
3	* 5727.300	59.11	1.90	61.00	-7.20	68.20	230	110	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band3_TX_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

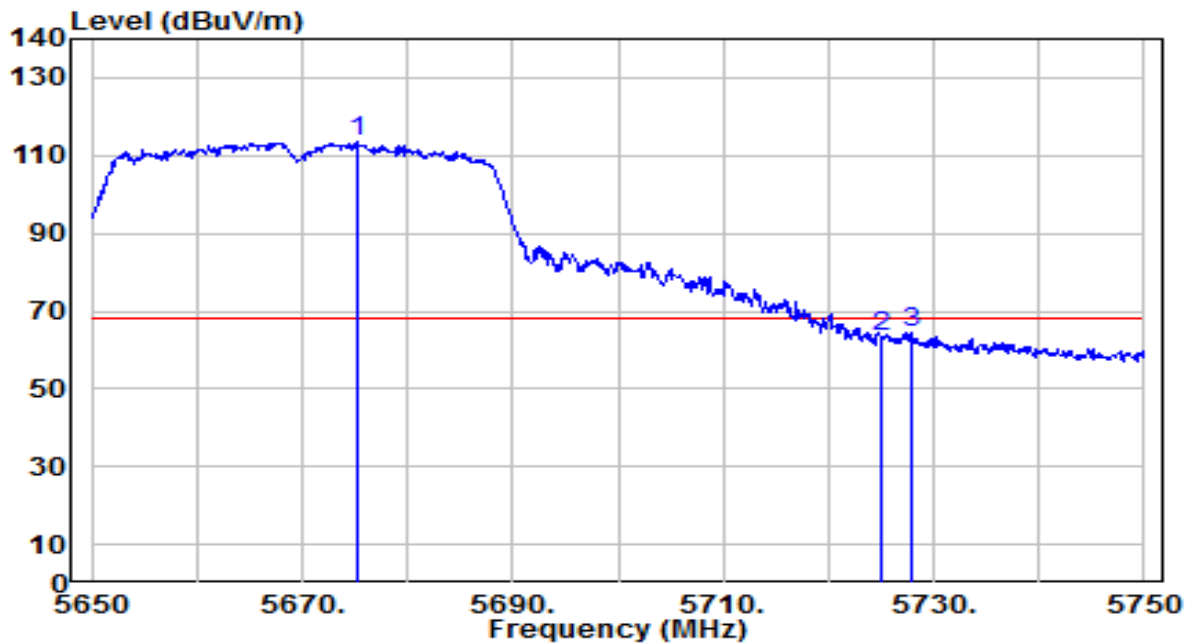


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5675.200	111.64	1.69	113.33	N/A	N/A	245	100	Peak
2	5725.000	61.57	1.89	63.46	-4.74	68.20	245	100	Peak
3	* 5727.900	62.76	1.90	64.66	-3.54	68.20	245	100	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band4_TX_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

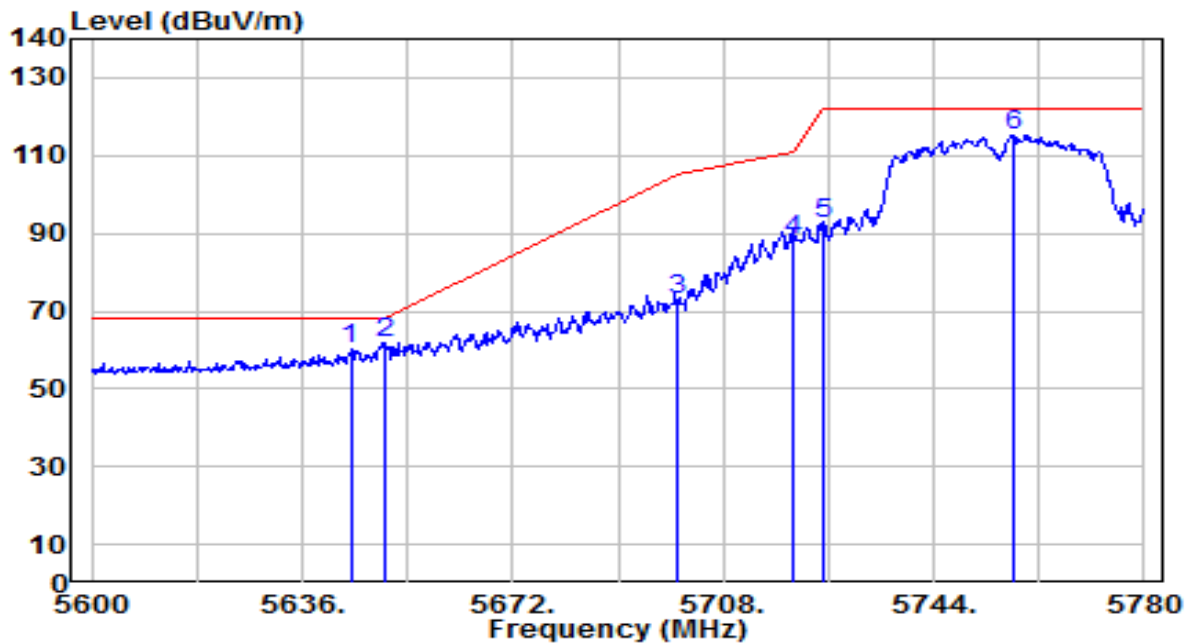


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5644.280	58.83	1.56	60.40	-7.80	68.20	245	115	Peak
2	* 5650.000	60.20	1.59	61.79	-6.41	68.20	245	115	Peak
3	5700.000	70.89	1.79	72.68	-32.52	105.20	245	115	Peak
4	5720.000	86.55	1.87	88.42	-22.38	110.80	245	115	Peak
5	5725.000	90.36	1.89	92.25	-29.95	122.20	245	115	Peak
6	5757.500	113.14	2.02	115.16	N/A	N/A	245	115	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band4_TX_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

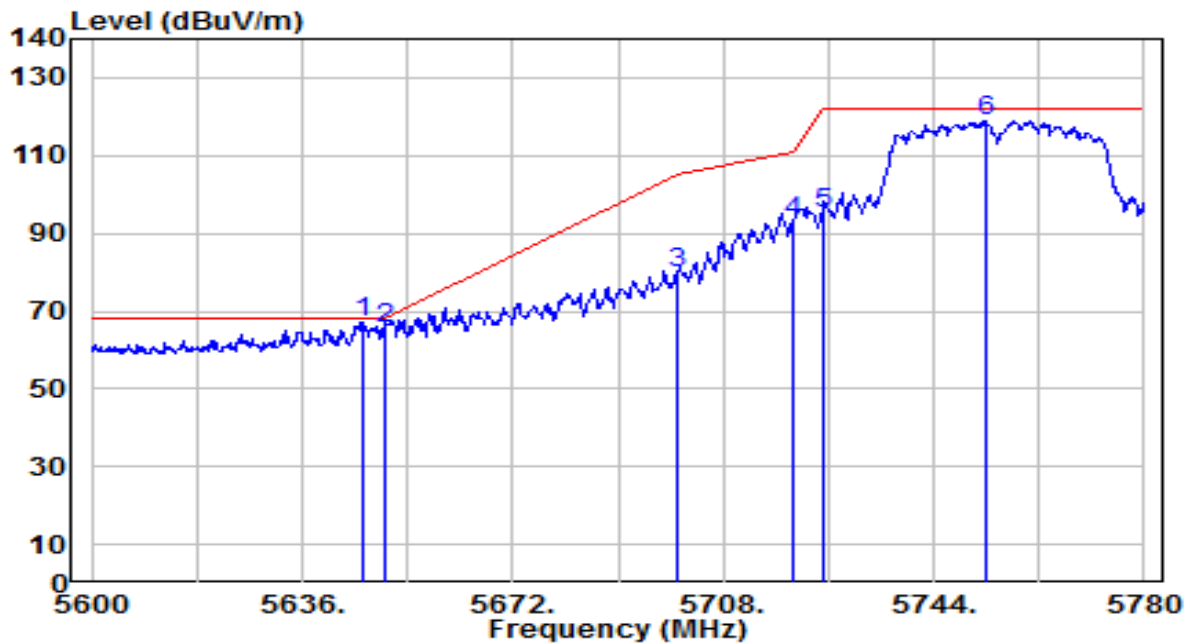


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5646.260	65.73	1.57	67.30	-0.90	68.20	165	275	Peak
2	5650.000	64.10	1.59	65.69	-2.51	68.20	165	275	Peak
3	5700.000	78.19	1.79	79.98	-25.22	105.20	165	275	Peak
4	5720.000	91.34	1.87	93.21	-17.59	110.80	165	275	Peak
5	5725.000	93.33	1.89	95.22	-26.98	122.20	165	275	Peak
6	5752.820	117.08	2.00	119.08	N/A	N/A	165	275	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band4_TX_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

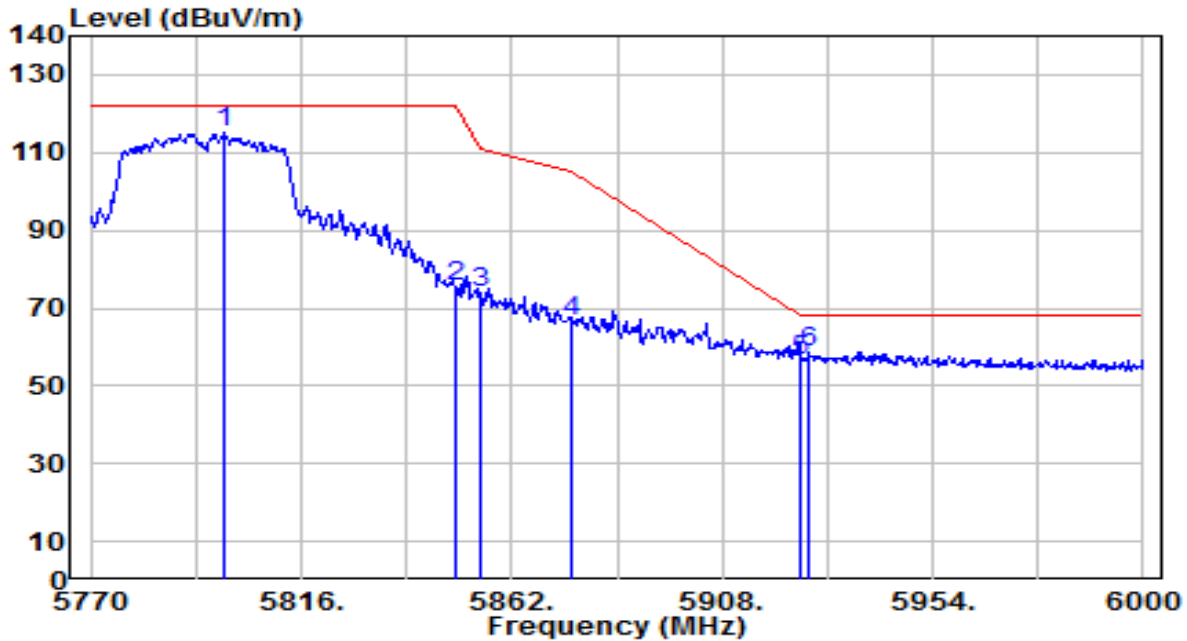


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5798.980	112.83	2.19	115.02	N/A	N/A	245	115	Peak
2	5850.000	73.04	2.27	75.31	-46.89	122.20	245	115	Peak
3	5855.000	71.48	2.28	73.76	-37.04	110.80	245	115	Peak
4	5875.000	64.08	2.31	66.39	-38.81	105.20	245	115	Peak
5	5925.000	54.24	2.38	56.62	-11.58	68.20	245	115	Peak
6	* 5927.090	56.41	2.39	58.80	-9.40	68.20	245	115	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_Band4_TX_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

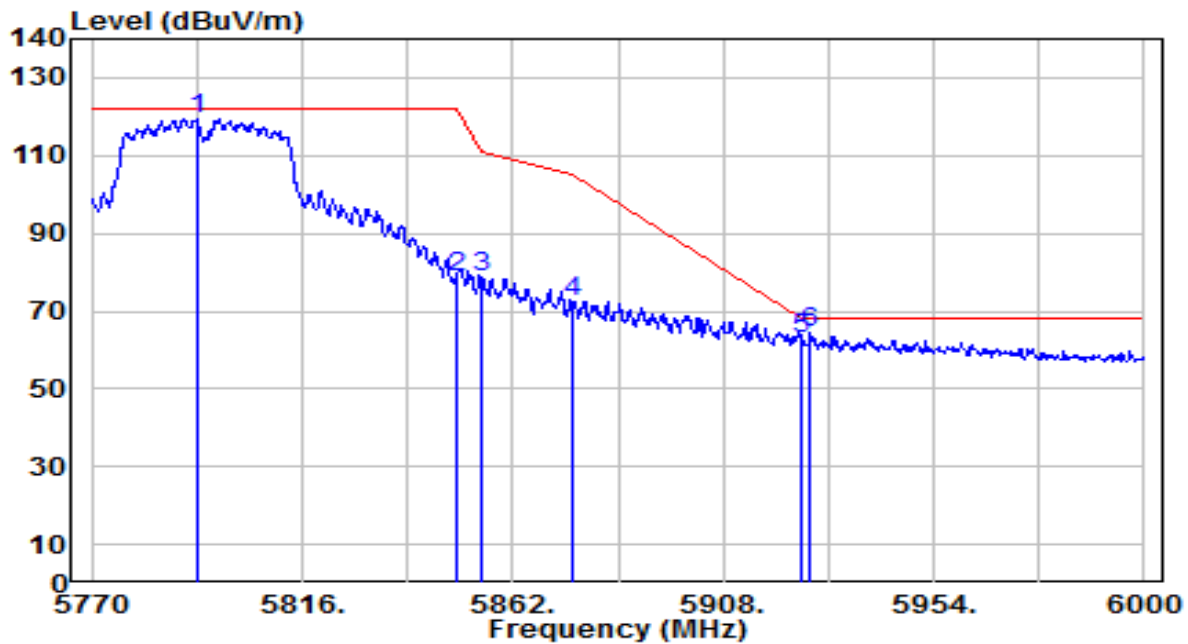


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.000	117.46	2.16	119.62	N/A	N/A	160	275	Peak
2	5850.000	76.59	2.27	78.86	-43.34	122.20	160	275	Peak
3	5855.000	76.21	2.28	78.49	-32.31	110.80	160	275	Peak
4	5875.000	69.97	2.31	72.28	-32.92	105.20	160	275	Peak
5	5925.000	60.58	2.38	62.96	-5.24	68.20	160	275	Peak
6	* 5927.090	62.15	2.39	64.54	-3.66	68.20	160	275	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band1_TX_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

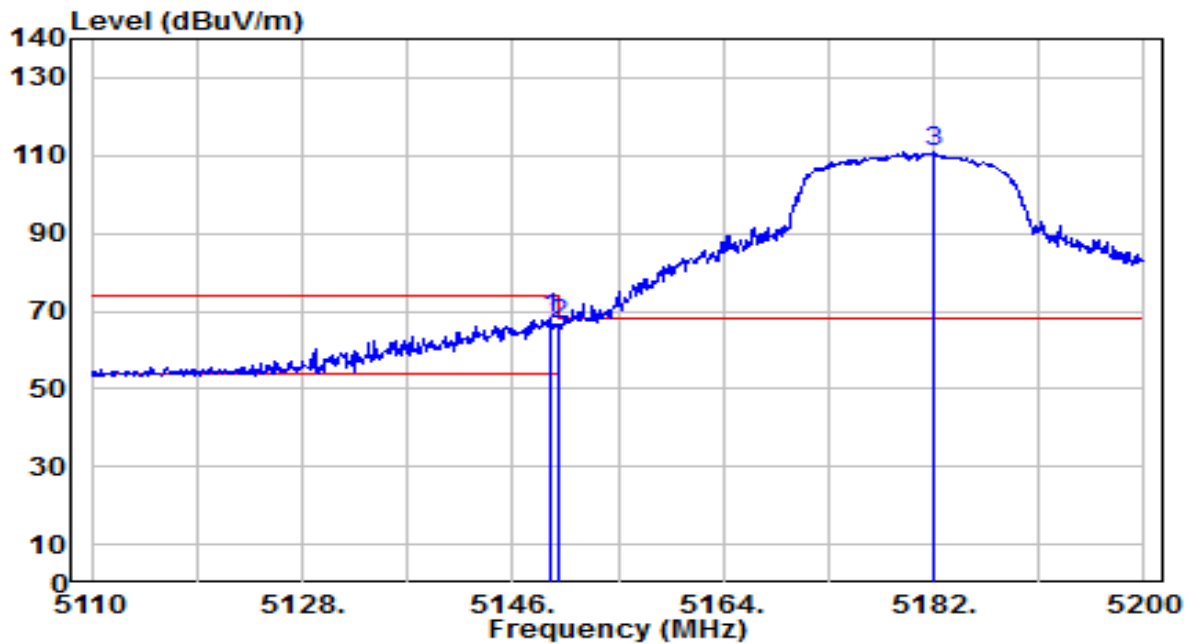


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.330	67.34	0.80	68.13	-5.87	74.00	240	125	Peak
2	5150.000	65.98	0.80	66.77	-7.23	74.00	240	125	Peak
3	5182.000	110.13	0.84	110.96	N/A	N/A	240	125	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band1_TX_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

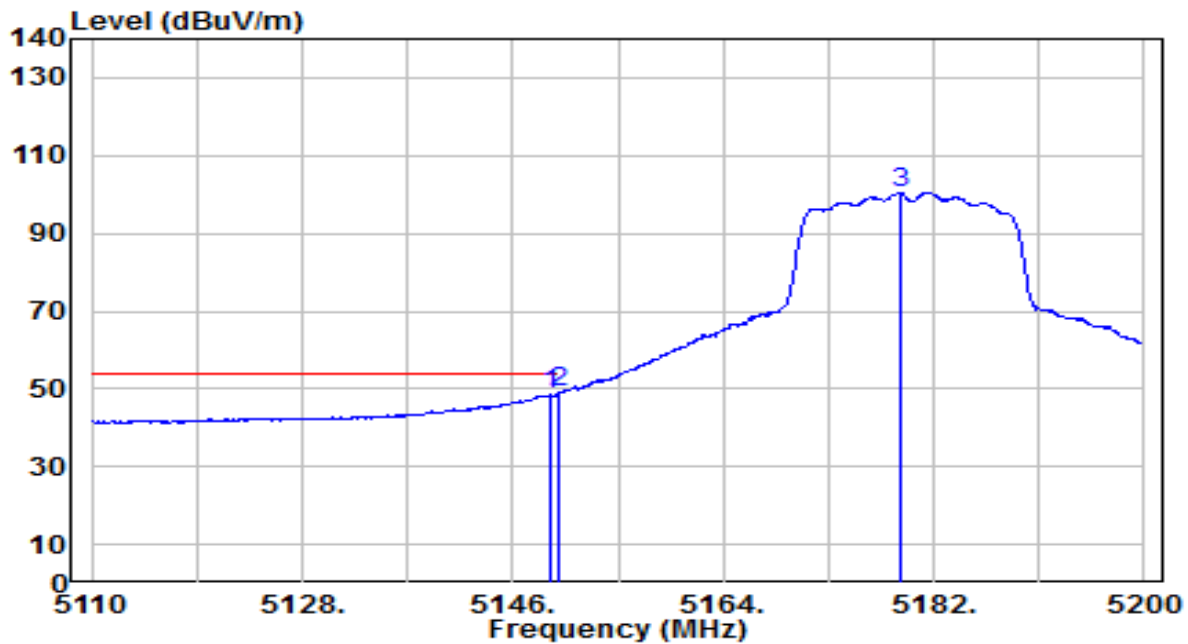


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.240	47.64	0.80	48.44	-5.56	54.00	240	125	Average
2	* 5150.000	48.15	0.80	48.94	-5.06	54.00	240	125	Average
3	5179.120	99.80	0.83	100.63	N/A	N/A	240	125	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band1_TX_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

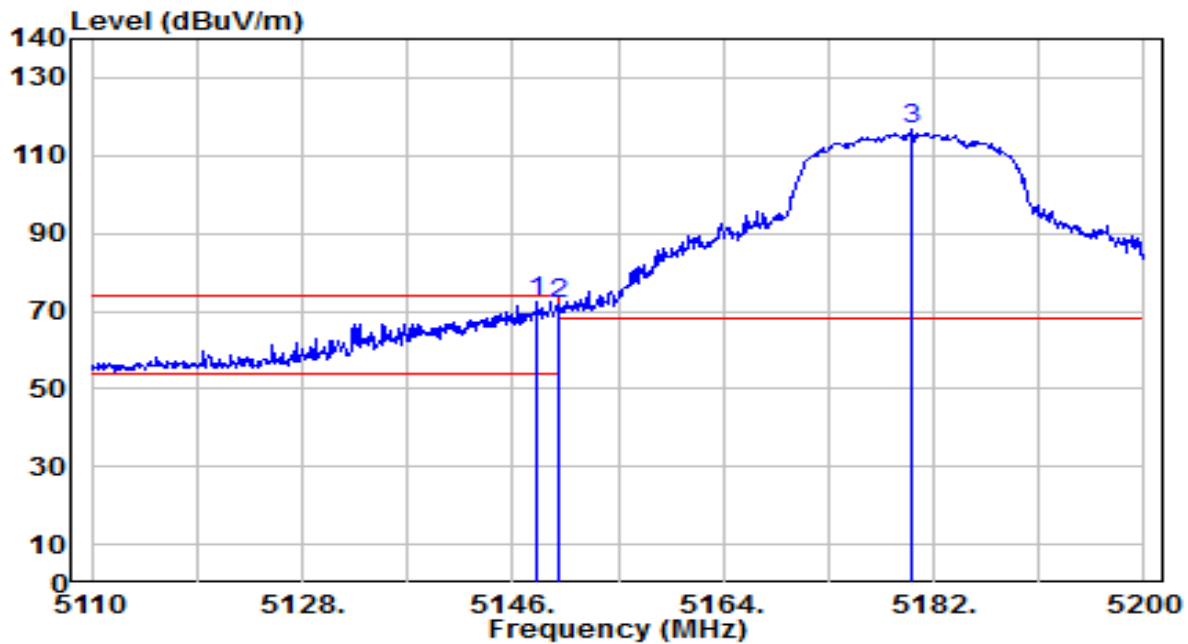


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.160	71.77	0.79	72.56	-1.44	74.00	200	120	Peak
2	5150.000	71.15	0.80	71.95	-2.05	74.00	200	120	Peak
3	5180.020	116.10	0.83	116.93	N/A	N/A	200	120	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band1_TX_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

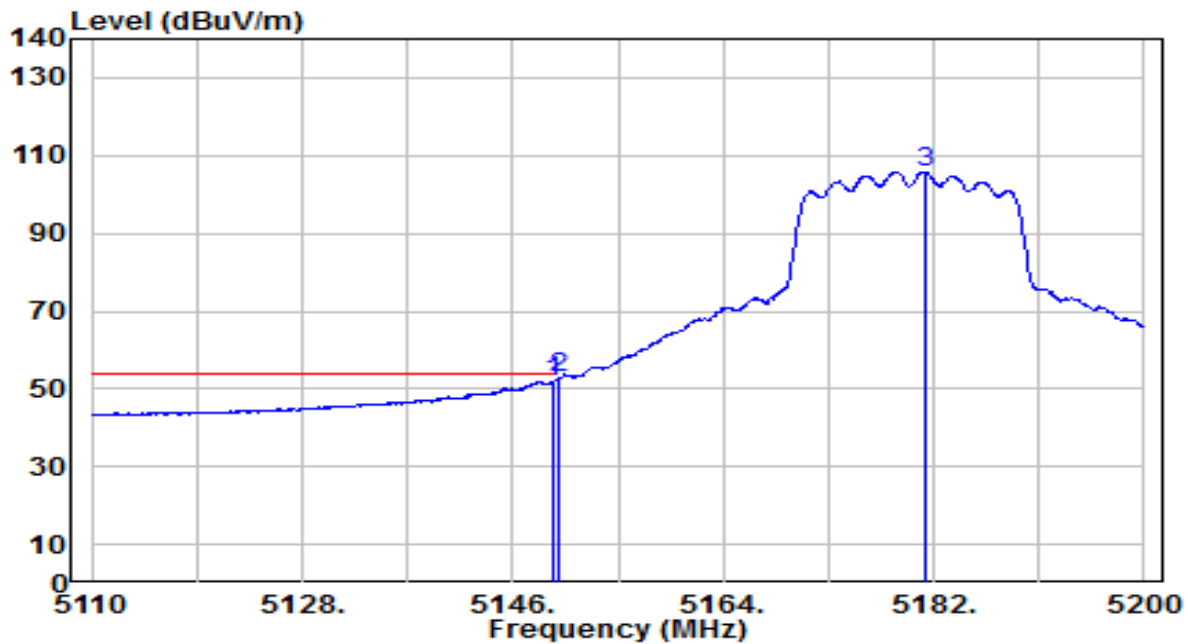


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.420	51.12	0.80	51.92	-2.08	54.00	200	120	Average
2	* 5150.000	52.23	0.80	53.03	-0.97	54.00	200	120	Average
3	5181.370	105.09	0.83	105.92	N/A	N/A	200	120	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band2_TX_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

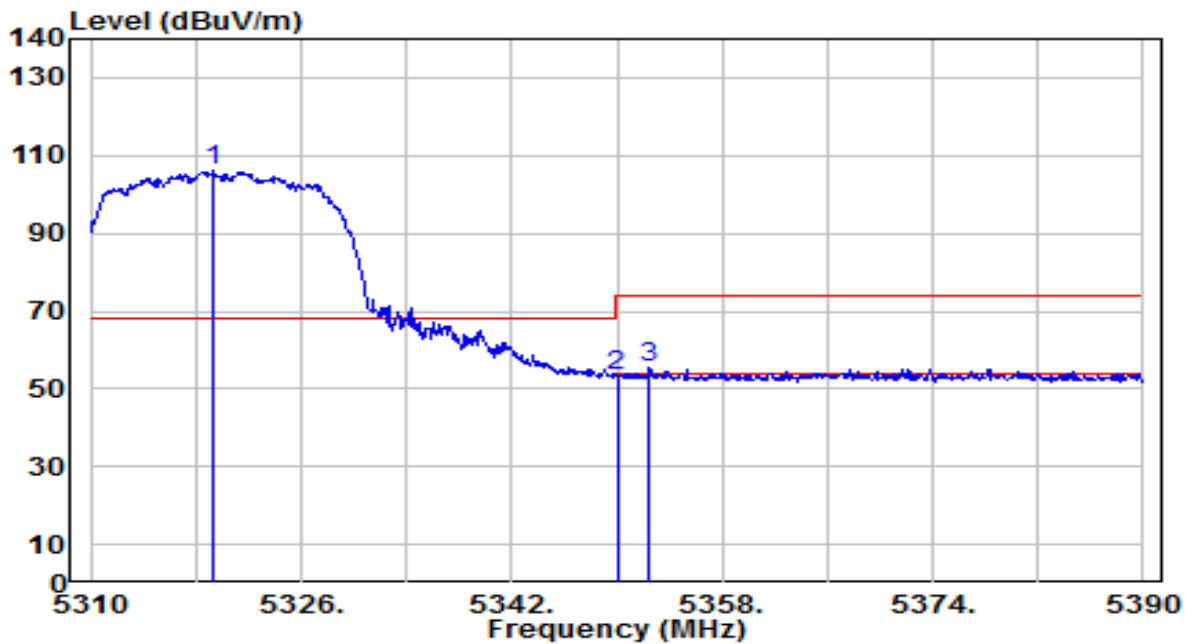


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.280	105.37	0.65	106.01	N/A	N/A	235	225	Peak
2	5350.000	52.84	0.59	53.44	-20.56	74.00	235	225	Peak
3	* 5352.480	54.68	0.59	55.27	-18.73	74.00	235	225	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band2_TX_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

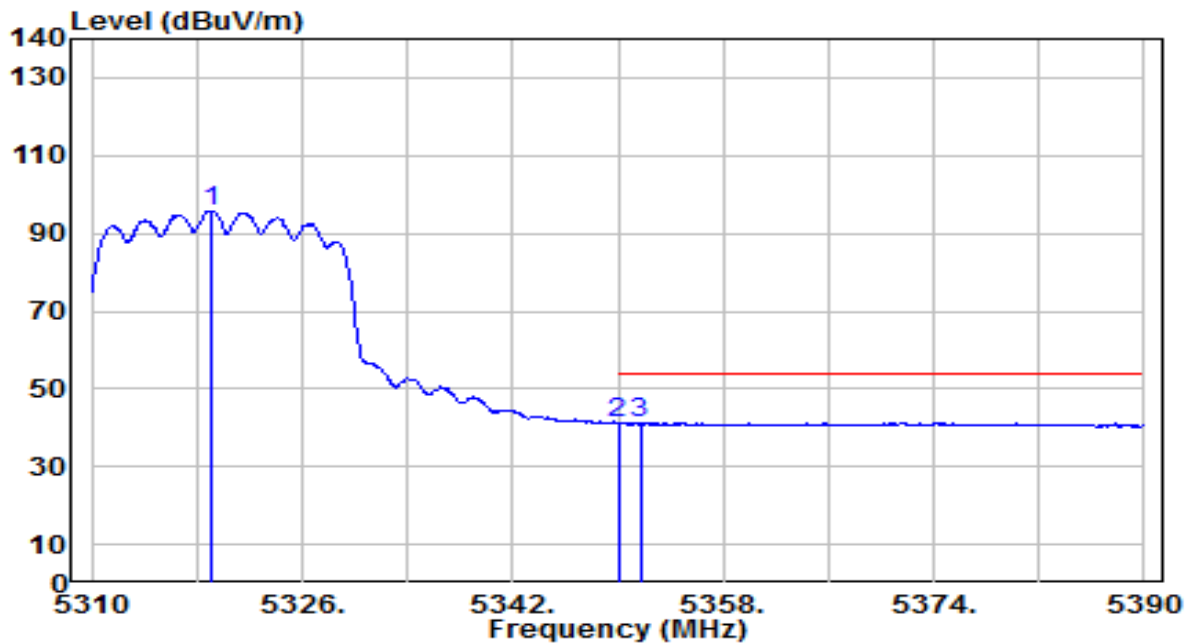


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.120	95.21	0.65	95.86	N/A	N/A	235	225	Average
2	* 5350.000	40.80	0.59	41.39	-12.61	54.00	235	225	Average
3	5351.680	40.72	0.59	41.31	-12.69	54.00	235	225	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band2_TX_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

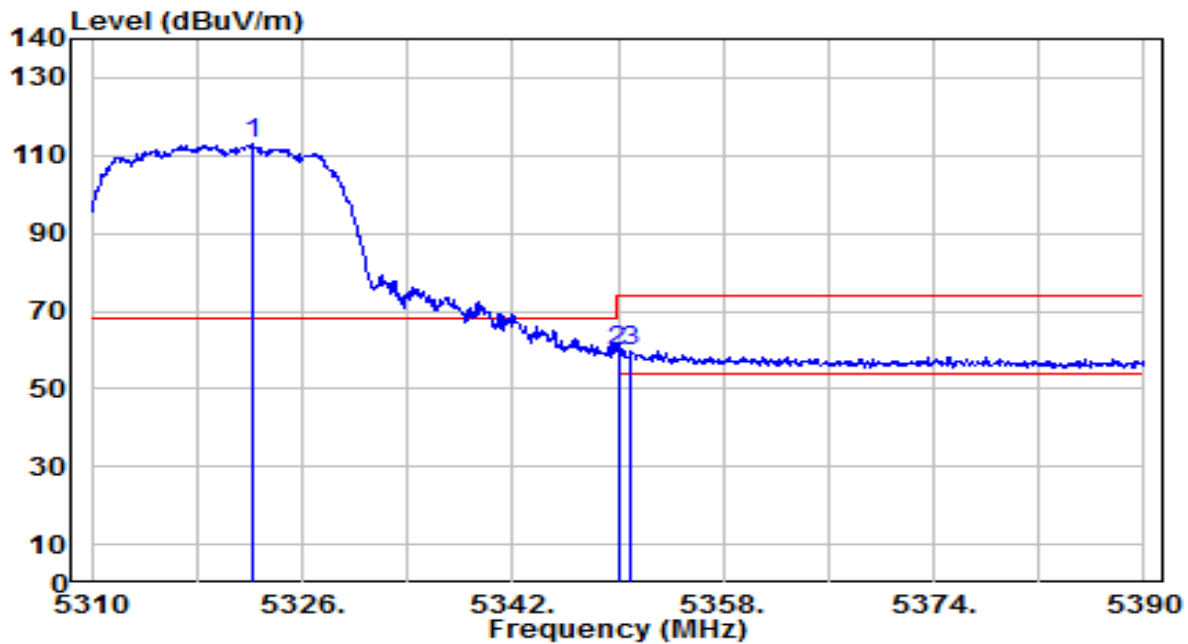


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.160	112.21	0.64	112.86	N/A	N/A	240	95	Peak
2	* 5350.000	59.30	0.59	59.89	-14.11	74.00	240	95	Peak
3	5351.040	58.87	0.59	59.46	-14.54	74.00	240	95	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band2_TX_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

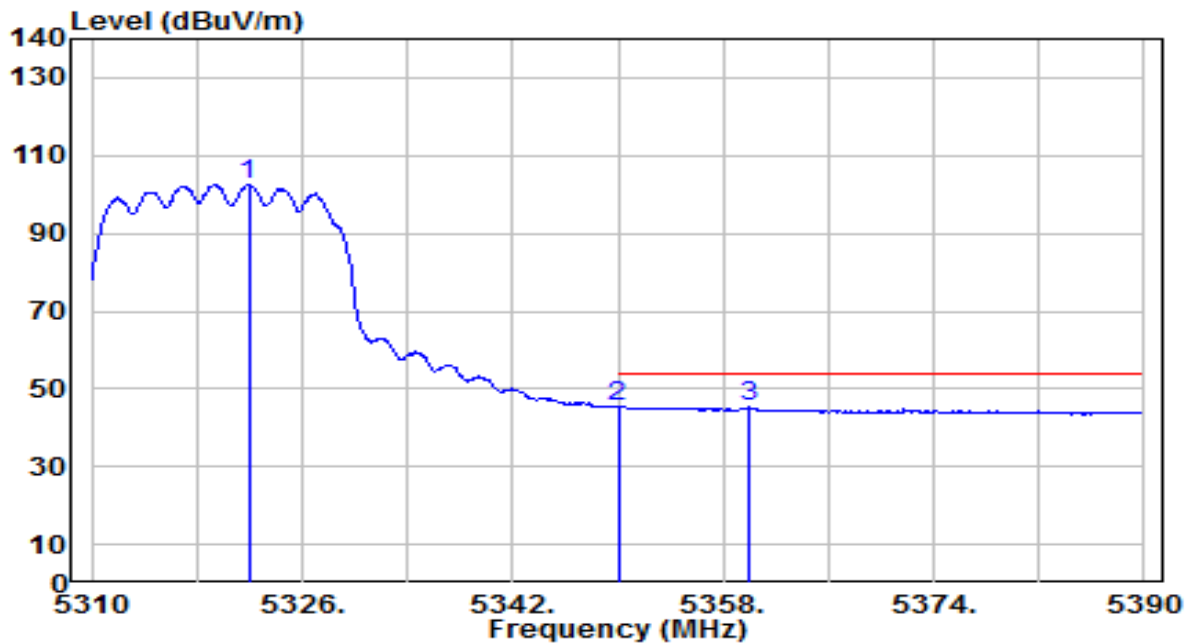


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.920	101.86	0.64	102.50	N/A	N/A	240	95	Average
2	* 5350.000	44.85	0.59	45.44	-8.56	54.00	240	95	Average
3	5360.000	44.60	0.58	45.18	-8.82	54.00	240	95	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

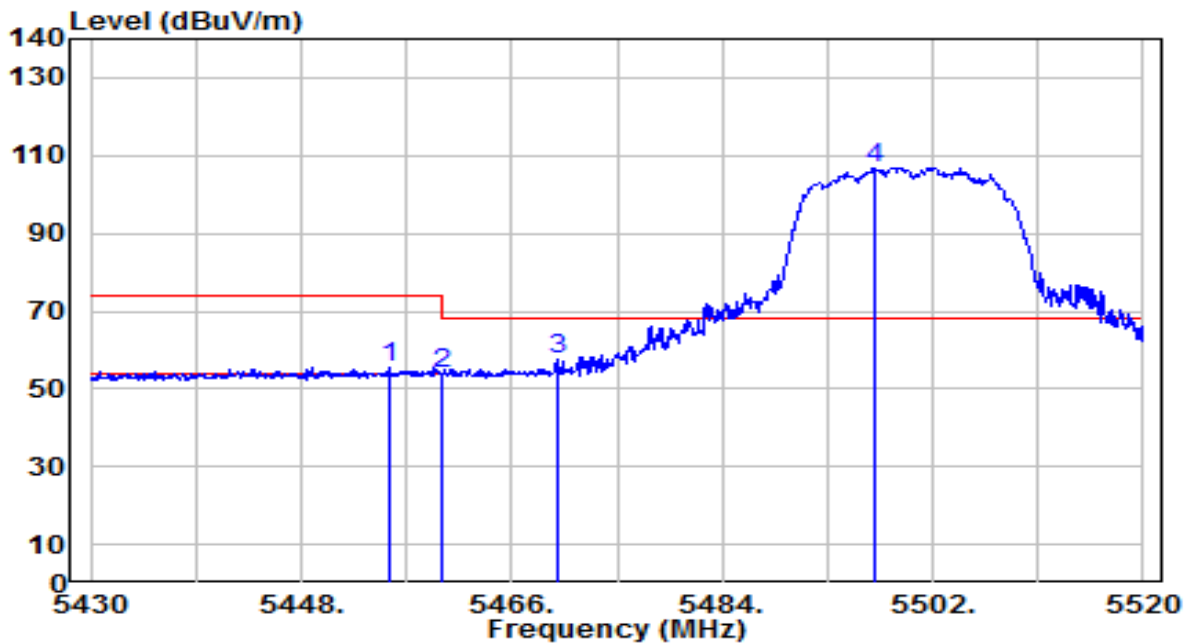


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.470	54.65	0.74	55.39	-18.61	74.00	250	205	Peak
2	5460.000	52.98	0.76	53.74	-20.26	74.00	250	205	Peak
3	* 5470.000	56.62	0.80	57.43	-10.77	68.20	250	205	Peak
4	5496.960	105.99	0.92	106.91	N/A	N/A	250	205	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

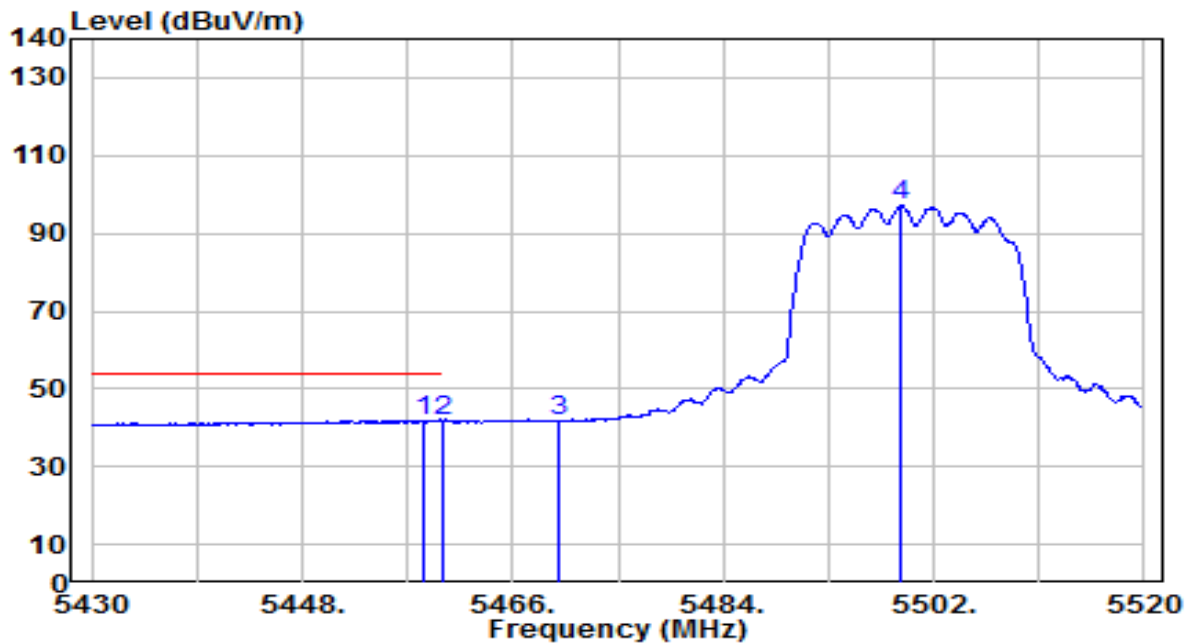


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.440	40.93	0.75	41.68	-12.32	54.00	250	205	Average
2	* 5460.000	41.12	0.76	41.88	-12.12	54.00	250	205	Average
3	5470.000	41.01	0.80	41.81	N/A	N/A	250	205	Average
4	5499.210	96.09	0.93	97.01	N/A	N/A	250	205	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

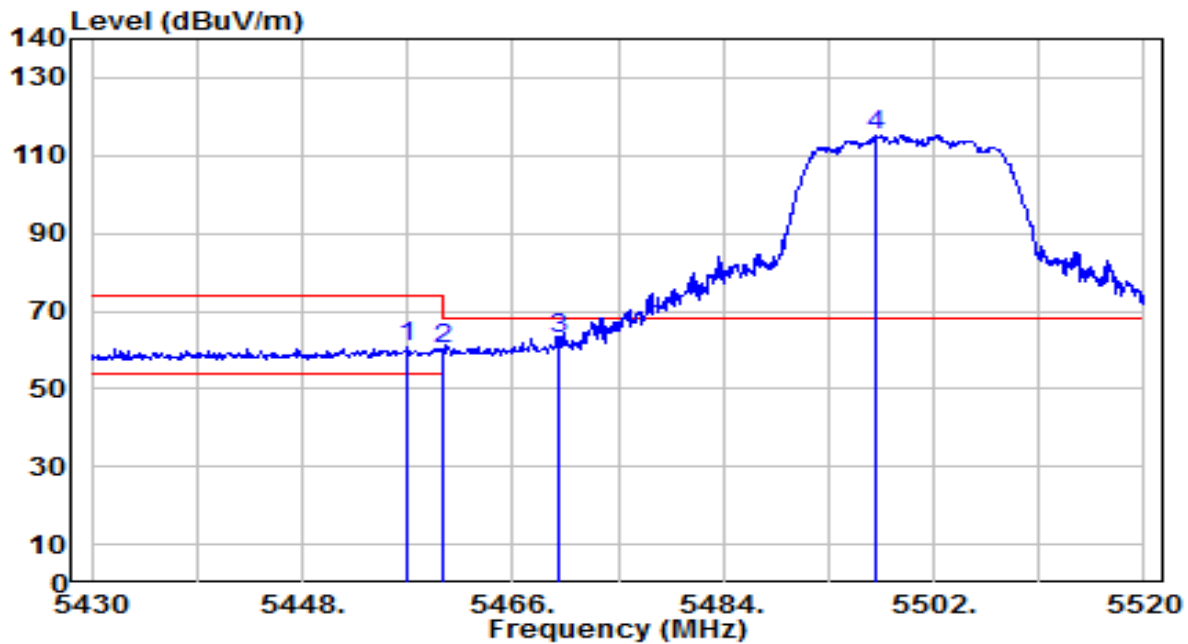


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.000	59.79	0.75	60.54	-13.46	74.00	225	90	Peak
2	5460.000	59.21	0.76	59.97	-14.03	74.00	225	90	Peak
3	* 5470.000	62.10	0.80	62.91	-5.29	68.20	225	90	Peak
4	5497.140	114.41	0.92	115.32	N/A	N/A	225	90	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band3_TX_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

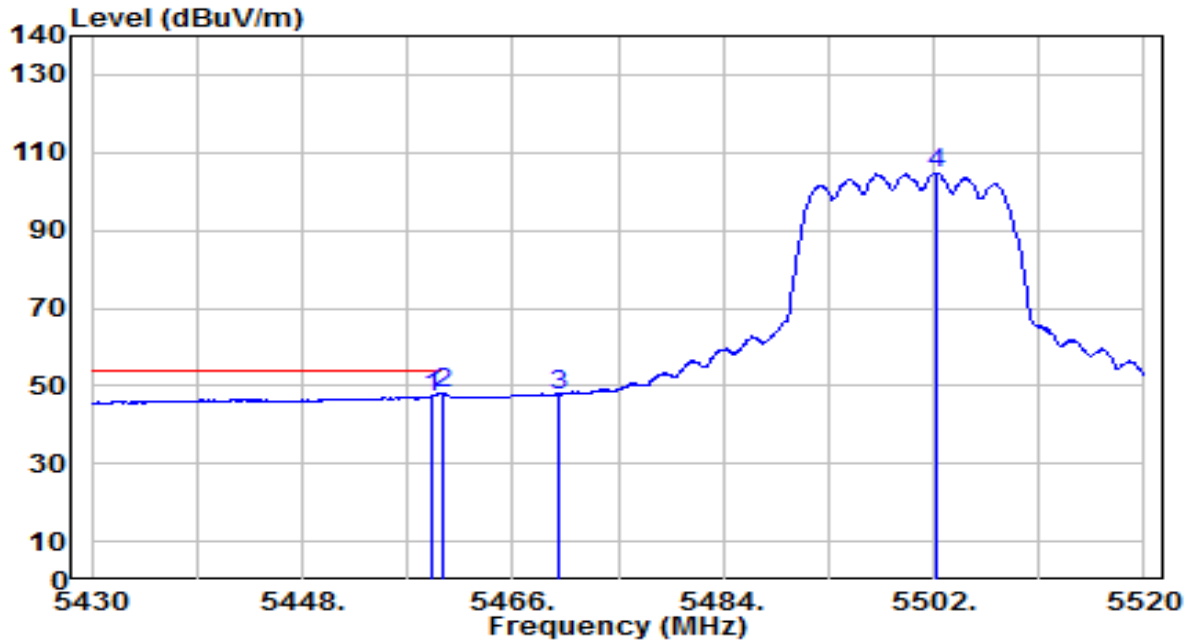


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.980	46.46	0.76	47.22	-6.78	54.00	225	90	Average
2	* 5460.000	47.10	0.76	47.86	-6.14	54.00	225	90	Average
3	5470.000	46.95	0.80	47.75	N/A	N/A	225	90	Average
4	5502.180	103.74	0.94	104.68	N/A	N/A	225	90	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band3_TX_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

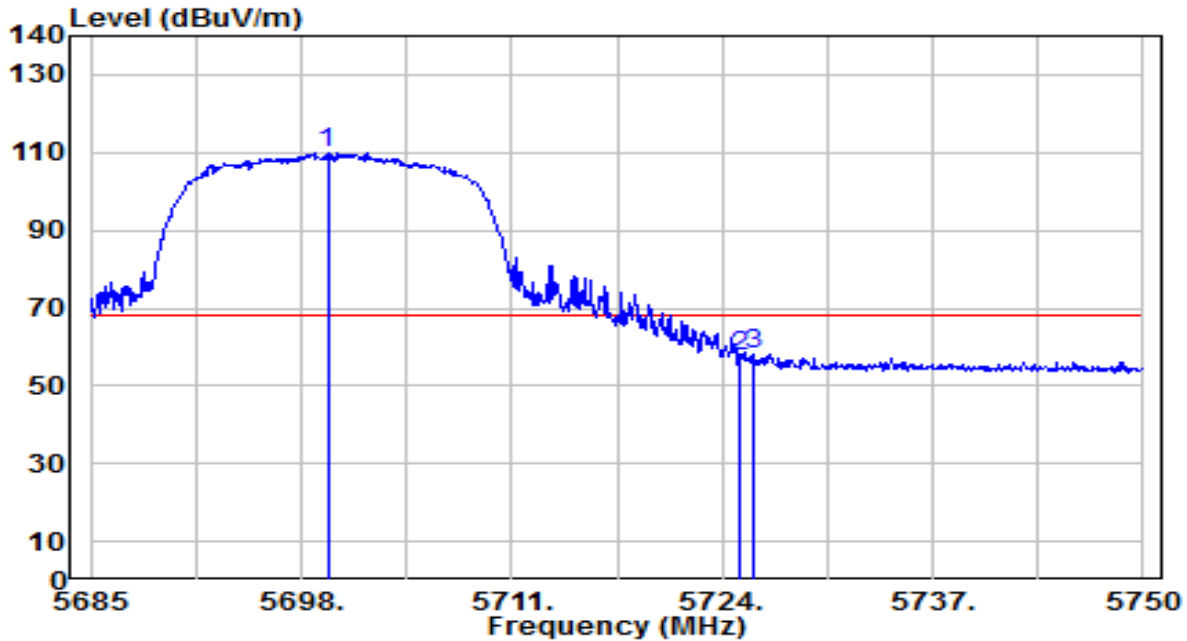


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.625	108.01	1.79	109.80	N/A	N/A	225	115	Peak
2	5725.000	55.82	1.89	57.71	-10.49	68.20	225	115	Peak
3	* 5725.950	56.25	1.89	58.14	-10.06	68.20	225	115	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band3_TX_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

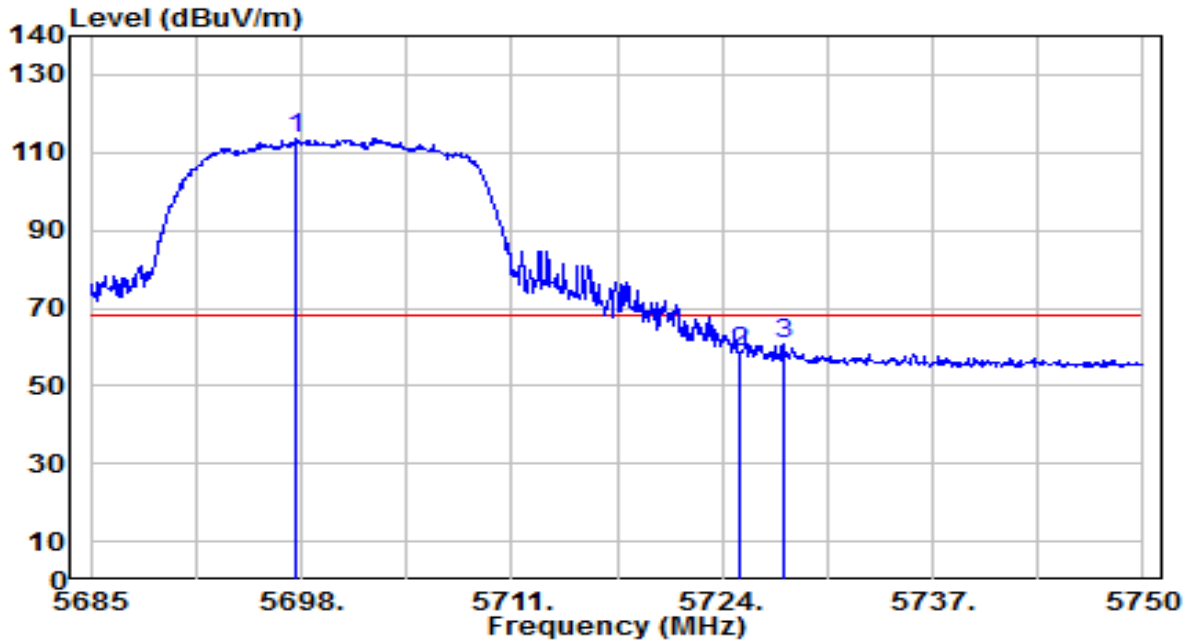


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5697.740	111.82	1.78	113.59	N/A	N/A	225	90	Peak
2	5725.000	56.77	1.89	58.66	-9.54	68.20	225	90	Peak
3	* 5727.770	58.60	1.90	60.50	-7.70	68.20	225	90	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band4_TX_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

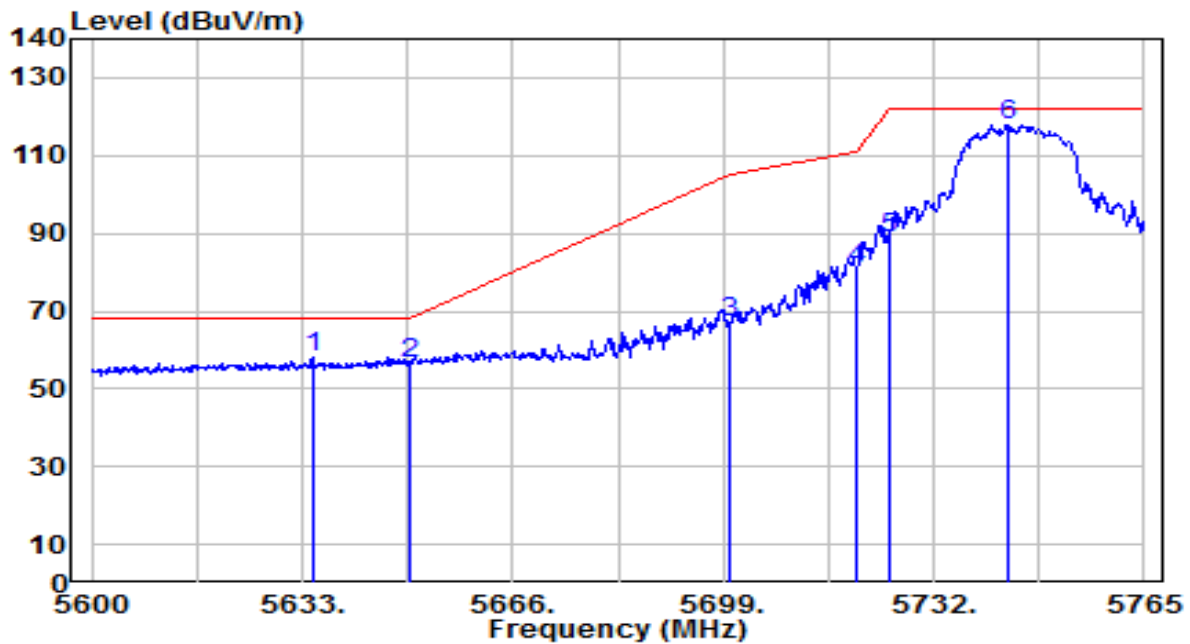


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5634.650	56.81	1.52	58.33	-9.87	68.20	230	115	Peak
2	5650.000	54.79	1.59	56.37	-11.83	68.20	230	115	Peak
3	5700.000	65.36	1.79	67.15	-38.05	105.20	230	115	Peak
4	5720.000	79.17	1.87	81.04	-29.76	110.80	230	115	Peak
5	5725.000	86.79	1.89	88.68	-33.52	122.20	230	115	Peak
6	5743.715	116.04	1.96	118.00	N/A	N/A	230	115	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band4_TX_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

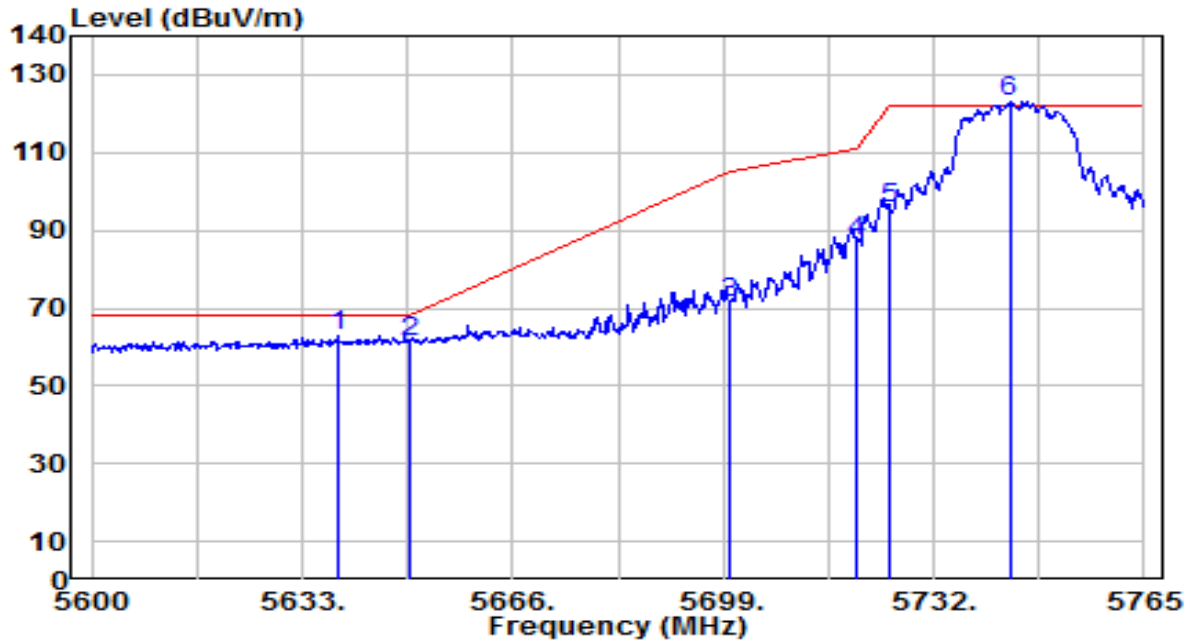


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5638.445	61.32	1.54	62.86	-5.34	68.20	180	270	Peak
2	5650.000	59.69	1.59	61.27	-6.93	68.20	180	270	Peak
3	5700.000	69.47	1.79	71.26	-33.94	105.20	180	270	Peak
4	5720.000	85.24	1.87	87.11	-23.69	110.80	180	270	Peak
5	5725.000	93.68	1.89	95.56	-26.64	122.20	180	270	Peak
6	5743.880	121.04	1.97	123.01	N/A	N/A	180	270	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band4_TX_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

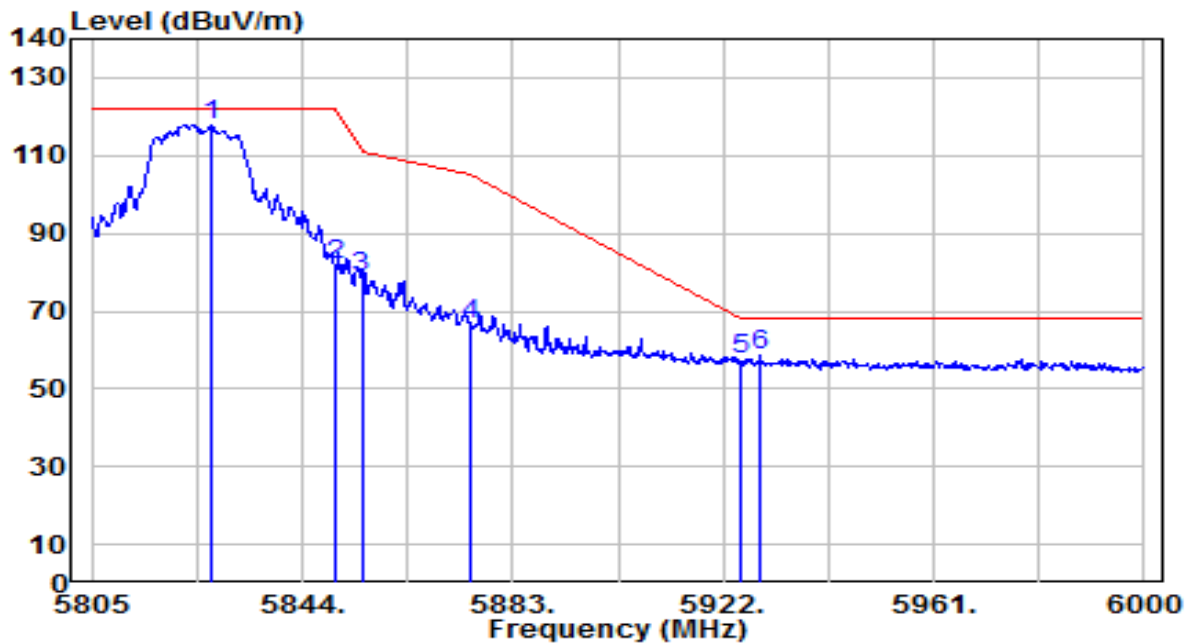


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.035	115.82	2.23	118.05	N/A	N/A	250	115	Peak
2	5850.000	79.72	2.27	81.99	-40.21	122.20	250	115	Peak
3	5855.000	76.70	2.28	78.98	-31.82	110.80	250	115	Peak
4	5875.000	64.14	2.31	66.45	-38.75	105.20	250	115	Peak
5	5925.000	55.10	2.38	57.49	-10.71	68.20	250	115	Peak
6	* 5929.020	56.36	2.39	58.75	-9.45	68.20	250	115	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_Band4_TX_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

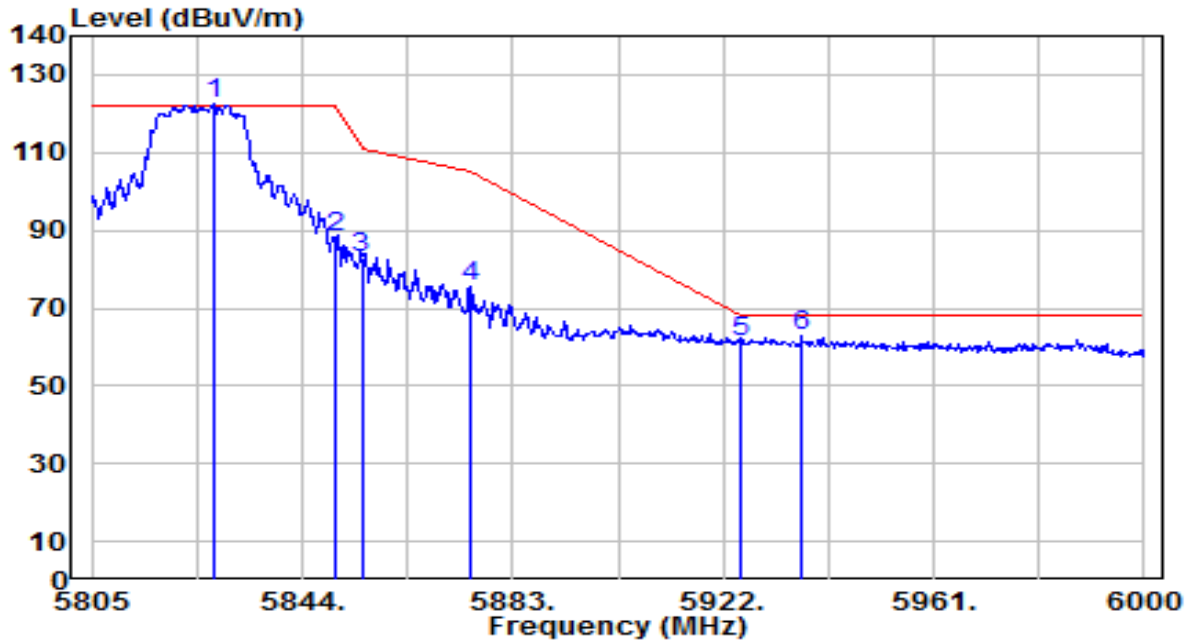


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.620	120.58	2.23	122.81	N/A	N/A	165	275	Peak
2	5850.000	85.97	2.27	88.24	-33.96	122.20	165	275	Peak
3	5855.000	80.48	2.28	82.76	-28.04	110.80	165	275	Peak
4	5875.000	72.98	2.31	75.28	-29.92	105.20	165	275	Peak
5	5925.000	59.11	2.38	61.49	-6.71	68.20	165	275	Peak
6	* 5936.430	60.30	2.40	62.70	-5.50	68.20	165	275	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

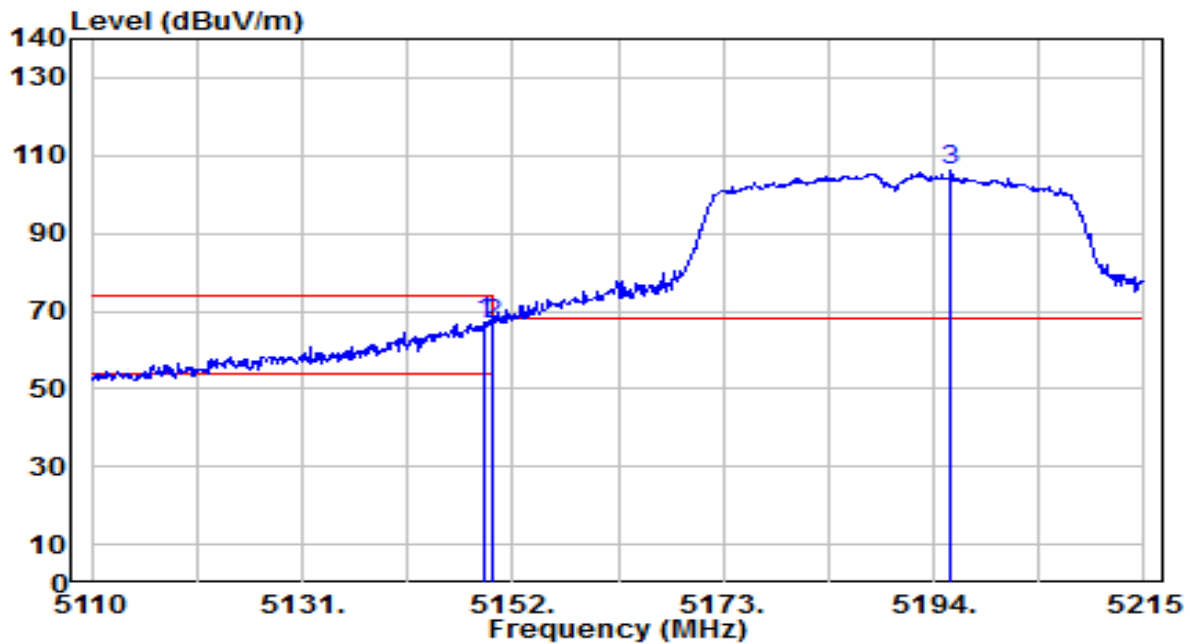


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.060	66.56	0.79	67.35	-6.65	74.00	225	125	Peak
2	5150.000	65.72	0.80	66.51	-7.49	74.00	225	125	Peak
3	5195.680	105.44	0.85	106.29	N/A	N/A	225	125	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

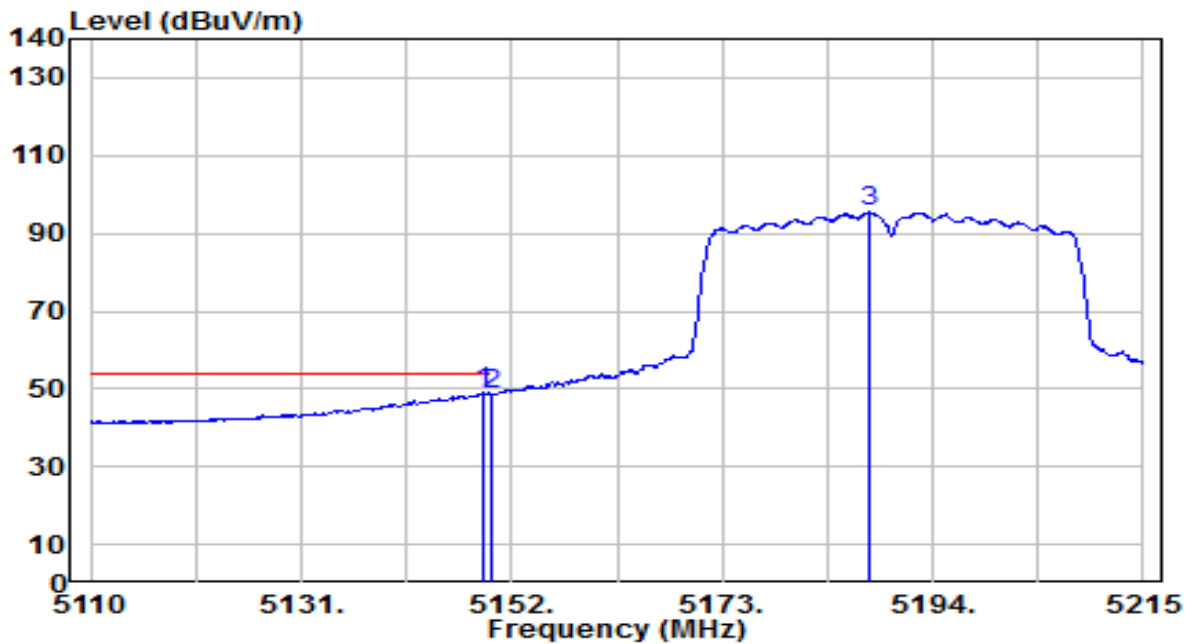


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.165	48.09	0.79	48.88	-5.12	54.00	225	125	Average
2	5150.000	47.67	0.80	48.47	-5.53	54.00	225	125	Average
3	5187.700	94.81	0.84	95.65	N/A	N/A	225	125	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

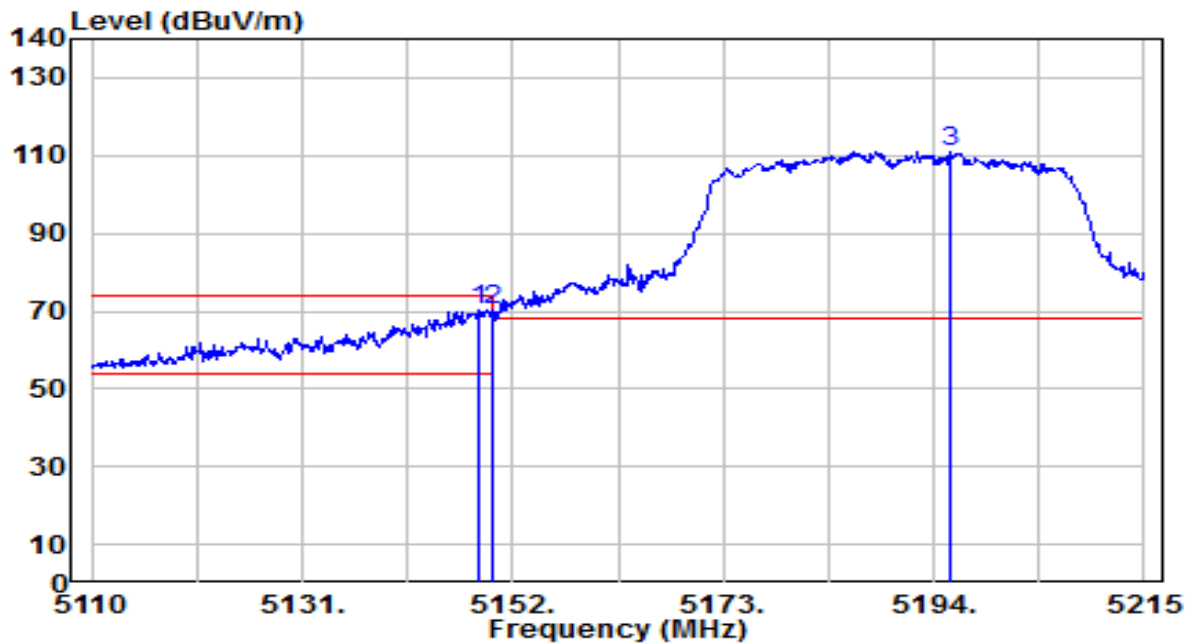


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.640	69.42	0.79	70.21	-3.79	74.00	200	100	Peak
2	5150.000	69.36	0.80	70.15	-3.85	74.00	200	100	Peak
3	5195.680	110.21	0.85	111.06	N/A	N/A	200	100	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band1_TX_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

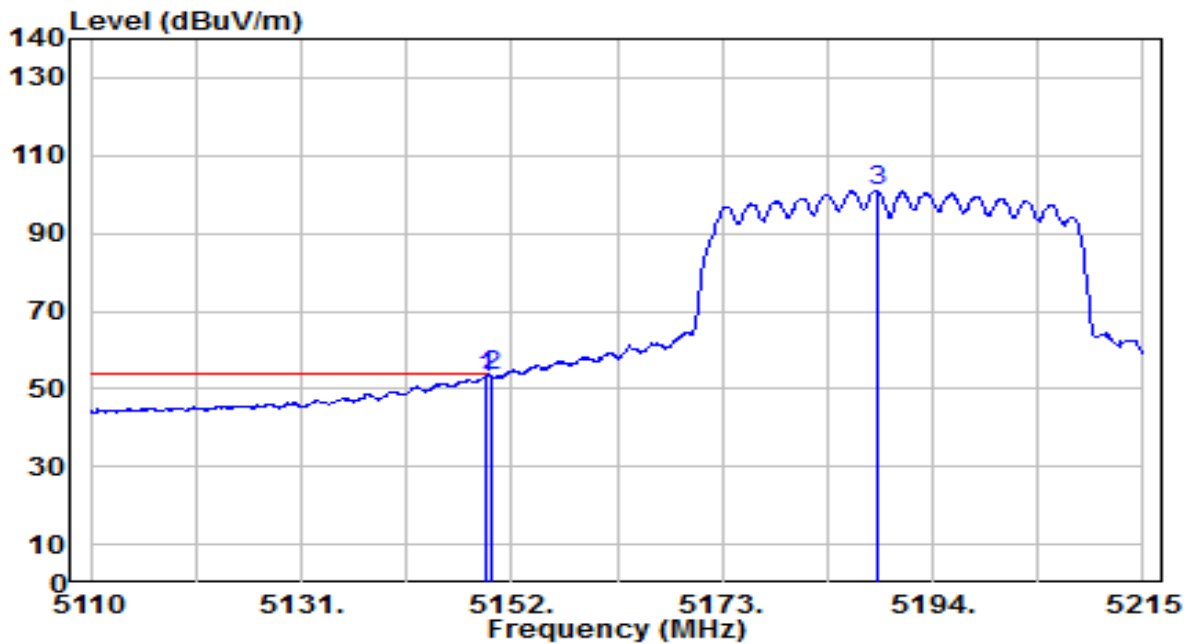


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.375	52.26	0.80	53.06	-0.94	54.00	200	100	Average
2	* 5150.000	52.71	0.80	53.51	-0.49	54.00	200	100	Average
3	5188.435	100.16	0.84	101.01	N/A	N/A	200	100	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

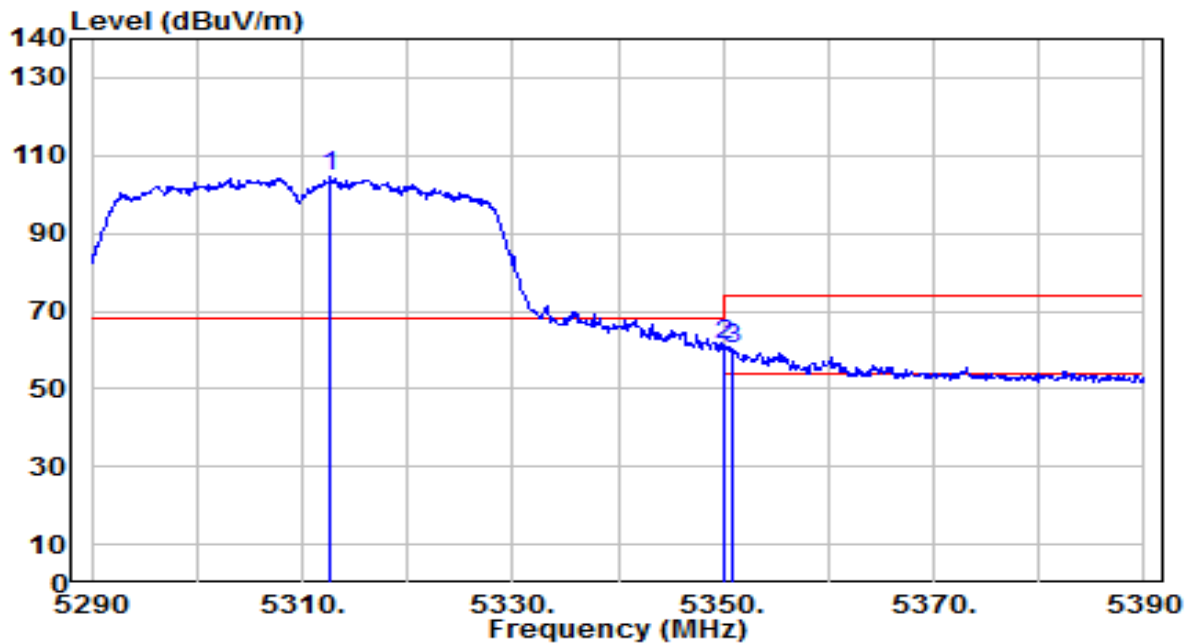


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.700	103.71	0.66	104.37	N/A	N/A	235	225	Peak
2	* 5350.000	60.49	0.59	61.08	-12.92	74.00	235	225	Peak
3	5351.000	59.85	0.59	60.44	-13.56	74.00	235	225	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

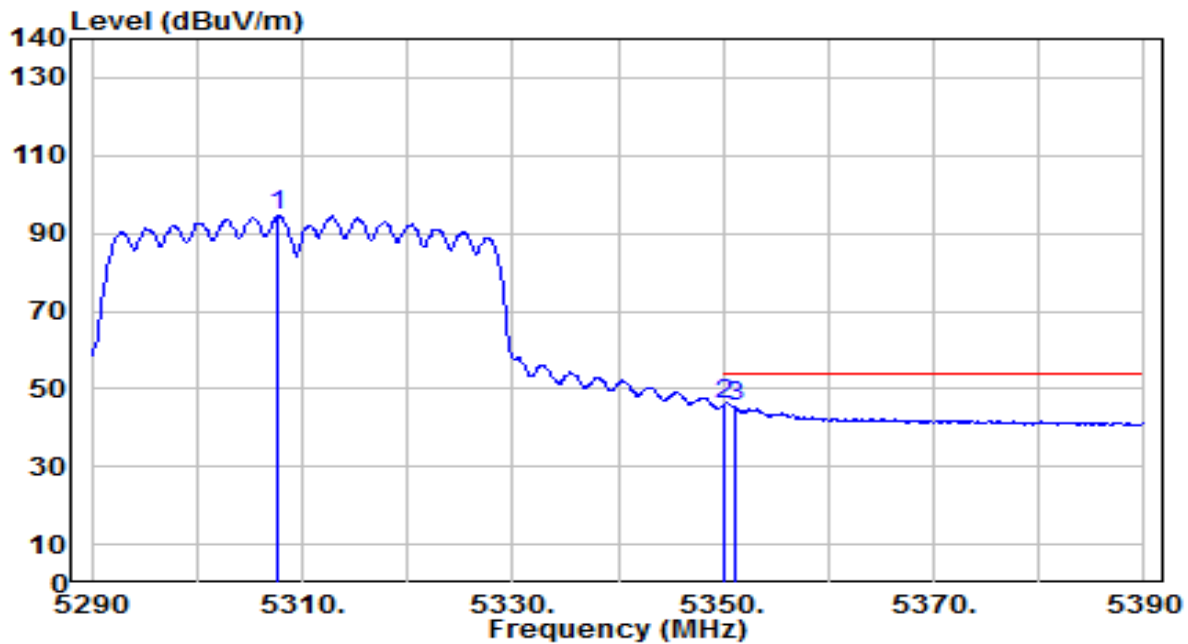


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.700	93.86	0.67	94.53	N/A	N/A	235	225	Average
2	* 5350.000	45.16	0.59	45.76	-8.24	54.00	235	225	Average
3	5351.200	44.77	0.59	45.37	-8.63	54.00	235	225	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

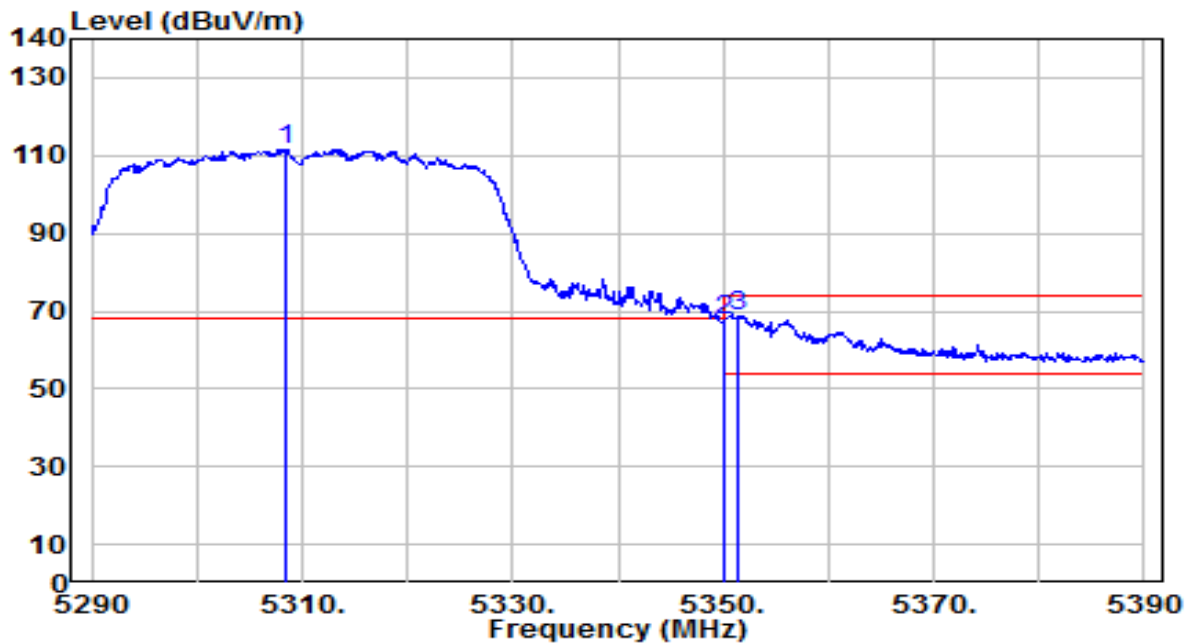


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.500	111.01	0.67	111.67	N/A	N/A	240	95	Peak
2	5350.000	66.77	0.59	67.36	-6.64	74.00	240	95	Peak
3	* 5351.500	68.22	0.59	68.81	-5.19	74.00	240	95	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band2_TX_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

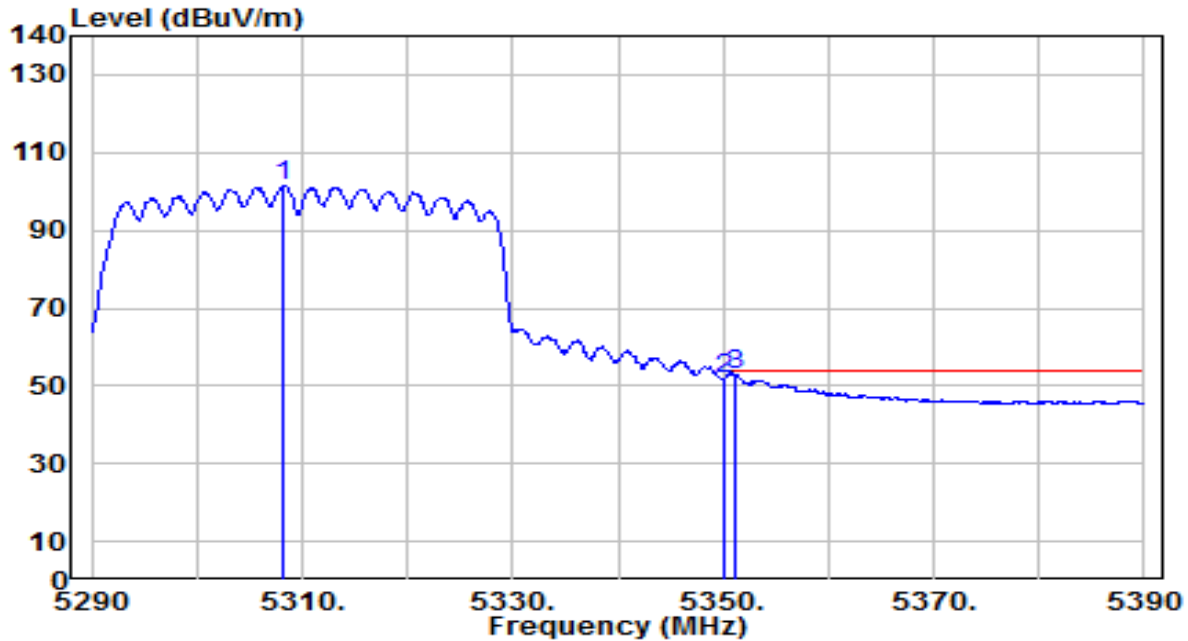


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.100	100.57	0.67	101.24	N/A	N/A	240	95	Average
2	5350.000	51.13	0.59	51.72	-2.28	54.00	240	95	Average
3	* 5351.100	52.33	0.59	52.92	-1.08	54.00	240	95	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

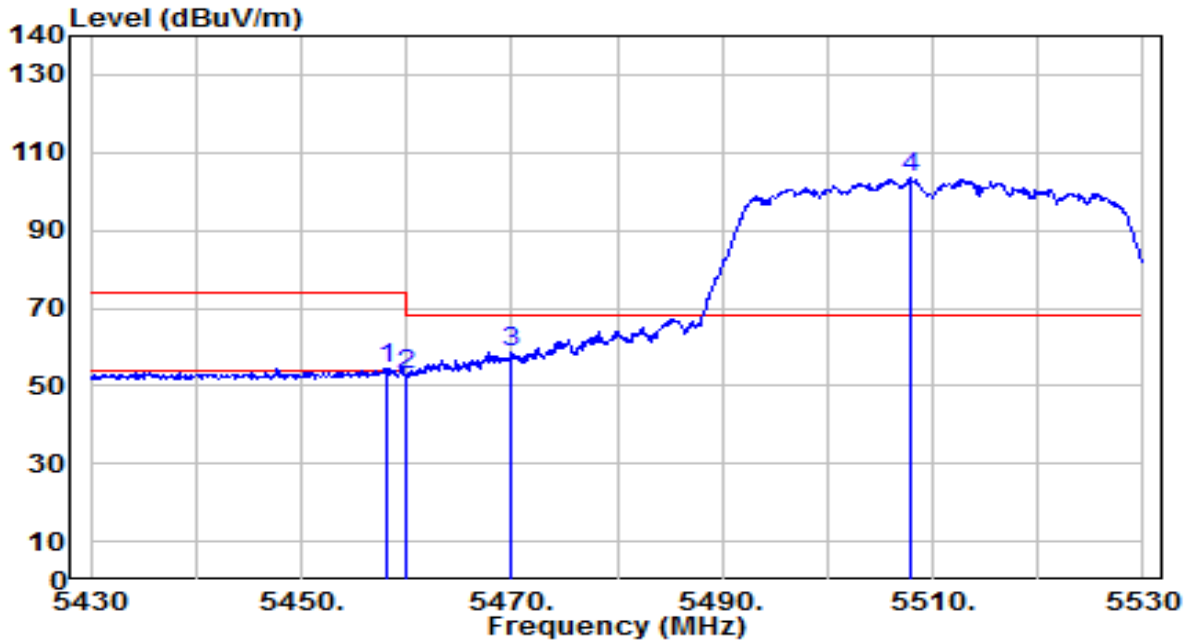


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.200	53.49	0.75	54.24	-19.76	74.00	250	210	Peak
2	5460.000	51.98	0.76	52.74	-21.26	74.00	250	210	Peak
3	* 5470.000	57.69	0.80	58.49	-9.71	68.20	250	210	Peak
4	5508.000	102.33	0.97	103.30	N/A	N/A	250	210	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

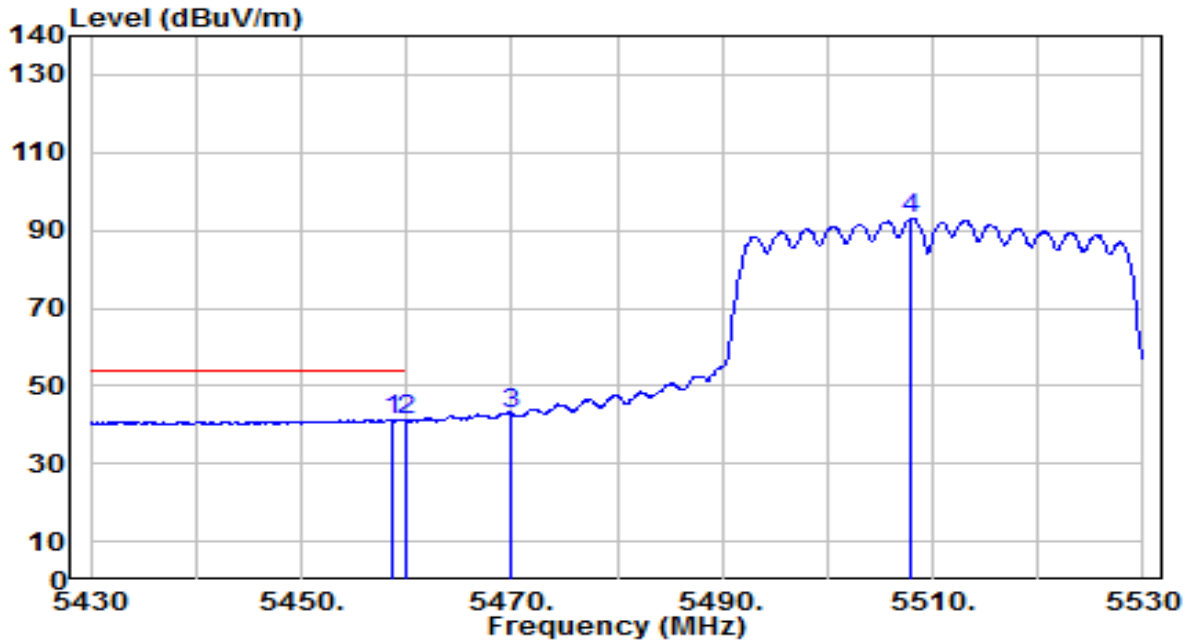


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.700	40.63	0.75	41.39	-12.61	54.00	250	210	Average
2	5460.000	40.35	0.76	41.11	-12.89	54.00	250	210	Average
3	5470.000	41.93	0.80	42.73	N/A	N/A	250	210	Average
4	5507.900	92.26	0.97	93.23	N/A	N/A	250	210	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

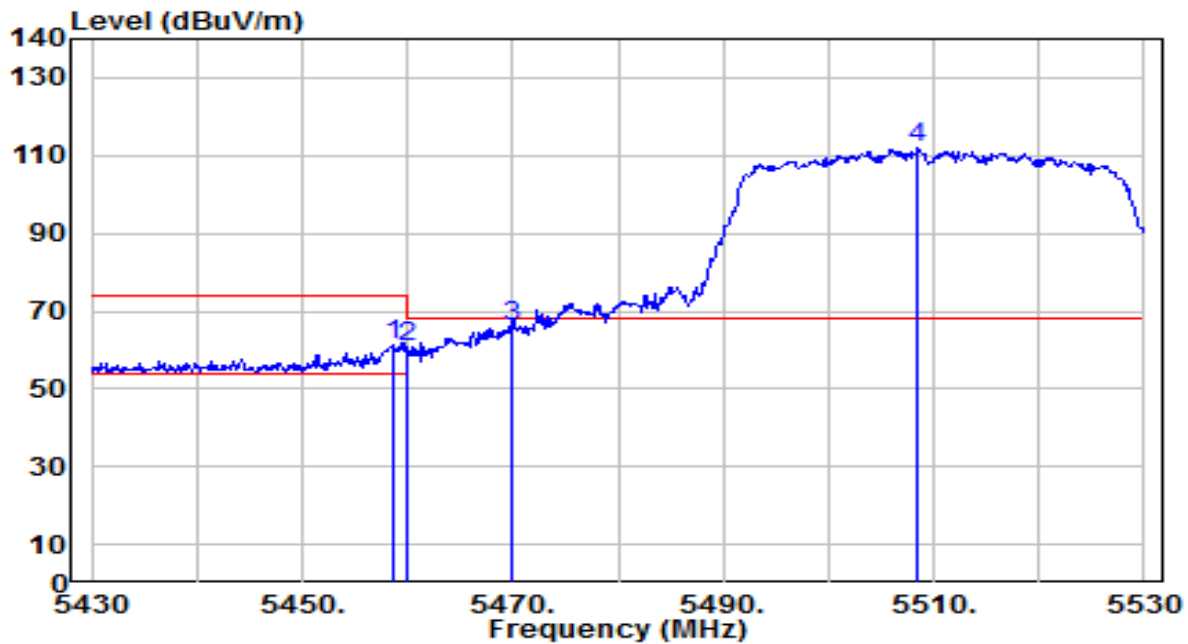


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.700	60.57	0.75	61.32	-12.68	74.00	235	90	Peak
2	5460.000	59.73	0.76	60.49	-13.51	74.00	235	90	Peak
3	* 5470.000	65.07	0.80	65.88	-2.32	68.20	235	90	Peak
4	5508.400	111.15	0.97	112.11	N/A	N/A	235	90	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band3_TX_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

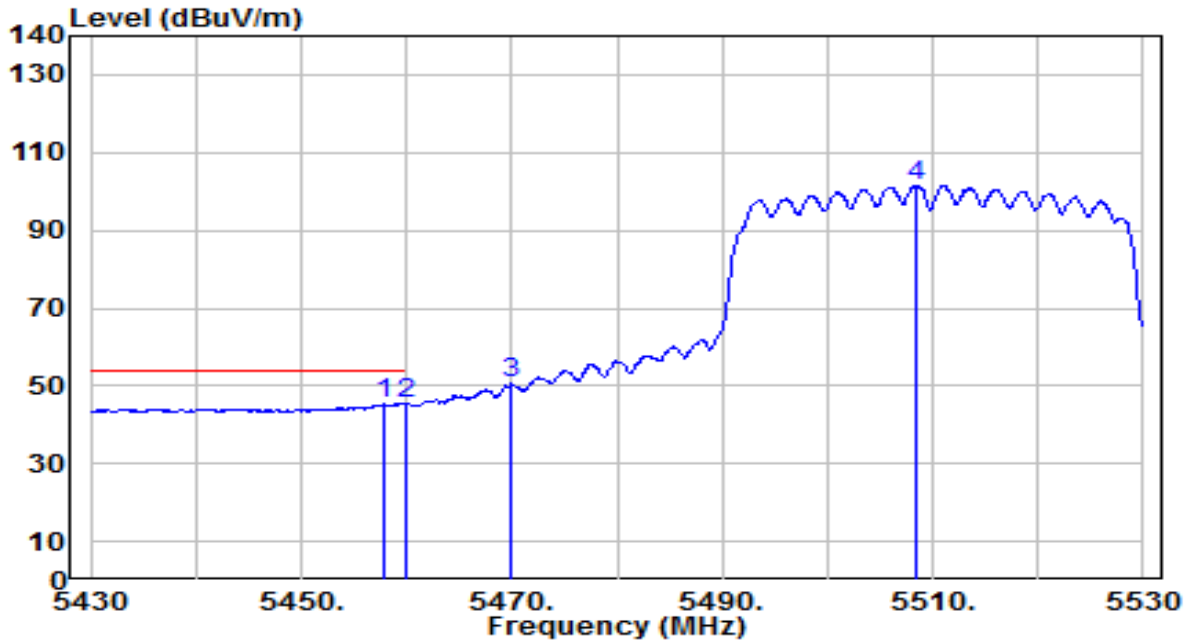


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.800	44.45	0.75	45.20	-8.80	54.00	235	90	Average
2	* 5460.000	44.64	0.76	45.40	-8.60	54.00	235	90	Average
3	5470.000	49.65	0.80	50.46	N/A	N/A	235	90	Average
4	5508.500	100.67	0.97	101.64	N/A	N/A	235	90	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band3_TX_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

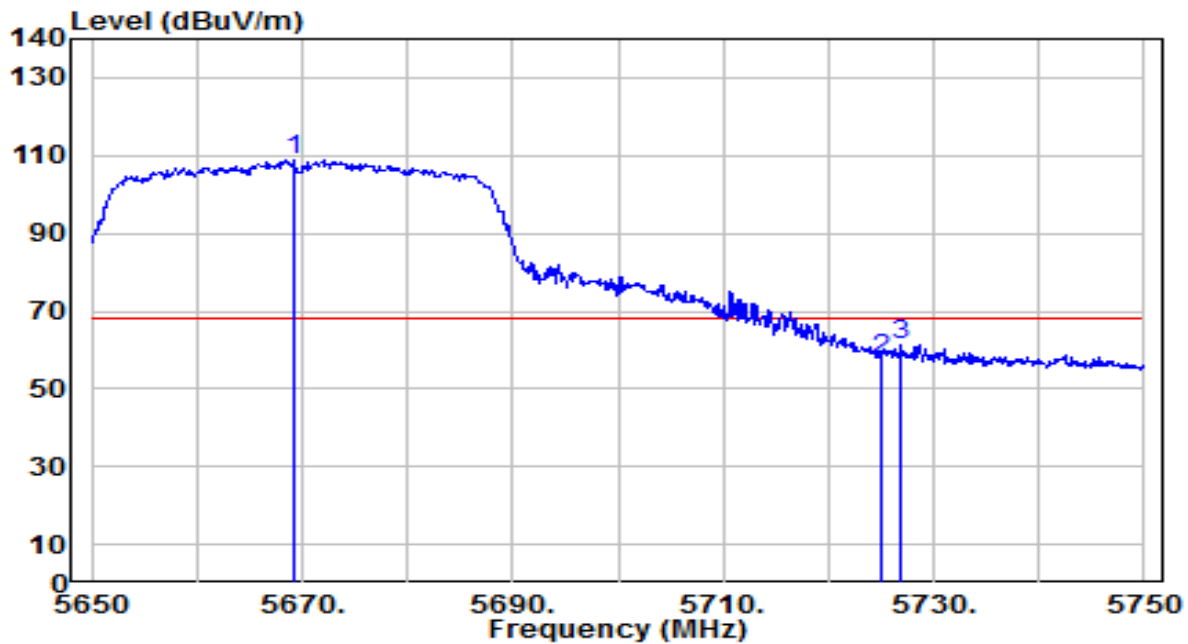


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5669.200	107.11	1.66	108.77	N/A	N/A	225	115	Peak
2	5725.000	55.72	1.89	57.61	-10.59	68.20	225	115	Peak
3	* 5726.900	59.45	1.90	61.35	-6.85	68.20	225	115	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band3_TX_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

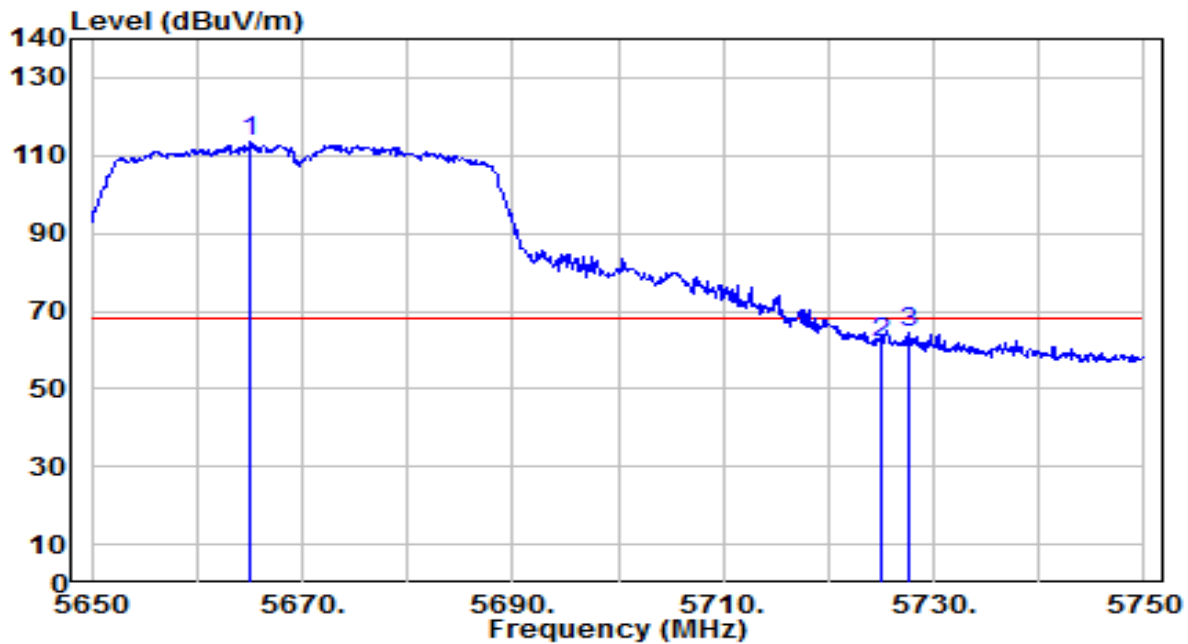


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5665.100	111.78	1.65	113.43	N/A	N/A	225	100	Peak
2	5725.000	59.68	1.89	61.57	-6.63	68.20	225	100	Peak
3	* 5727.700	62.34	1.90	64.24	-3.96	68.20	225	100	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band4_TX_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

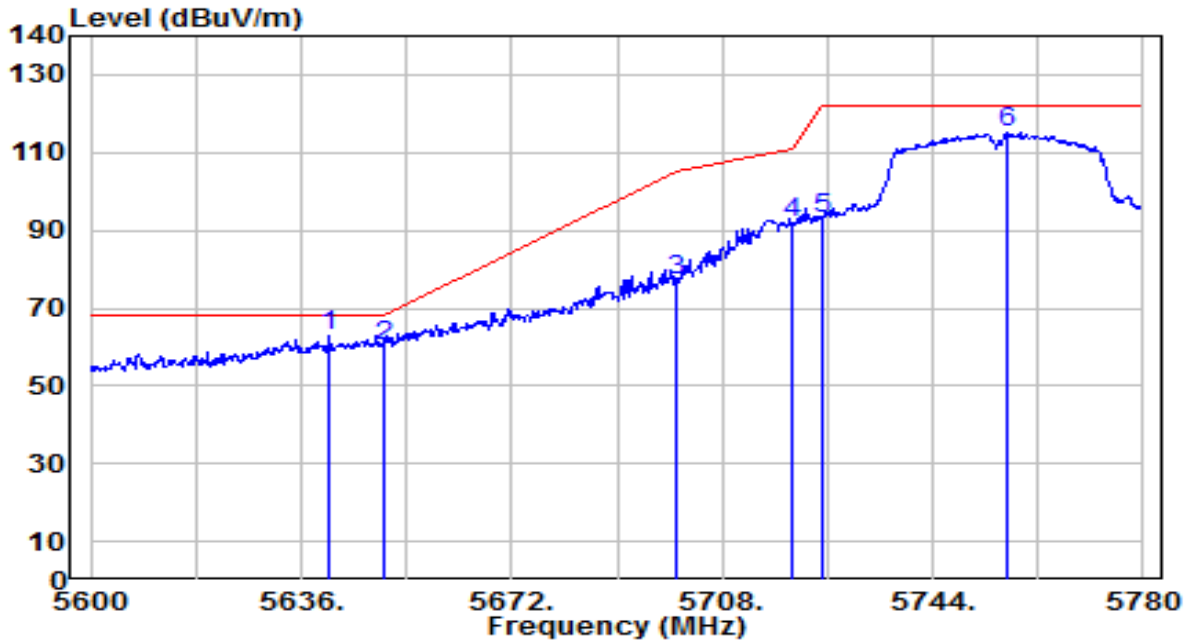


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5640.860	61.22	1.55	62.77	-5.43	68.20	235	110	Peak
2	5650.000	58.85	1.59	60.44	-7.76	68.20	235	110	Peak
3	5700.000	75.10	1.79	76.89	-28.31	105.20	235	110	Peak
4	5720.000	90.12	1.87	91.99	-18.81	110.80	235	110	Peak
5	5725.000	91.06	1.89	92.95	-29.25	122.20	235	110	Peak
6	5756.780	112.96	2.02	114.98	N/A	N/A	235	110	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band4_TX_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

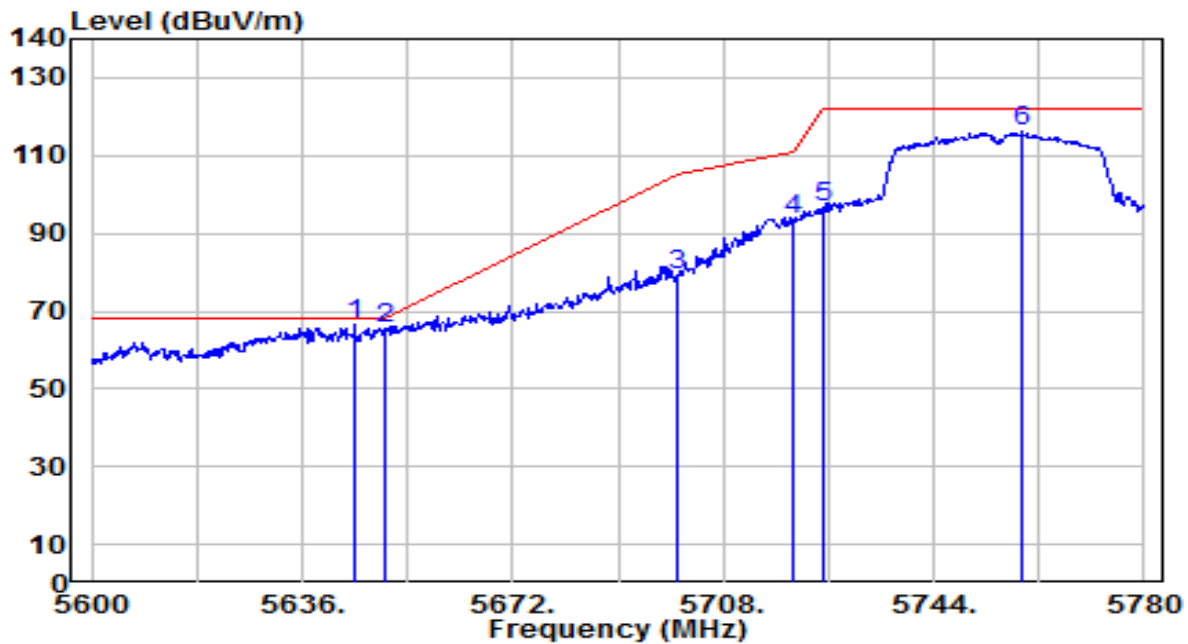


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5645.000	64.81	1.57	66.38	-1.82	68.20	165	270	Peak
2	5650.000	64.10	1.59	65.69	-2.51	68.20	165	270	Peak
3	5700.000	77.59	1.79	79.38	-25.82	105.20	165	270	Peak
4	5720.000	91.43	1.87	93.30	-17.50	110.80	165	270	Peak
5	5725.000	94.86	1.89	96.74	-25.46	122.20	165	270	Peak
6	5759.300	114.02	2.03	116.05	N/A	N/A	165	270	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band4_TX_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

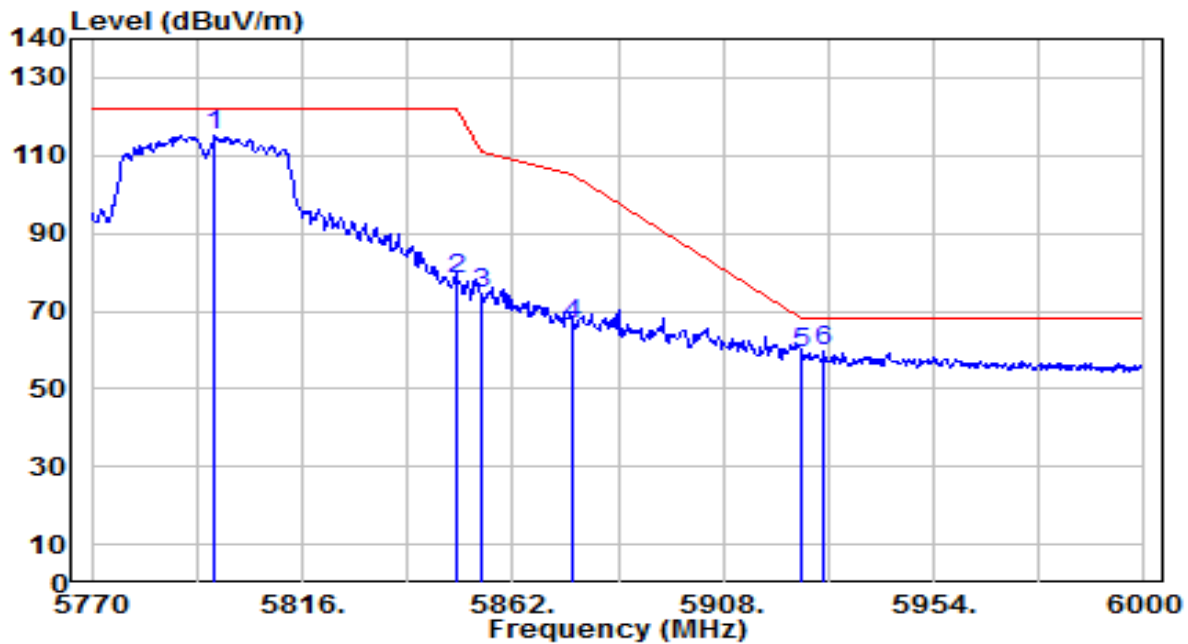


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5796.910	113.08	2.18	115.26	N/A	N/A	245	115	Peak
2	5850.000	75.69	2.27	77.96	-44.24	122.20	245	115	Peak
3	5855.000	72.37	2.28	74.65	-36.15	110.80	245	115	Peak
4	5875.000	64.48	2.31	66.79	-38.41	105.20	245	115	Peak
5	5925.000	57.01	2.38	59.40	-8.80	68.20	245	115	Peak
6	* 5930.080	57.05	2.39	59.44	-8.76	68.20	245	115	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_Band4_TX_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

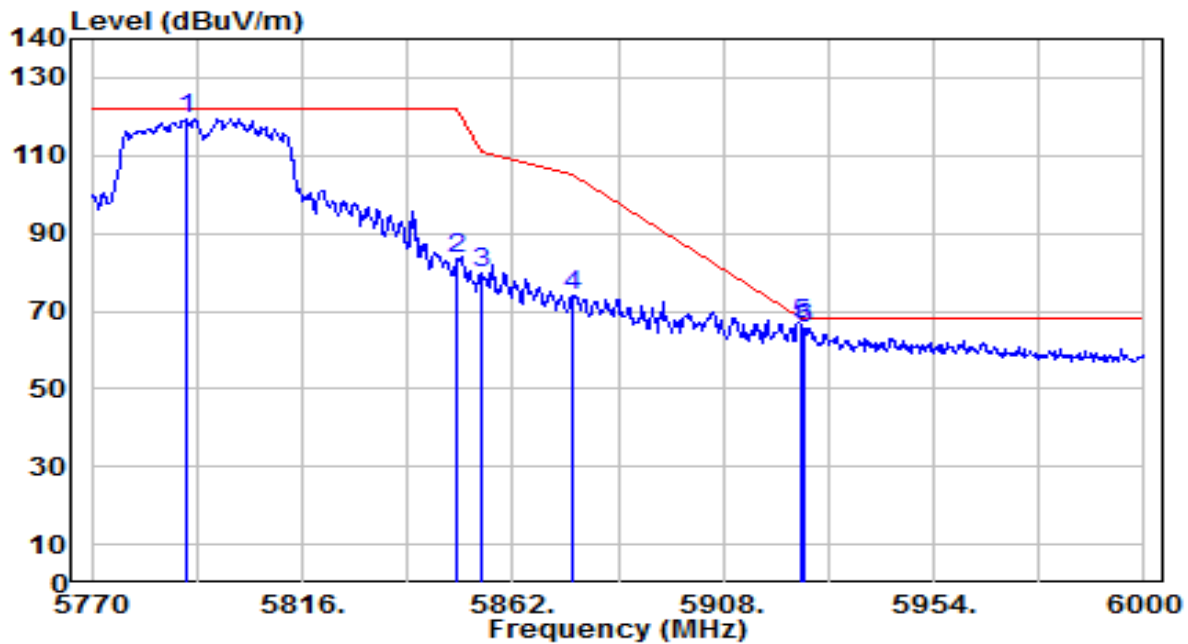


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.470	117.39	2.15	119.54	N/A	N/A	165	275	Peak
2	5850.000	81.06	2.27	83.33	-38.87	122.20	165	275	Peak
3	5855.000	77.64	2.28	79.92	-30.88	110.80	165	275	Peak
4	5875.000	71.55	2.31	73.86	-31.34	105.20	165	275	Peak
5	* 5925.000	63.98	2.38	66.37	-1.83	68.20	165	275	Peak
6	5925.940	63.34	2.39	65.73	-2.47	68.20	165	275	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

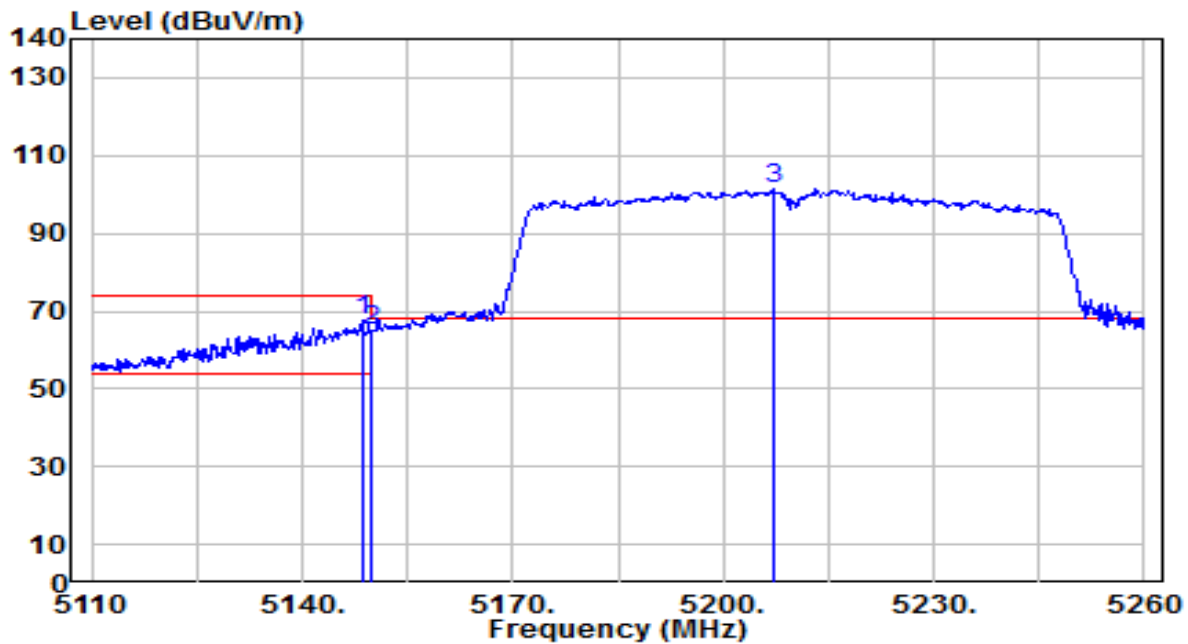


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.550	66.68	0.79	67.48	-6.52	74.00	235	125	Peak
2		5150.000	64.19	0.80	64.99	-9.01	74.00	235	125	Peak
3		5207.350	100.68	0.85	101.53	N/A	N/A	235	125	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

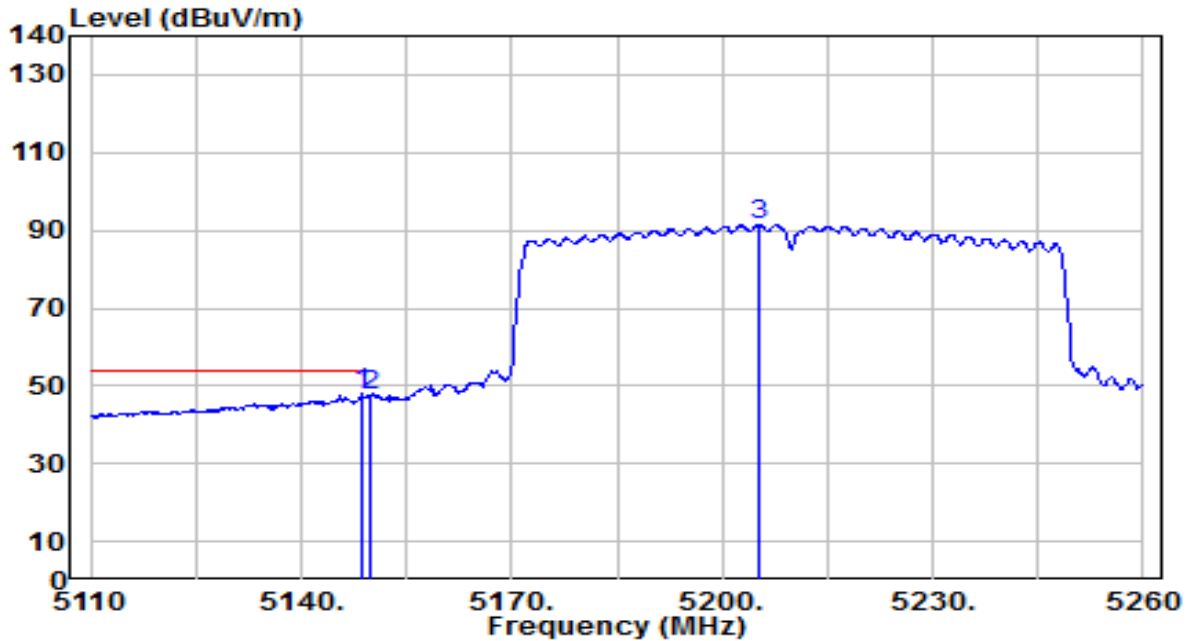


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.700	47.12	0.79	47.91	-6.09	54.00	235	125	Average
2	5150.000	46.86	0.80	47.65	-6.35	54.00	235	125	Average
3	5205.250	90.67	0.85	91.51	N/A	N/A	235	125	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

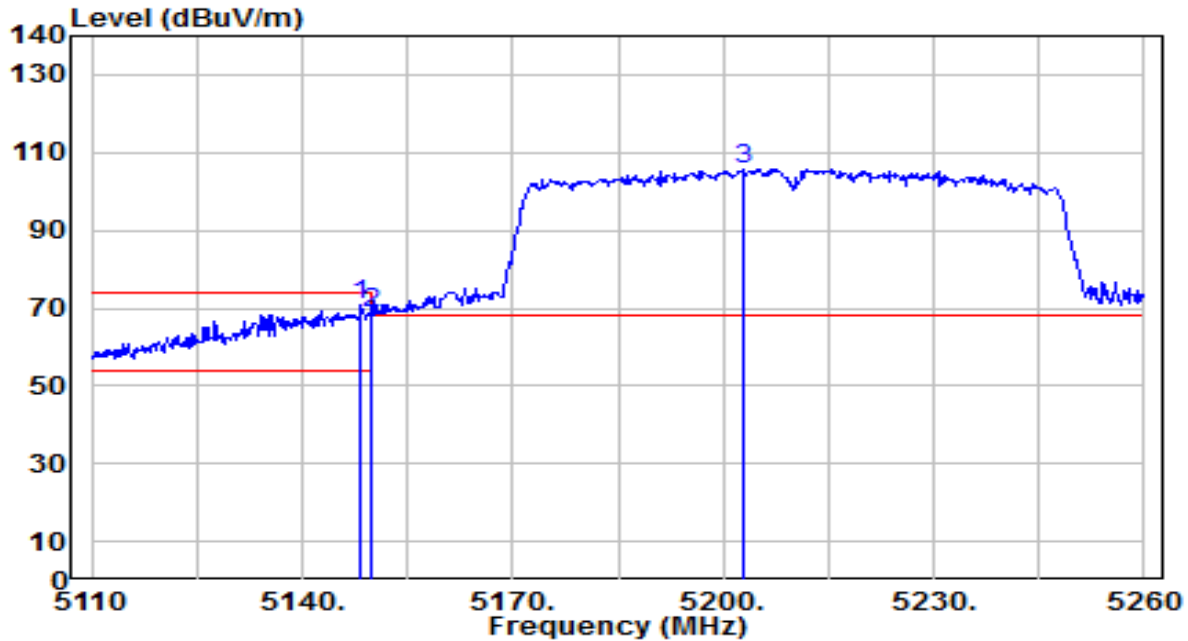


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.400	70.16	0.79	70.95	-3.05	74.00	200	120	Peak
2	5150.000	67.83	0.80	68.63	-5.37	74.00	200	120	Peak
3	5202.850	105.03	0.85	105.89	N/A	N/A	200	120	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band1_TX_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

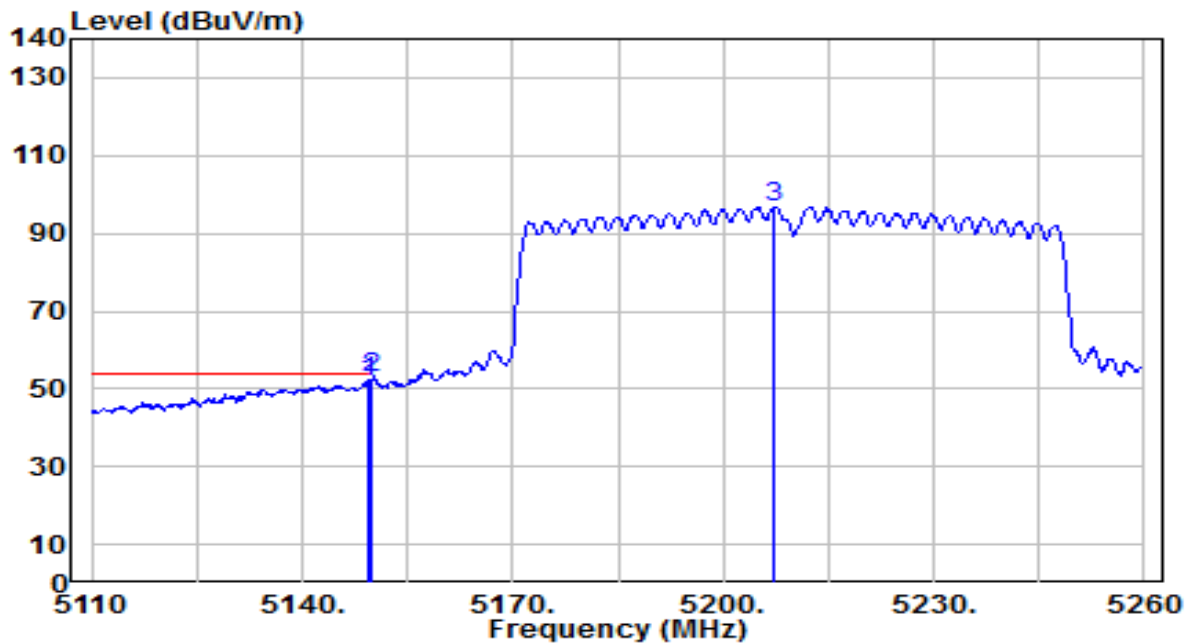


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.450	51.19	0.80	51.98	-2.02	54.00	200	120	Average
2	* 5150.000	52.07	0.80	52.87	-1.13	54.00	200	120	Average
3	5207.350	95.94	0.85	96.79	N/A	N/A	200	120	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

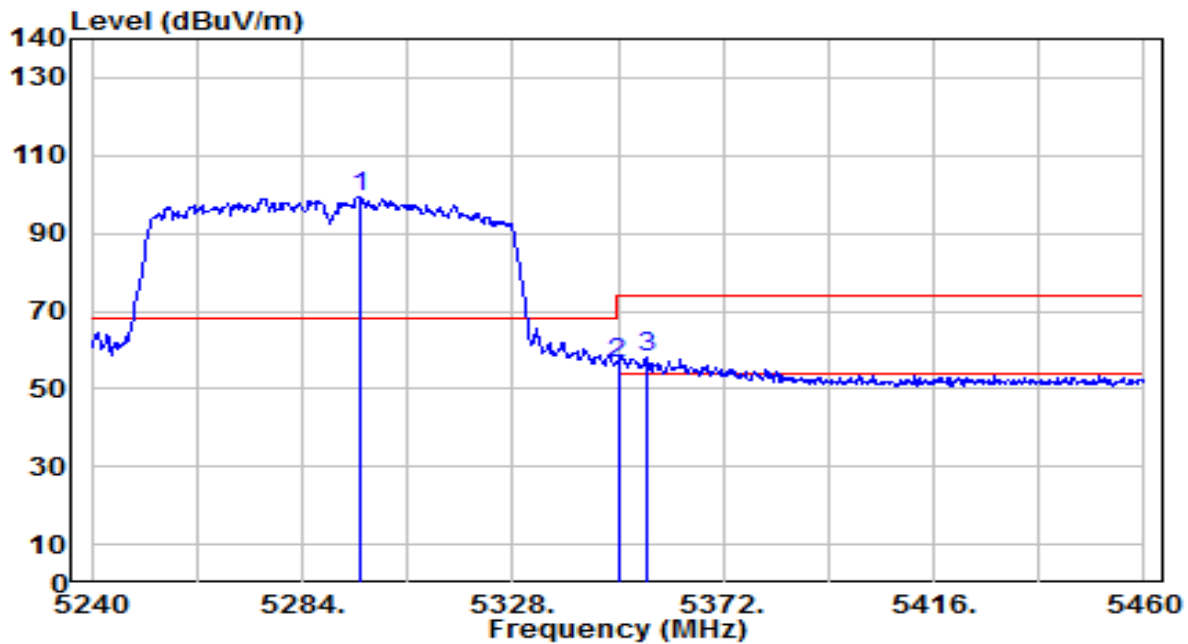


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5295.880	98.72	0.69	99.41	N/A	N/A	240	225	Peak
2	5350.000	55.74	0.59	56.34	-17.66	74.00	240	225	Peak
3	* 5356.160	57.56	0.58	58.14	-15.86	74.00	240	225	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

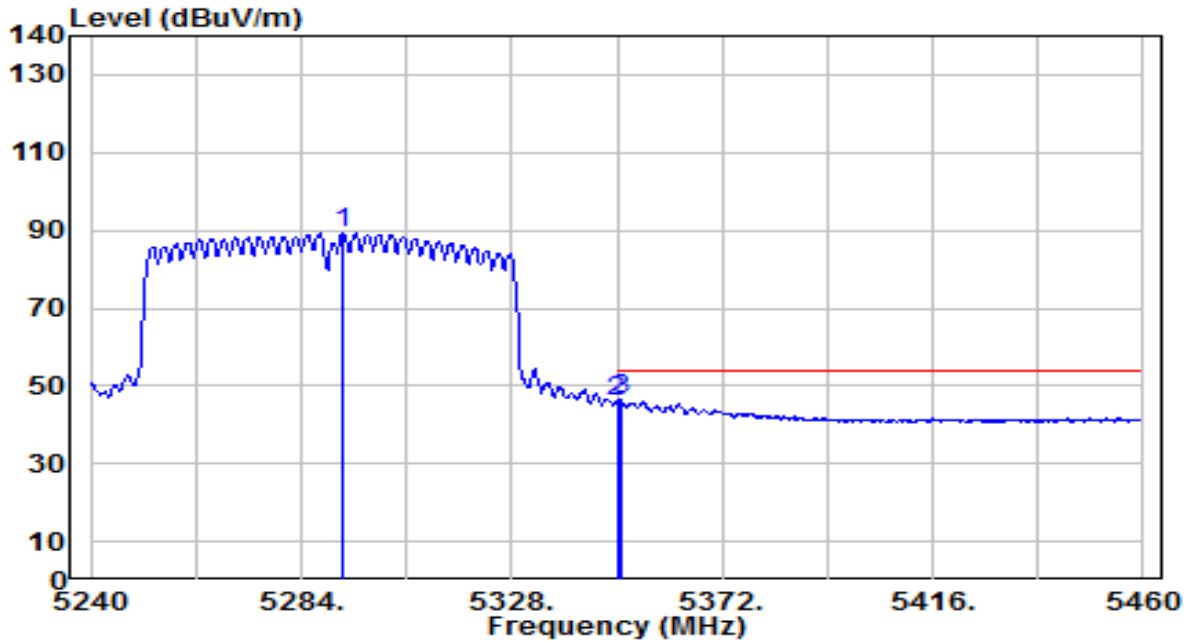


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.800	88.59	0.69	89.29	N/A	N/A	240	225	Average
2	5350.000	45.49	0.59	46.09	-7.91	54.00	240	225	Average
3	* 5350.880	46.16	0.59	46.75	-7.25	54.00	240	225	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

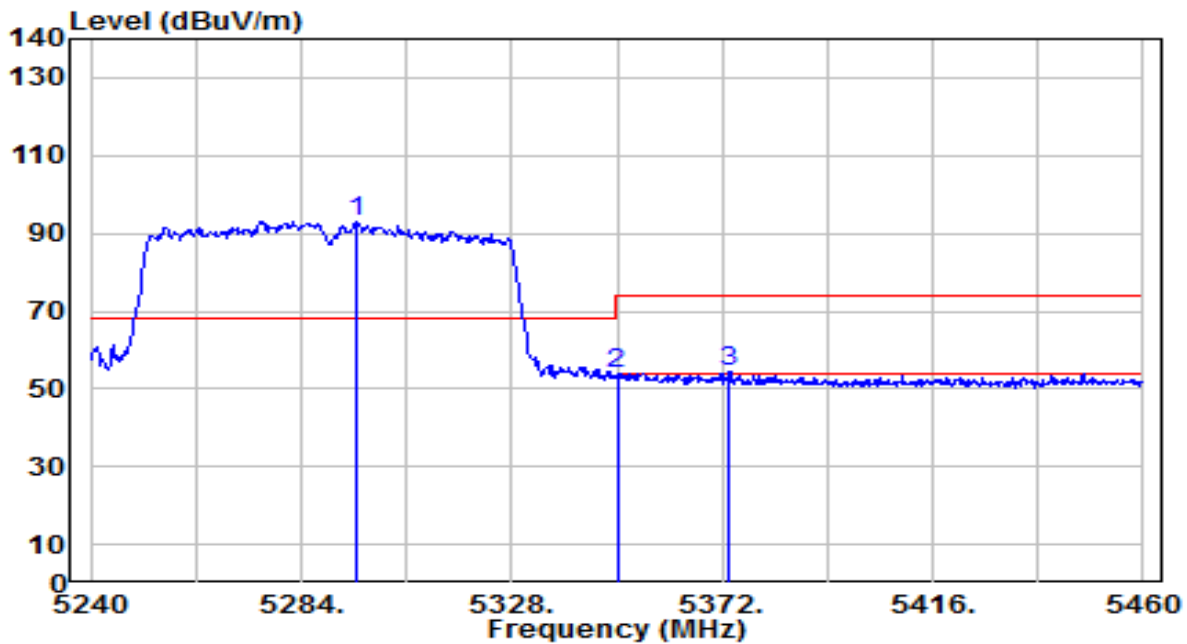


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5295.660	92.17	0.69	92.86	N/A	N/A	230	95	Peak
2	5350.000	53.04	0.59	53.63	-20.37	74.00	230	95	Peak
3	* 5373.540	53.89	0.55	54.45	-19.55	74.00	230	95	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band2_TX_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

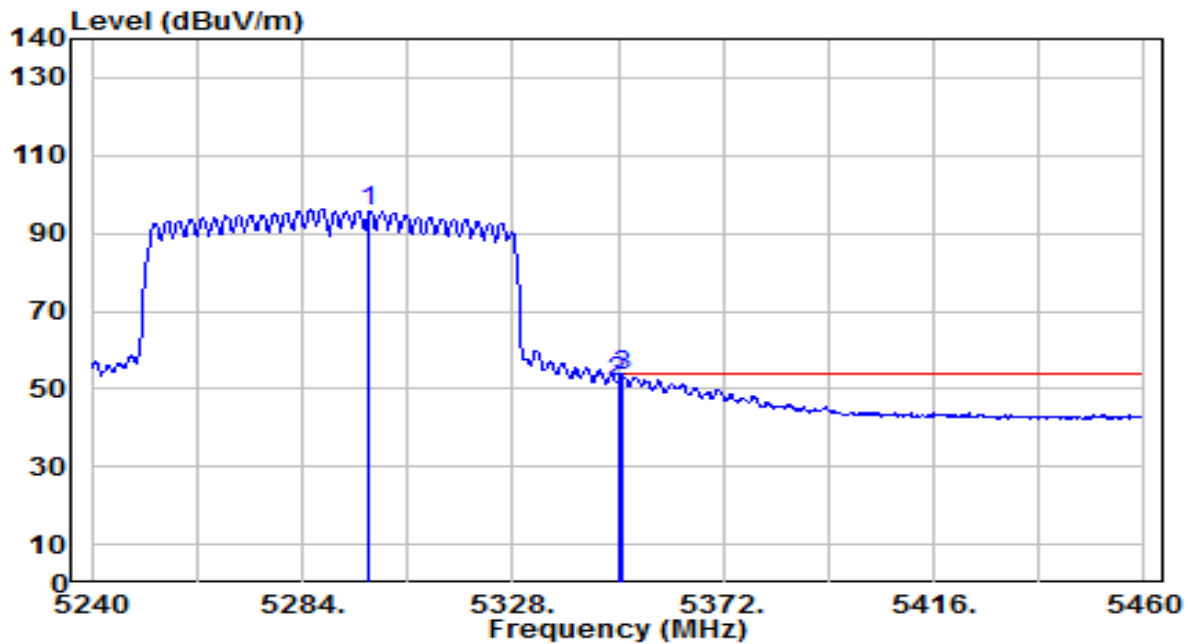


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.080	95.17	0.69	95.86	N/A	N/A	230	95	Average
2	5350.000	51.39	0.59	51.99	-2.01	54.00	230	95	Average
3	* 5351.100	52.86	0.59	53.45	-0.55	54.00	230	95	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

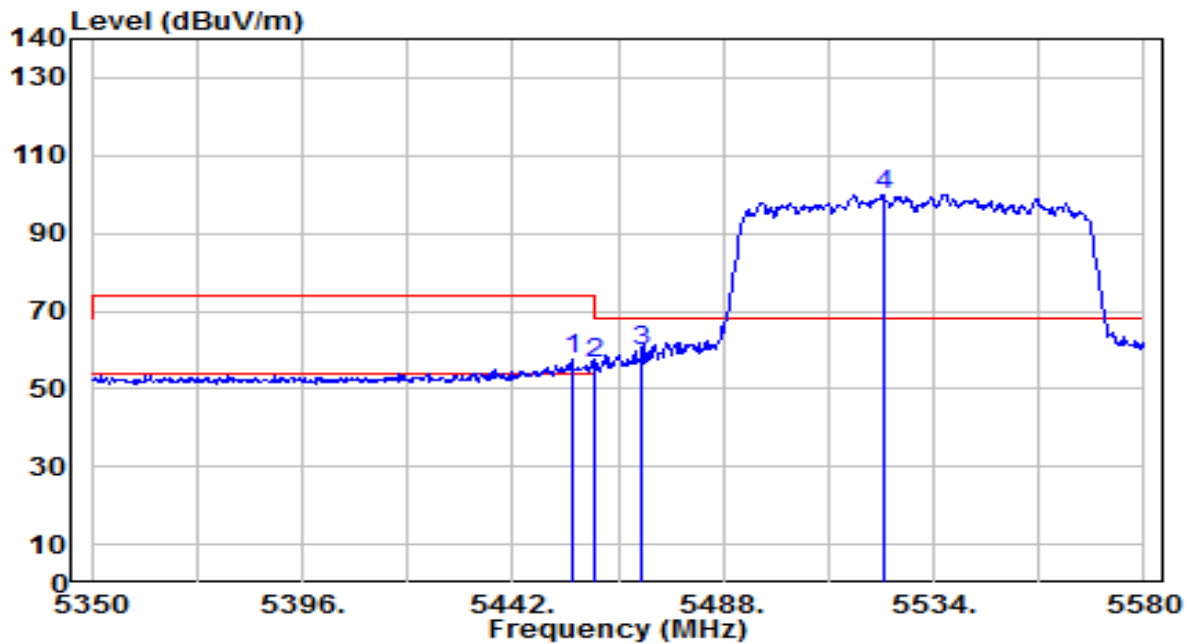


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.880	56.78	0.74	57.52	-16.48	74.00	250	205	Peak
2	5460.000	55.98	0.76	56.74	-17.26	74.00	250	205	Peak
3	* 5470.000	58.70	0.80	59.50	-8.70	68.20	250	205	Peak
4	5522.960	98.88	1.03	99.91	N/A	N/A	250	205	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

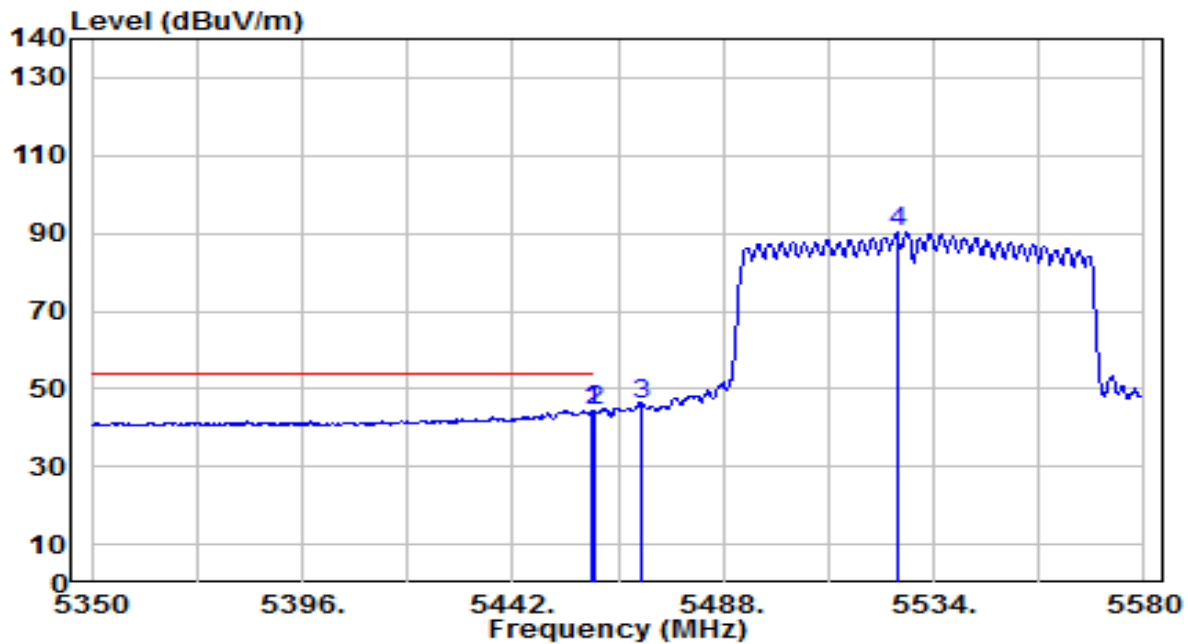


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5459.020	43.63	0.76	44.39	-9.61	54.00	250	205	Average
2	5460.000	43.48	0.76	44.24	-9.76	54.00	250	205	Average
3	5470.000	45.37	0.80	46.17	N/A	N/A	250	205	Average
4	5525.950	89.11	1.05	90.16	N/A	N/A	250	205	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

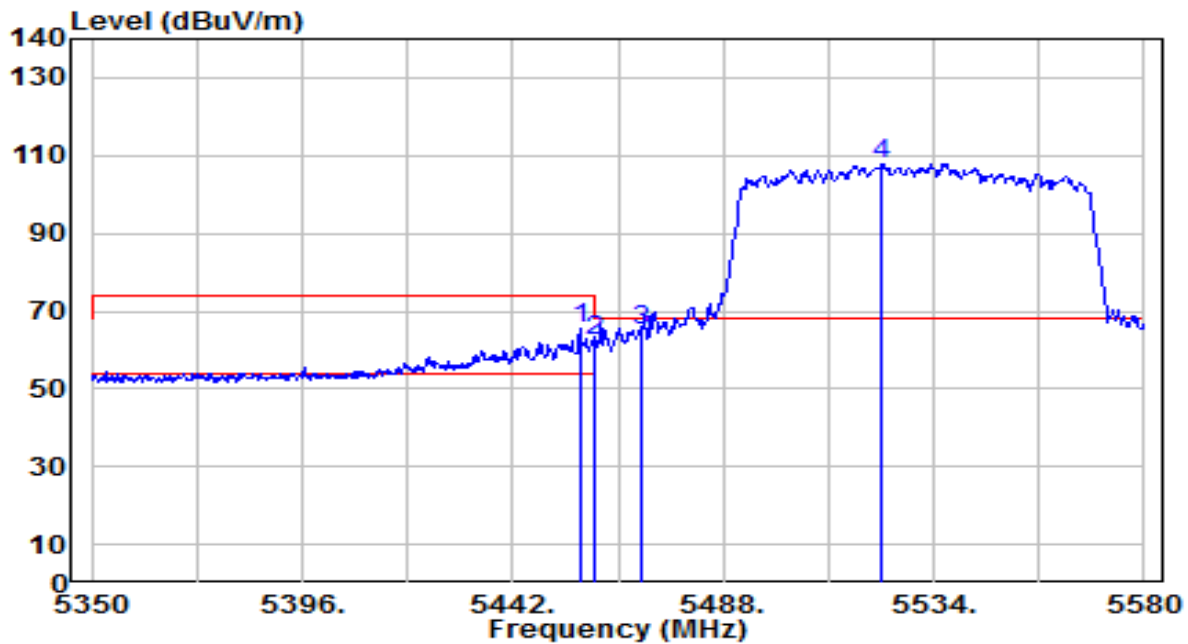


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.720	65.02	0.75	65.76	-8.24	74.00	235	90	Peak
2	5460.000	61.64	0.76	62.40	-11.60	74.00	235	90	Peak
3	* 5470.000	64.40	0.80	65.20	-3.00	68.20	235	90	Peak
4	5522.730	106.66	1.03	107.70	N/A	N/A	235	90	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band3_TX_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

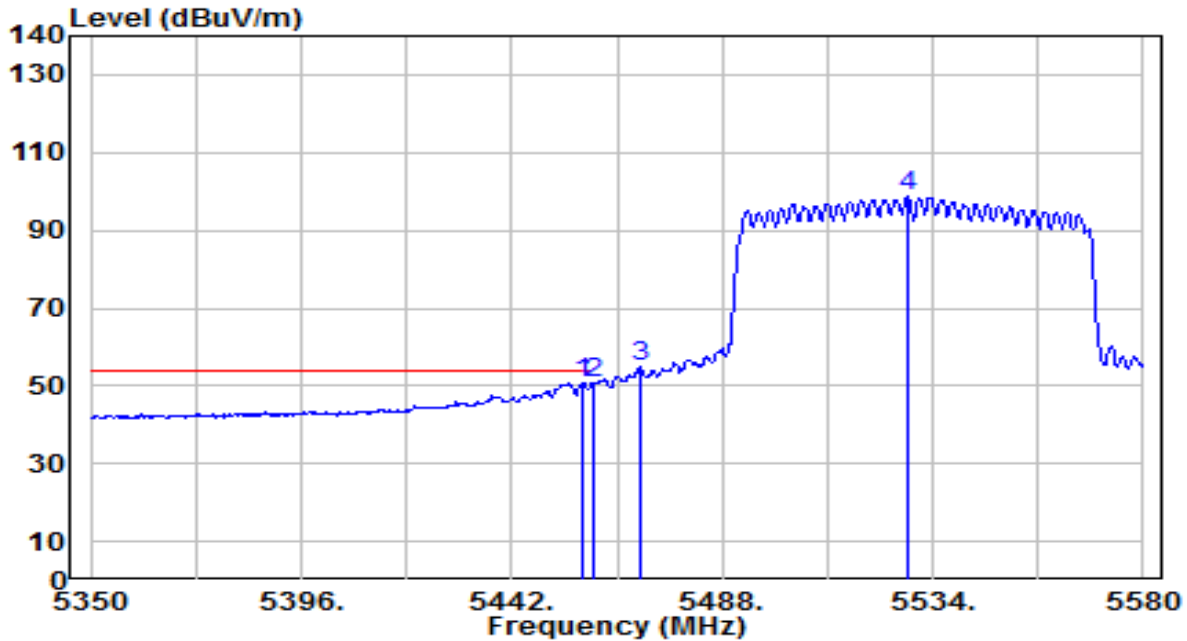


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5457.640	50.19	0.75	50.94	-3.06	54.00	235	90	Average
2	5460.000	49.92	0.76	50.68	-3.32	54.00	235	90	Average
3	5470.000	53.96	0.80	54.76	N/A	N/A	235	90	Average
4	5528.480	97.61	1.06	98.67	N/A	N/A	235	90	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier (dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading (dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band4_TX_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

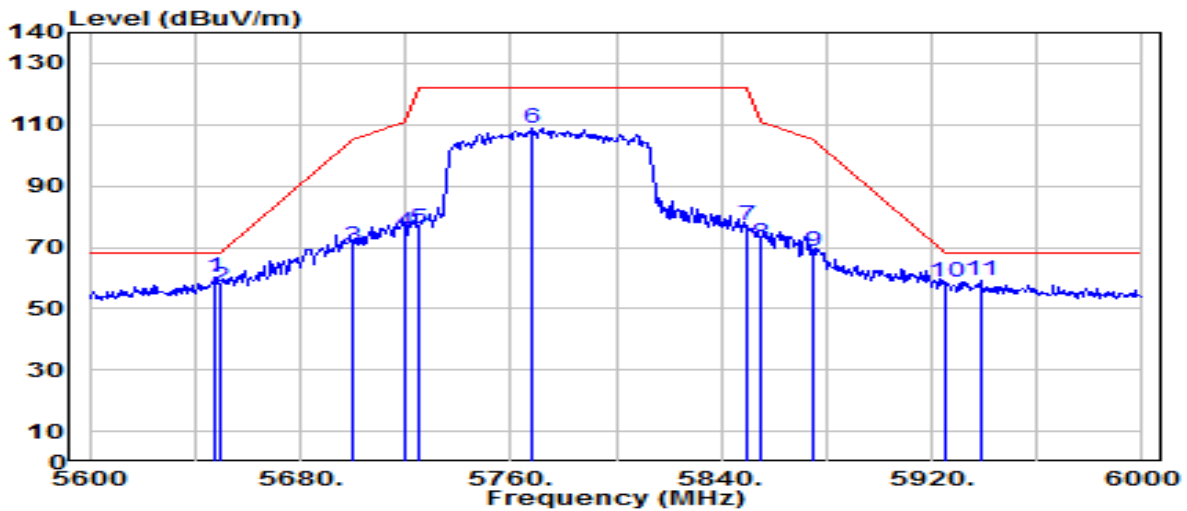


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5648.000	58.78	1.58	60.35	-7.85	68.20	245	110	Peak
2	5650.000	55.37	1.59	56.96	-11.24	68.20	245	110	Peak
3	5700.000	68.46	1.79	70.24	-34.96	105.20	245	110	Peak
4	5720.000	73.35	1.87	75.21	-35.59	110.80	245	110	Peak
5	5725.000	73.96	1.89	75.85	-46.35	122.20	245	110	Peak
6	5768.000	106.76	2.06	108.82	N/A	N/A	245	110	Peak
7	5850.000	74.61	2.27	76.88	-45.32	122.20	245	110	Peak
8	5855.000	69.05	2.28	71.33	-39.47	110.80	245	110	Peak
9	5875.000	66.35	2.31	68.66	-36.54	105.20	245	110	Peak
10	5925.000	56.01	2.38	58.39	-9.81	68.20	245	110	Peak
11	5938.400	56.58	2.41	58.99	-9.21	68.20	245	110	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_Band4_TX_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

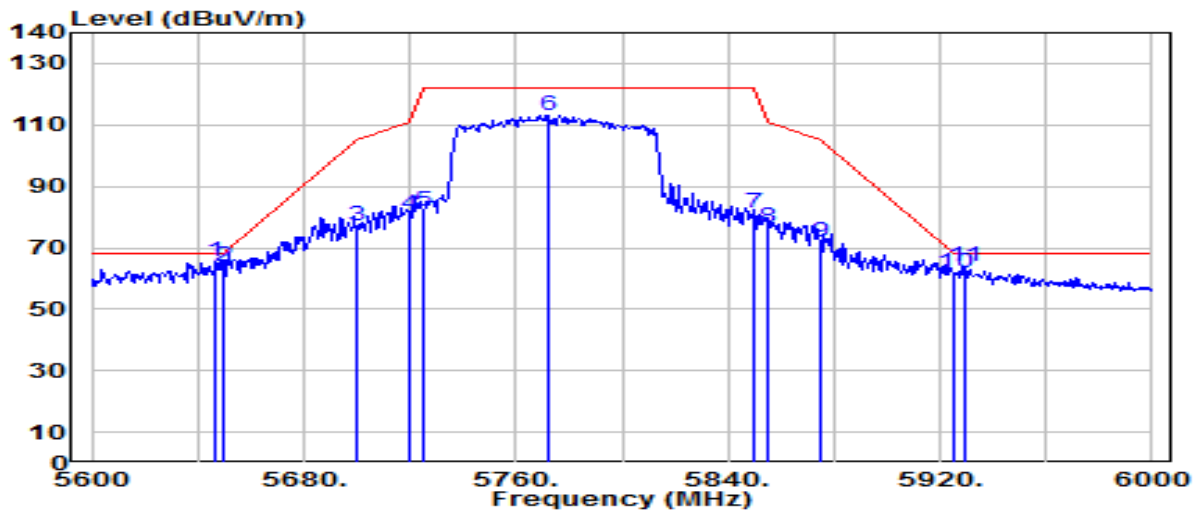

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5646.400	63.84	1.57	65.41	-2.79	68.20	170	275	Peak
2	5650.000	62.29	1.59	63.88	-4.32	68.20	170	275	Peak
3	5700.000	75.10	1.79	76.88	-28.32	105.20	170	275	Peak
4	5720.000	79.06	1.87	80.93	-29.87	110.80	170	275	Peak
5	5725.000	80.08	1.89	81.97	-40.23	122.20	170	275	Peak
6	5772.000	111.21	2.08	113.29	N/A	N/A	170	275	Peak
7	5850.000	79.02	2.27	81.29	-40.91	122.20	170	275	Peak
8	5855.000	74.49	2.28	76.77	-34.03	110.80	170	275	Peak
9	5875.000	69.29	2.31	71.60	-33.60	105.20	170	275	Peak
10	5925.000	59.21	2.38	61.59	-6.61	68.20	170	275	Peak
11	5929.200	61.45	2.39	63.84	-4.36	68.20	170	275	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.9. AC Conducted Emissions Measurement

### 7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


### 7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.


### 7.9.3. Test Setup

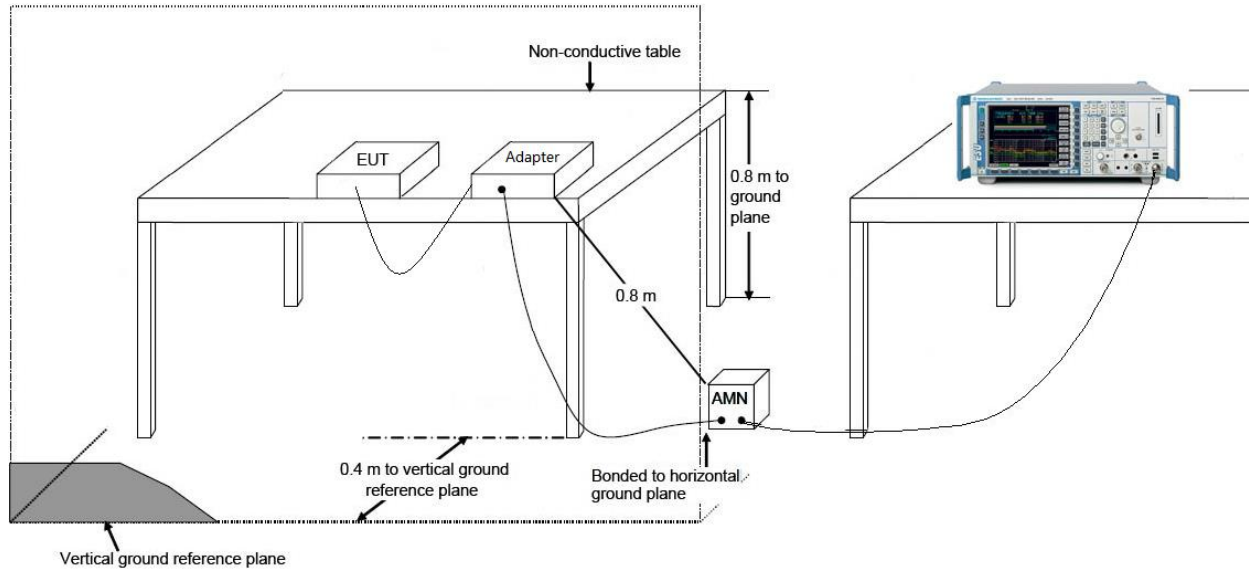



### 7.9.4. Test Result

EUT	Dual Band ONT	Date of Test	2022-11-22
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-HT20_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

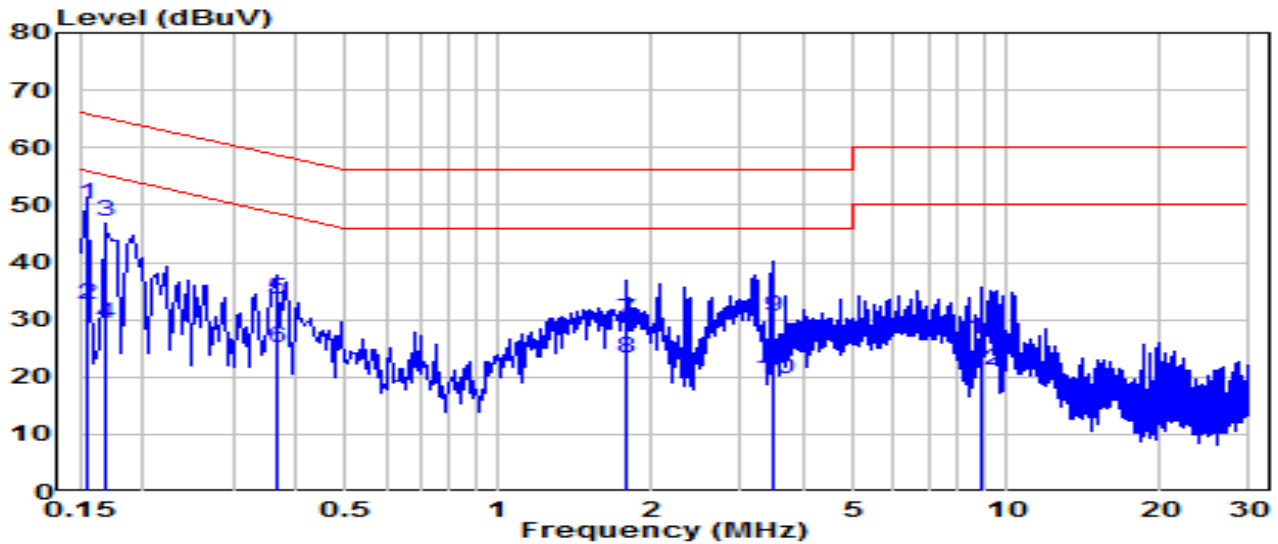


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.154	40.50	9.62	50.12	-15.64	65.75	QP
2	*	0.154	23.05	9.62	32.67	-23.09	55.75	Average
3		0.168	37.54	9.62	47.16	-17.90	65.06	QP
4		0.168	19.81	9.62	29.43	-25.63	55.06	Average
5		0.366	23.79	9.63	33.43	-25.17	58.59	QP
6		0.366	15.32	9.63	24.95	-23.64	48.59	Average
7		1.792	20.06	9.69	29.75	-26.25	56.00	QP
8		1.792	13.65	9.69	23.34	-22.66	46.00	Average
9		3.453	20.86	9.72	30.58	-25.42	56.00	QP
10		3.453	10.02	9.72	19.74	-26.26	46.00	Average
11		8.983	16.60	9.84	26.44	-33.56	60.00	QP
12		8.983	11.41	9.84	21.25	-28.75	50.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Dual Band ONT	Date of Test	2022-11-22
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-HT20_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

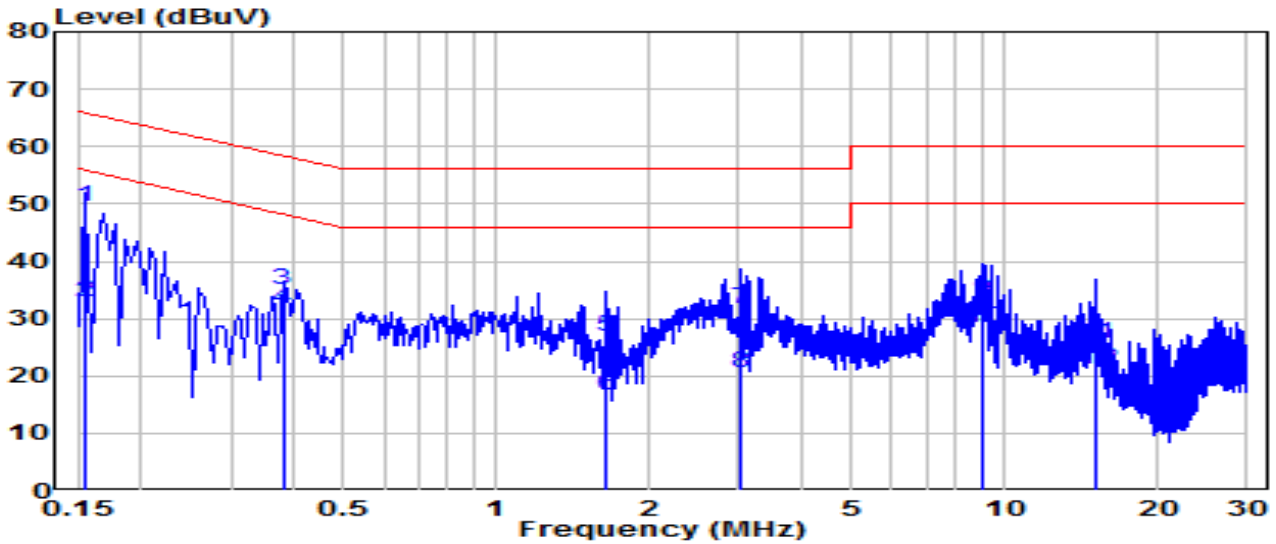


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.154	39.88	9.62	49.50	-16.26	65.75	QP
2	*	0.154	23.22	9.62	32.84	-22.92	55.75	Average
3		0.379	25.48	9.63	35.11	-23.18	58.29	QP
4		0.379	22.06	9.63	31.69	-16.60	48.29	Average
5		1.648	17.16	9.68	26.85	-29.15	56.00	QP
6		1.648	6.85	9.68	16.53	-29.47	46.00	Average
7		3.034	21.86	9.71	31.57	-24.43	56.00	QP
8		3.034	10.87	9.71	20.58	-25.42	46.00	Average
9		9.100	23.26	9.85	33.11	-26.89	60.00	QP
10		9.100	18.65	9.85	28.50	-21.50	50.00	Average
11		15.080	15.65	9.93	25.58	-34.42	60.00	QP
12		15.080	11.12	9.93	21.05	-28.95	50.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Dual Band ONT	Date of Test	2022-11-22
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-HT20_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 240V/60Hz

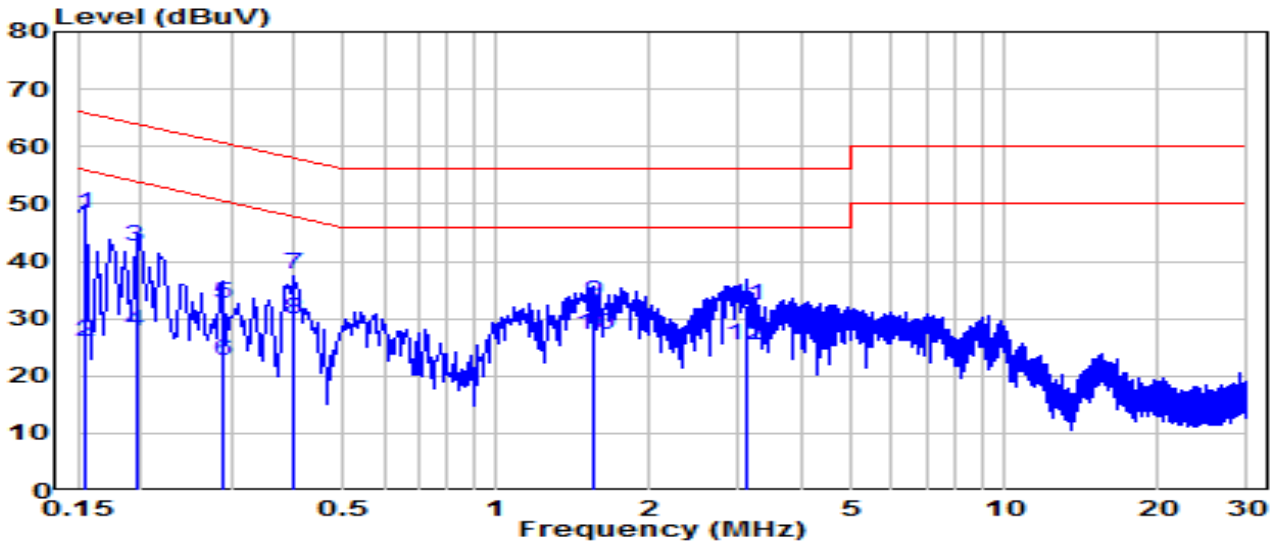


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.154	38.62	9.62	48.24	-17.51	65.75	QP
2	*	0.154	16.22	9.62	25.84	-29.91	55.75	Average
3		0.195	32.98	9.62	42.60	-21.22	63.82	QP
4		0.195	18.03	9.62	27.66	-26.16	53.82	Average
5		0.289	23.01	9.63	32.64	-27.90	60.54	QP
6		0.289	12.90	9.63	22.53	-28.01	50.54	Average
7		0.397	28.03	9.63	37.66	-20.24	57.91	QP
8		0.397	20.10	9.63	29.74	-18.17	47.91	Average
9		1.545	23.25	9.68	32.93	-23.07	56.00	QP
10		1.545	17.41	9.68	27.09	-18.91	46.00	Average
11		3.088	22.45	9.71	32.16	-23.84	56.00	QP
12		3.088	15.74	9.71	25.45	-20.55	46.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Dual Band ONT	Date of Test	2022-11-22
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-HT20_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 240V/60Hz

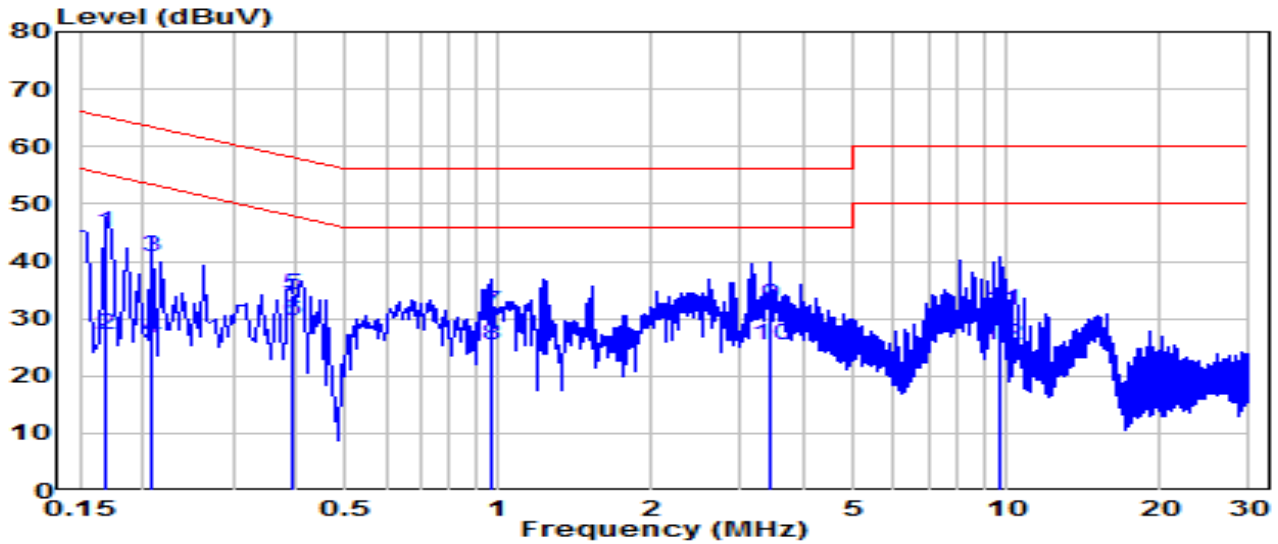

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	35.31	9.62	44.93	-20.13	65.06	QP
2	0.168	17.61	9.62	27.23	-27.82	55.06	Average
3	0.208	31.05	9.62	40.67	-22.59	63.27	QP
4	0.208	16.87	9.62	26.50	-26.77	53.27	Average
5	* 0.393	24.56	9.63	34.20	-23.80	58.00	QP
6	* 0.393	20.01	9.63	29.65	-18.35	48.00	Average
7	0.964	21.44	9.67	31.10	-24.90	56.00	QP
8	0.964	15.58	9.67	25.25	-20.75	46.00	Average
9	3.426	22.62	9.72	32.34	-23.66	56.00	QP
10	3.426	15.54	9.72	25.26	-20.74	46.00	Average
11	9.725	21.57	9.86	31.44	-28.56	60.00	QP
12	9.725	15.39	9.86	25.25	-24.75	50.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

————— The End —————