

WHA YU INDUSTRIAL CO., LTD. (HEAD OFFICE)
 TAI HWA ELECTRONIC CO., LTD.(CHINA)
 SHANGHAI HUA YU ELECTRONIC CO., LTD.(CHINA)
 AEON TECH CO., LTD. (CHINA)

SPECIFICATION FOR APPROVAL

CUSTOMER: 中磊電子股份有限公司


PART NAME: RF Antenna Assembly

PART NO.:

REVISION:

W. Y. P/NO.: C147-510117-A

REV.: X1

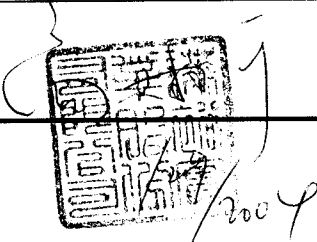	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
APPROVED BY :		
DATE :		

WHA YU GROUP

WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)

譚裕實業股份有限公司

Address: #70 Shui Li Road, Hsin Chu City, Taiwan, R.O.C.

Tel:+886-3-5714225(REP.)

Fax:+ 886-3-5713853 · + 886-3-5723600

TAI HWA ELECTRONC CO., LTD. (CHINA)

台 權 電 業 制 品 廠

Address: Pak Ho District, Hiu Street Town, Dong Guan City, Guangdong, China

Tel: + 86-769-5599375 · + 86-769-5912375

Fax: + 86-769-5599376

HUA HONG INTERNATIONAL LTD.

華 弘 國 際 有 限 公 司

Rm.1103A,President Commercial Centre,608 Nathan Road,Mong Kok,Kowloon,Hong Kong

Tel: + 86-852-27712210

Fax: + 86-852-23843747

SHANGHAI HUA YU ELECTRONIC CO., LTD. (CHINA)

上 海 譚 裕 電 子 有 限 公 司

Address:3586,Wai Qing Song Road, Qing Pu County, Shanghai China

Tel: + 86-21-59741348 · + 86-21-59744101~4

Fax: + 86-21-59741347

SU ZHOU AEON TECH CO., LTD. (CHINA)

蘇 州 華 廣 電 通 有 限 公 司

Address:Limin North Road, LiLi Town,LiLi Industrial Park,LinHu Economic Zone

Wujiang City.,Jiangsu Province,China

Tel: + 86-512-63627980

Fax: + 86-512-63627981

INDEX

<i>Item</i>	<i>Content</i>	<i>Page</i>
1.	天線規格表 1
2.	成品圖 2
3.	測試報告 3~5
4.	Cable 規格 6~9
5.	天線桿套材質特性 10~16
6.	天線固定座材質特性 17~20

RF Antenna Cable Assembly

Specification

1. Electrical Properties :


- 1.1 Frequency Rang..... 2.4GHz ~ 2.5GHz
- 1.2 Impedance 50Ω Nominal
- 1.3 VSWR 1.92 Max.
- 1.4 Return Loss..... -10dB Maximum
- 1.5 Electrical Wave..... $1/2 \lambda$ Diople
- 1.6 Gain..... 2 dBi
- 1.7 Admitted Power..... 1W

2. Physical Properties :

- 2.1 Cable..... RG-178 Coaxial Cable
- 2.2 Antenna Cover..... TPE
- 2.3 Antenna Base..... PC
- 2.4 Antenna Base..... PBT
- 2.5 Operating Temp. $-20^{\circ}\text{C} \sim +65^{\circ}\text{C}$
- 2.6 Storage Temp. $-30^{\circ}\text{C} \sim +75^{\circ}\text{C}$
- 2.7 Color BLACK
- 2.8 Connector SMA Plug Reverse


CG-

REV	DATE	DESCRIPTION
X1	11/29-2004	New Issue

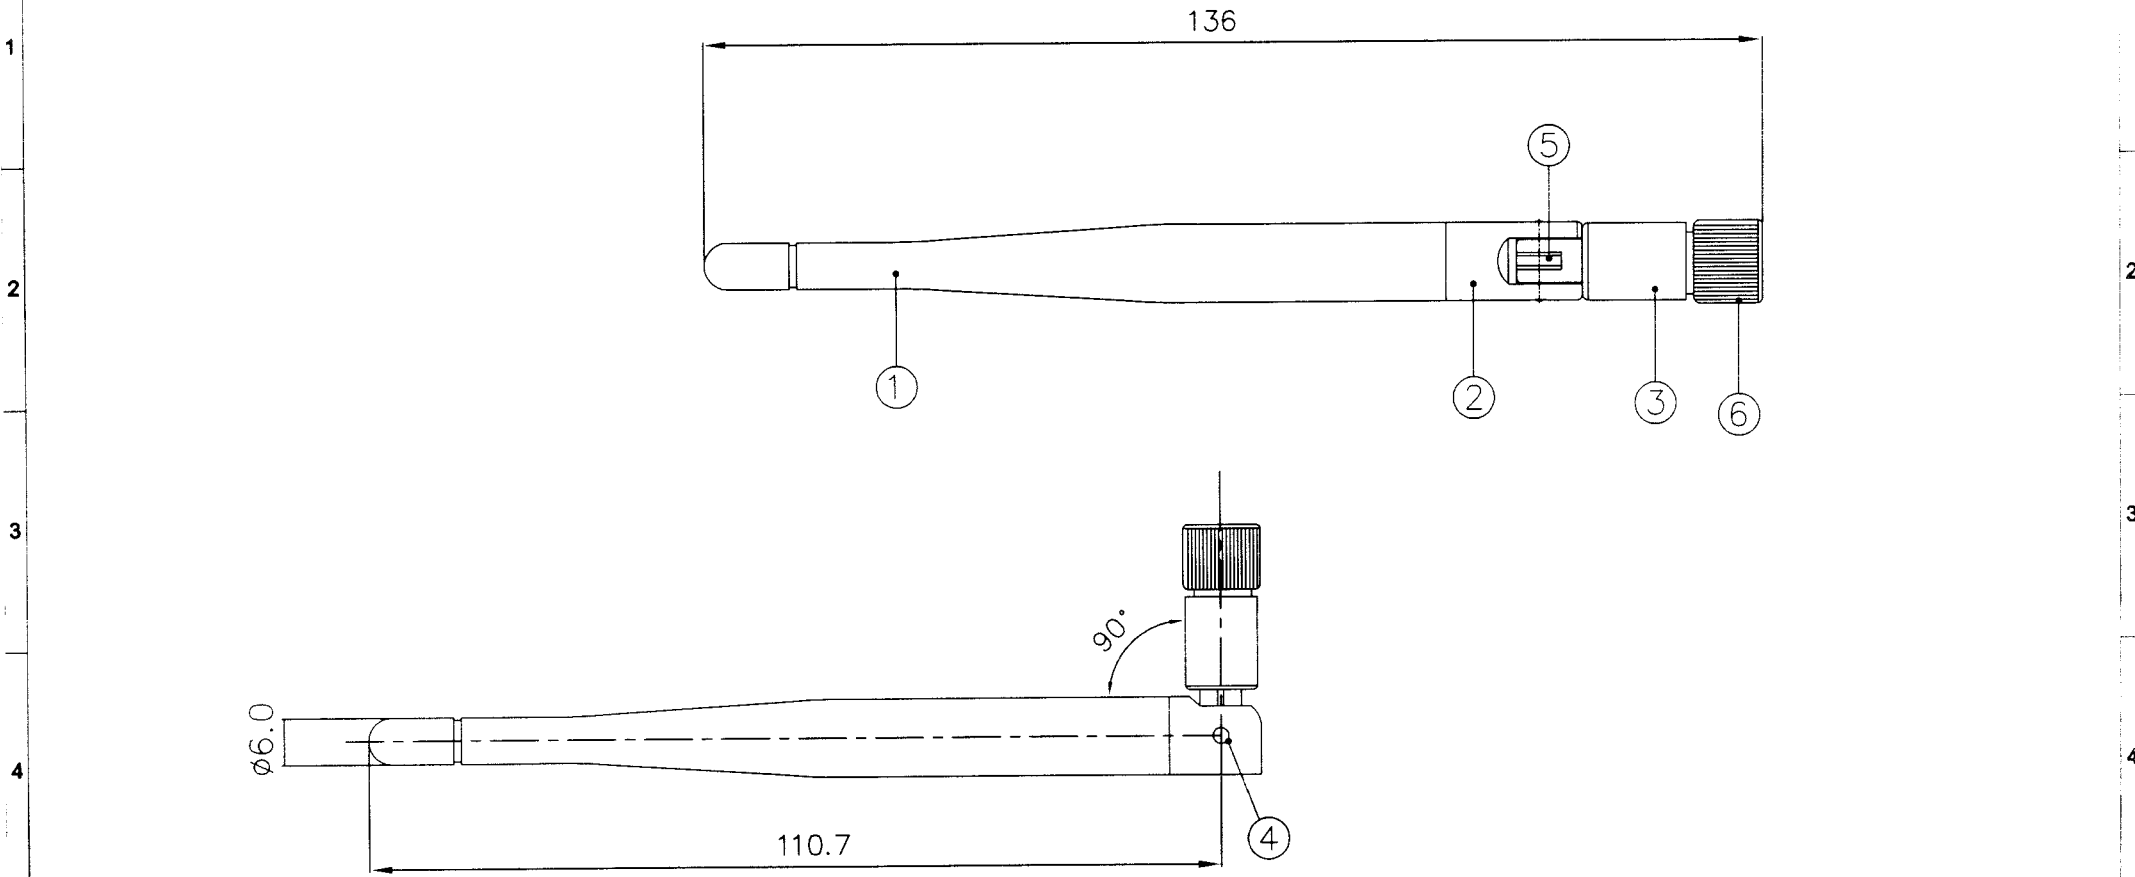

NO	DESCRIPTION	QTY	REMARK
6	Connector	SMA Plug Reverse	1
5	Cable	RG-178 Cable	1
4	Rivet	Brass , Cr Plated (Black)	2
3	Antenna Base	PBT ; Color : Black	1
2	Antenna Base	PC ; Color : Black	1
1	Antenna Body	TPE ; Color : Black	1

CUSTOMER'S SIGNATURE	XX	±3.0	APPROVED	CUSTOMER: 中磊電子股份有限公司
	X	±2.0	<i>[Signature]</i>	
	X	±1.0	CHECKED	PART NO :
	XX	±0.5	<i>[Signature]</i>	PARTNAME: RF Antenna Assembly
	.XXX	±0.1	DRAWING	W.Y P/NO : C147-510117-A
			<i>[Signature]</i>	REV UNIT FILE :
			<i>[Signature]</i>	X1 m/m SHEET : 1/1


Wha Yu INDUSTRIAL CO.,LTD.
譚裕實業股份有限公司

THIS DRAWING, AND ITS INHERANT DESIGN CONCEPTS, ARE THE PROPERTY OF WHA YU AND AS SUCH MAY NOT BE COPIED, REPRODUCED, OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF WHA YU.




RF Antenna Assembly

SPEC : 2.4GHz

P/NO : C147-510117-A

Model type : Collocation PCB

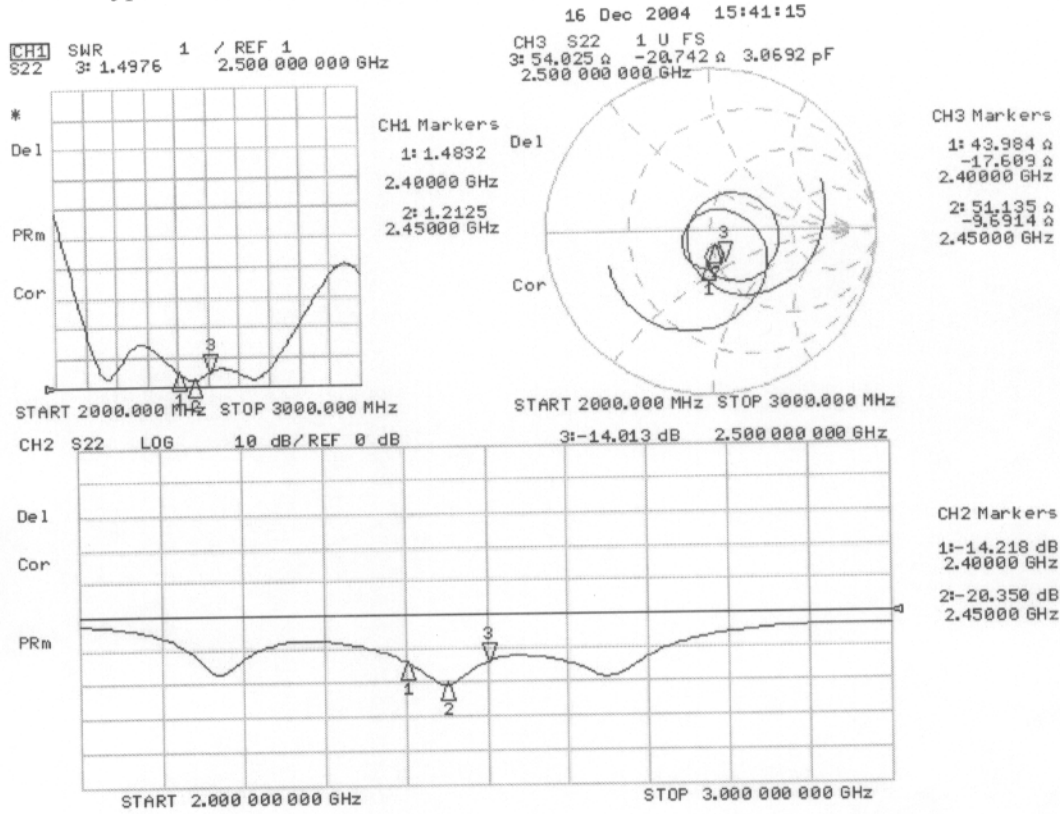




華裕實業股份有限公司

WHA YU INDUSTRIAL CO., LTD
RF Antenna Assembly

SPEC : 2.4GHz

P/NO : C147-510117-A

Model type : Free space

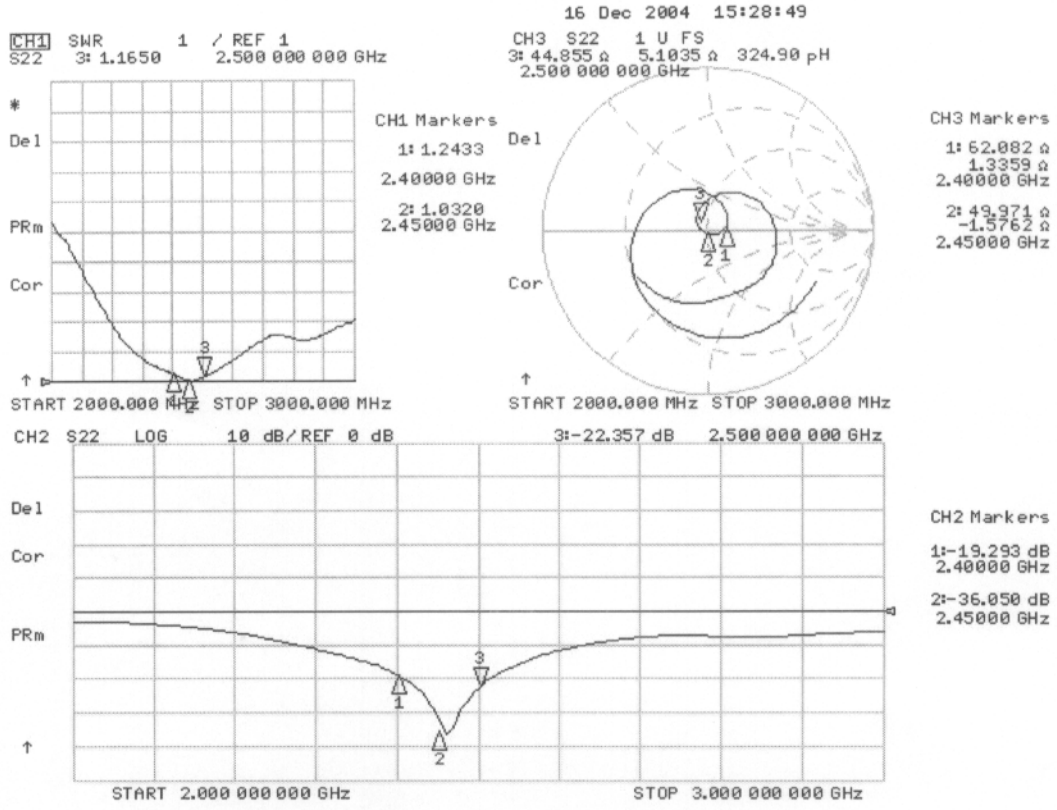

12/17/2004



華裕實業股份有限公司


WHA YU INDUSTRIAL CO., LTD

Far-field amplitude of C147-510117-A-V(12.16).nsi

2.400000 GHz,,FF

2.450000 GHz,2.450000 GHz,

2.500000 GHz,2.500000 GHz,

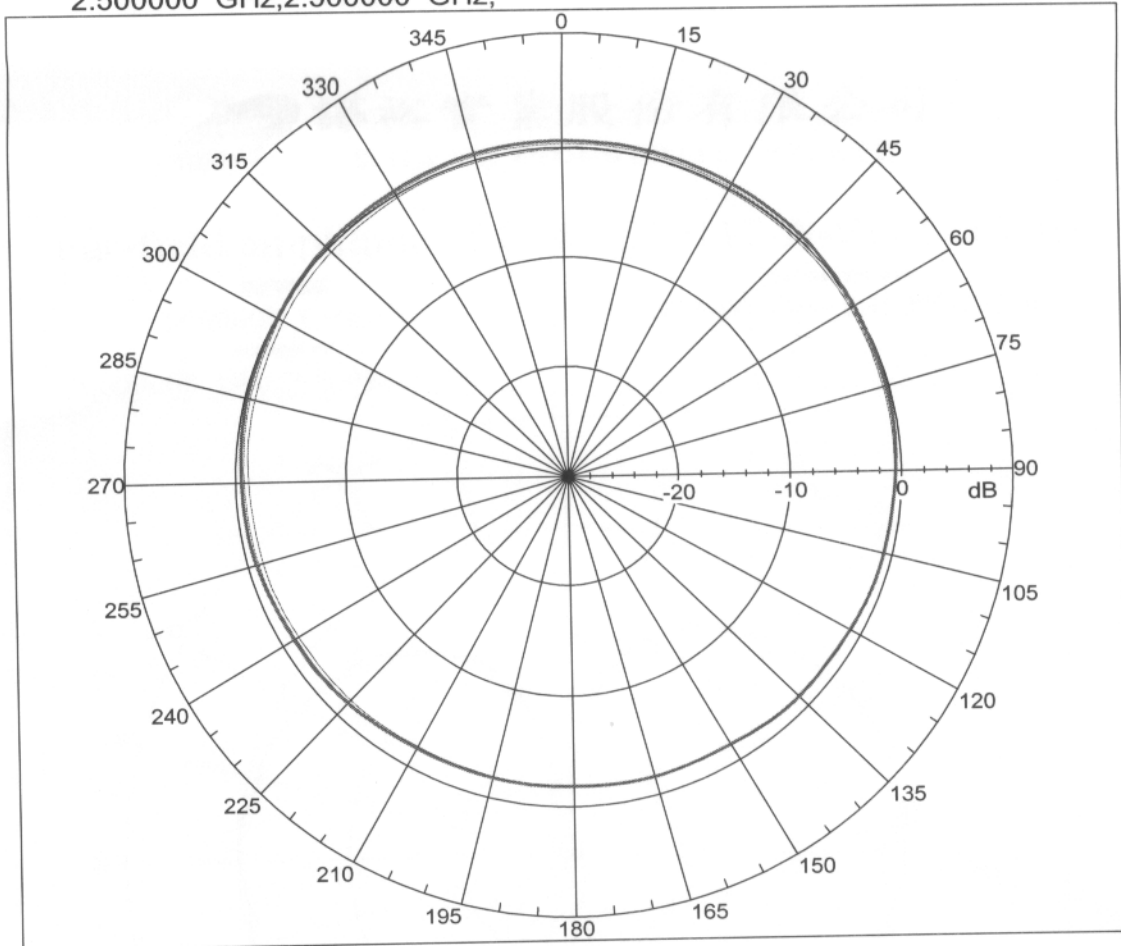



華裕實業股份有限公司


WHA YU INDUSTRIAL CO., LTD

Far-field amplitude of C147-510117-A-H(12.16).nsi

2.400000 GHz,,FF

2.450000 GHz,2.450000 GHz,

2.500000 GHz,2.500000 GHz,

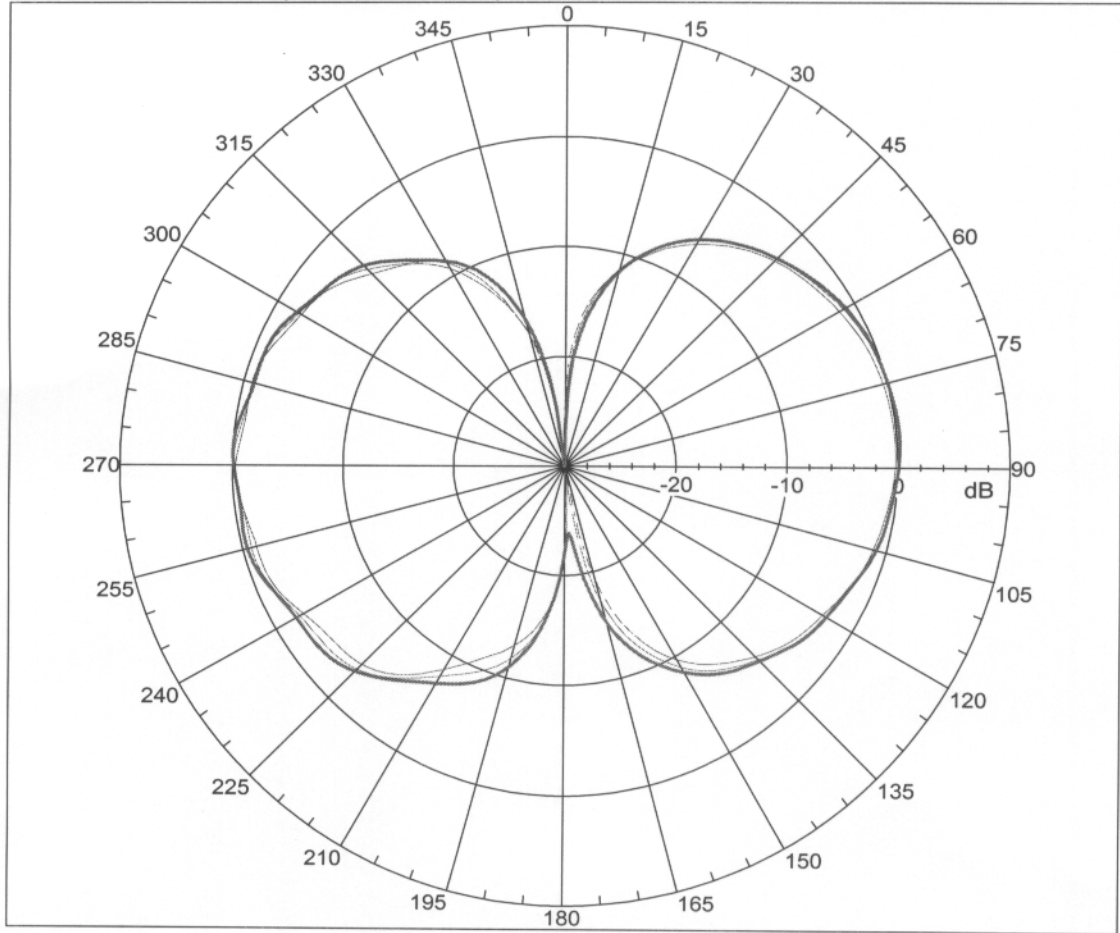


RG 178 B/U	FEP INSULATED HIGH-FREQUENCY COAXIAL CABLE	PAGE	1 / 2
PRODUCT STANDARD		ISSUED	21 Oct. 2003
		REVISED	

I - Scope


This specification presents a FEP insulated high-frequency coaxial cable AWG 30, 1.8 mm O.D. for internal wiring of electronic equipment, such as Computer / Notebook with wireless communication systems.

II - Construction

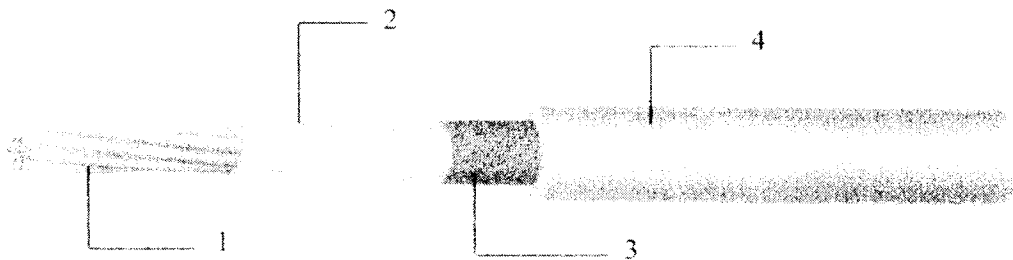

Item		Unit	Details
1. Inner Conductor	Material	—	CP-AG
	Composition	No./mm	AWG 30 or 7 × 0.1
	Dia. (approx.)	mm	0.305
2. Dielectric	Material	—	Extruded FEP
	Nom. O.D.	mm	0.84 ± 0.05
	Color	—	Natural
3. Outer Conductor	Material	—	Silver coated copper
	Composition	—	Braided (16 / 3 / 0.1)
	Dia. (approx)	mm	1.29 ± 0.07
4. Jacket	Material	—	Extruded FEP
	Dia.	mm	1.80 ± 0.08
	Color	—	Standard color is Light Orange

Note :



MADE BY
APPROVALS


Shen Bin Chang

RG 178 B/U	FEP INSULATED HIGH-FREQUENCY COAXIAL CABLE	PAGE	2 / 2
PRODUCT STANDARD		ISSUED	21 Oct. 2003
		REVISED	

III – Characteristics

Item	Unit	Specified Value	Note
Temperature Rating	°C	-55 ~ +200	
Voltage Lasting	V	1000	
Dielectric strength	—	Dielectric core: No breakdown at AC 3 kv for 0.2 sec.	Spark test
		Jacket: No breakdown at AC 3 kv for 0.2 sec.	Spark test
Characteristic Impedance	Ω	50 ± 2	TDR method
Capacitance	pF / ft	29.4	
Attenuation. (Max.)	dB/100ft	16.0	100.0 MHz
		33.0	400.0 MHz
		52.0	1.0 GHz
		94.0	3.0 GHz
Approx. Weight	g / m	7.68	

Note :



MADE BY
APPROVALS


Shen Bin Chao

Mil-C-17 Coaxial Cable QPL Approved


Single braid




Double braid

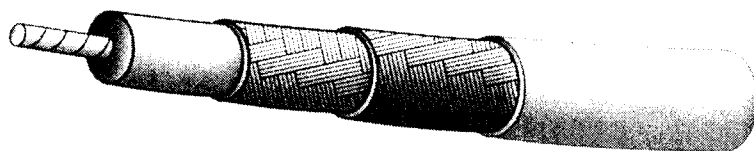

Triax

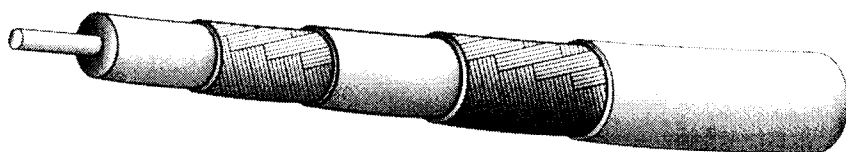

Twinax

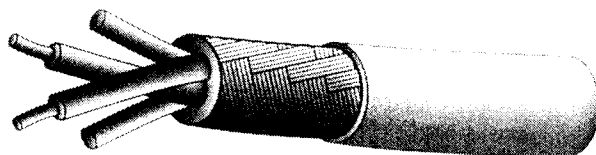

Harbour supplies a complete line of high temperature, high performance QPL approved MIL-C-17 coax cables for the military, commercial and industrial applications. The specific M17 constructions referenced are manufactured in accordance with the most recent revision of the MIL-C-17 specification. The MIL-C-17 specification defines complete physical and electrical characteristics for each M17 part number, including dimensional parameters, dielectric materials, shield construction, maximum attenuation, and VSWR levels.

▼ *VSWR Sweep Testing*

When selecting a 50 ohm coaxial cable, constructions with VSWR requirements are recommended. Manufacturing and sweep testing cables with concern for VSWR ensures a quality cable free of spikes over the referenced frequency range. (Note the test frequencies specified in the electrical characteristics section.)

Precision PTFE Dielectrics

All of the high temperature, high performance coax cables listed have PTFE dielectrics with high dielectric strength and low capacitance in proportion to the dielectric constant. All PTFE dielectrics are manufactured with tolerances tighter than the MIL-C-17 specification to ensure uniformity of electrical characteristics, especially impedance, attenuation and VSWR.

Tape wrapped PTFE Constructions

Harbour also manufactures PTFE tape wrapped cables to a previous revision of the MIL-C-17 specification. These constructions can withstand operating temperatures up to 250° C. versus 200° C. for FEP jacketed cables. Also, PTFE tape wrapped cables are generally more flexible than their FEP jacketed counterparts.

UL Approvals

All of Harbour's M17 part numbers manufactured to the MIL-C-17 specification may be ordered with UL and ETL approvals.

Mil-C-17 Coaxial Cables

Physical Characteristics:

M17 Number	Center Conductor	PTFE Dielectric Diameter	Shield	Jacket	Overall Diameter	Minimum Recommended Bend Radius	Operating Temp. (%C)	Weight (lbs./MFT)	Comments
M17/60-RG142	.037" SCCS	.116"	SPC(2)	FEP	.195"	1.0"	-55 +200	43.0	
M17/93-RG178	.0120"(7/004)"SCCS	.033"	SPC	FEP	.071"	0.4"	-55 +200	6.3	
M17/93-00001	.0120"(7/004)"SCCS	.033"	SPC	PFA	.071"	0.4"	-55 +230	6.3	M17/93-RG178 w/extended temp. r.
M17/94-RG179	.0120"(7/004)"SCCS	.063"	SPC	FEP	.100"	0.4"	-55 +200	10.8	
M17/95-RG180	.0120"(7/004)"SCCS	.102"	SPC	FEP	.141"	0.7"	-55 +200	19.8	
M17/110-RG302	.0253"SCCS	.146"	SPC	FEP	.202"	1.0"	-55 +200	40.0	
M17/111-RG303	.037"SCCS	.116"	SPC	FEP	.170"	0.9"	-55 +200	31.0	
M17/112-RG304	.059"SCCS	.185"	SPC(2)	FEP	.280"	1.4"	-55 +200	94.0	
M17/113-RG316	.0201"(7/0067)"SCCS	.060"	SPC	FEP	.098"	0.5"	-55 +200	12.2	
M17/127-RG393	.094"(7/0312)"JSC	.285"	SPC(2)	FEP	.390"	2.0"	-55 +200	165.0	
M17/128-RG400	.0384"(19/008)"JSC	.116"	SPC(2)	FEP	.195"	1.0"	-55 +200	50.0	
M17/131-RG403	.0120"(7/004)"SCCS	.033"	SPC(2)	FEP(2)	.116"	0.6"	-55 +200	15.0	Triaxial M17/96-RG
M17/152-00001	.0201"(7/0067)"SCCS	.060"	SPC(2)	FEP	.114"	0.6"	-55 +200	18.5	Double shielded M17/113-RG316
M17/158-00001	.037"SCCS	.116"	SPC(2)	FEP	.195"	1.0"	-55 +200	56.0	Unswpt M17/60-RG
M17/169-00001	.0120"(7/004)"SCCS	.033"	SPC	FEP	.071"	0.4"	-55 +200	6.3	Unswpt M17/93-RG
M17/170-00001	.037"SCCS	.116"	SPC	FEP	.170"	0.9"	-55 +200	39.0	Unswpt M17/111-RG
M17/172-00001	.0201"(7/0067)"SCCS	.060"	SPC	FEP	.098"	0.5"	-55 +200	11.5	Unswpt M17/113-RG
M17/174-00001	.094"(7/0312)"SCCS	.285"	SPC(2)	FEP	.390"	2.0"	-55 +200	175.0	Unswpt M17/127-RG
M17/175-00001	.0384"(19/008)"JSC	.116"	SPC(2)	FEP	.390"	1.0"	-55 +200	50.0	Unswpt M17/128-RG
M17/176-00002	.0235"(19/005)"SPA(2)	.042"	SPA	PFA	.129"	0.6"	-55 +230	18.0	Controlled impedance twinax
PTFE Tape Wrap Jacketed RG Cables									
RG 187 A/U	.0120"(7/004)SCCS	.063	SPC	PTFE	.100"	0.5"	-55 +250	10.0	Flexible, 250 C. rat
RG 188 A/U	.0201"(7/0067)SCCS	.060	SPC	PTFE	.100"	0.5"	-55 +250	11.0	Flexible, 250 C. rat
RG 195 A/U	.0120"(7/004)SCCS	.102	SPC	PTFE	.141"	0.7"	-55 +250	18.0	Flexible, 250 C. rat
RG 196 A/U	.0120"(7/004)SCCS	.034	SPC	PTFE	.067"	0.4"	-55 +250	6.0	Flexible, 250 C. rat

Electrical Characteristics:

M17 Number	Impedance (ohms)	Capacitance (pF/ft)	Max. Operating Voltage (RMS)	Maximum attenuation (dB/100ft) @						Max Frequency (GHz)
				100 MHz	400 MHz	1 GHz	3 GHz	5 GHz	10 GHz	
M17/60-RG142	50 +/- 2	29.4	1900	5.5	11.7	19.0	35.0	48.0	-	12.4
M17/93-RG178	50 +/- 2	29.4	1000	16.0	33.0	52.0	94.0	-	-	3.0
M17/93-00001	50 +/- 2	29.4	1000	16.0	33.0	52.0	94.0	-	-	3.0
M17/94-RG179	75 +/- 3	19.4	1200	-	21.0	-	-	-	-	-
M17/95-RG180	95 +/- 5	16.4	1500	-	17.0	-	-	-	-	-
M17/110-RG302	75 +/- 3	19.4	2300	-	8.0	-	26.0	-	-	-
M17/111-RG303	50 +/- 2	29.4	1900	5.9	8.0	15.0	28.0	-	-	-
M17/112-RG304	50 +/- 3	29.4	3000	2.7	6.4	11.1	22.0	30.0	-	8.0
M17/113-RG316	50 +/- 2	29.4	1200	11.0	21.0	38.0	58.0	-	-	3.0
M17/127-RG393	50 +/- 2	29.4	2500	2.4	5.0	8.8	18.0	24.6	37.0	11.0
M17/128-RG400	50 +/- 2	29.4	1900	4.5	10.5	17.0	38.0	50.0	78.0	12.4
M17/131-RG403	50 +/- 2	29.4	1000	-	37.0	-	-	-	-	10.0
M17/152-00001	50 +/- 2	29.4	1200	11.5	24.0	40.0	75.0	110.0	170.0	12.4
M17/158-00001	50 +/- 2	29.4	1900	-	9.5	-	-	-	-	-
M17/169-00001	50 +/- 2	29.4	1000	-	29.0	-	-	-	-	-
M17/170-00001	50 +/- 2	29.4	1900	-	8.6	-	-	-	-	-
M17/172-00001	50 +/- 2	29.4	1200	-	21.0	-	-	-	-	-
M17/174-00001	50 +/- 2	29.4	2500	-	5.0	-	-	-	-	-
M17/175-00001	50 +/- 2	29.4	1900	-	10.5	-	-	-	-	-
M17/176-00001	77 +/- 7	19.0	1000	-	-	-	-	-	-	-
PTFE Tape Wrap Jacketed RG Cables										
RG 187 A/U	75 +/- 3	19.4	1200	-	21.0	-	-	-	-	-
RG 188 A/U	50 +/- 2	29.4	1200	11.0	21.0	38.0	58.0	-	-	-
RG 195 A/U	95 +/- 5	15.4	1500	-	17.0	-	-	-	-	-
RG 196 A/U	50 +/- 2	29.4	1000	-	29.0	-	-	-	-	-

*Maximum Impedances are those as referenced on individual data sheets of the Mil-C-17 specification. No values are given for unswept constructions as the specification recommends these cables should not be used above 400 MHz. (All figures referenced above are nominal unless otherwise specified.)

Arnitel
polyether esters
polyetherester
esters de polyether

天線桿套材質特性表



Units Einheiten Unites	EM400	EM460	EL550	EL630	EL740	PL380
	1.12	1.16	1.20	1.23	1.27	1.18
°C	195	185	202	212	221	197
μm/m.k	220	160	180	140	110	150
°C	\	\	110	115	120	\
°C	130	150	180	200	200	145
°C	\	50	85	115	150	\
%	0.30	0.30	0.20	0.20	0.15	0.40
%	0.75	0.70	0.55	0.60	0.90	7.0
*	HB	HB	HB	HB	HB	HB
Mpa	55	110	220	375	900	60
Mpa	4.0	7.1	13.2	20.2	26.9	3.5
Mpa	5.4	9.0	15.7	23	22.6	5.2
Mpa	8.4	11.4	16.6	22.0	26.3	8.5
Mpa	17	21	32	40	45	16
%	700	800	600	600	360	450
kJ/m ²	NB	NB	NB	NB	NB	NB
kJ/m ²	NB	NB	NB	NB	200	NB
kJ/m ²	NB	NB	NB	NB	9	NB
kJ/m ²	NB	NB	20	4	4	NB
	38	45	55	63	74	38
MV/m	\	\	\	\	\	\
Ω.cm	5*10 ¹⁴	10 ¹⁴	10 ¹⁴	10 ¹⁴	10 ¹²	10 ¹²
Ω	>10 ¹³	>10 ¹⁴	>10 ¹⁴	>10 ¹⁴	>10 ¹⁰	>10 ¹³
\	4.1	\	\	3.8	\	4.7
\	4.0	4.4	4.0	3.4	3.3	4.4
x10 ¹¹	10	\	\	3.8	\	310
x10 ¹⁴	170	350	400	350	300	350
\	800	800	600	600	600	800
\	600	600	600	800	800	600

Aritel

2.2 Product coding

The structure of the Aritel productcodes is illustrated with the following example:

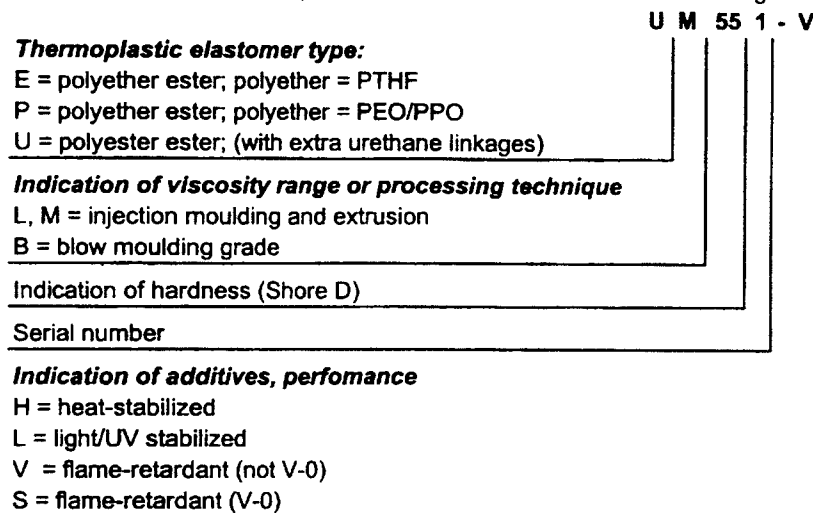


Figure 2.2: Aritel product coding

2.3 Product portfolio

The Aritel productrange is available with a hardness from 38 to 74 Shore D. The general Aritel grades are shown in table 2.2. In order to enhance the flexibility of the portfolio a set of masterbatches (a.o. for heat, UV, etc) are on offer (refer to § 2.4).

Because of the development of these masterbatches heat stabilised Aritel P is suggested for application areas where thermo-oxidative stability is an issue. For applications where colour and UV stability is required, the Aritel E range is advised.

	<i>Shore D</i>					
	38	40	46	55	63	74
Aritel E		EM400	EM460	EL550 EM550	EL630 EM630	EL740 EM740
Aritel P	PL380		PL460	PL580 PM581		
Aritel U				UM551 UM551-V UM552 UM552-V	UM622	

Table 2.2: Aritel productrange for general purpose

Besides these multi-purpose grades, specialty grades can be offered for specific purposes and/or application areas. These grades are not intended for regular sales and are therefore restricted. Permission from marketing is needed before sampling is initiated.

	Aritel E	Aritel P	Aritel U
Automotive			
• CVJ boots	EB460 EB463 EB464		
• Boyplugs		PL380-M0	
Extrusion			
• Roofing foil	EM402-L		

Table 2.3: Examples of specialty grades

Arnitel® EL630/EM630

2.8.31 General:

Arnitel is the brand name of a series polyester based thermoplastic elastomers. These polymers combine excellent processability with good elastomeric properties between -40 and 200°C. Arnitel EL630 and EM630 are excellent materials for injection moulding and extrusion applications respectively. The chemical structure of Arnitel EL630/EM630 is shown below.

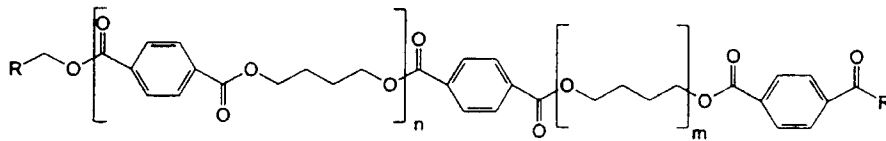


Figure 2.9: Chemical structure of Arnitel EL630/EM630.

Another way of writing the structure of Arnitels is shown below in Figure 2.




Figure 2.10: Simplified structure of Arnitel EL630/EM630.

Arnitel EL630/EM630 is TOSCA registered (including DSL-Canada) under CAS 37282-12-5

2.8.32 Thermal properties:

• **Modulus-temperature behaviour:**

The materials have a glass transition at circa -40°C and a typical melting point at 213°C. The modulus-temperature behaviour is shown in graph 2.76, for comparison, accompanied by other Arnitel E types.

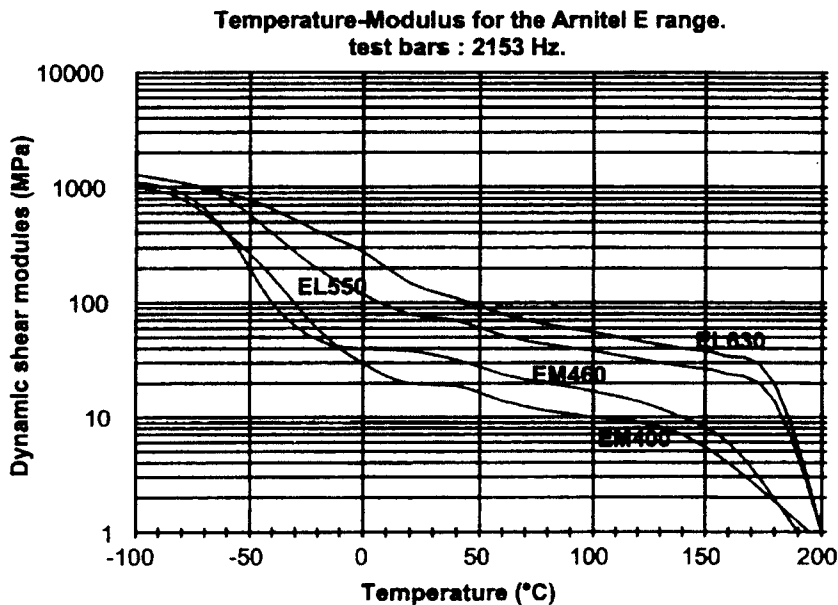

Graph 2.76: Modulus-temperature behaviour of Arnitel EL630/EM630.

Arnitel® EL630/EM630

Although information on performance at higher temperatures may be extracted from the above shown graph, a Vicat or HDT are shown in table 2.29.

analysis	SI unit	typical data	test method
Vicat A	(°C)	200	ISO 306/A
Vicat B	(°C)	125	ISO 306/B
HDT-B	(°C)	115	ISO 75-1


Table 2.29: Vicat and HDT data on Arnitel® EL630 and EM630

Arnitel EL630 and EM630 have a melting point of 213°C as found in the second heating curve of a DSC. The polymer will crystallize at 155°C using a 20°C/min cooling rate. The thermal expansion coefficient of Arnitel EL630/EM630 and is $140 \cdot 10^{-4} \mu\text{m/m.K}$.

• **Heat aging:**

Arnitel EL630/EM630 shows an optimum between heat resistance and colour stability. Heat aging for EL630/EM630 is under test at this moment, however the data will be between EL550 and EL740. Arrhenius curves of thermo-oxidative heat aging are shown in graph 2.77. Criterium chosen is retention of 50% original elongation at break.

Heat aging of Arnitel E40D, 46D, 55D and 74D.
Natural products, Arrhenius plot.

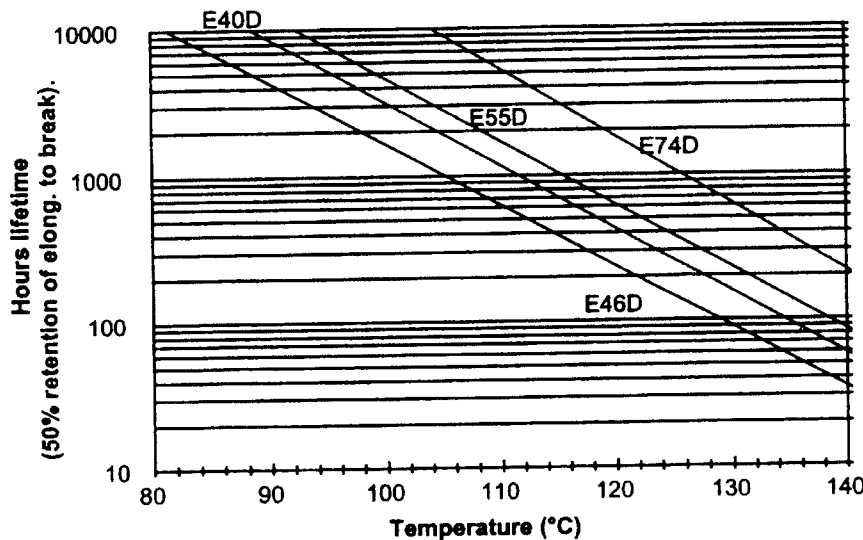

Graph 2.77: Heat stability for Arnitel E-range.

Heat ageing can be improve using a stabilisation masterbatch, however for heat stabilisation the P-range is preferred for it's excellence in performance. These data can be found in the Arnitel properties summary or an Arnitel P datasheet.

2.8.33 Processing and Handling:

Arnitel EL630/EM630 is a polyester with a density of 1.12 g/cm^3 according ISO 1183. Due to the polyester nature of these materials it is of major importance to store the material dry prior to processing. Materials packaged in sealed packaging should have a moisture content lower then 500 ppm. The polymer will contain 0.12% moisture in 50% RH and 0.58% water after saturation in water. Both numbers are in equilibrium. If samples have become wet during storage a drying step of 24 hours 120°C (or 6 hours 140°C) prior to use will prevent degradation of the material during processing combined with an eventual loss of properties. The air or nitrogen will have to have a dew point of at least -30°C.

Arnitel® EL630/EM630

• **Processing:**

Arnitel EL630/EM630 shows a single melting point at 195°C in DSC. Processing conditions are shown in the table below.

polymer	zone 1	zone 2	zone 3	additional	melt	mold
EL630	225	230	235	235	225-235	20-50
EM630	225	230	235	235	235	50


All temperatures are in °C.

Table 2.30: Processing conditions for Arnitel EL630 and Arnitel EM630.

• **Rheology:**


The temperature depending melt viscosity of Arnitel EL630/EM630 and are shown below in graph 2.80 and 2.81 respectively.

**Shear rate dependent of the melt viscosity of Arnitel EL630.
Effect of melt temperature.**

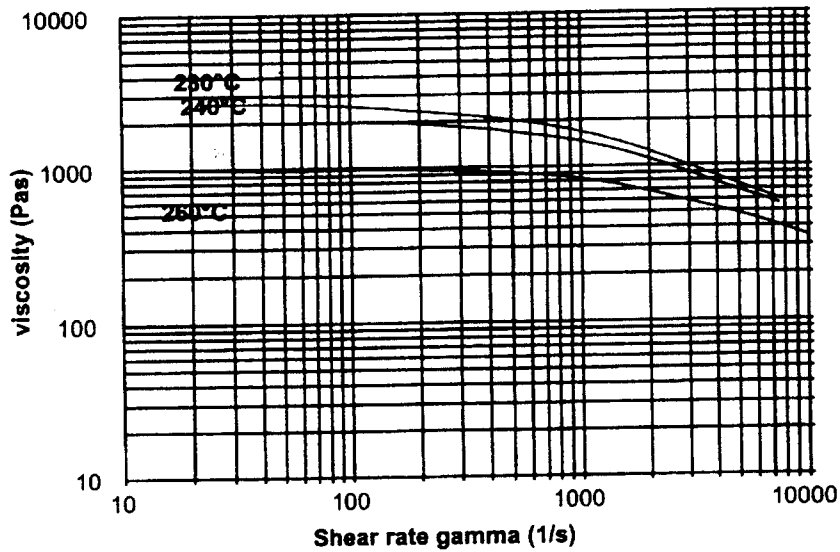

Arnitel® EL630/EM630

Capillar melt viscosity of Arnitel EM630.
240, 250 and 260°C.

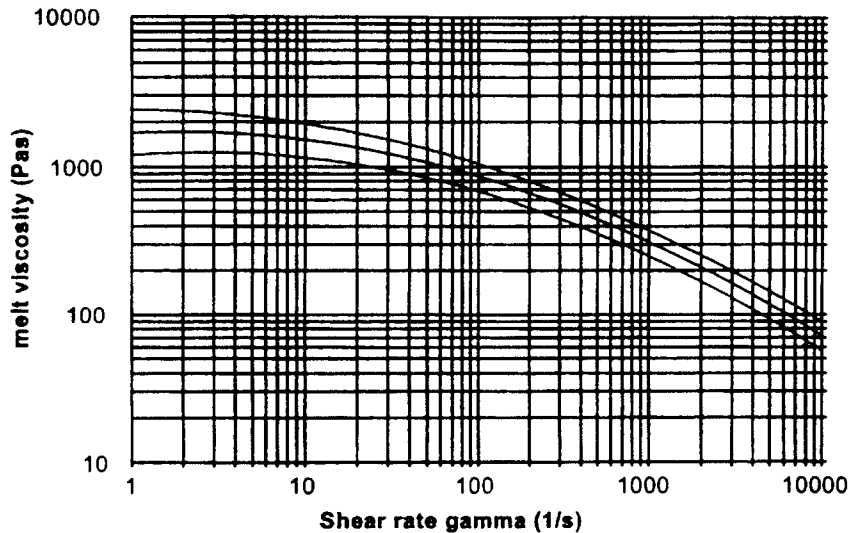

Graph 2.80 and 2.81: Temperature dependency of the melt viscosity for Arnitel EL630 and EM630.

The MFI values are shown in table 2.31.

		EL630	EM630	
MFI 230°C	g/10 min		7	ISO 1133
MFI 240°C	g/10 min	30		ISO 1133

Table 2.31: MFI for Arnitel EL630/EM630.

• Use of regrind:

Arnitel can readily be recycled. If the MFI of the regrind is up or down to four points higher, 20% can be recycled. A difference of 2 MFI points allows up to 50% of regrind. Obviously the regrind should be dried properly before use.

2.8.34 Mechanical properties:

If Arnitel EL630 or Arnitel EM630 are processed properly the materials will have mechanical properties as shown in table 2.32.

Mechanical property	SI Unit	typical data*		test method
		EL630	EM630	
Hardness	Shore D	63	63	ISO 868
Tensile modulus (1 mm/min)	MPa	330	330	ISO 527
Tensile strength (50 mm/min)	MPa	30	30	ISO 527
Strain at break	%	350	350	ISO 527
Tensile stress at 5% strain	Mpa	11.5	11.5	
Tensile stress at 10% strain	Mpa	15.9	15.9	
Tensile stress at 50% strain	Mpa	17.3	17.3	
Tear strength Graves	KN/m	145	145	DIN53515
Izod notched 23°C (73°F)	KJ/m ²	NB	NB	ISO 180/1A
Izod notched -30°C (-22°F)	KJ/m ²	4	4	ISO 180/1A
Charpy notched 23°C (73°F)	KJ/m ²	NB	NB	ISO 179/1eA
Charpy notched -30°C (-22°F)	KJ/m ²	12	12	ISO 179/1eA

* Data for dry natural materials.

NB: No Break

Table 2.32: mechanical properties of Arnitel® EL630.

Arnitel® EL630/EM630

• **Abrasion:**

Arnitels show good abrasion resistance in both Taber and DIN 53516 abrasion tests. Data are shown in the Arnitel general property overview (also included in the EPIC)

2.8.35 Flame retardancy:

Arnitel EL630 and EM630 show in an ISO1210/A flammability test a burning rate leading to a classification FH-1. Flame retardancy can be improved using a halogenated or halogen free FR masterbatch.

2.8.36 Electrical properties:

Arnitel EL630/EM630 can be used for cable jacketing applications. If the material is in permanent contact with copper a copper stabilisation package should be added. If the copper wires are coated with a tin layer, no stabilisation is necessary. The electrical properties are shown in table 33.

Electrical property	SI Unit	typical data*		test method
		EL630	EM630	
		22	22	IEC 243-1
Dielectric strength	KV/mm	22	22	IEC 243-1
Relative permittivity (ε_r) at 1 kHz	-	4.4	4.4	IEC 250
Dissipation factor (tan δ) at 1kHz	-	0.019	0.019	IEC 250
Comparative tracking Index	-	600	600	IEC 112
Volume resistivity	10¹⁴Ω.cm	1	1	IEC 93
Surface resistivity	10¹⁴Ω	1	1	IEC 93

Table 2.33: Typical electrical properties of Arnitel® EL630 and EM630.

2.8.37 Chemical resistance:

Arnitel EL630 and EM630 are sensitive to strong bases and strong acids, especially at elevated temperatures. In some halogenated hydrocarbons (like tetrachloroethane), the materials (partially) dissolve. For a full review on chemical resistance of Arnitel EL630 and EM630 request the chemical resistance brochure.

• **Hydrolysis**

Like all polyesters Arnitel are sensitive to moisture, however Arnitels are more stable to water than e.g. PET and PBT. graph 2.84 shows the hydrolytic stability of Arnitel EL630 at 100°C and in steam (120°C). For improved hydrolysis stability, using a polycarbodiimid containing masterbatch like Stabaxol® in an option. To maintain all other properties use a masterbatch based on polyester. Data on the Stabaxol stabilised grade are shown in graph 2.85.

■ Panlite L-1250Z

Category	Unit	Test Method	Condition	L-1250Z 100
Melt volume flow rate	cm ³ /10min	ISO 1133	300°C load 1.2kg	8
Density	kg/m ³	ISO 1183	—	1200
Water absorption rate	%	ISO 62	in water 23°C24h	0.2
Light transmission	%	ASTM D 1003	thickness 3mm	88
Refractive index	—	ASTM D 542	—	1.585
Tensile modulus	MPa	ISO 527-1 and ISO 527-2	1mm/min	2400
Tensile stress at yield	MPa		50mm/min	61
Tensile strain at yield	%		50mm/min	6
Nominal tensile strain at break	%		50mm/min	>50
Flexural modulus	MPa	ISO 178	2mm/min	2350
Flexural strength	MPa		2mm/min	93
Charpy impact strength	KJ/m ²	ISO 179	unnotched	NB
			notched	76
Heat deflection temperature	°C	ISO 75-1 and ISO 75-2	1.80MPa	129
			0.45MPa	142
Vicat softening temperature	°C	ISO 306	50°C/h 50N	149
Mold shrinkage	%	In-house method	parallel	0.5~0.7
			vertical	0.5~0.7
Coefficient of linear expansion	× 10 ⁻⁴ /°C	ISO 11359-2	parallel	0.7
			vertical	0.7
Specific inductive capacity	—	IEC 60250	100Hz	3.1
	—		1MHz	3
Dielectric loss tangent	× 10 ⁻⁴	IEC 60250	100Hz	10
	× 10 ⁻⁴		1MHz	90
Volume resistivity	Ω·m	IEC 60093	—	>1 × 10 ¹³
Surface resistivity	Ω	IEC 60093	—	>1 × 10 ¹⁵
Withstand voltage	MV/m	IEC 60243-1	short time test	30
Tracking resistance	—	IEC 60112	—	250
Flammability	—	UL 94	—	V-2(0.40mm) HB(1.5mm)
Temperature index	°C	UL 746B	electric 1.47mmt	125
			impact 1.47mmt	115
			non-impact 1.47mmt	125

※ The values listed are specification values, not certified values.



VALOX® 310SE0

Americas: COMMERCIAL

Unreinforced. UL94V-0/5VA rated. For electrical industry; bobbins, keyboard switches and switch components, and appliance housings.

Property

TYPICAL PROPERTIES ⁽¹⁾			
MECHANICAL	Value	Unit	Method
Tensile Stress, yld, Type I, 50 mm/min	59	MPa	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	59	MPa	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	80	%	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	101	MPa	ASTM D 790
Flexural Stress, brk, 1.3 mm/min, 50 mm span	101	MPa	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	2620	MPa	ASTM D 790
Hardness, Rockwell R	120	-	ASTM D 785
IMPACT	Value	Unit	Method
Izod Impact, unnotched, 23°C	1602	J/m	ASTM D 4812
Izod Impact, notched, 23°C	37	J/m	ASTM D 256
Gardner, 23°C	34	J	ASTM D 3029
Modified Gardner, 23°C	34	J	ASTM D 3029
THERMAL	Value	Unit	Method
HDT, 0.45 MPa, 6.4 mm, unannealed	163	°C	ASTM D 648
HDT, 1.82 MPa, 6.4 mm, unannealed	71	°C	ASTM D 648
CTE, -40°C to 40°C, flow	7.92E-05	1/°C	ASTM E 831
CTE, 60°C to 138°C, flow	1.31E-04	1/°C	ASTM E 831
Relative Temp Index, Elec	120	°C	UL 746B
Relative Temp Index, Mech w/impact	120	°C	UL 746B
Relative Temp Index, Mech w/o impact	140	°C	UL 746B
PHYSICAL	Value	Unit	Method
Specific Gravity	1.39	-	ASTM D 792
Specific Volume	0.72	cm ³ /g	ASTM D 792
Water Absorption, 24 hours	0.08	%	ASTM D 570
Mold Shrinkage, flow, 0.75-2.3 mm	0.9 - 1.6	%	GE Method
Mold Shrinkage, flow, 2.3-4.6 mm	1.5 - 2.3	%	GE Method
Mold Shrinkage, xflow, 0.75-2.3 mm	1 - 1.7	%	GE Method
Mold Shrinkage, xflow, 2.3-4.6 mm	1.6 - 2.4	%	GE Method
ELECTRICAL	Value	Unit	Method
Volume Resistivity	>1.6E+16	Ohm-cm	ASTM D 257
Dielectric Strength, in air, 3.2 mm	18.4	kV/mm	ASTM D 149

Dielectric Strength, in oil, 1.6 mm	22	kV/mm	ASTM D 149
Relative Permittivity, 100 Hz	3.1	-	ASTM D 150
Relative Permittivity, 1 MHz	3.1	-	ASTM D 150
Dissipation Factor, 100 Hz	0.002	-	ASTM D 150
Dissipation Factor, 1 MHz	0.02	-	ASTM D 150
Arc Resistance, Tungsten {PLC}	6	PLC Code	ASTM D 495
Hot Wire Ignition {PLC}	2	PLC Code	UL 746A
High Voltage Arc Track Rate {PLC}	4	PLC Code	UL 746A
High Ampere Arc Ign, surface {PLC}	0	PLC Code	UL 746A
Comparative Tracking Index (UL) {PLC}	3	PLC Code	UL 746A
FLAME CHARACTERISTICS	Value	Unit	Method
UL Recognized, 94V-0 Flame Class Rating (3)	0.7	mm	UL 94
UL Recognized, 94-5VA Rating (3)	3	mm	UL 94
CSA (See File for complete listing)	LS88480	File No.	CSA LISTED

Source GMD, last updated:04/14/2003

Processing

Parameter	Value	Unit
Injection Molding		
Drying Temperature	120	°C
Drying Time	3 - 4	hrs
Drying Time (Cumulative)	12	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	245 - 260	°C
Nozzle Temperature	240 - 255	°C
Front - Zone 3 Temperature	245 - 260	°C
Middle - Zone 2 Temperature	240 - 255	°C
Rear - Zone 1 Temperature	230 - 250	°C
Mold Temperature	50 - 75	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	50 - 100	rpm
Shot to Cylinder Size	40 - 80	%
Vent Depth	0.013 - 0.025	mm

Source GMD, last updated:04/14/2003

THESE PROPERTY VALUES ARE NOT INTENDED FOR SPECIFICATION PURPOSES.

PLEASE CHECK WITH YOUR (LOCAL SALES OFFICE) FOR AVAILABILITY IN YOUR REGION

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

- (3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
- (4) Internal measurements according to UL standards.

Disclaimer : THE MATERIALS AND PRODUCTS OF THE BUSINESSES MAKING UP THE GE PLASTICS UNIT OF GENERAL ELECTRIC COMPANY, ITS SUBSIDIARIES AND AFFILIATES ("GEP"), ARE SOLD SUBJECT TO GEP' S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, GEP MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING GEP MATERIALS, PRODUCTS, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN GEP' S STANDARD CONDITIONS OF SALE, GEP AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS OR PRODUCTS DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of GEP' s materials, products, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating GEP materials or products will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of GEP' s Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by GEP. No statement contained herein concerning a possible or suggested use of any material, product or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of General Electric Company or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product or design in the infringement of any patent or other intellectual property right

® VALOX is a registered trademark of the General Electric Company

© 1997-2003 General Electric Company. All rights reserved