**59.6**

**3.88**

**3.88**

**39.6**

SERCOM
Model: RP582B

c UL us
LISTED
I.T.E.
42JJ
E210921

FC

CAN ICES-3 (B)/NMB-3(B)
FCC ID: P27RP582B
IC: 5604A-RP582B
Input: 12V==2.0A
This device complies with Part 15 of the
FCC Rules. Operation is subject to the
following two conditions:(1) This device
may not cause harmful interference, and
(2) this device must accept any interference
received, including interference that may
cause undesired operation.
Indoor Use Only

---

SERCOM
Model: RP582B
PN: XXXXXXXXXX （具体请依据厂内规则）
SN:eth0 MAC （具体请依据厂内规则）

QR Code
(SerialNumber: eth0 MAC)
12*12mm

c UL us
LISTED
I.T.E.
42JJ
E210921

FC

CAN ICES-3 (B)/NMB-3(B)
FCC ID: P27RP582B
IC: 5604A-RP582B
Input: 12V==2.0A
This device complies with Part 15 of the
FCC Rules. Operation is subject to the
following two conditions:(1) This device
may not cause harmful interference, and
(2) this device must accept any interference
received, including interference that may
cause undesired operation.
Indoor Use Only

XXXXXXXXXXXXX(MSN:机台SN)
Made in XXXXX
SDXX

厂内列印示意，具体依据实际要求列印

1. Made in XXXXX产地根据实际生产地打印: Made in Philippines or China
2. SDXX(UL Factory ID)需要根据生产厂生产地选择
   Factroy ID:SD0 (Zhunan*Taibei)
   SD7(Tangzhuang*China)
   SD8(Chunhui*China)
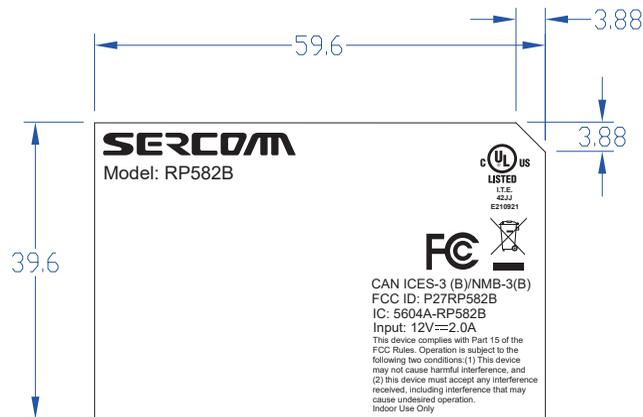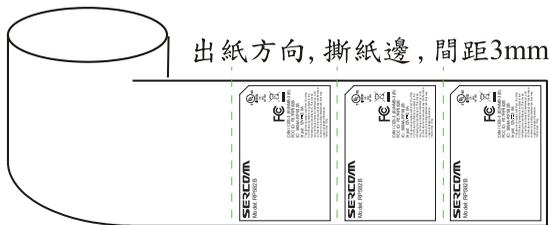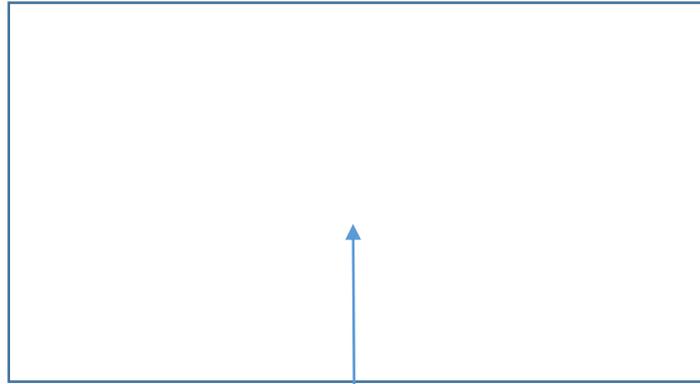   SD10(P site*Philippines )
   SD11(M site*Philippines )

出紙方向，撕紙邊，間距3mm

齿刀线

Notes:
1.材質：50#白色PET，黑色印刷
(Material: 50 # white PET, black printing.)
2.背压花膠 ／ 葛拉馨底紙，成捲
(Adhesive: Acrylic Adhesive(Adhesive With Depressive Liner/centrifugal paper, coiled)
3.公差:+0/- 0.2mm(Tolerance: + 0/ - 0.2 mm)
4.本料件使用之材料須符合RoHS UL
 (Materials to be used must conform to RoHS UL)
5.材质表面打印张力>=32dpne/cm
(Material surface printing tension >= 32 dpne/cm)

DONOTSCALEDRAWING

| MODEL | RP582B Single pack | NAME | Product label/Cogeco | SCALE | 1:1 |
| DSN | | PART, No | 932DPR00D8 | SHEET | OF |
| CHK | | MATERIAL | | Q' TY | PC | REV. | R6 |
| APV | | | | DIMIN | MM | REV. DATE | 2022.02.10 |
| FILE | | | | | | | |

USED

Bottom side

Label location