



MEASUREMENT REPORT

FCC PART 15.247 WLAN 802.11b/g/n

FCC ID: P27SCH2R1

APPLICANT: Sercomm Corporation

Application Type: Certification

Product: Indoor Camera

Model No.: SCH2R0-29xxxxx (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, a to z, "blank" or "-", for the marketing purpose)

Brand Name: ADT

FCC Classification: (DTS) Digital Transmission System

FCC Rule Part(s): Part 15.247

Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02

Received Date: July 20, 2020

Test Date: July 23 ~ August 16, 2020

Tested By : *Peter Syu*
(Peter Syu)

Reviewed By : *Paddy Chen*
(Paddy Chen)

Approved By : *Chenz Ker*
(Chenz Ker)



The test results only relate to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI 63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2007TW0107-U1	1.0	Original Report	2020-08-18	

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope.....	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Working Frequencies for this Report	8
2.3. Test Mode.....	8
2.4. Test Software	8
2.5. Test Configuration.....	9
2.6. EMI Suppression Device(s)/Modifications	9
2.7. Labeling Requirements	9
3. DESCRIPTION of TEST	10
3.1. Evaluation Procedure.....	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS.....	12
5. TEST EQUIPMENT CALIBRATION DATE.....	13
6. MEASUREMENT UNCERTAINTY.....	14
7. TEST RESULT	15
7.1. Summary.....	15
7.2. 6dB Bandwidth Measurement	16
7.2.1. Test Limit.....	16
7.2.2. Test Procedure used	16
7.2.3. Test Setting	16
7.2.4. Test Setup.....	16
7.2.5. Test Result	17
7.3. Output Power Measurement.....	20
7.3.1. Test Limit.....	20
7.3.2. Test Procedure Used.....	20
7.3.3. Test Setting	20
7.3.4. Test Setup.....	20
7.3.5. Test Result of Output Power.....	21
7.4. Power Spectral Density Measurement	22
7.4.1. Test Limit.....	22
7.4.2. Test Procedure Used.....	22
7.4.3. Test Setting	22
7.4.4. Test Setup.....	22
7.4.5. Test Result	23
7.5. Out-of-Band Spurious Emissions Emissions Measurement.....	26

7.5.1.	Test Limit	26
7.5.2.	Test Procedure Used	26
7.5.3.	Test Settintg	26
7.5.4.	Test Setup	26
7.5.5.	Test Result	27
7.6.	Radiated Spurious Emission Measurement.....	34
7.6.1.	Test Limit	34
7.6.2.	Test Procedure Used	34
7.6.3.	Test Setting	34
7.6.4.	Test Setup	36
7.6.5.	Test Result	38
7.7.	Radiated Restricted Band Edge Measurement.....	62
7.7.1.	Test Limit	62
7.7.2.	Test Procedure Used	62
7.7.3.	Test Setting	62
7.7.4.	Test Setup	64
7.7.5.	Test Result	65
7.8.	AC Conducted Emissions Measurement	89
7.8.1.	Test Limit	89
7.8.2.	Test Setup	89
7.8.3.	Test Result	90
8.	CONCLUSION	98

§2.1033 General Information

Applicant	Sercomm Corporation
Applicant Address	8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Manufacturer	Sercomm Corporation
Manufacturer Address	8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.247
Test Device Serial No.	2006DC1002546 <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

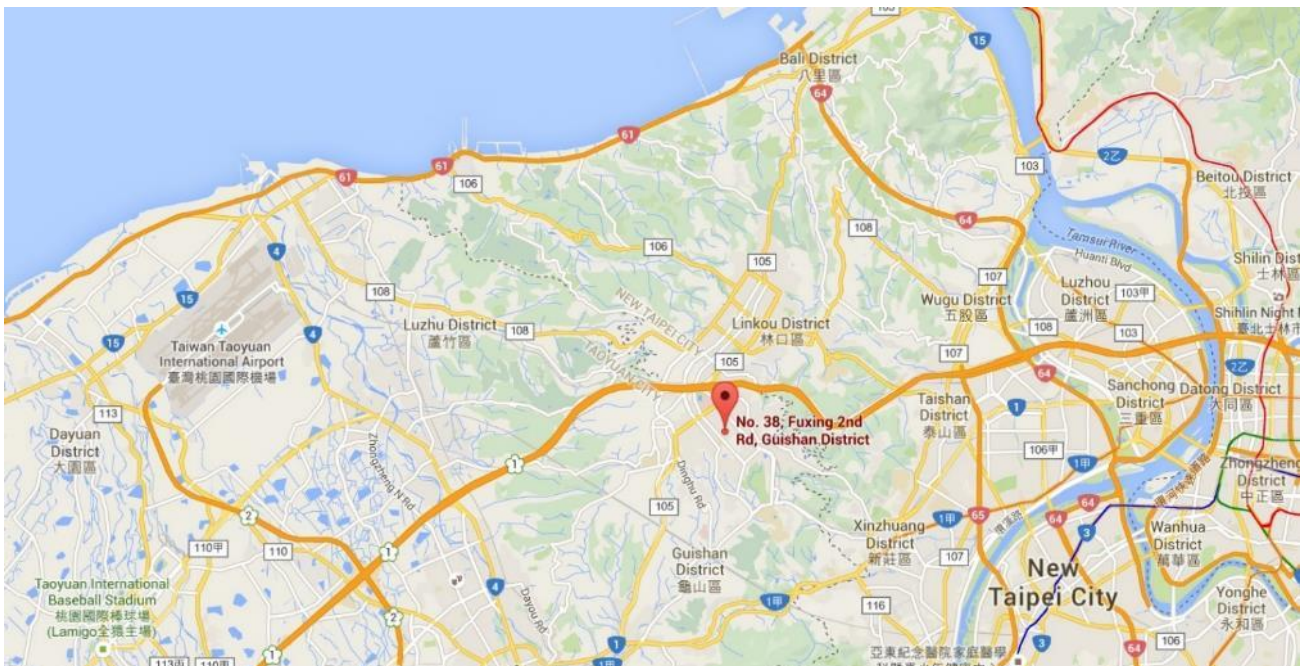

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Indoor Camera
Model Number	SCH2R0-29xxxxx (the 1st x should be “blank” or “-”; the rest x could be 0 to 9, A to Z, a to z, “blank” or “-”, for the marketing purpose)
Brand Name	ADT
Supports Radios Spec.	WLAN: 2.4G: 802.11b/g/n-20
Wi-Fi Specification	802.11b/g/n
Frequency Range	<u>2.4GHz:</u> For 802.11b/g/n-HT20: 2412 ~ 2462 MHz
2.4GHz Maximum Output Power	802.11b: 20.50dBm 802.11g: 26.66dBm 802.11n-HT20: 26.03dBm
Type of Modulation	802.11b: DSSS, DBPSK, DQPSK, CCK 802.11g/n-20M: OFDM, BPSK, QPSK, 16QAM, 64QAM
Power Adapter (1)	Brand Name: PHIHONG Model: PSAF10A-050Q Input: AC 100-240V~0.28A, 50-60Hz Output: DC 5V-2.0A
Power Adapter (2)	Brand Name: LUCENT TRANS Model: 1A52-UB52A Input: AC 100-240V~0.3A, 50-60Hz Output: DC 5V-2.0A

Note: This report has been assessed with model number “SCH2R0-29”.

2.2. Working Frequencies for this Report

802.11b/g/n-20M

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

Duty Cycle

Test Mode	Duty Cycle	VBW (When Average setting is used)
802.11b	99%	N/A
802.11g	94%	1kHz
802.11 n-HT20	95%	1kHz

2.3. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n-20M

Note:

- Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
- According to the result of Radiated Spurious Emission Measurement (below 1G), the Radiated Spurious Emission Measurement (above 1G) will choose the worst adapter (Model: PSAF10A-050Q) for the test.

2.4. Test Software

The test utility software used during testing was "wl".

2.5. Test Configuration

This device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.7. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v05r02 were used in the measurement of the device.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated emissions test results are shown in Section 7.6 & 7.7 .

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Indoor Camera**, is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	SerComm Corporation	WiFi_2.4G	FPCB	2.67dBi

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2021/3/26
Cable	Rosnol	N1C50-RG400- B1C50-500CM	MRTTWE00013	1 year	2021/6/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2021/3/25

Radiated Emissions – AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2020/9/4
RF Test Platform for DECT/DECT 6.0 /CAT-iq	RTX Products A/S	RTX2012	MRTSUE06408	1 year	2021/3/5
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2021/3/25
Active Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2021/4/27
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2021/4/24
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2021/4/24
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2021/4/24
Broadband Preampfier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2021/4/24
Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2021/6/16
Cable	Rosnol	K1K50-UP0264- K1K50-4M	MRTTWE00012	1 year	2021/6/20

Conducted Test Equipment – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/2
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2021/7/10
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2021/3/26

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software
EMI	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.53dB
Conducted Emission- Impedance Stabilization Network Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 3.96dB
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 3.92dB (Below 30M)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 4.25dB (30M~1G)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 4.40dB (1G~18G)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 4.45dB (18G~40G)
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 78.4\text{Hz}$
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 3.3%
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.82^\circ\text{C} / \pm 3\%$
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.3\%$

7. TEST RESULT

7.1. Summary

Product Name: Indoor Camera
FCC Classification: (DTS) Digital Transmission System
Data Rate(s) Tested: 1Mbps ~ 11Mbps (b); 6Mbps ~ 54Mbps (g);
6.5/7.2Mbps ~ 65/72.2Mbps (n-20M);

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30.00\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8.00\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Out-of-Band Emissions	Conducted $\geq 20\text{dBc}$		Pass	Section 7.5
15.205 15.209	Spurious Emission	< FCC 15.209 limits	Radiated	Pass	Section 7.6
15.205 15.209	Band Edge Measurement	$\cong 74\text{dBuV/m(Peak)}$ $\cong 54\text{dBuV/m(Average)}$		Pass	Section 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

KDB 558074 D01v05r02- Section 8.2 Option 2

7.2.3. Test Setting


1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize




7.2.4. Test Setup

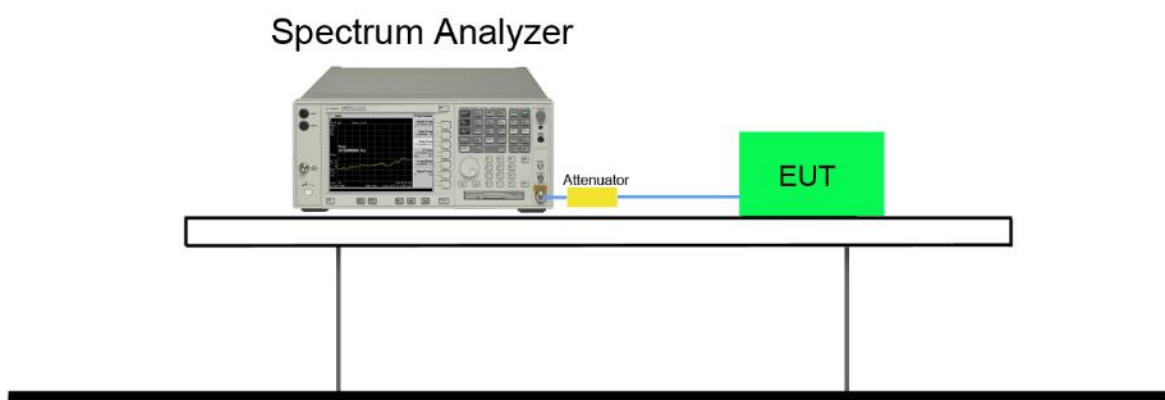

7.2.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	01	2412	9.057	≥ 0.5	Pass
802.11b	06	2437	9.023	≥ 0.5	Pass
802.11b	11	2462	9.064	≥ 0.5	Pass
802.11g	01	2412	15.120	≥ 0.5	Pass
802.11g	06	2437	15.150	≥ 0.5	Pass
802.11g	11	2462	15.150	≥ 0.5	Pass
802.11n-20M	01	2412	15.140	≥ 0.5	Pass
802.11n-20M	06	2437	15.140	≥ 0.5	Pass
802.11n-20M	11	2462	15.120	≥ 0.5	Pass

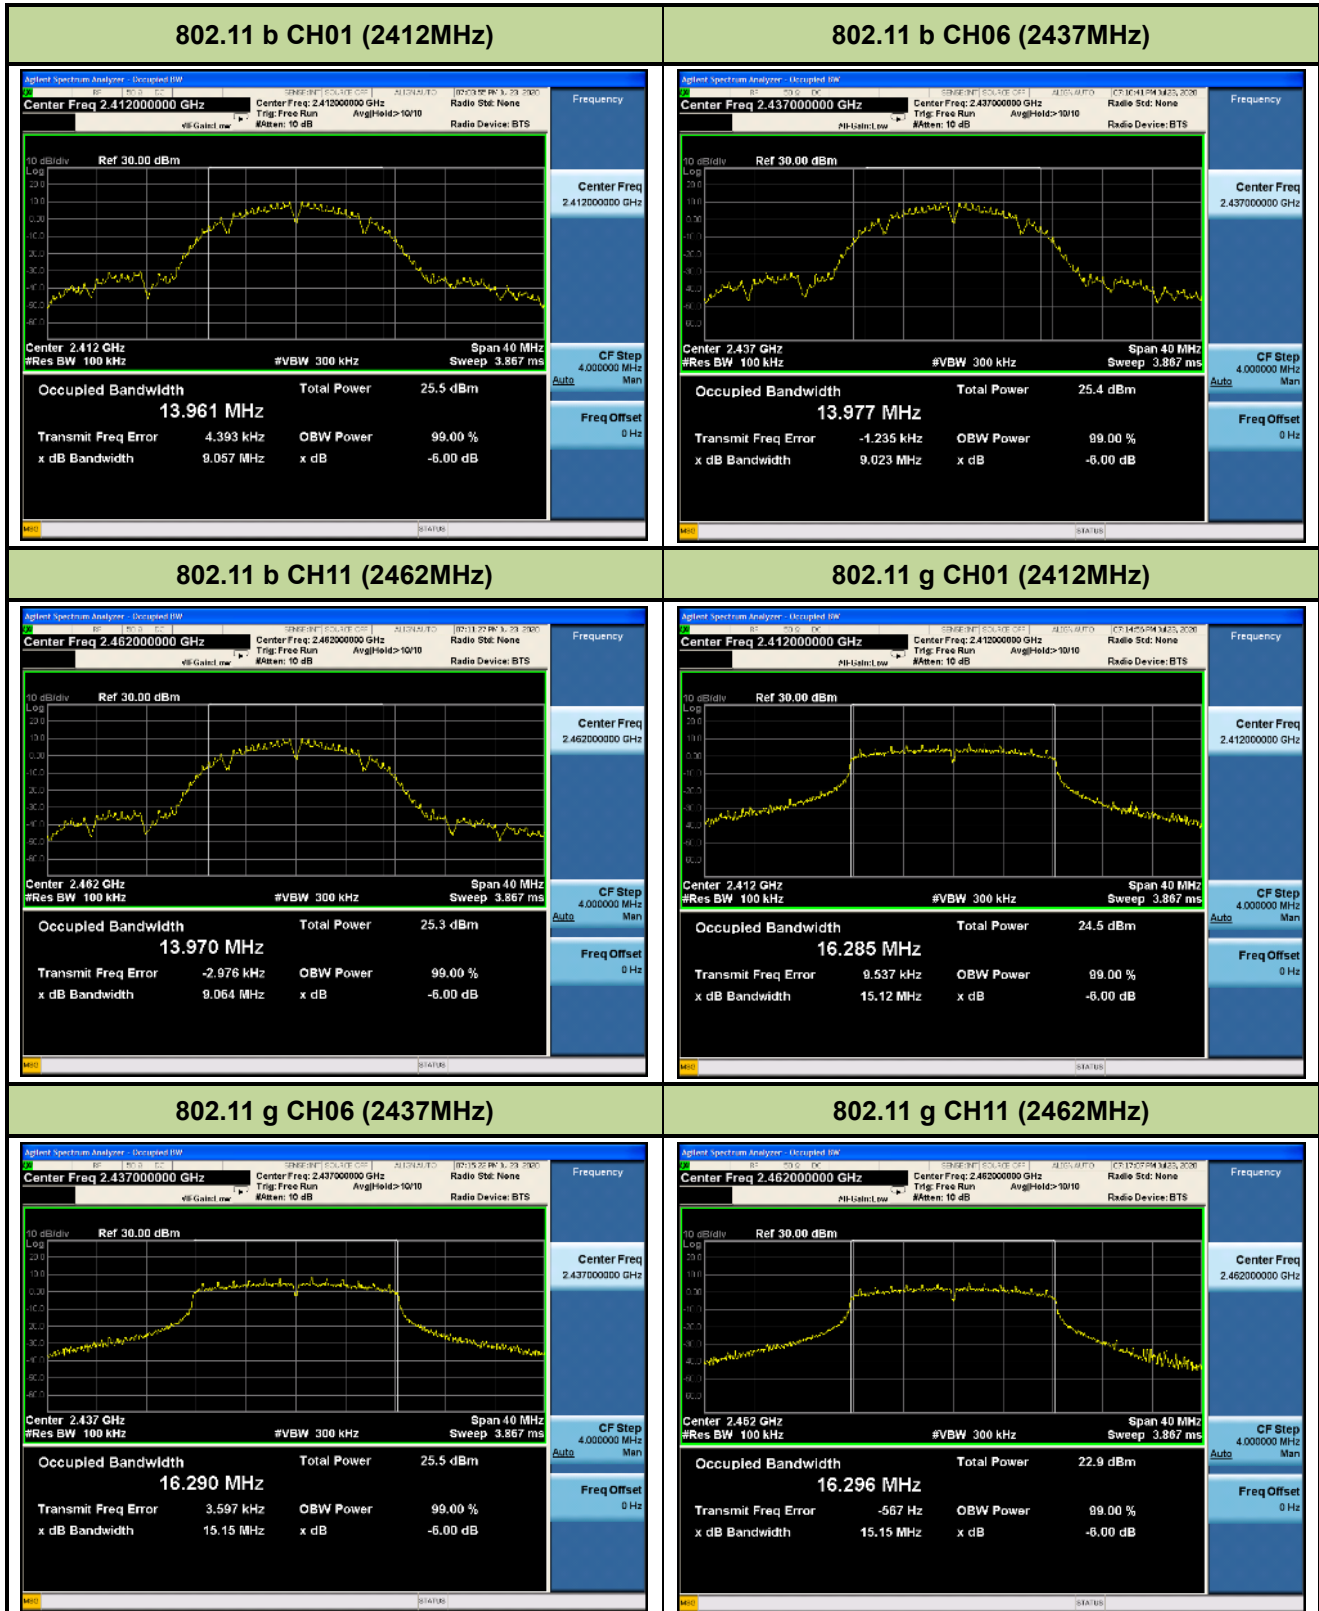

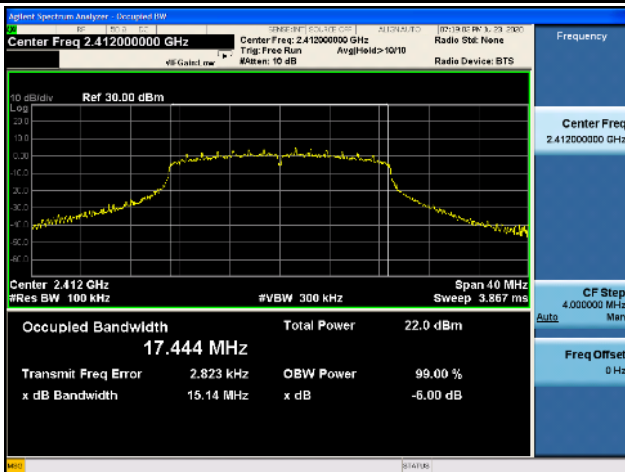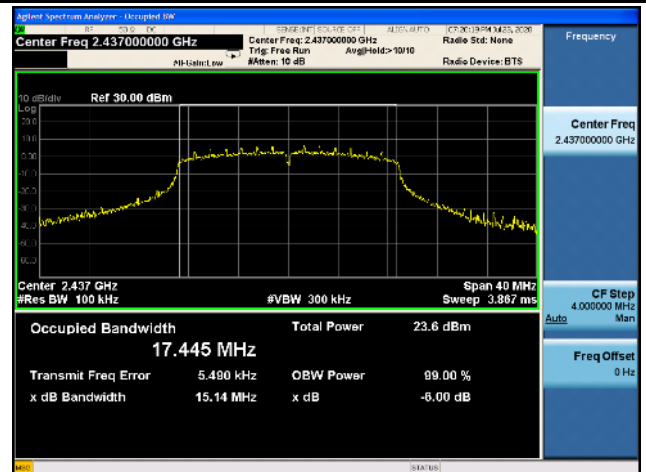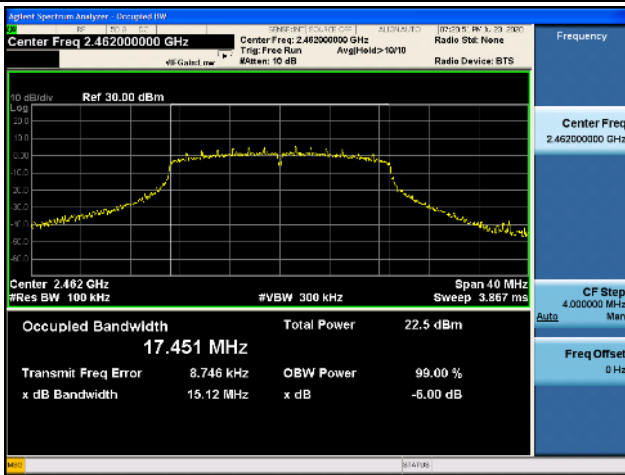802.11 n-20M CH01 (2412MHz)

802.11 n-20M CH06 (2437MHz)

802.11 n-20M CH11 (2462MHz)


7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

7.3.2. Test Procedure Used

KDB 558074 D01v05r02 - Section 8.3.1.2 & 8.3.2.3

7.3.3. Test Setting


Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.3.4. Test Setup

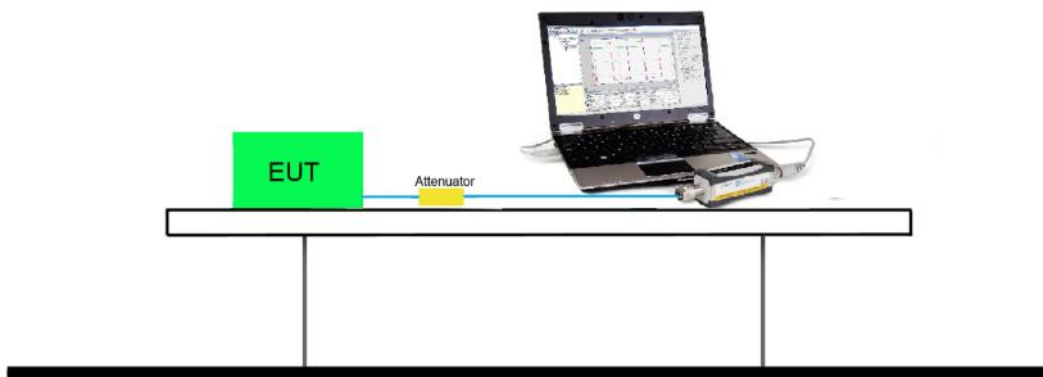

7.3.5. Test Result of Output Power

2.4GHz 802.11b RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit				
		1	2	6	11						
01	2412	17.86	--	--	--	20.50	1Watt= 30 dBm				
06	2437	17.86	17.83	17.79	17.76	20.19	1Watt= 30 dBm				
11	2462	17.70	--	--	--	20.18	1Watt= 30 dBm				
2.4GHz 802.11g RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit
		6	9	12	18	24	36	48	54		
01	2412	17.27	--	--	--	--	--	--	--	25.75	1Watt= 30 dBm
06	2437	18.12	18.05	17.96	17.90	17.88	17.29	16.67	16.30	26.66	1Watt= 30 dBm
11	2462	16.37	--	--	--	--	--	--	--	25.53	1Watt= 30 dBm
2.4GHz 802.11n-20M RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7		
01	2412	15.11	--	--	--	--	--	--	--	23.73	1Watt= 30 dBm
06	2437	18.42	18.15	17.80	17.56	17.38	16.84	16.47	16.00	26.03	1Watt= 30 dBm
11	2462	16.06	--	--	--	--	--	--	--	25.20	1Watt= 30 dBm

Note: Output power = Reading value on power meter + duty cycle factor + cable loss ◦

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

7.4.2. Test Procedure Used


KDB 558074 D01v05r02 - Section 8.4 Method PKPSD

7.4.3. Test Setting

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: 3 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.


7.4.4. Test Setup

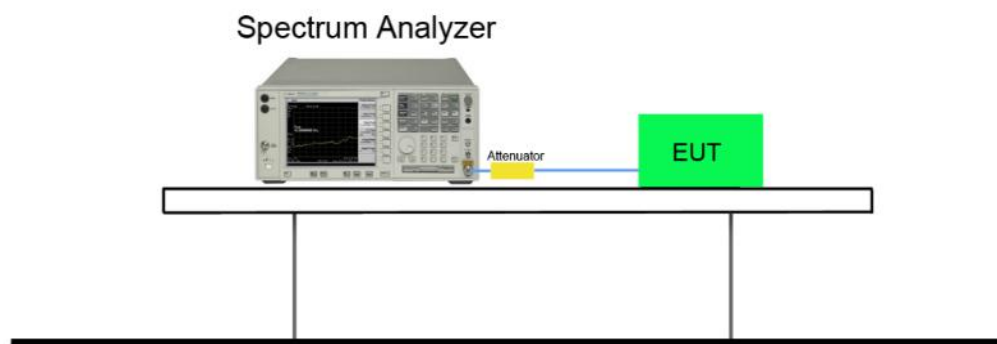

7.4.5. Test Result

Test Mode	Channel No.	Freq. (MHz)	PSD (dBm)	Limit (dBm)	Result
11b	1	2412	-2.899	≤ 8	Pass
11b	6	2437	-3.526	≤ 8	Pass
11b	11	2462	-4.511	≤ 8	Pass
11g	1	2412	-6.684	≤ 8	Pass
11g	6	2437	-6.479	≤ 8	Pass
11g	11	2462	-8.866	≤ 8	Pass
11n-20M	1	2412	-9.782	≤ 8	Pass
11n-20M	6	2437	-8.379	≤ 8	Pass
11n-20M	11	2462	-9.513	≤ 8	Pass

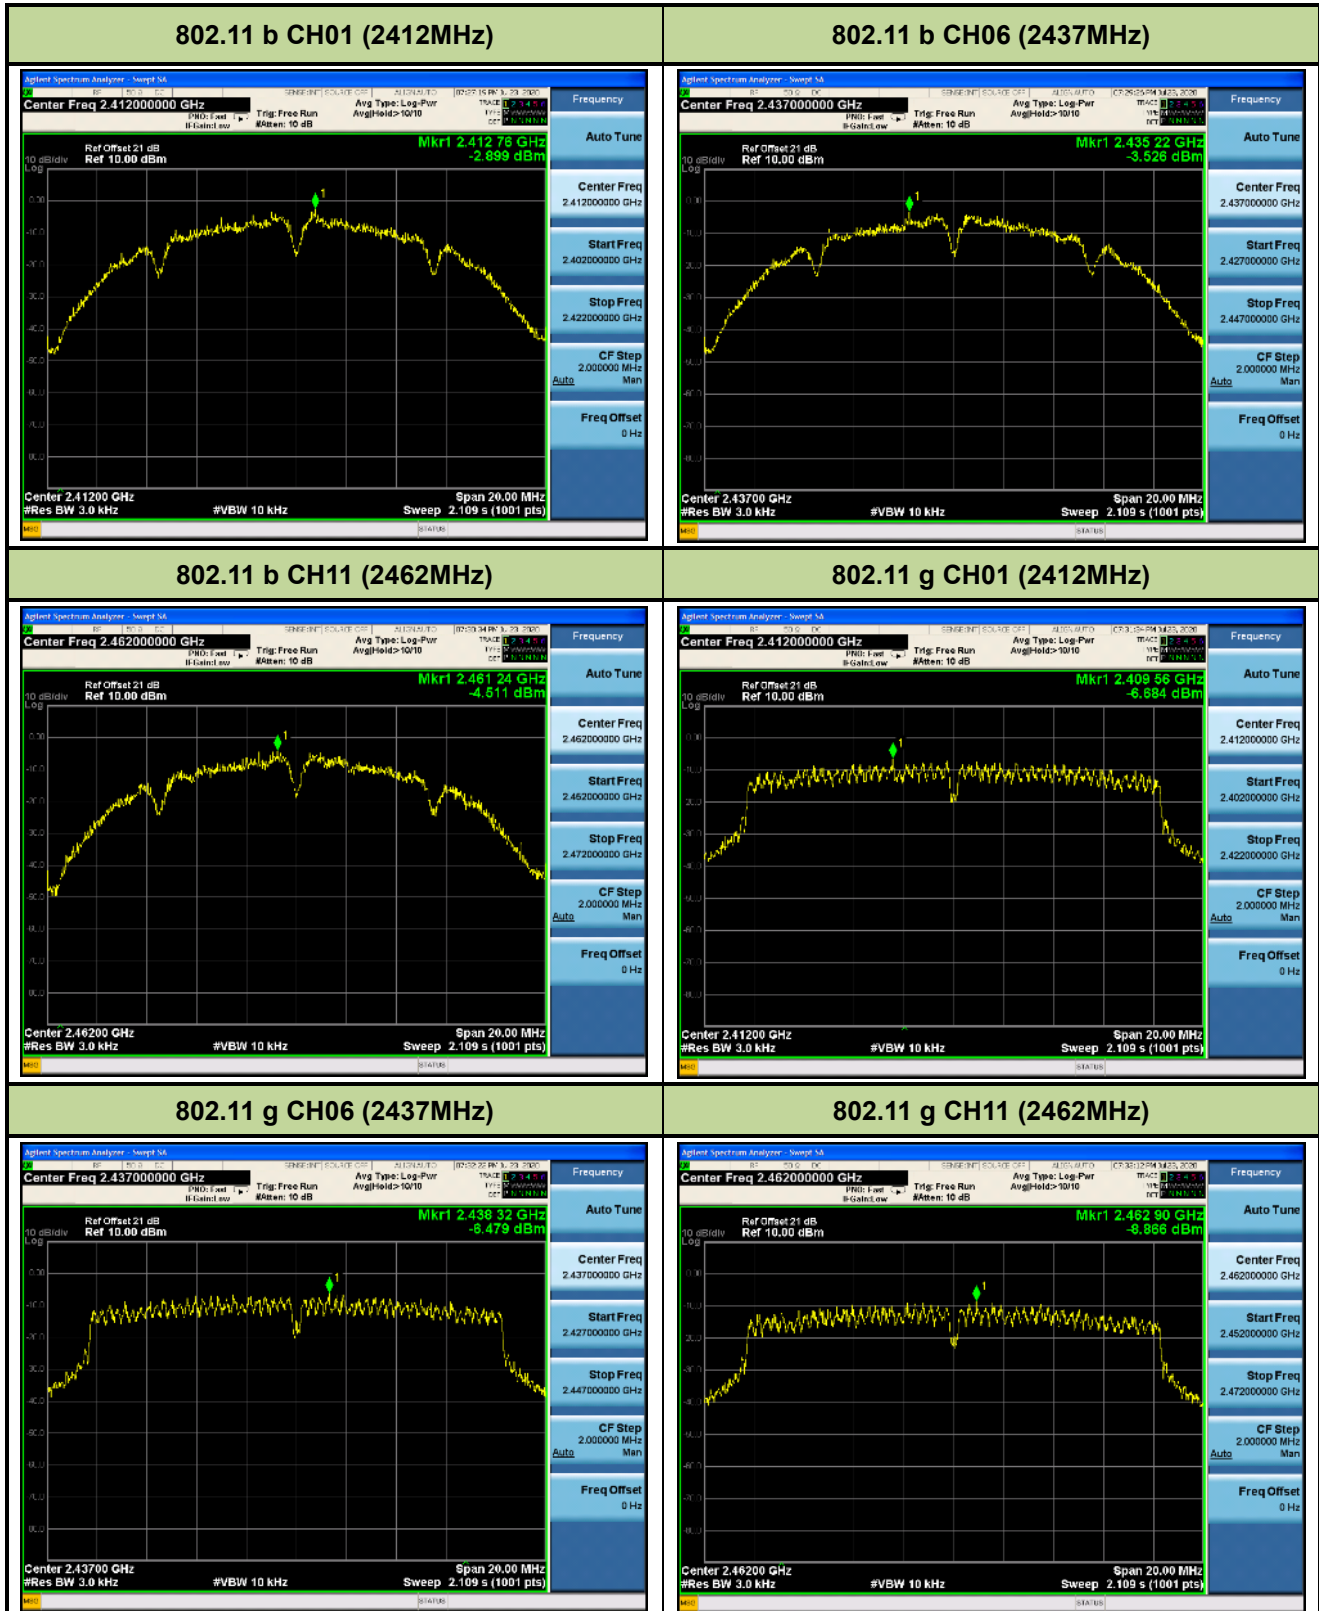

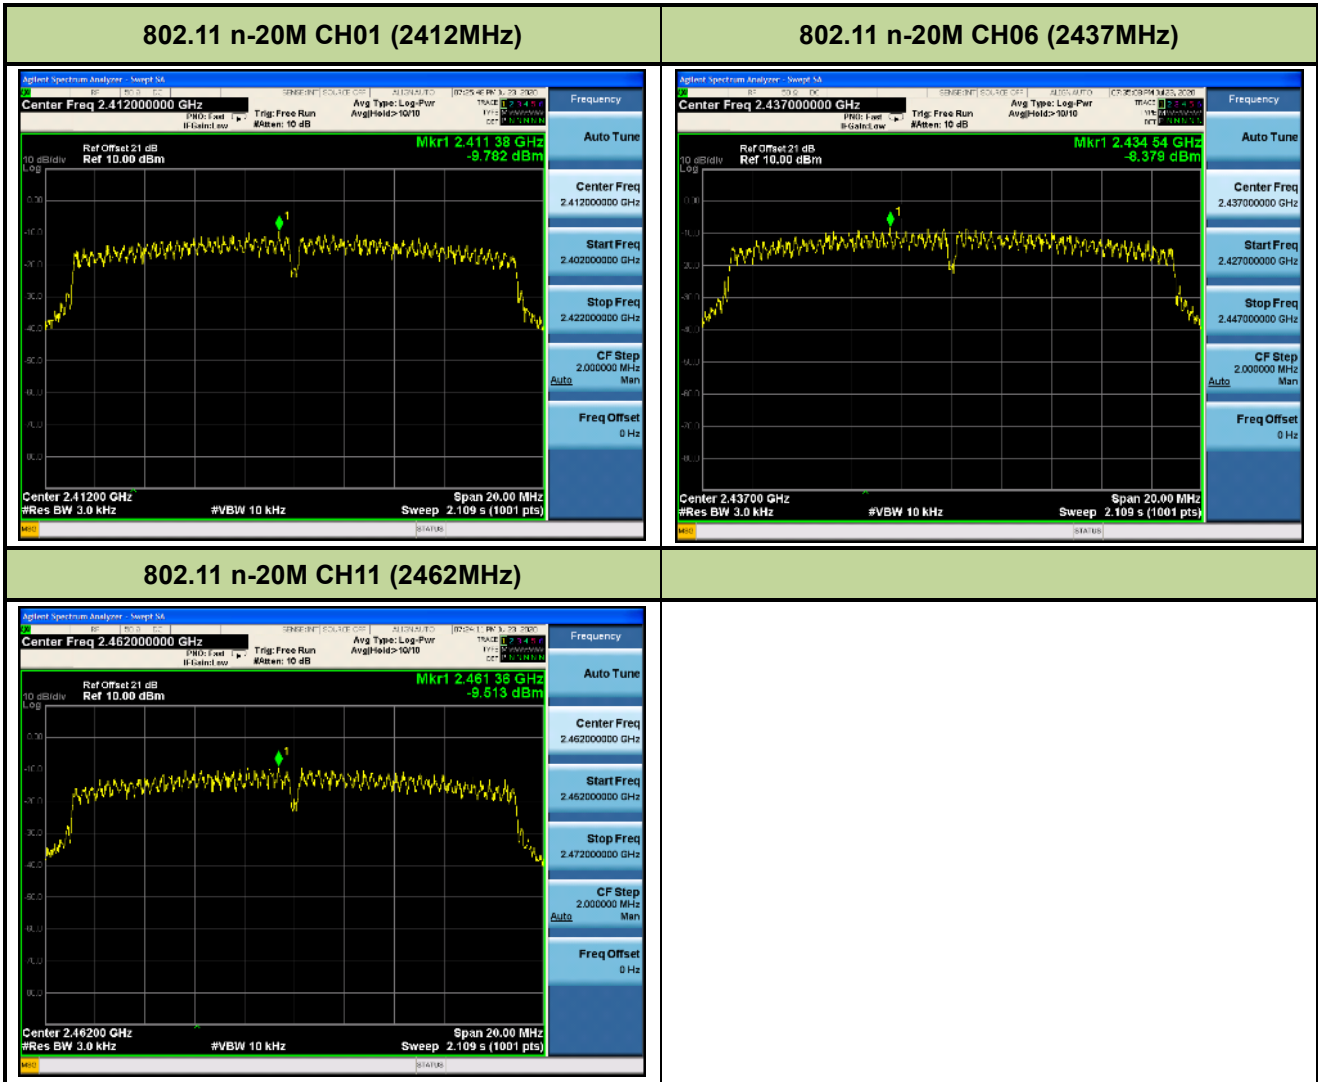

7.5. Out-of-Band Spurious Emissions Emissions Measurement

7.5.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.5.2. Test Procedure Used

KDB 558074 D01v05r02- Section 11.1 & 11.2

7.5.3. Test Setting


- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize


7.5.4. Test Setup

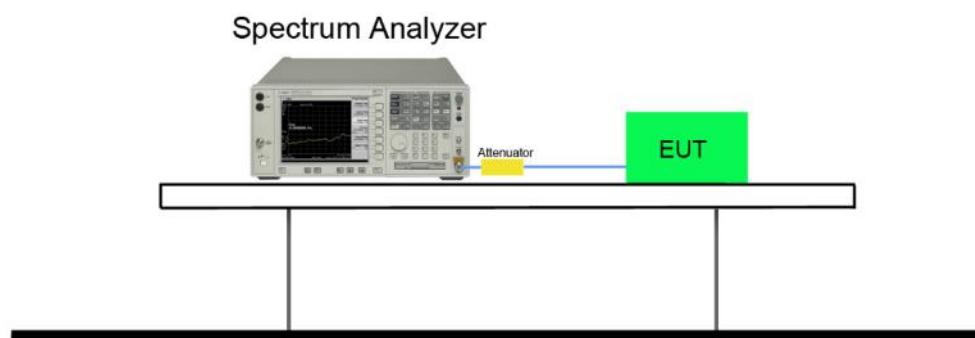



7.5.5. Test Result


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
802.11b	01	2412	20dBc	Pass
802.11b	06	2437	20dBc	Pass
802.11b	11	2462	20dBc	Pass
802.11g	01	2412	20dBc	Pass
802.11g	06	2437	20dBc	Pass
802.11g	11	2462	20dBc	Pass
802.11n-20M	01	2412	20dBc	Pass
802.11n-20M	06	2437	20dBc	Pass
802.11n-20M	11	2462	20dBc	Pass

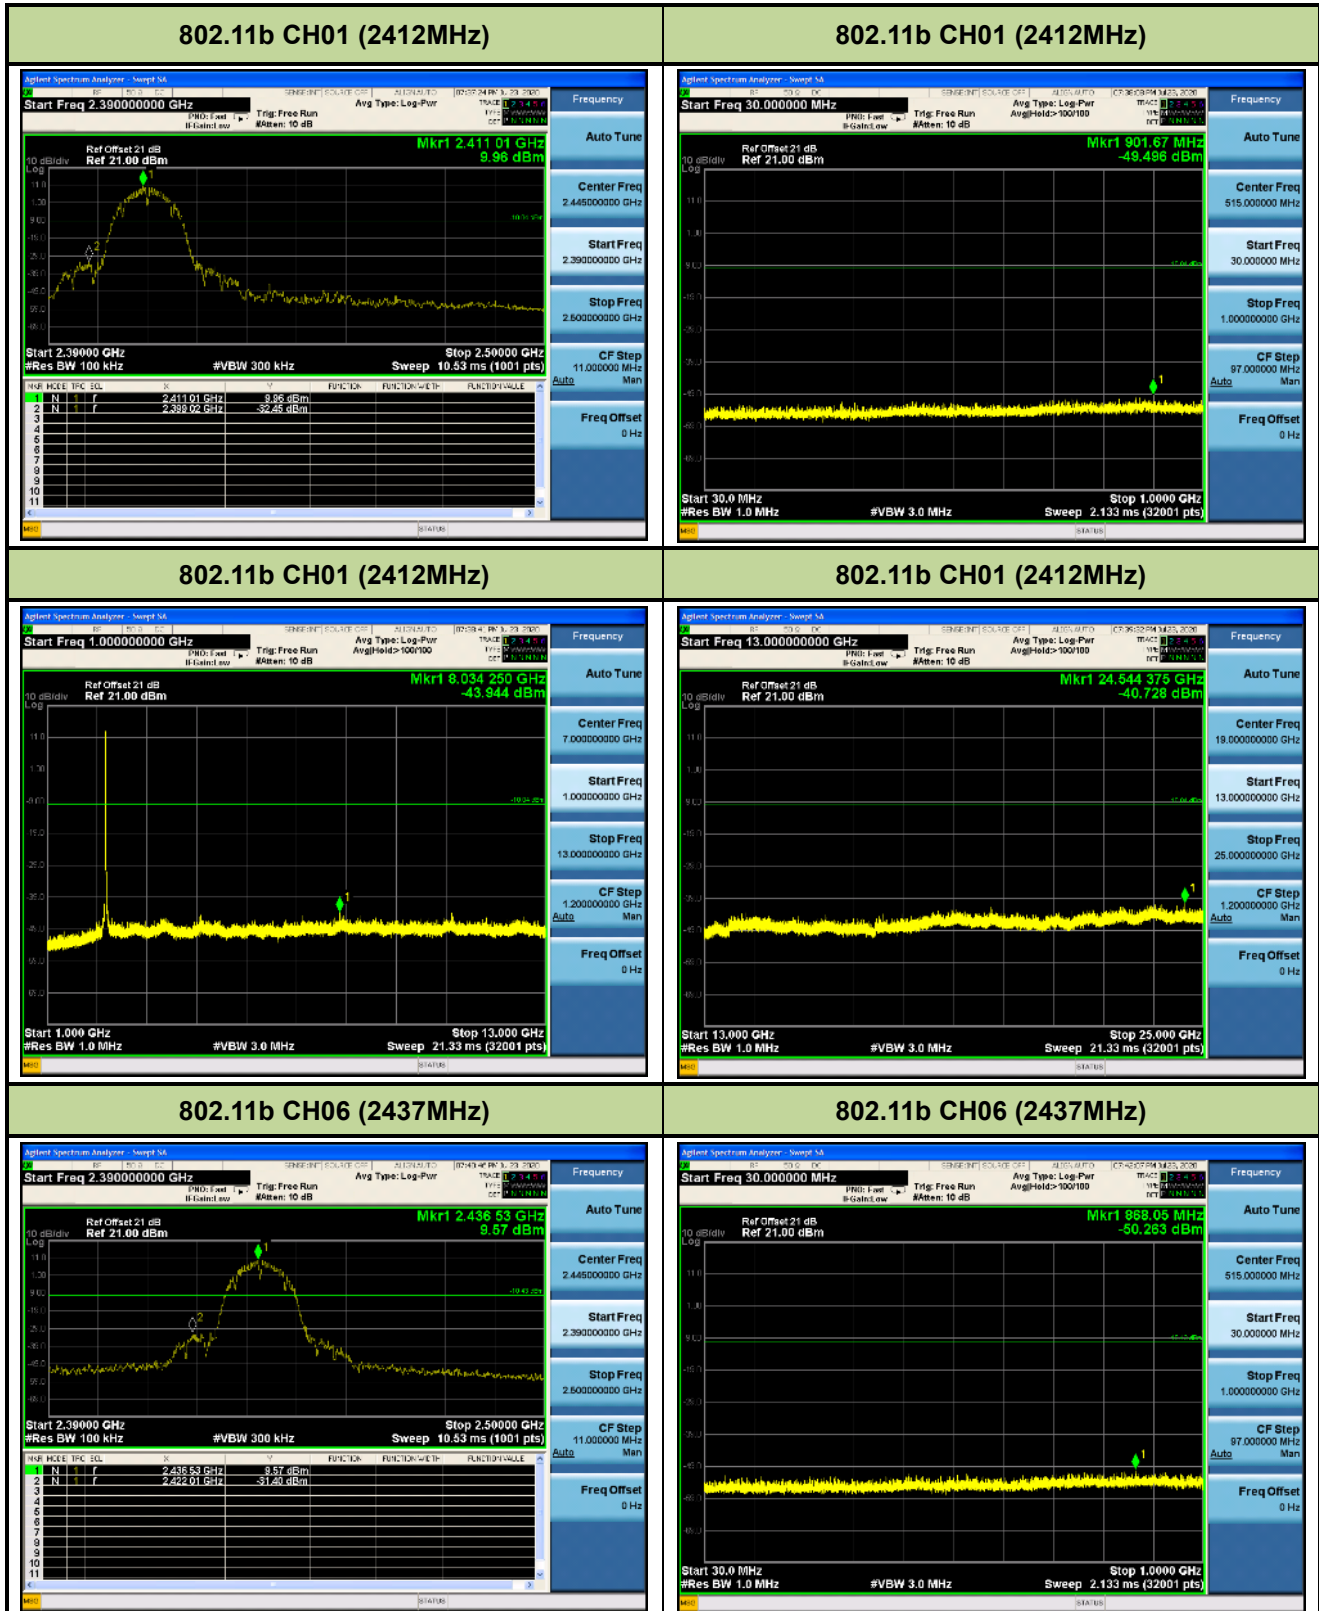


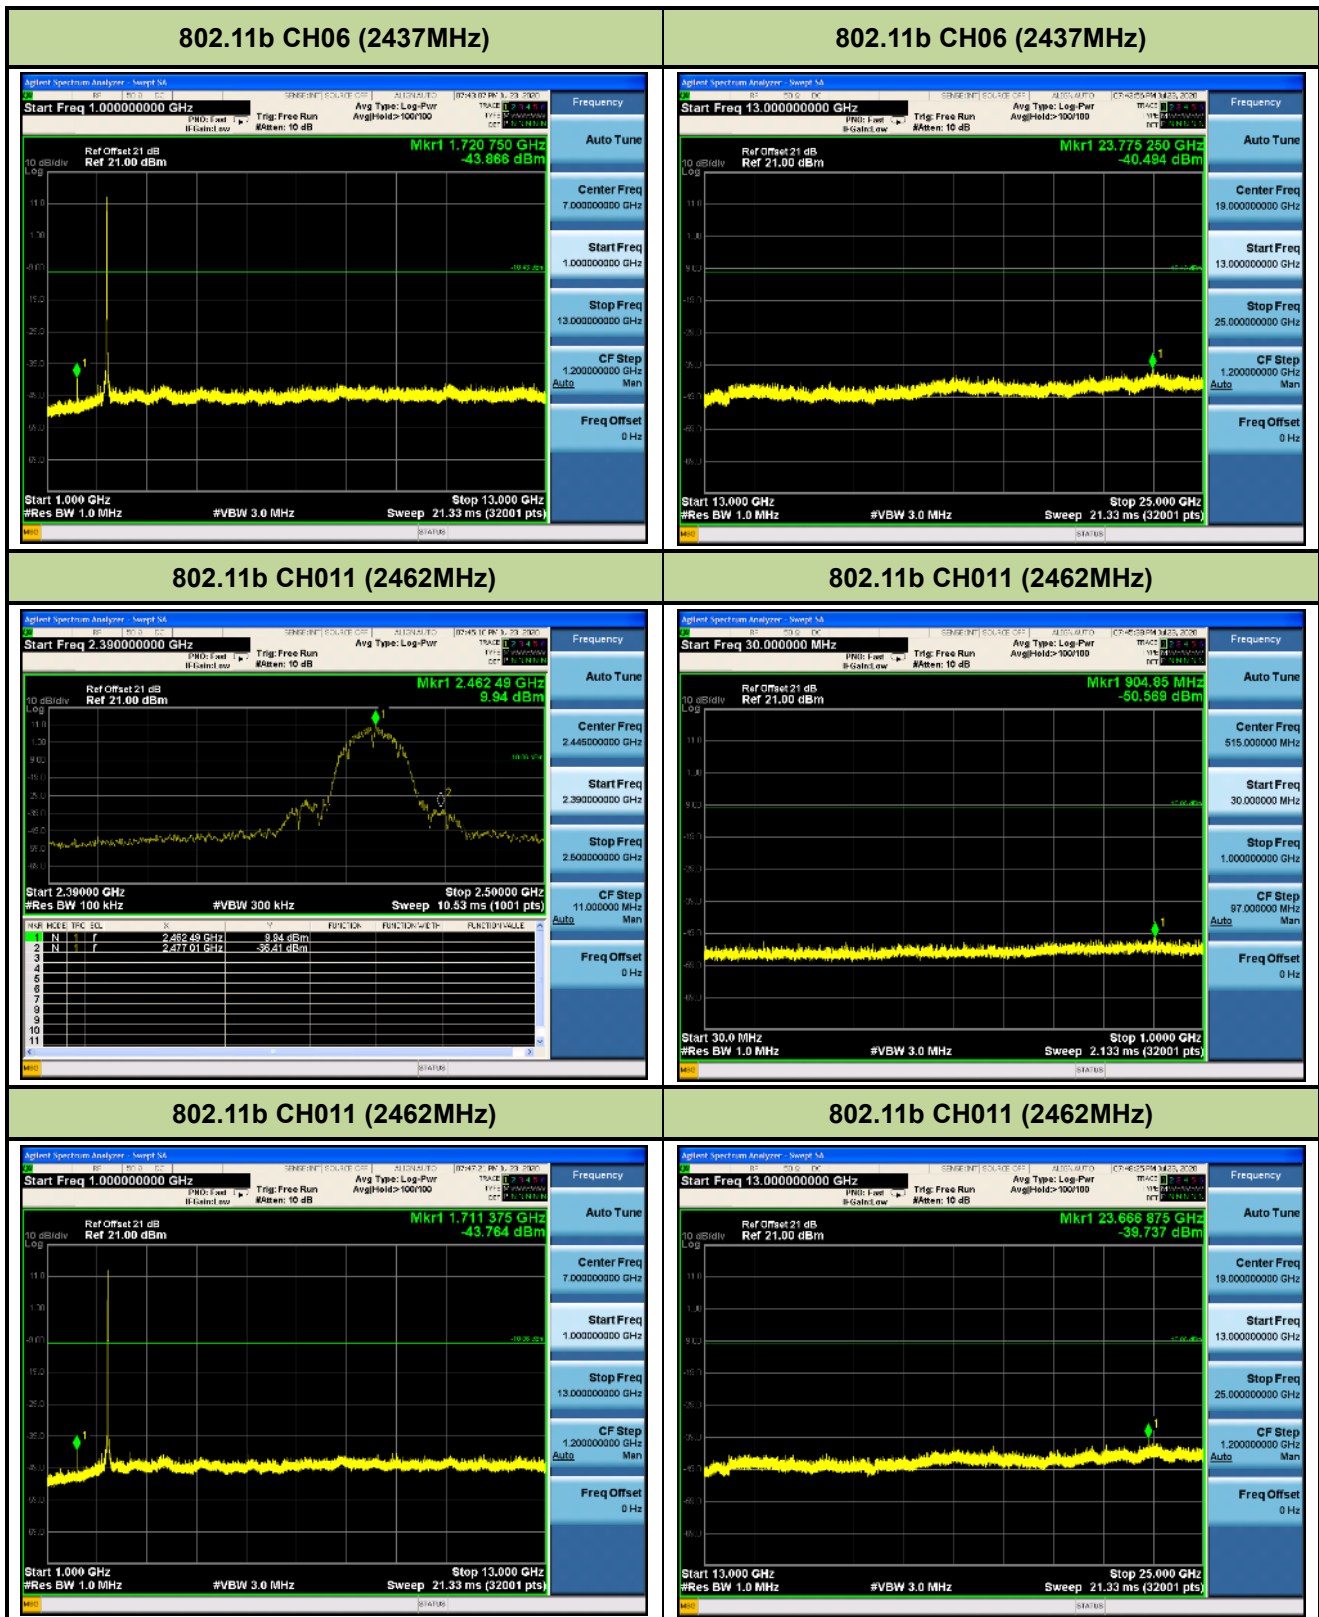

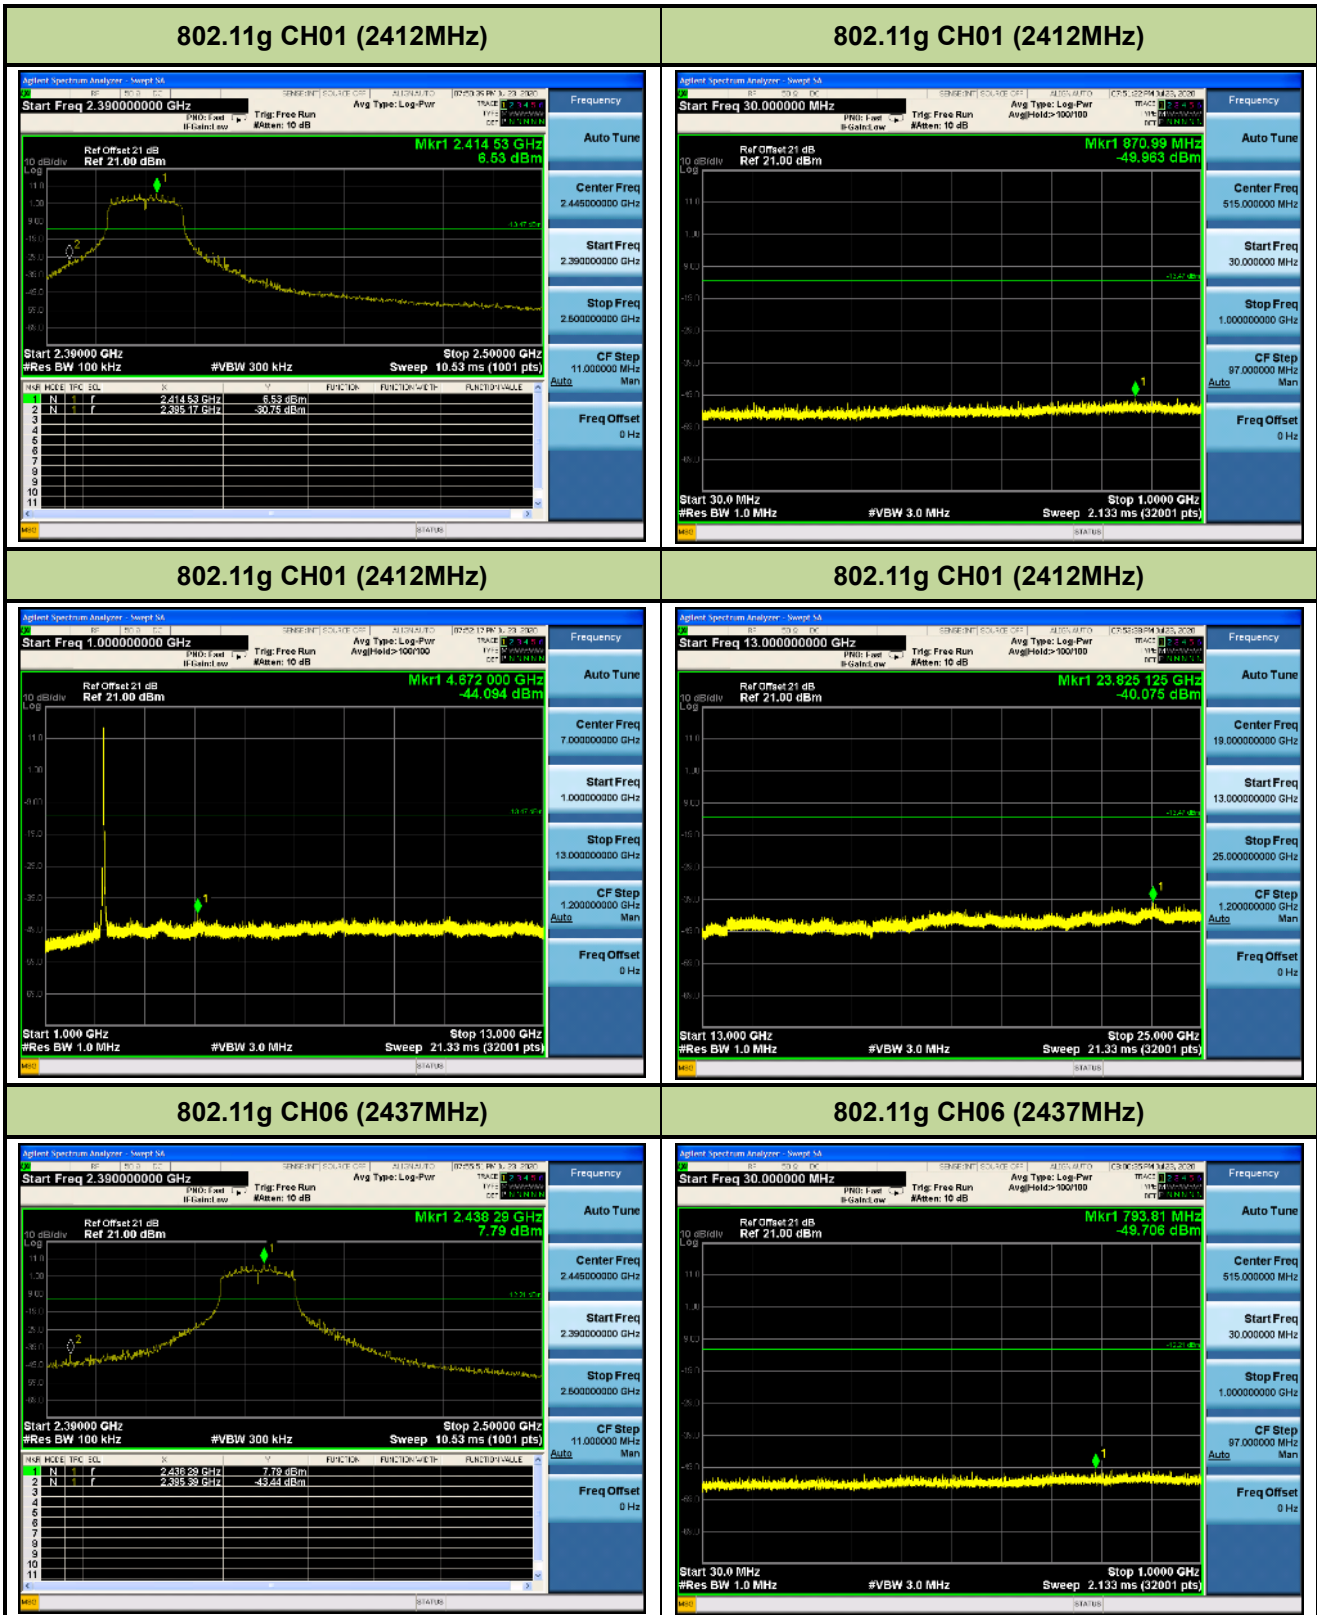

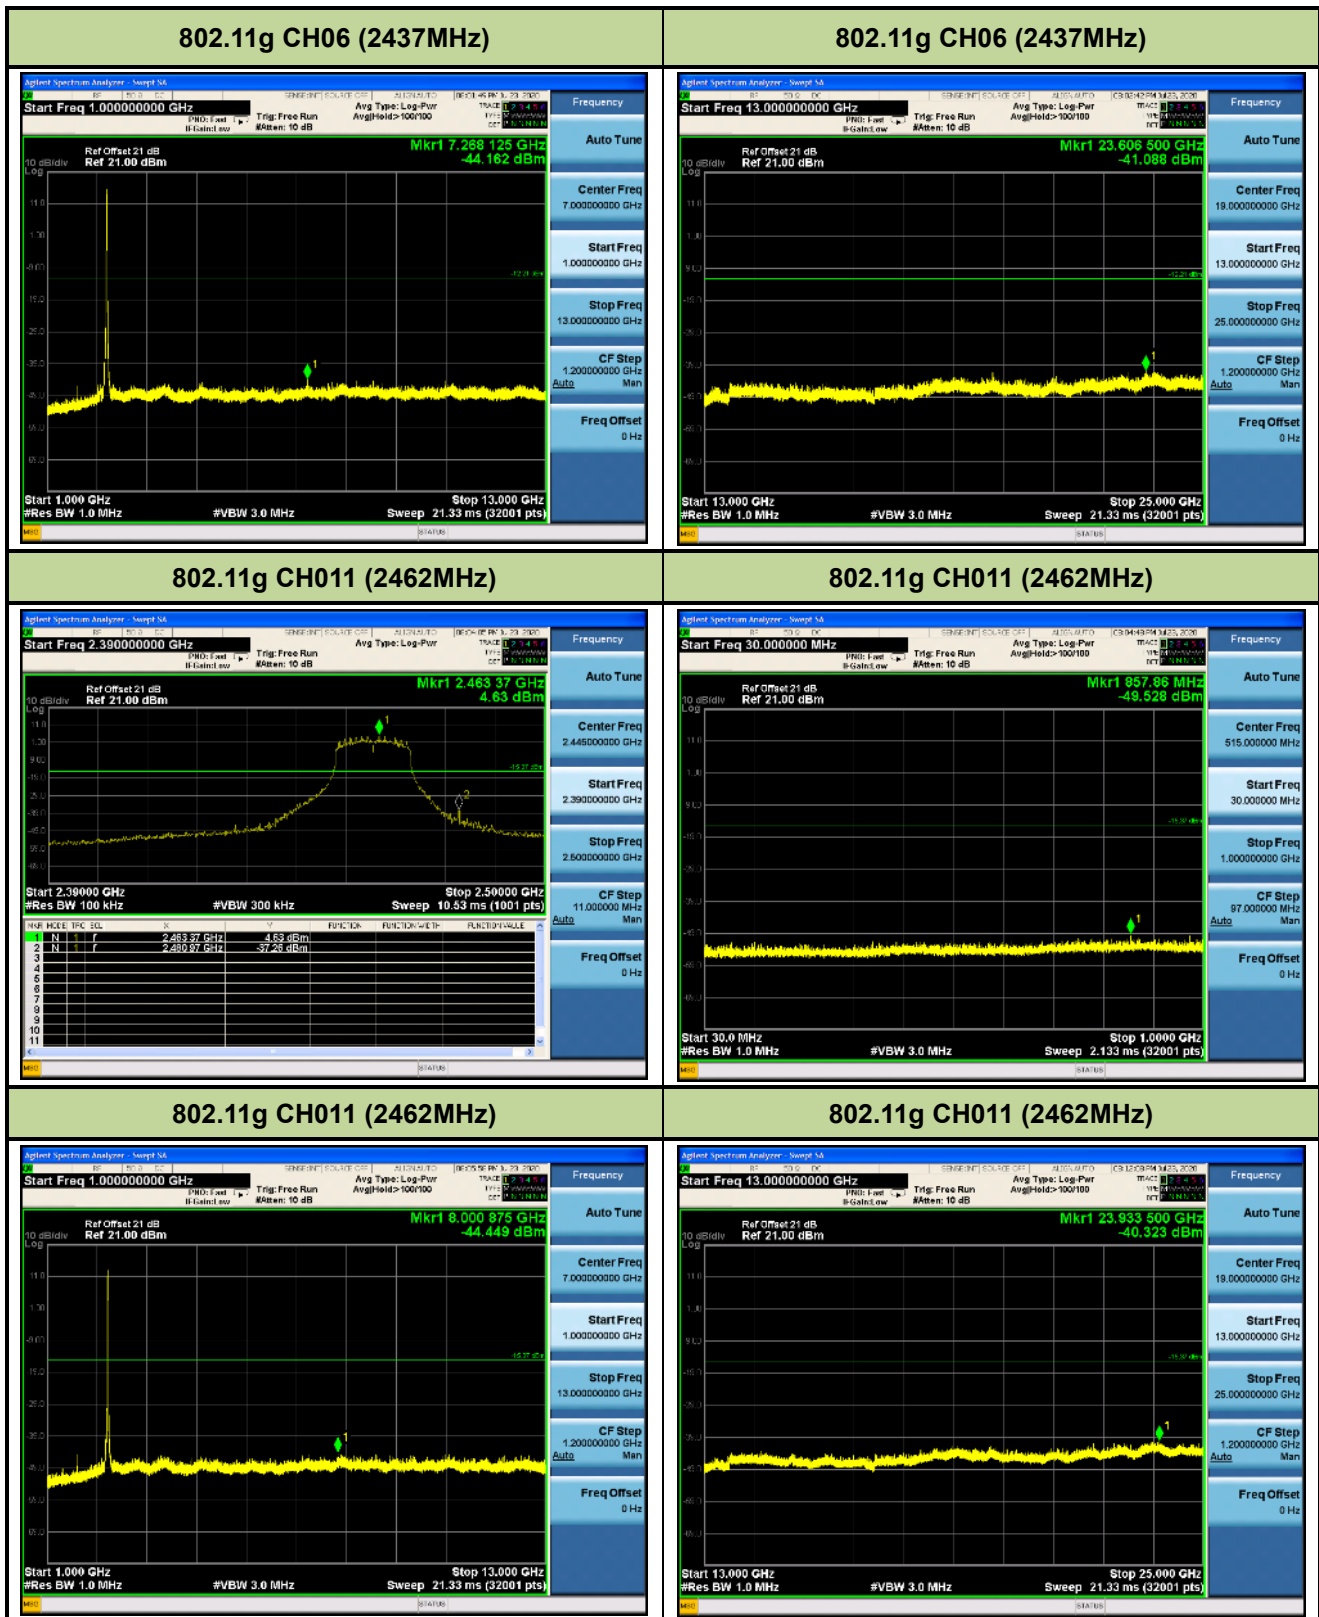

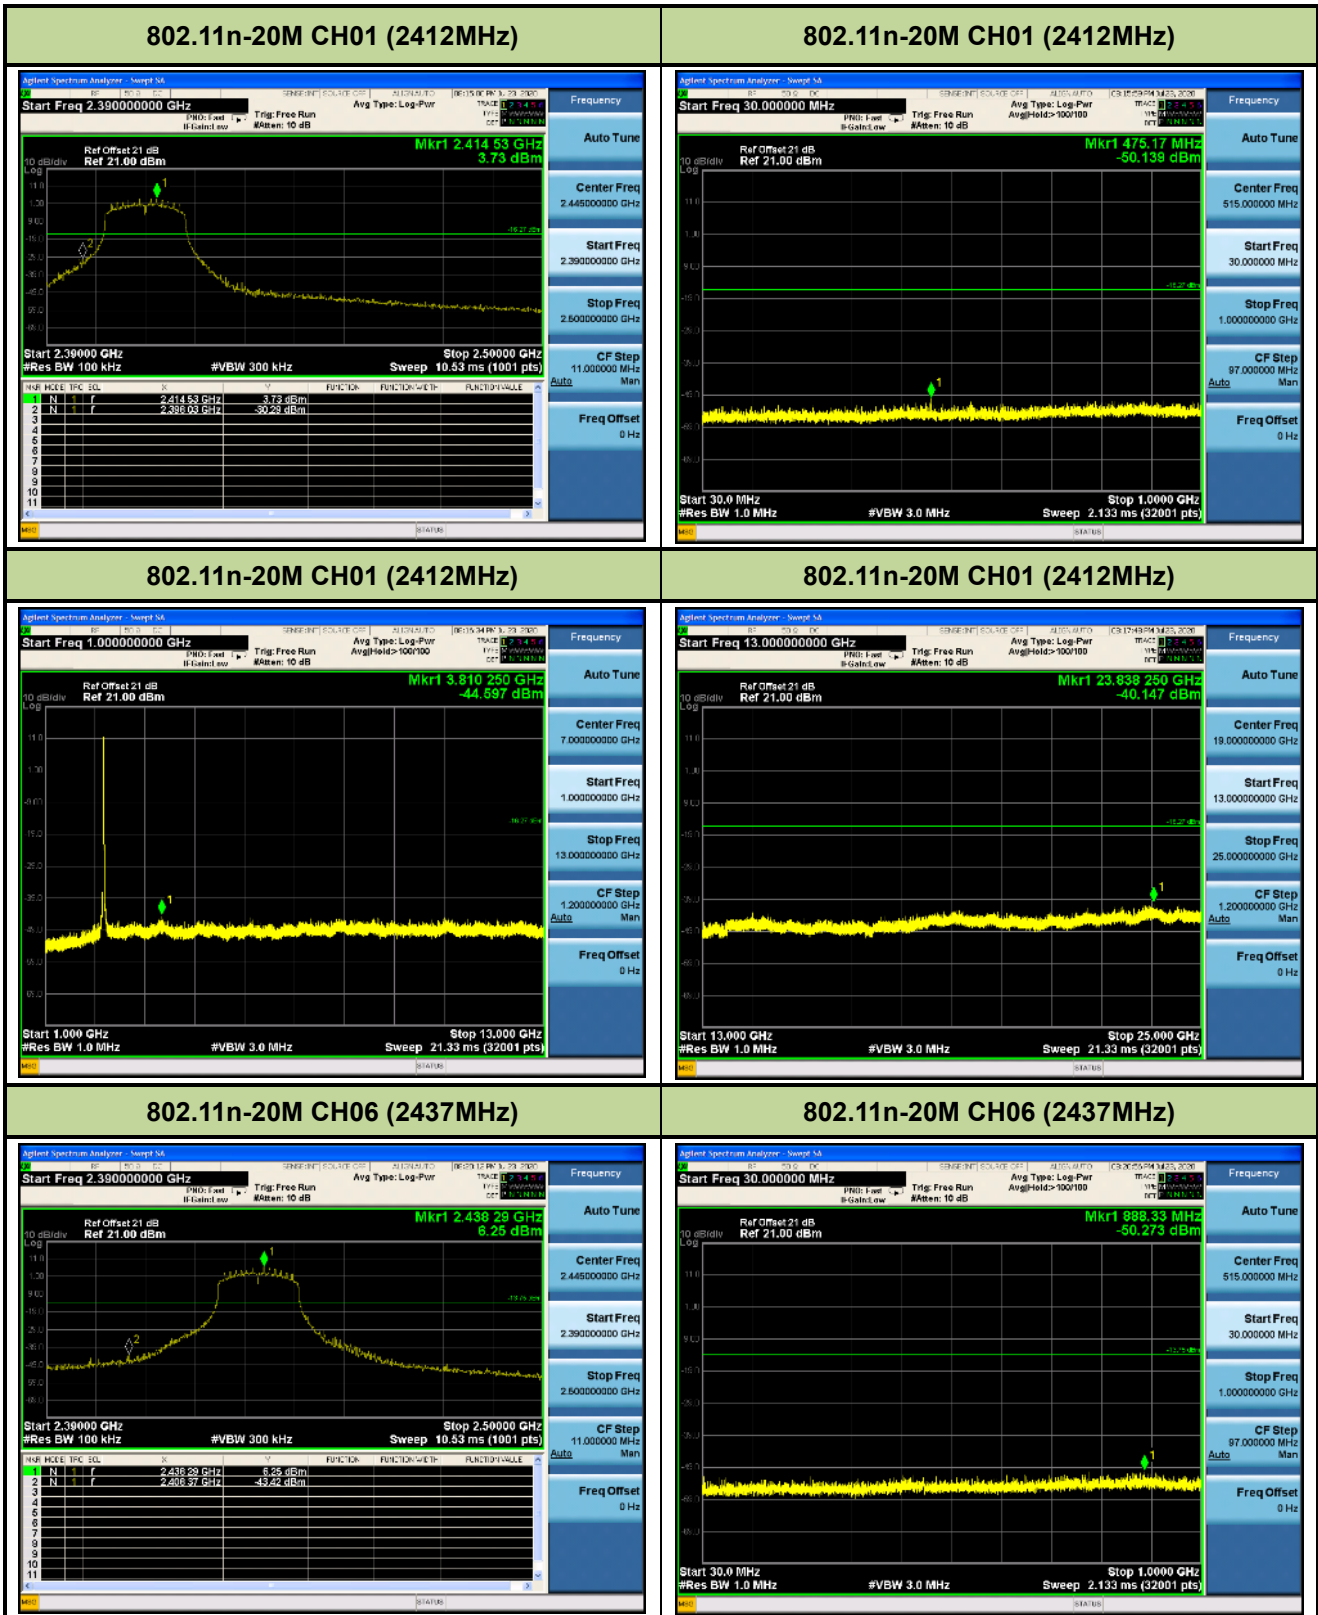

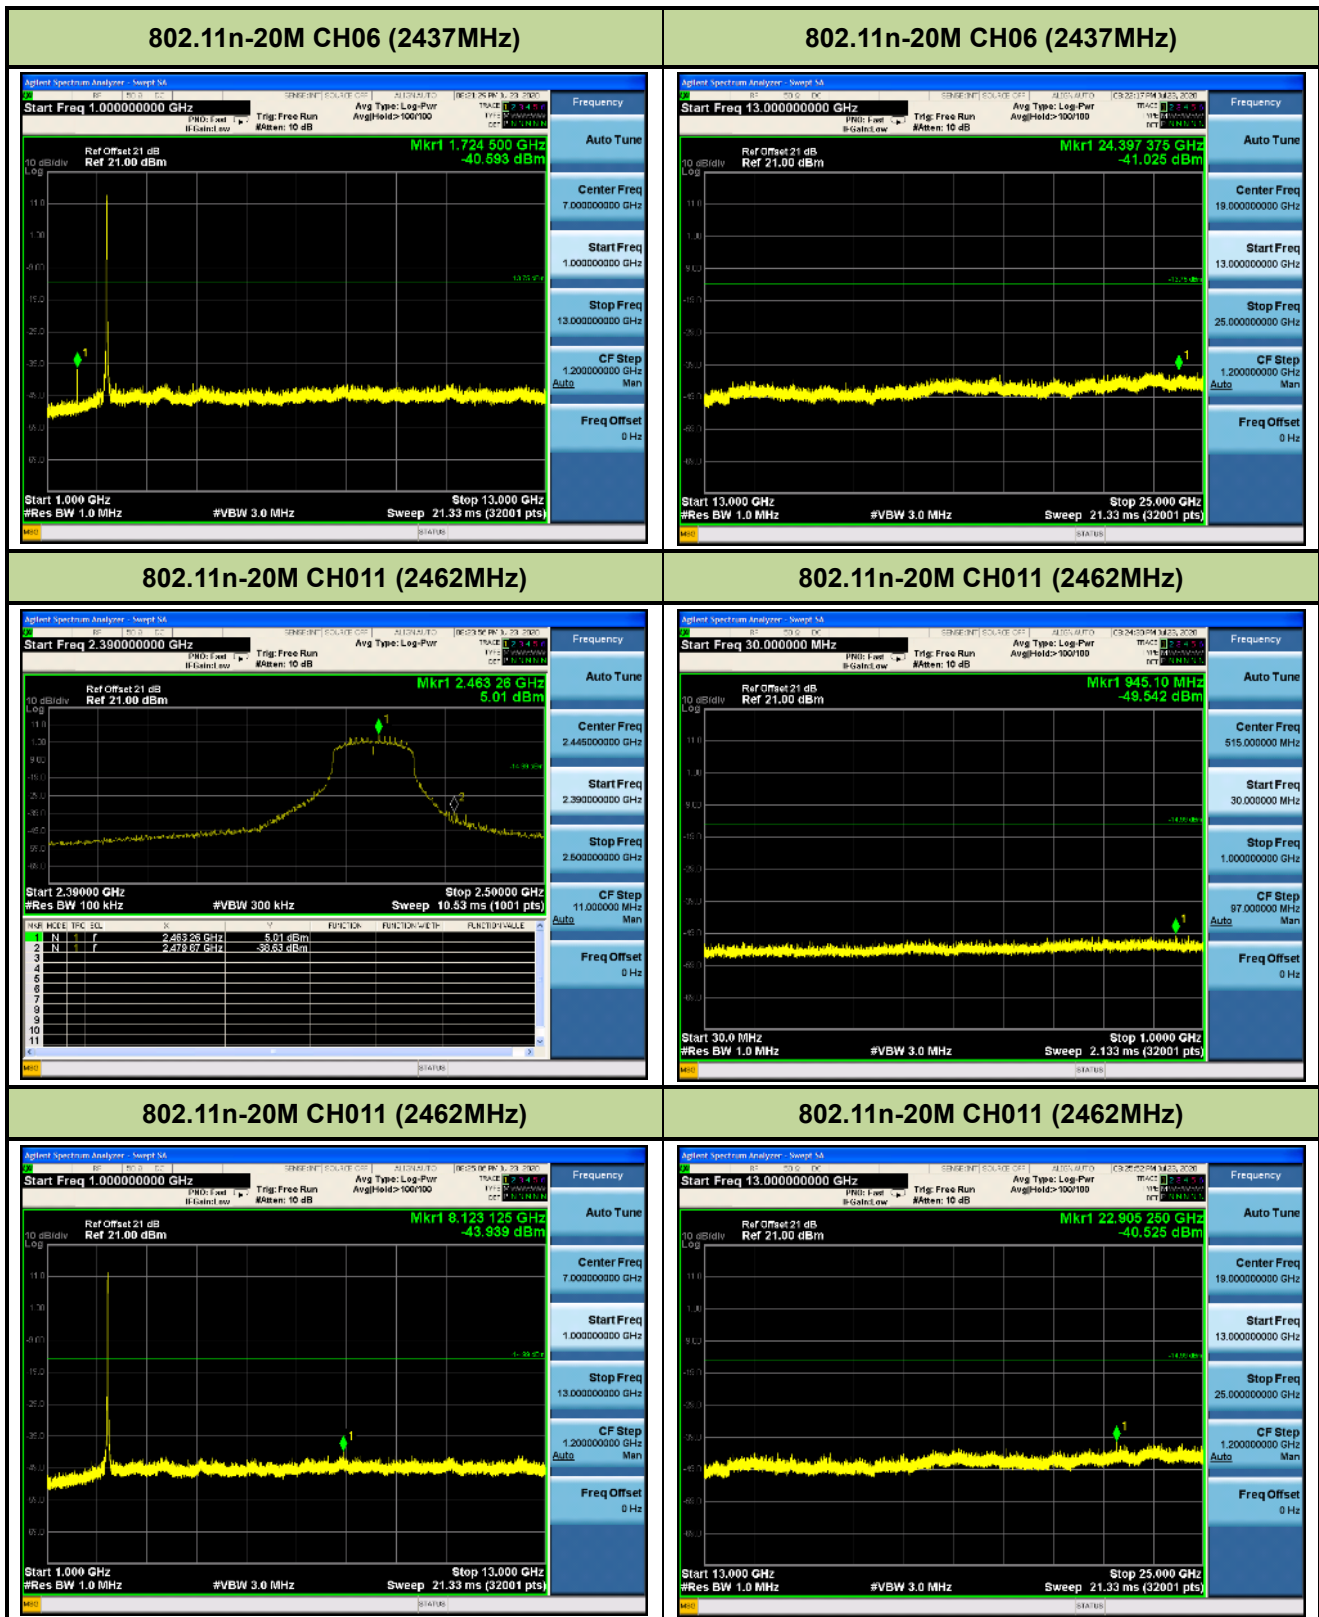

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 Section 11.12.2.3 (quasi-peak measurements)

ANSI C63.10 Section 11.12.2.4 (peak power measurements)

ANSI C63.10 Section 11.12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW \geq 1/T

4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode

5. Detector = Peak


6. Sweep time = auto

7. Trace mode = max hold


8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

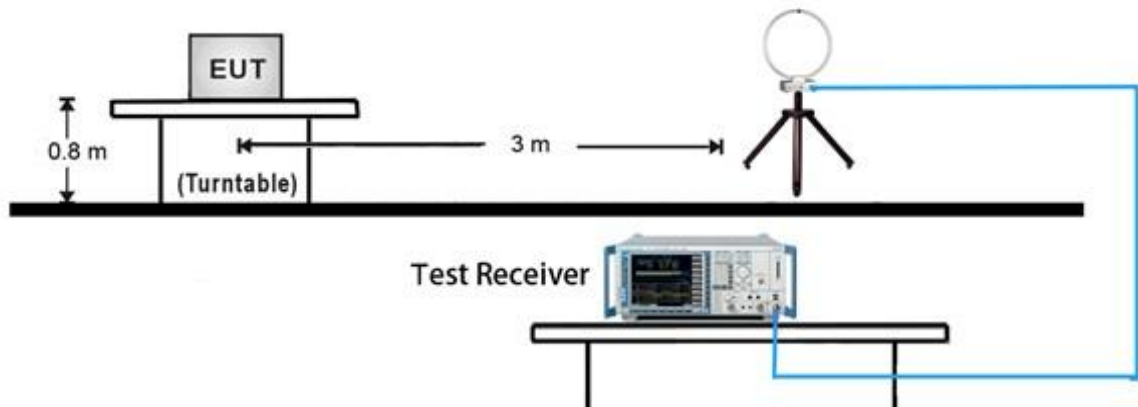


30MHz ~ 1GHz Test Setup:

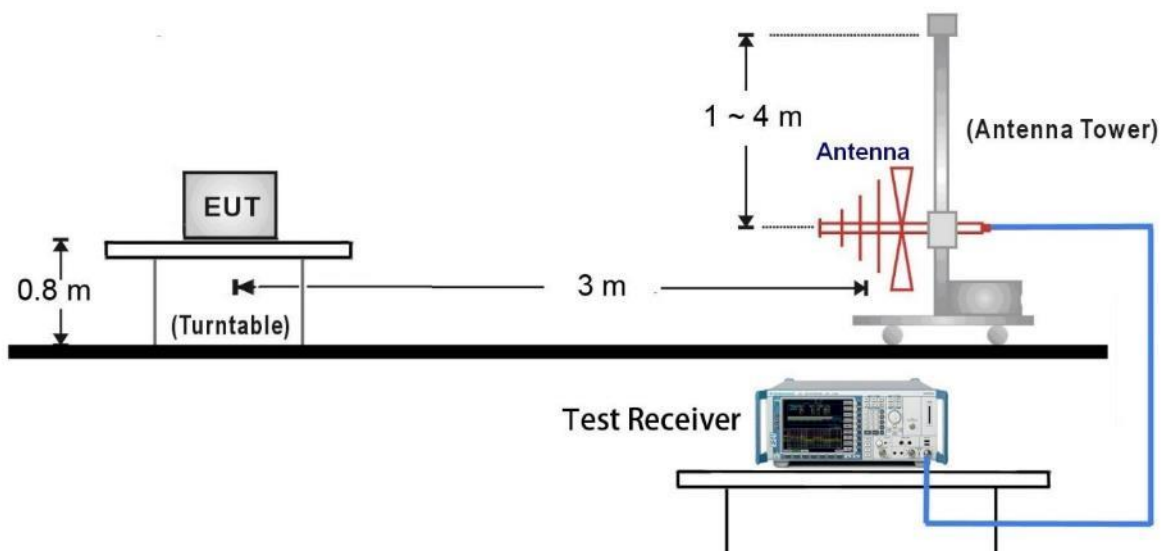

1GHz ~ 18GHz Test Setup:

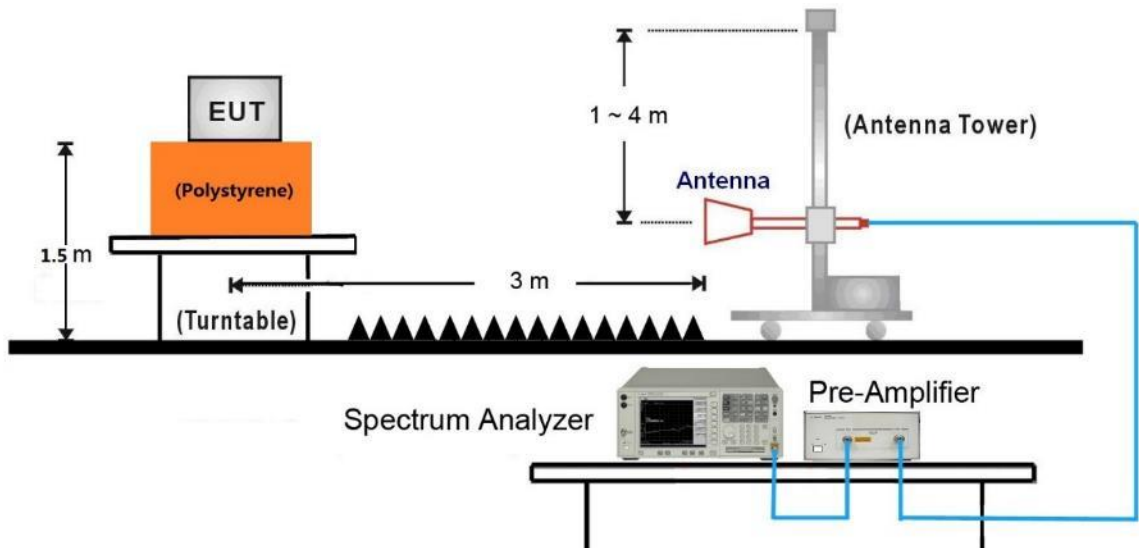


18GHz ~ 25GHz Test Setup:

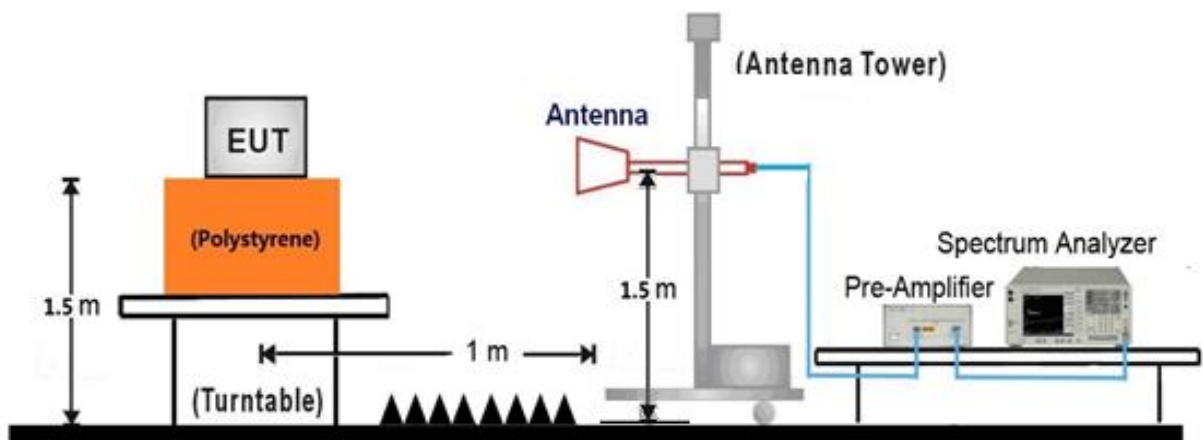

7.6.5. Test Result

EUT	Indoor Camera	Date of Test	2020-07-24
Factor	VULB 9162	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20_TX_CH6_ANT 0_PSAF10A-050Q	Test Voltage	AC 120V/60Hz

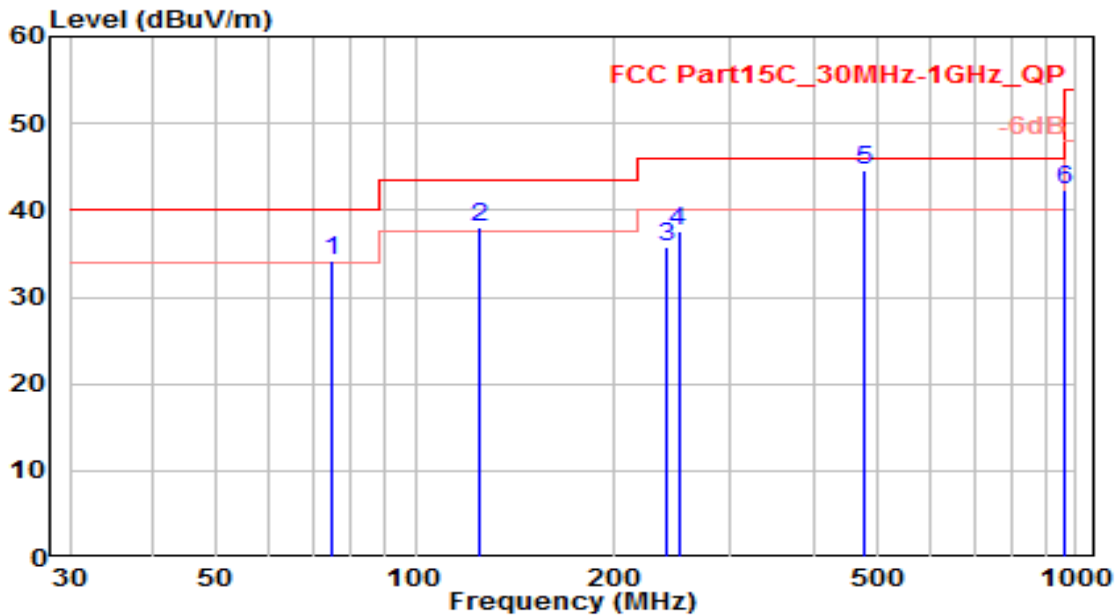


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	74.620	18.73	15.35	34.08	-5.92	40.00	100	150	QP
2	125.060	21.62	16.46	38.08	-5.42	43.50	100	260	QP
3	239.520	15.57	20.19	35.76	-10.24	46.00	100	140	QP
4	250.190	17.08	20.54	37.62	-8.38	46.00	100	310	QP
5 *	480.080	19.20	25.45	44.65	-1.35	46.00	150	70	QP
6	960.230	10.47	31.92	42.39	-11.61	54.00	120	160	QP

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- There is the ambient noise within frequency range 9kHz~30MHz and 18GHz~40GHz, the permissible value is not show in the report.

EUT	Indoor Camera	Date of Test	2020-07-24
Factor	VULB 9162	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20_TX_CH6_ANT 0_PSAF10A-050Q	Test Voltage	AC 120V/60Hz

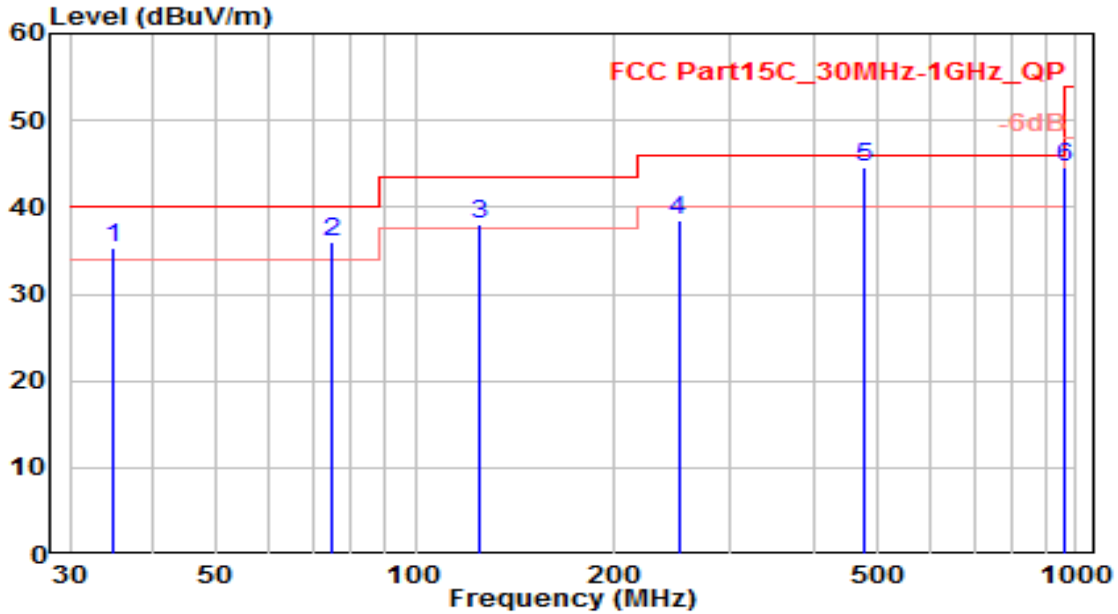


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	34.850	16.40	18.99	35.39	-4.61	40.00	130	340	QP
2	74.620	20.74	15.35	36.09	-3.91	40.00	100	260	QP
3	125.060	21.67	16.46	38.12	-5.38	43.50	100	150	QP
4	250.190	18.00	20.54	38.54	-7.46	46.00	100	290	QP
5	* 480.080	19.20	25.45	44.65	-1.35	46.00	100	160	QP
6	960.230	12.69	31.92	44.61	-9.39	54.00	100	305	QP

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- There is the ambient noise within frequency range 9kHz~30MHz and 18GHz~40GHz, the permissible value is not show in the report.

EUT	Indoor Camera	Date of Test	2020-08-14
Factor	VULB 9162	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n20_TX_CH6_ANT 0_1A52_UB52A	Test Voltage	AC 120V/60Hz

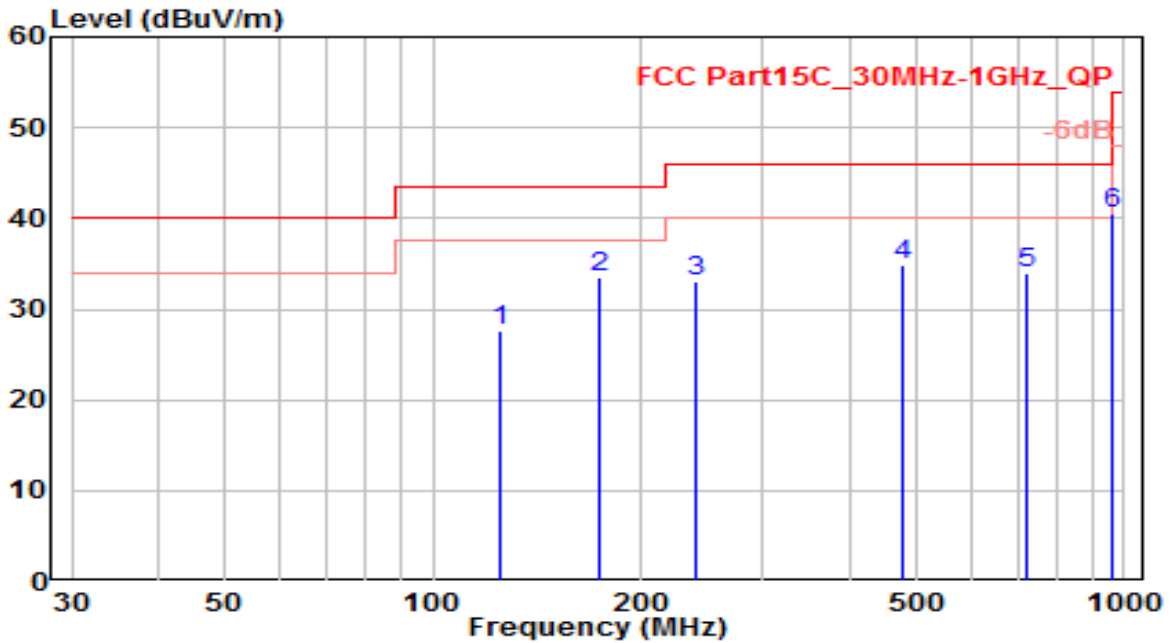


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	125.060	11.17	16.46	27.63	-15.87	43.50	100	260	QP
2	* 174.530	16.85	16.77	33.62	-9.88	43.50	100	140	QP
3	239.520	12.80	20.19	32.99	-13.01	46.00	100	330	QP
4	480.080	9.35	25.45	34.80	-11.20	46.00	100	150	QP
5	720.640	4.49	29.46	33.95	-12.05	46.00	100	340	QP
6	960.230	8.66	31.92	40.58	-13.42	54.00	100	190	QP

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-08-14
Factor	VULB 9162	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n20_TX_CH6_ANT 0_1A52_UB52A	Test Voltage	AC 120V/60Hz

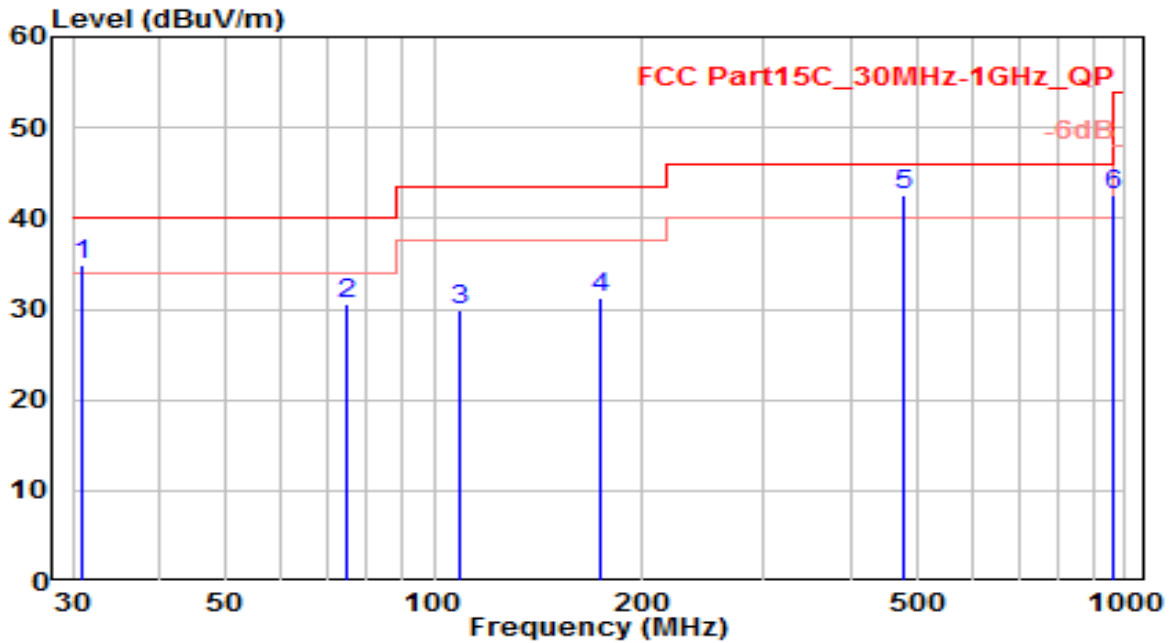


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	30.970	16.62	18.20	34.82	-5.18	40.00	100	260	QP
2	74.620	15.25	15.35	30.60	-9.40	40.00	100	150	QP
3	108.570	11.04	18.85	29.89	-13.61	43.50	100	105	QP
4	174.530	14.43	16.77	31.20	-12.30	43.50	100	280	QP
5	* 480.080	17.02	25.45	42.47	-3.53	46.00	100	340	QP
6	960.230	10.72	31.92	42.64	-11.36	54.00	100	190	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

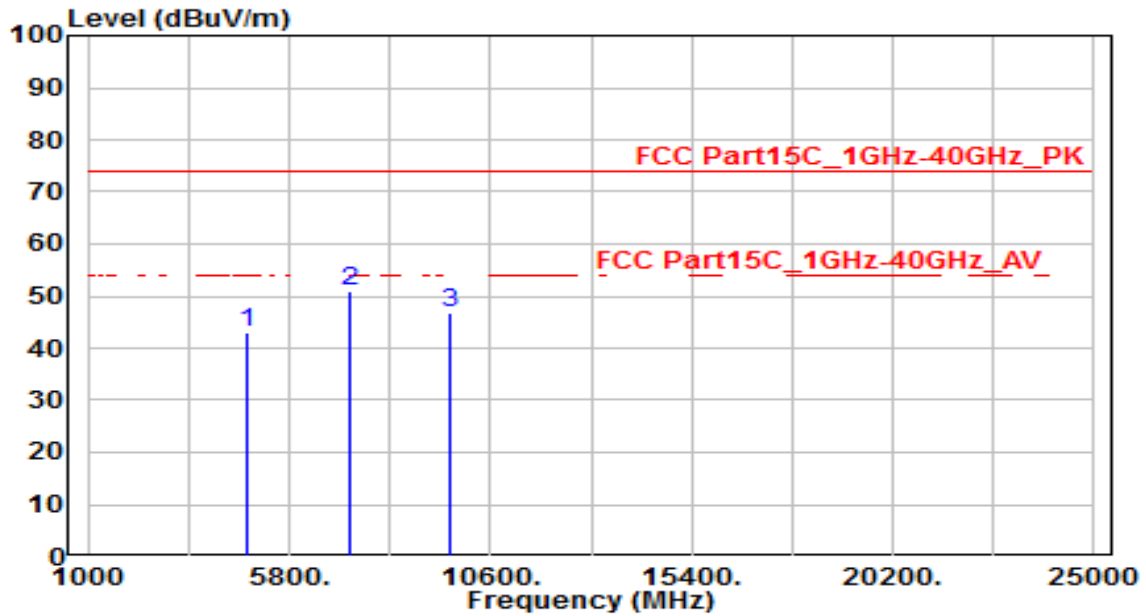


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.58	3.33	42.91	-31.09	74.00	150	400	Peak
2	* 7236.000	40.05	10.97	51.02	-22.98	74.00	150	400	Peak
3	9648.000	32.15	14.70	46.85	-27.15	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

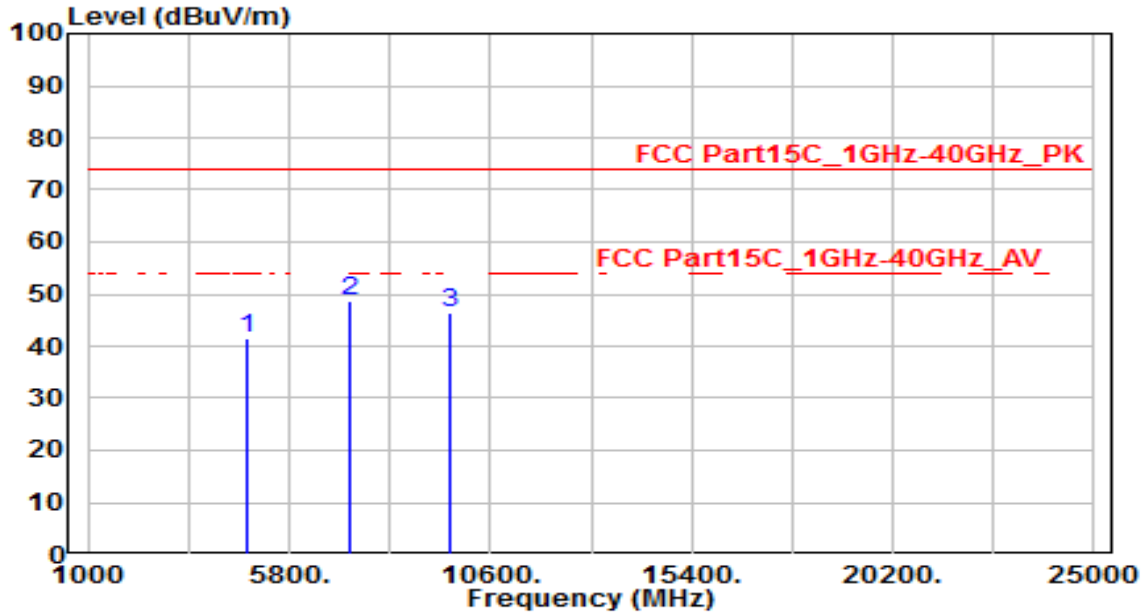


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	38.20	3.33	41.53	-32.47	74.00	150	400	Peak
2	* 7236.000	37.87	10.97	48.84	-25.16	74.00	150	400	Peak
3	9648.000	31.82	14.70	46.52	-27.48	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

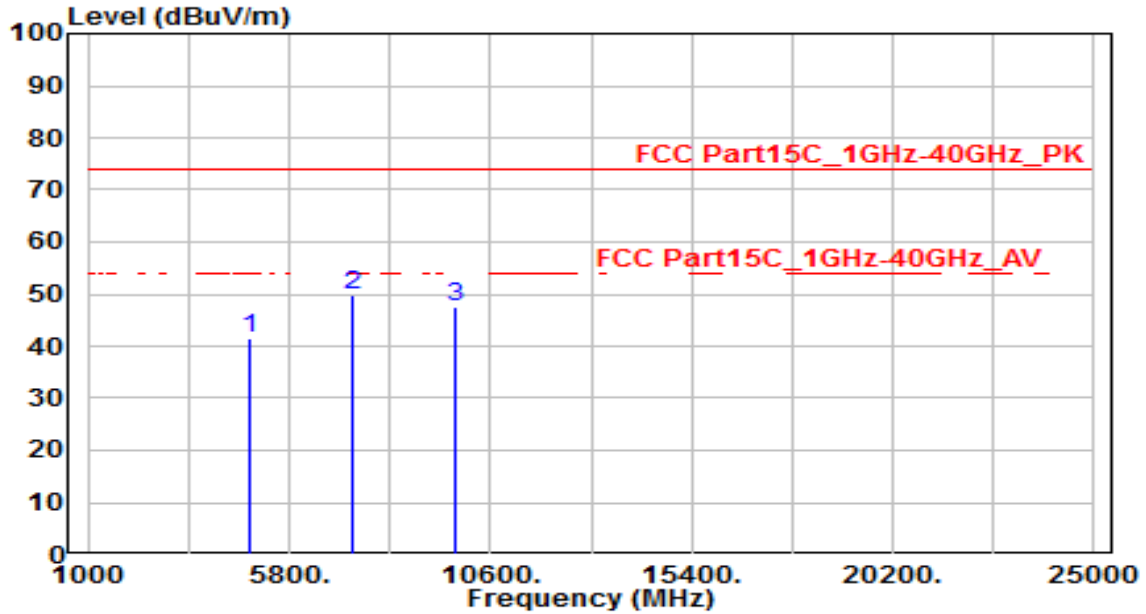


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.04	3.45	41.49	-32.51	74.00	150	400	Peak
2	* 7311.000	38.50	11.18	49.68	-24.32	74.00	150	400	Peak
3	9748.000	32.63	14.89	47.52	-26.48	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

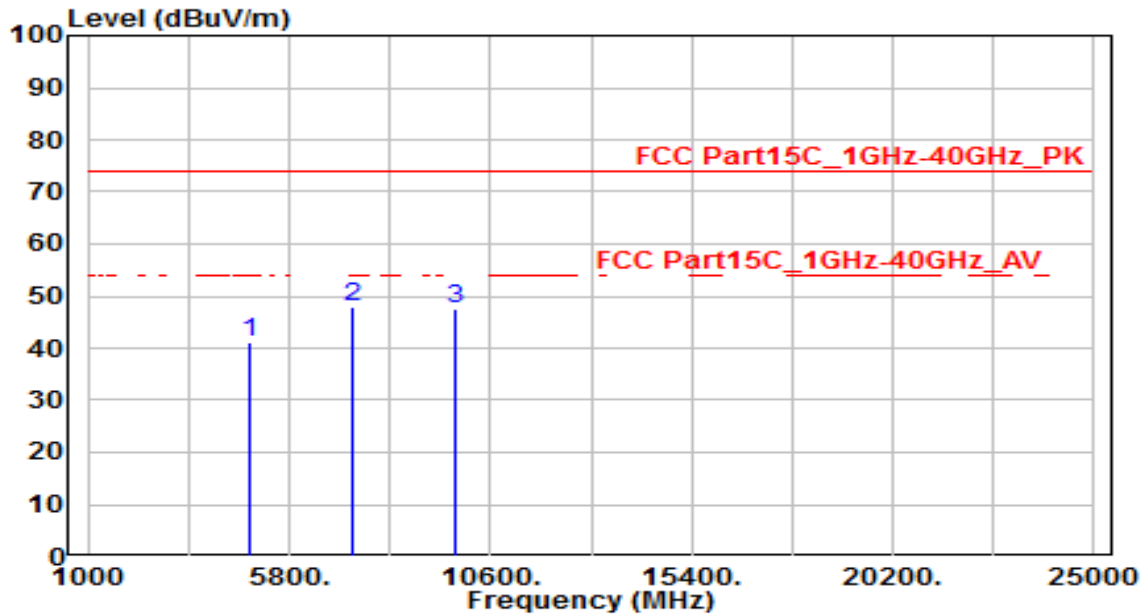


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.68	3.45	41.13	-32.87	74.00	150	400	Peak
2	* 7311.000	36.88	11.18	48.06	-25.94	74.00	150	400	Peak
3	9748.000	32.81	14.89	47.70	-26.30	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

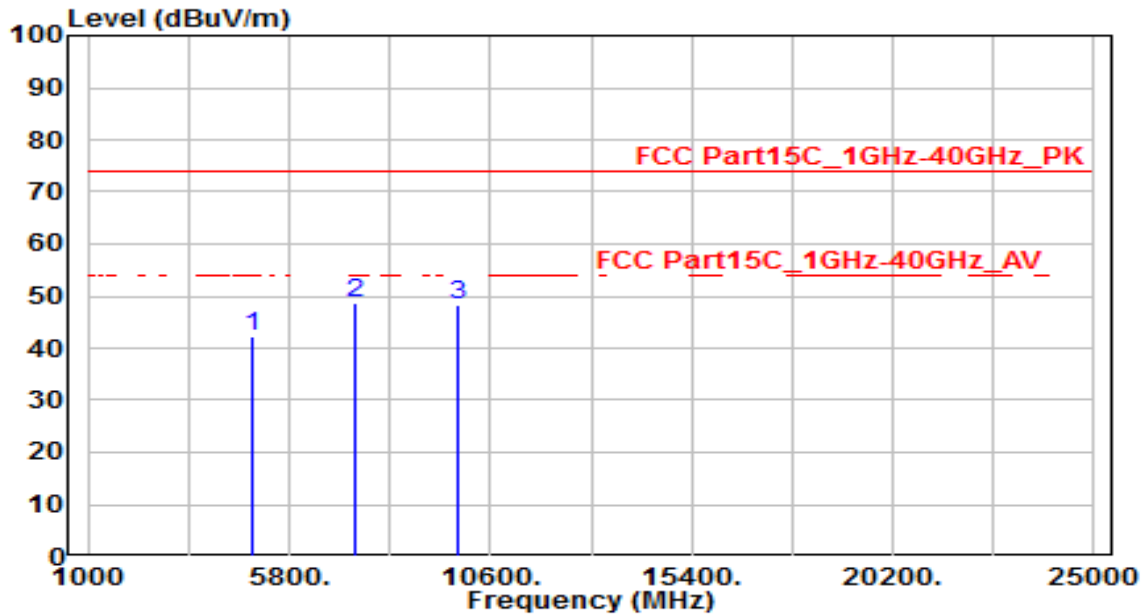


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.55	3.57	42.12	-31.88	74.00	150	400	Peak
2	* 7386.000	37.20	11.39	48.59	-25.41	74.00	150	400	Peak
3	9848.000	33.35	15.07	48.42	-25.58	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

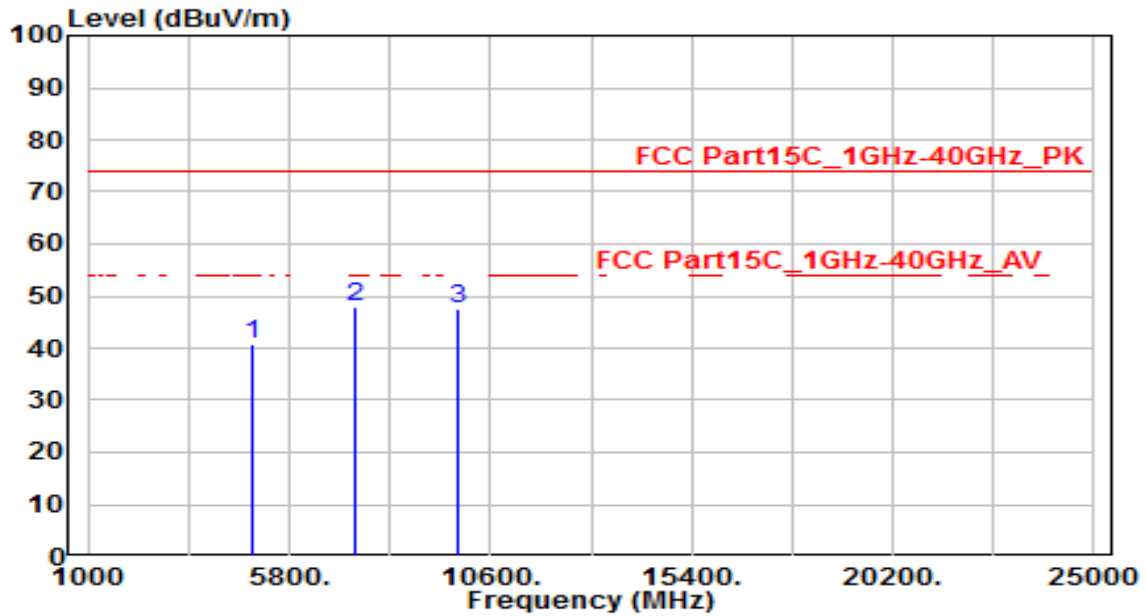


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.34	3.57	40.91	-33.09	74.00	150	400	Peak
2	* 7386.000	36.70	11.39	48.09	-25.91	74.00	150	400	Peak
3	9848.000	32.62	15.07	47.69	-26.31	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

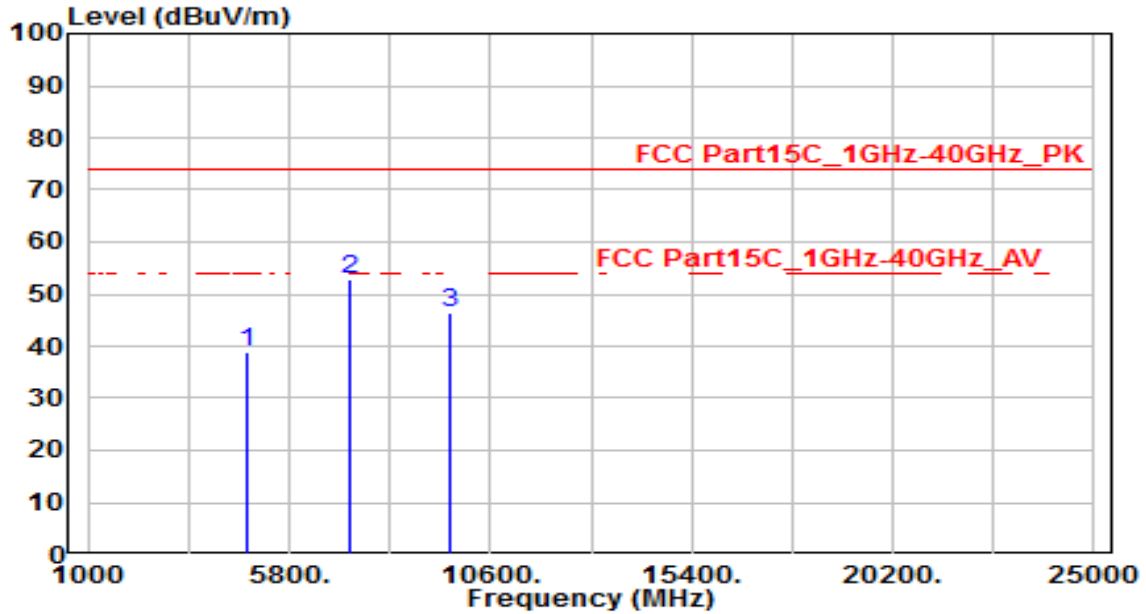


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.70	3.33	39.03	-34.97	74.00	150	400	Peak
2	* 7236.000	41.84	10.97	52.81	-21.19	74.00	150	400	Peak
3	9648.000	31.68	14.70	46.38	-27.62	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

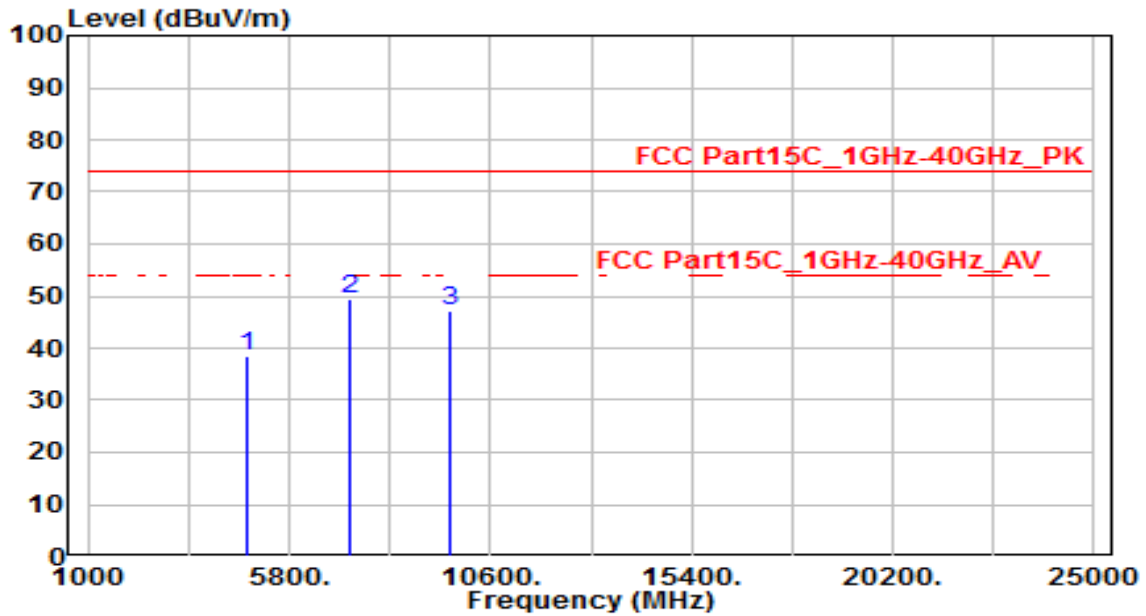


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.34	3.33	38.66	-35.34	74.00	150	400	Peak
2	* 7236.000	38.40	10.97	49.37	-24.63	74.00	150	400	Peak
3	9648.000	32.44	14.70	47.14	-26.86	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

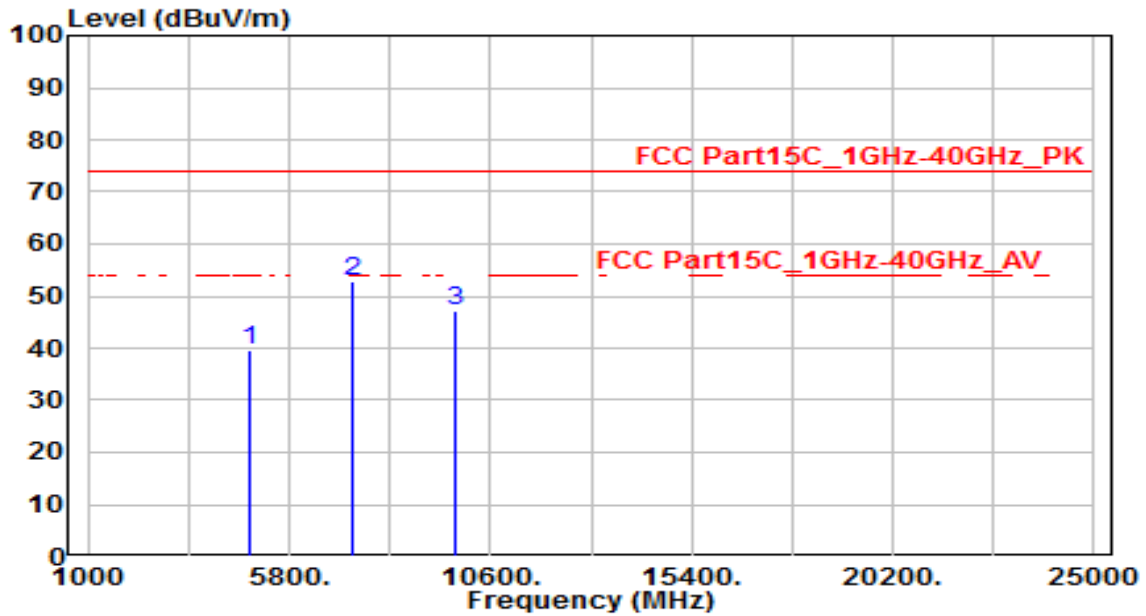


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.17	3.45	39.62	-34.38	74.00	150	400	Peak
2	* 7311.000	41.59	11.18	52.77	-21.23	74.00	150	400	Peak
3	9748.000	32.16	14.89	47.05	-26.95	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

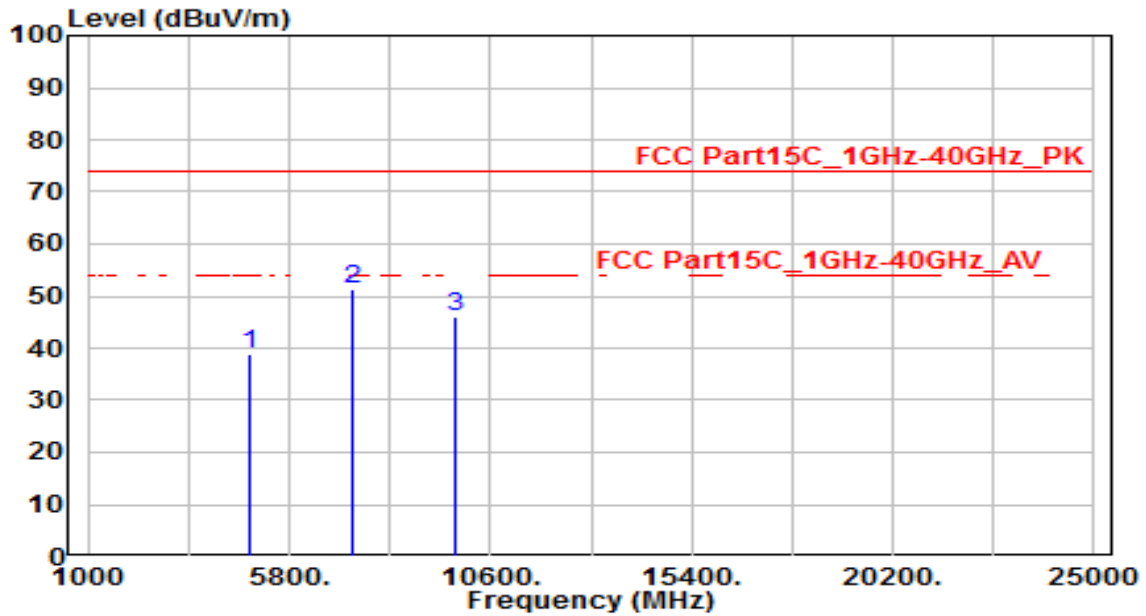


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.26	3.45	38.71	-35.29	74.00	150	400	Peak
2	* 7311.000	40.02	11.18	51.20	-22.80	74.00	150	400	Peak
3	9748.000	31.11	14.89	45.99	-28.01	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

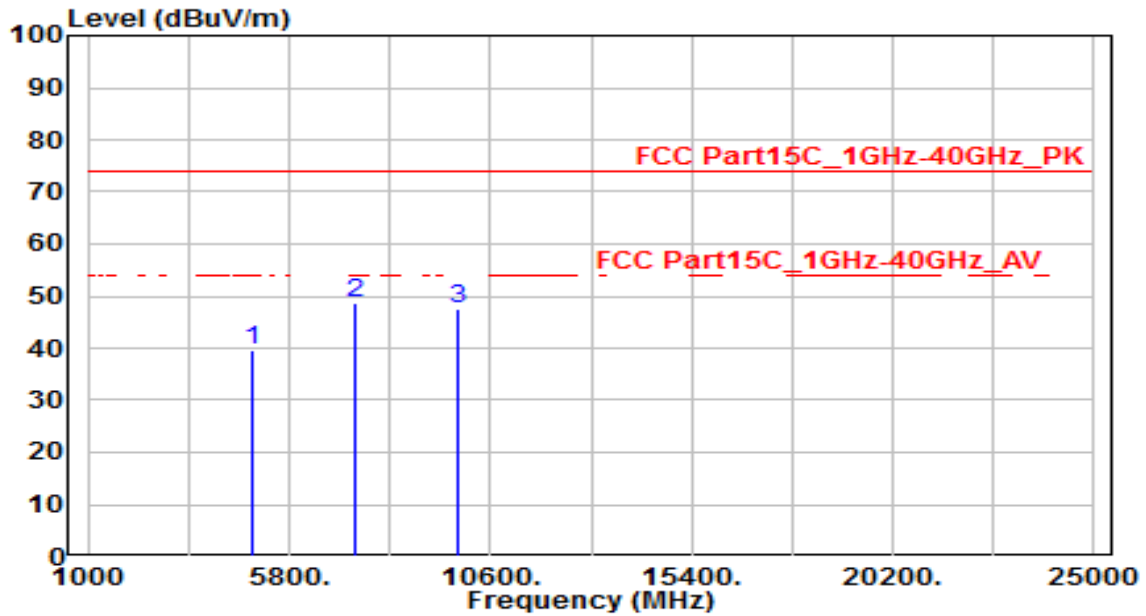


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	36.05	3.57	39.61	-34.39	74.00	150	400	Peak
2	* 7386.000	37.39	11.39	48.78	-25.22	74.00	150	400	Peak
3	9848.000	32.42	15.07	47.50	-26.50	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

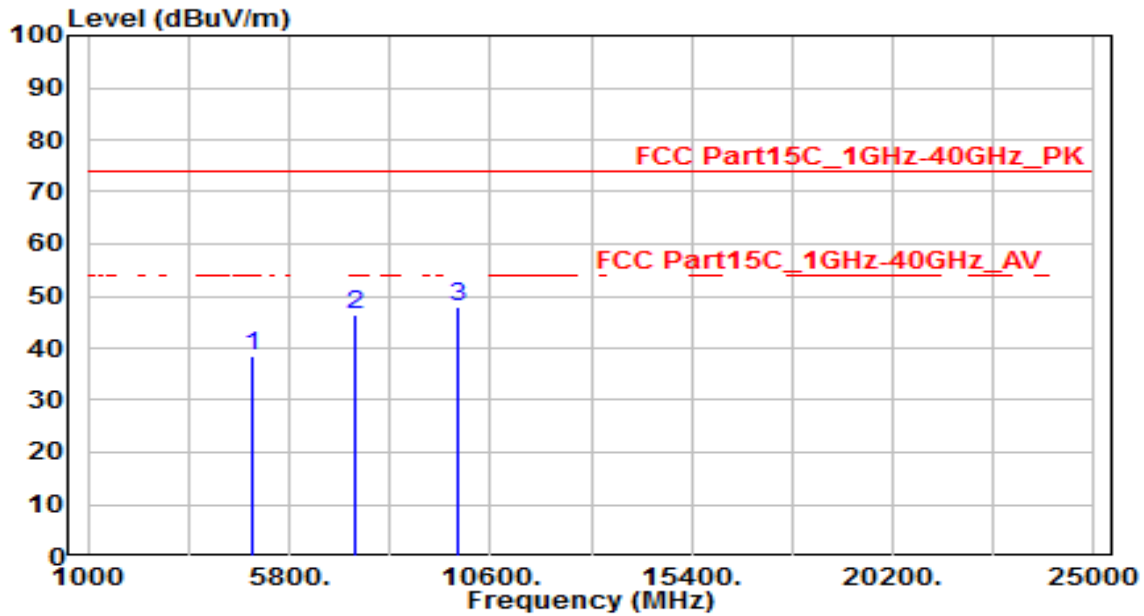


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.11	3.57	38.67	-35.33	74.00	150	400	Peak
2	7386.000	35.17	11.39	46.56	-27.44	74.00	150	400	Peak
3	* 9848.000	32.67	15.07	47.75	-26.25	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

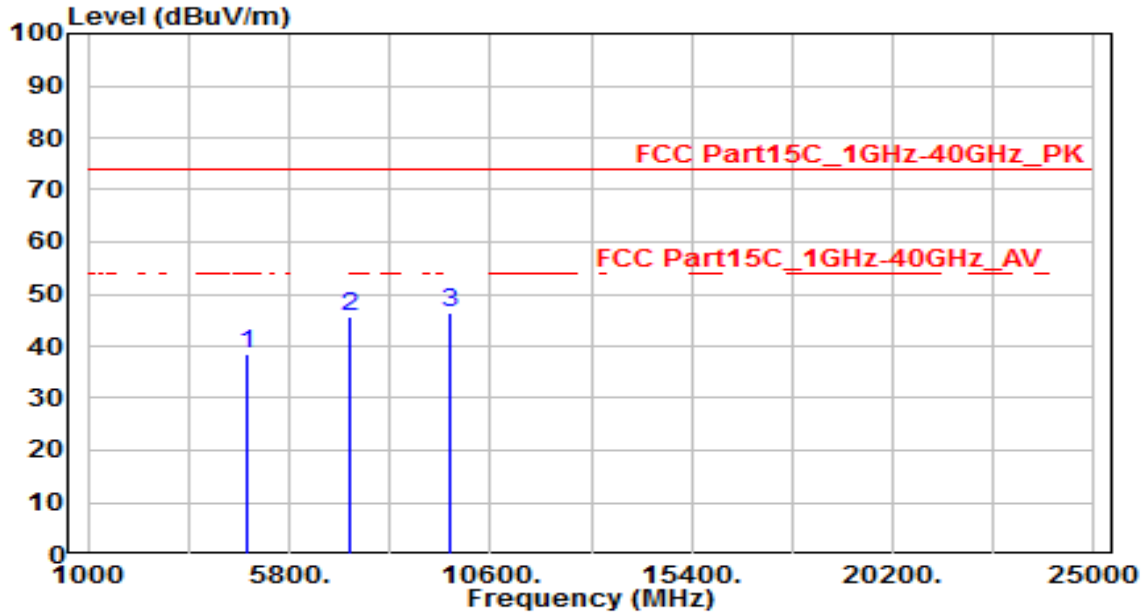


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.16	3.33	38.49	-35.51	74.00	150	400	Peak
2	7236.000	34.69	10.97	45.66	-28.34	74.00	150	400	Peak
3	* 9648.000	31.81	14.70	46.51	-27.49	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

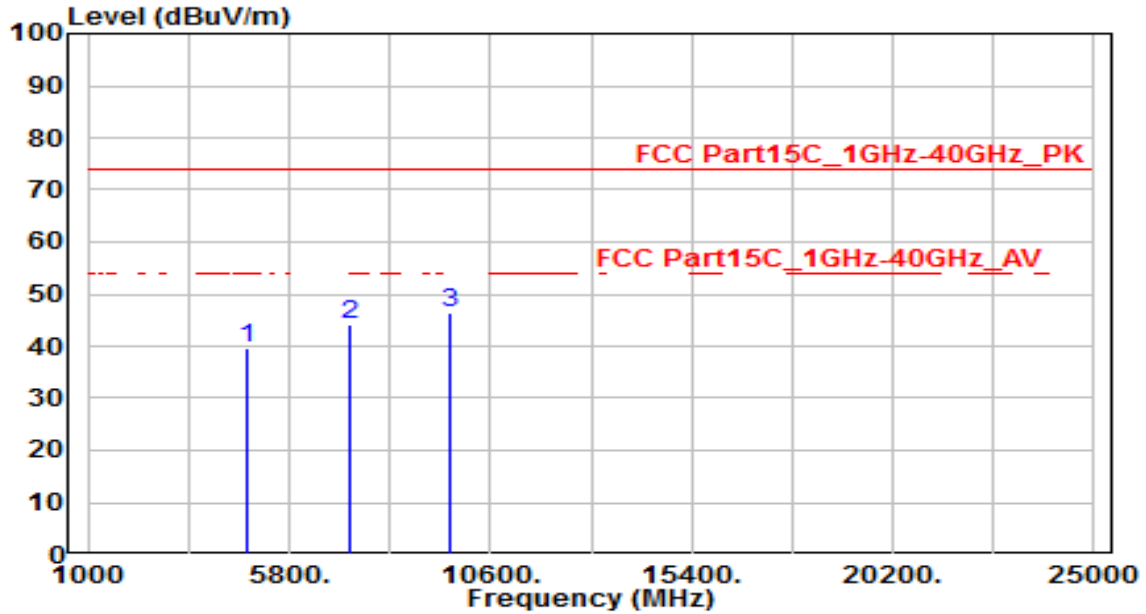


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	36.16	3.33	39.49	-34.51	74.00	150	400	Peak
2	7236.000	33.00	10.97	43.97	-30.03	74.00	150	400	Peak
3	* 9648.000	31.55	14.70	46.25	-27.75	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

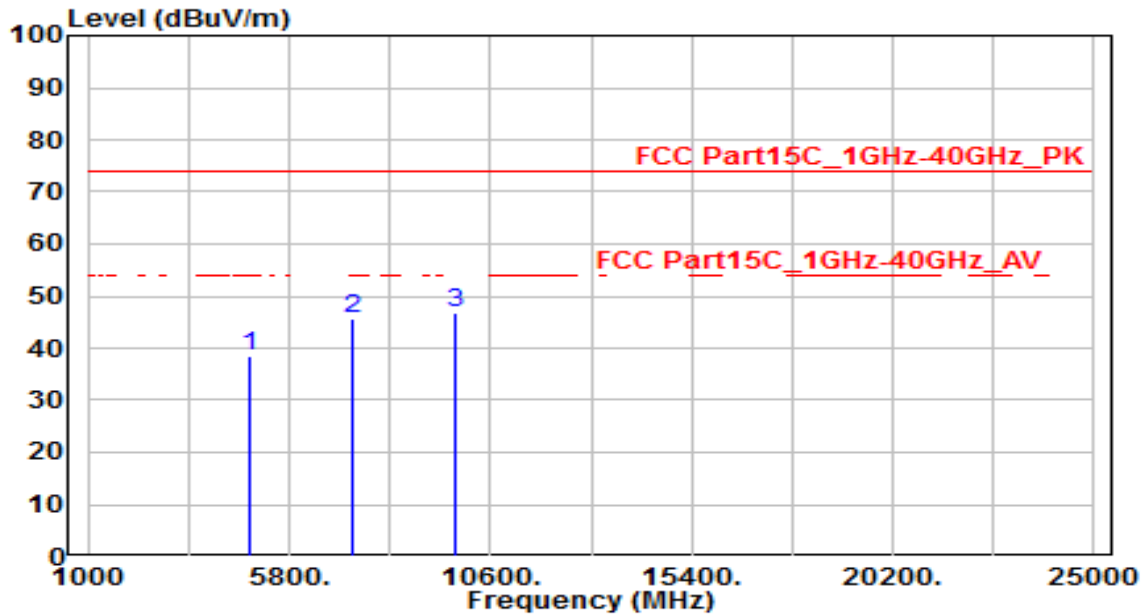


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.00	3.45	38.45	-35.55	74.00	150	400	Peak
2	7311.000	34.46	11.18	45.64	-28.36	74.00	150	400	Peak
3	* 9748.000	31.82	14.89	46.70	-27.30	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

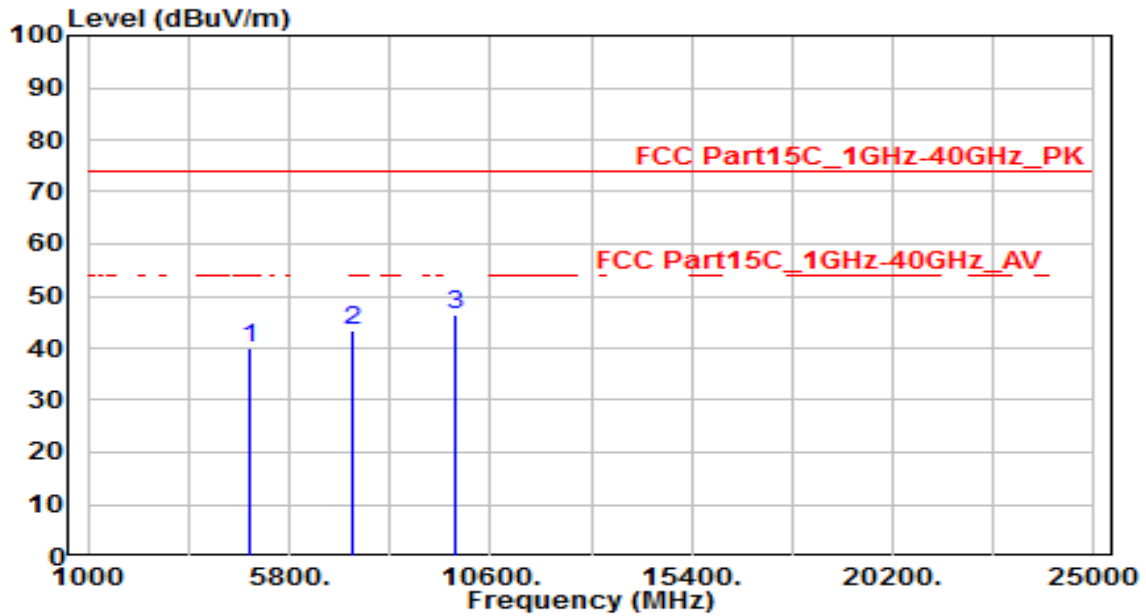


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.60	3.45	40.04	-33.96	74.00	150	400	Peak
2	7311.000	32.21	11.18	43.39	-30.61	74.00	150	400	Peak
3	* 9748.000	31.41	14.89	46.30	-27.70	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

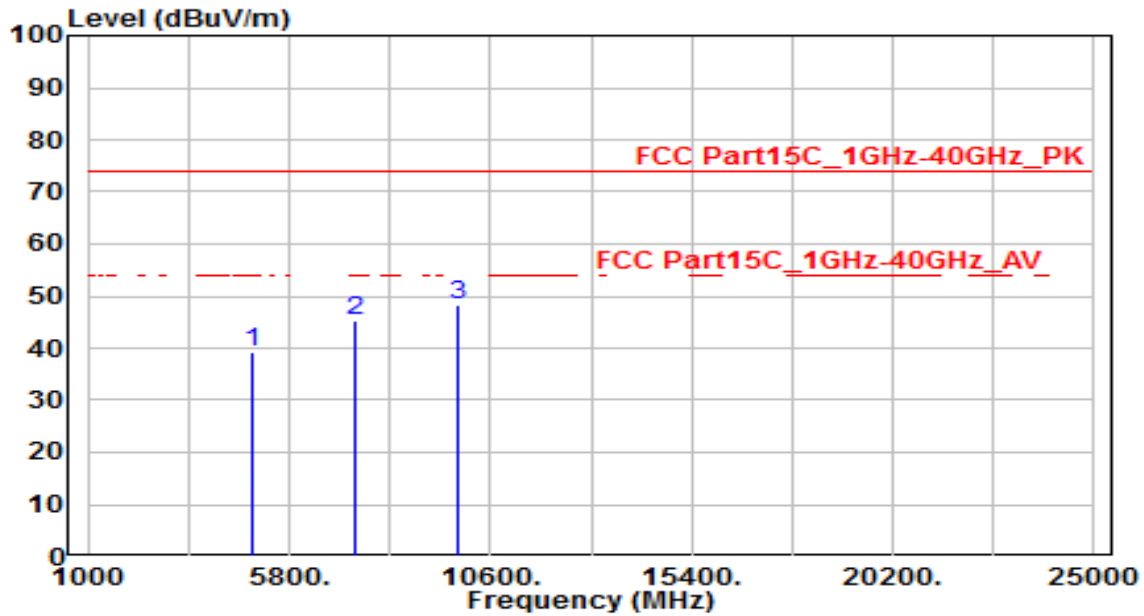


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.86	3.57	39.43	-34.57	74.00	150	400	Peak
2	7386.000	33.94	11.39	45.34	-28.66	74.00	150	400	Peak
3	* 9848.000	33.33	15.07	48.41	-25.59	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

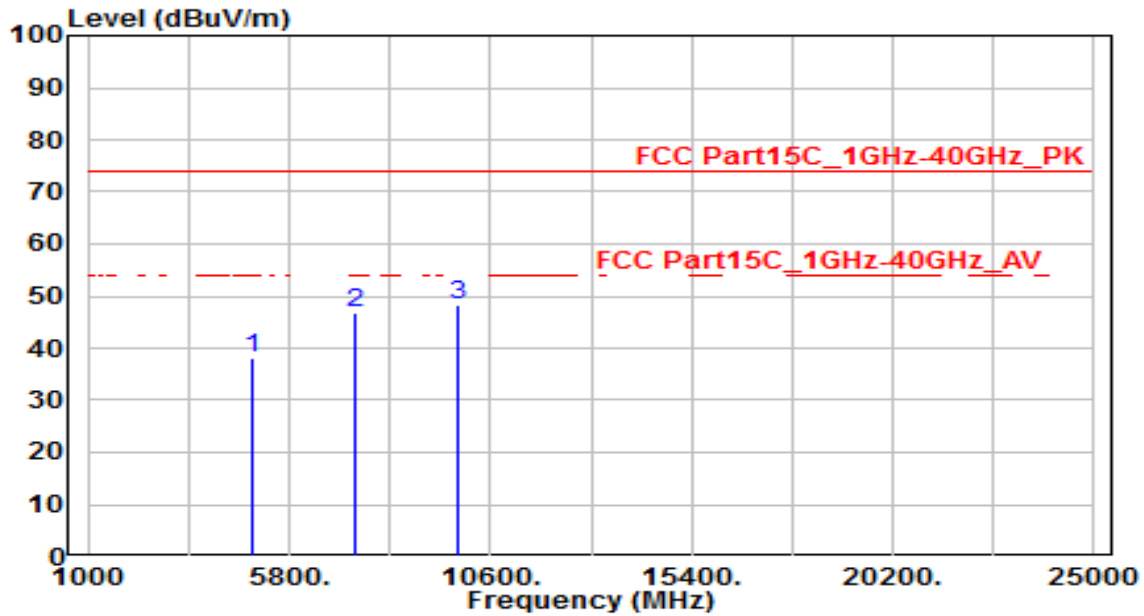


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.60	3.57	38.17	-35.83	74.00	150	400	Peak
2	7386.000	35.45	11.39	46.84	-27.16	74.00	150	400	Peak
3	* 9848.000	33.18	15.07	48.25	-25.75	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Co-location Mode :

EUT	Indoor Camera	Date of Test	2020-08-11
Factor	BBHA 9120D	Temp. / Humidity	24.5°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Co-location_Wi-Fi + DECT Transmit	Test Voltage	AC 120V/60Hz

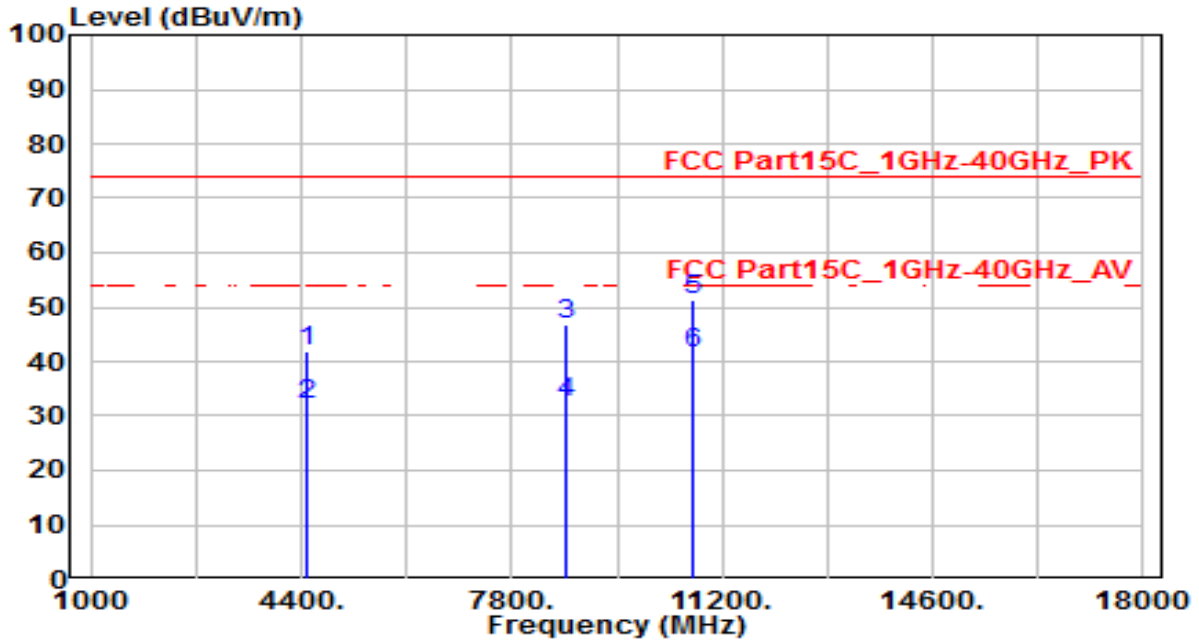


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4510.500	39.25	2.58	41.83	-32.17	74.00	150	400	Peak
2	4510.500	29.36	2.58	31.94	-22.06	54.00	150	400	Average
3	8667.000	33.97	12.86	46.83	-27.17	74.00	150	400	Peak
4	8667.000	19.45	12.86	32.31	N/A	N/A	150	400	Average
5	10707.000	34.00	17.36	51.37	-22.63	74.00	150	400	Peak
6	* 10707.000	24.10	17.36	41.46	-12.54	54.00	150	400	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Average setting is use 1/T ,

EUT	Indoor Camera	Date of Test	2020-08-11
Factor	BBHA 9120D	Temp. / Humidity	24.5°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Co-location_Wi-Fi + DECT Transmit	Test Voltage	AC 120V/60Hz

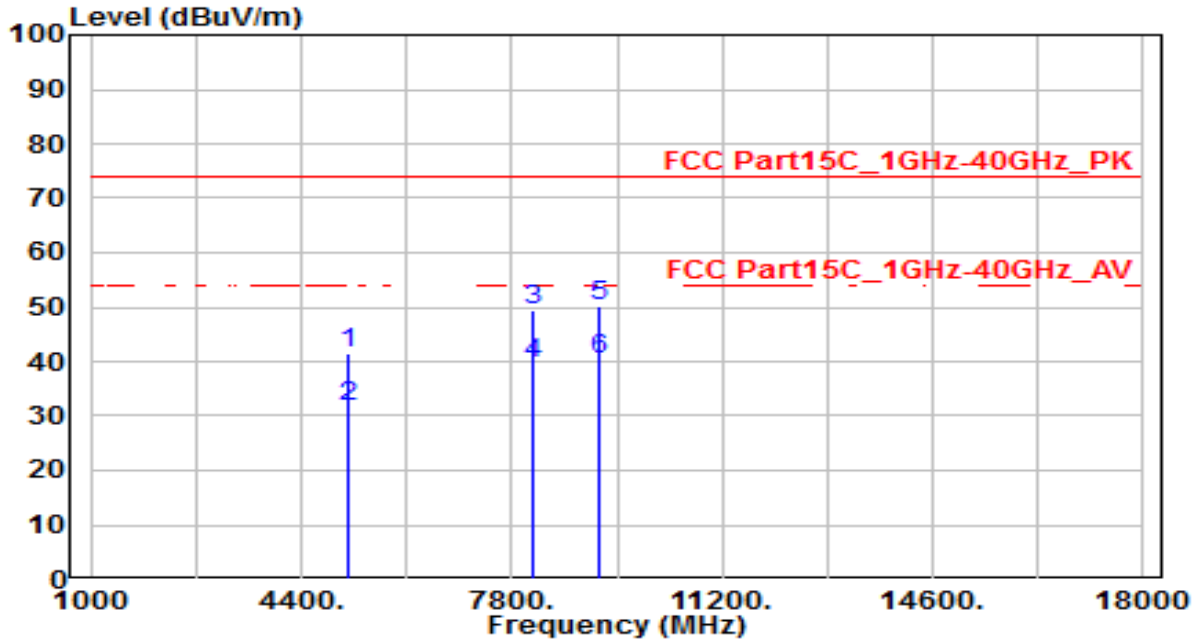

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5156.500	37.76	3.91	41.67	-32.33	74.00	150	400	Peak
2	5156.500	27.92	3.91	31.84	N/A	N/A	150	400	Average
3	8157.000	37.03	12.51	49.53	-24.47	74.00	150	400	Peak
4	* 8157.000	27.05	12.51	39.56	-14.44	54.00	150	400	Average
5	9211.000	36.34	13.99	50.34	-23.66	74.00	150	400	Peak
6	9211.000	26.35	13.99	40.34	N/A	N/A	150	400	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.2

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW \geq 1/T
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4. Test Setup

1GHz ~ 18GHz Test Setup:

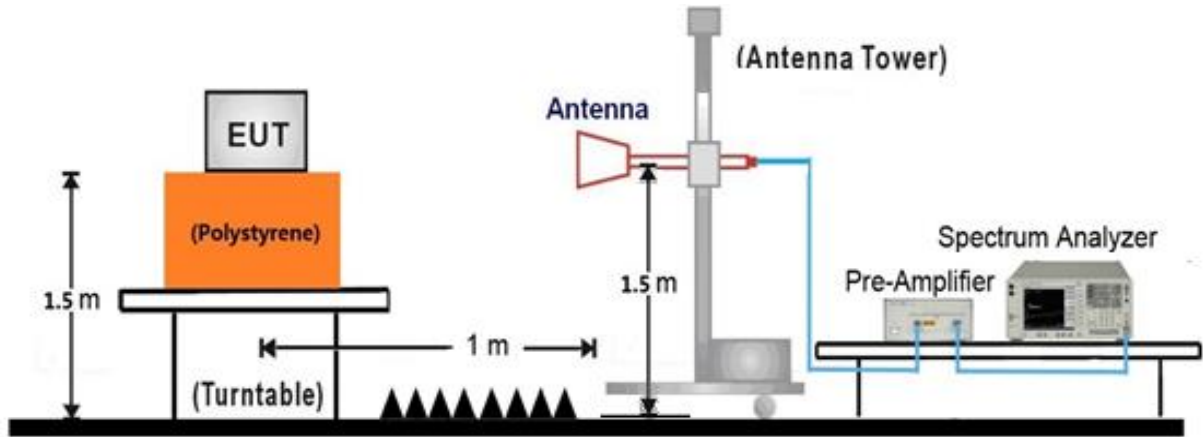

7.7.5. Test Result

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

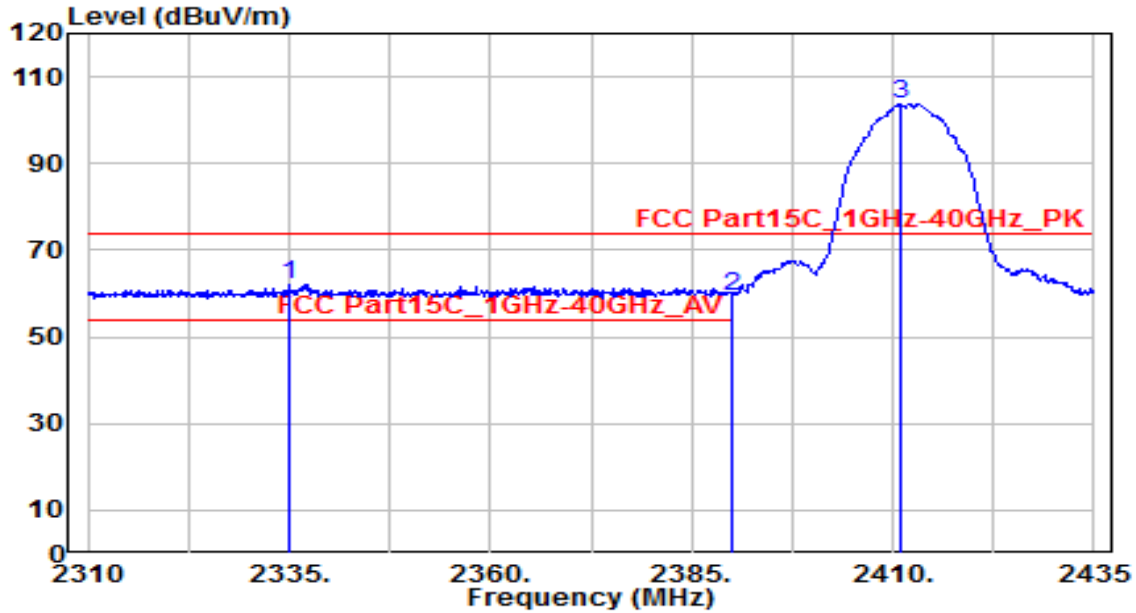


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2334.875	30.09	32.05	62.15	-11.85	74.00	150	0	Peak
2	2390.000	27.23	32.30	59.52	-14.48	74.00	150	0	Peak
3	2411.000	71.27	32.39	103.65	N/A	N/A	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

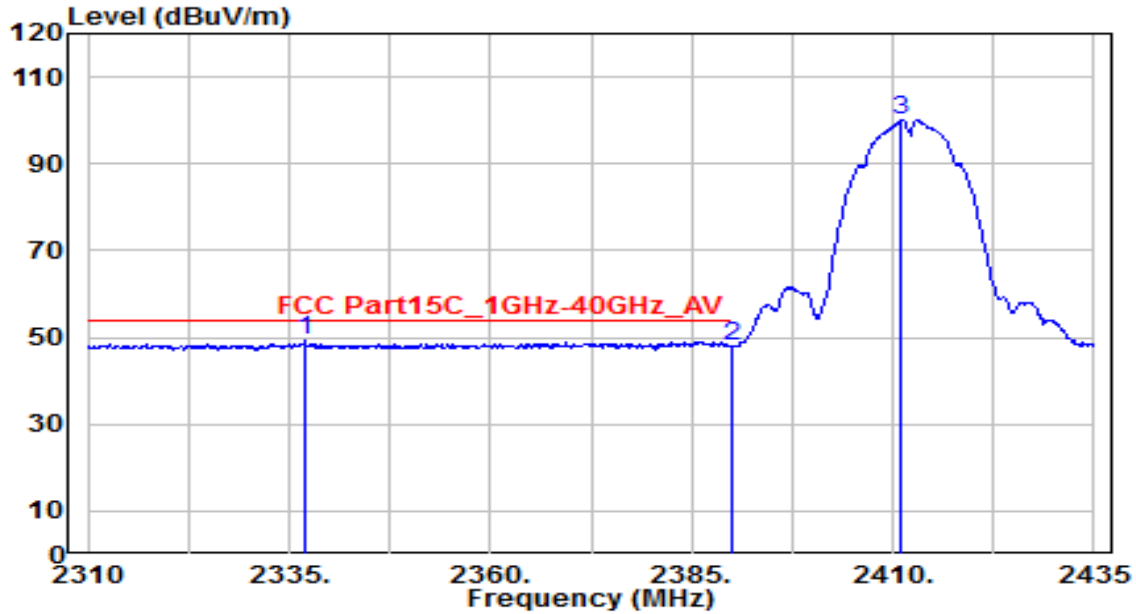


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2337.000	17.08	32.06	49.14	-4.86	54.00	150	0	Average
2	2390.000	15.77	32.30	48.06	-5.94	54.00	150	0	Average
3	2411.000	67.64	32.39	100.03	N/A	N/A	150	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

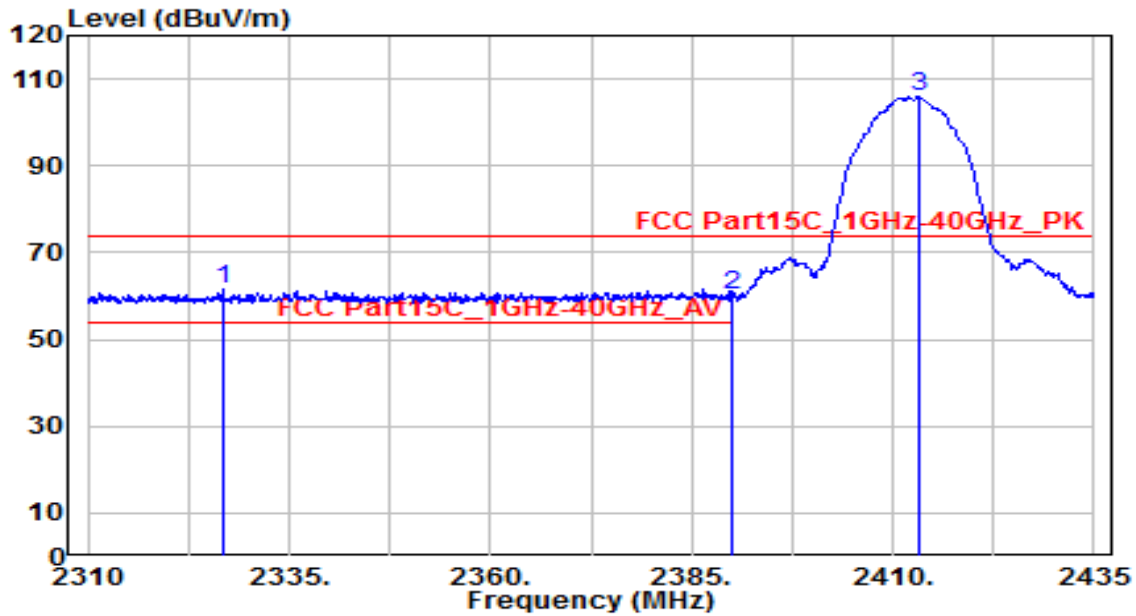


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2326.750	29.72	32.02	61.74	-12.26	74.00	210	200	Peak
2	2390.000	27.91	32.30	60.21	-13.79	74.00	210	200	Peak
3	2413.125	73.45	32.40	105.85	N/A	N/A	210	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

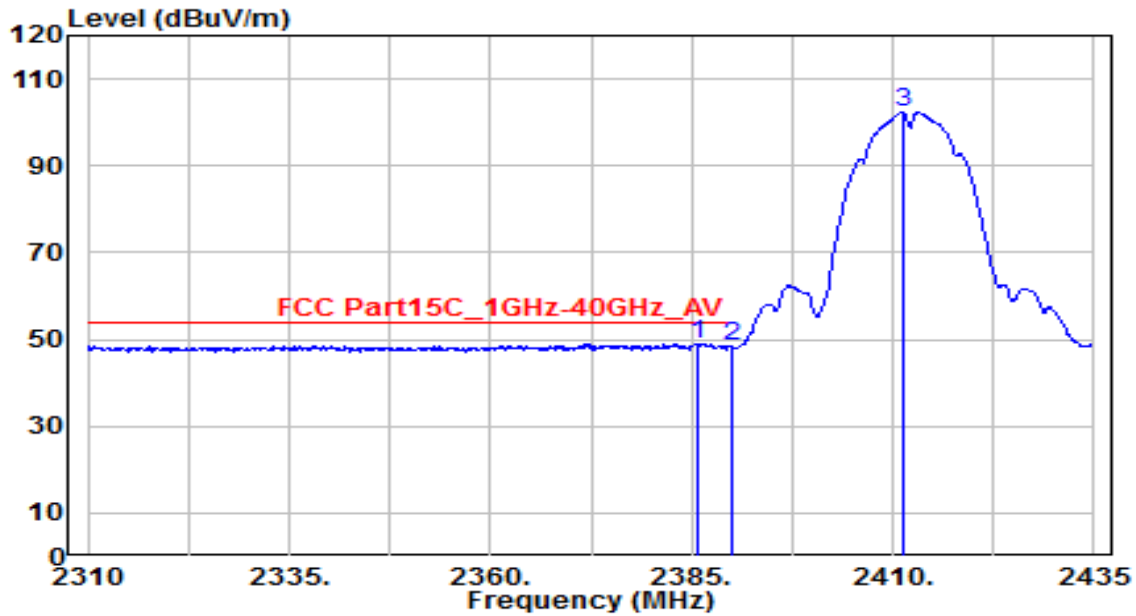


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2385.625	16.76	32.28	49.04	-4.96	54.00	210	200	Average
2		2390.000	16.14	32.30	48.43	-5.57	54.00	210	200	Average
3		2411.250	70.00	32.39	102.39	N/A	N/A	210	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

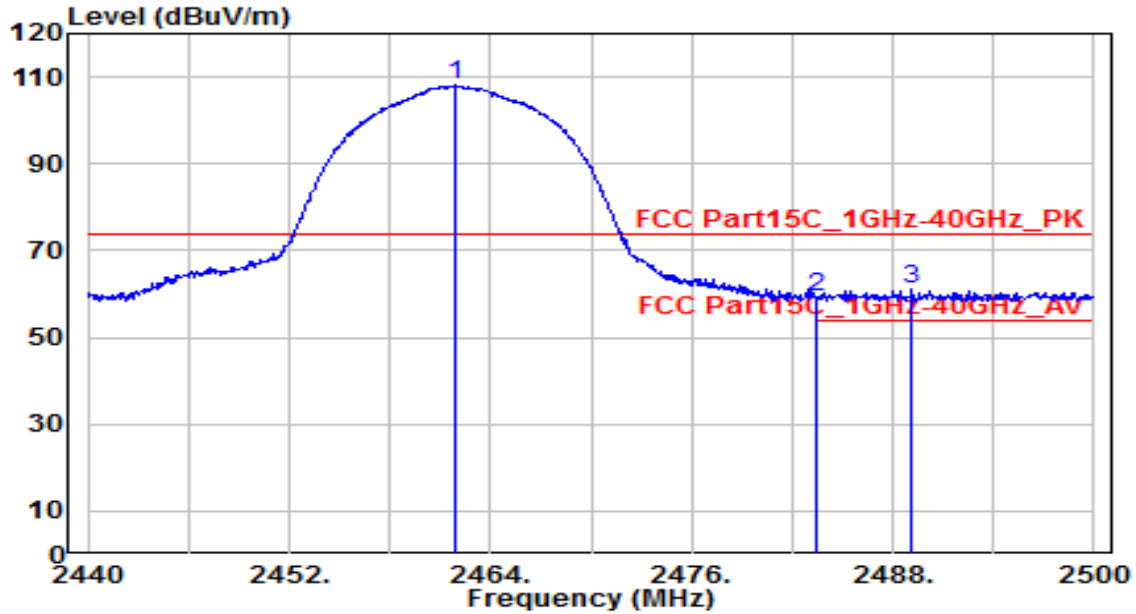


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.960	75.49	32.61	108.10	N/A	N/A	215	350	Peak
2	2483.500	26.65	32.71	59.36	-14.64	74.00	215	350	Peak
3	* 2489.140	28.29	32.73	61.02	-12.98	74.00	215	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

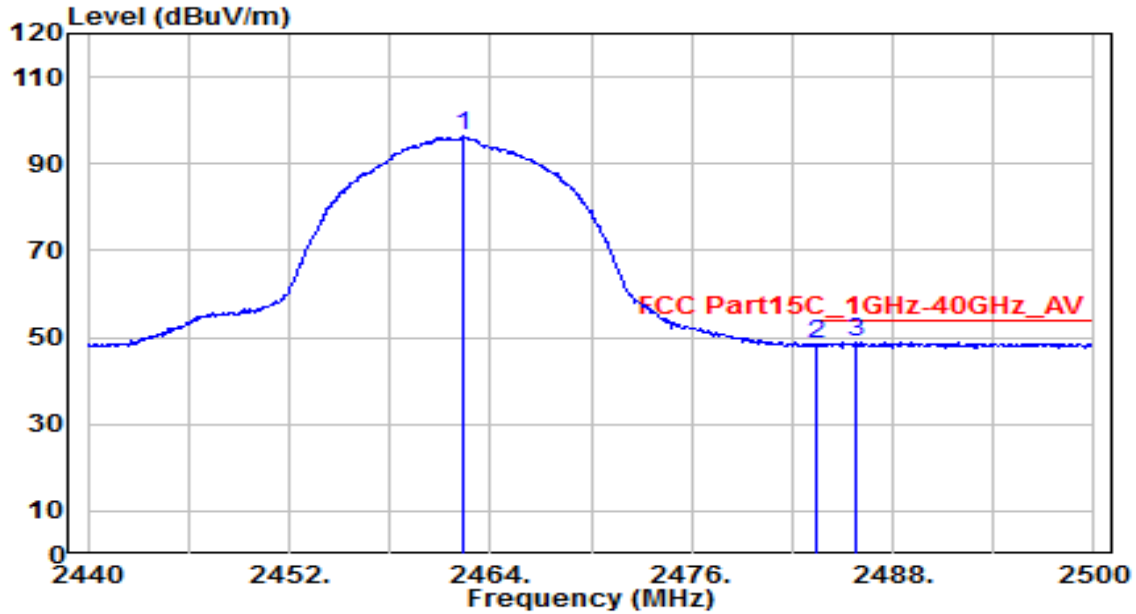


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.440	63.68	32.61	96.29	N/A	N/A	215	350	Average
2	2483.500	15.63	32.71	48.34	-5.66	54.00	215	350	Average
3	* 2485.840	16.09	32.72	48.81	-5.19	54.00	215	350	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

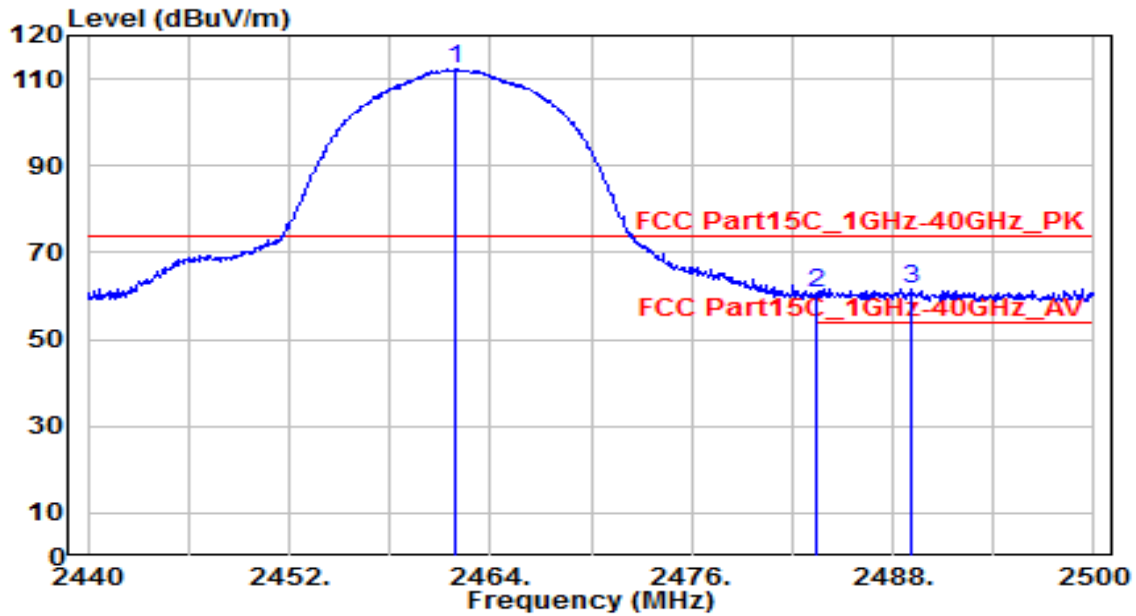


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.900	79.73	32.61	112.34	N/A	N/A	210	295	Peak
2	2483.500	28.02	32.71	60.73	-13.27	74.00	210	295	Peak
3	* 2489.140	28.93	32.73	61.66	-12.34	74.00	210	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

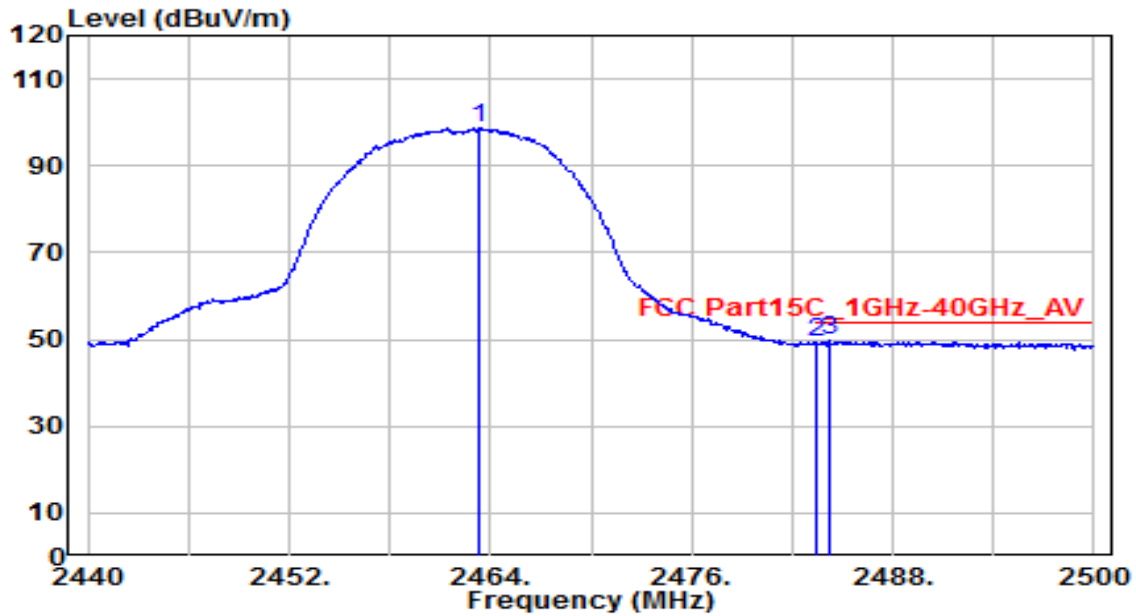


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.280	66.05	32.62	98.67	N/A	N/A	210	295	Average
2	2483.500	16.45	32.71	49.16	-4.84	54.00	210	295	Average
3	* 2484.220	16.93	32.71	49.64	-4.36	54.00	210	295	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

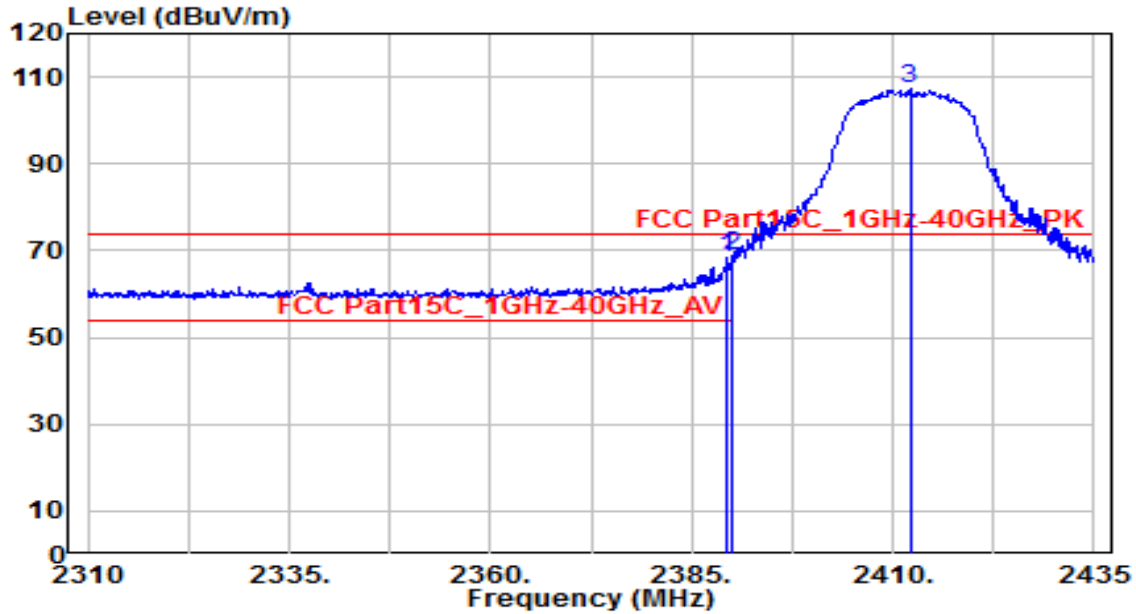


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.500	36.29	32.29	68.58	14.58	54.00	150	0	Peak
2	* 2390.000	36.42	32.30	68.71	14.71	54.00	150	0	Peak
3	2412.125	75.03	32.39	107.42	N/A	N/A	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

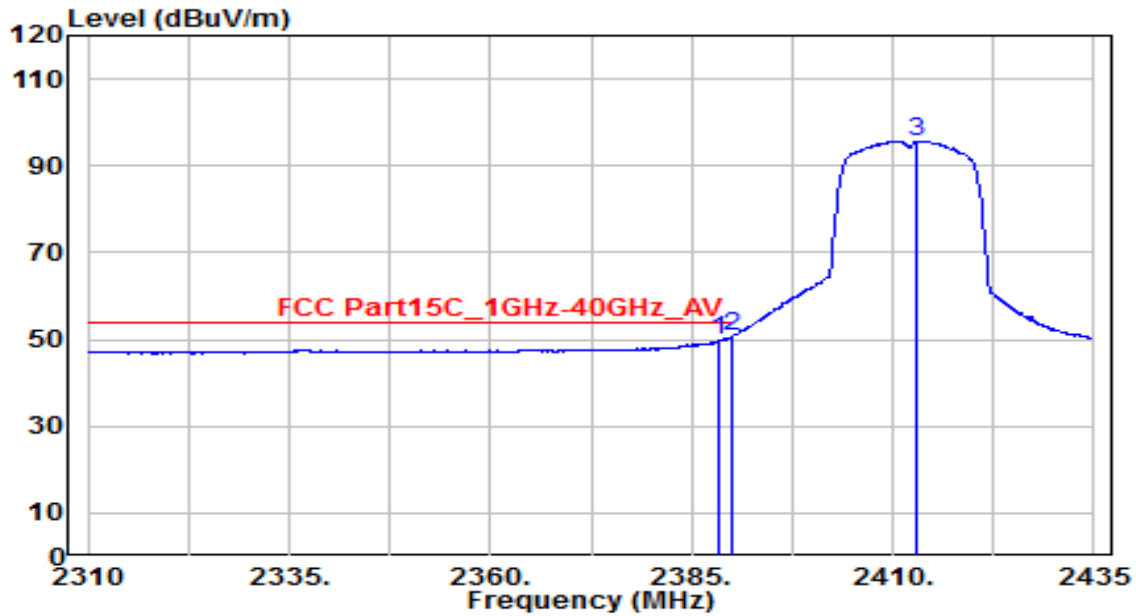


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.500	17.36	32.29	49.65	-4.35	54.00	150	0	Average
2	* 2390.000	18.55	32.30	50.84	-3.16	54.00	150	0	Average
3	2412.875	63.37	32.40	95.76	N/A	N/A	150	0	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

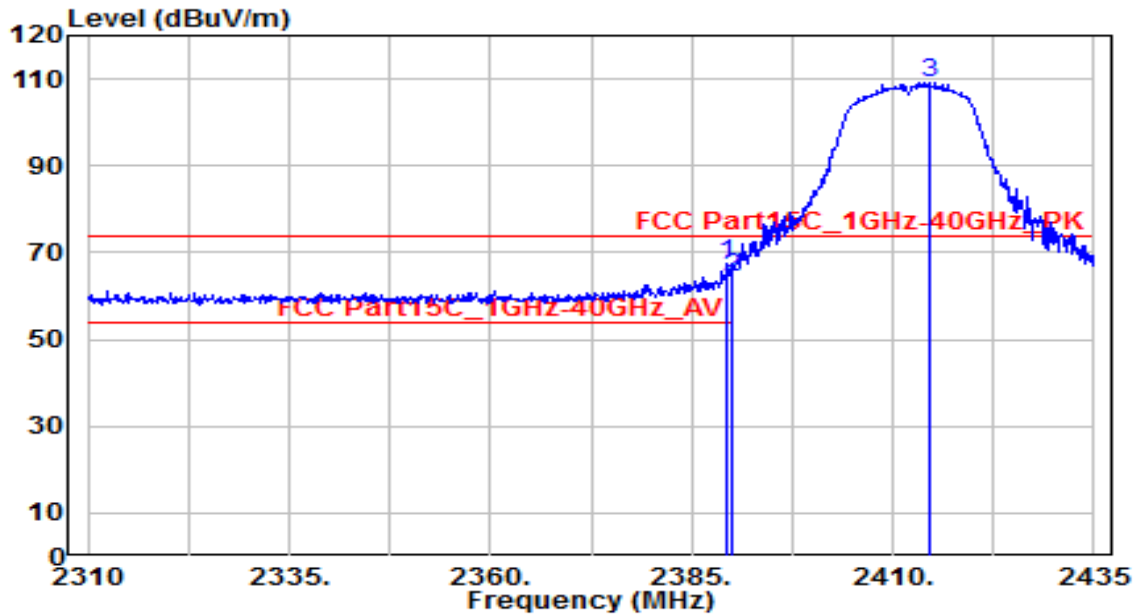


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.375	35.07	32.29	67.37	-6.63	74.00	210	200	Peak
2	2390.000	32.22	32.30	64.51	-9.49	74.00	210	200	Peak
3	2414.500	76.72	32.40	109.13	N/A	N/A	210	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

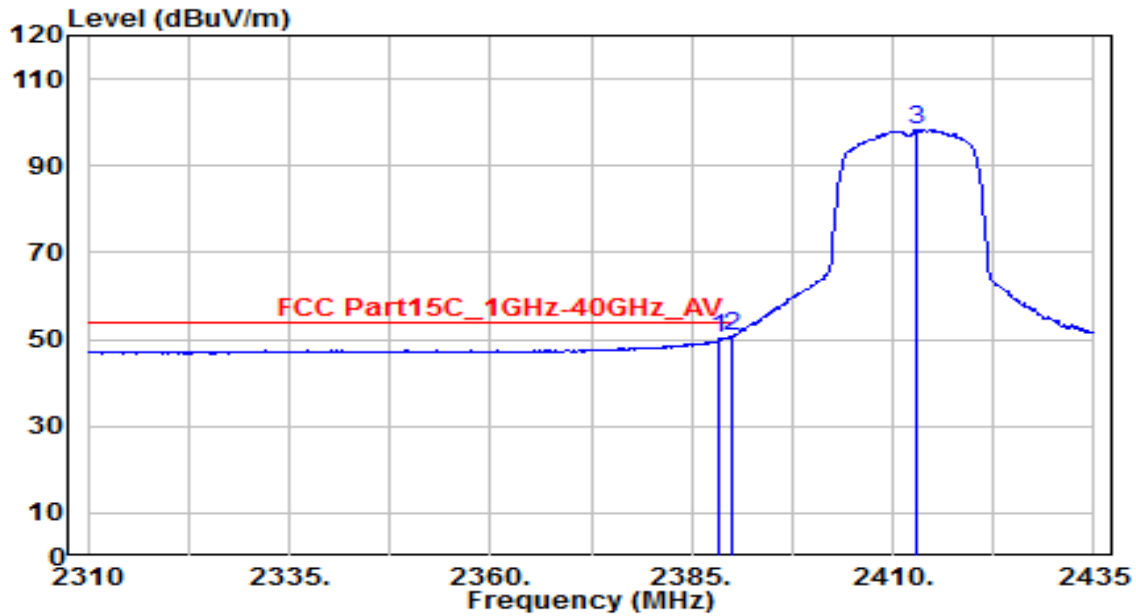


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.500	17.76	32.29	50.05	-3.95	54.00	210	200	Average
2	* 2390.000	18.32	32.30	50.61	-3.39	54.00	210	200	Average
3	2413.000	65.87	32.40	98.27	N/A	N/A	210	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

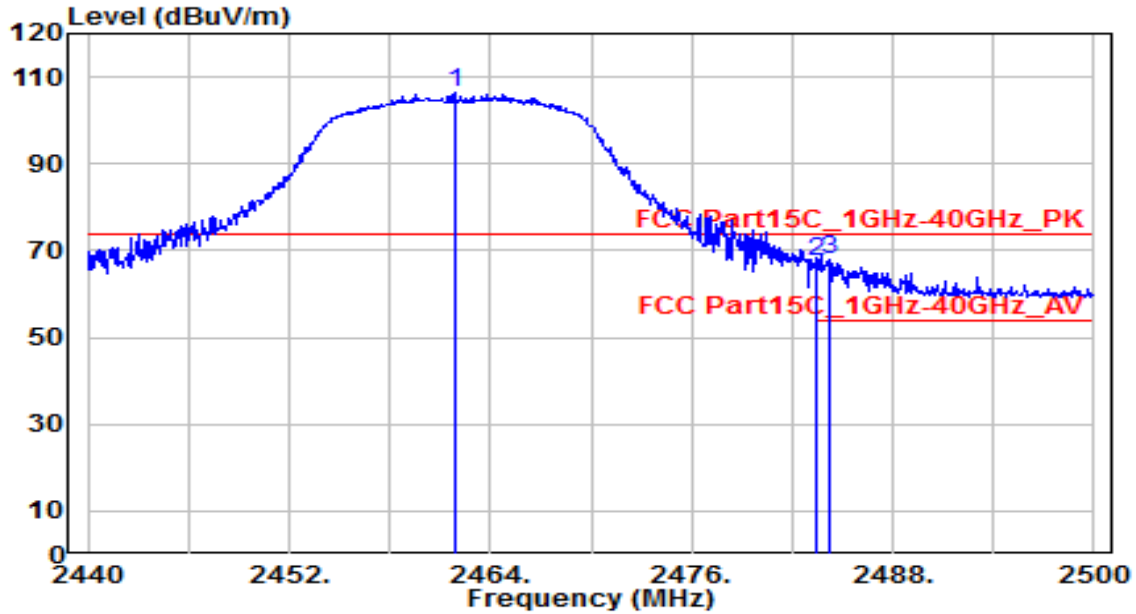


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.900	73.92	32.61	106.53	N/A	N/A	215	350	Peak
2	2483.500	34.68	32.71	67.38	-6.62	74.00	215	350	Peak
3	* 2484.160	35.15	32.71	67.86	-6.14	74.00	215	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

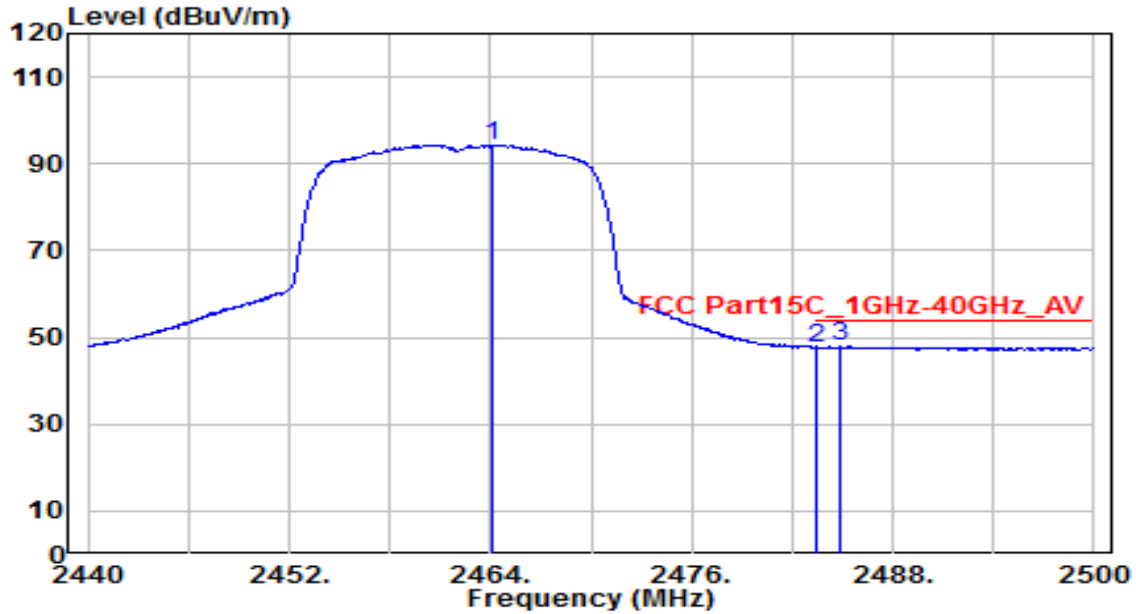


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.180	61.74	32.62	94.36	N/A	N/A	215	350	Average
2	2483.500	14.92	32.71	47.63	-6.37	54.00	215	350	Average
3	* 2484.880	15.24	32.71	47.95	-6.05	54.00	215	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

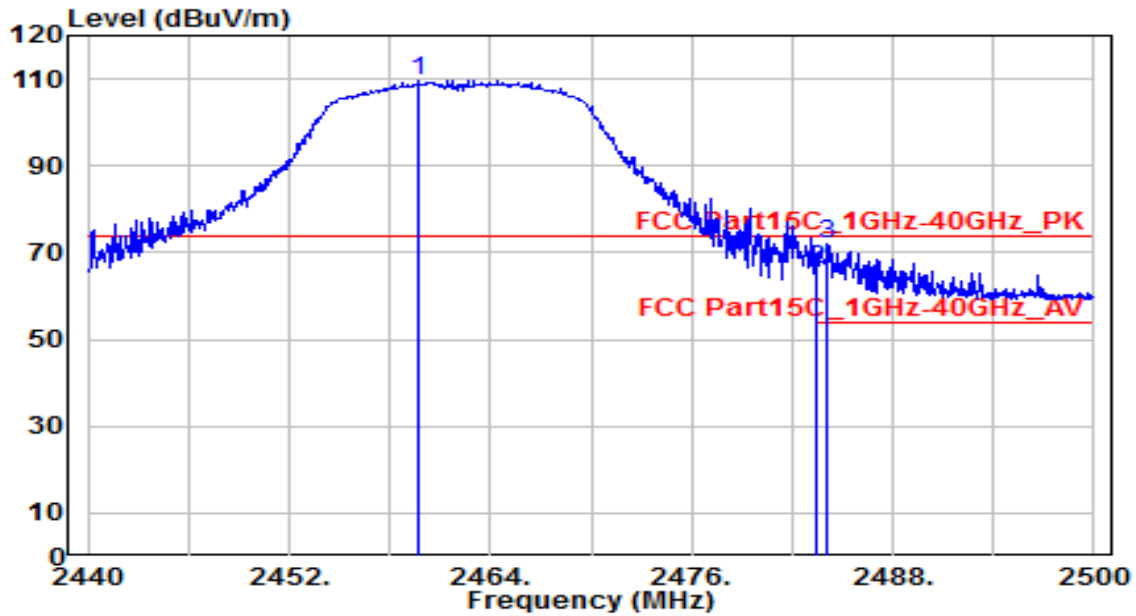


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.740	77.17	32.60	109.77	N/A	N/A	210	295	Peak
2	2483.500	33.57	32.71	66.27	-7.73	74.00	210	295	Peak
3	* 2484.100	39.27	32.71	71.98	-2.02	74.00	210	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

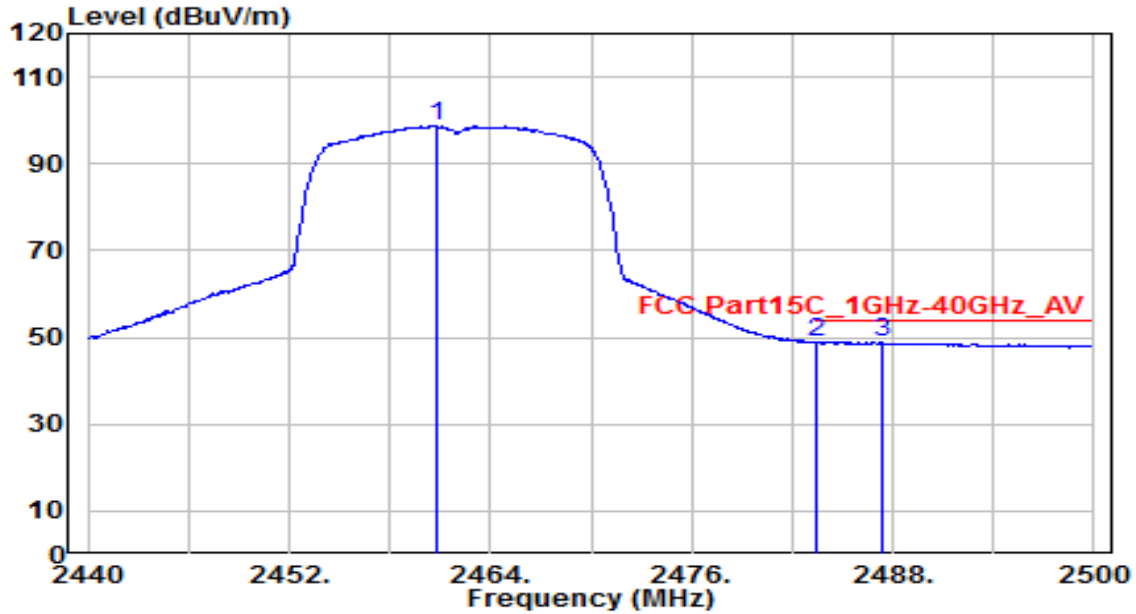


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	66.08	32.61	98.69	N/A	N/A	210	295	Average
2	* 2483.500	16.33	32.71	49.04	-4.96	54.00	210	295	Average
3	2487.340	16.11	32.72	48.83	-5.17	54.00	210	295	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

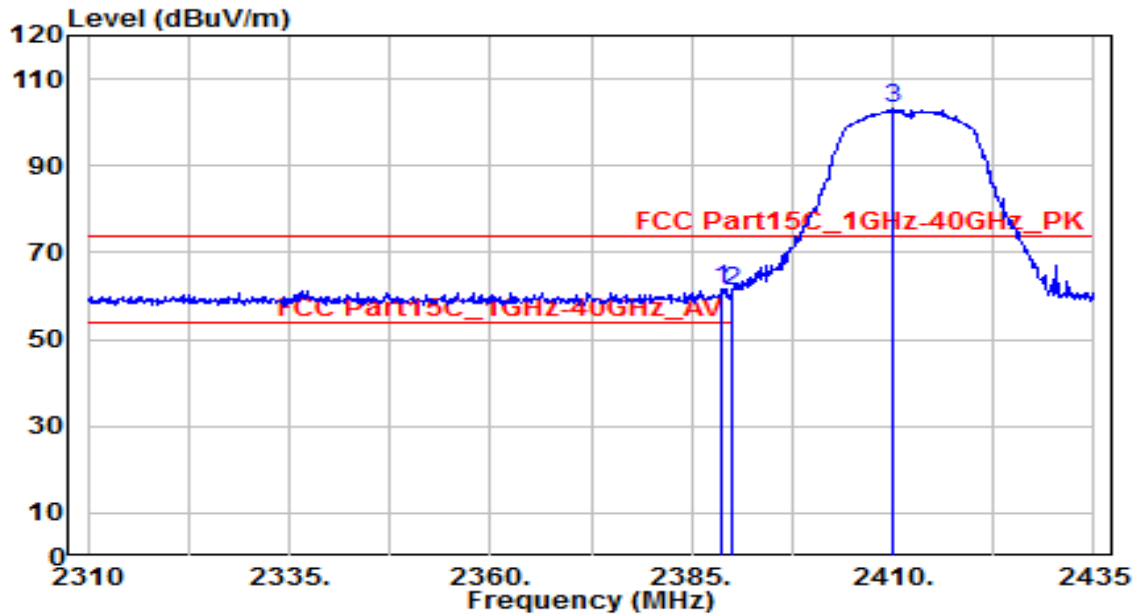


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.750	29.32	32.29	61.61	-12.39	74.00	150	0	Peak
2	2390.000	28.91	32.30	61.21	-12.79	74.00	150	0	Peak
3	2410.125	71.01	32.38	103.39	N/A	N/A	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

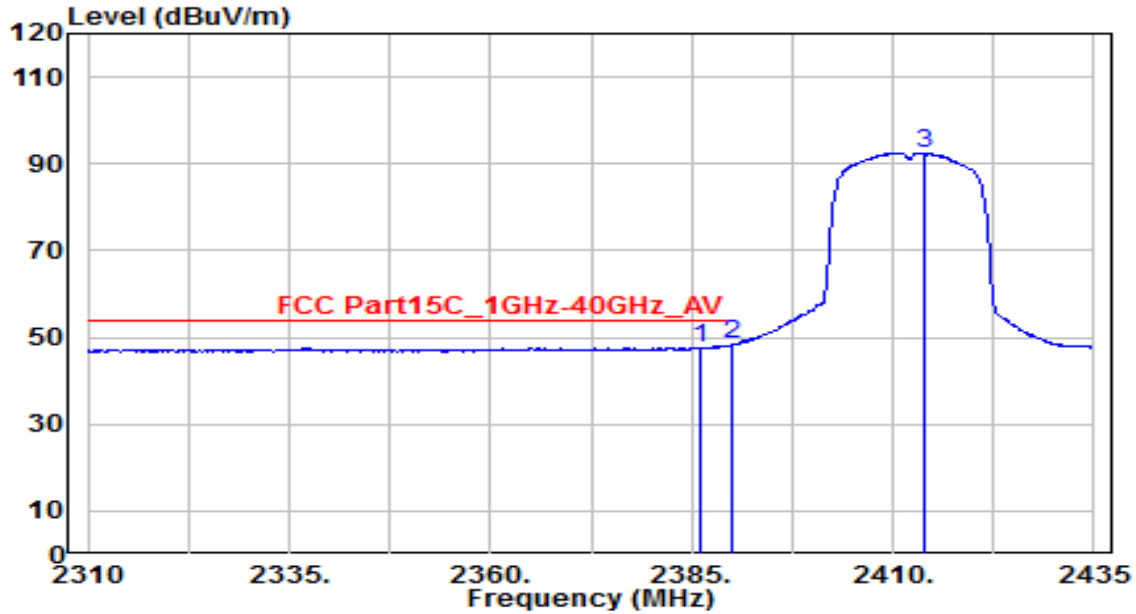


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.125	15.40	32.28	47.68	-6.32	54.00	150	0	Average
2	* 2390.000	16.04	32.30	48.34	-5.66	54.00	150	0	Average
3	2413.875	60.15	32.40	92.55	N/A	N/A	150	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

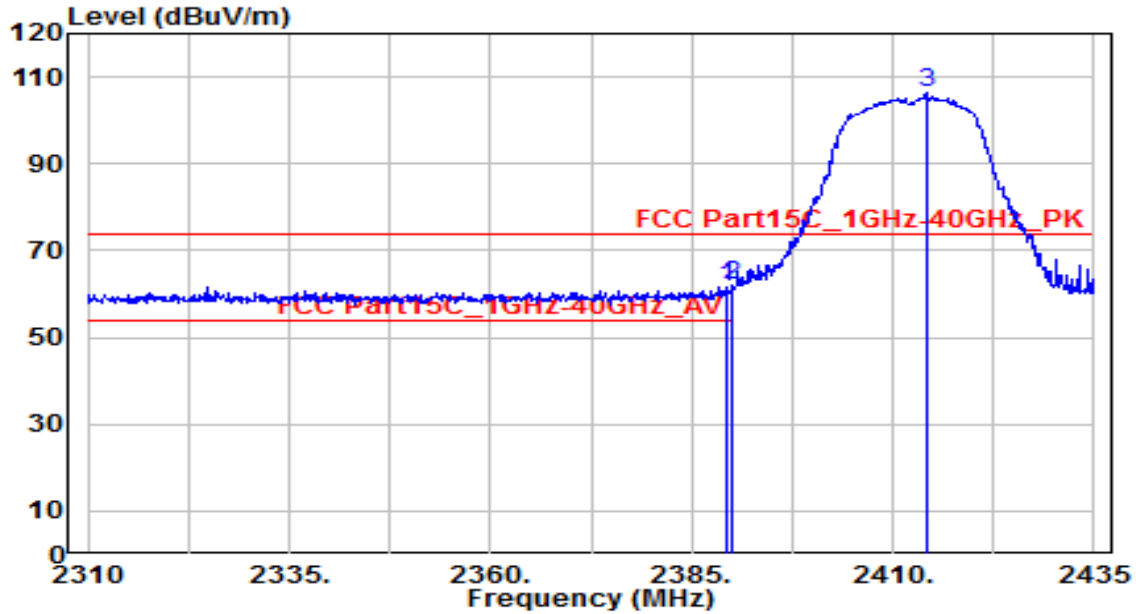


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.500	29.36	32.29	61.66	-12.34	74.00	210	200	Peak
2	* 2390.000	29.90	32.30	62.20	-11.80	74.00	210	200	Peak
3	2414.250	73.91	32.40	106.31	N/A	N/A	210	200	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

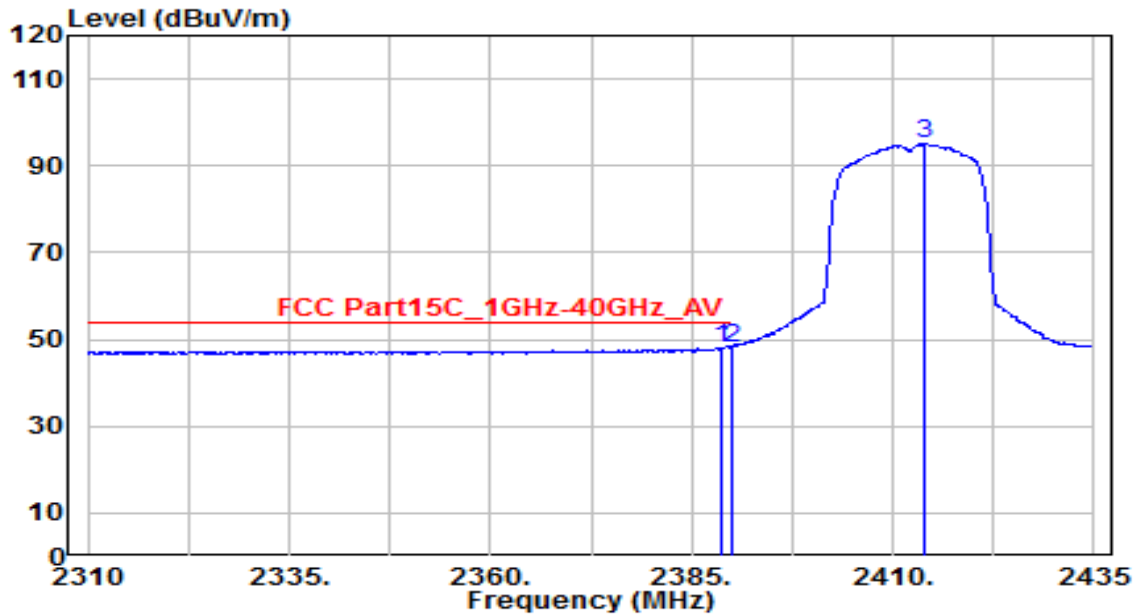


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.625	15.61	32.29	47.90	-6.10	54.00	210	200	Average
2	* 2390.000	15.93	32.30	48.23	-5.77	54.00	210	200	Average
3	2414.000	62.54	32.40	94.94	N/A	N/A	210	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

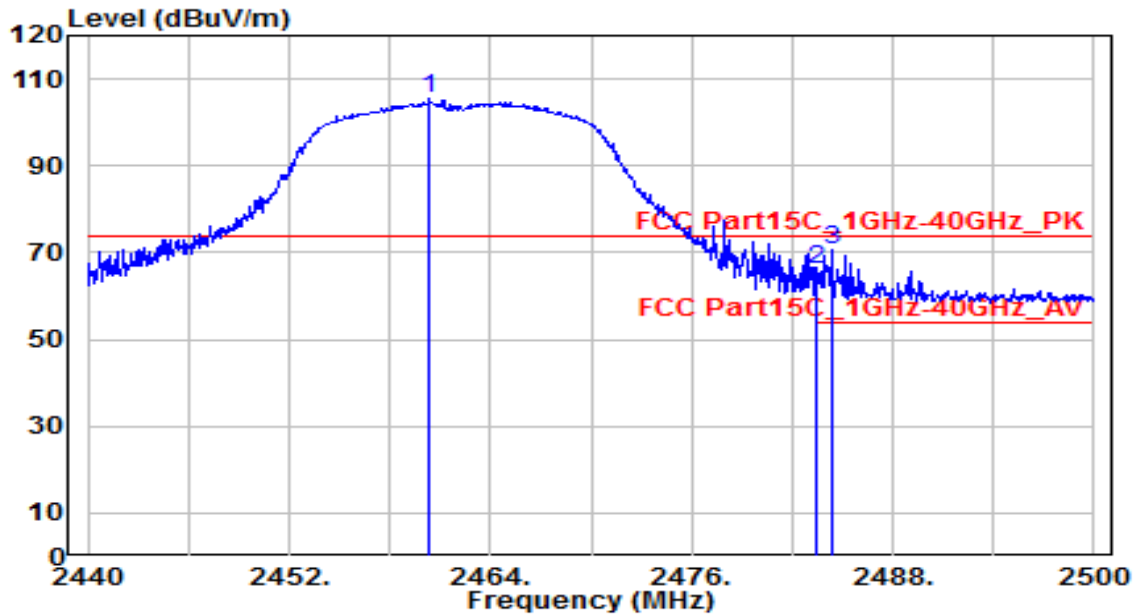


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.400	72.74	32.61	105.34	N/A	N/A	215	350	Peak
2	2483.500	33.60	32.71	66.31	-7.69	74.00	215	350	Peak
3	* 2484.340	37.92	32.71	70.63	-3.37	74.00	215	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

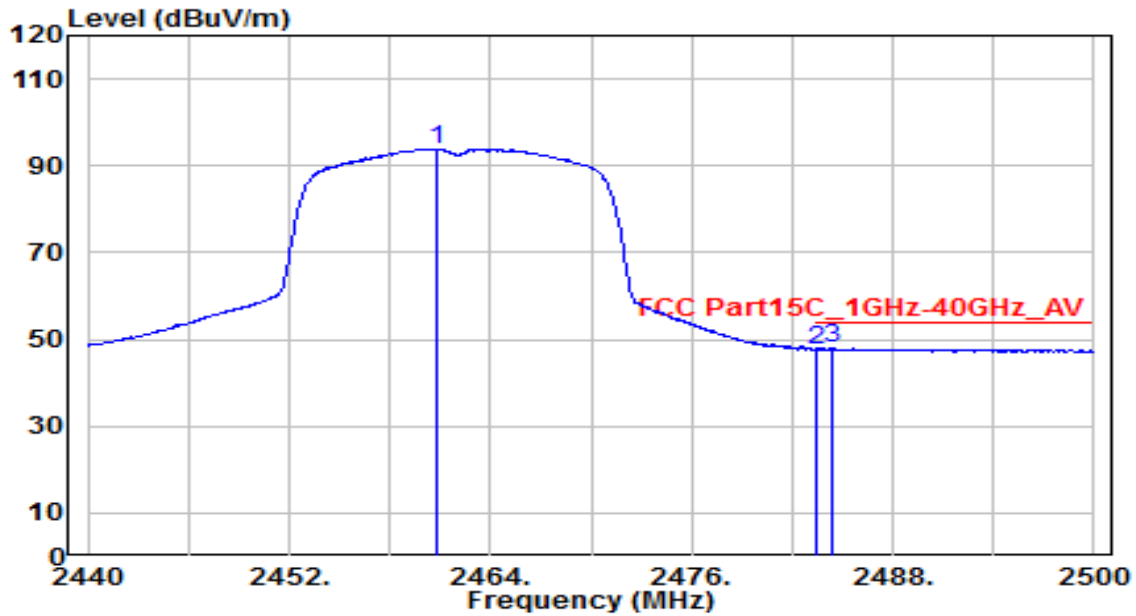


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.760	61.34	32.61	93.94	N/A	N/A	215	350	Average
2	2483.500	14.86	32.71	47.56	-6.44	54.00	215	350	Average
3	* 2484.340	15.27	32.71	47.99	-6.01	54.00	215	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

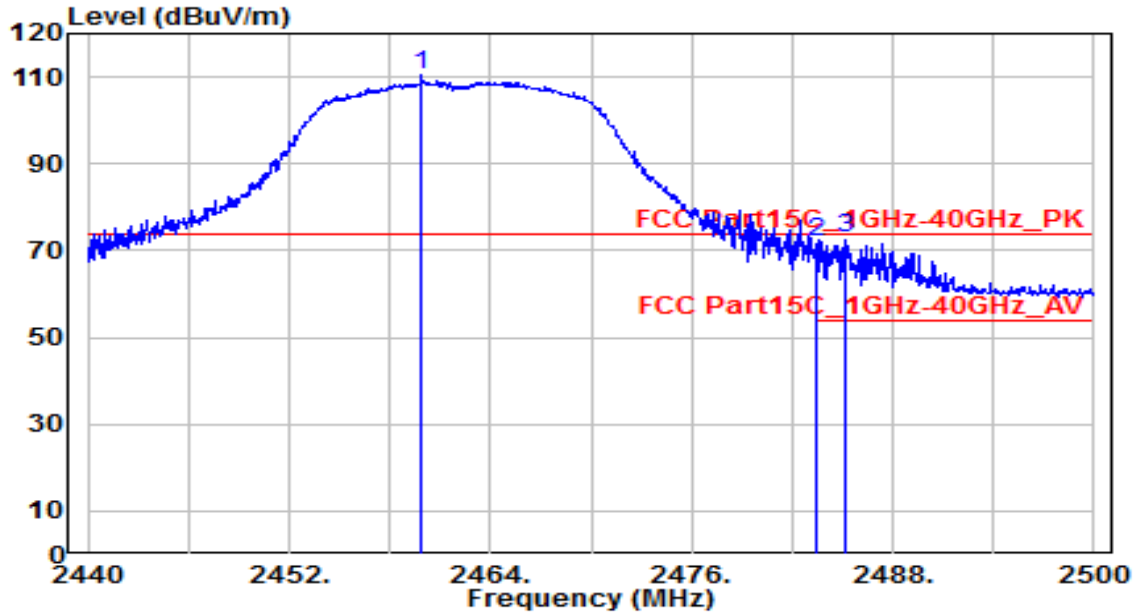


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.920	77.72	32.60	110.32	N/A	N/A	210	295	Peak
2	* 2483.500	39.30	32.71	72.01	-1.99	74.00	210	295	Peak
3	2485.120	40.07	32.71	72.79	-1.21	74.00	210	295	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor Camera	Date of Test	2020-07-25
Factor	BBHA 9120D	Temp. / Humidity	25°C /48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

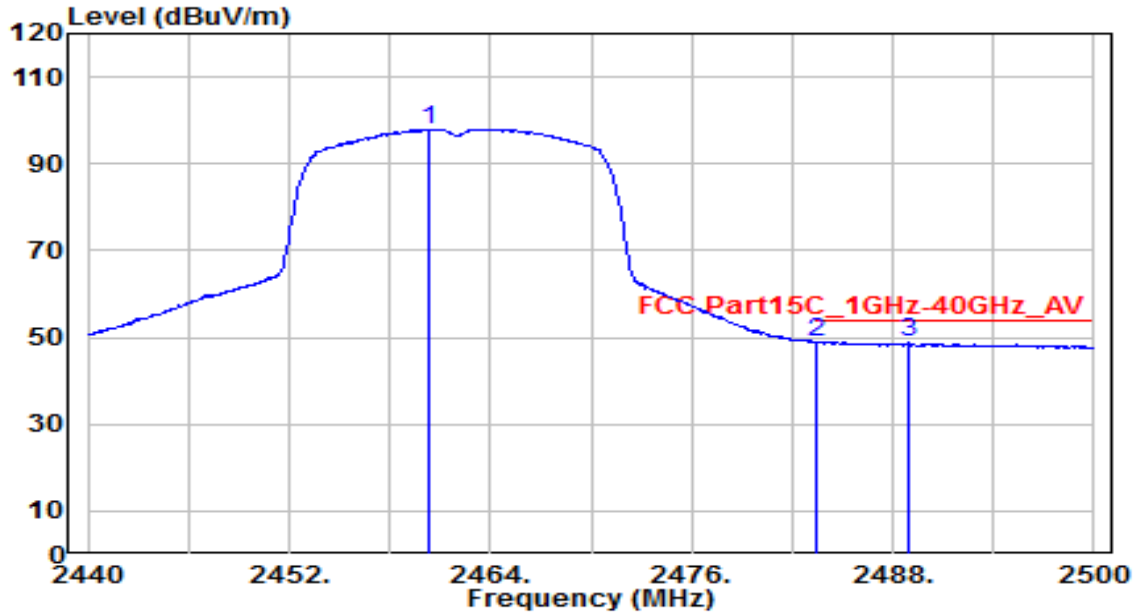

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.340	65.42	32.61	98.03	N/A	N/A	210	295	Average
2	* 2483.500	16.28	32.71	48.99	-5.01	54.00	210	295	Average
3	2488.960	15.96	32.73	48.69	-5.31	54.00	210	295	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

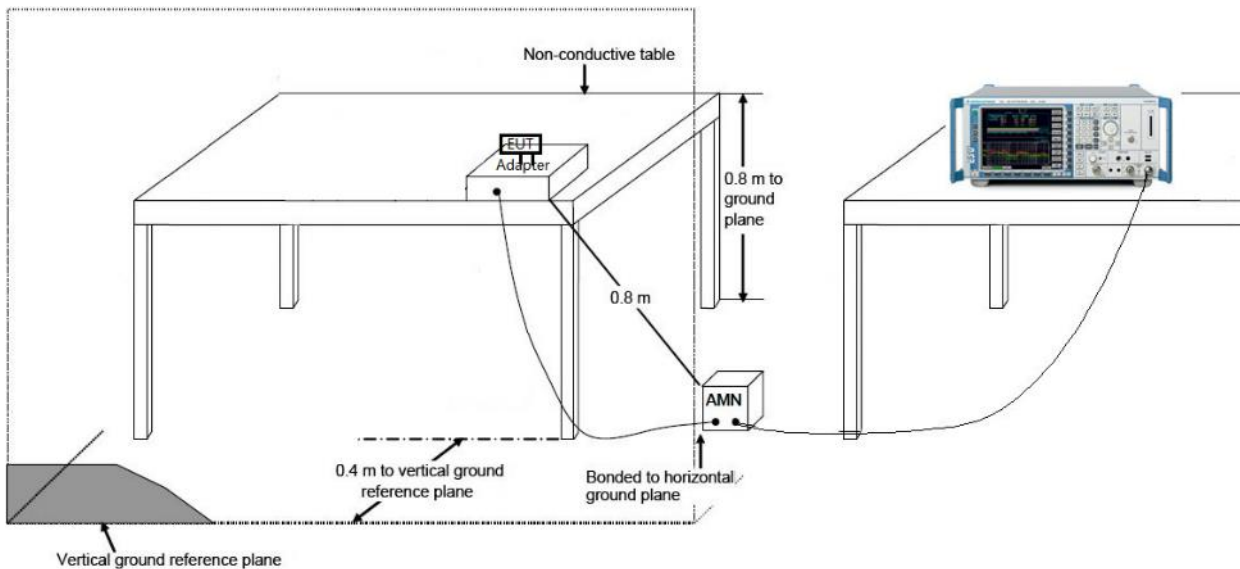

7.8.3. Test Result

EUT	Indoor Camera	Date of Test	2020-07-24
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26°C /55%
Polarity	Line1	Site / Test Engineer	SR2 / Fran
Test Mode	802.11n20_TX_CH6_Ant 0_PSAF10A-050Q	Test Voltage	AC 120V/60Hz

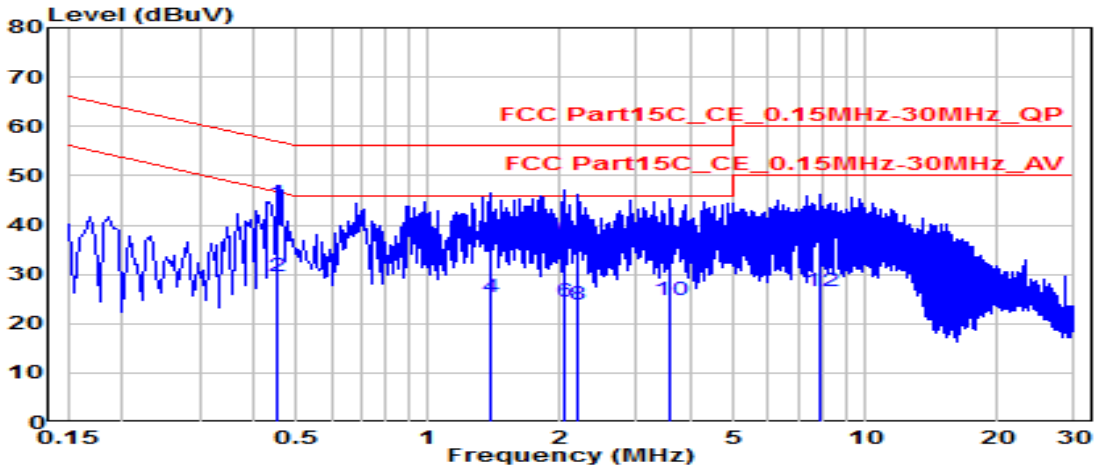


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 0.451	34.74	9.63	44.36	-12.48	56.85	QP
2	* 0.451	19.88	9.63	29.51	-17.34	46.85	Average
3	1.383	27.11	9.67	36.78	-19.22	56.00	QP
4	1.383	15.71	9.67	25.38	-20.62	46.00	Average
5	2.040	27.14	9.69	36.83	-19.17	56.00	QP
6	2.040	14.73	9.69	24.42	-21.58	46.00	Average
7	2.211	24.80	9.69	34.49	-21.51	56.00	QP
8	2.211	14.05	9.69	23.74	-22.26	46.00	Average
9	3.552	26.16	9.71	35.88	-20.12	56.00	QP
10	3.552	15.13	9.71	24.84	-21.16	46.00	Average
11	7.831	27.47	9.82	37.28	-22.72	60.00	QP
12	7.831	16.61	9.82	26.43	-23.57	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Indoor Camera	Date of Test	2020-07-24
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26°C /55%
Polarity	Neutral	Site / Test Engineer	SR2 / Fran
Test Mode	802.11n20_TX_CH6_Ant 0_PSAF10A-050Q	Test Voltage	AC 120V/60Hz

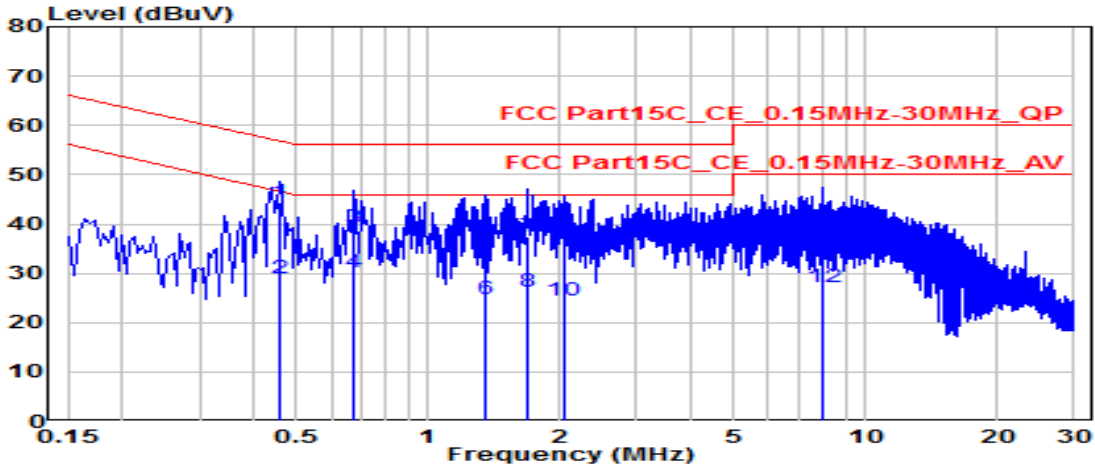


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	0.456	34.69	9.64	44.33	-12.43	56.77	QP
2		0.456	19.47	9.64	29.11	-17.66	46.77	Average
3		0.676	29.67	9.65	39.32	-16.68	56.00	QP
4	*	0.676	20.55	9.65	30.20	-15.80	46.00	Average
5		1.356	25.94	9.68	35.61	-20.39	56.00	QP
6		1.356	15.20	9.68	24.88	-21.12	46.00	Average
7		1.684	27.76	9.68	37.44	-18.56	56.00	QP
8		1.684	16.59	9.68	26.27	-19.73	46.00	Average
9		2.035	28.06	9.69	37.75	-18.25	56.00	QP
10		2.035	14.84	9.69	24.53	-21.47	46.00	Average
11		7.984	28.54	9.83	38.37	-21.63	60.00	QP
12		7.984	17.43	9.83	27.26	-22.74	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Indoor Camera	Date of Test	2020-07-24
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26°C /55%
Polarity	Line1	Site / Test Engineer	SR2 / Fran
Test Mode	802.11n20_TX_CH6_Ant 0_PSAF10A-050Q	Test Voltage	AC 240V/60Hz

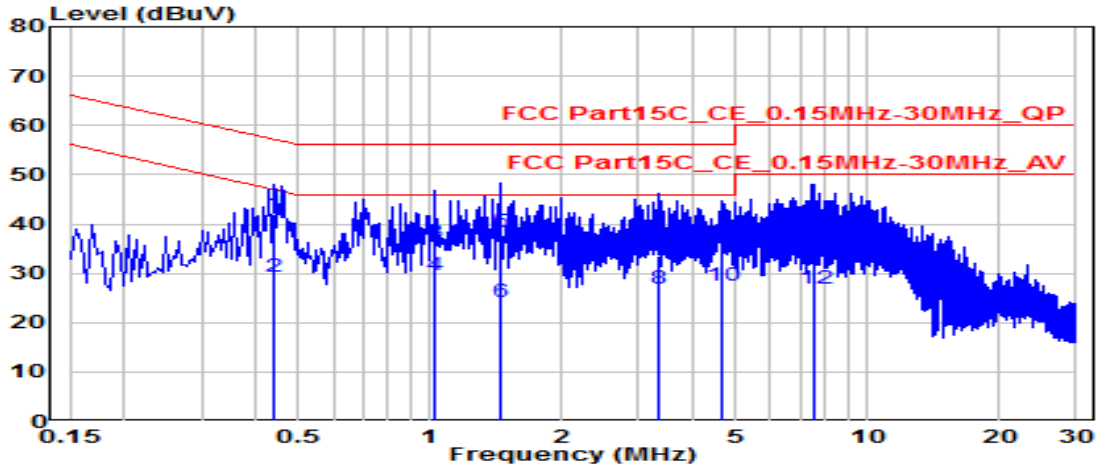


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 0.438	32.48	9.63	42.11	-14.99	57.10	QP
2	0.438	19.77	9.63	29.40	-17.70	47.10	Average
3	1.023	26.58	9.66	36.25	-19.75	56.00	QP
4	* 1.023	19.86	9.66	29.52	-16.48	46.00	Average
5	1.446	28.52	9.67	38.20	-17.80	56.00	QP
6	1.446	14.43	9.67	24.10	-21.90	46.00	Average
7	3.318	23.85	9.71	33.56	-22.44	56.00	QP
8	3.318	17.28	9.71	26.99	-19.01	46.00	Average
9	4.623	25.99	9.73	35.72	-20.28	56.00	QP
10	4.623	17.60	9.73	27.33	-18.67	46.00	Average
11	7.565	28.04	9.81	37.85	-22.15	60.00	QP
12	7.565	17.07	9.81	26.89	-23.11	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Indoor Camera	Date of Test	2020-07-24
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26°C /55%
Polarity	Neutral	Site / Test Engineer	SR2 / Fran
Test Mode	802.11n20_TX_CH6_Ant 0_PSAF10A-050Q	Test Voltage	AC 240V/60Hz

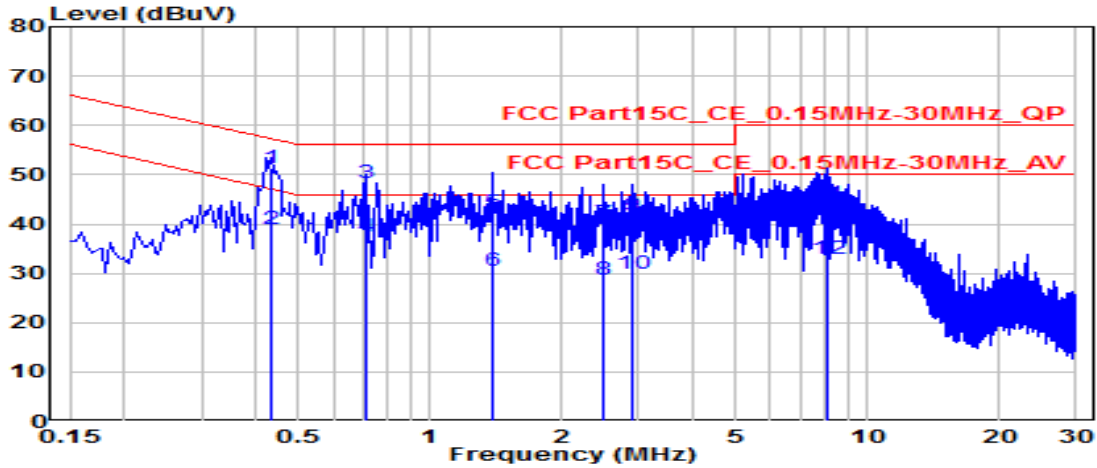


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 0.433	41.59	9.64	51.22	-5.96	57.19	QP
2	* 0.433	29.46	9.64	39.09	-8.09	47.19	Average
3	0.712	38.52	9.65	48.17	-7.83	56.00	QP
4	0.712	27.79	9.65	37.44	-8.56	46.00	Average
5	1.387	32.51	9.68	42.19	-13.81	56.00	QP
6	1.387	20.96	9.68	30.64	-15.36	46.00	Average
7	2.494	30.53	9.70	40.22	-15.78	56.00	QP
8	2.494	18.92	9.70	28.62	-17.38	46.00	Average
9	2.904	31.82	9.71	41.53	-14.47	56.00	QP
10	2.904	20.19	9.71	29.90	-16.10	46.00	Average
11	8.083	34.29	9.84	44.12	-15.88	60.00	QP
12	8.083	23.22	9.84	33.05	-16.95	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Indoor Camera	Date of Test	2020-08-14
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	27.3°C /61%
Polarity	Line1	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n20_TX_CH6_Ant 0_1A52_UB52A	Test Voltage	AC 120V/60Hz

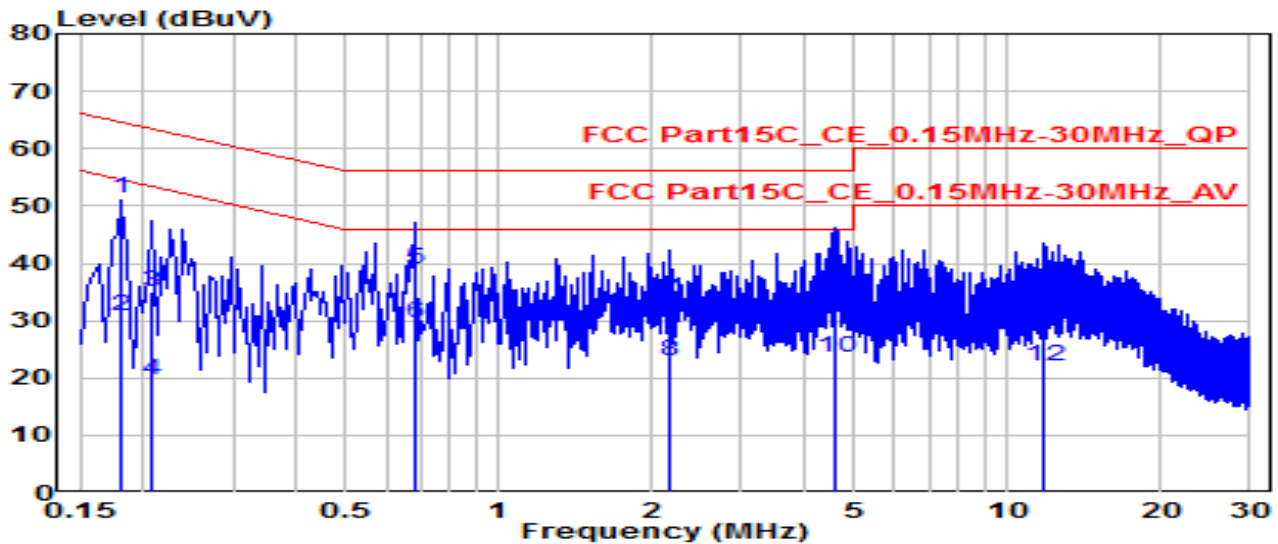


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	0.181	41.72	9.61	51.33	-13.09	64.42	QP
2		0.181	21.24	9.61	30.85	-23.57	54.42	Average
3		0.208	25.37	9.61	34.98	-28.28	63.27	QP
4		0.208	9.91	9.61	19.52	-33.75	53.27	Average
5		0.681	29.42	9.64	39.06	-16.94	56.00	QP
6	*	0.681	20.04	9.64	29.69	-16.31	46.00	Average
7		2.170	23.69	9.69	33.38	-22.62	56.00	QP
8		2.170	13.14	9.69	22.83	-23.17	46.00	Average
9		4.605	21.50	9.73	31.23	-24.77	56.00	QP
10		4.605	13.78	9.73	23.52	-22.48	46.00	Average
11		11.822	22.19	9.90	32.09	-27.91	60.00	QP
12		11.822	12.27	9.90	22.17	-27.83	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Indoor Camera	Date of Test	2020-08-14
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	27.3°C /61%
Polarity	Neutral	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n20_TX_CH6_Ant 0_1A52_UB52A	Test Voltage	AC 120V/60Hz

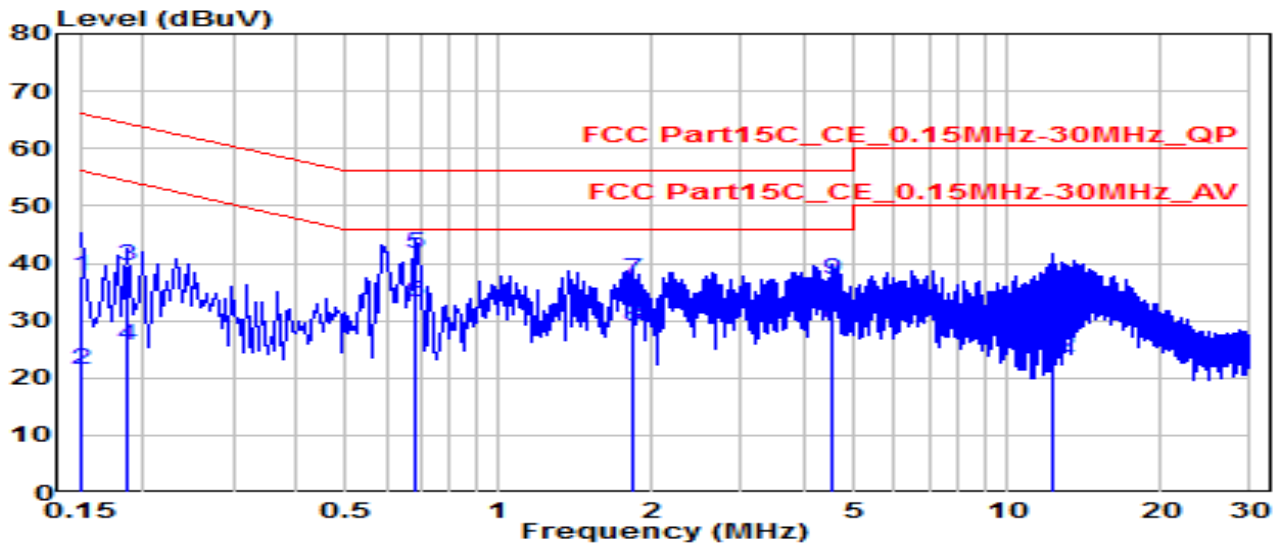


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.150	28.00	9.62	37.62	-28.38	66.00	QP
2	0.150	11.90	9.62	21.52	-34.48	56.00	Average
3	0.186	29.86	9.62	39.48	-24.73	64.21	QP
4	0.186	16.14	9.62	25.76	-28.45	54.21	Average
5	* 0.681	32.00	9.65	41.65	-14.35	56.00	QP
6	* 0.681	23.62	9.65	33.28	-12.72	46.00	Average
7	1.837	27.40	9.69	37.09	-18.91	56.00	QP
8	1.837	19.26	9.69	28.95	-17.05	46.00	Average
9	4.551	27.41	9.74	37.15	-18.85	56.00	QP
10	4.551	19.79	9.74	29.53	-16.47	46.00	Average
11	12.335	25.00	9.93	34.93	-25.07	60.00	QP
12	12.335	13.58	9.93	23.51	-26.49	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Indoor Camera	Date of Test	2020-08-14
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	27.3°C /61%
Polarity	Line1	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n20_TX_CH6_Ant 0_1A52_UB52A	Test Voltage	AC 240V/60Hz

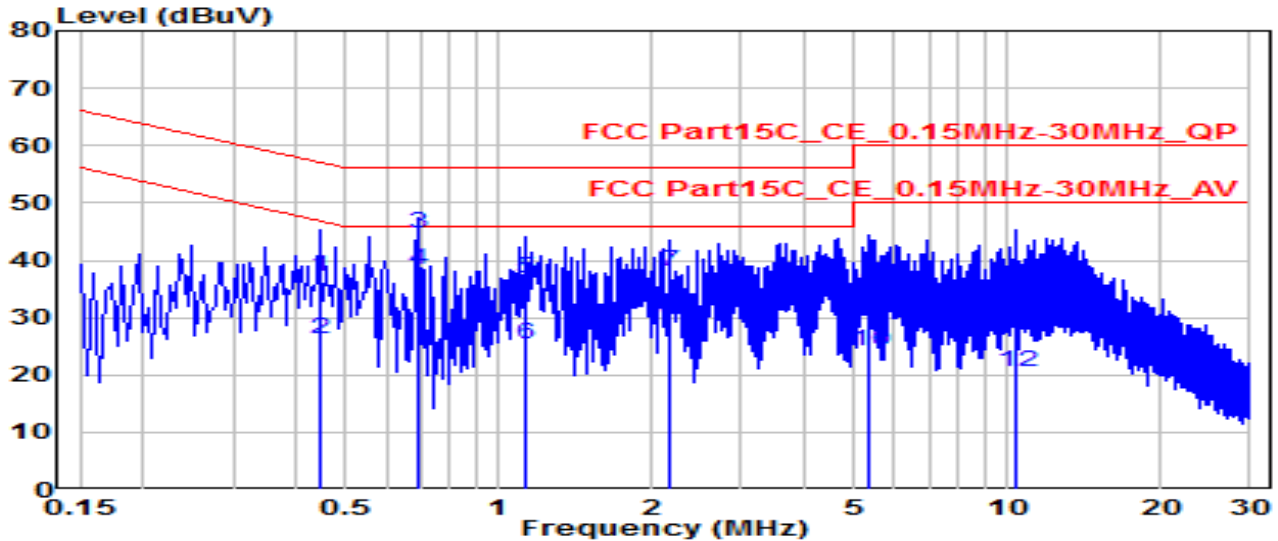


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.442	27.45	9.63	37.07	-19.94	57.02	QP
2	0.442	16.60	9.63	26.22	-20.79	47.02	Average
3	* 0.690	34.99	9.64	44.63	-11.37	56.00	QP
4	* 0.690	28.82	9.64	38.46	-7.54	46.00	Average
5	1.135	27.27	9.66	36.93	-19.07	56.00	QP
6	1.135	15.58	9.66	25.24	-20.76	46.00	Average
7	2.166	28.42	9.69	38.11	-17.89	56.00	QP
8	2.166	19.95	9.69	29.64	-16.36	46.00	Average
9	5.351	24.57	9.75	34.32	-25.68	60.00	QP
10	5.351	14.35	9.75	24.10	-25.90	50.00	Average
11	10.418	23.39	9.88	33.27	-26.73	60.00	QP
12	10.418	10.58	9.88	20.46	-29.54	50.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Indoor Camera	Date of Test	2020-08-14
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	27.3°C /61%
Polarity	Neutral	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n20_TX_CH6_Ant 0_1A52_UB52A	Test Voltage	AC 240V/60Hz

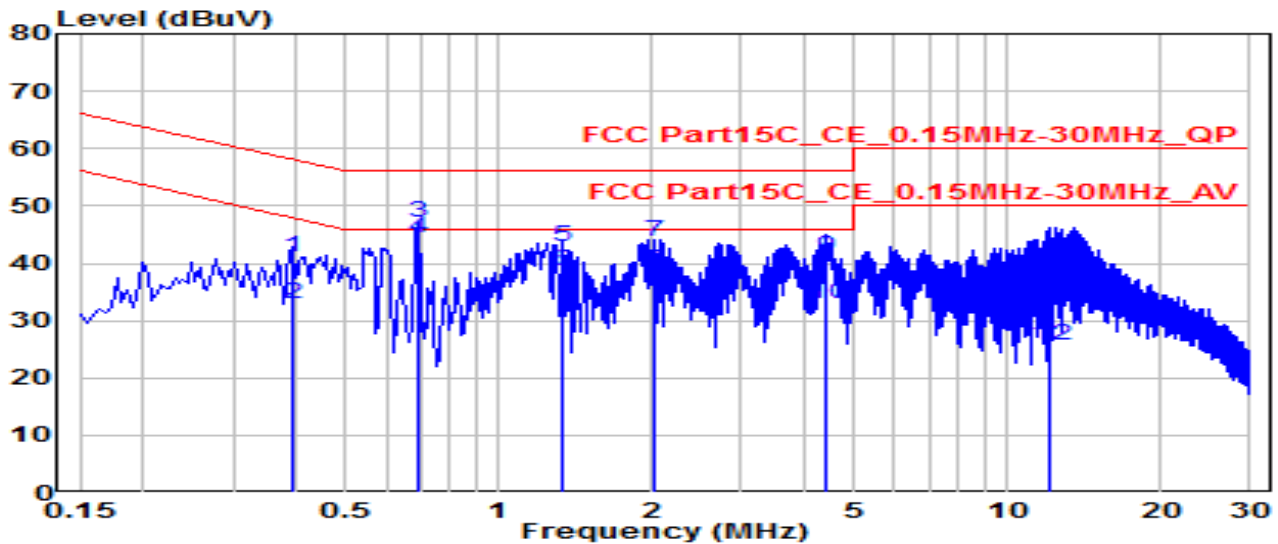

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.393	31.51	9.63	41.14	-16.86	58.00	QP
2	0.393	23.25	9.63	32.89	-15.12	48.00	Average
3	* 0.690	37.52	9.65	47.17	-8.83	56.00	QP
4	* 0.690	34.66	9.65	44.32	-1.68	46.00	Average
5	1.333	33.05	9.68	42.73	-13.27	56.00	QP
6	1.333	29.09	9.68	38.76	-7.24	46.00	Average
7	2.022	33.99	9.69	43.68	-12.32	56.00	QP
8	2.022	28.92	9.69	38.61	-7.39	46.00	Average
9	4.389	31.19	9.74	40.93	-15.07	56.00	QP
10	4.389	23.23	9.74	32.96	-13.04	46.00	Average
11	12.069	29.20	9.93	39.12	-20.88	60.00	QP
12	12.069	15.78	9.93	25.71	-24.29	50.00	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Indoor Camera** is compliance with Part 15C of the FCC Rules.

————— The End —————