

KDB447498 D03
IEEE C95.1
47 C.F.R. Part 1, Subpart I, Section 1.1310
47 C.F.R. Part 2, Subpart J, Section 2.1091

RF EXPOSURE REPORT

For

Micro Door Window Sensor

Model: SZ-DWS06

Trade Name: Sercomm / Xfinity

Issued to

Sercomm Corporation
8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Issued by

Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: July 07, 2015



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2015/07/07	Initial Issue	ALL	Angel Cheng

TABLE OF CONTENTS

1. LIMIT..... 4

2. EUT SPECIFICATION..... 4

3. TEST RESULTS 5

4. MAXIMUM PERMISSIBLE EXPOSURE..... 6

1. LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

2. EUT SPECIFICATION

EUT	Micro Door Window Sensor		
Model	SZ-DWS06		
RF Module	Silicon Labs	Model:	EM3585
Frequency band (Operating)	<input type="checkbox"/> Bluetooth 2.1 + EDR / 4.0: 2402 ~ 2480 MHz 802.11b/g/n HT20: 2.412GHz ~ 2.462GHz 802.11n HT40: 2.422GHz ~ 2.452GHz 802.11a/n HT20: 5.180GHz ~ 5.320GHz / 5.500 ~ 5.825GHz 802.11n HT40: 5.190GHz ~ 5.310GHz / 5.510 ~ 5.795GHz 802.11ac VHT80: 5.210GHz ~ 5.290GHz / 5.530 ~ 5.775GHz <input checked="" type="checkbox"/> Others Zigbee: 2405~2480MHz		
Device category	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others		
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm ²) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm ²)		
Antenna Specification	Antenna Gain : -0.66 dBi (Numeric gain 0.86)		
Maximum Average output power	Zigbee : 9.21 dBm (8.337 mW)		
Maximum Tune up Power	Zigbee : 10.50 dBm (11.220 mW)		
Evaluation applied	<input checked="" type="checkbox"/> MPE Evaluation* <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A		

3. TEST RESULTS

No non-compliance noted.

Calculation

$$\text{Given } E = \frac{\sqrt{30 \times P \times G}}{d} \quad \& \quad S = \frac{E^2}{377}$$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in watts / meter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{377d^2}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = d \text{ (m)} / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{377 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

4. MAXIMUM PERMISSIBLE EXPOSURE

Substituting the MPE safe distance using $d = 20$ cm into Equation 1:

$$S = 0.000199 \times P \times G$$

Where

P = Power in mW

G = Numeric antenna gain



S = Power density in mW / cm²



Zigbee:



Ch.	Frq.(MHz)	P (mW)	Gain (num.)	D (cm)	Power density in mW / cm ²	Limit (mW/cm2)
mid	2445	11.22	0.86	20	0.0019	1



APPENDIX 1 - PHOTOGRAPHS OF EUT


EXTERNAL PHOTOGRAPHS OF EUT

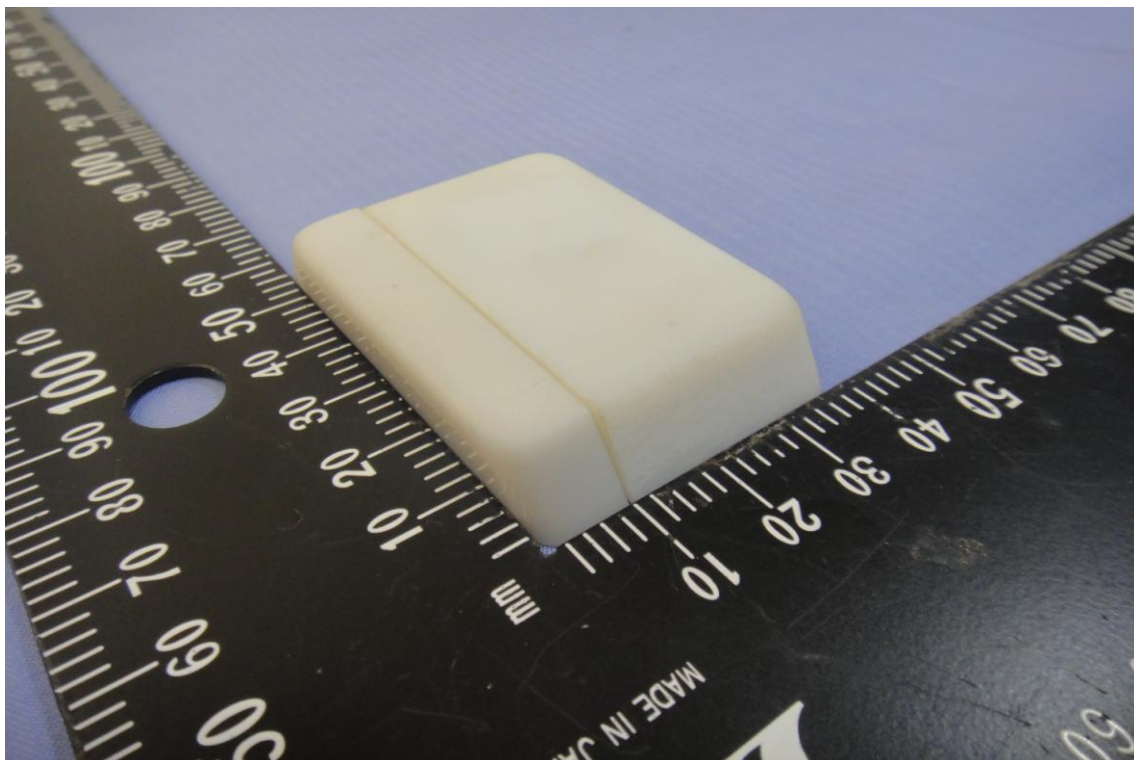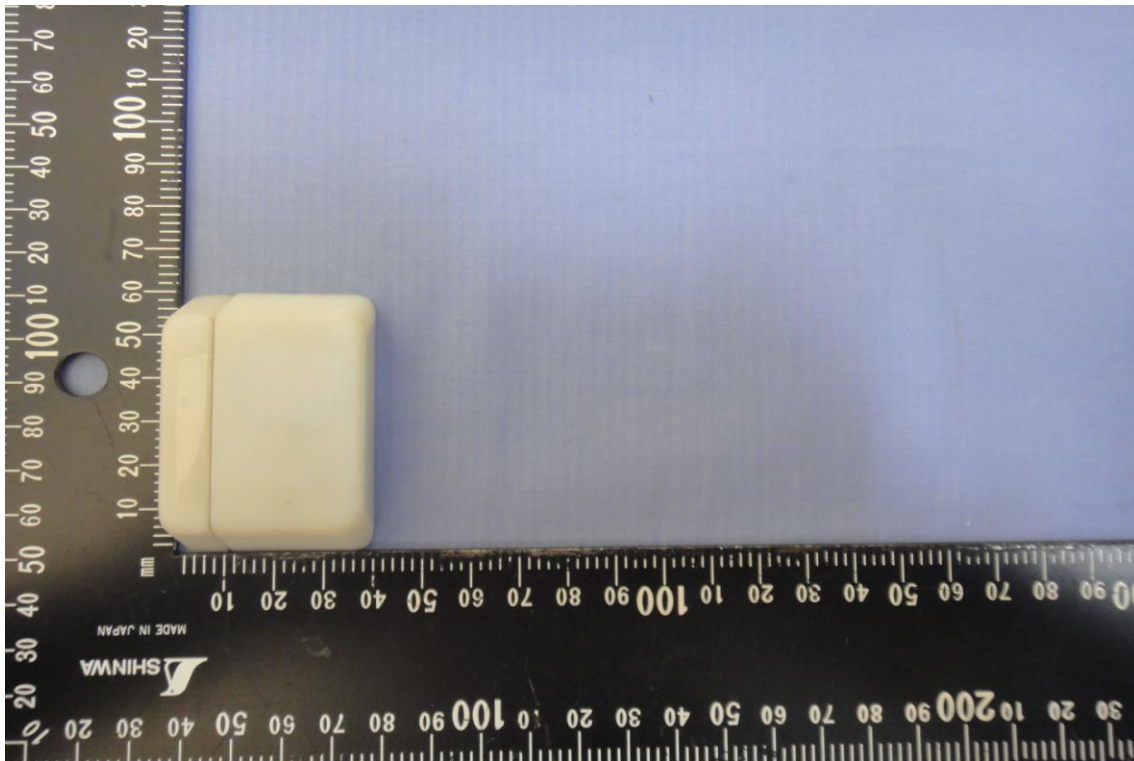

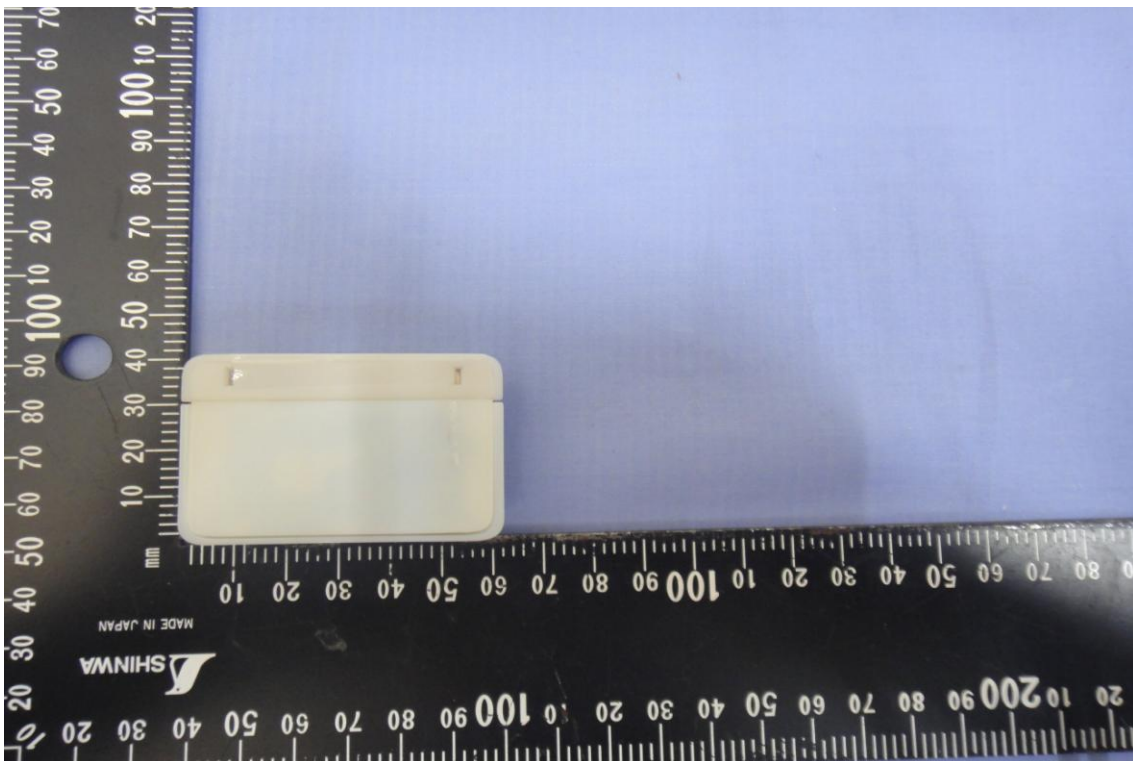
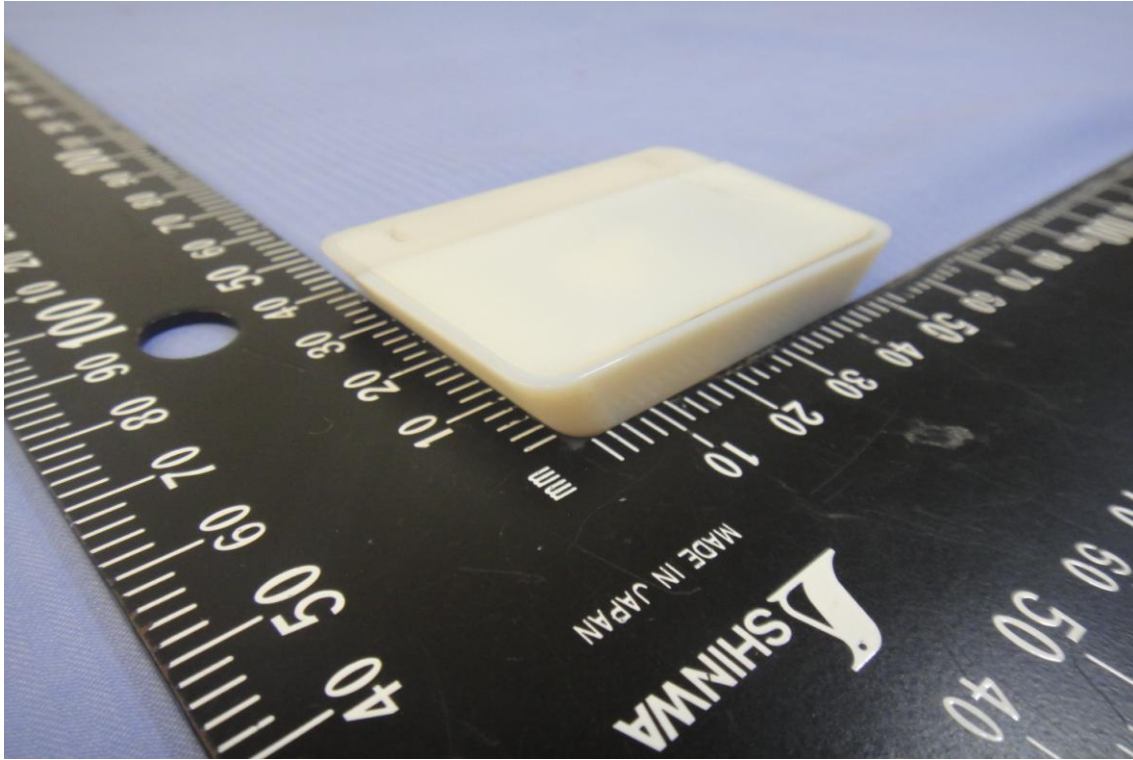


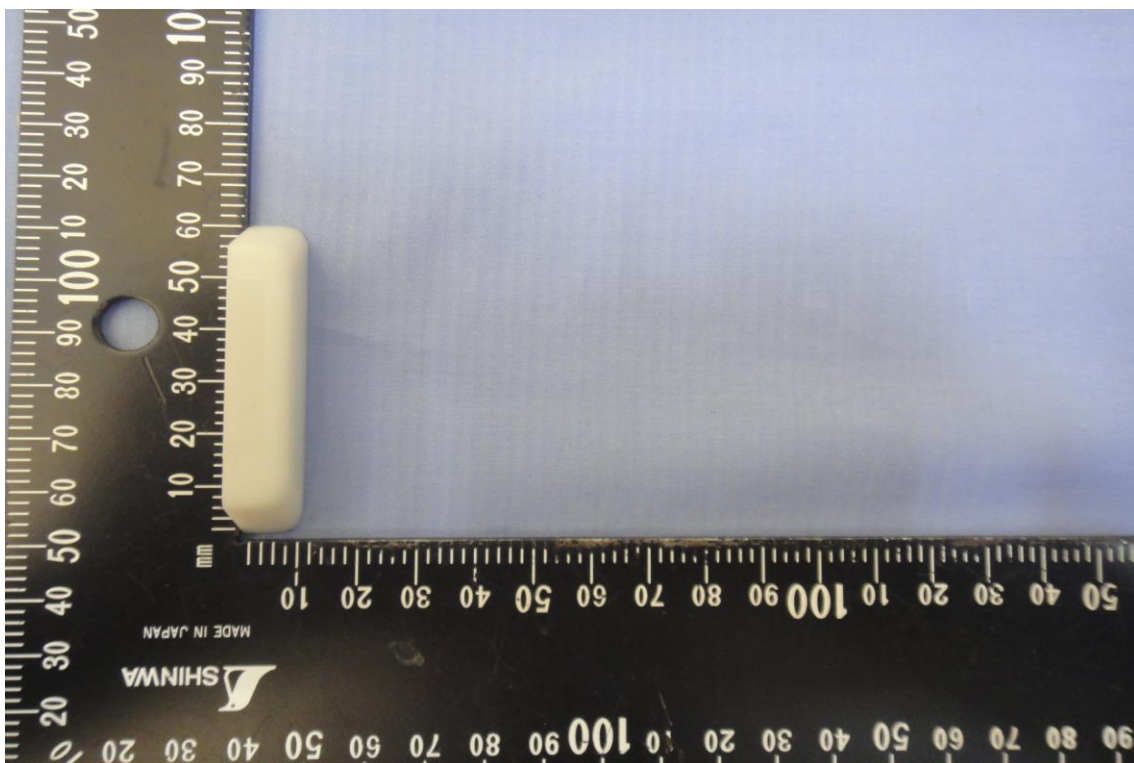
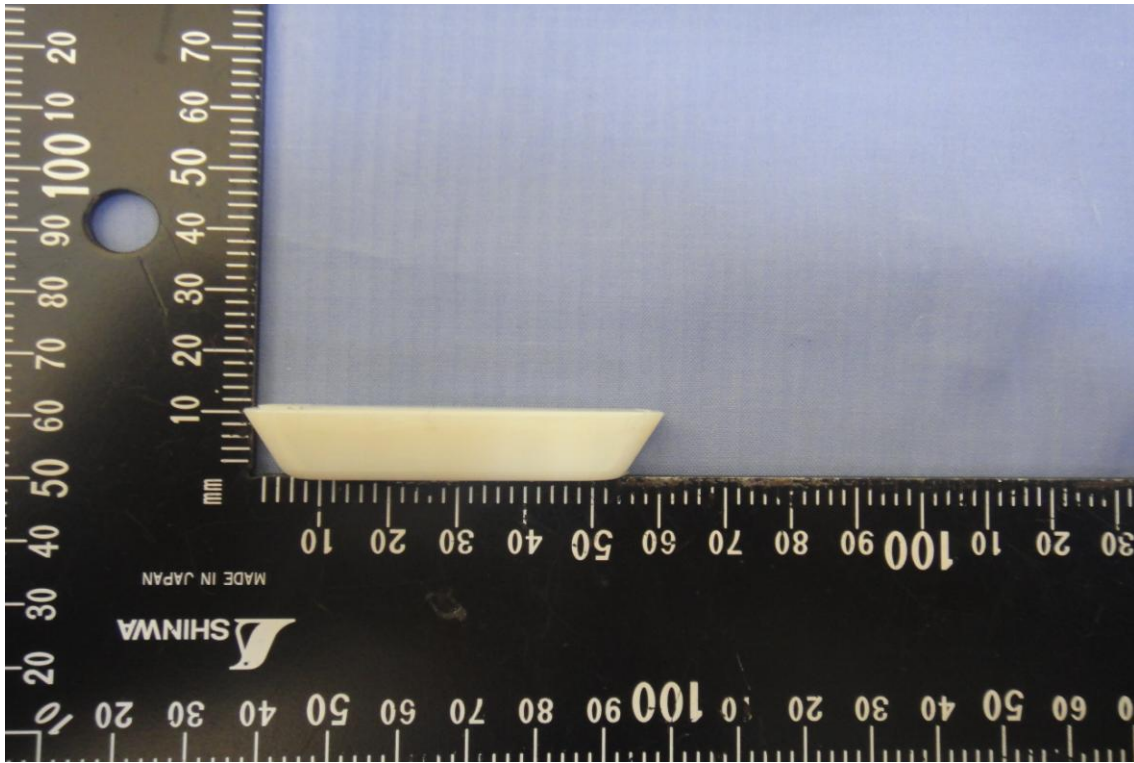


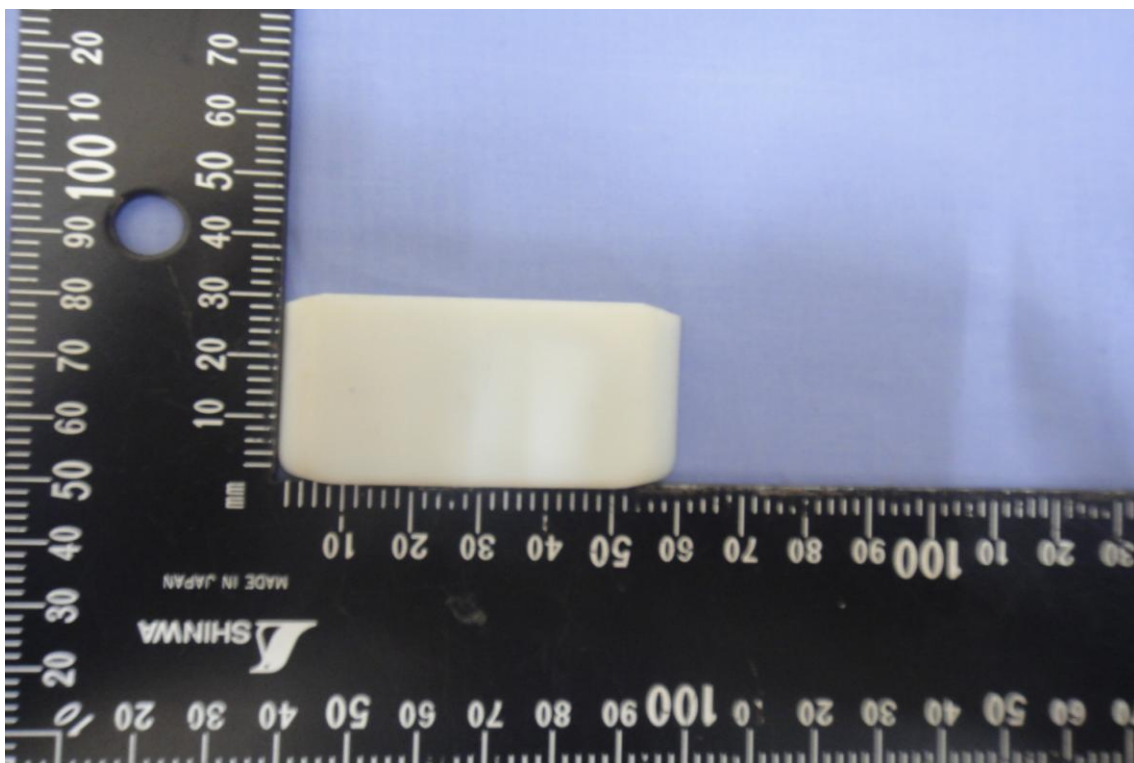
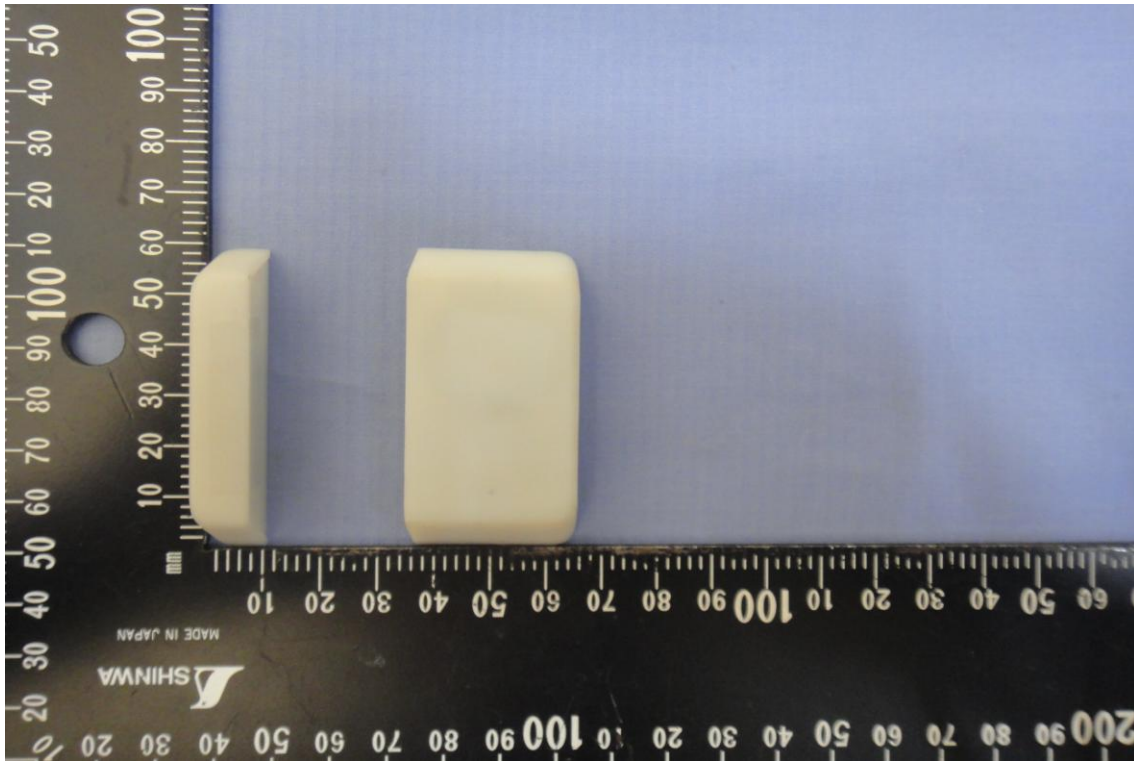


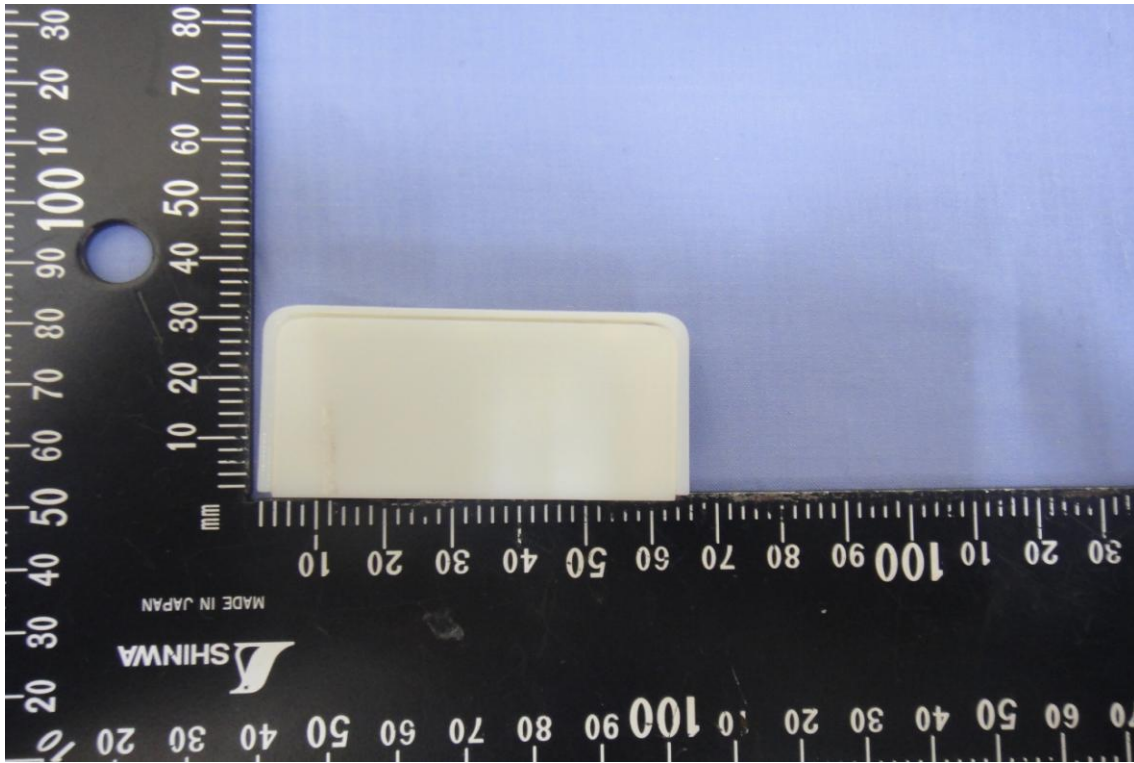


INTERNAL PHOTOGRAPHS OF EUT

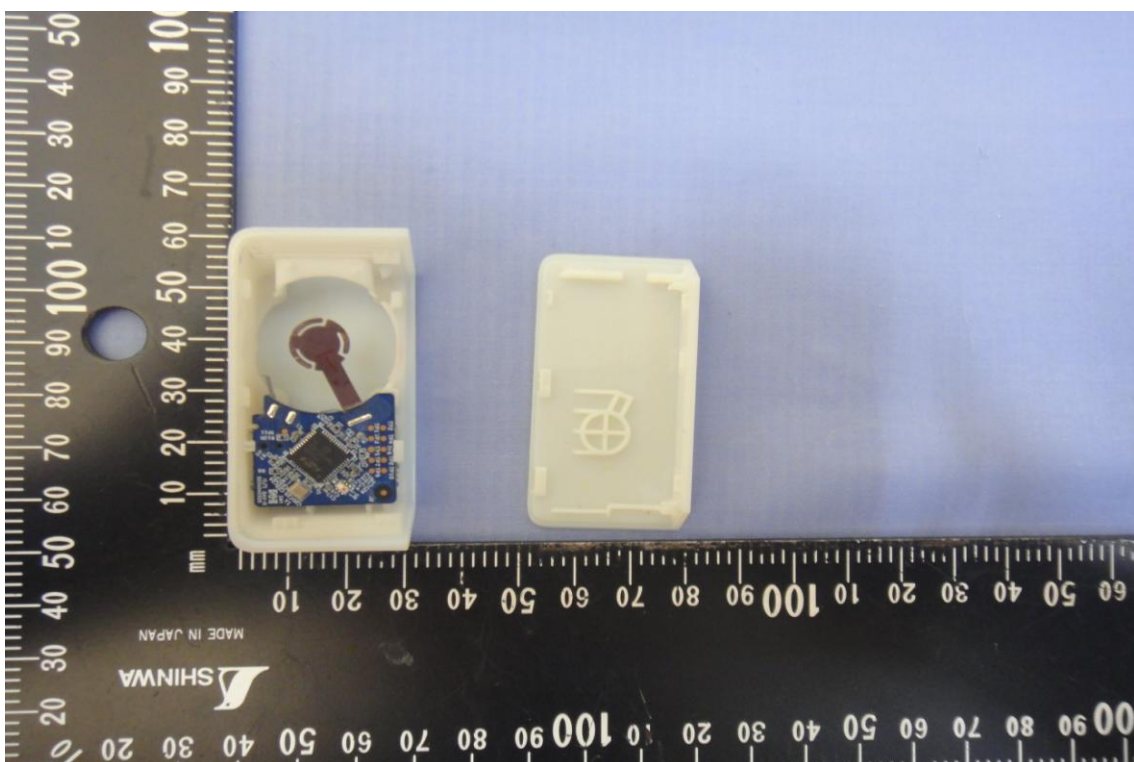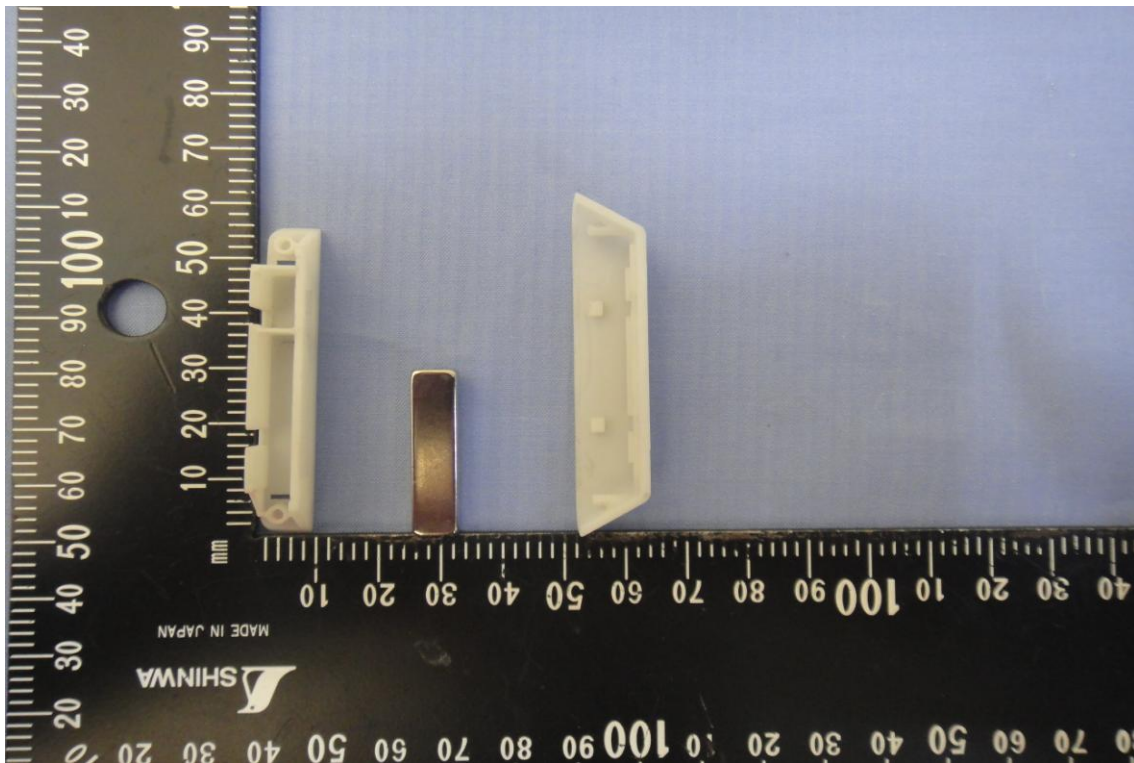

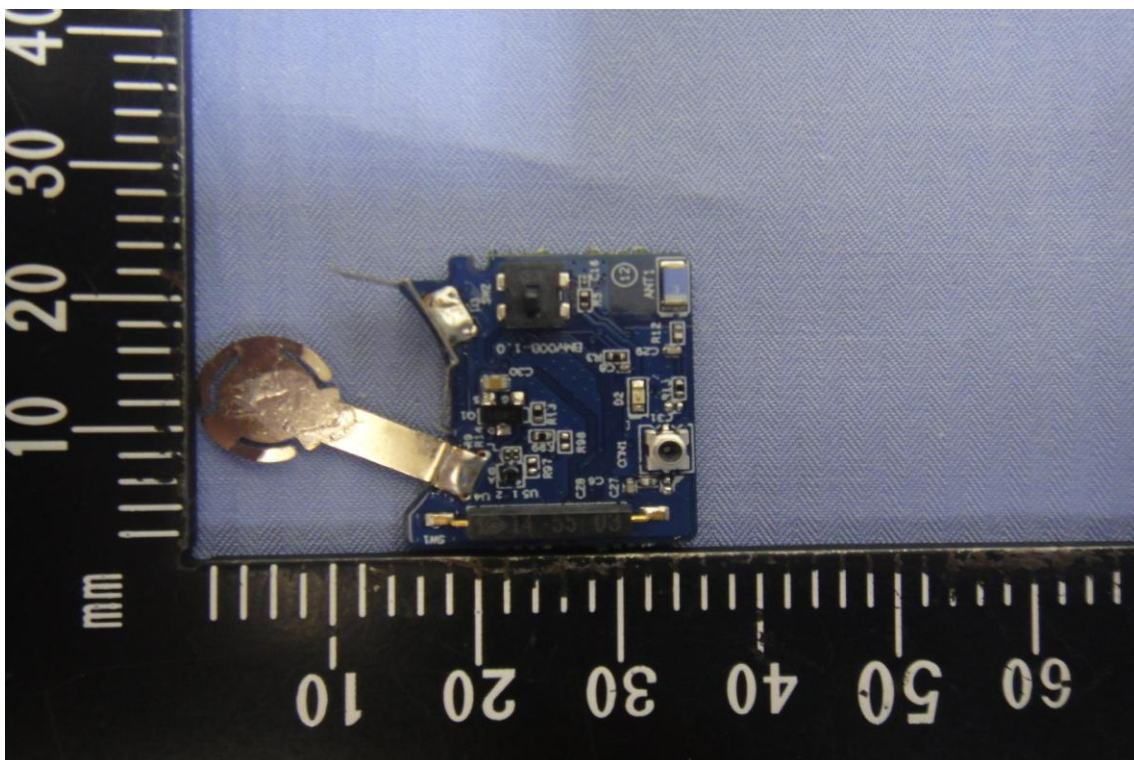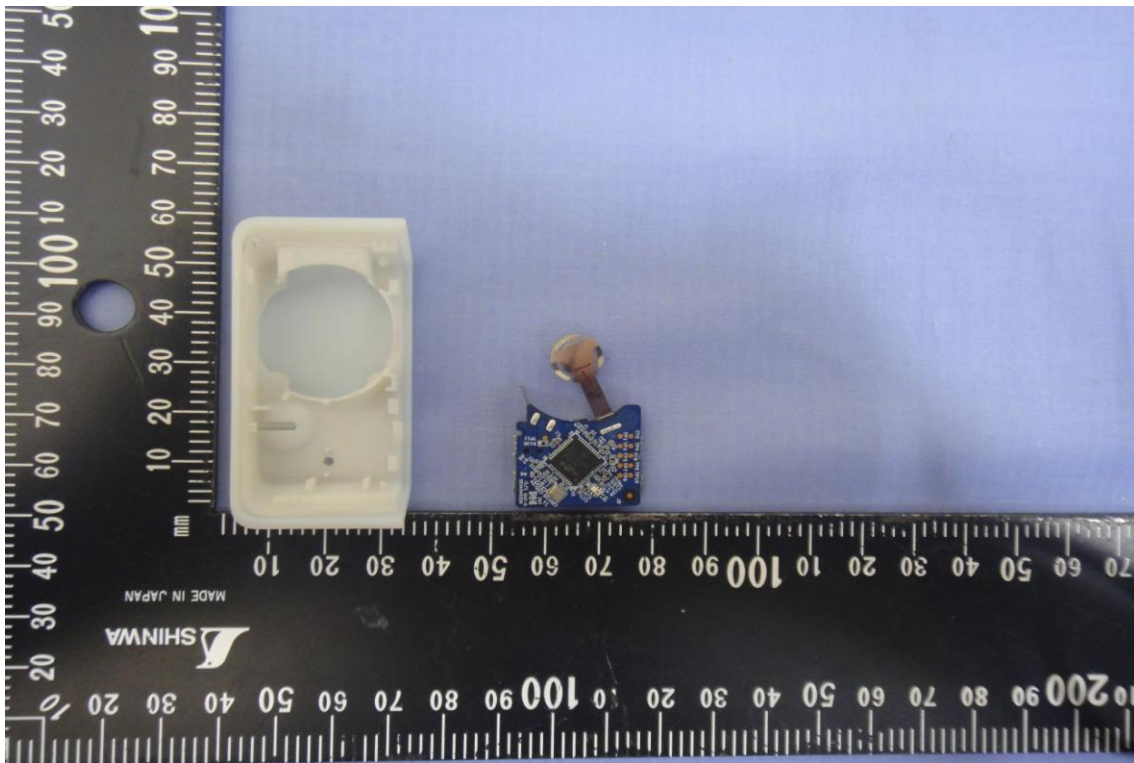

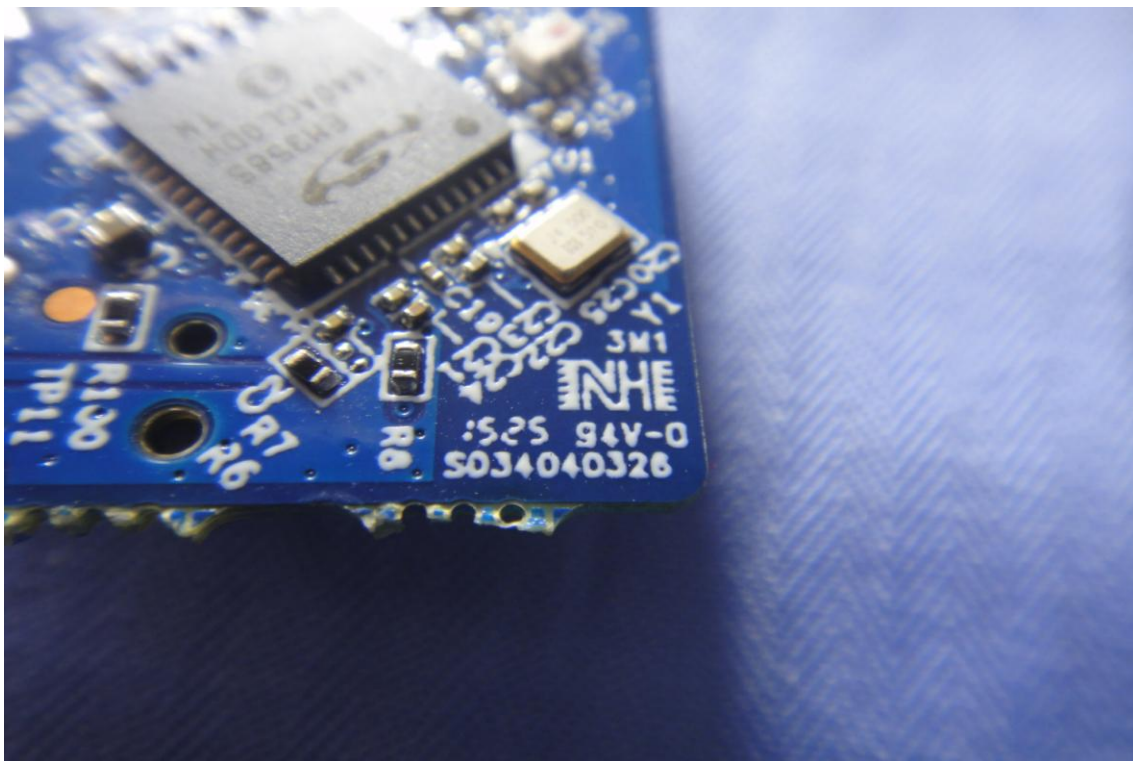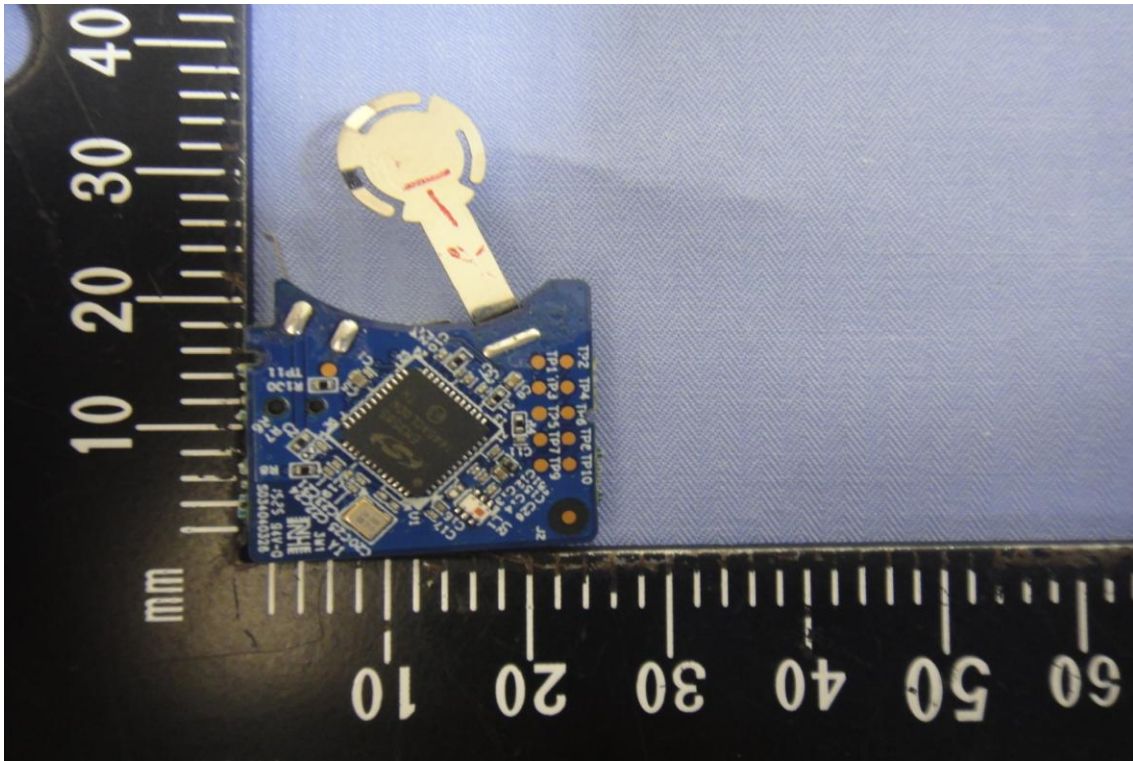


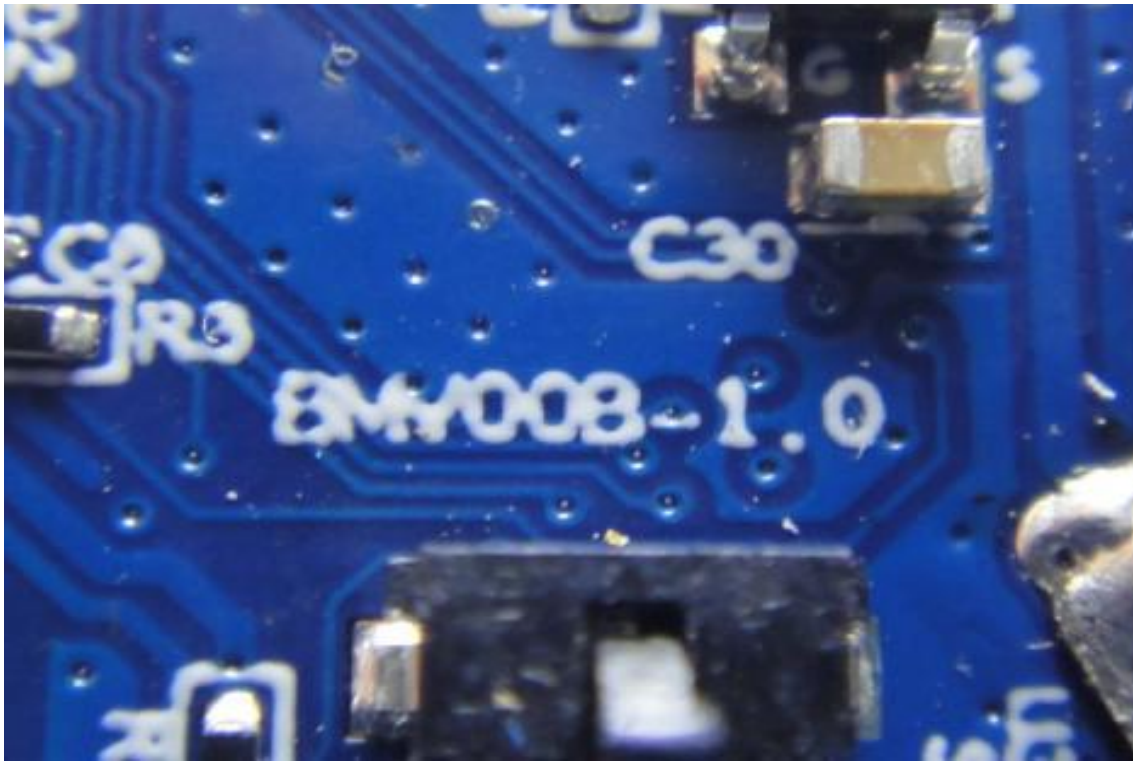

T150615D02




T150615D02

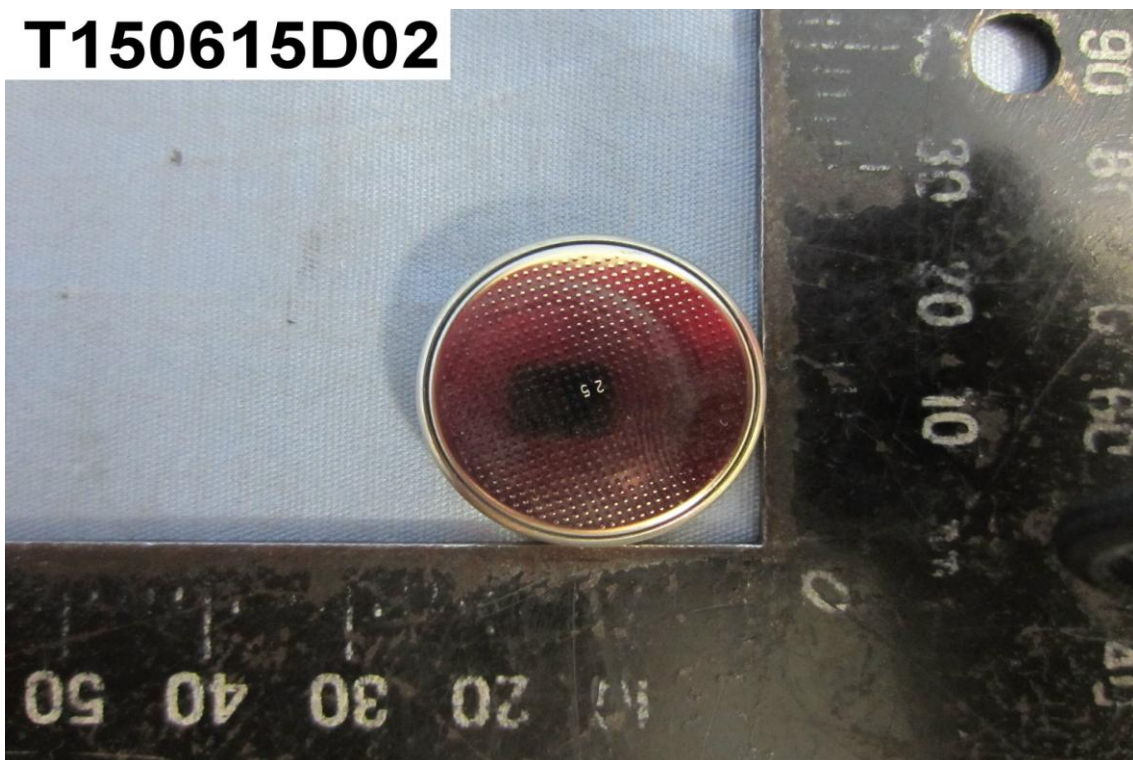


T150615D02



T150615D02

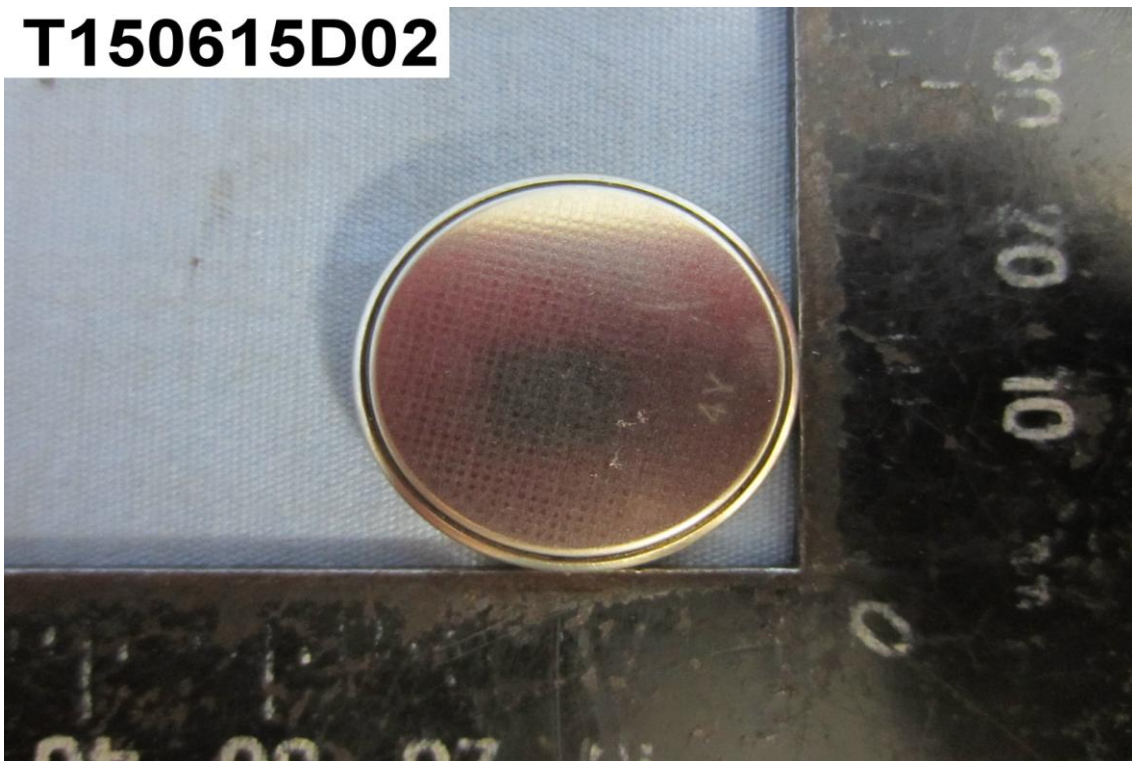

Antenna

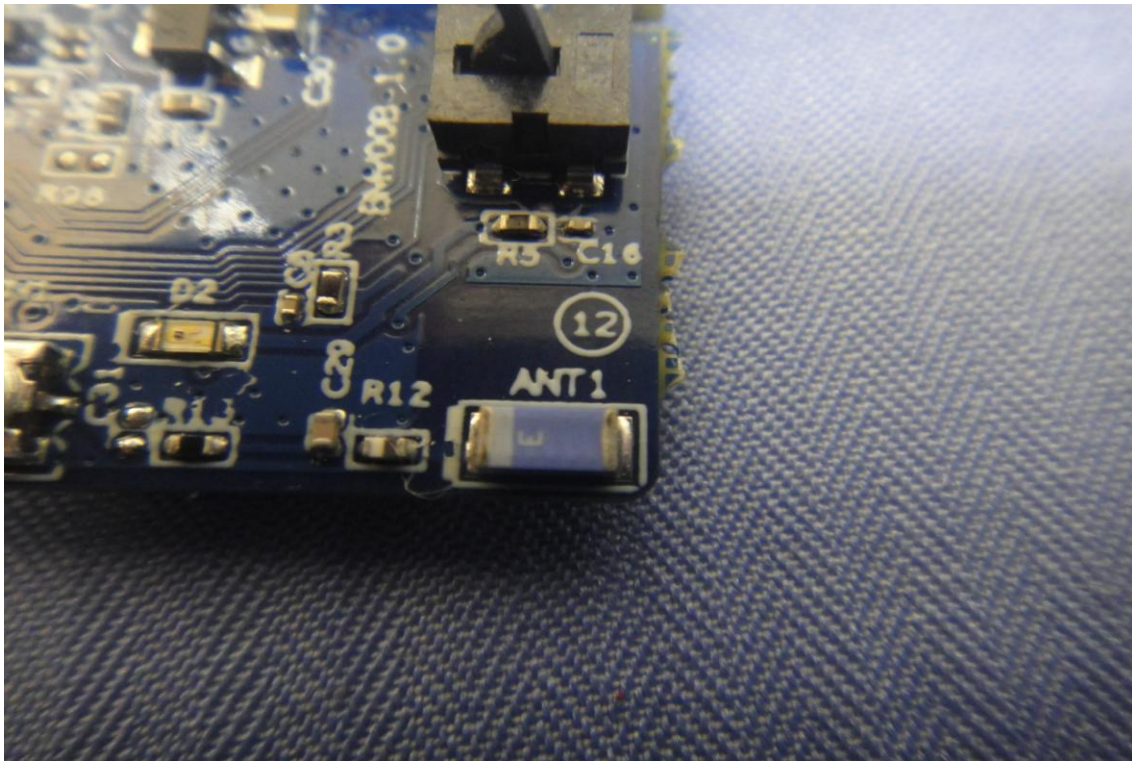

Module

