

## FCC Test Report

### (PART 24)

**Report No.:** RF200701D04

**FCC ID:** P27-TPM541

**Test Model:** TPM541M

**Series Model:** TPM541, TPM541S, TPM541MS (See section 3.1 for more detail)

**Received Date:** Jul. 01, 2020

**Test Date:** Aug. 24 ~ Sep. 08, 2020

**Issued Date:** Sep. 15, 2020

**Applicant:** Sercomm Corp.

**Address:** 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C. (NanKang Software Park)

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Test Site and Instruments .....	7
<b>3 General Information</b> .....	<b>8</b>
3.1 General Description of EUT .....	8
3.2 Configuration of System under Test .....	9
3.2.1 Description of Support Units .....	9
3.3 Test Mode Applicability and Tested Channel Detail .....	10
3.4 EUT Operating Conditions .....	12
3.5 General Description of Applied Standards and references .....	12
<b>4 Test Types and Results</b> .....	<b>13</b>
4.1 Output Power Measurement .....	13
4.1.1 Limits of Output Power Measurement .....	13
4.1.2 Test Procedures .....	13
4.1.3 Test Setup .....	14
4.1.4 Test Results .....	15
4.2 Modulation Characteristics Measurement .....	32
4.2.1 Limits of Modulation Characteristics .....	32
4.2.2 Test Setup .....	32
4.2.3 Test Procedure .....	32
4.2.4 Test Results .....	32
4.3 Frequency Stability Measurement .....	33
4.3.1 Limits of Frequency Stability Measurement .....	33
4.3.2 Test Procedure .....	33
4.3.3 Test Setup .....	33
4.3.4 Test Results .....	34
4.4 Occupied Bandwidth Measurement .....	40
4.4.1 Test Procedure .....	40
4.4.2 Test Setup .....	40
4.4.3 Test Result .....	41
4.5 Band Edge Measurement .....	44
4.5.1 Limits of Band Edge Measurement .....	44
4.5.2 Test Setup .....	44
4.5.3 Test Procedures .....	44
4.5.4 Test Results .....	45
4.6 Peak to Average Ratio .....	51
4.6.1 Limits of Peak to Average Ratio Measurement .....	51
4.6.2 Test Setup .....	51
4.6.3 Test Procedures .....	51
4.6.4 Test Results .....	52
4.7 Conducted Spurious Emissions .....	55
4.7.1 Limits of Conducted Spurious Emissions Measurement .....	55
4.7.2 Test Setup .....	55
4.7.3 Test Procedure .....	55
4.7.4 Test Results .....	56
4.8 Radiated Emission Measurement .....	74
4.8.1 Limits of Radiated Emission Measurement .....	74
4.8.2 Test Procedure .....	74
4.8.3 Deviation from Test Standard .....	74
4.8.4 Test Setup .....	75
4.8.5 Test Results .....	76

<b>5 Pictures of Test Arrangements.....</b>	<b>94</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>95</b>

### Release Control Record

Issue No.	Description	Date Issued
RF200701D04	Original Release	Sep. 15, 2020

## 1 Certificate of Conformity

**Product:** Cat.M1 module

**Brand:** Sercomm

**Test Model:** TPM541M

**Series Model:** TPM541, TPM541S, TPM541MS (See section 3.1 for more detail)

**Sample Status:** Engineering Sample

**Applicant:** Sercomm Corp.

**Test Date:** Aug. 24 ~ Sep. 08, 2020

**Standards:** FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** , **Date:** Sep. 15, 2020  
Gina Liu / Specialist

**Approved by :** , **Date:** Sep. 15, 2020  
Dylan Chiou / Senior Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
24.232(d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -1.65 dB at 3720.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2020	Mar. 17, 2021
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 12, 2019	Dec. 11, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 16, 2020	Apr. 15, 2021
HORN Antenna SCHWARZBECK	9120D	9120D-1169	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	148	Nov. 24, 2019	Nov. 23, 2020
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Nov. 08, 2019	Nov. 07, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 25, 2019	Oct. 24, 2020
Preamplifier EMCI	EMC 184045	980116	Oct. 08, 2019	Oct. 07, 2020
Preamplifier EMCI	EMC 012645	980115	Oct. 08, 2019	Oct. 07, 2020
Preamplifier EMCI	EMC 330H	980112	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 08, 2019	Oct. 07, 2020
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6261806803	Jan. 18, 2020	Jan. 17, 2021
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 10, 2019	Sep. 09, 2020
DC Power Supply Topward	33010D	807748	N/A	N/A

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 10.
  3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Cat.M1 module	
<b>Brand</b>	Sercomm	
<b>Test Model</b>	TPM541M	
<b>Series Model</b>	TPM541, TPM541S, TPM541MS	
<b>Model Difference</b>	Refer to Note as below	
<b>Status of EUT</b>	Engineering Sample	
<b>Power Supply Rating</b>	5.0 Vdc (adapter)	
<b>Modulation Type</b>	LTE	QPSK, 16QAM
<b>Frequency Range</b>	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
<b>Max. EIRP Power</b>	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	417.83 mW
	LTE Band 2 (Channel Bandwidth: 3 MHz)	426.58 mW
	LTE Band 2 (Channel Bandwidth: 5 MHz)	429.54 mW
	LTE Band 2 (Channel Bandwidth: 10 MHz)	439.54 mW
	LTE Band 2 (Channel Bandwidth: 15 MHz)	441.57 mW
	LTE Band 2 (Channel Bandwidth: 20 MHz)	454.99 mW
<b>Emission Designator</b>	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1M08G7D
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1M08G7D
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1M09G7D
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1M08G7D
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1M11G7D
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1M10D7W
<b>Antenna Type</b>	Dipole Antenna with 1.7 dBi gain	
<b>Accessory Device</b>	N/A	
<b>Data Cable Supplied</b>	N/A	


Note:

1. All models are listed as below.

Brand	Model	Modem	Embedded GNSS	Embedded MCU
Sercomm	TPM541M	V	V	V
	TPM541	V	V	
	TPM541S	V		
	TPM541MS	V		V

2. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

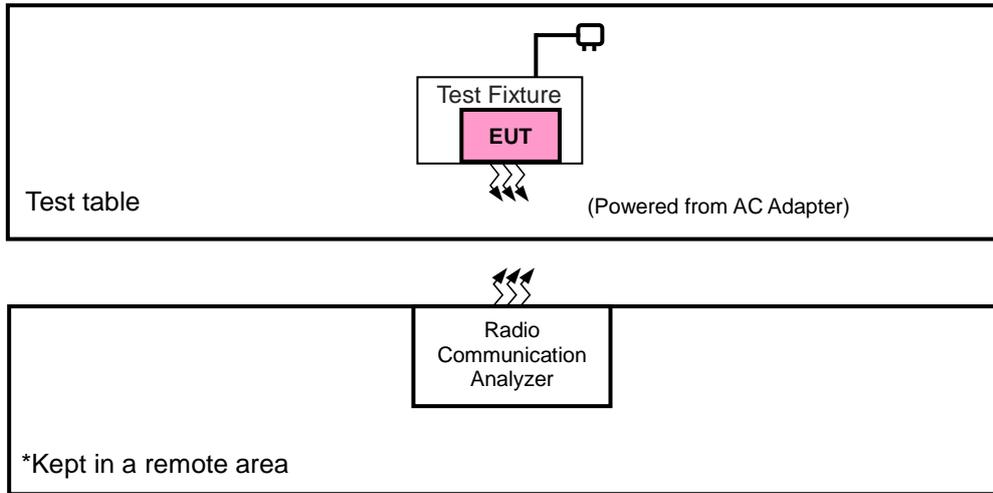

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
A.	Adapter	N/A	OB-5LF	N/A	N/A
B.	Test Fixture	N/A	N/A	N/A	N/A
C.	Radio Communication Analyzer	Anritsu	MT8821C	6201502978	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A
2.	N/A
3.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item B were provided by client.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
LTE Band 2	X-plane	X-plane

#### LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	18700 to 19100	18900	20 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
-	Frequency Stability	18607 to 19193	18607, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
-	Peak to Average Ratio	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode		
-	Band Edge	18607 to 19193	18607	1.4 MHz	QPSK	1 RB / 0 RB Offset		
			19193	1.4 MHz	QPSK	6 RB / 0 RB Offset		
		18615 to 19185	18615	3 MHz	QPSK	1 RB / 5 RB Offset		
			19185	3 MHz	QPSK	6 RB / 0 RB Offset		
		18625 to 19175	18625	5 MHz	QPSK	1 RB / 0 RB Offset		
			19175	5 MHz	QPSK	6 RB / 0 RB Offset		
		18650 to 19150	18650	10 MHz	QPSK	1 RB / 5 RB Offset		
			19150	10 MHz	QPSK	6 RB / 0 RB Offset		
		18675 to 19125	18675	15 MHz	QPSK	1 RB / 0 RB Offset		
			19125	15 MHz	QPSK	6 RB / 0 RB Offset		
		18700 to 19100	18700	20 MHz	QPSK	1 RB / 5 RB Offset		
			19100	20 MHz	QPSK	6 RB / 0 RB Offset		
		-	Conducted Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
				18615 to 19185	18615, 18900, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
				18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
				18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
18675 to 19125	18675, 18900, 19125			15 MHz	QPSK	1 RB / 0 RB Offset		
18700 to 19100	18700, 18900, 19100			20 MHz	QPSK	1 RB / 0 RB Offset		
-	Radiated Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset		
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset		
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset		

**Note:**

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP, modulation characteristics, occupied bandwidth and peak to average ratio items had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

**Test Condition:**

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	120 Vac, 60 Hz	Getaz Yang
Modulation Characteristics	26 deg. C, 58 % RH	120 Vac, 60 Hz	James Yang
Frequency Stability	26 deg. C, 58 % RH	120 Vac, 60 Hz	James Yang
Occupied Bandwidth	26 deg. C, 58 % RH	120 Vac, 60 Hz	James Yang
Band Edge	26 deg. C, 58 % RH	120 Vac, 60 Hz	James Yang
Peak to Average Ratio	26 deg. C, 58 % RH	120 Vac, 60 Hz	James Yang
Conducted Emission	26 deg. C, 58 % RH	120 Vac, 60 Hz	James Yang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang

**3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

**3.5 General Description of Applied Standards and references**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**ANSI 63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-E 2016**

**NOTE:** All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

#### 4.1.2 Test Procedures

##### **EIRP / ERP Measurement:**

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 20 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ . E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$ .


##### **Conducted Power Measurement:**

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

**EIRP / ERP Measurement:**

**<Radiated Emission below or equal 1 GHz>**

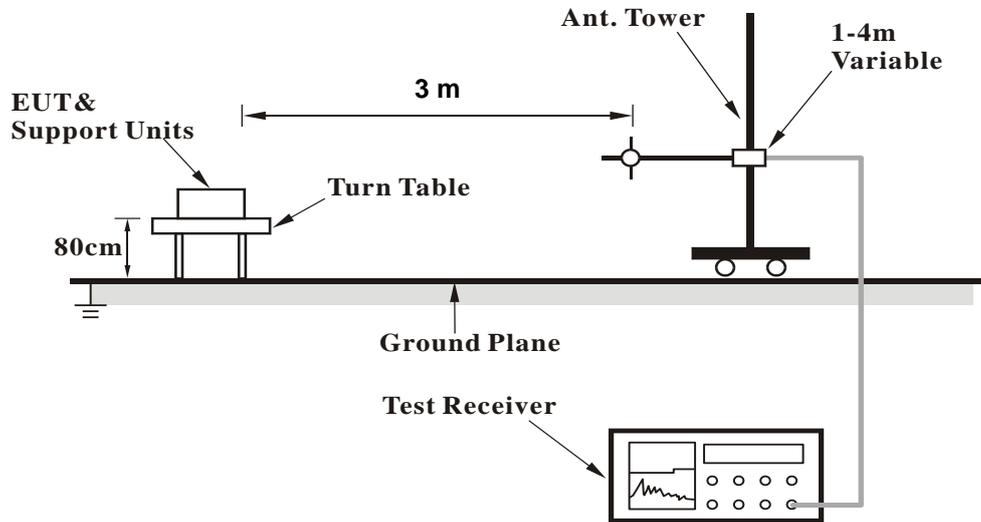

**<Radiated Emission above 1 GHz>**

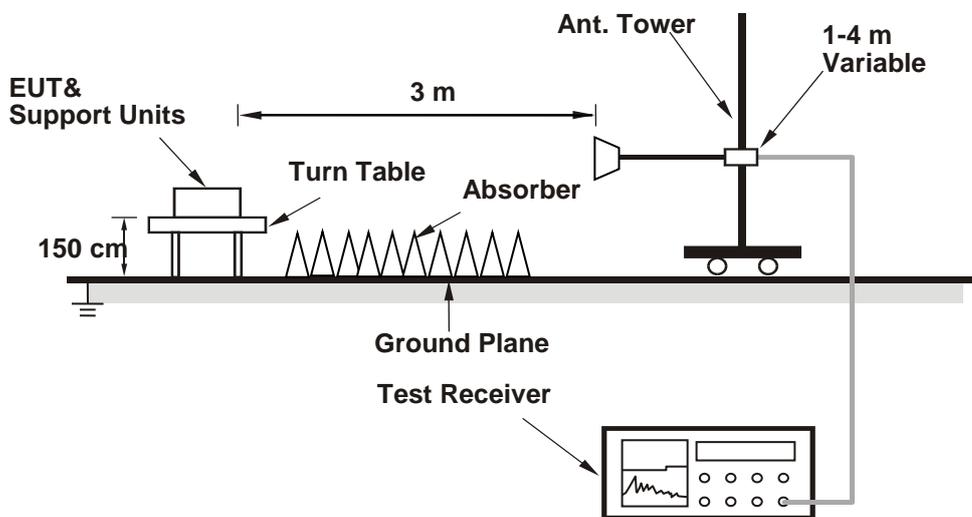

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**Conducted Power Measurement:**



#### 4.1.4 Test Results

##### Conducted Output Power (dBm)

BW(MHz):		1.4		Test ConfigurationInitial of Power				EUT	
Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)	
Low Range	18607	1850.7	QPSK	1	0	0	-85	24	
			QPSK	1	5	0	-85	24.12	
			QPSK	3	3	0	-85	23.11	
			QPSK	6	0	0	-85	21.77	
			16QAM	1	0	0	-85	22.74	
			16QAM	1	5	0	-85	22.81	
			16QAM	3	0	0	-85	21.57	
			16QAM	5	0	0	-85	22.06	
Mid Range	18900	1880	QPSK	1	0	0	-85	25.02	
			QPSK	1	5	0	-85	25	
			QPSK	3	3	0	-85	23.51	
			QPSK	6	0	0	-85	21.94	
			16QAM	1	0	0	-85	23.13	
			16QAM	1	5	0	-85	23.03	
			16QAM	3	0	0	-85	21.82	
			16QAM	5	0	0	-85	22.32	
High Range	19193	1909.3	QPSK	1	0	0	-85	24.6	
			QPSK	1	5	0	-85	24.54	
			QPSK	3	3	0	-85	23.3	
			QPSK	6	0	0	-85	21.38	
			16QAM	1	0	0	-85	22.39	
			16QAM	1	5	0	-85	22.4	
			16QAM	3	0	0	-85	21.14	
			16QAM	5	0	0	-85	21.76	

BW(MHz):		3							
Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test Configuration			Initial of Power		EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)	
Low Range	18615	1851.5	QPSK	1	0	0	-85	24.76	
			QPSK	1	5	0	-85	24.63	
			QPSK	1	0	1	-85	25.22	
			QPSK	1	5	1	-85	25.1	
			QPSK	3	3	0	-85	23.44	
			QPSK	3	3	1	-85	23.72	
			QPSK	6	0	0	-85	21.91	
			QPSK	6	0	1	-85	22.34	
			16QAM	1	0	0	-85	22.68	
			16QAM	1	5	0	-85	22.7	
			16QAM	1	0	1	-85	23.13	
			16QAM	1	5	1	-85	23.04	
			16QAM	3	0	0	-85	21.71	
			16QAM	3	3	1	-85	22.06	
			16QAM	5	0	0	-85	22.11	
			16QAM	5	0	1	-85	22.58	
Mid Range	18900	1880	QPSK	1	0	0	-85	25.06	
			QPSK	1	5	0	-85	24.95	
			QPSK	1	0	1	-85	25.04	
			QPSK	1	5	1	-85	24.96	
			QPSK	3	3	0	-85	23.65	
			QPSK	3	3	1	-85	23.63	
			QPSK	6	0	0	-85	22.15	
			QPSK	6	0	1	-85	22.12	
			16QAM	1	0	0	-85	22.92	
			16QAM	1	5	0	-85	22.84	
			16QAM	1	0	1	-85	22.92	
			16QAM	1	5	1	-85	22.8	
			16QAM	3	0	0	-85	21.93	
			16QAM	3	3	1	-85	21.8	
			16QAM	5	0	0	-85	22.36	
			16QAM	5	0	1	-85	22.38	

Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
High Range	19185	1908.5	QPSK	1	0	0	-85	24.63
			QPSK	1	5	0	-85	24.2
			QPSK	1	0	1	-85	24.6
			QPSK	1	5	1	-85	24.16
			QPSK	3	3	0	-85	22.99
			QPSK	3	3	1	-85	22.93
			QPSK	6	0	0	-85	21.55
			QPSK	6	0	1	-85	21.5
			16QAM	1	0	0	-85	22.34
			16QAM	1	5	0	-85	22.2
			16QAM	1	0	1	-85	22.34
			16QAM	1	5	1	-85	22.16
			16QAM	3	0	0	-85	21.32
			16QAM	3	3	1	-85	21.19
			16QAM	5	0	0	-85	21.83
			16QAM	5	0	1	-85	21.81

BW(MHz):		5							
Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test Configuration			Initial of Power		EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)	
Low Range	18625	1852.5	QPSK	1	0	0	-85	24.55	
			QPSK	1	5	0	-85	24.65	
			QPSK	1	0	1	-85	24.88	
			QPSK	1	5	1	-85	24.98	
			QPSK	1	0	3	-85	25.21	
			QPSK	1	5	3	-85	25.31	
			QPSK	3	0	0	-85	23.25	
			QPSK	3	3	3	-85	23.87	
			QPSK	6	0	0	-85	23.13	
			QPSK	6	0	1	-85	23.45	
			QPSK	6	0	3	-85	23.7	
			16QAM	1	0	0	-85	23.96	
			16QAM	1	5	0	-85	23.9	
			16QAM	1	0	1	-85	23.88	
			16QAM	1	5	1	-85	23.9	
			16QAM	1	0	3	-85	23.75	
			16QAM	1	5	3	-85	23.73	
			16QAM	3	0	0	-85	23.04	
			16QAM	3	3	3	-85	23.72	
			16QAM	5	0	0	-85	21.93	
16QAM	5	0	1	-85	22.28				
16QAM	5	0	3	-85	22.6				

Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test Configuration			Initial of Power		EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)	
Mid Range	18900	1880	QPSK	1	0	0	-85	24.84	
			QPSK	1	5	0	-85	24.92	
			QPSK	1	0	1	-85	24.93	
			QPSK	1	5	1	-85	24.85	
			QPSK	1	0	3	-85	24.8	
			QPSK	1	5	3	-85	24.91	
			QPSK	3	0	0	-85	23.56	
			QPSK	3	3	3	-85	23.44	
			QPSK	6	0	0	-85	23.38	
			QPSK	6	0	1	-85	23.36	
			QPSK	6	0	3	-85	23.38	
			16QAM	1	0	0	-85	23.99	
			16QAM	1	5	0	-85	23.95	
			16QAM	1	0	1	-85	24	
			16QAM	1	5	1	-85	23.92	
			16QAM	1	0	3	-85	23.84	
			16QAM	1	5	3	-85	23.83	
			16QAM	3	0	0	-85	23.23	
			16QAM	3	3	3	-85	23.23	
			16QAM	5	0	0	-85	22.11	
16QAM	5	0	1	-85	22.09				
16QAM	5	0	3	-85	22.08				

Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test Configuration			Initial of Power		EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)	
High Range	19175	1907.5	QPSK	1	0	0	-85	24.32	
			QPSK	1	5	0	-85	24.39	
			QPSK	1	0	1	-85	24.32	
			QPSK	1	5	1	-85	24.38	
			QPSK	1	0	3	-85	24.28	
			QPSK	1	5	3	-85	24.36	
			QPSK	3	0	0	-85	22.96	
			QPSK	3	3	3	-85	22.75	
			QPSK	6	0	0	-85	22.8	
			QPSK	6	0	1	-85	22.78	
			QPSK	6	0	3	-85	22.77	
			16QAM	1	0	0	-85	23.84	
			16QAM	1	5	0	-85	23.82	
			16QAM	1	0	1	-85	23.88	
			16QAM	1	5	1	-85	23.81	
			16QAM	1	0	3	-85	23.89	
			16QAM	1	5	3	-85	23.81	
			16QAM	3	0	0	-85	22.64	
			16QAM	3	3	3	-85	22.72	
			16QAM	5	0	0	-85	21.56	
16QAM	5	0	1	-85	21.55				
16QAM	5	0	3	-85	21.5				

BW(MHz):		10						
Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test ConfigurationInitial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	18650	1855	QPSK	1	0	0	-85	24.75
			QPSK	1	5	0	-85	24.76
			QPSK	1	0	3	-85	25.3
			QPSK	1	5	3	-85	25.37
			QPSK	1	0	7	-85	25.23
			QPSK	1	5	7	-85	25.19
			QPSK	4	0	0	-85	24.53
			QPSK	4	2	7	-85	24.48
			QPSK	6	0	0	-85	23.34
			QPSK	6	0	7	-85	23.69
			16QAM	1	0	0	-85	23.91
			16QAM	1	5	0	-85	23.99
			16QAM	1	0	3	-85	23.87
			16QAM	1	5	3	-85	23.82
			16QAM	1	0	7	-85	23.88
			16QAM	1	5	7	-85	23.81
			16QAM	4	2	0	-85	22.82
			16QAM	4	2	7	-85	23.19
			16QAM	5	0	0	-85	23.1
			16QAM	5	0	7	-85	23.48

Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test Configuration			Initial of Power		EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)	
Mid Range	18900	1880	QPSK	1	0	0	-85	24.8	
			QPSK	1	5	0	-85	24.89	
			QPSK	1	0	3	-85	24.78	
			QPSK	1	5	3	-85	24.89	
			QPSK	1	0	7	-85	24.77	
			QPSK	1	5	7	-85	24.86	
			QPSK	4	0	0	-85	24.54	
			QPSK	4	2	7	-85	24.24	
			QPSK	6	0	0	-85	23.41	
			QPSK	6	0	7	-85	23.35	
			16QAM	1	0	0	-85	23.78	
			16QAM	1	5	0	-85	23.82	
			16QAM	1	0	3	-85	23.77	
			16QAM	1	5	3	-85	23.76	
			16QAM	1	0	7	-85	23.88	
			16QAM	1	5	7	-85	23.81	
			16QAM	4	2	0	-85	22.82	
			16QAM	4	2	7	-85	22.78	
			16QAM	5	0	0	-85	23.14	
			16QAM	5	0	7	-85	23.15	

Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
High Range	19150	1905	QPSK	1	0	0	-85	24.41
			QPSK	1	5	0	-85	24.49
			QPSK	1	5	7	-85	24.31
			QPSK	1	0	3	-85	24.39
			QPSK	1	5	3	-85	24.46
			QPSK	1	0	7	-85	24.33
			QPSK	4	0	0	-85	24.03
			QPSK	4	2	7	-85	23.65
			QPSK	6	0	0	-85	22.93
			QPSK	6	0	7	-85	22.7
			16QAM	1	0	0	-85	23.82
			16QAM	1	5	0	-85	23.76
			16QAM	1	0	3	-85	23.7
			16QAM	1	5	3	-85	23.75
			16QAM	1	0	7	-85	23.69
			16QAM	1	5	7	-85	23.78
			16QAM	4	2	0	-85	22.42
			16QAM	4	2	7	-85	22.27
			16QAM	5	0	0	-85	22.65
			16QAM	5	0	7	-85	22.54

BW(MHz):		15		Test ConfigurationInitial of Power				EUT	
Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Modulation			Narrowband Index	Cell power (dBm/15kHz)	power (dBm)	
			RB Size	RB Offset					
Low Range	18675	1857.5	QPSK	1	0	0	-85	24.83	
			QPSK	1	5	0	-85	24.93	
			QPSK	1	0	5	-85	25.16	
			QPSK	1	5	5	-85	25.26	
			QPSK	1	0	11	-85	24.98	
			QPSK	1	5	11	-85	25.09	
			QPSK	3	0	0	-85	24.81	
			QPSK	3	3	11	-85	24.9	
			QPSK	6	0	0	-85	24.63	
			QPSK	6	0	11	-85	24.84	
			16QAM	1	0	0	-85	23.94	
			16QAM	1	5	0	-85	23.9	
			16QAM	1	0	5	-85	23.91	
			16QAM	1	5	5	-85	23.85	
			16QAM	1	0	11	-85	23.94	
			16QAM	1	5	11	-85	23.88	
			16QAM	3	0	0	-85	23.81	
			16QAM	3	3	11	-85	23.83	
			16QAM	5	0	0	-85	23.75	
			16QAM	5	0	11	-85	23.69	

Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test Configuration			Initial of Power		EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)	
Mid Range	18900	1880	QPSK	1	0	0	-85	24.71	
			QPSK	1	5	0	-85	24.8	
			QPSK	1	0	5	-85	24.82	
			QPSK	1	5	5	-85	24.79	
			QPSK	1	0	11	-85	24.66	
			QPSK	1	5	11	-85	24.73	
			QPSK	3	0	0	-85	24.78	
			QPSK	3	3	11	-85	24.64	
			QPSK	6	0	0	-85	24.6	
			QPSK	6	0	11	-85	24.54	
			16QAM	1	0	0	-85	23.88	
			16QAM	1	5	0	-85	23.81	
			16QAM	1	0	5	-85	23.75	
			16QAM	1	5	5	-85	23.76	
			16QAM	1	0	11	-85	23.82	
			16QAM	1	5	11	-85	23.84	
			16QAM	3	0	0	-85	23.8	
			16QAM	3	3	11	-85	23.76	
			16QAM	5	0	0	-85	23.7	
			16QAM	5	0	11	-85	23.68	

Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test ConfigurationInitial of Power			EUT		
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
High Range	19125	1902.5	QPSK	1	0	0	-85	24.49
			QPSK	1	5	11	-85	24.22
			QPSK	1	0	5	-85	24.46
			QPSK	1	5	5	-85	24.53
			QPSK	1	0	11	-85	24.26
			QPSK	1	5	11	-85	24.31
			QPSK	3	0	0	-85	24.48
			QPSK	3	3	11	-85	24.1
			QPSK	6	0	0	-85	24.28
			QPSK	6	0	11	-85	24.02
			16QAM	1	0	0	-85	23.76
			16QAM	1	5	0	-85	23.77
			16QAM	1	0	5	-85	23.85
			16QAM	1	5	5	-85	23.73
			16QAM	1	0	11	-85	23.68
			16QAM	1	5	11	-85	23.64
			16QAM	3	0	0	-85	23.66
			16QAM	3	3	11	-85	23.7
			16QAM	5	0	0	-85	23.65
			16QAM	5	0	11	-85	23.61

BW(MHz):		20						
Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test ConfigurationInitial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	18700	1860	QPSK	1	0	0	-85	24.95
			QPSK	1	5	0	-85	25.03
			QPSK	1	0	7	-85	25.14
			QPSK	1	5	7	-85	25.18
			QPSK	1	0	15	-85	24.92
			QPSK	1	5	15	-85	24.96
			QPSK	3	0	0	-85	25.02
			QPSK	3	3	15	-85	24.86
			QPSK	6	0	0	-85	24.72
			QPSK	6	0	15	-85	24.64
			16QAM	1	0	0	-85	23.92
			16QAM	1	5	0	-85	23.8
			16QAM	1	0	7	-85	23.91
			16QAM	1	5	7	-85	23.87
			16QAM	1	0	15	-85	23.82
			16QAM	1	5	15	-85	23.84
			16QAM	3	0	0	-85	23.86
			16QAM	3	3	15	-85	23.75
			16QAM	5	0	0	-85	23.71
			16QAM	5	0	15	-85	23.72

Test Frequency ID	N <sub>UL</sub>	Frequency of Uplink [MHz]	Test Configuration			Initial of Power		EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)	
Mid Range	18900	1880	QPSK	1	0	0	-85	24.75	
			QPSK	1	5	0	-85	24.77	
			QPSK	1	0	7	-85	24.75	
			QPSK	1	5	7	-85	24.84	
			QPSK	1	0	15	-85	24.66	
			QPSK	1	5	15	-85	24.78	
			QPSK	3	0	0	-85	24.74	
			QPSK	3	3	15	-85	24.66	
			QPSK	6	0	0	-85	24.45	
			QPSK	6	0	15	-85	24.5	
			16QAM	1	0	0	-85	23.82	
			16QAM	1	5	0	-85	23.84	
			16QAM	1	0	7	-85	23.79	
			16QAM	1	5	7	-85	23.72	
			16QAM	1	0	15	-85	23.8	
			16QAM	1	5	15	-85	23.73	
			16QAM	3	0	0	-85	23.77	
			16QAM	3	3	15	-85	23.68	
			16QAM	5	0	0	-85	23.62	
			16QAM	5	0	15	-85	23.65	
High Range	19100	1900	QPSK	1	0	0	-85	24.58	
			QPSK	1	5	0	-85	24.65	
			QPSK	1	0	7	-85	24.38	
			QPSK	1	5	7	-85	24.48	
			QPSK	1	0	15	-85	24.28	
			QPSK	1	5	15	-85	24.36	
			QPSK	3	0	0	-85	24.62	
			QPSK	3	3	15	-85	24.16	
			QPSK	6	0	0	-85	24.39	
			QPSK	6	0	15	-85	24.04	
			16QAM	1	0	0	-85	23.87	
			16QAM	1	5	0	-85	23.75	
			16QAM	1	0	7	-85	23.77	
			16QAM	1	5	7	-85	23.71	
			16QAM	1	0	15	-85	23.78	
			16QAM	1	5	15	-85	23.8	
			16QAM	3	0	0	-85	23.62	
			16QAM	3	3	15	-85	23.65	
			16QAM	5	0	0	-85	23.66	
			16QAM	5	0	15	-85	23.57	

**EIRP Power (dBm)**

LTE Band 2							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	18607	1850.7	-10.36	36.57	26.21	417.83	H
	18900	1880.0	-11.30	37.22	25.92	390.84	
	19193	1909.3	-11.32	37.18	25.86	385.48	
	18607	1850.7	-17.78	37.65	19.87	97.05	V
	18900	1880.0	-18.21	37.58	19.37	86.50	
	19193	1909.3	-18.41	37.48	19.07	80.72	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	18607	1850.7	-11.70	36.57	24.87	306.90	H
	18900	1880.0	-12.65	37.22	24.57	286.42	
	19193	1909.3	-12.71	37.18	24.47	279.90	
	18607	1850.7	-19.12	37.65	18.53	71.29	V
	18900	1880.0	-19.59	37.58	17.99	62.95	
	19193	1909.3	-19.80	37.48	17.68	58.61	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	18615	1851.5	-10.27	36.57	26.30	426.58	H
	18900	1880.0	-11.21	37.22	26.01	399.02	
	19185	1908.5	-11.23	37.18	25.95	393.55	
	18615	1851.5	-17.76	37.65	19.89	97.50	V
	18900	1880.0	-18.14	37.58	19.44	87.90	
	19185	1908.5	-18.40	37.48	19.08	80.91	
Channel Bandwidth: 3 MHz / 16QAM							
X	18615	1851.5	-11.65	36.57	24.92	310.46	H
	18900	1880.0	-12.46	37.22	24.76	299.23	
	19185	1908.5	-12.52	37.18	24.66	292.42	
	18615	1851.5	-18.99	37.65	18.66	73.45	V
	18900	1880.0	-19.50	37.58	18.08	64.27	
	19185	1908.5	-19.71	37.48	17.77	59.84	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	18625	1852.5	-10.24	36.57	26.33	429.54	H
	18900	1880.0	-11.15	37.22	26.07	404.58	
	19175	1907.5	-11.19	37.18	25.99	397.19	
	18625	1852.5	-17.70	37.65	19.95	98.86	V
	18900	1880.0	-18.10	37.58	19.48	88.72	
	19175	1907.5	-18.31	37.48	19.17	82.60	
Channel Bandwidth: 5 MHz / 16QAM							
X	18625	1852.5	-11.52	36.57	25.05	319.89	H
	18900	1880.0	-12.46	37.22	24.76	299.23	
	19175	1907.5	-12.42	37.18	24.76	299.23	
	18625	1852.5	-18.88	37.65	18.77	75.34	V
	18900	1880.0	-19.42	37.58	18.16	65.46	
	19175	1907.5	-19.63	37.48	17.85	60.95	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	18650	1855.0	-10.14	36.57	26.43	439.54	H
	18900	1880.0	-11.08	37.22	26.14	411.15	
	19150	1905.0	-11.05	37.18	26.13	410.20	
	18650	1855.0	-17.58	37.65	20.07	101.62	V
	18900	1880.0	-17.95	37.58	19.63	91.83	
	19150	1905.0	-18.16	37.48	19.32	85.51	
Channel Bandwidth: 10 MHz / 16QAM							
X	18650	1855.0	-11.38	36.57	25.19	330.37	H
	18900	1880.0	-12.31	37.22	24.91	309.74	
	19150	1905.0	-12.34	37.18	24.84	304.79	
	18650	1855.0	-18.78	37.65	18.87	77.09	V
	18900	1880.0	-19.24	37.58	18.34	68.23	
	19150	1905.0	-19.48	37.48	18.00	63.10	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	18675	1857.5	-10.12	36.57	26.45	441.57	H
	18900	1880.0	-11.05	37.22	26.17	414.00	
	19125	1902.5	-11.02	37.18	26.16	413.05	
	18675	1857.5	-17.54	37.65	20.11	102.57	V
	18900	1880.0	-17.94	37.58	19.64	92.04	
	19125	1902.5	-18.14	37.48	19.34	85.90	
Channel Bandwidth: 15 MHz / 16QAM							
X	18675	1857.5	-11.25	36.57	25.32	340.41	H
	18900	1880.0	-12.16	37.22	25.06	320.63	
	19125	1902.5	-12.16	37.18	25.02	317.69	
	18675	1857.5	-18.73	37.65	18.92	77.98	V
	18900	1880.0	-19.09	37.58	18.49	70.63	
	19125	1902.5	-19.35	37.48	18.13	65.01	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	18700	1860.0	-9.99	36.57	26.58	454.99	H
	18900	1880.0	-10.91	37.22	26.31	427.56	
	19100	1900.0	-10.92	37.18	26.26	422.67	
	18700	1860.0	-17.41	37.65	20.24	105.68	V
	18900	1880.0	-17.82	37.58	19.76	94.62	
	19100	1900.0	-18.05	37.48	19.43	87.70	
Channel Bandwidth: 20 MHz / 16QAM							
X	18700	1860.0	-11.06	36.57	25.51	355.63	H
	18900	1880.0	-11.97	37.22	25.25	334.97	
	19100	1900.0	-12.00	37.18	25.18	329.61	
	18700	1860.0	-18.45	37.65	19.20	83.18	V
	18900	1880.0	-18.83	37.58	18.75	74.99	
	19100	1900.0	-19.07	37.48	18.41	69.34	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

## 4.2 Modulation Characteristics Measurement

### 4.2.1 Limits of Modulation Characteristics

N/A


### 4.2.2 Test Setup



### 4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

### 4.2.4 Test Results

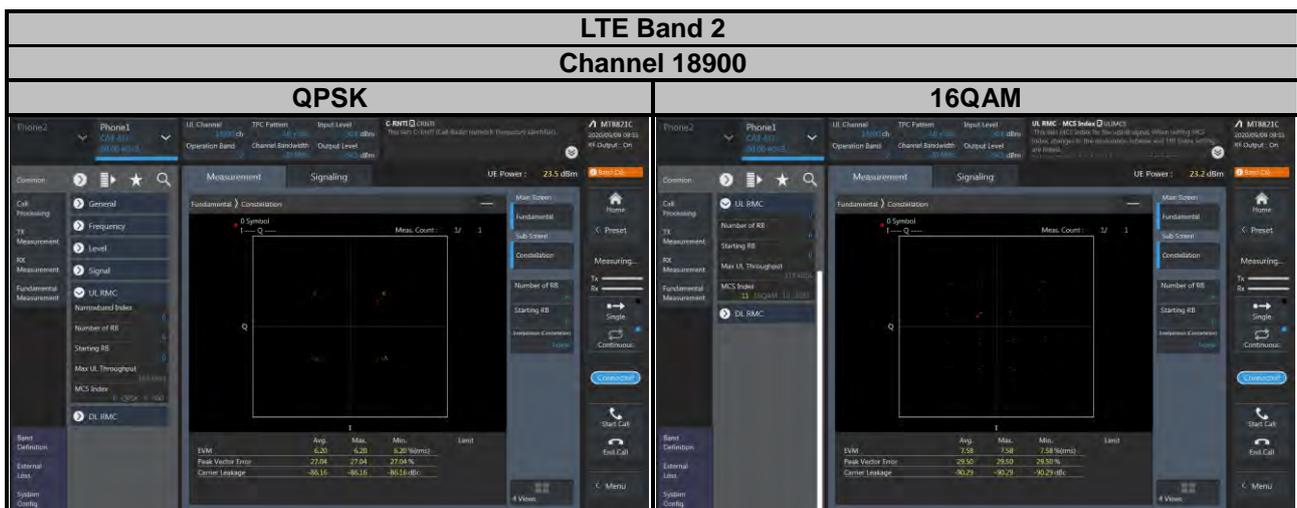

### 4.3 Frequency Stability Measurement

#### 4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

#### 4.3.3 Test Setup

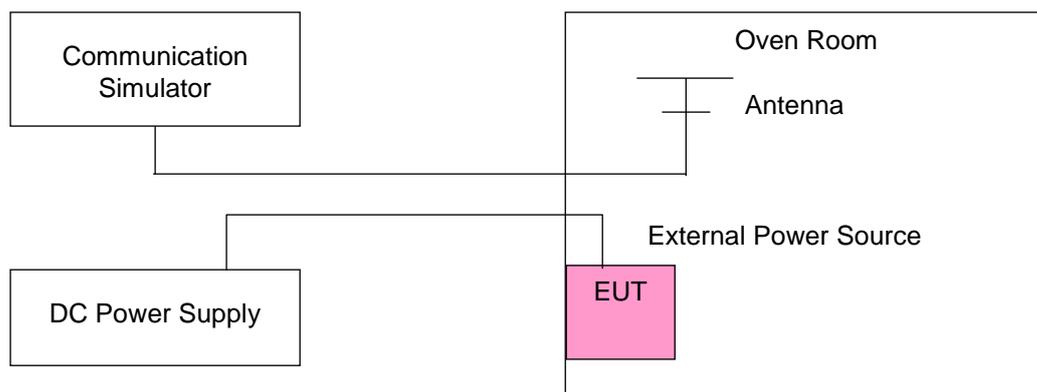

#### 4.3.4 Test Results

##### Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1850.700001	0.001	1909.300000	0.001
4.25	1850.700003	0.002	1909.300002	0.001
5.75	1850.700002	0.001	1909.300004	0.002

**Note:** The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

##### Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700004	0.002	1909.300004	0.002
-20	1850.700004	0.002	1909.300002	0.001
-10	1850.700003	0.001	1909.300001	0.001
0	1850.700003	0.002	1909.300001	0.001
10	1850.700002	0.001	1909.300004	0.002
20	1850.699997	-0.001	1909.299999	-0.001
30	1850.699998	-0.001	1909.299997	-0.002
40	1850.699997	-0.002	1909.299998	-0.001
50	1850.699999	-0.001	1909.299999	-0.001

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1851.500003	0.002	1908.500002	0.001
4.25	1851.500002	0.001	1908.500002	0.001
5.75	1851.500004	0.002	1908.500002	0.001

**Note:** The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1851.500003	0.001	1908.500004	0.002
-20	1851.500004	0.002	1908.500003	0.002
-10	1851.500001	0.001	1908.500002	0.001
0	1851.500003	0.001	1908.500002	0.001
10	1851.500002	0.001	1908.500002	0.001
20	1851.499997	-0.001	1908.499998	-0.001
30	1851.499996	-0.002	1908.499998	-0.001
40	1851.499996	-0.002	1908.499996	-0.002
50	1851.499999	-0.001	1908.499998	-0.001

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1852.500001	0.001	1907.500003	0.002
4.25	1852.500002	0.001	1907.500001	0.001
5.75	1852.500003	0.001	1907.500002	0.001

**Note:** The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.500002	0.001	1907.500002	0.001
-20	1852.500001	0.001	1907.500002	0.001
-10	1852.500002	0.001	1907.500001	0.001
0	1852.500003	0.002	1907.500003	0.002
10	1852.500002	0.001	1907.500001	0.001
20	1852.499999	-0.001	1907.499998	-0.001
30	1852.499999	-0.001	1907.499996	-0.002
40	1852.499999	-0.001	1907.499997	-0.002
50	1852.499998	-0.001	1907.499997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1855.000004	0.002	1905.000001	0.001
4.25	1855.000003	0.002	1905.000003	0.002
5.75	1855.000004	0.002	1905.000003	0.002

**Note:** The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1855.000003	0.001	1905.000002	0.001
-20	1855.000003	0.001	1905.000004	0.002
-10	1855.000002	0.001	1905.000004	0.002
0	1855.000002	0.001	1905.000003	0.002
10	1855.000001	0.001	1905.000001	0.001
20	1854.999998	-0.001	1904.999997	-0.002
30	1854.999997	-0.002	1904.999996	-0.002
40	1854.999998	-0.001	1904.999998	-0.001
50	1854.999998	-0.001	1904.999998	-0.001

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1857.500002	0.001	1902.500001	0.001
4.25	1857.500003	0.002	1902.500003	0.001
5.75	1857.500003	0.002	1902.500003	0.001

**Note:** The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1857.500002	0.001	1902.500001	0.001
-20	1857.500002	0.001	1902.500002	0.001
-10	1857.500002	0.001	1902.500004	0.002
0	1857.500002	0.001	1902.500002	0.001
10	1857.500001	0.001	1902.500002	0.001
20	1857.499996	-0.002	1902.499999	-0.001
30	1857.499997	-0.002	1902.499997	-0.001
40	1857.499998	-0.001	1902.499996	-0.002
50	1857.499997	-0.002	1902.499997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
5.00	1860.000003	0.001	1900.000002	0.001
4.25	1860.000004	0.002	1900.000003	0.002
5.75	1860.000001	0.001	1900.000003	0.002

**Note:** The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1860.000003	0.002	1900.000003	0.002
-20	1860.000001	0.001	1900.000002	0.001
-10	1860.000004	0.002	1900.000003	0.002
0	1860.000002	0.001	1900.000003	0.002
10	1860.000002	0.001	1900.000004	0.002
20	1859.999999	-0.001	1899.999999	-0.001
30	1859.999997	-0.002	1899.999998	-0.001
40	1859.999998	-0.001	1899.999998	-0.001
50	1859.999996	-0.002	1899.999997	-0.002

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

### 4.4.2 Test Setup

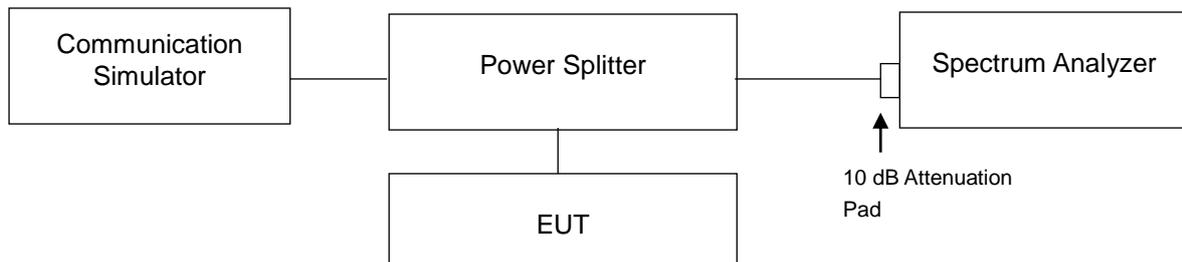


### 4.4.3 Test Result


LTE Band 2					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18607	1850.7	<b>1.0830</b>	1.0770	1.258	1.270
18900	1880.0	1.0784	1.0695	1.264	1.284
19193	1909.3	1.0779	1.0820	1.251	<b>1.295</b>
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18615	1851.5	1.0736	1.0700	1.242	1.251
18900	1880.0	<b>1.0758</b>	1.0717	1.243	1.260
19185	1908.5	1.0738	1.0714	<b>1.275</b>	1.272

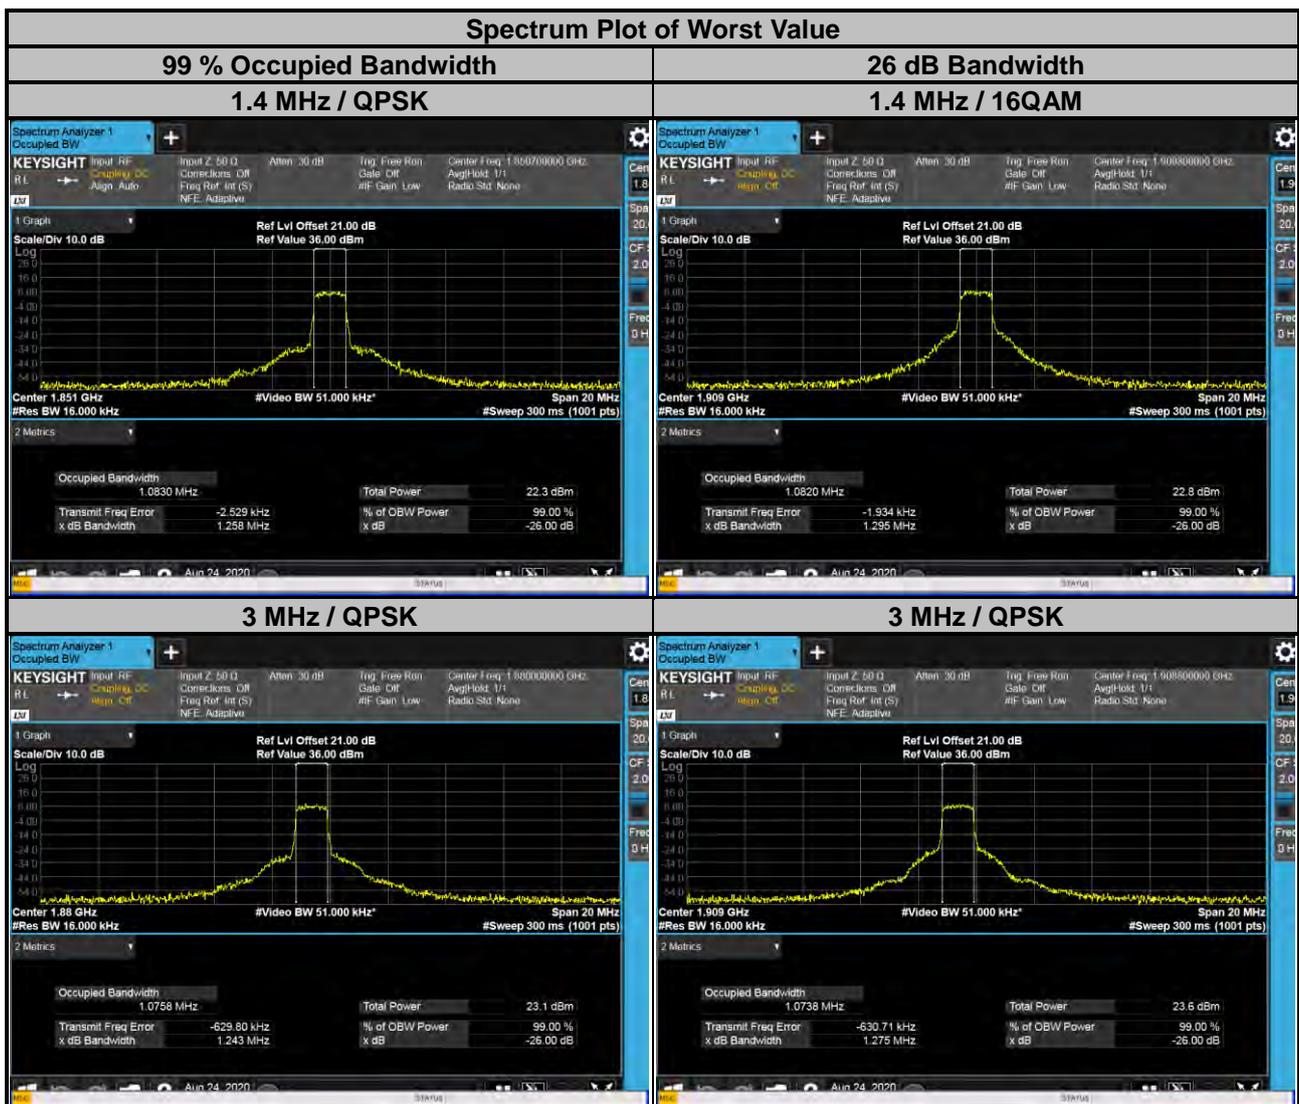

LTE Band 2					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18625	1852.5	1.0804	1.0828	1.236	1.273
18900	1880.0	1.0812	1.0760	1.269	1.271
19175	1907.5	<b>1.0859</b>	1.0835	1.281	<b>1.312</b>
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18650	1855.0	<b>1.0834</b>	1.0798	1.284	1.255
18900	1880.0	1.0827	1.0800	1.283	1.275
19150	1905.0	1.0820	1.0800	<b>1.374</b>	1.279

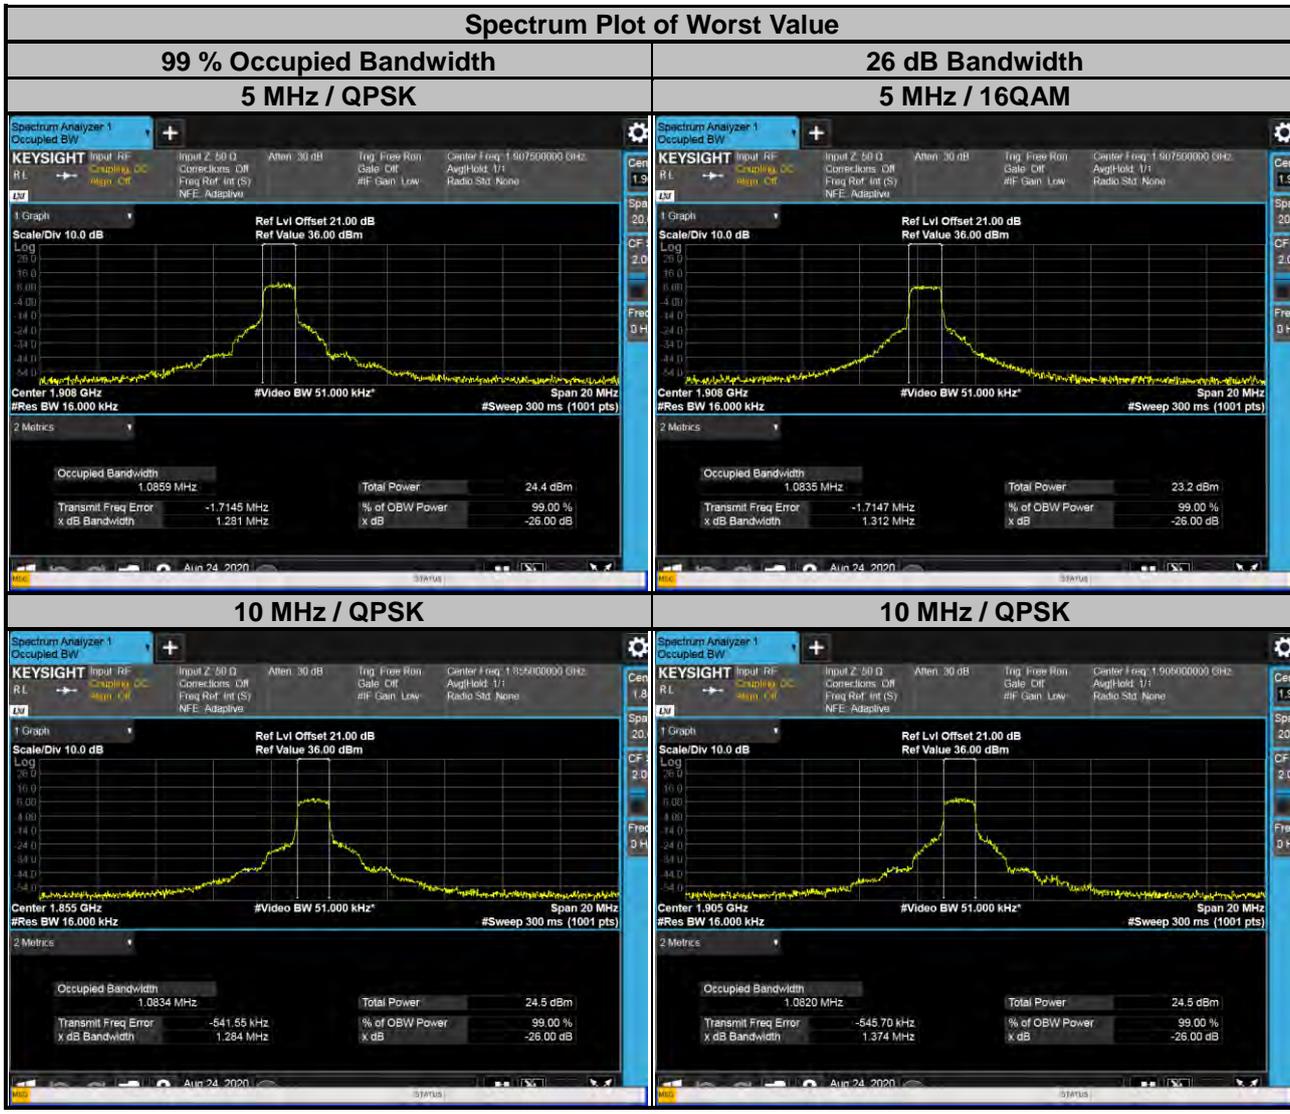

LTE Band 2					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18675	1857.5	1.0920	1.0903	1.386	1.451
18900	1880.0	1.0901	1.0952	1.514	1.726
19125	1902.5	<b>1.1074</b>	1.1066	1.720	<b>1.868</b>
Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18700	1860.0	1.0817	1.0923	1.530	1.434
18900	1880.0	1.0846	1.0934	1.752	1.571
19100	1900.0	1.0921	<b>1.1002</b>	1.695	<b>1.960</b>

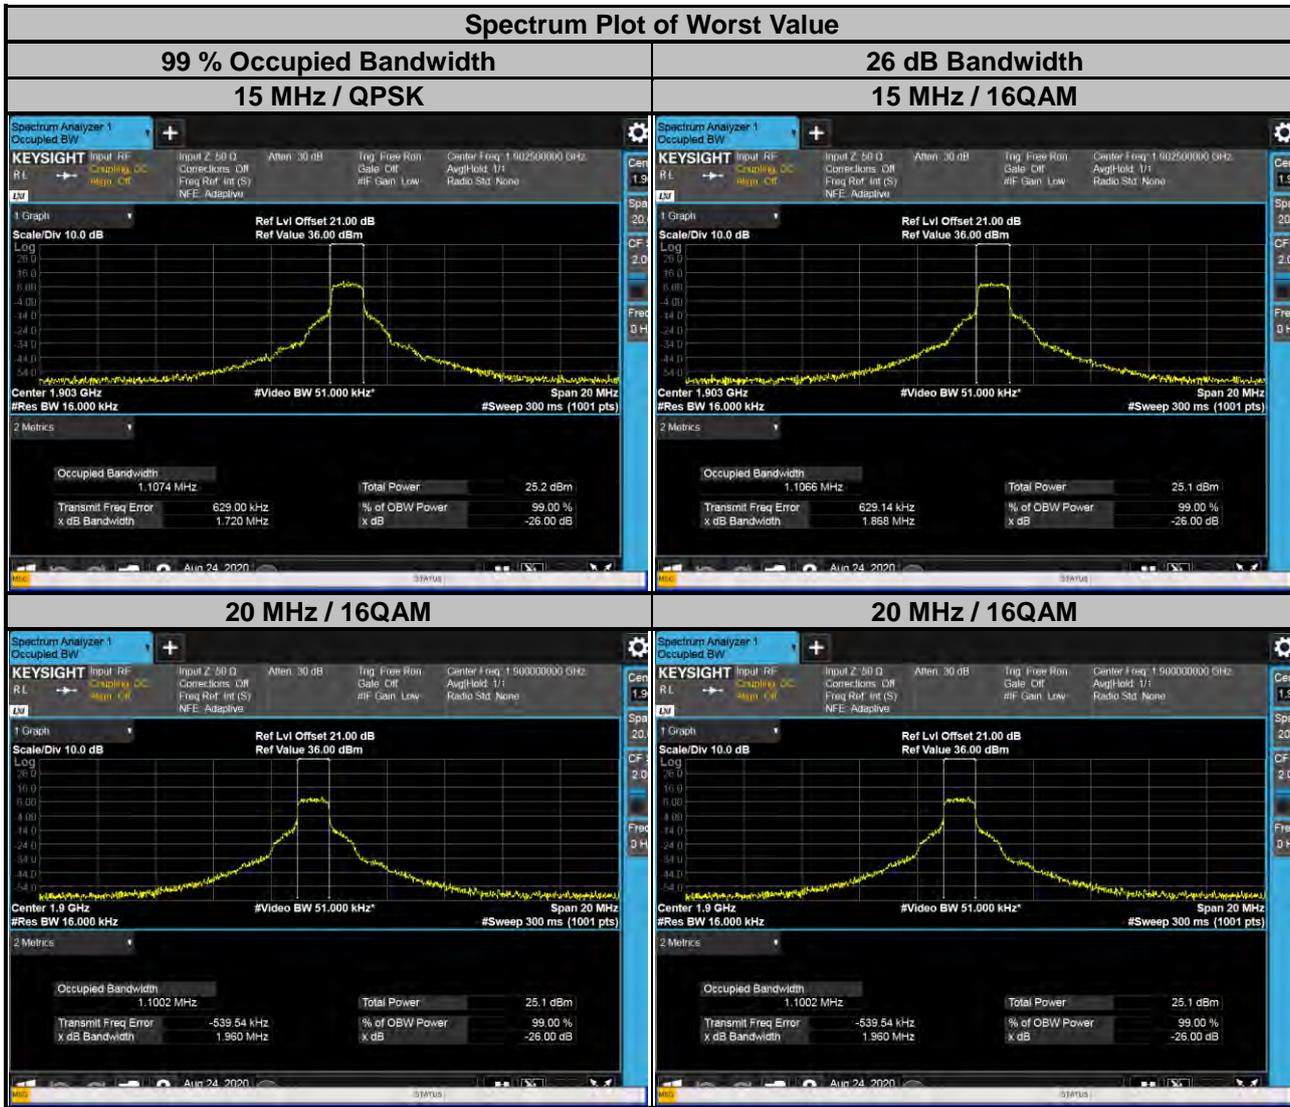


## 4.5 Band Edge Measurement

### 4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


### 4.5.2 Test Setup

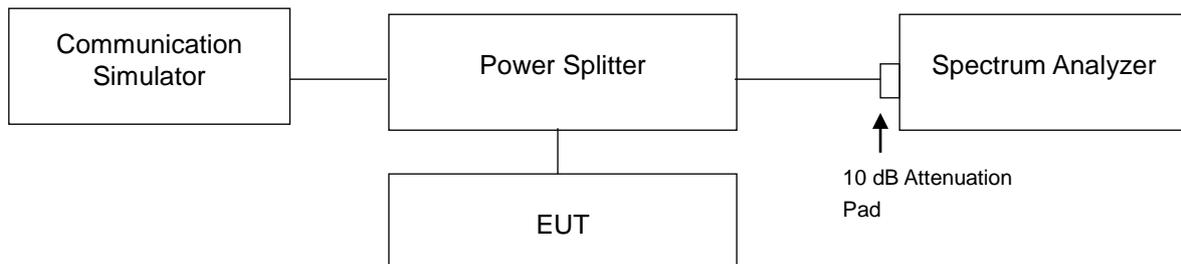

### 4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 16 kHz and VB of the spectrum is 51 kHz
- Record the max trace plot into the test report.

### 4.5.4 Test Results

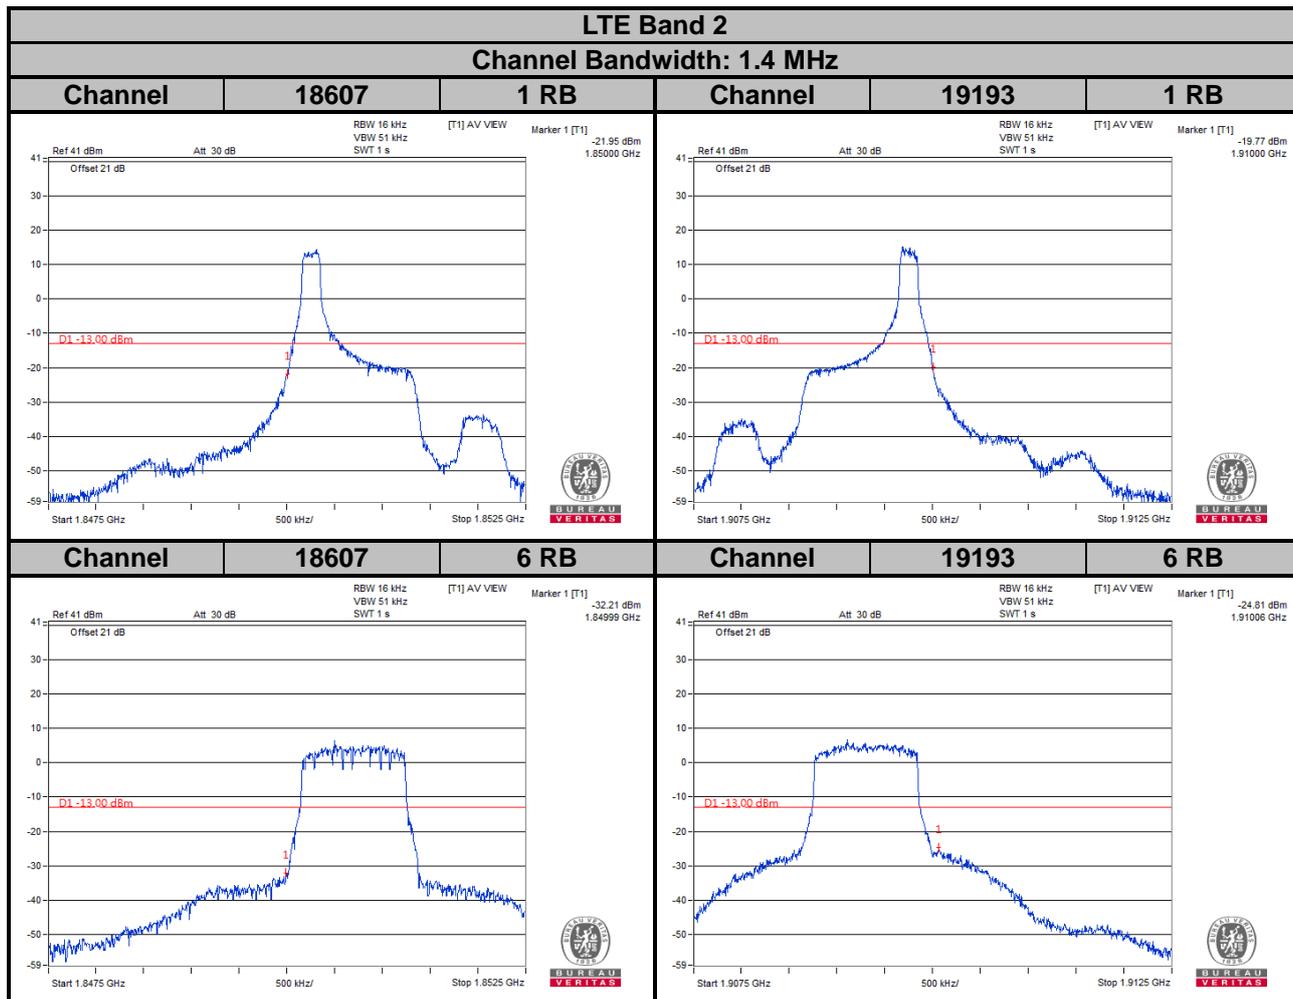



LTE Band 2

Channel Bandwidth: 3 MHz

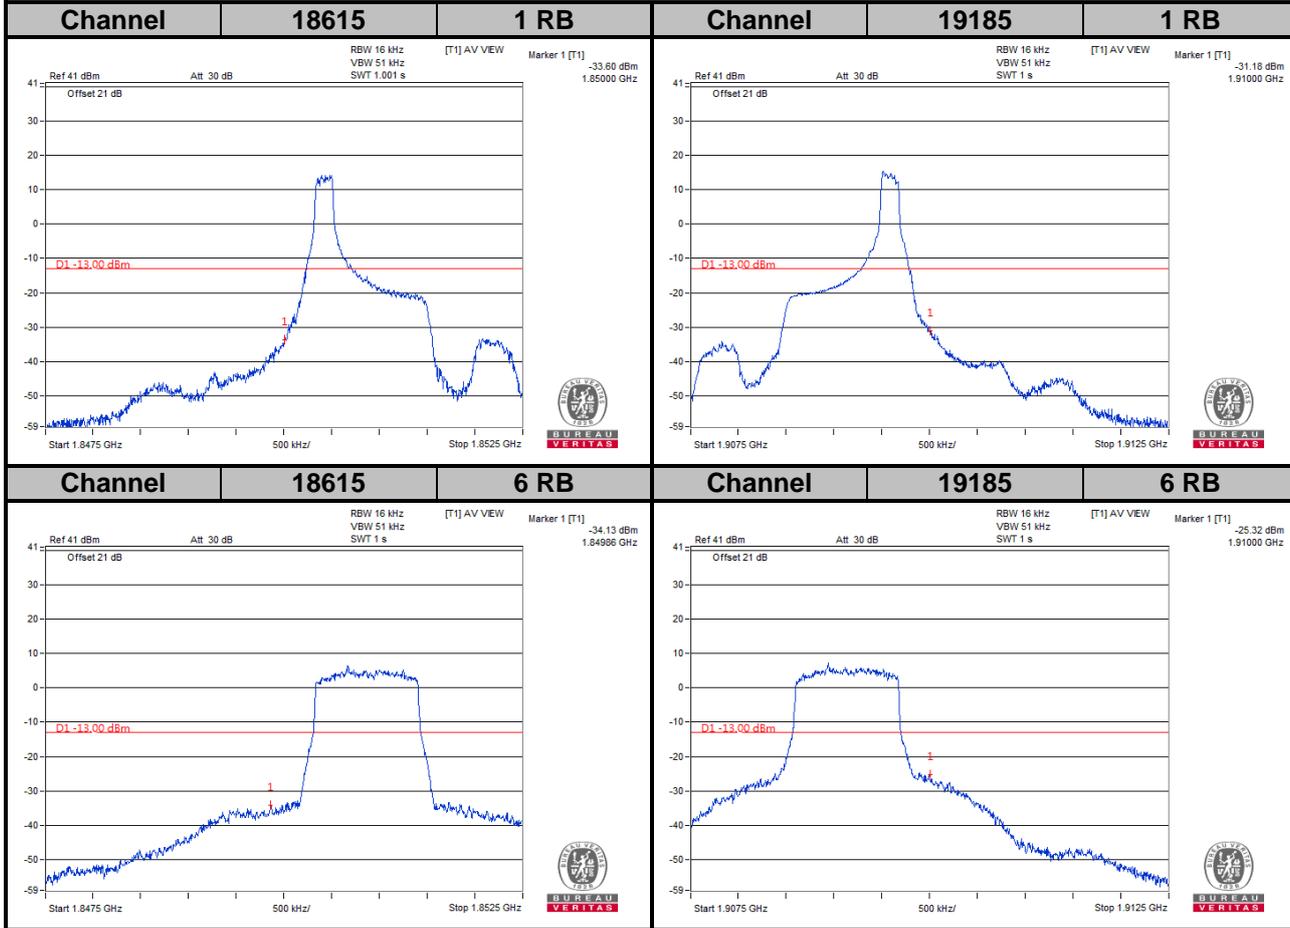



LTE Band 2

Channel Bandwidth: 5 MHz

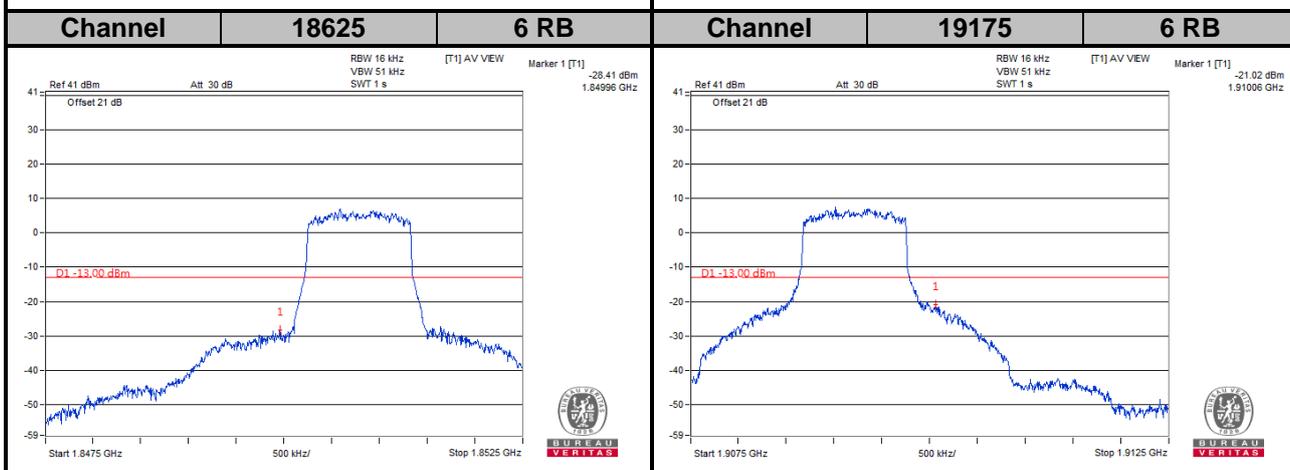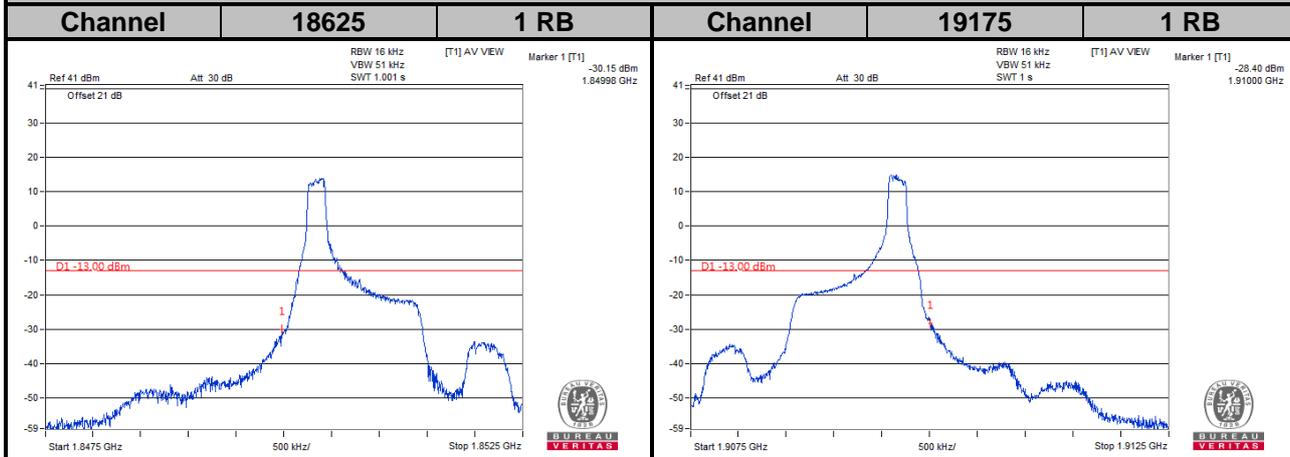


LTE Band 2

Channel Bandwidth: 10 MHz

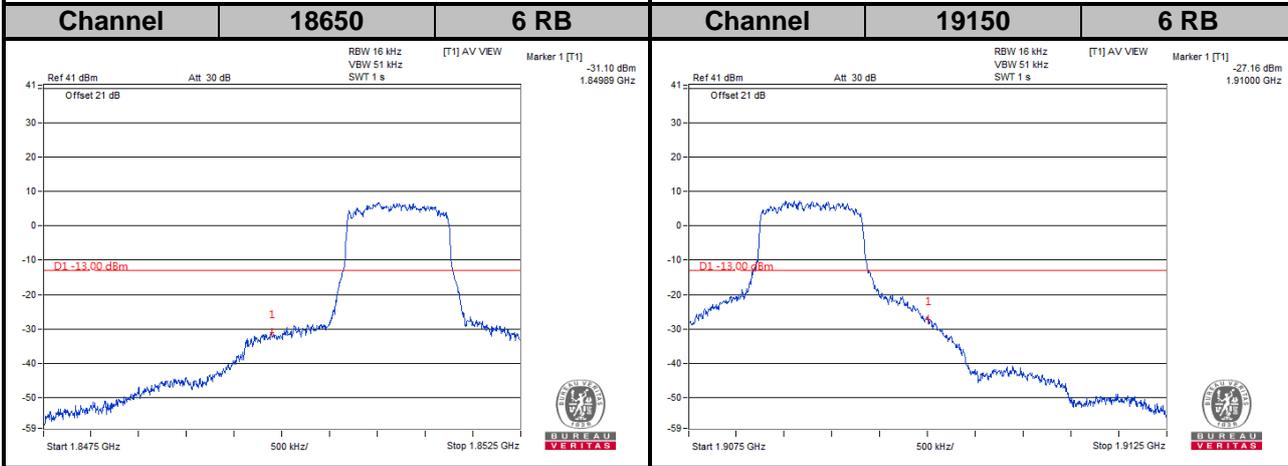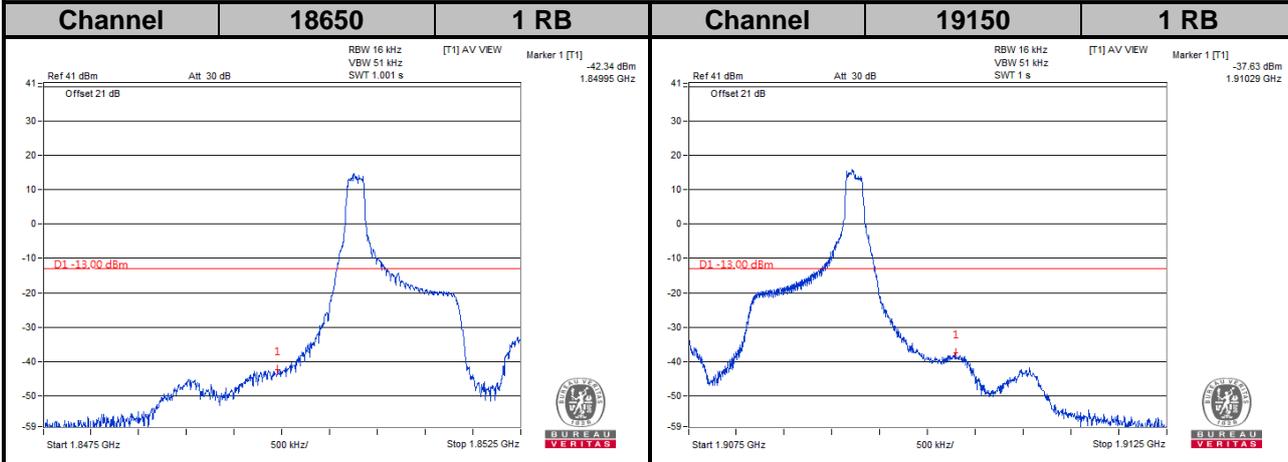


**LTE Band 2**  
**Channel Bandwidth: 15 MHz**

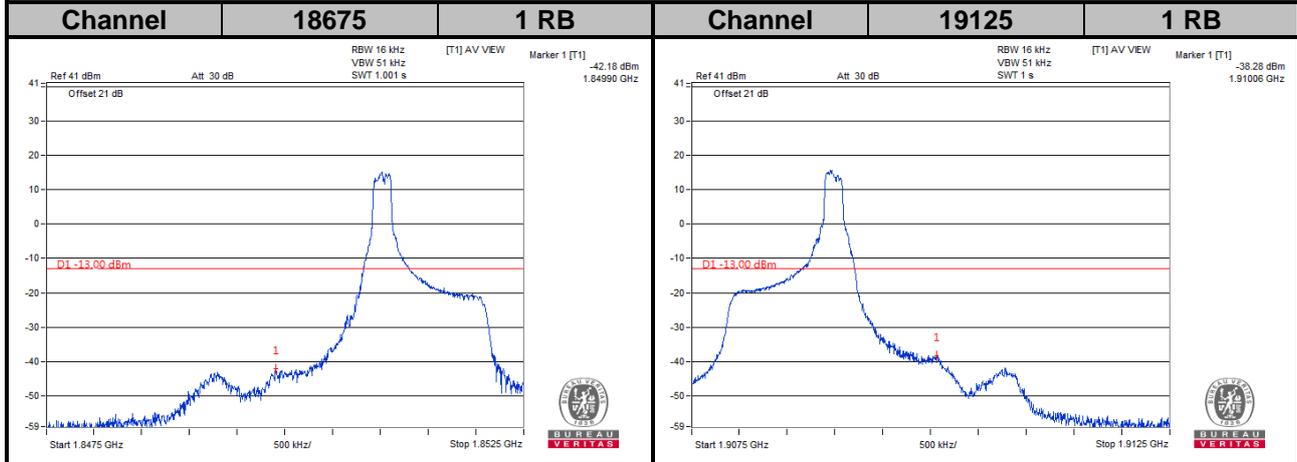

LTE Band 2

Channel Bandwidth: 20 MHz

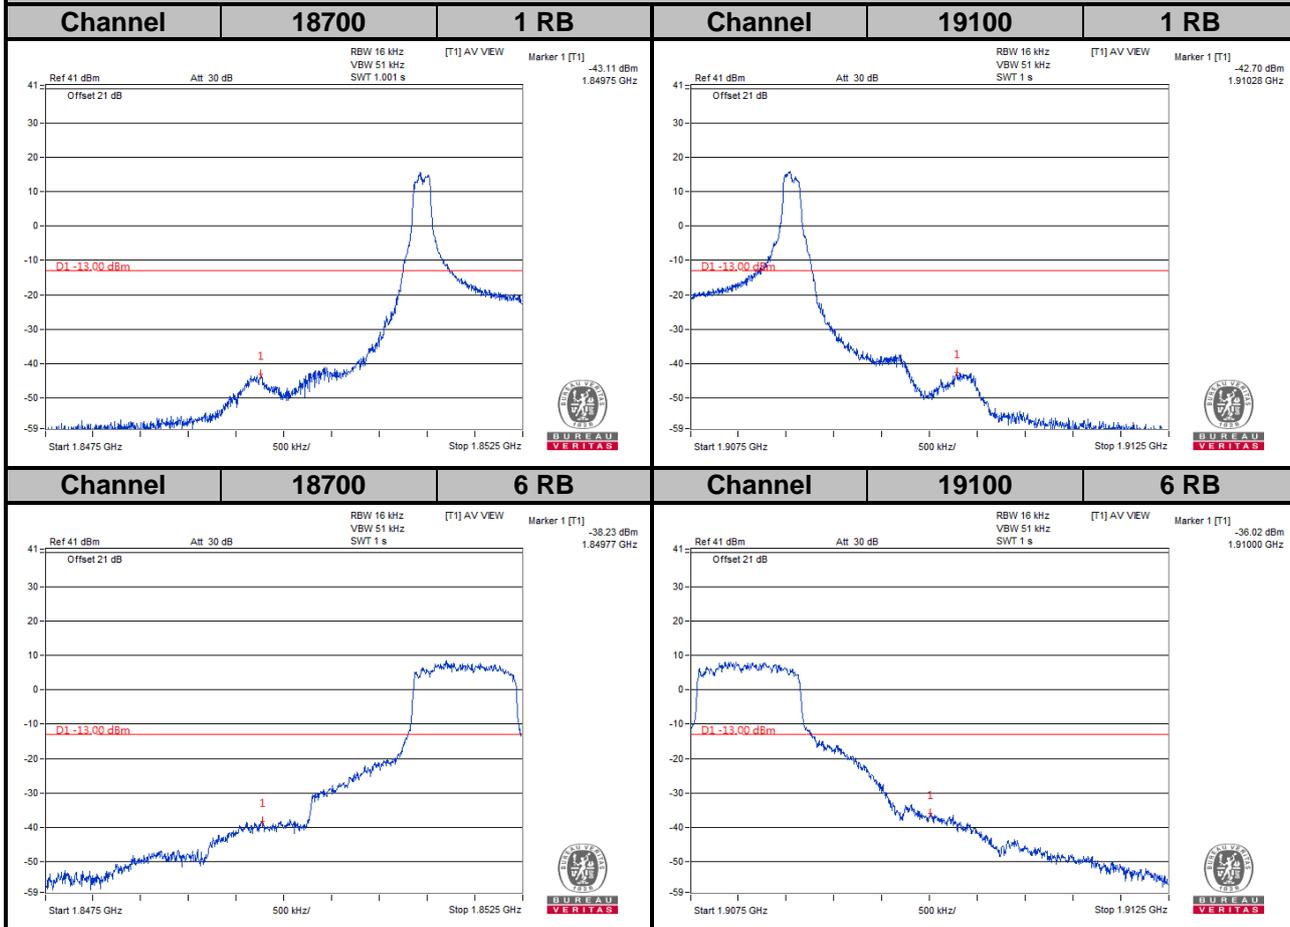


## 4.6 Peak to Average Ratio

### 4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 4.6.2 Test Setup

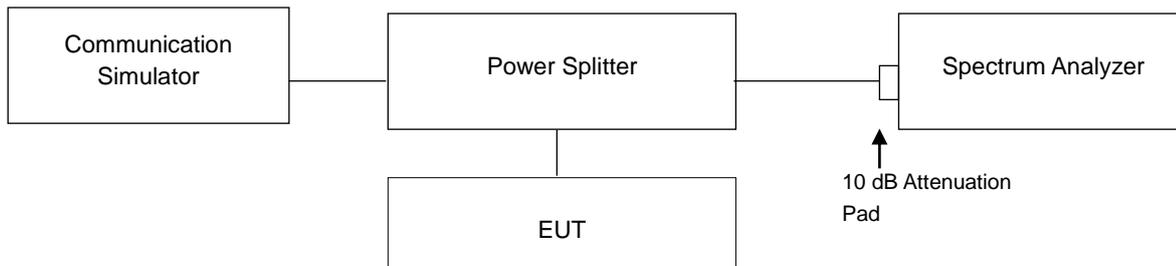

### 4.6.3 Test Procedures


1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

#### 4.6.4 Test Results

LTE Band 2							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	5.47	<b>6.52</b>	18615	1851.5	5.72	6.32
18900	1880.0	4.20	5.57	18900	1880.0	<b>8.05</b>	5.91
19193	1909.3	3.61	4.80	19185	1908.5	4.69	5.82



LTE Band 2							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	<b>5.93</b>	3.92	18650	1855.0	3.33	3.35
18900	1880.0	5.58	3.14	18900	1880.0	<b>3.44</b>	3.04
19175	1907.5	4.94	2.45	19150	1905.0	2.41	2.41

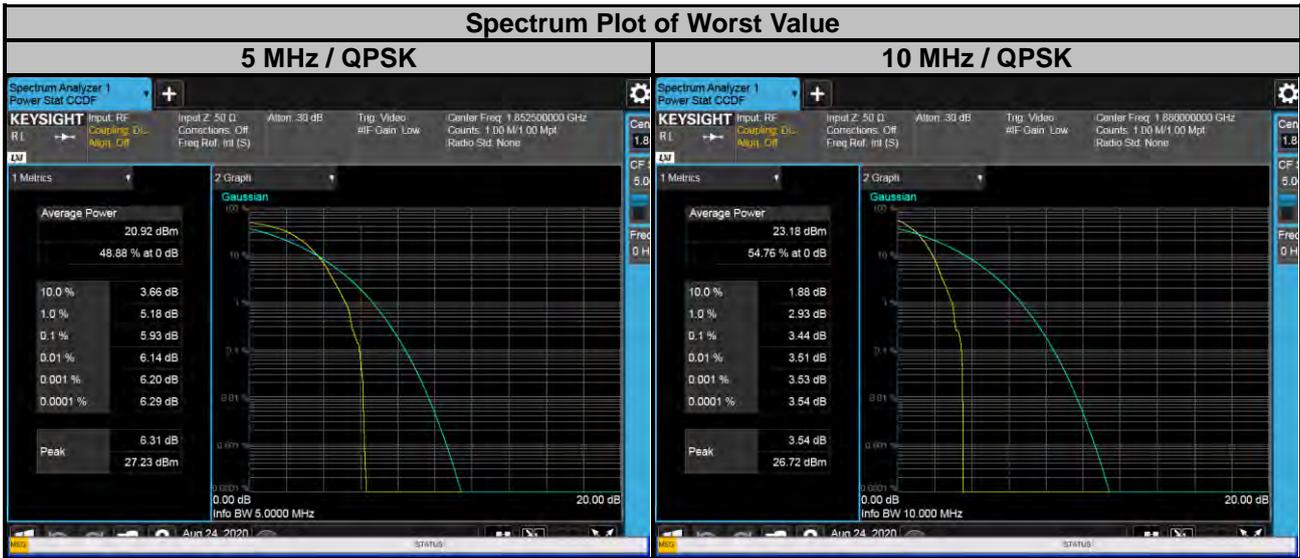

LTE Band 2							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	3.28	<b>3.66</b>	18700	1860.0	3.24	<b>3.51</b>
18900	1880.0	2.99	3.09	18900	1880.0	3.04	3.01
19125	1902.5	2.43	2.48	19100	1900.0	2.50	2.38




## 4.7 Conducted Spurious Emissions

### 4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13 dBm.


### 4.7.2 Test Setup

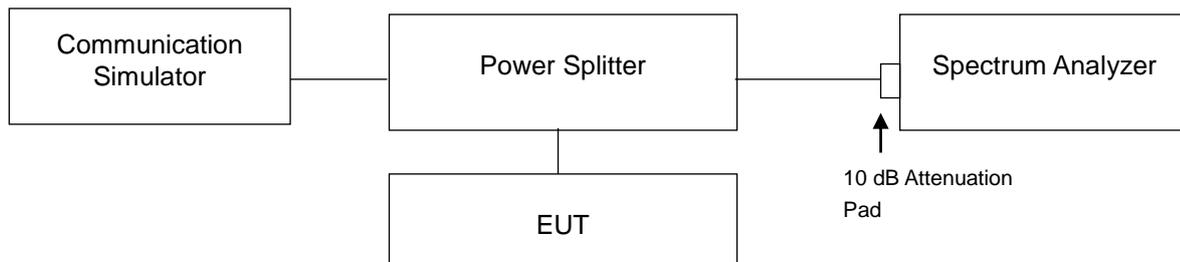


### 4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 26.5 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.


### 4.7.4 Test Results

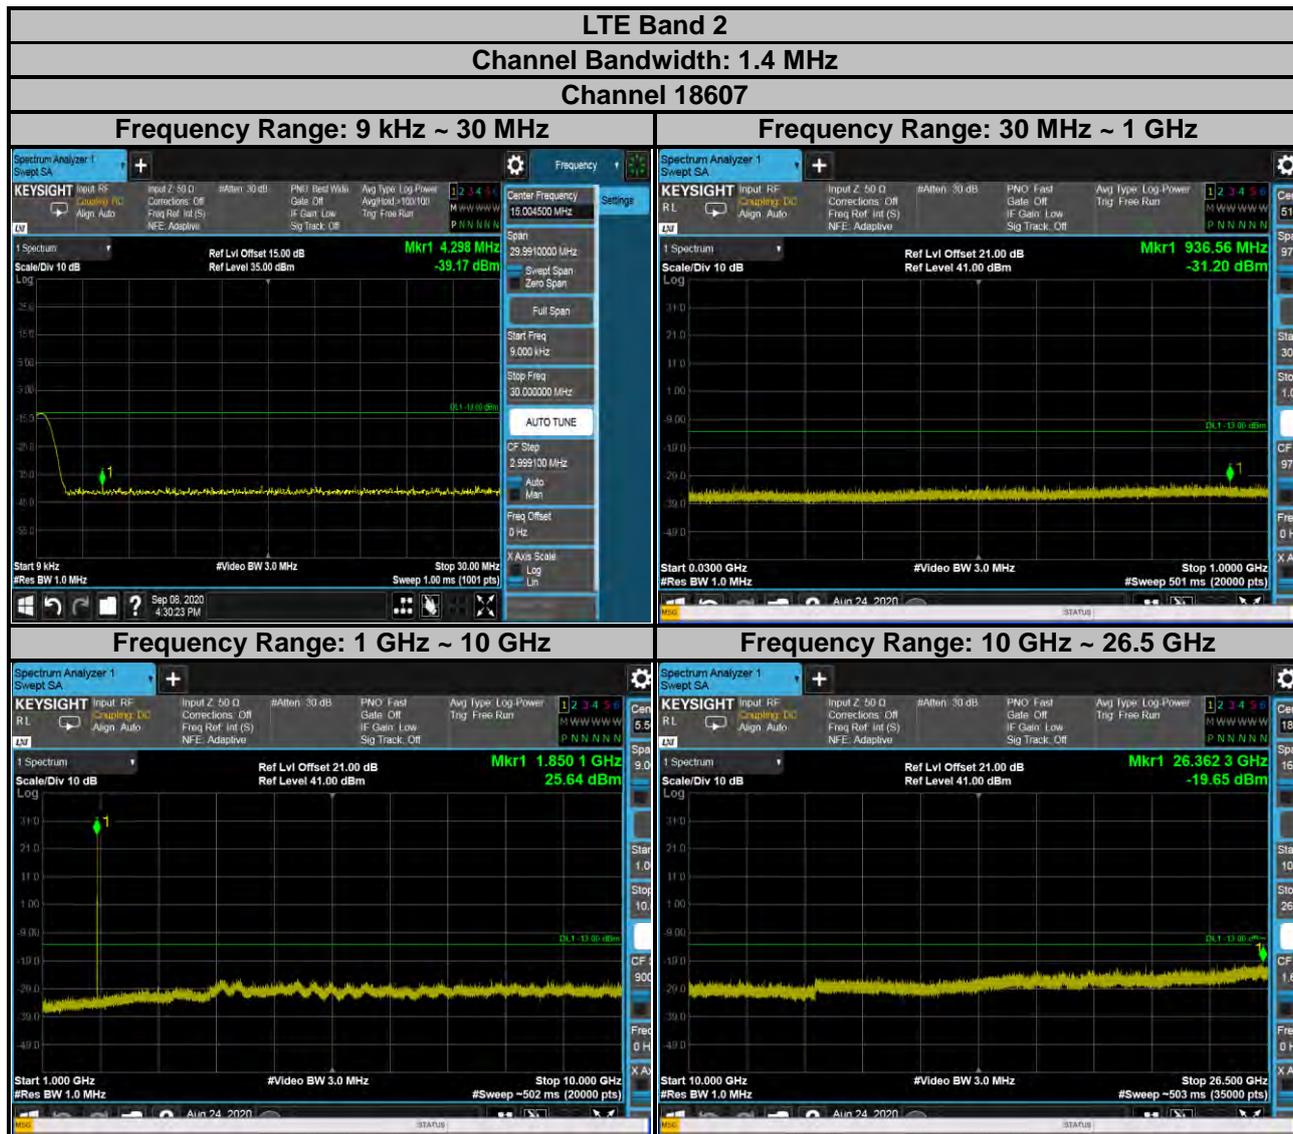


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

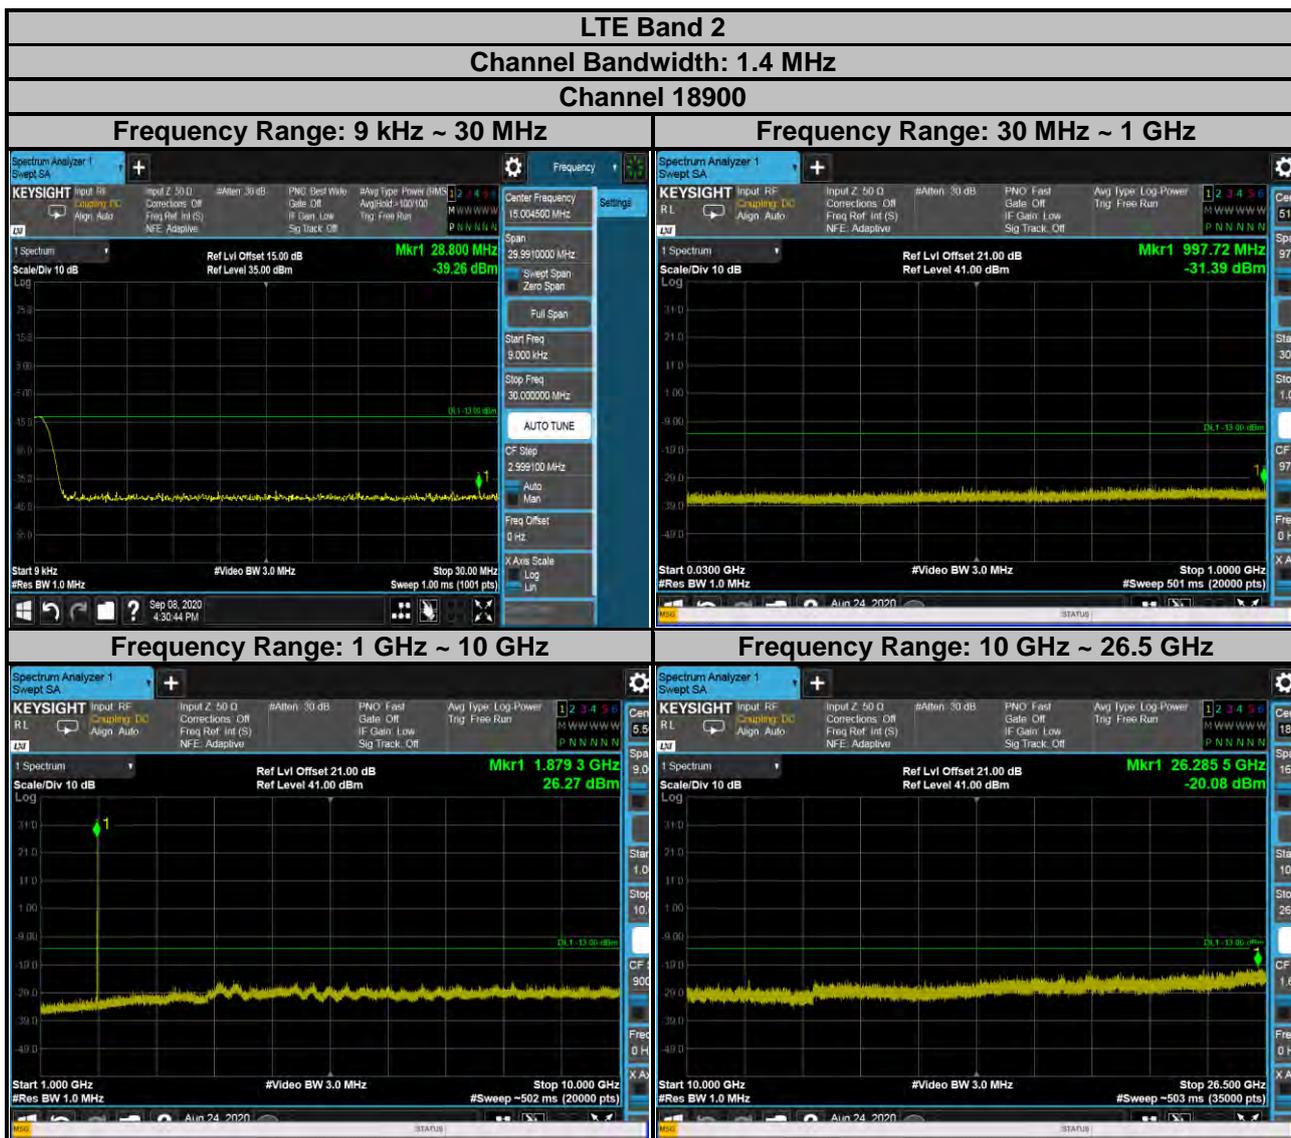


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

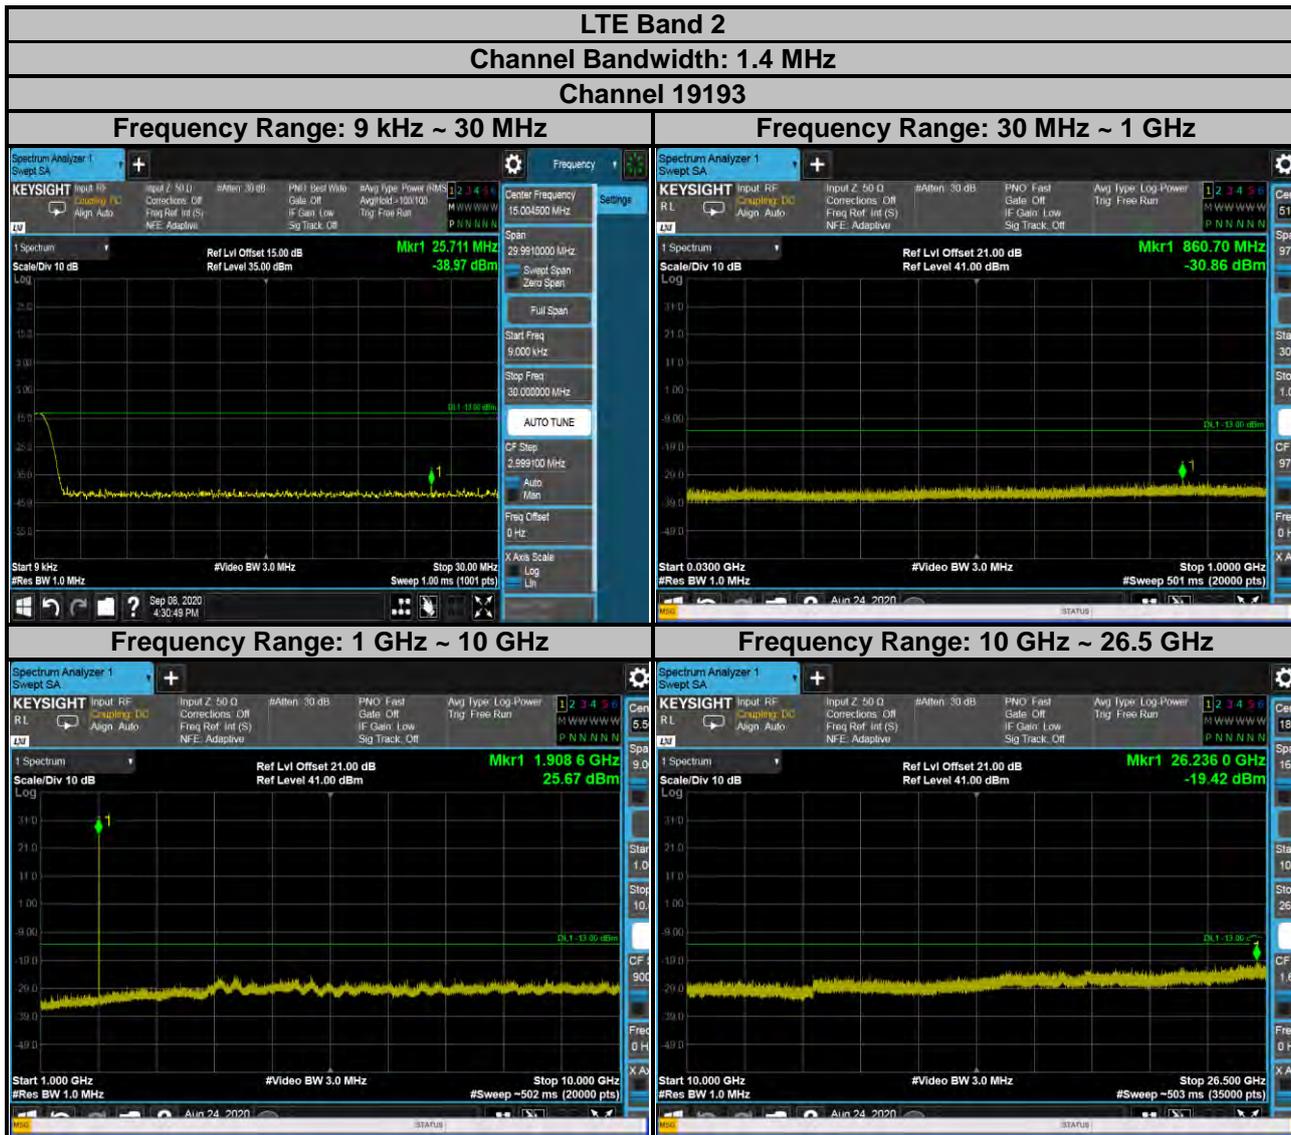


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

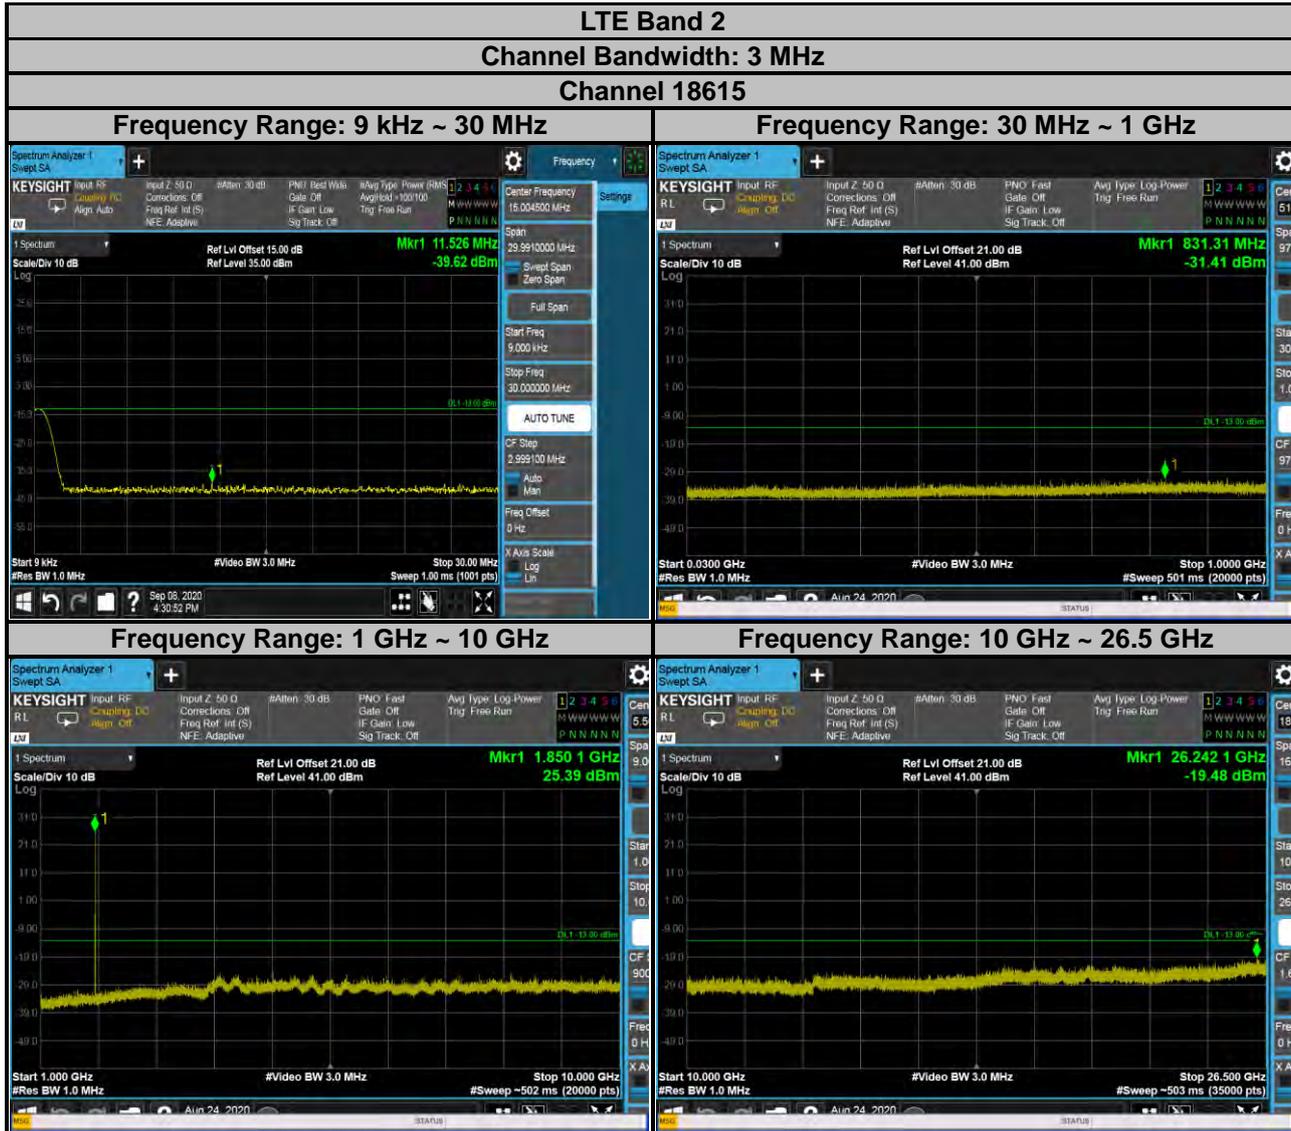


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

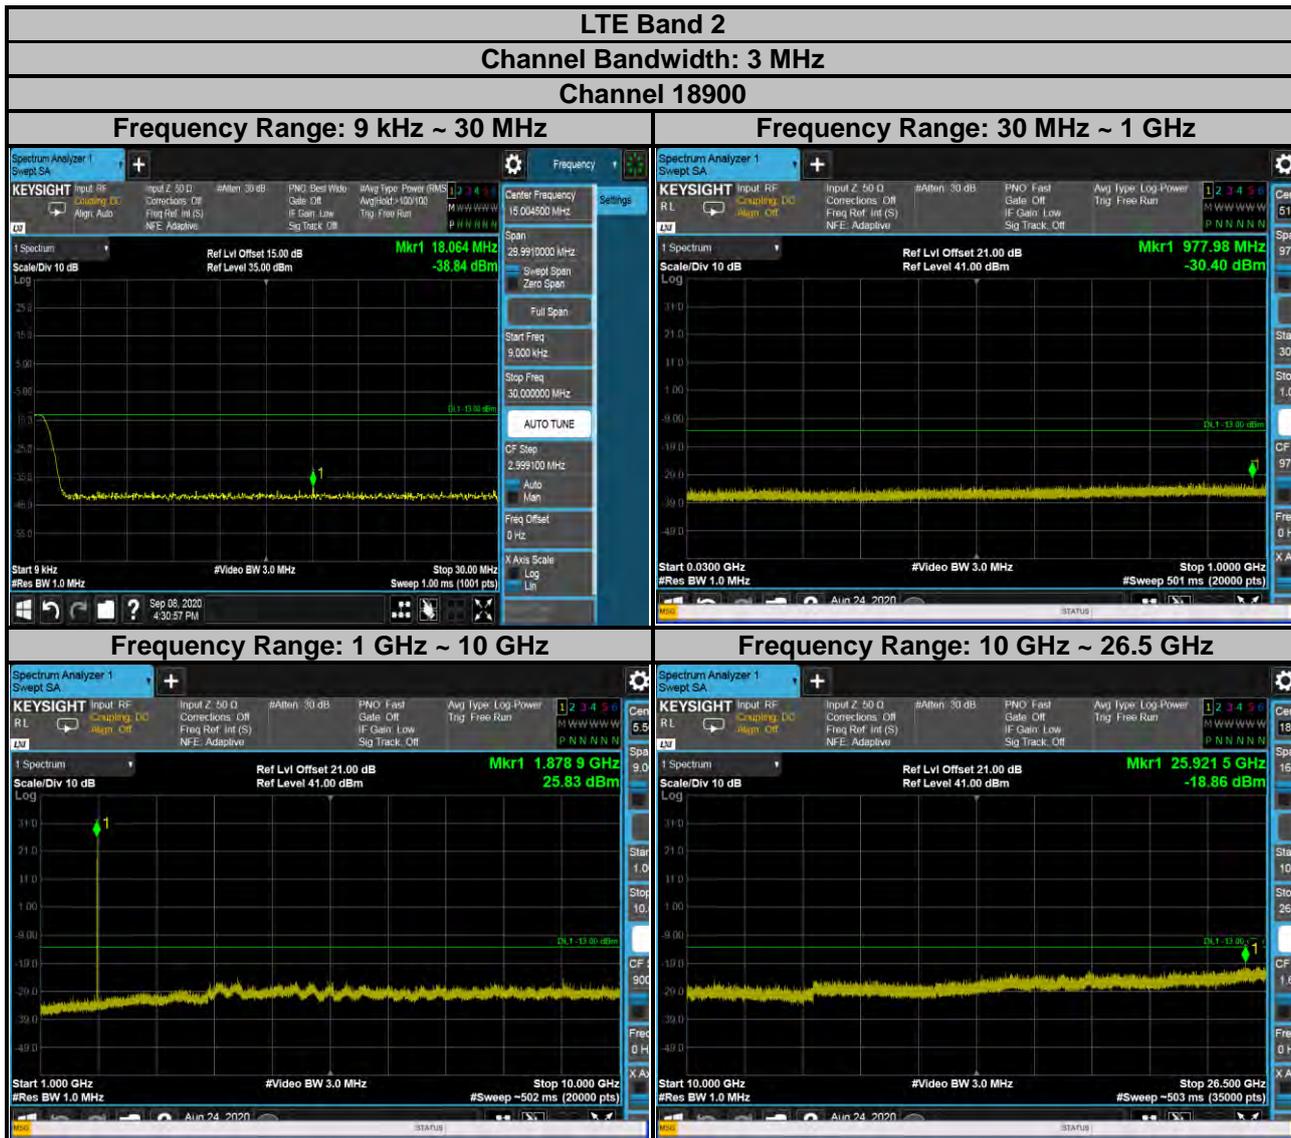


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

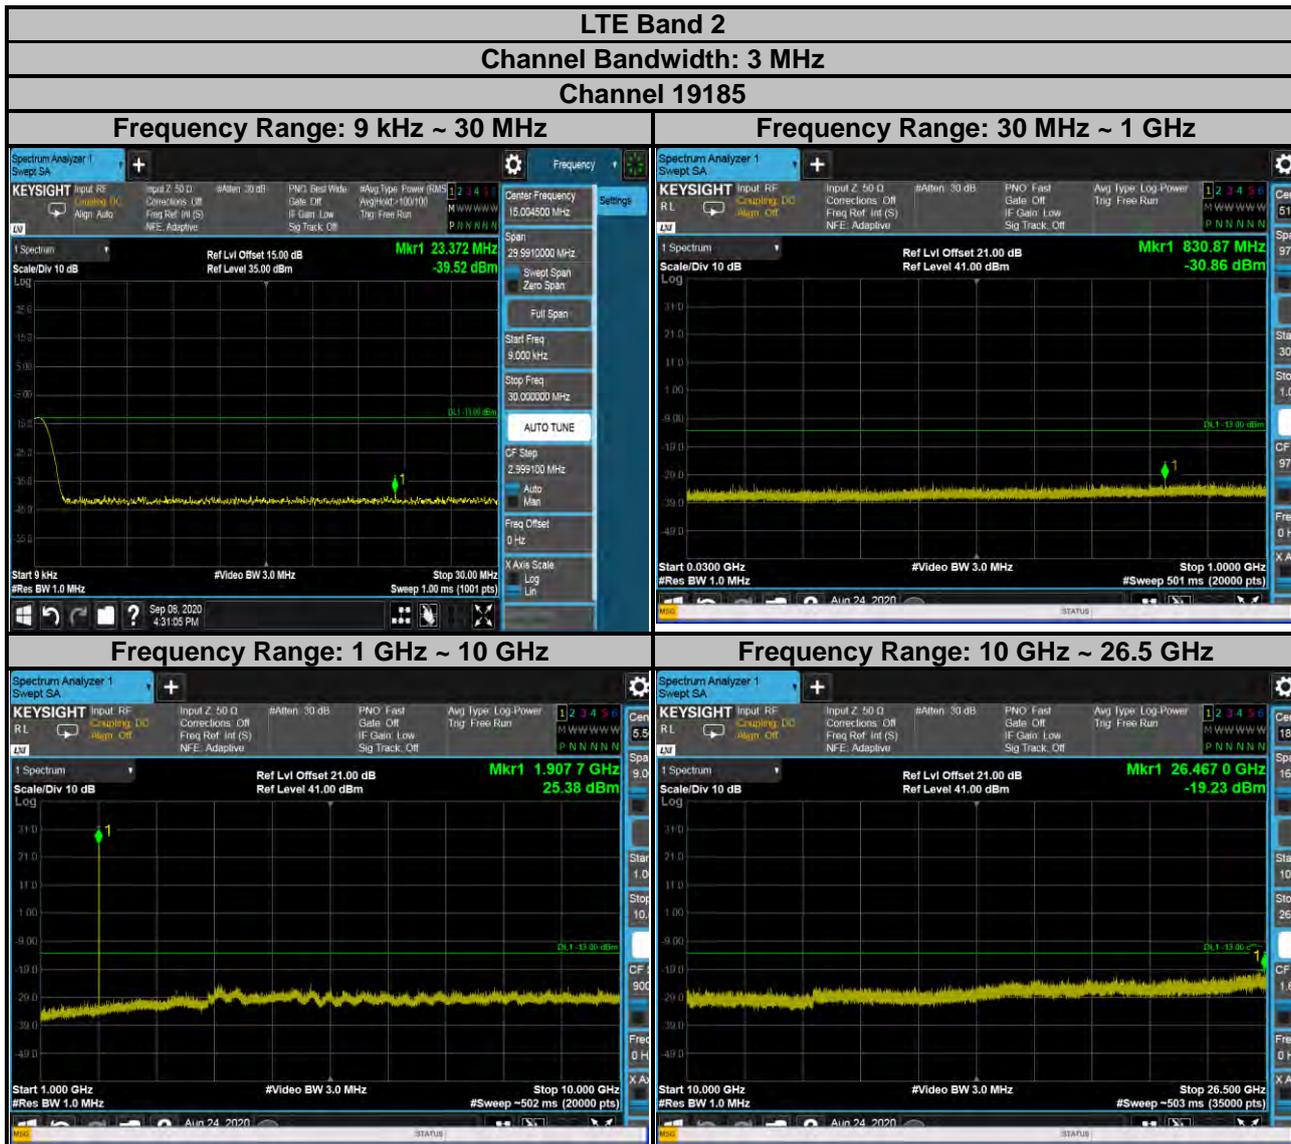


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

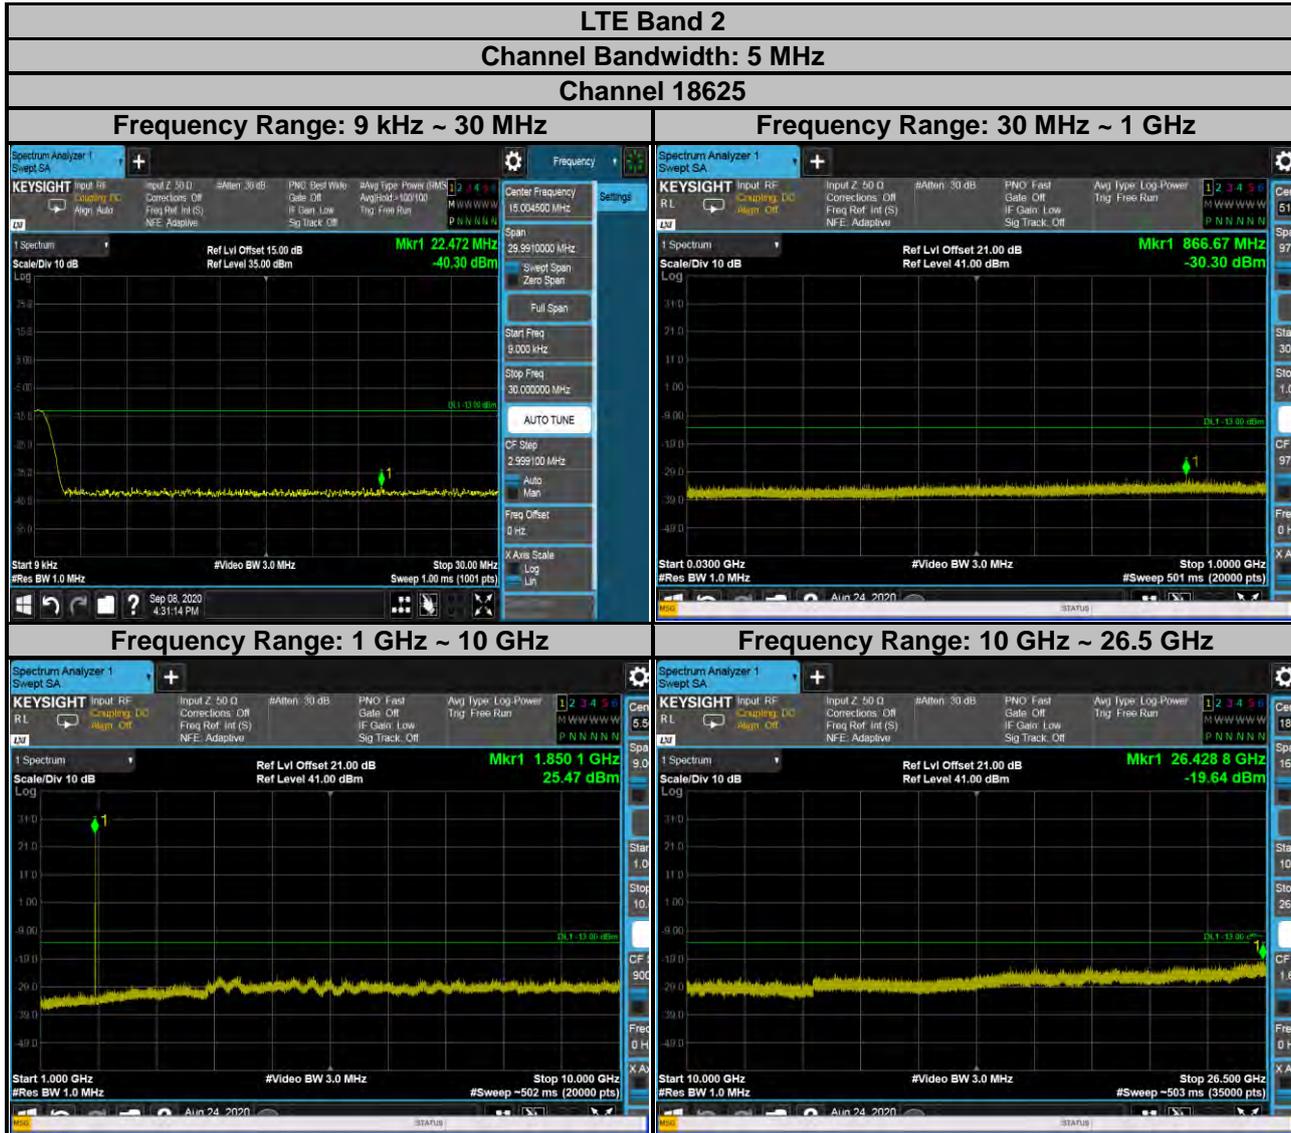


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

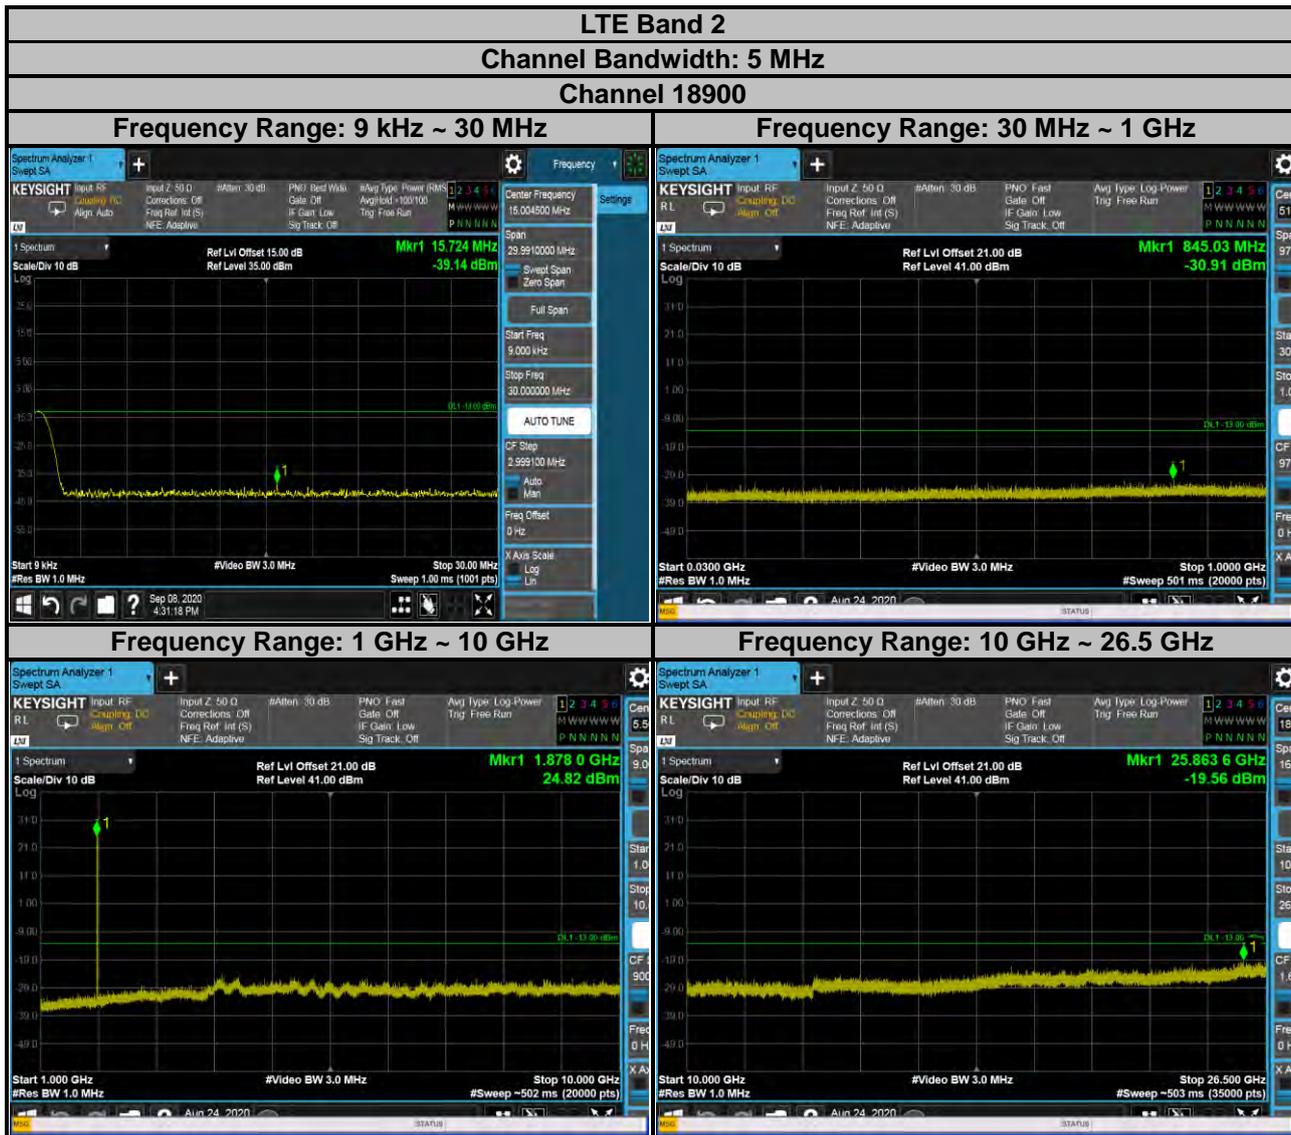


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

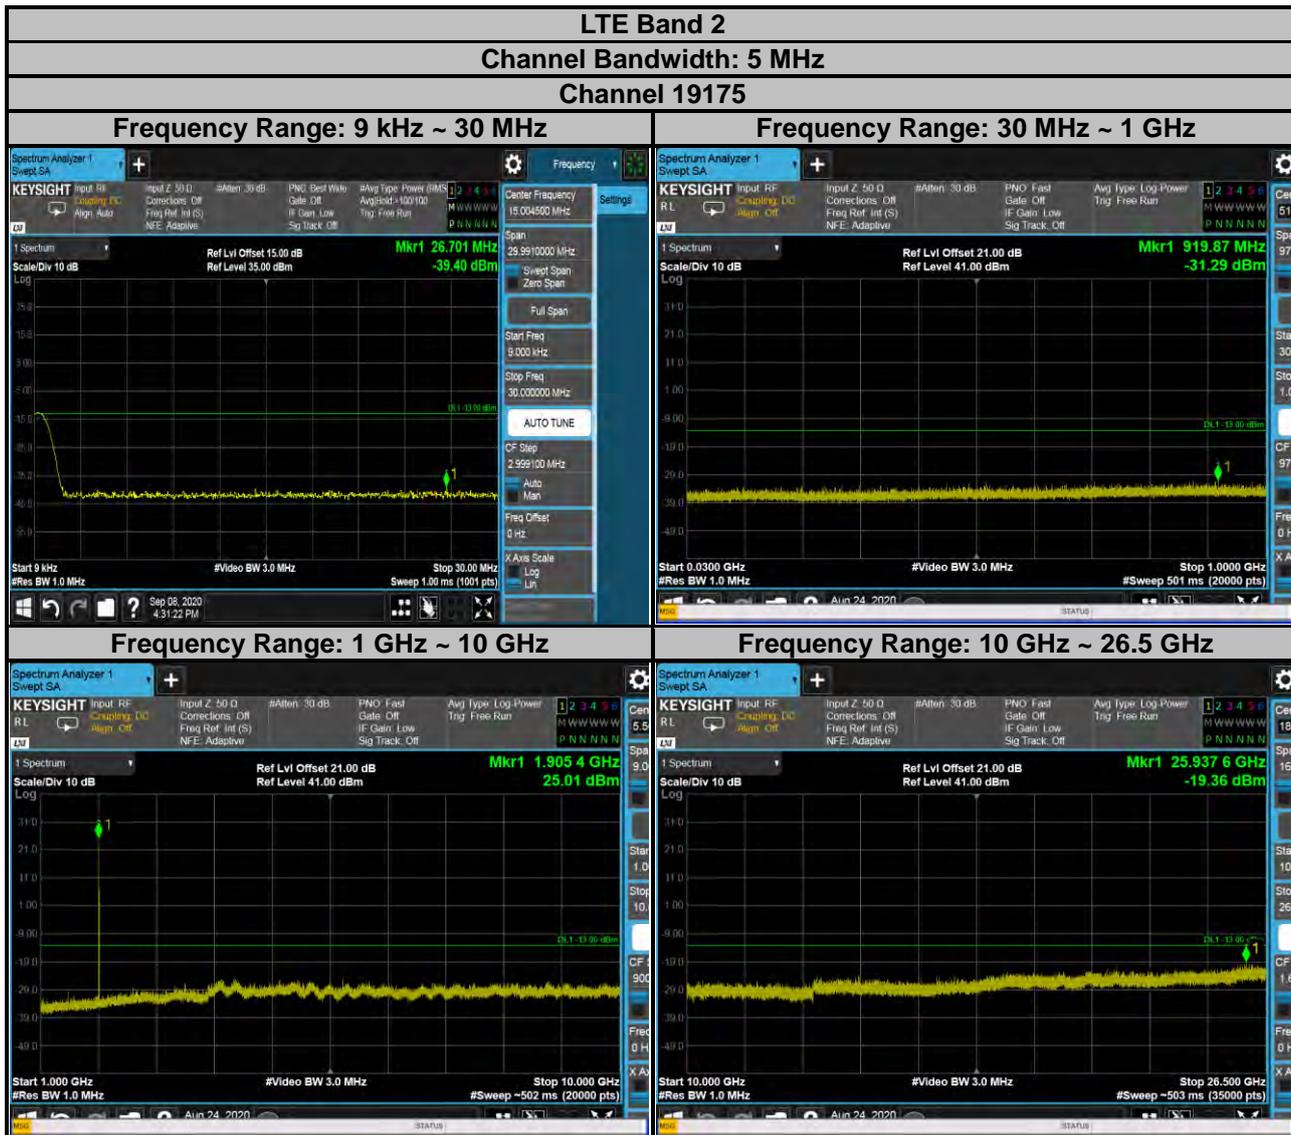


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

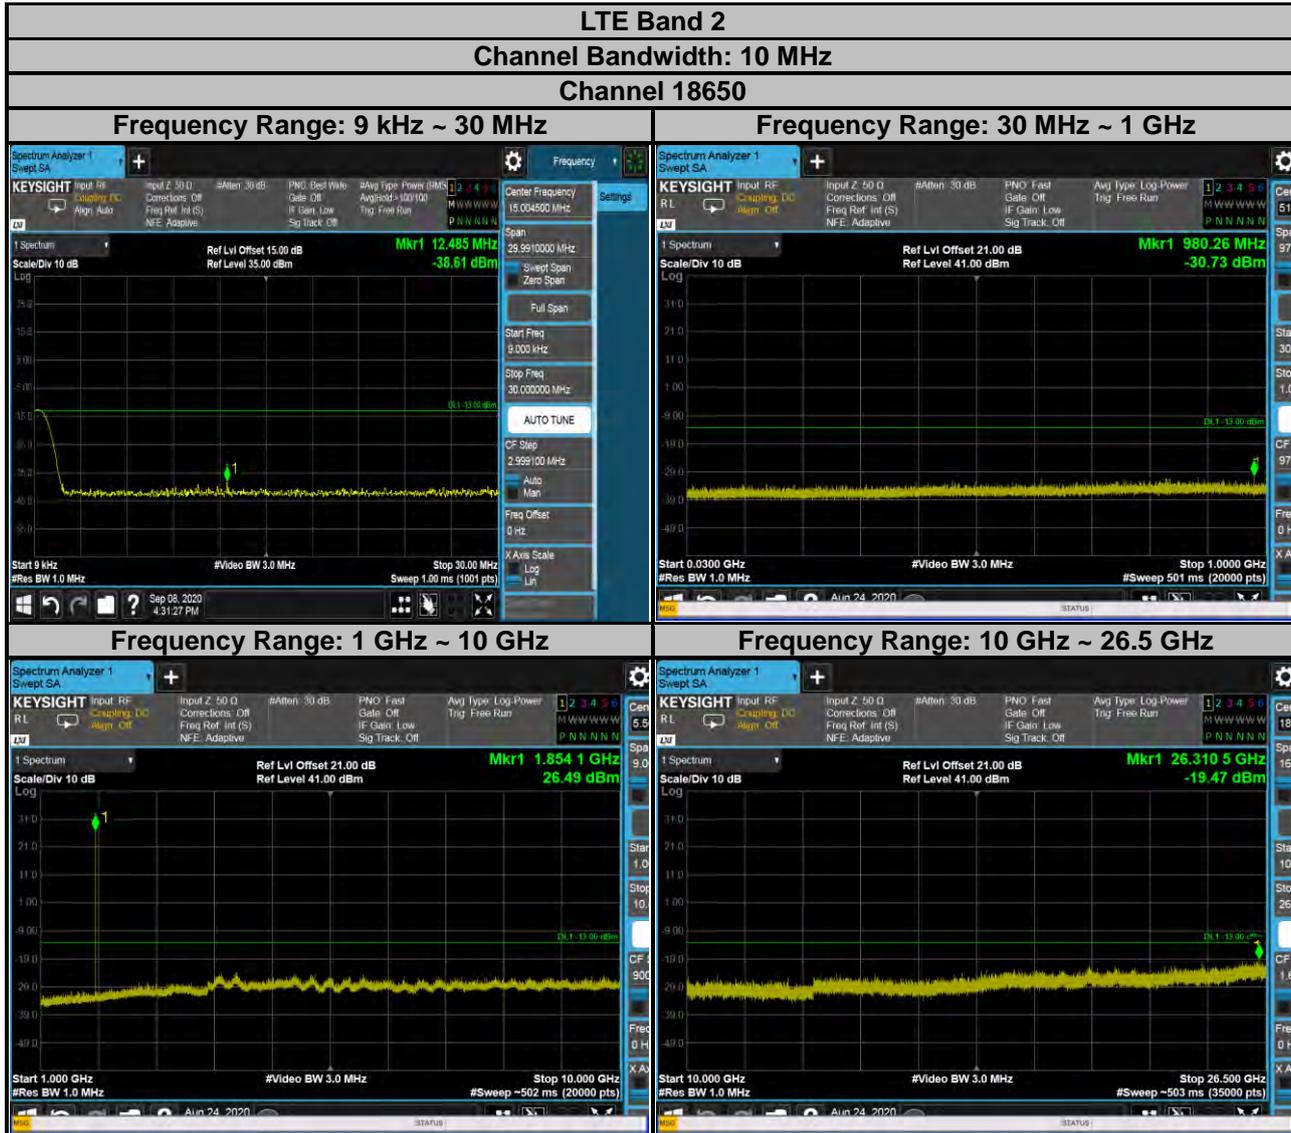


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

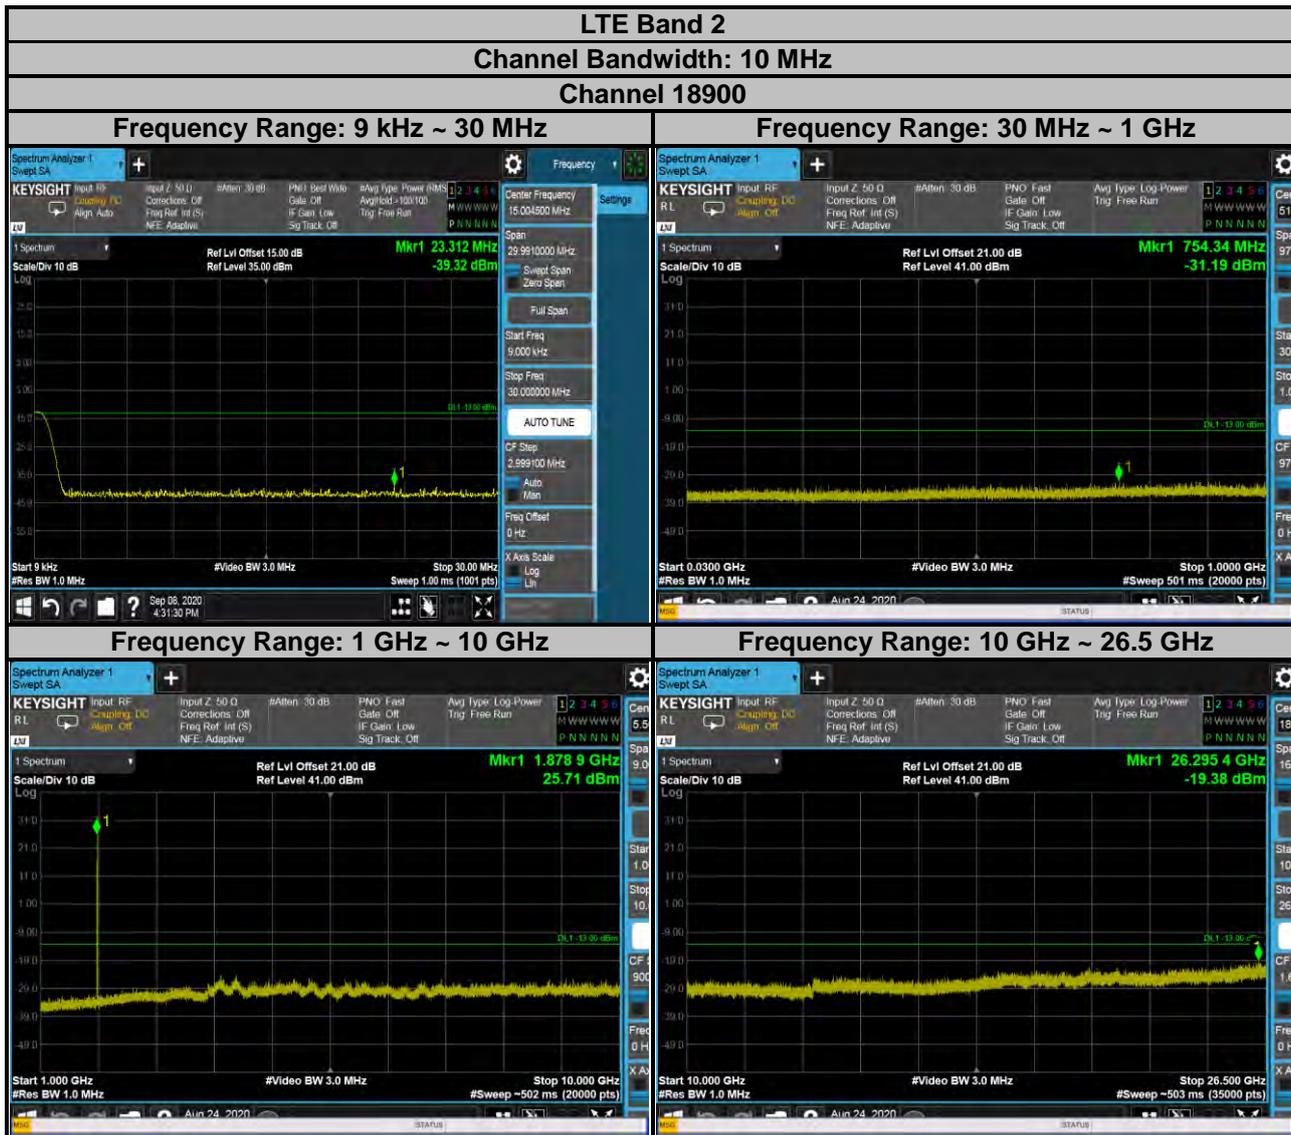


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

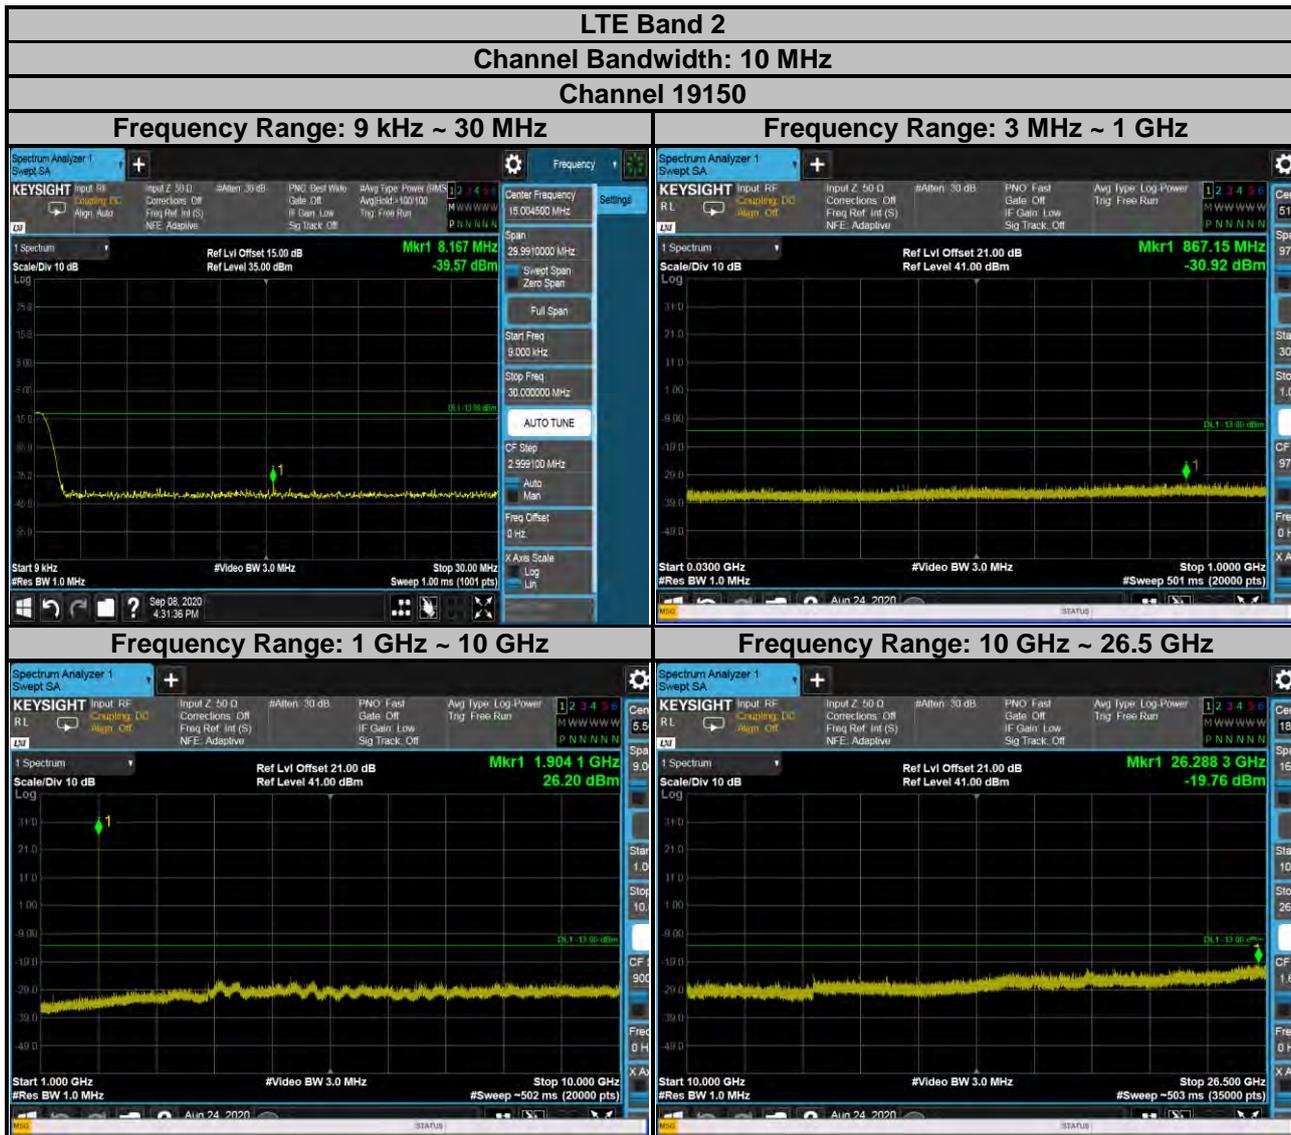


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

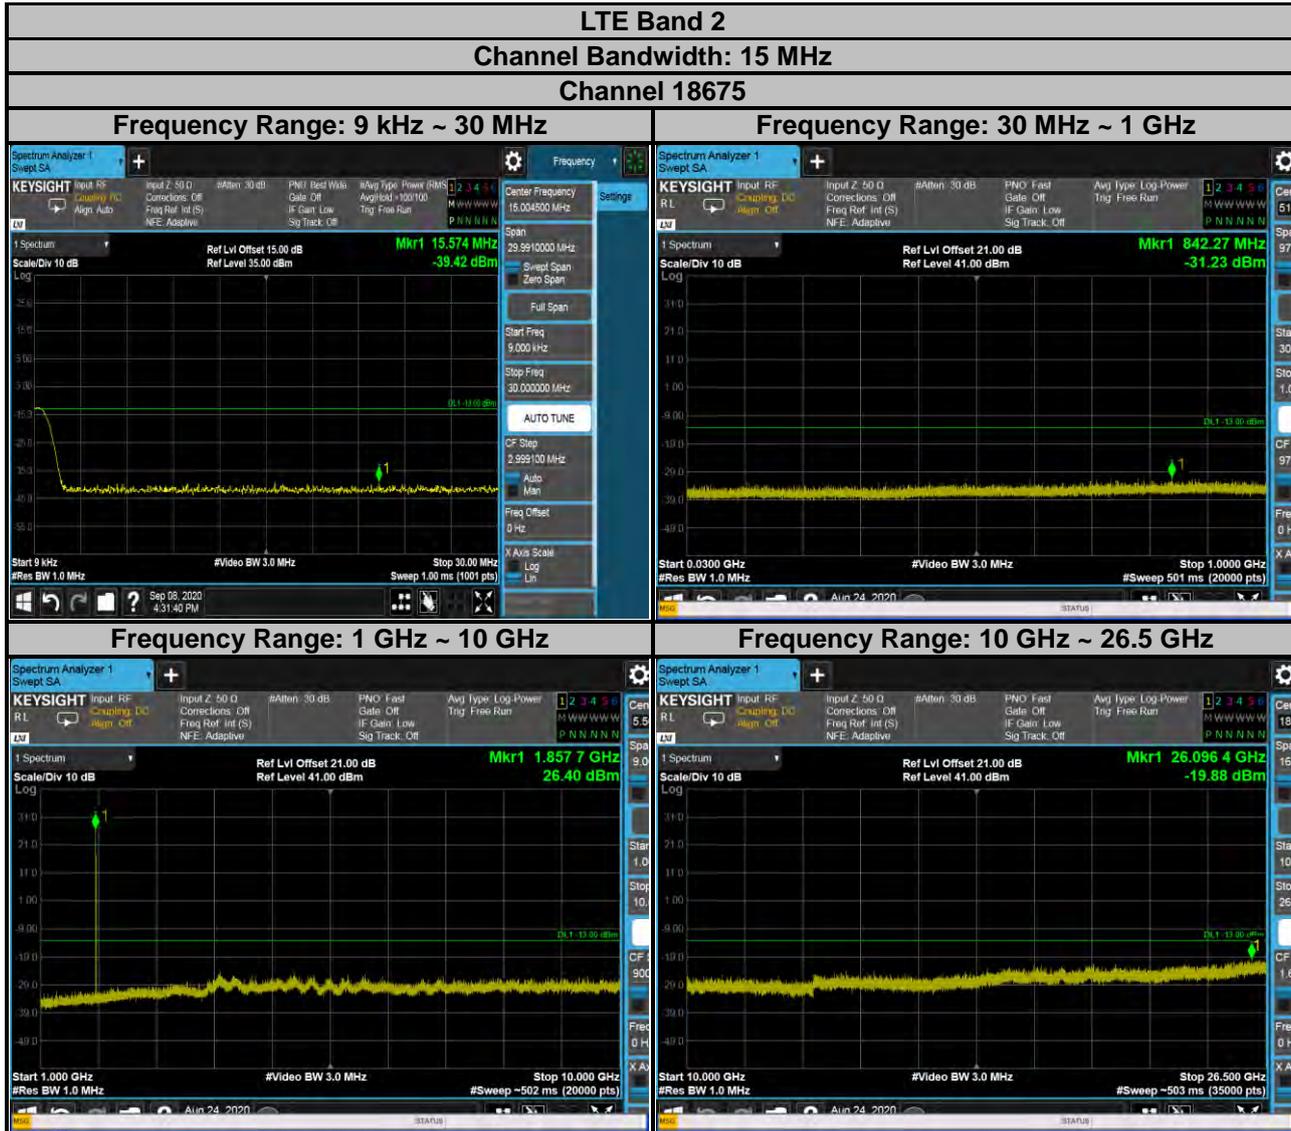


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

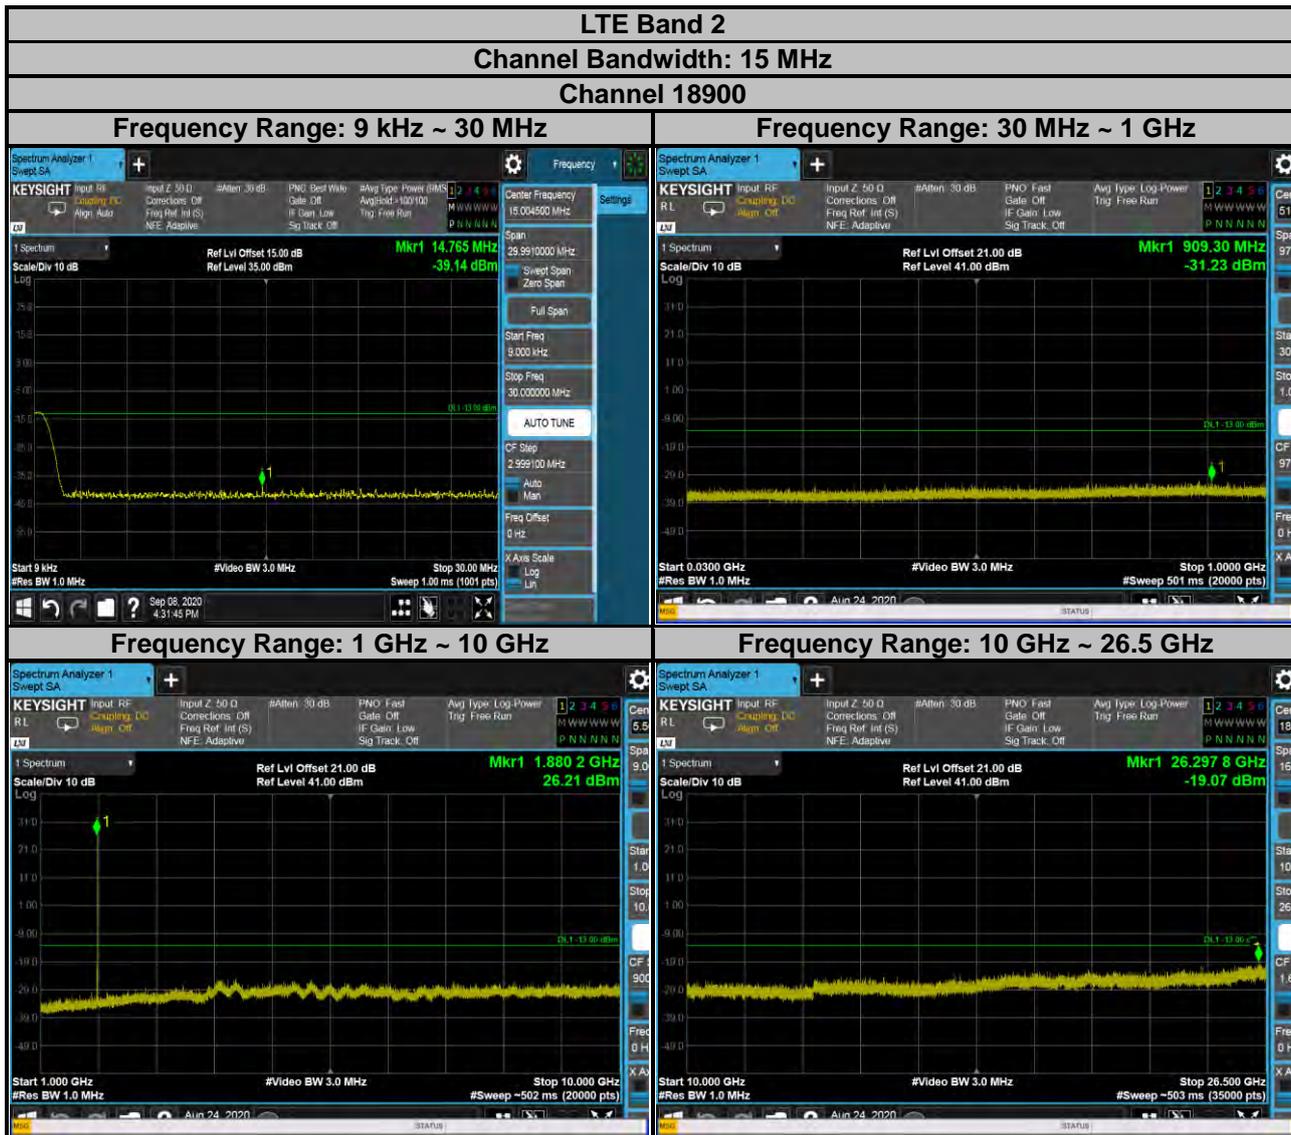


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

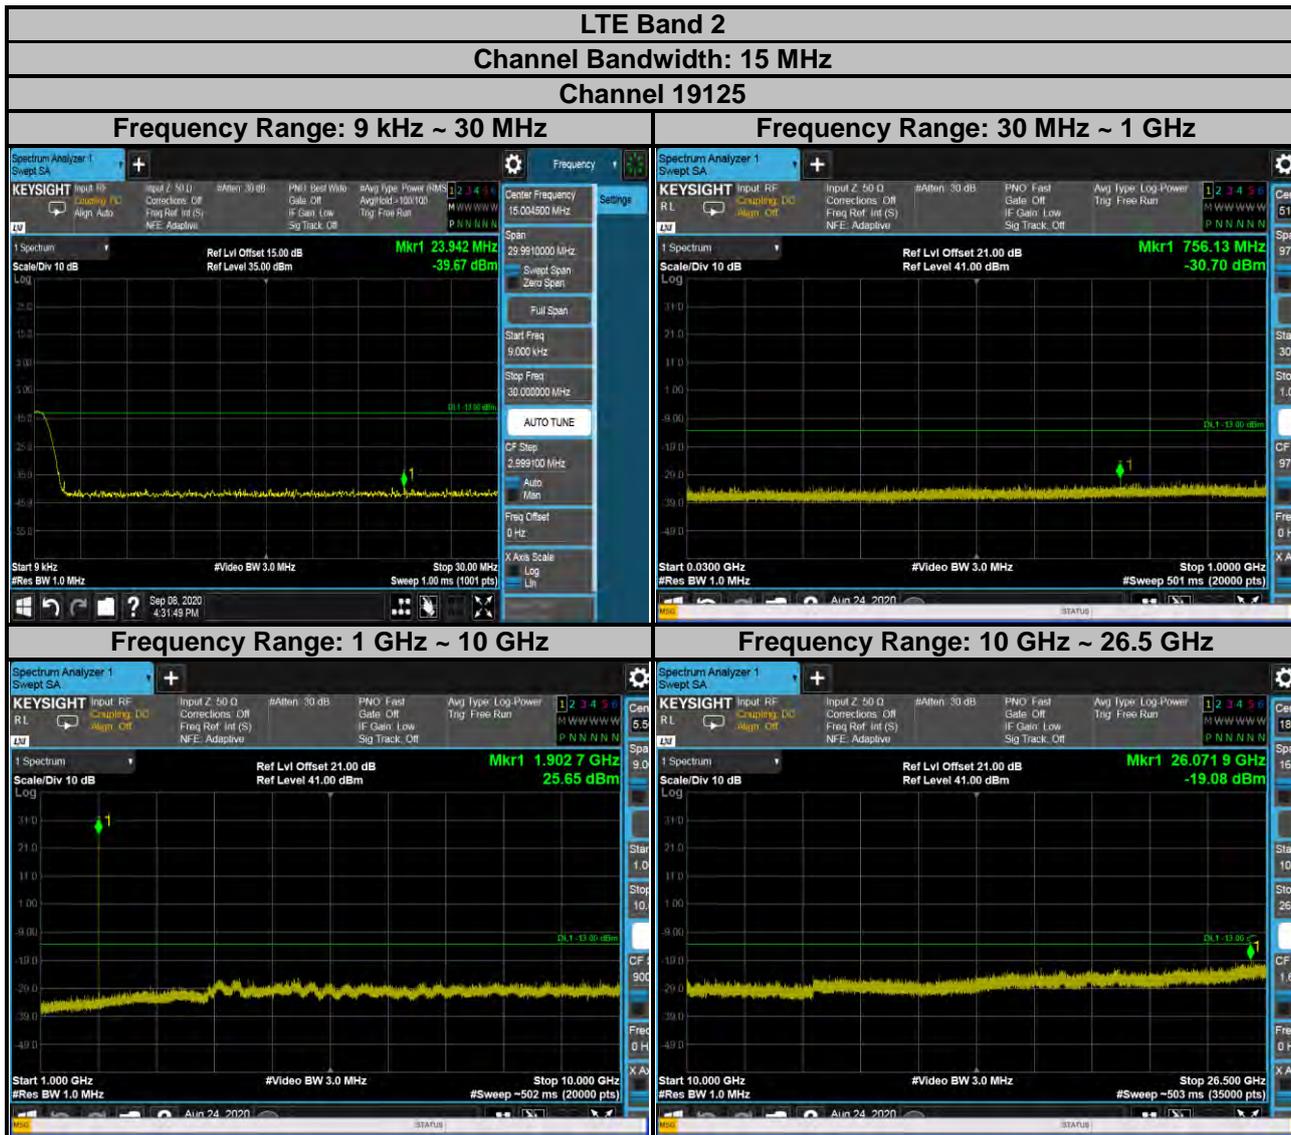


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

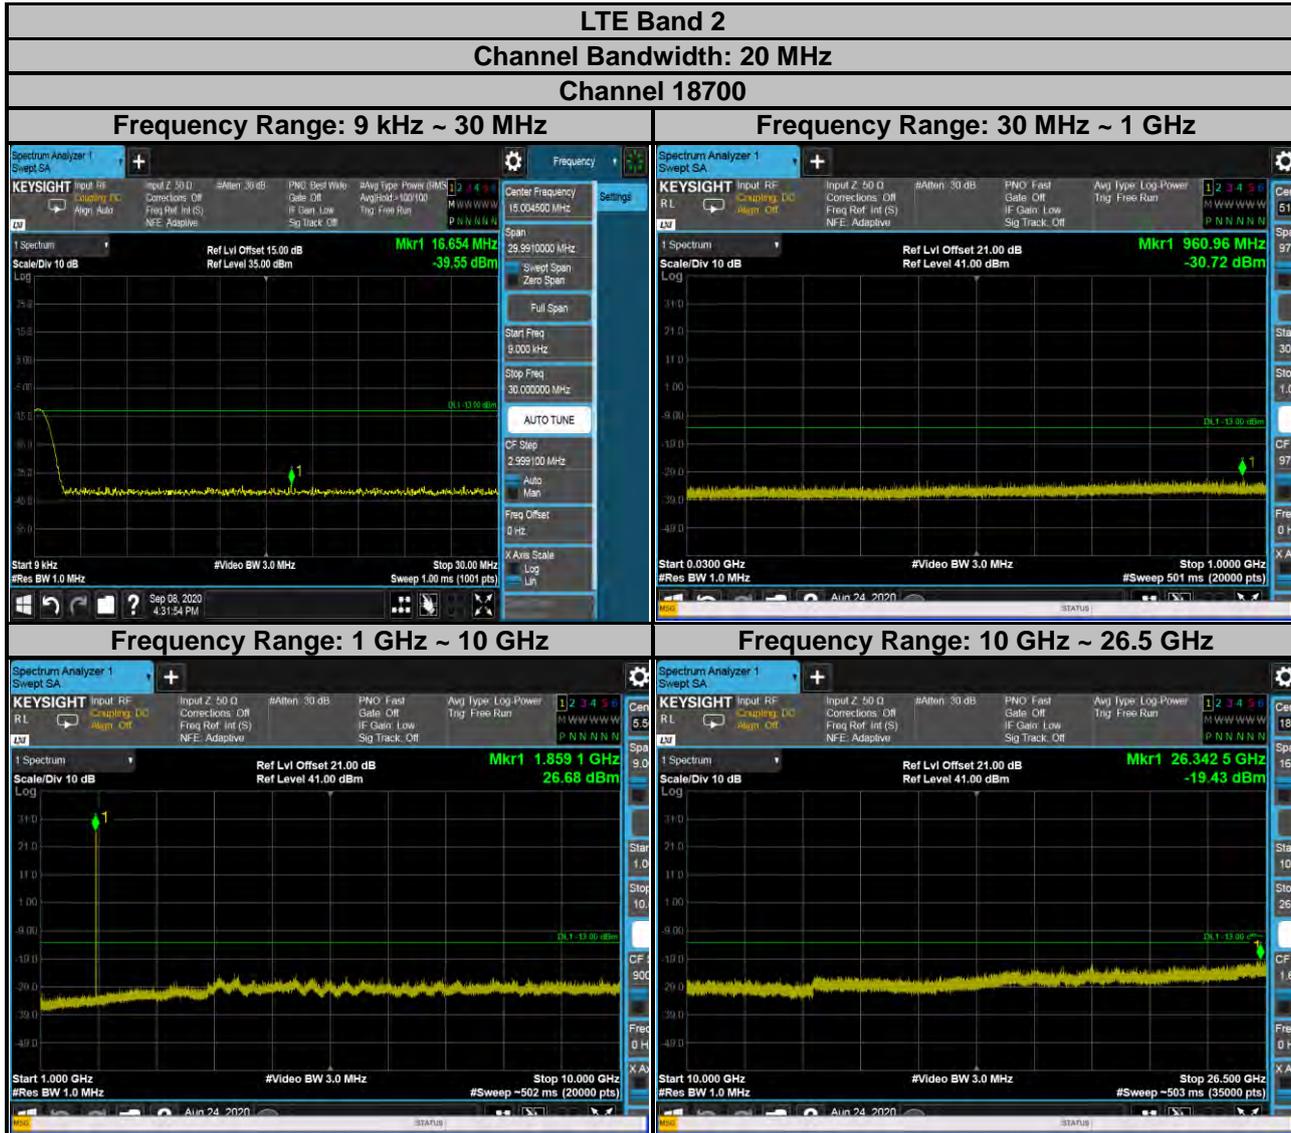

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

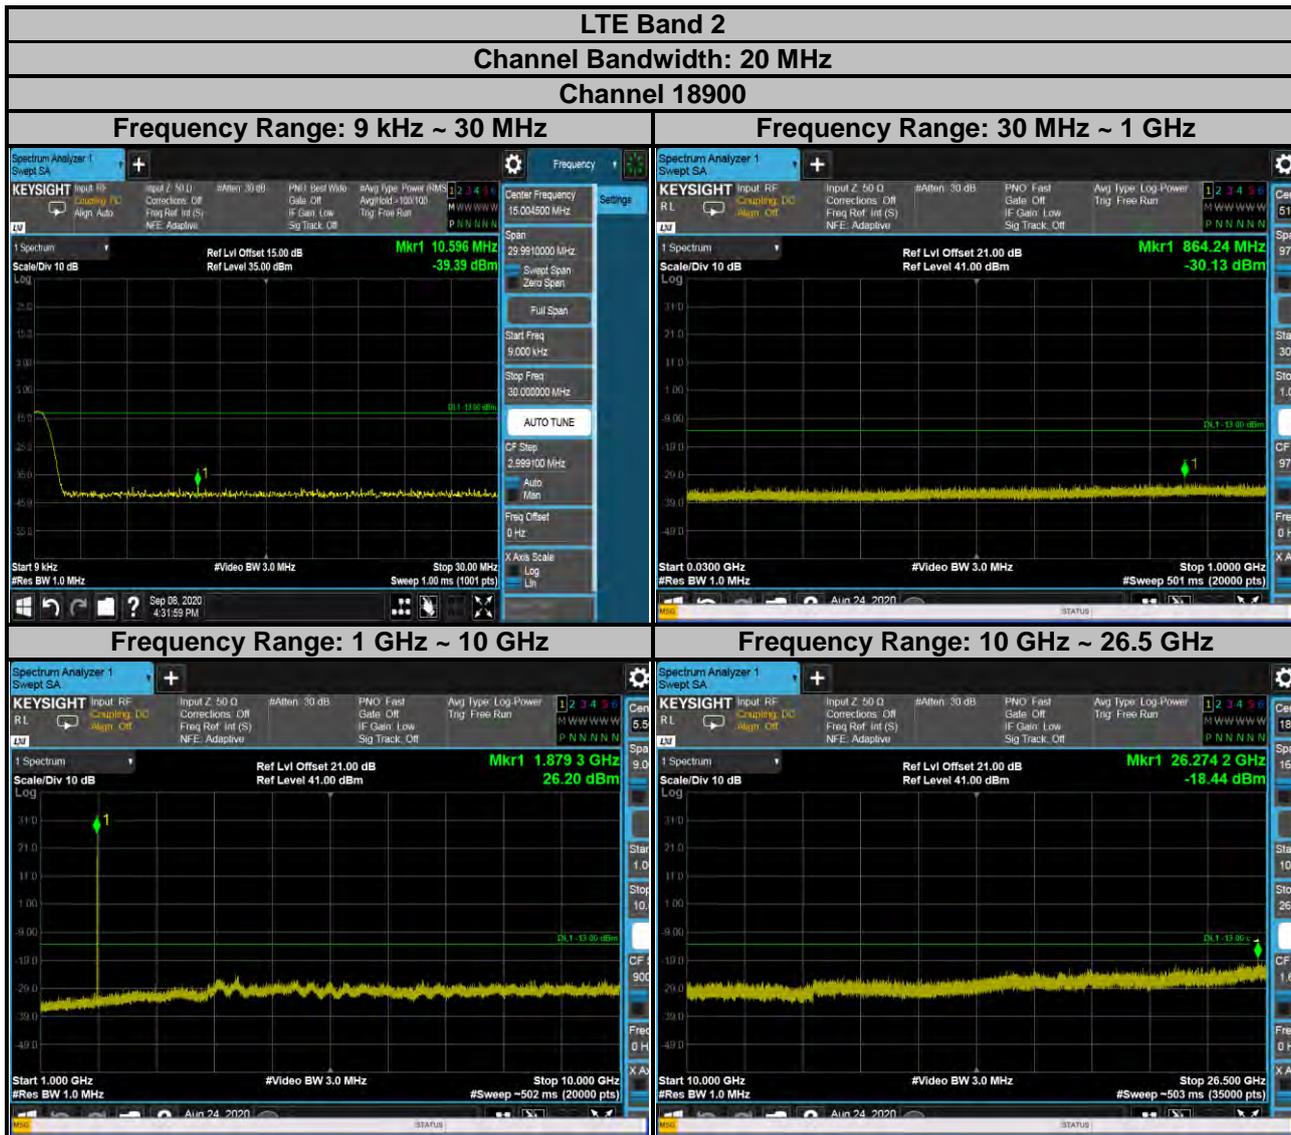

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

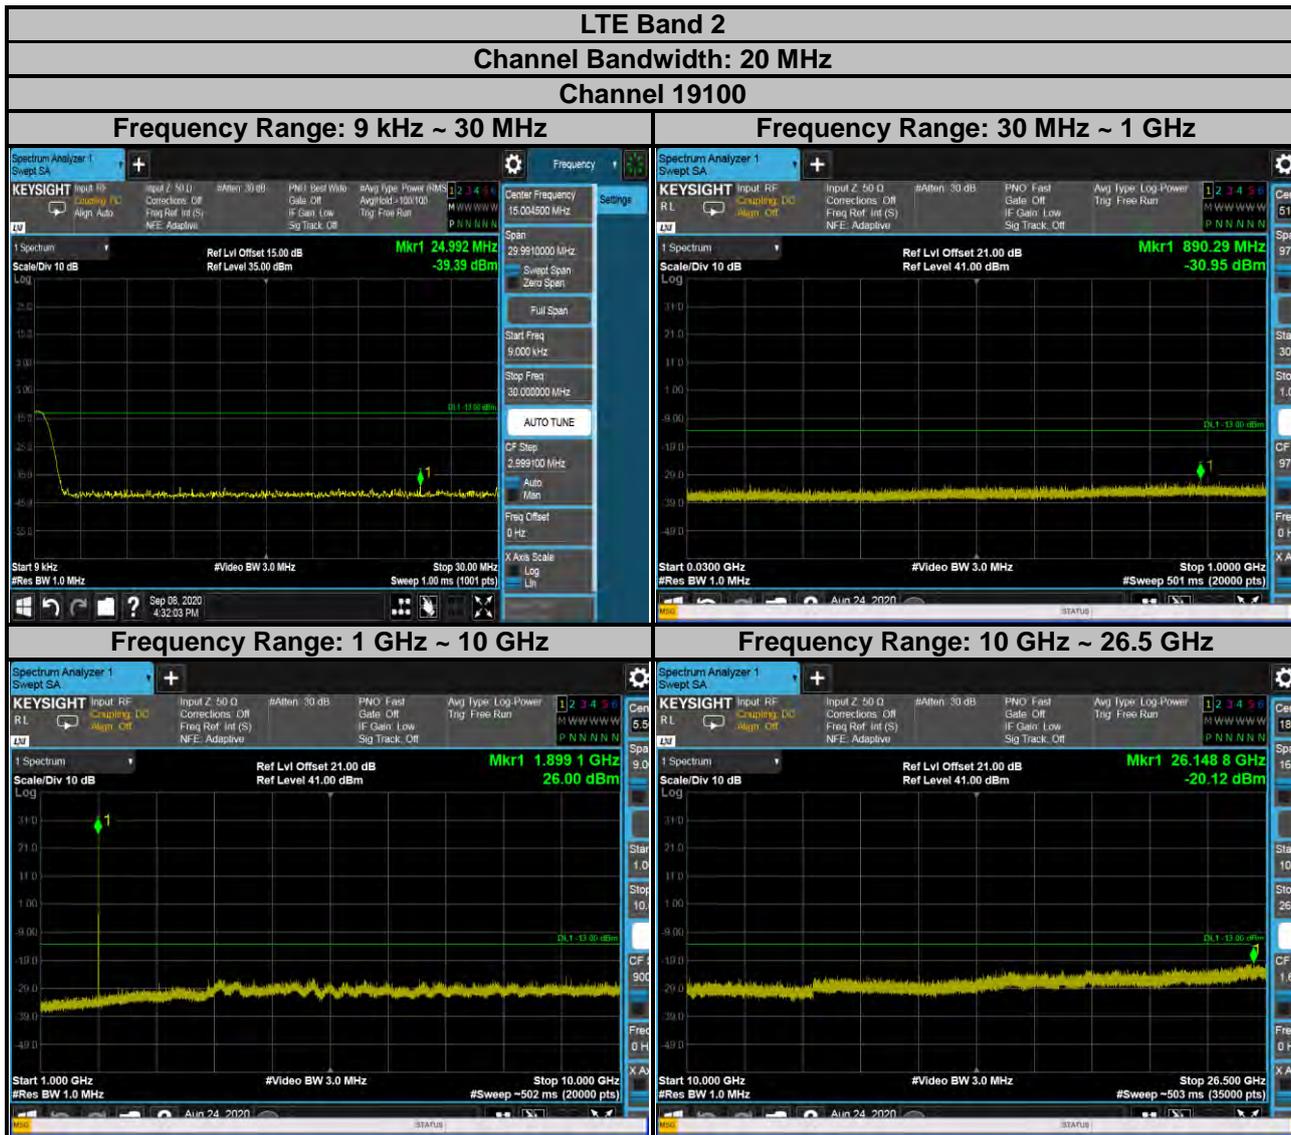

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

## 4.8 Radiated Emission Measurement

### 4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit is equal to -13 dBm.

### 4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

### 4.8.3 Deviation from Test Standard


No deviation.

#### 4.8.4 Test Setup

##### <Radiated Emission below or equal 1 GHz>

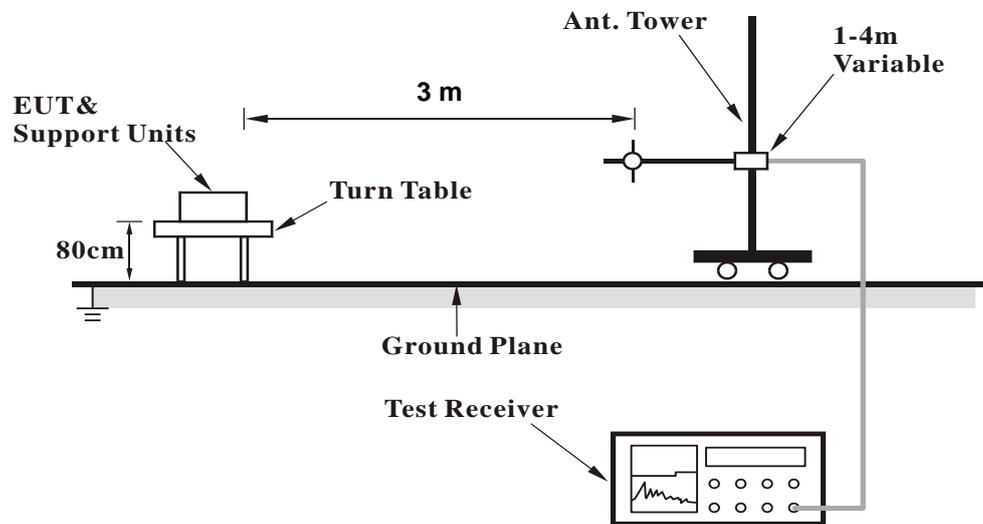

##### <Radiated Emission above 1 GHz>

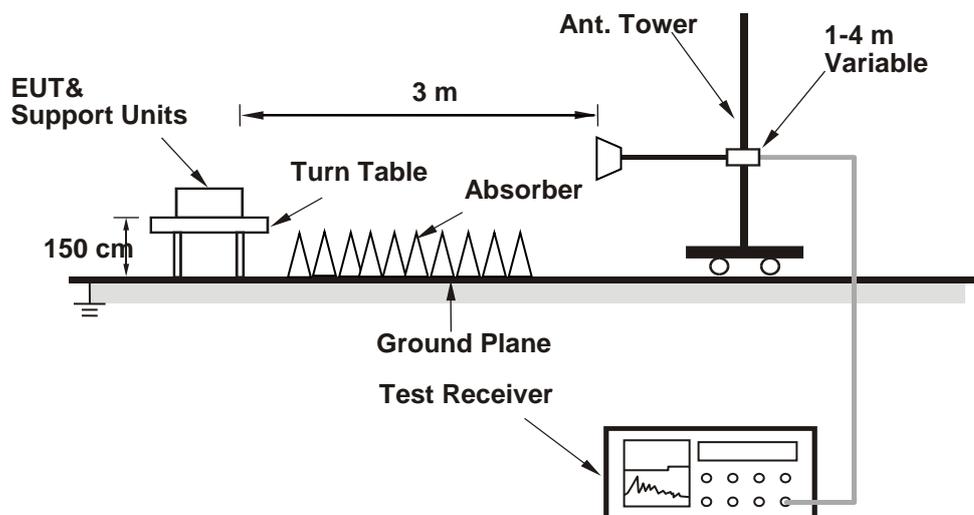

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

LTE Band 2

Channel Bandwidth: 1.4 MHz / QPSK

Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-26-2020

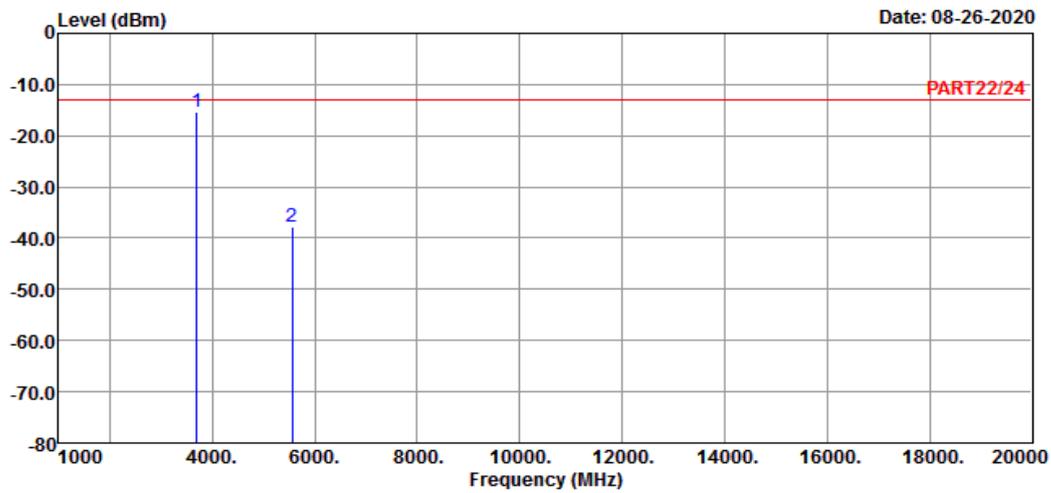

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remak : Cat-M1 Band 2 QPSK\_1.4M Link\_L-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm		dB	dB	
1 pp	3701.40	-15.34	-8.41	-13.00		-6.93	-2.34	Peak
2	5552.10	-37.68	-35.78	-13.00		-1.90	-24.68	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-26-2020

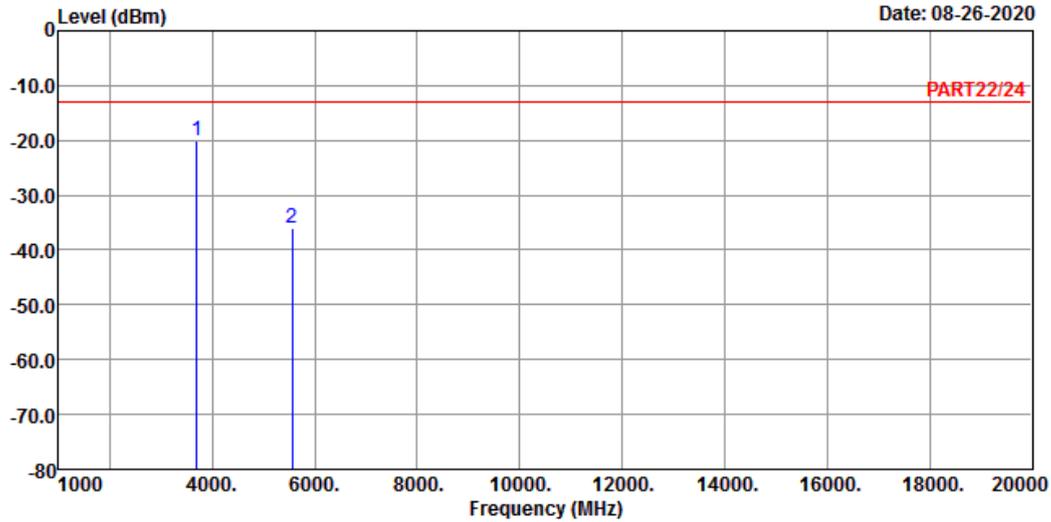

Site : 966 Chamber 5  
 Condition: PART22/24 VERTICAL  
 Remak : Cat-M1 Band 2 QPSK\_1.4M Link\_L-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	3701.40	-20.06	-13.13	-13.00	-6.93	-7.06	Peak
2	5552.10	-35.96	-34.06	-13.00	-1.90	-22.96	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-26-2020

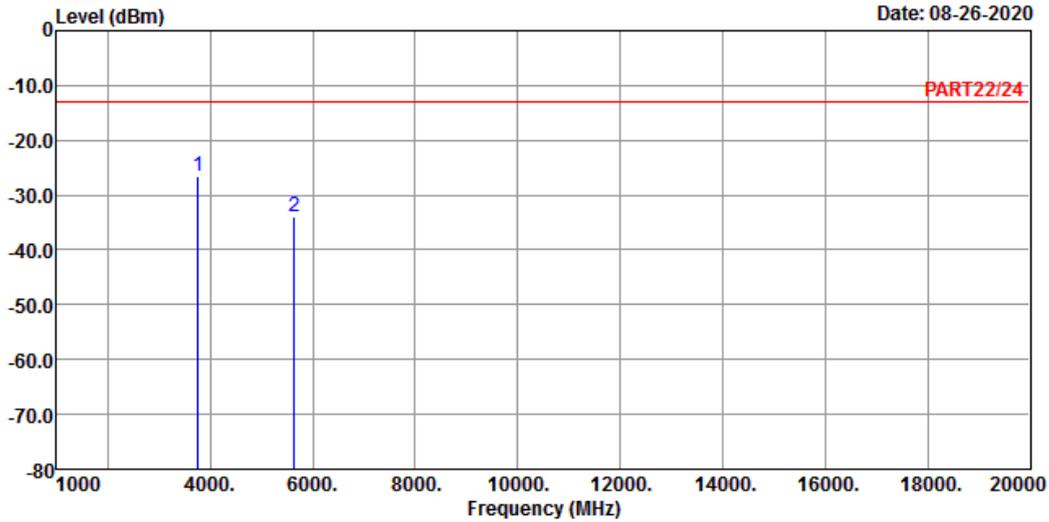

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remak : Cat-M1 Band 2 QPSK\_1.4M Link\_M-CH  
 Tested by: Getaz Yang


	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3760.00	-26.56	-19.91	-13.00	-6.65	-13.56	Peak
2	5640.00	-33.91	-32.05	-13.00	-1.86	-20.91	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

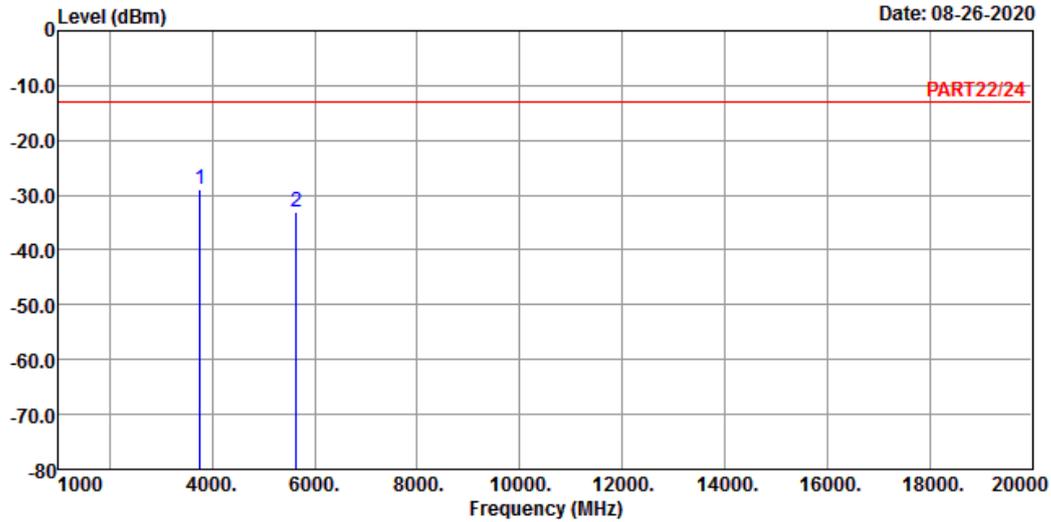

Site : 966 Chamber 5  
 Condition: PART22/24 VERTICAL  
 Remak : Cat-M1 Band 2 QPSK\_1.4M Link\_M-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	3760.00	-28.96	-22.31	-13.00	-6.65	-15.96	Peak
2	5640.00	-33.15	-31.29	-13.00	-1.86	-20.15	Peak

# High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

**A D T**

Data: 3

Date: 08-26-2020

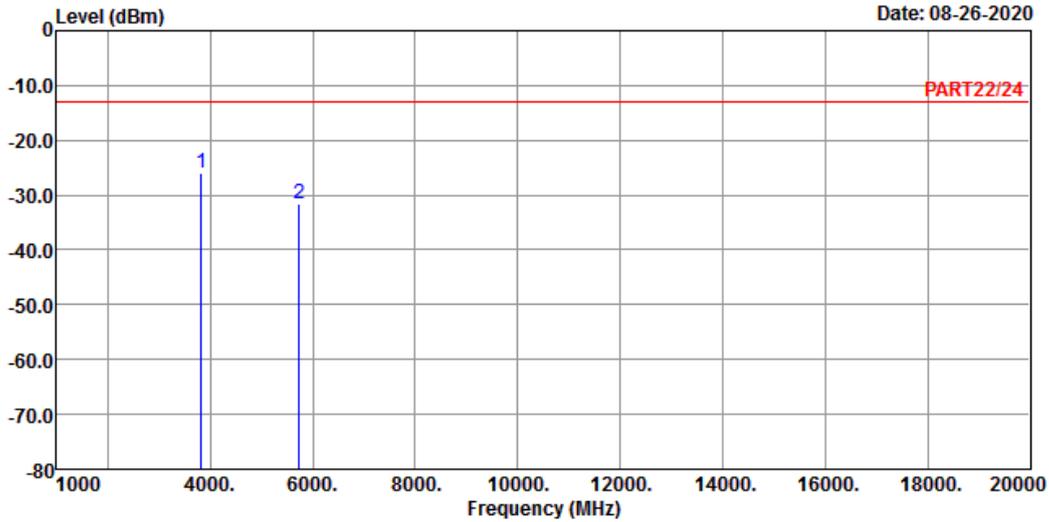

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remak : Cat-M1 Band 2 QPSK\_1.4M Link\_H-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3818.60	-26.04	-19.64	-13.00	-6.40	-13.04	Peak
2	5727.90	-31.65	-30.00	-13.00	-1.65	-18.65	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 08-26-2020

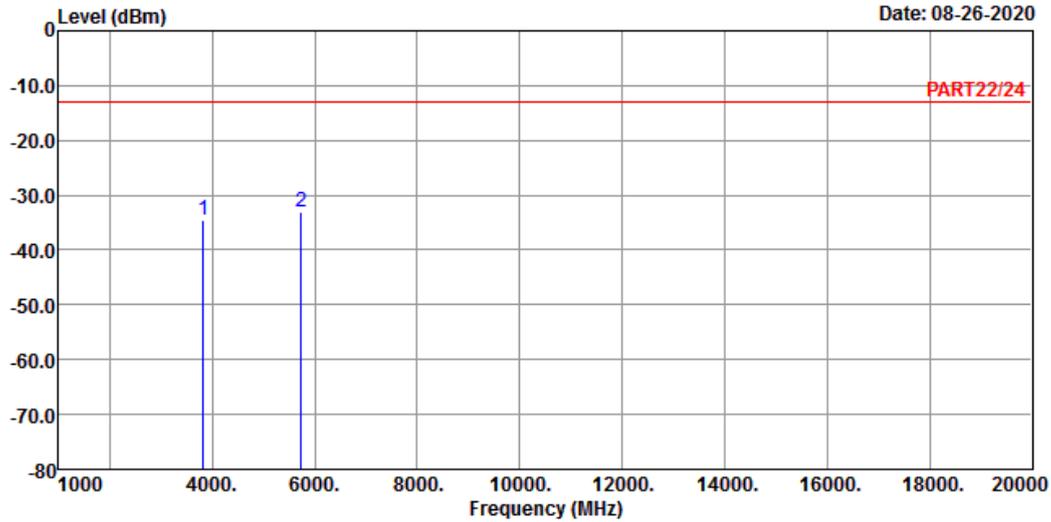

Site : 966 Chamber 5  
 Condition: PART22/24 VERTICAL  
 Remak : Cat-M1 Band 2 QPSK\_1.4M Link\_H-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3818.60	-34.63	-28.23	-13.00	-6.40	-21.63	Peak
2 pp	5727.90	-32.95	-31.30	-13.00	-1.65	-19.95	Peak


Channel Bandwidth: 5 MHz / QPSK  
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

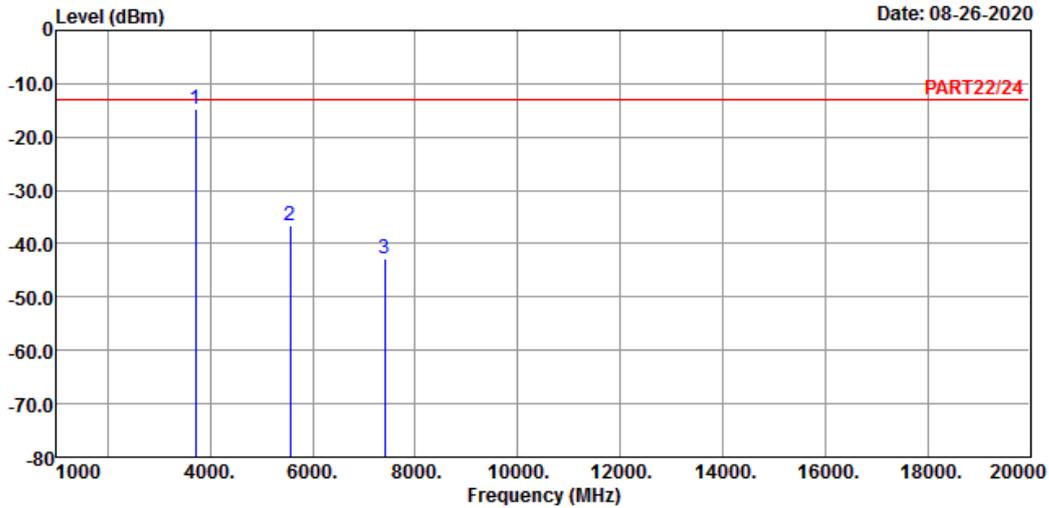

Site : 966 Chamber 5  
Condition: PART22/24 HORIZONTAL  
Remak : Cat-M1 Band 2 QPSK\_5M Link\_L-CH  
Tested by: Getaz Yang


	Freq	Level	Read Level	Limit	Over	Remark
	MHz	dBm	dBm	dBm	dB	dB
1 pp	3705.00	-14.74	-7.81	-13.00	-6.93	-1.74 Peak
2	5557.50	-36.66	-34.75	-13.00	-1.91	-23.66 Peak
3	7410.00	-42.72	-46.85	-13.00	4.13	-29.72 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

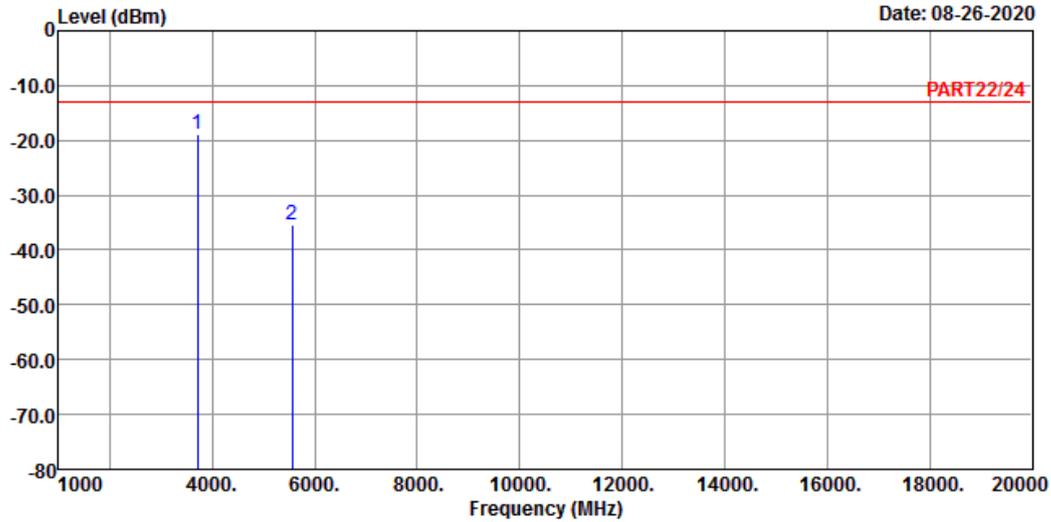

Site : 966 Chamber 5  
 Condition: PART22/24 VERTICAL  
 Remak : Cat-M1 Band 2 QPSK\_5M Link\_L-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	3705.00	-19.02	-12.09	-13.00	-6.93	-6.02	Peak
2	5557.50	-35.36	-33.45	-13.00	-1.91	-22.36	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-26-2020

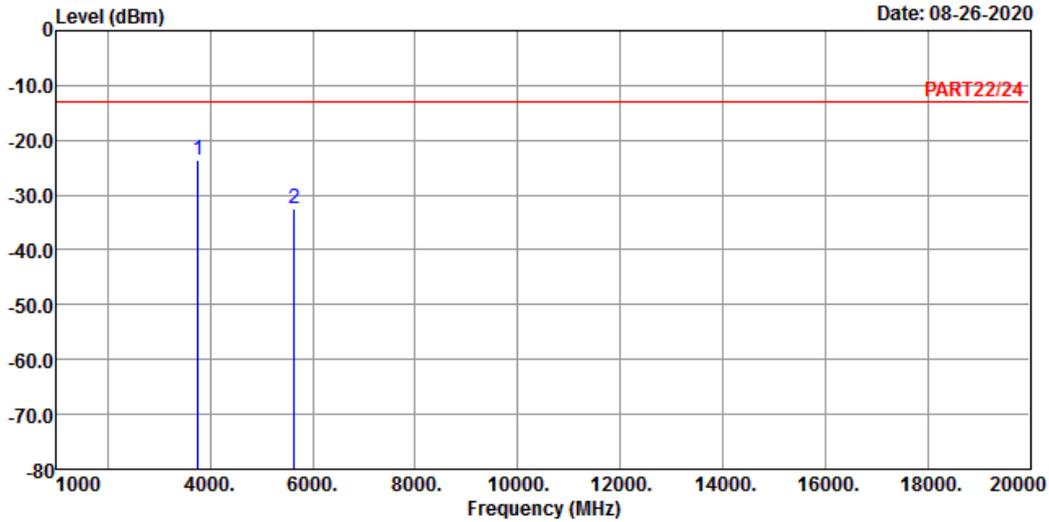

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remak : Cat-M1 Band 2 QPSK\_5M Link\_M-CH  
 Tested by: Getaz Yang


	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3760.00	-23.72	-17.07	-13.00	-6.65	-10.72	Peak
2	5640.00	-32.47	-30.61	-13.00	-1.86	-19.47	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

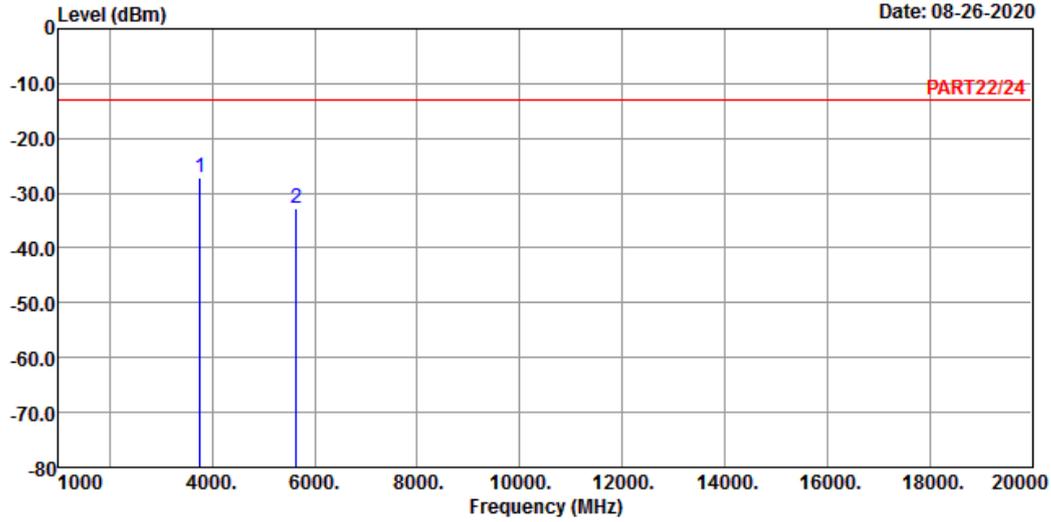

Site : 966 Chamber 5  
 Condition: PART22/24 VERTICAL  
 Remak : Cat-M1 Band 2 QPSK\_5M Link\_M-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	3760.00	-27.18	-20.53	-13.00	-6.65	-14.18	Peak
2	5640.00	-32.64	-30.78	-13.00	-1.86	-19.64	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-26-2020

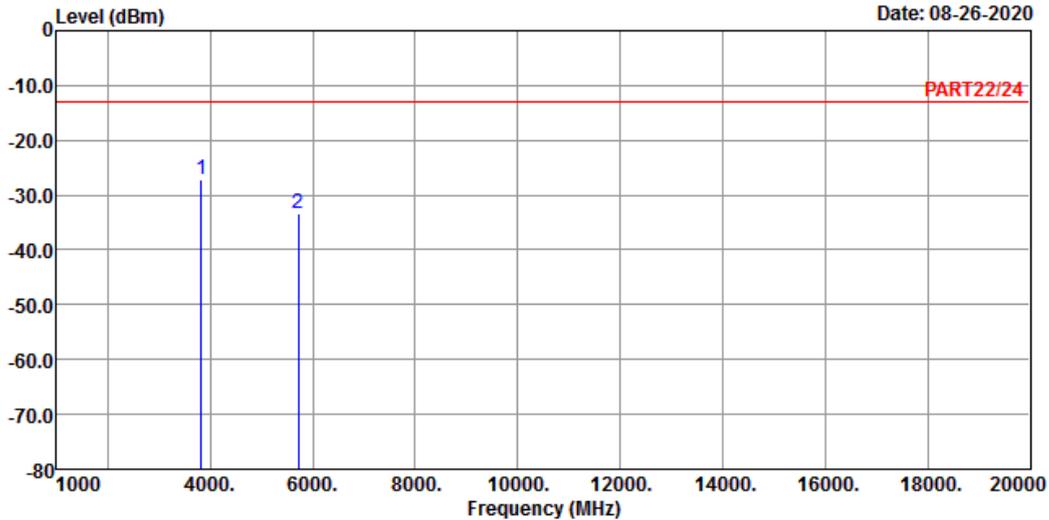

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remak : Cat-M1 Band 2 QPSK\_5M Link\_H-CH  
 Tested by: Getaz Yang


	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3815.00	-27.25	-20.85	-13.00	-6.40	-14.25	Peak
2	5722.50	-33.42	-31.73	-13.00	-1.69	-20.42	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

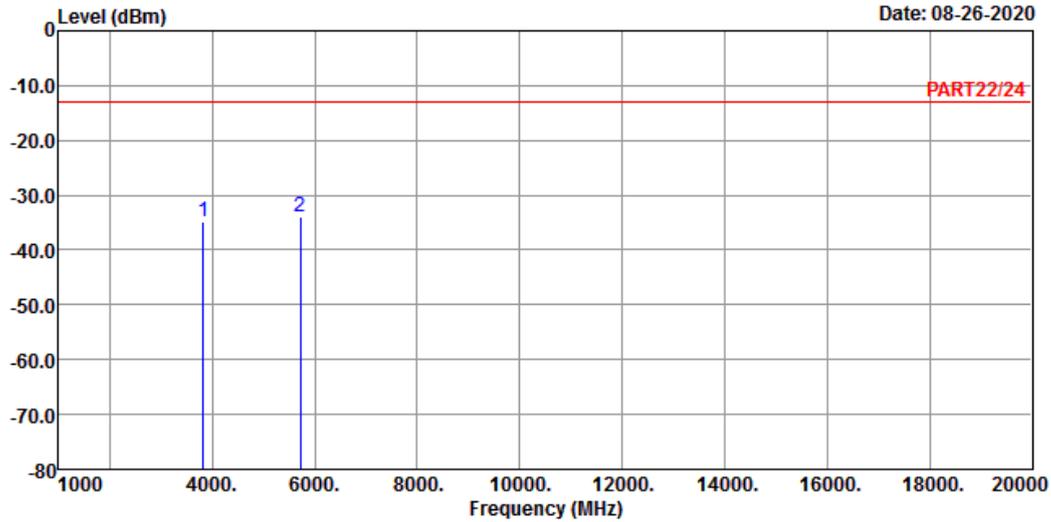

Site : 966 Chamber 5  
 Condition: PART22/24 VERTICAL  
 Remak : Cat-M1 Band 2 QPSK\_5M Link\_H-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3815.00	-34.80	-28.40	-13.00	-6.40	-21.80	Peak
2	5722.50	-33.92	-32.23	-13.00	-1.69	-20.92	Peak

Channel Bandwidth: 20 MHz / QPSK  
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 08-26-2020

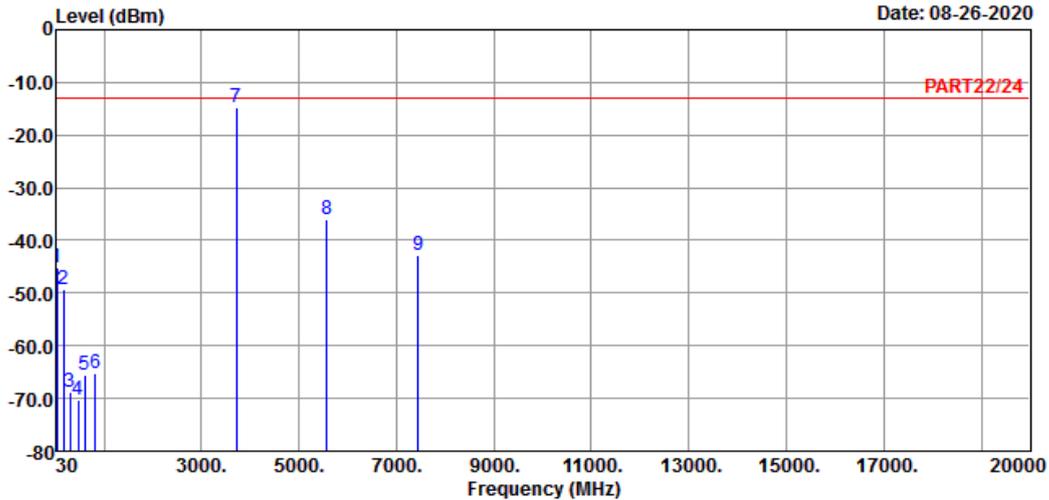

Site : 966 Chamber 5  
Condition: PART22/24 HORIZONTAL  
Remak : Cat-M1 Band 2 QPSK\_20M Link\_L-CH  
Tested by: Getaz Yang

	Freq	Level	Read	Limit	Over	Remark
	MHz	dBm	Level	Line	Factor	Limit
			dBm	dBm	dB	dB
1	42.61	-45.24	-44.30	-13.00	-0.94	-32.24 Peak
2	160.95	-49.39	-44.48	-13.00	-4.91	-36.39 Peak
3	299.66	-68.92	-61.91	-13.00	-7.01	-55.92 Peak
4	472.32	-70.29	-65.16	-13.00	-5.13	-57.29 Peak
5	605.21	-65.67	-64.90	-13.00	-0.77	-52.67 Peak
6	827.34	-65.34	-65.83	-13.00	0.49	-52.34 Peak
7 pp	3720.00	-14.65	-7.83	-13.00	-6.82	-1.65 Peak
8	5580.00	-35.96	-34.04	-13.00	-1.92	-22.96 Peak
9	7440.00	-42.78	-46.93	-13.00	4.15	-29.78 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 08-26-2020

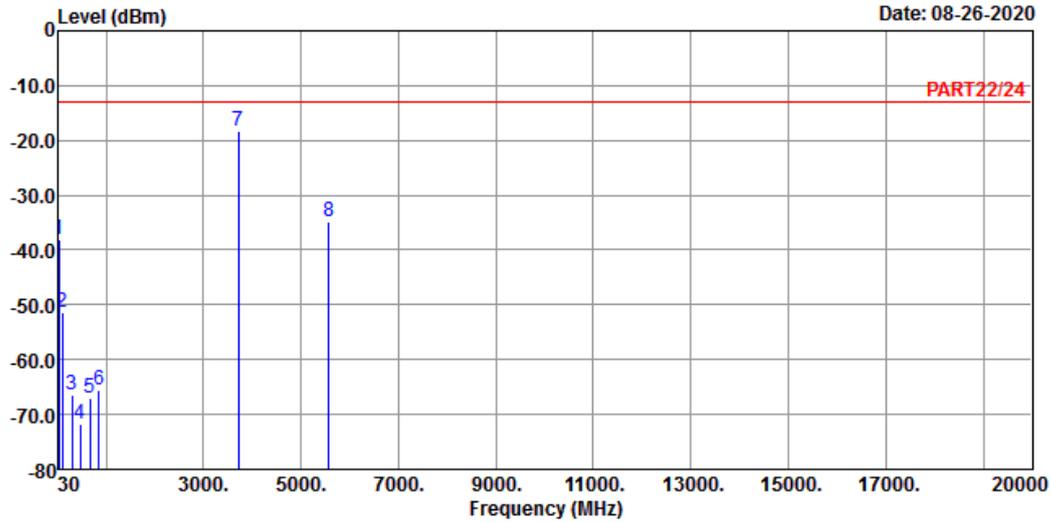

Site : 966 Chamber 5  
 Condition: PART22/24 VERTICAL  
 Remak : Cat-M1 Band 2 QPSK\_20M Link\_L-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line	Factor	Over	Limit	Remark
	MHz	dBm	dBm	dBm		dB	dB		
1	40.67	-37.99	-38.11	-13.00		0.12	-24.99		Peak
2	97.90	-51.25	-40.58	-13.00		-10.67	-38.25		Peak
3	294.81	-66.42	-59.51	-13.00		-6.91	-53.42		Peak
4	466.50	-71.65	-66.41	-13.00		-5.24	-58.65		Peak
5	676.99	-67.09	-66.63	-13.00		-0.46	-54.09		Peak
6	859.35	-65.58	-65.93	-13.00		0.35	-52.58		Peak
7 pp	3720.00	-18.17	-11.35	-13.00		-6.82	-5.17		Peak
8	5580.00	-34.73	-32.81	-13.00		-1.92	-21.73		Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-26-2020

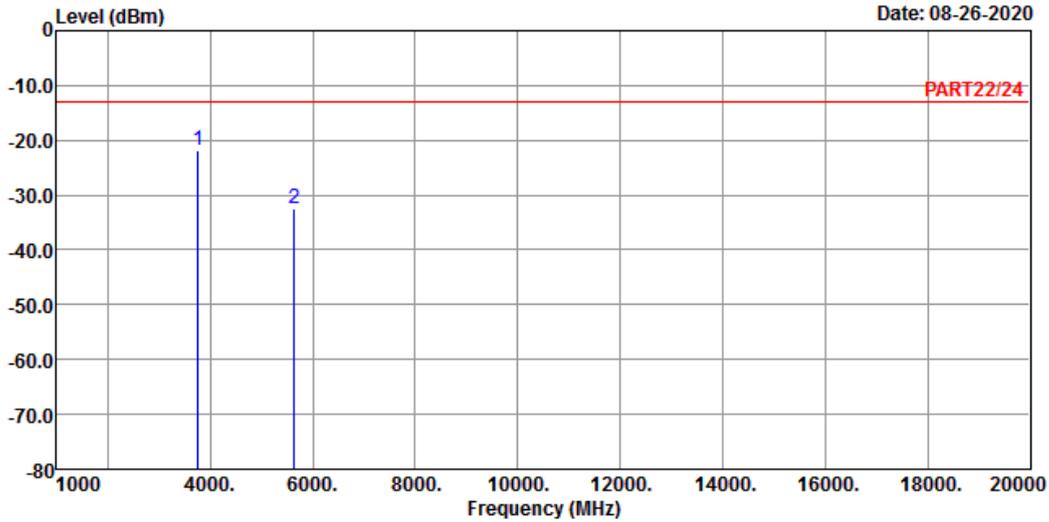

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remak : Cat-M1 Band 2 QPSK\_20M Link\_M-CH  
 Tested by: Getaz Yang


	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3760.00	-21.95	-15.30	-13.00	-6.65	-8.95	Peak
2	5640.00	-32.56	-30.70	-13.00	-1.86	-19.56	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

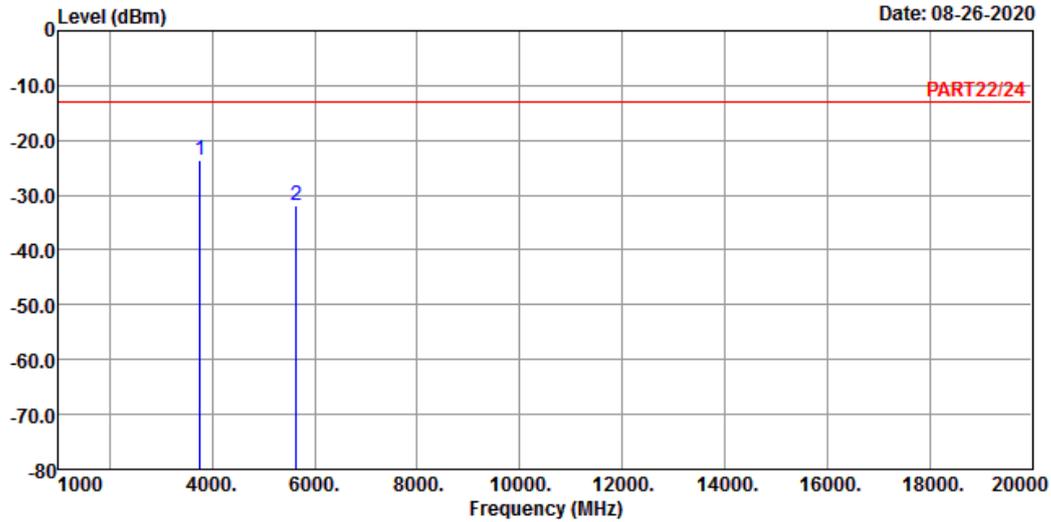

Site : 966 Chamber 5  
 Condition: PART22/24 VERTICAL  
 Remak : Cat-M1 Band 2 QPSK\_20M Link\_M-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Over	Remark
	MHz	dBm	dBm	dBm	dB	
1 pp	3760.00	-23.67	-17.02	-13.00	-6.65	-10.67 Peak
2	5640.00	-31.83	-29.97	-13.00	-1.86	-18.83 Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 08-26-2020

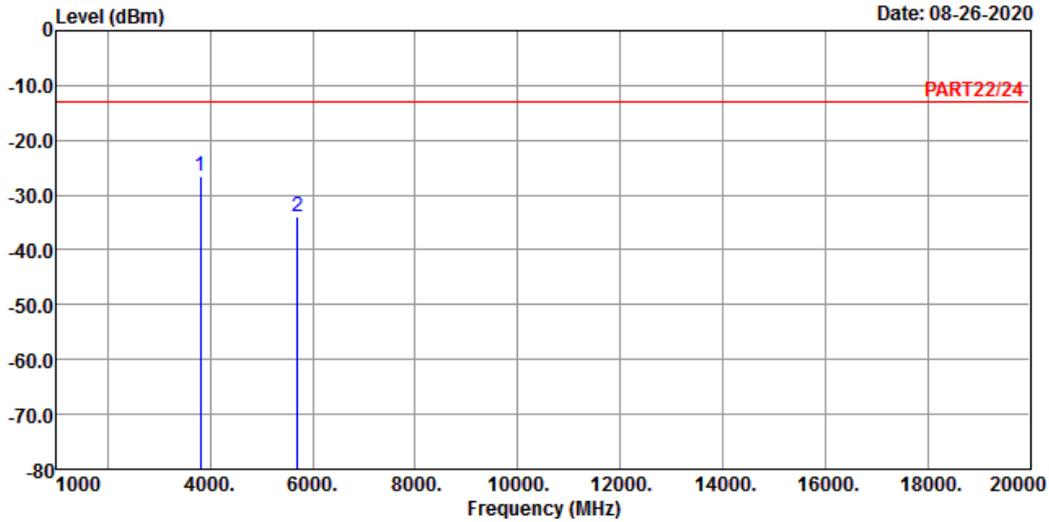

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remak : Cat-M1 Band 2 QPSK\_20M Link\_H-CH  
 Tested by: Getaz Yang


	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3800.00	-26.61	-20.18	-13.00	-6.43	-13.61	Peak
2	5700.00	-33.87	-32.14	-13.00	-1.73	-20.87	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

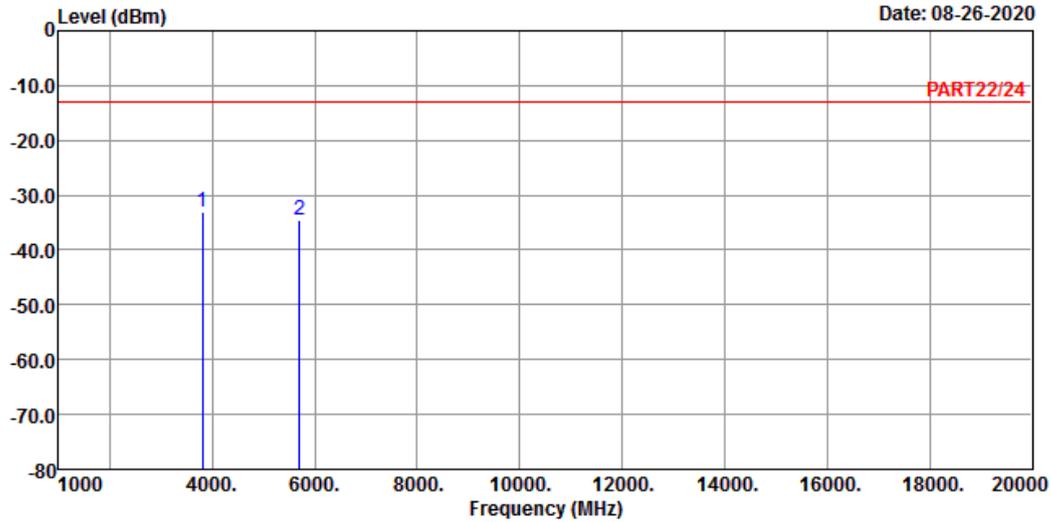

Site : 966 Chamber 5  
 Condition: PART22/24 VERTICAL  
 Remak : Cat-M1 Band 2 QPSK\_20M Link\_H-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Over	Remark
	MHz	dBm	dBm	dBm	dB	
1 pp	3800.00	-33.15	-26.72	-13.00	-6.43	-20.15 Peak
2	5700.00	-34.47	-32.74	-13.00	-1.73	-21.47 Peak

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---