

SAR Test Report

Product Name : 802.11n USB Wireless Adapter

Model No. : UB811Rn, WUA-0603, ALL0233

Applicant : SerComm Corporation

Address : 8F, No.3-1, YuanQu St., Nankang, Taipei 115,
Taiwan, R.O.C.

Date of Receipt : 2008/07/10

Issued Date : 2008/09/12

Report No. : 087211R-HPUSP09V01

Version : V1.0

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date: 2008/09/12

Report No.:087211R-HPUSP09V01



Product Name : 802.11n USB Wireless Adapter
 Applicant : SerComm Corporation
 Address : 8F, No.3-1, YuanQu St., Nankang, Taipei 115,
 Taiwan, R.O.C.
 Manufacturer : Advantech CO., Ltd.
 Trade Name : SerComm
 Model No. : UB811Rn, WUA-0603, ALL0233
 Applicable Standard : FCC Oet65 Supplement C June 2001
 IEEE Std. 1528-2003 47CFR § 2.1093
 Test Result : Max. SAR Measurement (1g)
 0.645 W/kg

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Documented By :

Nicole Huang

(Engineering Adm. Assistant
 / Nicole Huang)

Tested By :

Jung Chang

(Engineer / Jung Chang)

Approved By :

Vincent Lin

(Manager / Vincent Lin)

TABLE OF CONTENTS

| Description | Page |
|---|------|
| 1. General Information | 5 |
| 1.1 EUT Description | 5 |
| 1.2 Test Environment | 6 |
| 2. SAR Measurement System | 7 |
| 2.1 ALSAS-10U System Description | 7 |
| 2.1.1 Applications | 7 |
| 2.1.2 Area Scans..... | 7 |
| 2.1.3 Zoom Scan (Cube Scan Averaging)..... | 8 |
| 2.1.4 ALSAS-10U Interpolation and Extrapolation Uncertainty..... | 8 |
| 2.2 Isotropic E-Field Probe | 8 |
| 2.2.1 Isotropic E-Field Probe Specification..... | 10 |
| 2.3 Boundary Detection Unit and Probe Mounting Device..... | 10 |
| 2.4 Daq-Paq (Analog to Digital Electronics)..... | 11 |
| 2.5 Axis Articulated Robot | 11 |
| 2.6 ALSAS Universal Workstation..... | 12 |
| 2.7 Universal Device Positioner..... | 12 |
| 2.8 Phantom Types..... | 12 |
| 2.8.1 APREL SAM Phantoms | 13 |
| 2.8.2 APREL Laboratories Universal Phantom..... | 13 |
| 3. Tissue Simulating Liquid | 14 |
| 3.1 The composition of the tissue simulating liquid | 14 |
| 3.2 Tissue Calibration Result | 14 |
| 3.3 Tissue Dielectric Parameters for Head and Body Phantoms | 16 |
| 4. SAR Measurement Procedure..... | 17 |
| 4.1 SAR System Validation..... | 17 |
| 4.1.1 Validation Dipoles..... | 17 |
| 4.1.2 Validation Result..... | 17 |
| 4.2 SAR Measurement Procedure..... | 18 |
| 5. SAR Exposure Limits..... | 19 |
| 6. Test Equipment List | 20 |
| 7. Measurement Uncertainty..... | 21 |
| 8. Test Results | 22 |

| | |
|--|----|
| 8.1 SAR Test Results Summary | 22 |
| Appendix..... | 23 |
| Appendix A. SAR System Validation Data | |
| Appendix B. SAR measurement Data | |
| Appendix C. Test Setup Photographs & EUT Photographs | |
| Appendix D. Probe Calibration Data | |
| Appendix E. Dipole Calibration Data | |

1. General Information

1.1 EUT Description

| | |
|----------------------------------|--|
| Product Name | 802.11n USB Wireless Adapter |
| Model No. | UB811Rn, WUA-0603, ALL0233 |
| FCC ID | P27UB811RN |
| TX Frequency | 2412MHz~2462MHz |
| RX Frequency | 2412MHz~2462MHz |
| Antenna Type | Fixed |
| Device Category | Portable |
| RF Exposure Environment | Uncontrolled |
| Max. Output Power (Conducted) | 802.11b: 18.12dBm 802.11g: 14.80dBm 802.11n(HT20): 14.60dBm 802.11n(HT40): 14.78dBm |

Note: The EUT is including three models for different marketing requirement.

1.2 Test Environment

Ambient conditions in the laboratory:

Test Date: Jul. 23, 2008

| Items | Required | Actual |
|------------------|----------|--------|
| Temperature (°C) | 18-25 | 21.1 |
| Humidity (%RH) | 30-70 | 52 |

Test Date: Sep. 11, 2008

| Items | Required | Actual |
|------------------|----------|--------|
| Temperature (°C) | 18-25 | 20.9 |
| Humidity (%RH) | 30-70 | 51 |

Site Description:

Accredited by TAF
Accredited Number: 0914
Effective through: December 12, 2008



Site Name: Quietek Corporation

Site Address: No. 5, Ruei-Shu Valley, Ruei-Ping Tsuen,
Lin-Kou Shiang, Taipei,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX: 886-2-8601-3789
E-Mail: service@quietek.com

2. SAR Measurement System

2.1 ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller.

ALSAS-10U uses the latest methodologies and FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

2.1.1 Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

2.1.2 Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.



2.1.3 Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.

2.1.4 ALSAS-10U Interpolation and Extrapolation Uncertainty

The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:


$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

2.2 Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change. A number of methods is used for calibrating probes, and these are outlined in the table below:

| Calibration Frequency | Air Calibration | Tissue Calibration |
|-----------------------|-----------------|--------------------|
| 2450MHz | TEM Cell | Temperature |

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

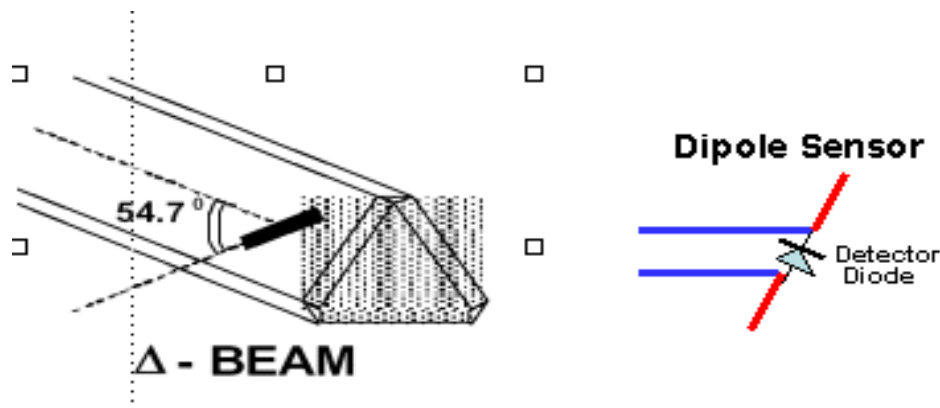

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

2.2.1 Isotropic E-Field Probe Specification

| | |
|--------------------------------------|--|
| Calibration in Air | Frequency Dependent Below 2GHz Calibration in air performed in a TEM Cell Above 2GHz Calibration in air performed in waveguide |
| Sensitivity | 0.70 $\mu\text{V}/(\text{V}/\text{m})^2$ to 0.85 $\mu\text{V}/(\text{V}/\text{m})^2$ |
| Dynamic Range | 0.0005 W/kg to 100W/kg |
| Isotropic Response | Better than 0.2dB |
| Diode Compression point (DCP) | Calibration for Specific Frequency |
| Probe Tip Radius | < 5mm |
| Sensor Offset | 1.56 (+/- 0.02mm) |
| Probe Length | 290mm |
| Video Bandwidth | @ 500 Hz: 1dB @1.02 KHz: 3dB |
| Boundary Effect | Less than 2% for distance greater than 2.4mm |
| Spatial Resolution | Diameter less than 5mm Compliant with Standards |

2.3 Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

2.4 Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5 μ V to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

| | |
|---------------------------------|---|
| ADC | 12 Bit |
| Amplifier Range | 20mV to 200mV and 150mV to 800mV |
| Field Integration | Local Co-Processor utilizing proprietary integration algorithms |
| Number of Input Channels | 4 in total 3 dedicated and 1 spare |
| Communication | Packet data via RS232 |

2.5 Axis Articulated Robot



ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.

| | |
|--------------------------------------|-----------------------------------|
| Robot/Controller Manufacturer | Thermo CRS |
| Number of Axis | Six independently controlled axis |
| Positioning Repeatability | 0.05mm |
| Controller Type | Single phase Pentium based C500C |
| Robot Reach | 710mm |
| Communication | RS232 and LAN compatible |

2.6 ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

2.7 Universal Device Positioner

The universal device positioner allow complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.




2.8 Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

2.8.1 APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

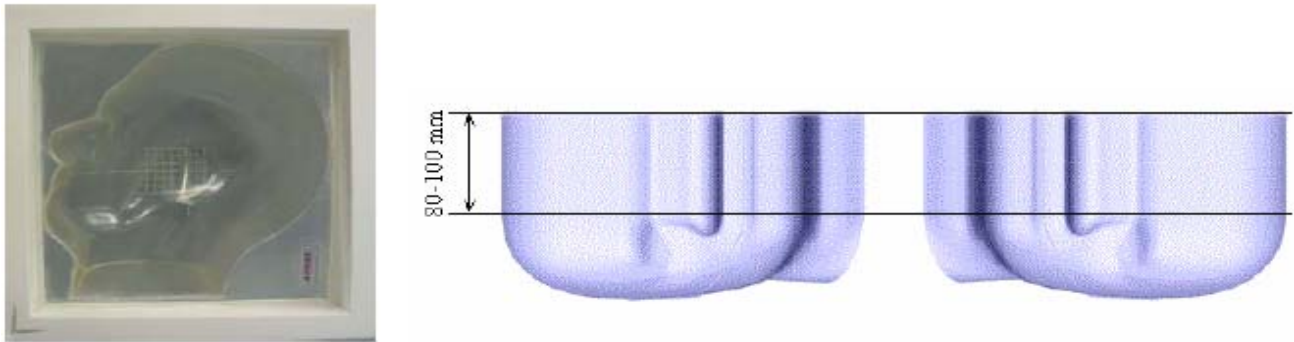

2.8.2 APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software. The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



3. Tissue Simulating Liquid

3.1 The composition of the tissue simulating liquid

| INGREDIENT (% Weight) | 2450MHz Head | 2450MHz Body | 5200MHz Head | 5200MHz Body | 5800MHz Head | 5800MHz Body |
|--------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Water | 46.7 | 73.2 | -- | -- | -- | -- |
| Salt | 0.00 | 0.04 | -- | -- | -- | -- |
| Sugar | 0.00 | 0.00 | -- | -- | -- | -- |
| HEC | 0.00 | 0.00 | -- | -- | -- | -- |
| Preventol | 0.00 | 0.00 | -- | -- | -- | -- |
| DGBE | 53.3 | 26.7 | -- | -- | -- | -- |
| Triton X-100 | 0.00 | 0.00 | -- | -- | -- | -- |

3.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using APREL Dielectric Probe Kit and Anritsu MS4623B Vector Network Analyzer.

| Head Tissue Simulant Measurement | | | | |
|----------------------------------|--------------------------------------|--------------------------|------------------------|----------------------|
| Frequency [MHz] | Description | Dielectric Parameters | | Tissue Temp. [°C] |
| | | ϵ_r | σ [s/m] | |
| 2450MHz | Reference result $\pm 5\%$ window | 40.1 38.095 to 42.105 | 1.78 1.691 to 1.869 | N/A |
| | 23-Jul-08 | 41.13 | 1.81 | 20.3 |
| | 11-Sep-08 | 41.36 | 1.82 | 20.2 |

| Body Tissue Simulant Measurement | | | | |
|----------------------------------|--------------------------------------|--------------------------|--------------------------|----------------------|
| Frequency [MHz] | Description | Dielectric Parameters | | Tissue Temp. [°C] |
| | | ϵ_r | σ [s/m] | |
| 2450MHz | Reference result $\pm 5\%$ window | 52.7 50.065 to 55.335 | 1.95 1.8525 to 2.0475 | N/A |
| | 23-Jul-08 | 53.36 | 1.96 | 20.3 |
| 2412 MHz | Low channel | 53.47 | 1.95 | 20.3 |
| 2437 MHz | Mid channel | 53.41 | 1.96 | 20.3 |
| 2462 MHz | High channel | 53.24 | 1.97 | 20.3 |

| Body Tissue Simulant Measurement | | | | |
|----------------------------------|---------------------------------|--------------------------|--------------------------|-------------------|
| Frequency [MHz] | Description | Dielectric Parameters | | Tissue Temp. [°C] |
| | | ϵ_r | σ [s/m] | |
| 2450MHz | Reference result ± 5% window | 52.7 50.065 to 55.335 | 1.95 1.8525 to 2.0475 | N/A |
| | 11-Sep-08 | 53.77 | 1.96 | 20.2 |
| 2412 MHz | Low channel | 53.97 | 1.96 | 20.2 |
| 2437 MHz | Mid channel | 53.90 | 1.96 | 20.2 |
| 2462 MHz | High channel | 53.82 | 1.97 | 20.2 |
| | | | | |

3.3 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.


| Target Frequency | Head | | Body | |
|------------------|--------------|----------------|--------------|----------------|
| (MHz) | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) |
| 150 | 52.3 | 0.76 | 61.9 | 0.80 |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.90 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55.0 | 1.05 |
| 915 | 41.5 | 0.98 | 55.0 | 1.06 |
| 1450 | 40.5 | 1.20 | 54.0 | 1.30 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.40 |
| 1800 – 2000 | 40.0 | 1.40 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.80 | 52.7 | 1.95 |
| 3000 | 38.5 | 2.40 | 52.0 | 2.73 |
| 5800 | 35.3 | 5.27 | 48.2 | 6.00 |

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

4. SAR Measurement Procedure

4.1 SAR System Validation

4.1.1 Validation Dipoles

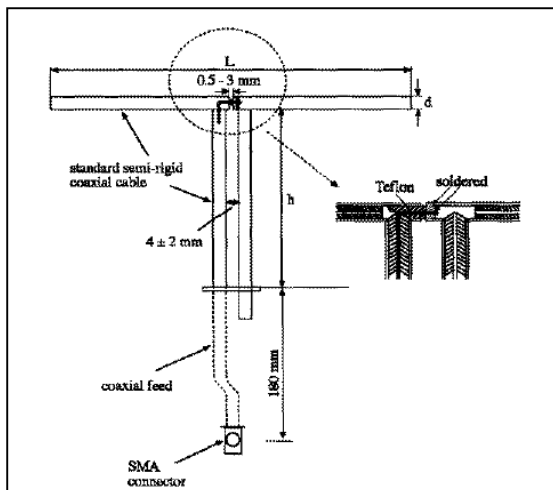

The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles.

| Frequency | L (mm) | h (mm) | d (mm) |
|-----------|--------|--------|--------|
| 2450MHz | 53.5 | 30.4 | 3.6 |

4.1.2 Validation Result

| System Performance Check at 2450MHz | | | | |
|--|---------------------------------|-----------------------------|-----------------------------|-------------------|
| Validation Kit: ASL-D-2450-S-2 | | | | |
| Frequency [MHz] | Description | SAR [w/kg] 1g | SAR [w/kg] 10g | Tissue Temp. [°C] |
| 2450 MHz | Reference result ± 5% window | 48.07 45.6665 to 50.4735 | 25.65 24.3675 to 26.9325 | N/A |
| | 23-Jul-08 | 47.964 | 25.827 | 20.3 |
| | 11-Sep-08 | 47.749 | 24.527 | 20.2 |
| Note: All SAR values are normalized to 1W forward power. | | | | |

4.2 SAR Measurement Procedure

The ALSAS-10U calculates SAR using the following equation,

$$SAR = \frac{\sigma |E|^2}{\rho}$$

σ : represents the simulated tissue conductivity

ρ : represents the tissue density

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm²) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm³).

5. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

| Type Exposure | Uncontrolled Environment Limit |
|--|---------------------------------------|
| Spatial Peak SAR (1g cube tissue for brain or body) | 1.60 W/kg |
| Spatial Average SAR (whole body) | 0.08 W/kg |
| Spatial Peak SAR (10g for hands, feet, ankles and wrist) | 4.00 W/kg |

6. Test Equipment List

| Instrument | Manufacturer | Model No. | Serial No. | Last Calibration | Next Calibration |
|---|--------------------|----------------|------------|------------------|------------------|
| Data Acquisition Package | Apriel | ALS-DAQ-PAQ-2 | QTK-337 | Nov. 2006 | only once |
| Apriel Laboratories Probe | Apriel | ALS-E020 | 265 | May. 2008 | May. 2009 |
| Apriel Reference Dipole 2450Mhz | Apriel | ALS-D-2450-S-2 | QTK-319 | May. 2008 | May. 2010 |
| Boundary Detection Sensor System | Apriel | ALS-PMDPS-2 | QTK-336 | N/A | N/A |
| Dielectric Probe Kit | Apriel | ALS-PR-DIEL | QTK-296 | N/A | N/A |
| Universal Work Station | Apriel | ALS-UWS | QTK-326 | N/A | N/A |
| Device Holder 2.0 | Apriel | ALS-H-E-SET-2 | QTK-294 | N/A | N/A |
| Left Ear SAM Phantom | Apriel | ALS-P-SAM-L | QTK-292 | N/A | N/A |
| Right Ear SAM Phantom | Apriel | ALS-P-SAM-R | QTK-288 | N/A | N/A |
| Universal Phantom | Apriel | ALS-P-UP-1 | QTK-246 | N/A | N/A |
| Apriel Dipole Spacer | Apriel | ALS-DS-U | QTK-295 | N/A | N/A |
| SAR Software | Apriel | ALSAS-10 | Ver. 2.3.6 | N/A | N/A |
| CRS C500C Controller | Thermo | ALS-C500 | RCF0404433 | N/A | N/A |
| CRF F3 Robot | Thermo | ALS-F3 | RAF0412222 | N/A | N/A |
| Power Amplifier | Mini-Circuit | ZHL-42 | D051404-20 | N/A | N/A |
| Directional Coupler | Agilent | 778D-012 | 50550 | N/A | N/A |
| Directional Coupler | Agilent | 87300C | 3239A01864 | N/A | N/A |
| Universal Radio Communication Tester | Rohde & Schwarz | CMU 200 | 104846 | Mar. 2008 | Mar. 2009 |
| Vector Network | Anritsu | MS4623B | 992801 | Apr. 2008 | Apr. 2009 |
| Signal Generator | Anritsu | MG3692A | 042319 | Jun. 2008 | Jun. 2009 |
| Power Meter | Anritsu | ML2487A | 6K00001447 | Apr. 2008 | Apr. 2009 |
| Wide Bandwidth Sensor | Anritsu | MA2491 | 030677 | Apr. 2008 | Apr. 2009 |

7. Measurement Uncertainty

Exposure Assessment Measurement Uncertainty

| Source of Uncertainty | Tolerance Value | Probability Distribution | Divisor | c_i^+ (1-g) | c_i^+ (10-g) | Standard Uncertainty (1-g) % | Standard Uncertainty (10-g) % |
|--|-----------------|--------------------------|------------|------------------|-------------------|---------------------------------|----------------------------------|
| Measurement System | | | | | | | |
| Probe Calibration | 3.5 | normal | 1 | 1 | 1 | 3.5 | 3.5 |
| Axial Isotropy | 3.7 | rectangular | $\sqrt{3}$ | $(1-cp)^{1/2}$ | $(1-cp)^{1/2}$ | 1.5 | 1.5 |
| Hemispherical Isotropy | 10.9 | rectangular | $\sqrt{3}$ | \sqrt{cp} | \sqrt{cp} | 4.4 | 4.4 |
| Boundary Effect | 1.0 | rectangular | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| Linearity | 4.7 | rectangular | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 |
| Detection Limit | 1.0 | rectangular | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| Readout Electronics | 1.0 | normal | 1 | 1 | 1 | 1.0 | 1.0 |
| Response Time | 0.8 | rectangular | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 |
| Integration Time | 1.7 | rectangular | $\sqrt{3}$ | 1 | 1 | 1.0 | 1.0 |
| RF Ambient Condition | 3.0 | rectangular | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 |
| Probe Positioner Mech. | 0.4 | rectangular | $\sqrt{3}$ | 1 | 1 | 0.2 | 0.2 |
| Restriction | | | | | | | |
| Probe Positioning with respect to Phantom Shell | 2.9 | rectangular | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 |
| Extrapolation and Integration | 3.7 | rectangular | $\sqrt{3}$ | 1 | 1 | 2.1 | 2.1 |
| Test Sample Positioning | 4.0 | normal | 1 | 1 | 1 | 4.0 | 4.0 |
| Device Holder Uncertainty | 2.0 | normal | 1 | 1 | 1 | 2.0 | 2.0 |
| Drift of Output Power | 4.7 | rectangular | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 |
| Phantom and Setup | | | | | | | |
| Phantom Uncertainty(shape & thickness tolerance) | 3.4 | rectangular | $\sqrt{3}$ | 1 | 1 | 2.0 | 2.0 |
| Liquid Conductivity(target) | 5.0 | rectangular | $\sqrt{3}$ | 0.7 | 0.5 | 2.0 | 1.4 |
| Liquid Conductivity(meas.) | 0.1 | normal | 1 | 0.7 | 0.5 | 0.1 | 0.0 |
| Liquid Permittivity(target) | 2.0 | rectangular | $\sqrt{3}$ | 0.6 | 0.5 | 0.7 | 0.6 |
| Liquid Permittivity(meas.) | 2.6 | normal | 1 | 0.6 | 0.5 | 1.6 | 1.3 |
| Combined Uncertainty | | RSS | | | | 9.6 | 9.5 |
| Combined Uncertainty (coverage factor=2) | | Normal(k=2) | | | | 19.3 | 18.9 |

8. Test Results

8.1 SAR Test Results Summary

| | | | | | | |
|---------------------------------------|---------------------|-----------|------|---------------------------|------------------|-----------------|
| | | | | | | |
| SAR MEASUREMENT | | | | | | |
| Ambient Temperature (°C): 21.1 ± 2 | | | | Relative Humidity (%): 52 | | |
| Liquid Temperature (°C): 20.3 ± 2 | | | | Depth of Liquid (cm):>15 | | |
| Product: 802.11n USB Wireless Adapter | | | | | | |
| Test Mode: 802.11b | | | | | | |
| Test Position Body | Antenna Position | Frequency | | Conducted Power (dBm) | SAR 1g (W/kg) | Limit (W/kg) |
| | | Channel | MHz | | | |
| Bottom | Fixed | 1 | 2412 | 17.92 | 0.645 | 1.6 |
| Bottom | Fixed | 6 | 2437 | 18.12 | 0.281 | 1.6 |
| Bottom | Fixed | 11 | 2462 | 19.11 | 0.398 | 1.6 |
| Front | Fixed | 6 | 2437 | 18.12 | 0.137 | 1.6 |
| Side-Left | Fixed | 6 | 2437 | 18.12 | 0.271 | 1.6 |
| Side-Right | Fixed | 6 | 2437 | 18.12 | 0.178 | 1.6 |
| Test Mode: 802.11g | | | | | | |
| Bottom | Fixed | 1 | 2412 | 14.07 | 0.156 | 1.6 |
| Bottom | Fixed | 6 | 2437 | 13.92 | ** | 1.6 |
| Bottom | Fixed | 11 | 2462 | 14.80 | ** | 1.6 |
| Test Mode: 802.11n(HT20) | | | | | | |
| Bottom | Fixed | 1 | 2412 | 14.60 | 0.224 | 1.6 |
| Bottom | Fixed | 6 | 2437 | 14.59 | ** | 1.6 |
| Bottom | Fixed | 11 | 2462 | 14.30 | ** | 1.6 |
| Test Mode: 802.11n(HT40) | | | | | | |
| Bottom | Fixed | 3 | 2422 | 14.78 | 0.093 | 1.6 |
| Bottom | Fixed | 6 | 2437 | 14.49 | ** | 1.6 |
| Bottom | Fixed | 9 | 2452 | 14.41 | ** | 1.6 |
| | | | | | | |

Appendix**Appendix A. SAR System Validation Data****Appendix B. SAR measurement Data****Appendix C. Test Setup Photographs & EUT Photographs****Appendix D. Probe Calibration Data****Appendix E. Dipole Calibration Data**

Appendix A. SAR System Validation Data

ALSAS-10U VER 2.3.6 APREL Laboratories
SAR Test Report

Report Date : 23-Jul-2008
Measurement Date : 23-Jul-2008

Product Data

Device Name : Dipole-2450
Type : Dipole
Frequency : 2450.00 MHz
Max. Transmit Pwr : 1 W
Drift Time : 0 min(s)
Length : 51.5 mm
Width : 3.6 mm
Depth : 30.4 mm
Antenna Type : Internal
Power Drift-Start : 16.864 W/kg
Power Drift-Finish: 17.245 W/kg
Power Drift (%) : 2.259

Phantom Data

Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data


Type : HEAD
Serial No. : 325-A
Frequency : 2450.00 MHz
Last Calib. Date : 23-Jul-2008
Temperature : 20.30 °C
Ambient Temp. : 21.10 °C
Humidity : 52.00 RH%
Epsilon : 41.13 F/m
Sigma : 1.81 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : Probe 265
Model : E020
Type : E-Field Triangle
Serial No. : 265
Last Calib. Date : 09-May-2008
Frequency : 2450.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 3.55
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Tissue Temp. : 20.30 °C
 Ambient Temp. : 21.10 °C
 Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Frequency : 2450 MHz

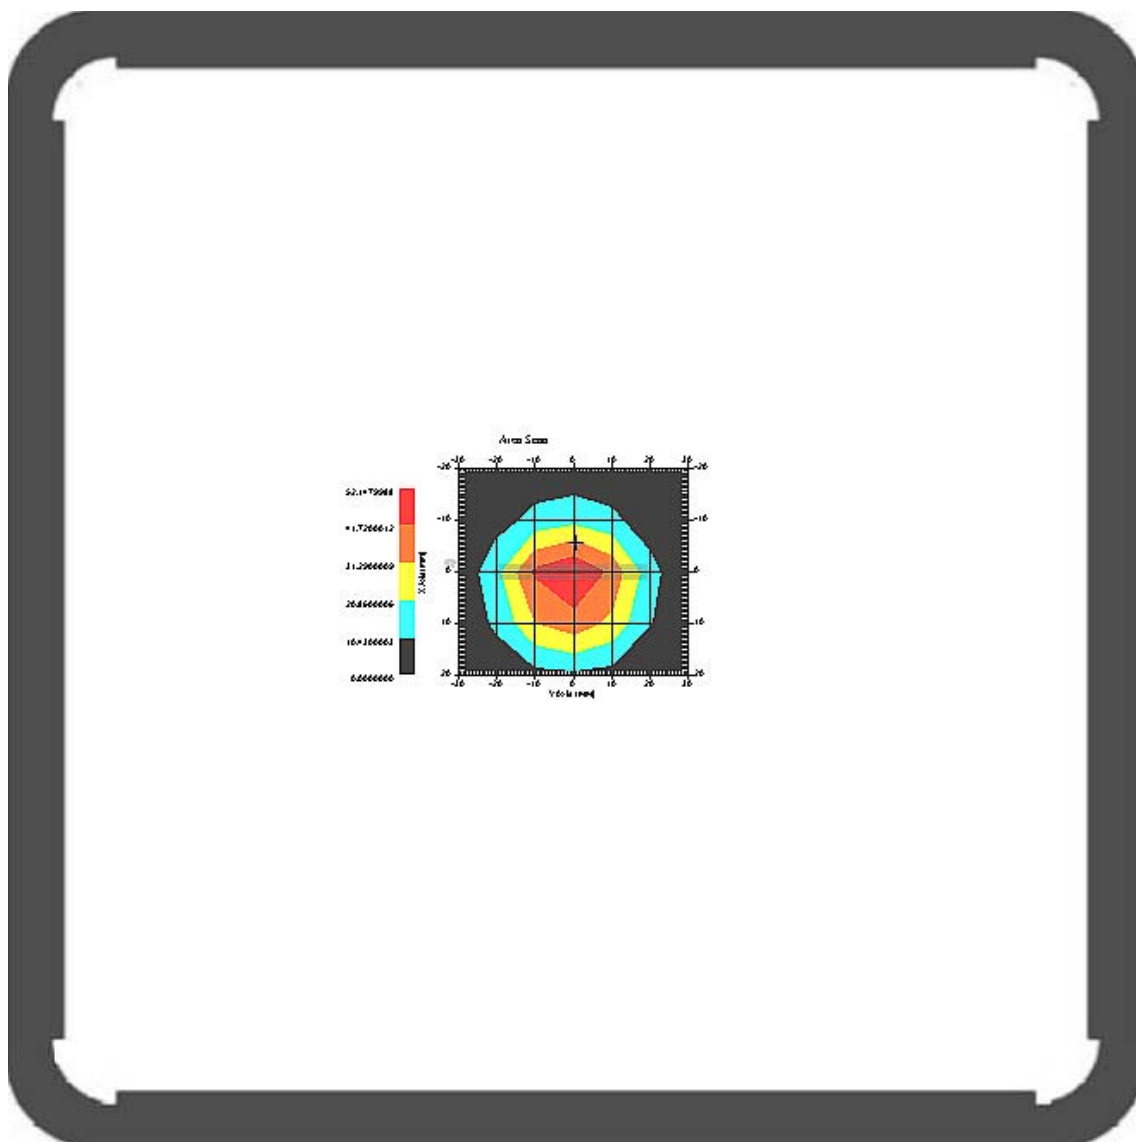

1 gram SAR value : 47.964 W/kg
 10 gram SAR value : 25.827 W/kg
 Area Scan Peak SAR : 52.154 W/kg
 Zoom Scan Peak SAR : 94.678 W/kg

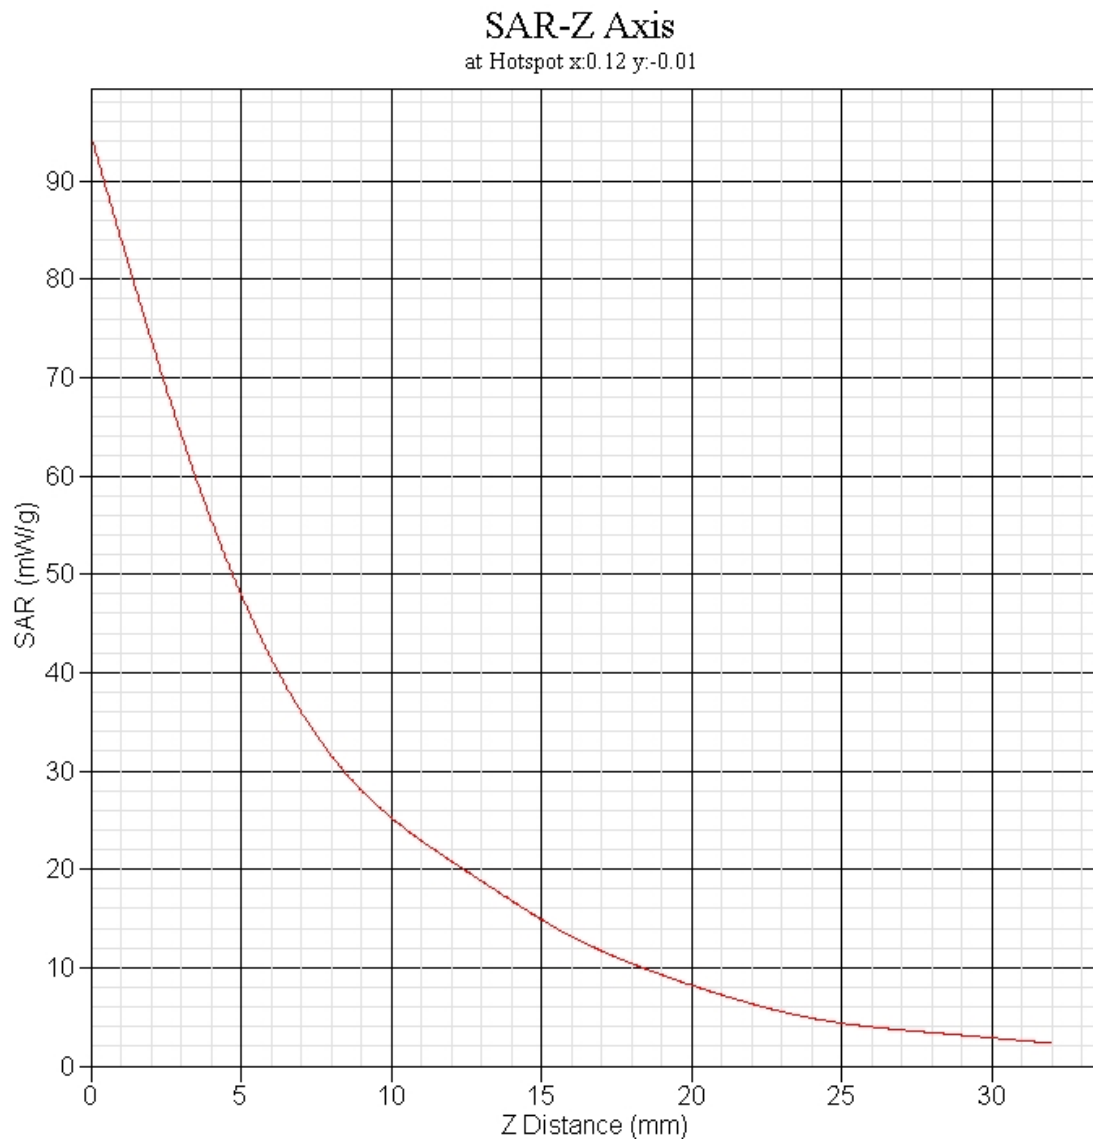

This is previous page plot (zoom in)

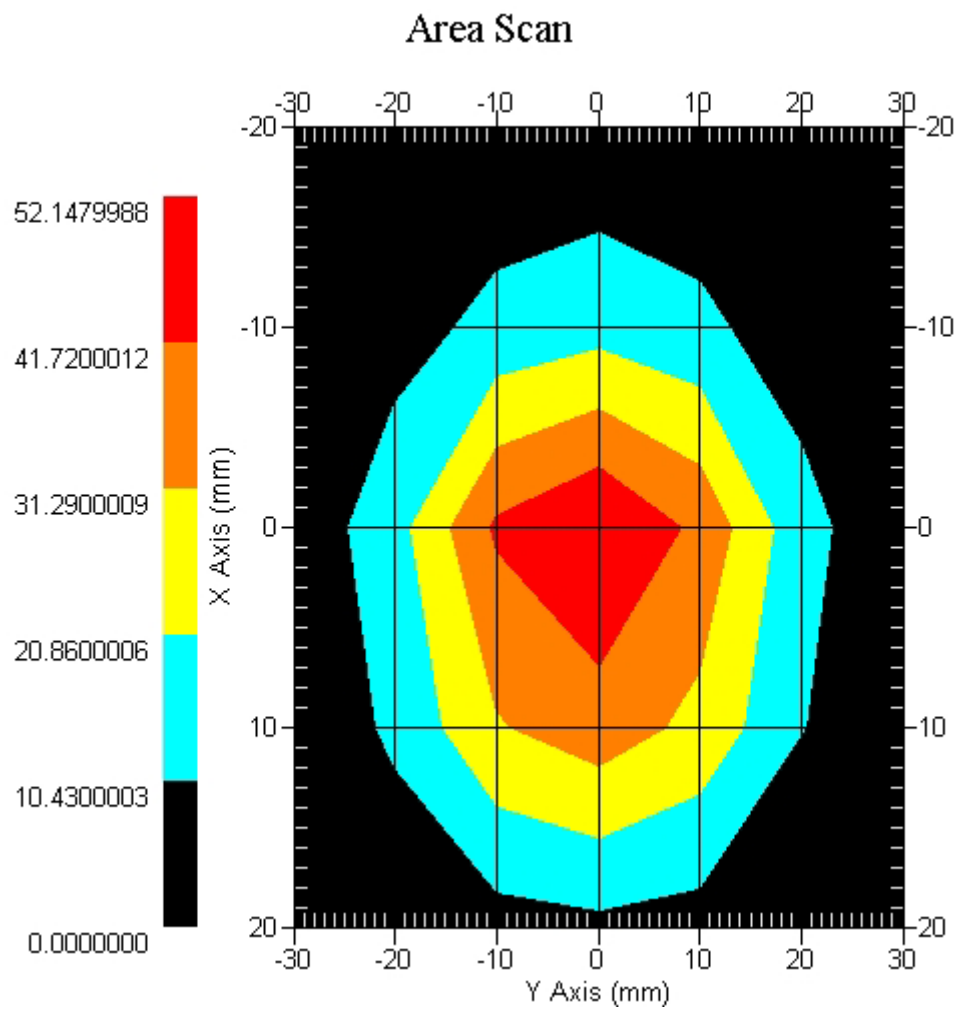

ALSAS-10U VER 2.3.6 APREL Laboratories
SAR Test Report

Report Date : 11-Sep-2008
Measurement Date : 11-Sep-2008

Product Data

Device Name : Dipole-2450
Type : Dipole
Frequency : 2450.00 MHz
Max. Transmit Pwr : 1 W
Drift Time : 0 min(s)
Length : 51.5 mm
Width : 3.6 mm
Depth : 30.4 mm
Power Drift-Start : 19.254 W/kg
Power Drift-Finish: 19.374 W/kg
Power Drift (%) : 0.623

Phantom Data

Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data


Type : HEAD
Serial No. : 325-H
Frequency : 2450.00 MHz
Last Calib. Date : 11-Sep-2008
Temperature : 20.20 °C
Ambient Temp. : 20.90 °C
Humidity : 51.00 RH%
Epsilon : 41.36 F/m
Sigma : 1.82 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : Probe 265
Model : E020
Type : E-Field Triangle
Serial No. : 265
Last Calib. Date : 21-Aug-2007
Frequency : 2450.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.2
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Temperature : 20.20 °C
 Ambient Temp. : 20.90 °C
 Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
 Frequency : 2450 MHz

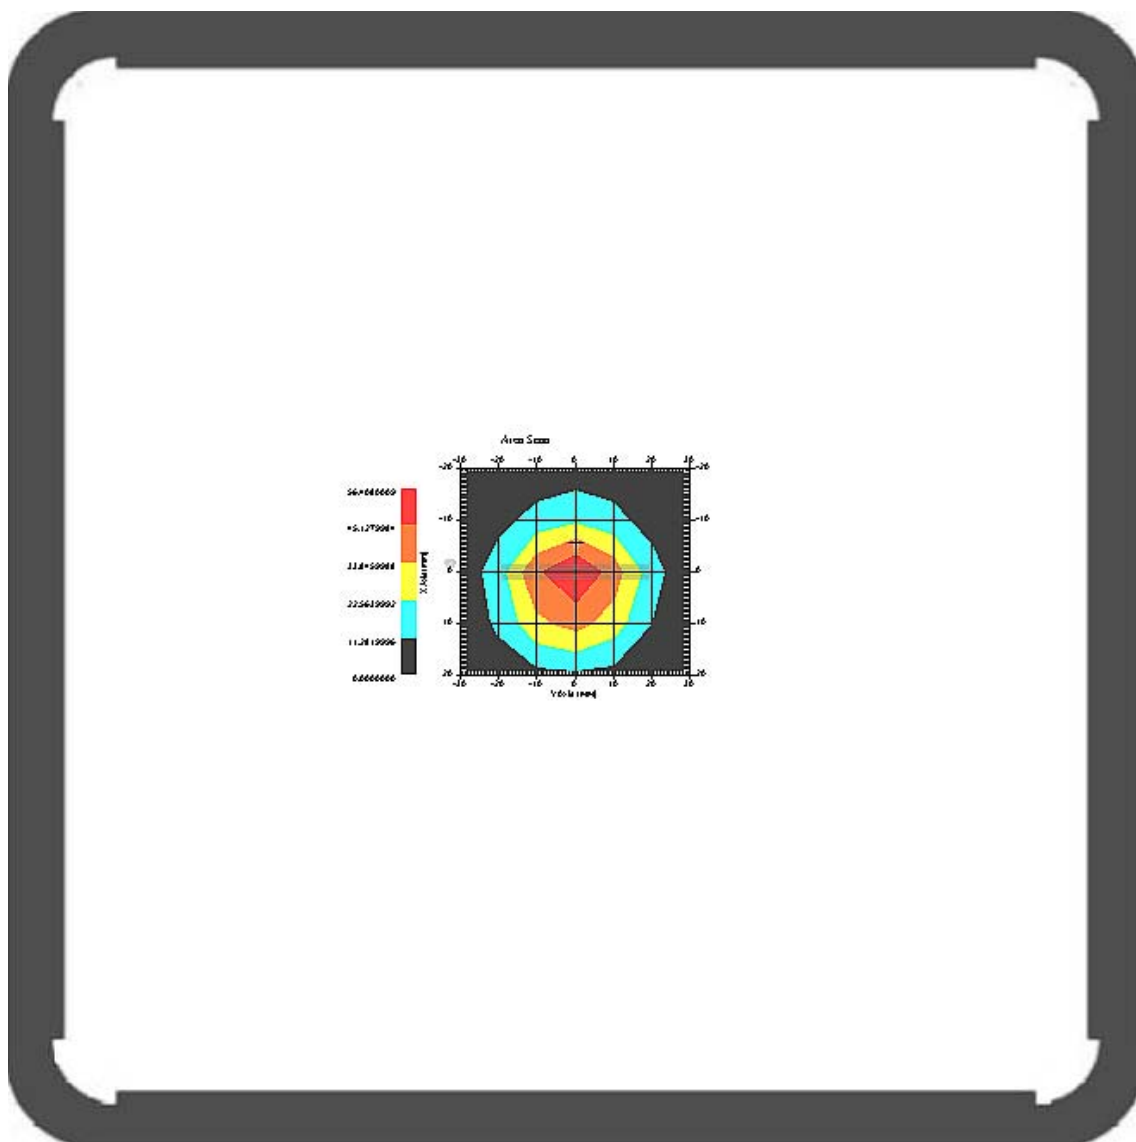

1 gram SAR value : 47.749 W/kg
 10 gram SAR value : 24.527 W/kg
 Area Scan Peak SAR : 56.414 W/kg
 Zoom Scan Peak SAR : 104.885 W/kg

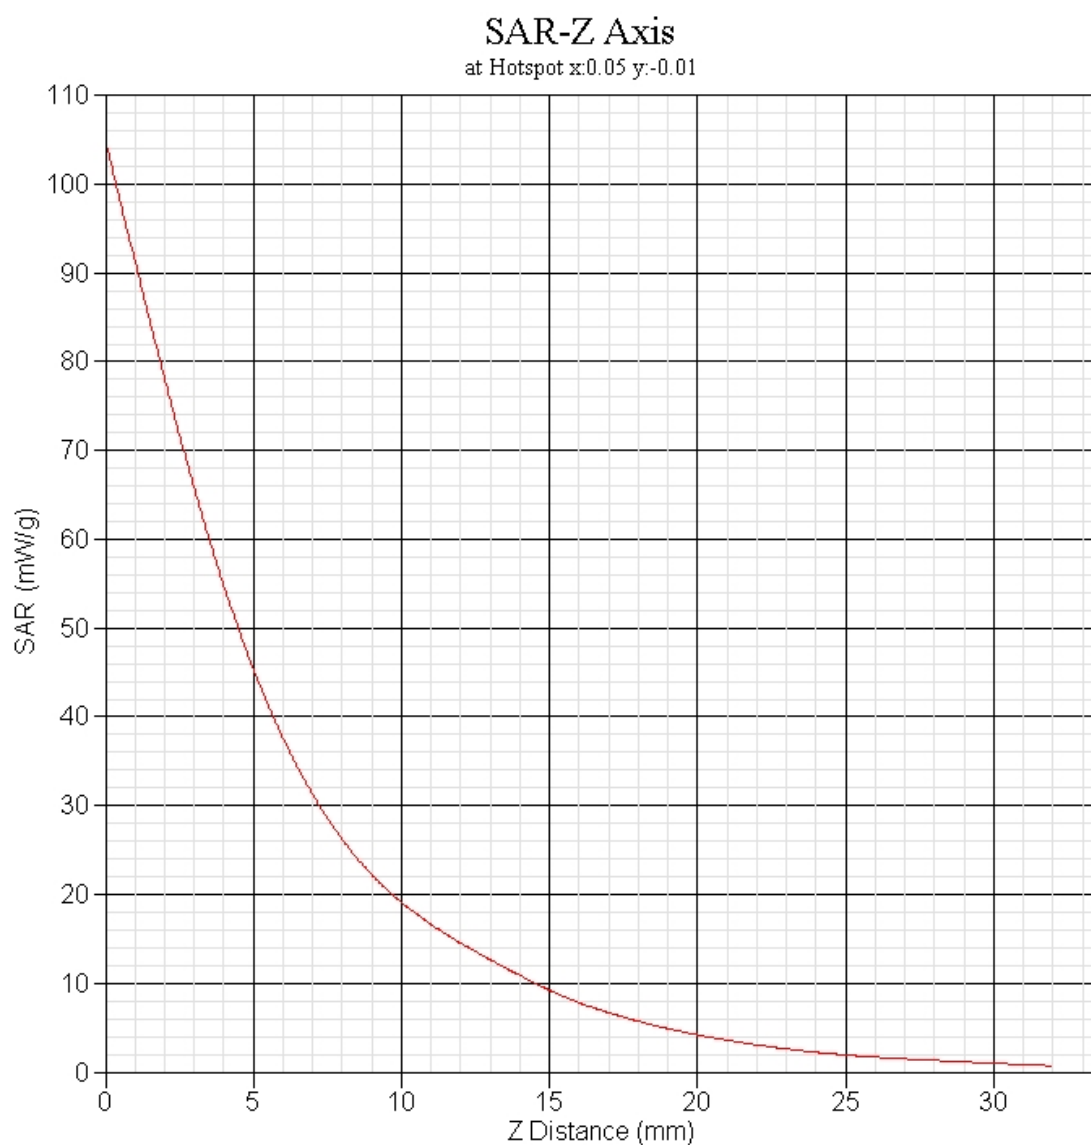

This is previous page plot (zoom in)

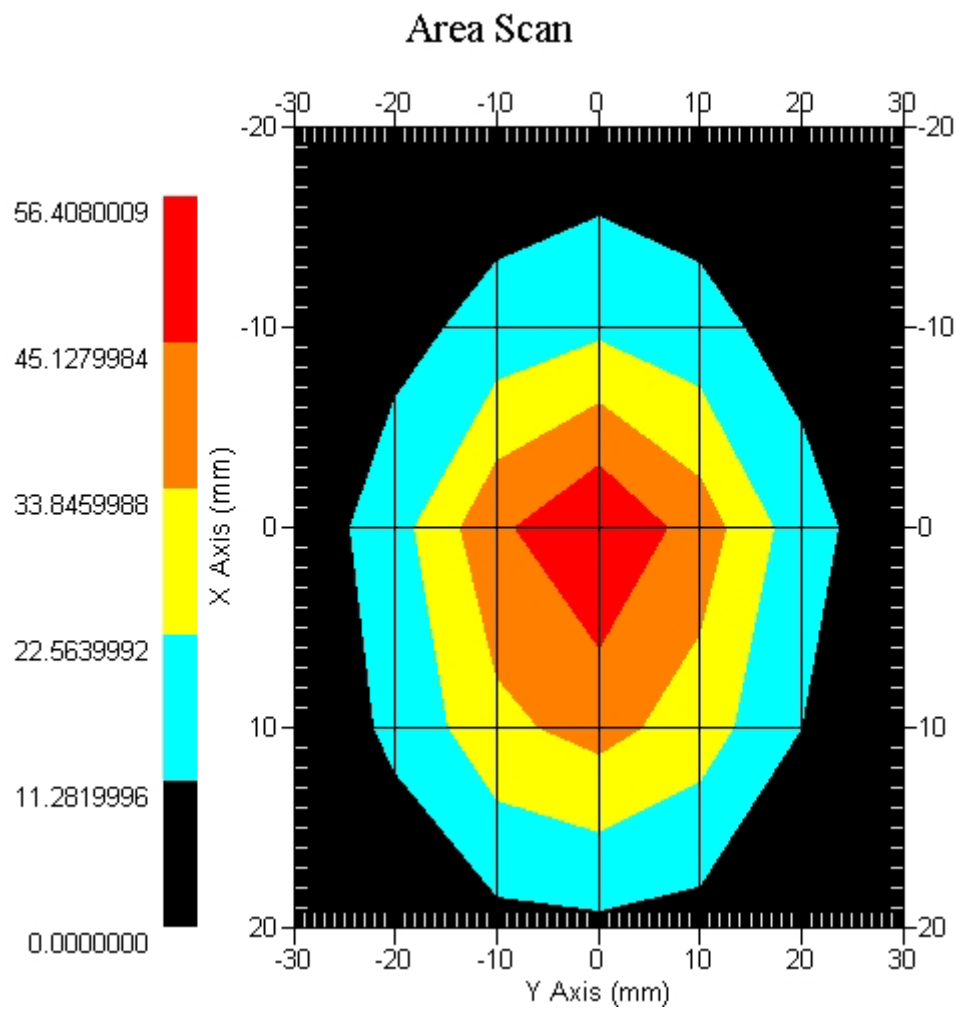

Appendix B. SAR measurement Data

ALSAS-10U VER 2.3.6 APREL Laboratories

SAR Test Report-802.11b

Report Date : 23-Jul-2008
Measurement Date : 23-Jul-2008

Product Data

Device Name : USB
Type : Other
Model : UB811Rn
Frequency : 2450.00 MHz
Drift Time : 0 min(s)
Length : 38 mm
Width : 21.6 mm
Depth : 7.4 mm
Antenna Type : Internal

Phantom Data

Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data

Type : BODY
Serial No. : 325-B
Frequency : 2450.00 MHz
Last Calib. Date : 23-Jul-2008
Temperature : 20.30 °C
Ambient Temp. : 21.10 °C
Humidity : 52.00 RH%
Epsilon : 53.36 F/m
Sigma : 1.96 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : Probe 265
Model : E020
Type : E-Field Triangle
Serial No. : 265
Last Calib. Date : 09-May-2008
Frequency : 2450.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 3.55
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Tissue Temp. : 20.30 °C
 Ambient Temp. : 21.10 °C
 Area Scan : 4x4x1 : Measurement x=12mm, y=12mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
 Power Drift-Start : 0.176 W/kg
 Power Drift-Finish: 0.182 W/kg
 Power Drift (%) : 3.409

DUT Position : Touch EUT Bottom
 Channel : 1

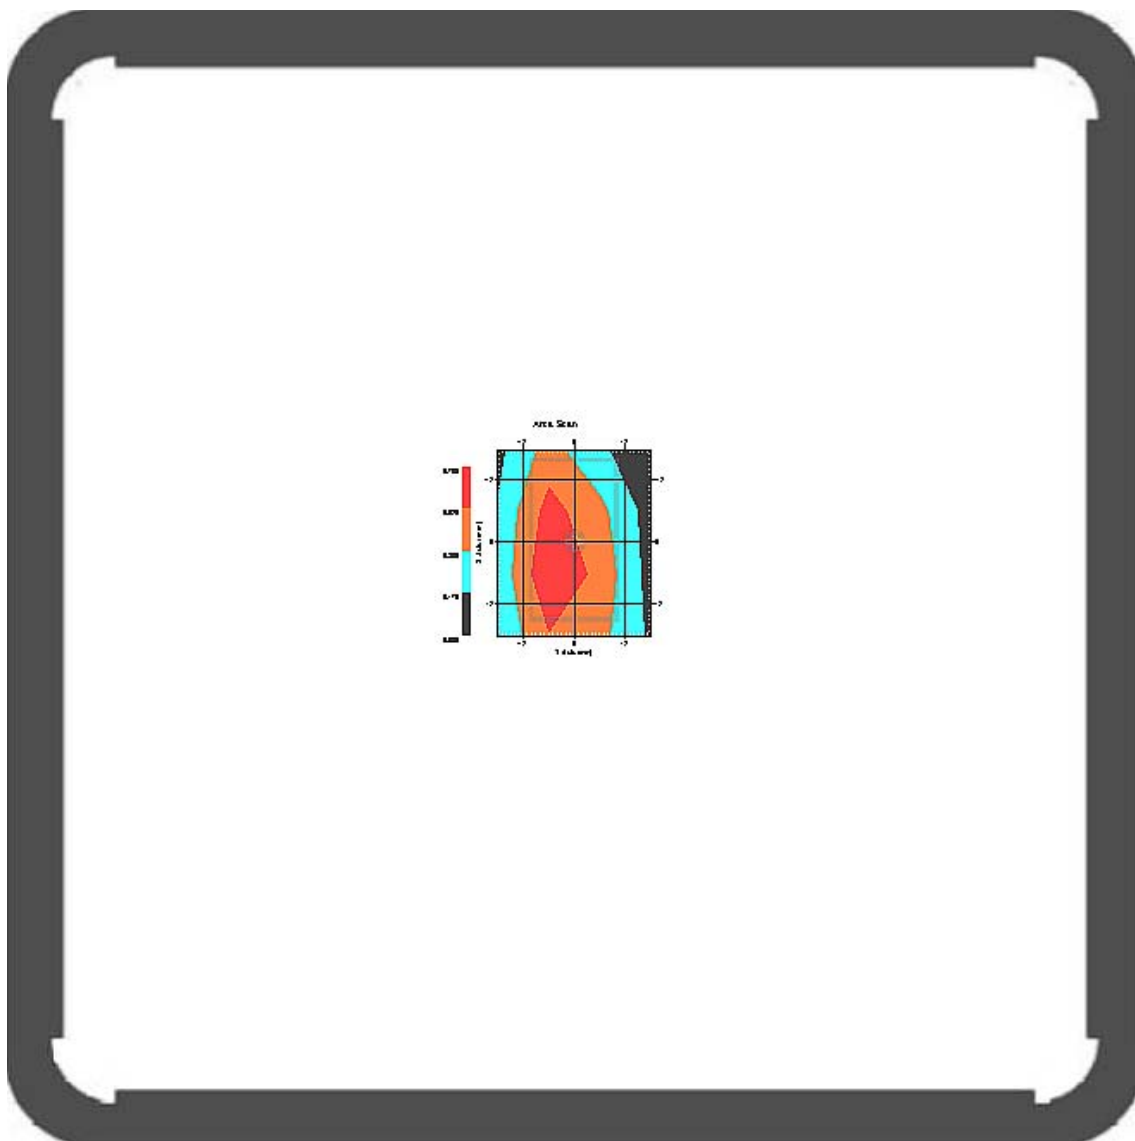

1 gram SAR value : 0.645 W/kg
 10 gram SAR value : 0.517 W/kg
 Area Scan Peak SAR : 0.700 W/kg
 Zoom Scan Peak SAR : 1.362 W/kg


This is previous page plot (zoom in)

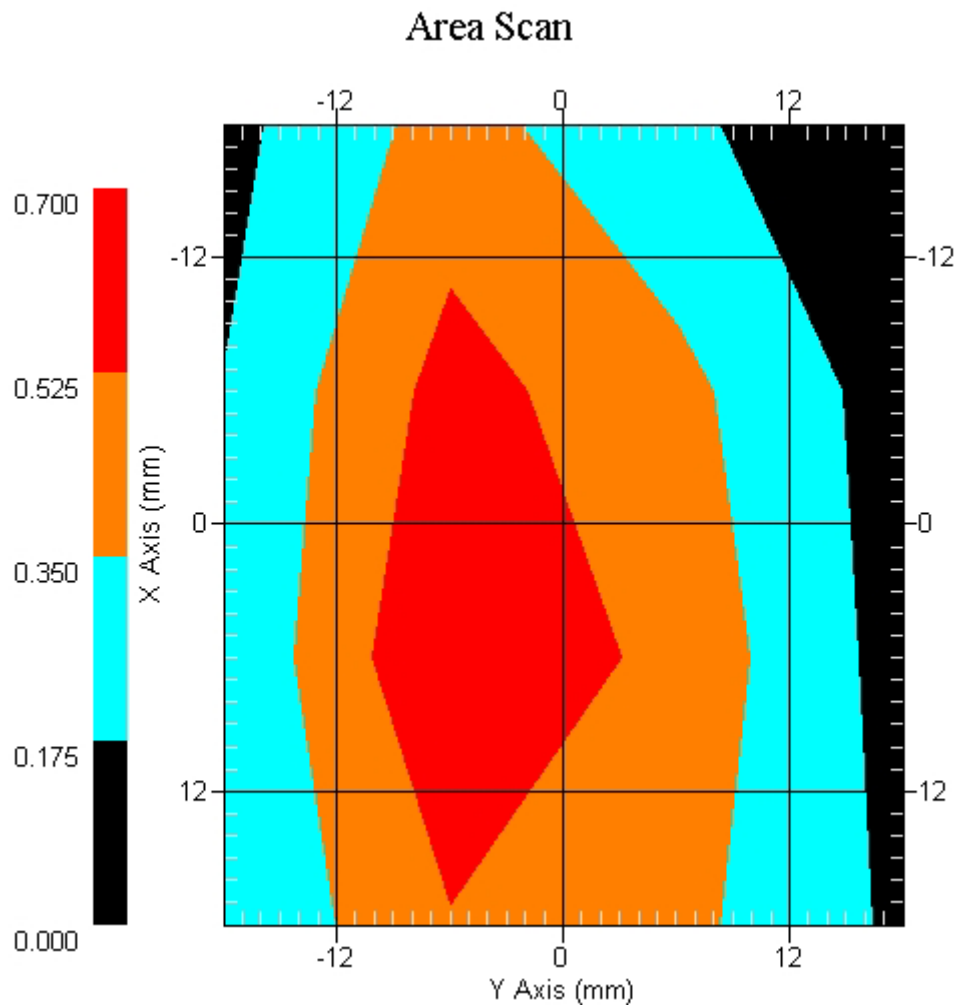

Measurement Data


Crest Factor : 1
 Tissue Temp. : 20.30 °C
 Ambient Temp. : 21.10 °C
 Area Scan : 4x4x1 : Measurement x=12mm, y=12mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
 Power Drift-Start : 0.142 W/kg
 Power Drift-Finish: 0.137 W/kg
 Power Drift (%) : -3.521

DUT Position : Touch EUT Bottom
 Channel : 6

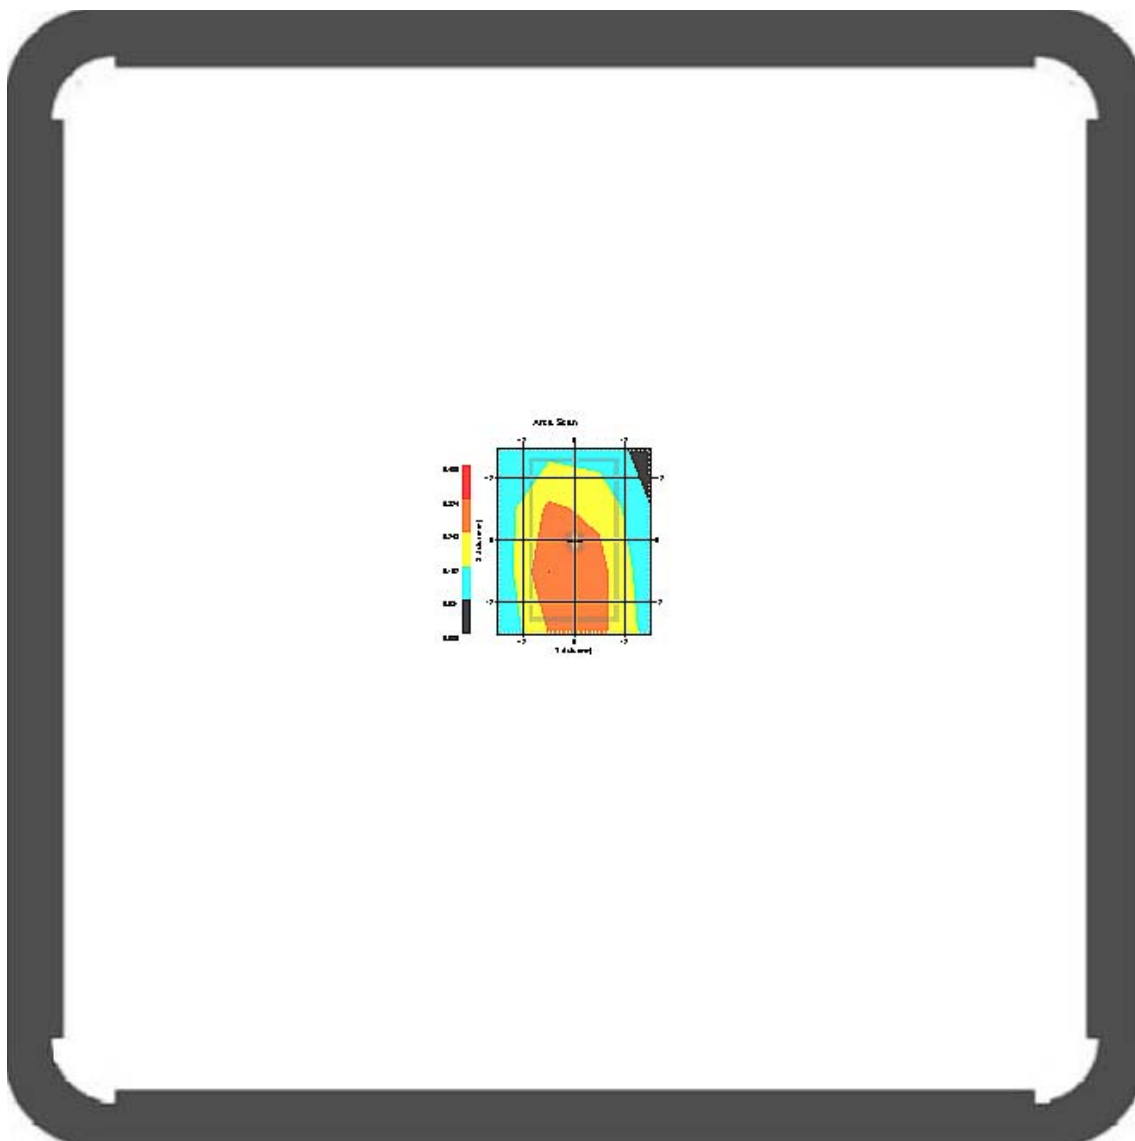

1 gram SAR value : 0.281 W/kg
 10 gram SAR value : 0.165 W/kg
 Area Scan Peak SAR : 0.325 W/kg
 Zoom Scan Peak SAR : 0.530 W/kg


This is previous page plot (zoom in)

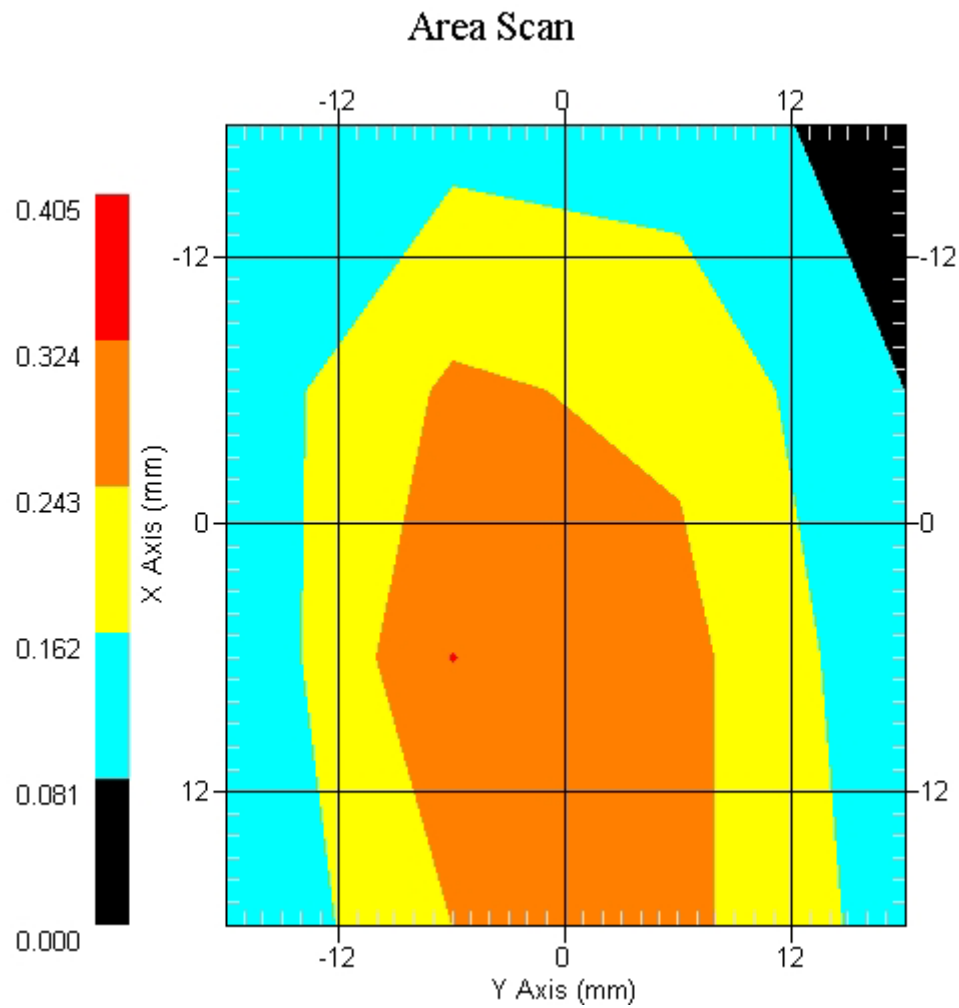

Measurement Data


Crest Factor : 1
 Tissue Temp. : 20.30 °C
 Ambient Temp. : 21.10 °C
 Area Scan : 4x4x1 : Measurement x=12mm, y=12mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
 Power Drift-Start : 0.064 W/kg
 Power Drift-Finish: 0.064 W/kg
 Power Drift (%) : -0.806

DUT Position : Touch EUT Bottom
 Channel : 11

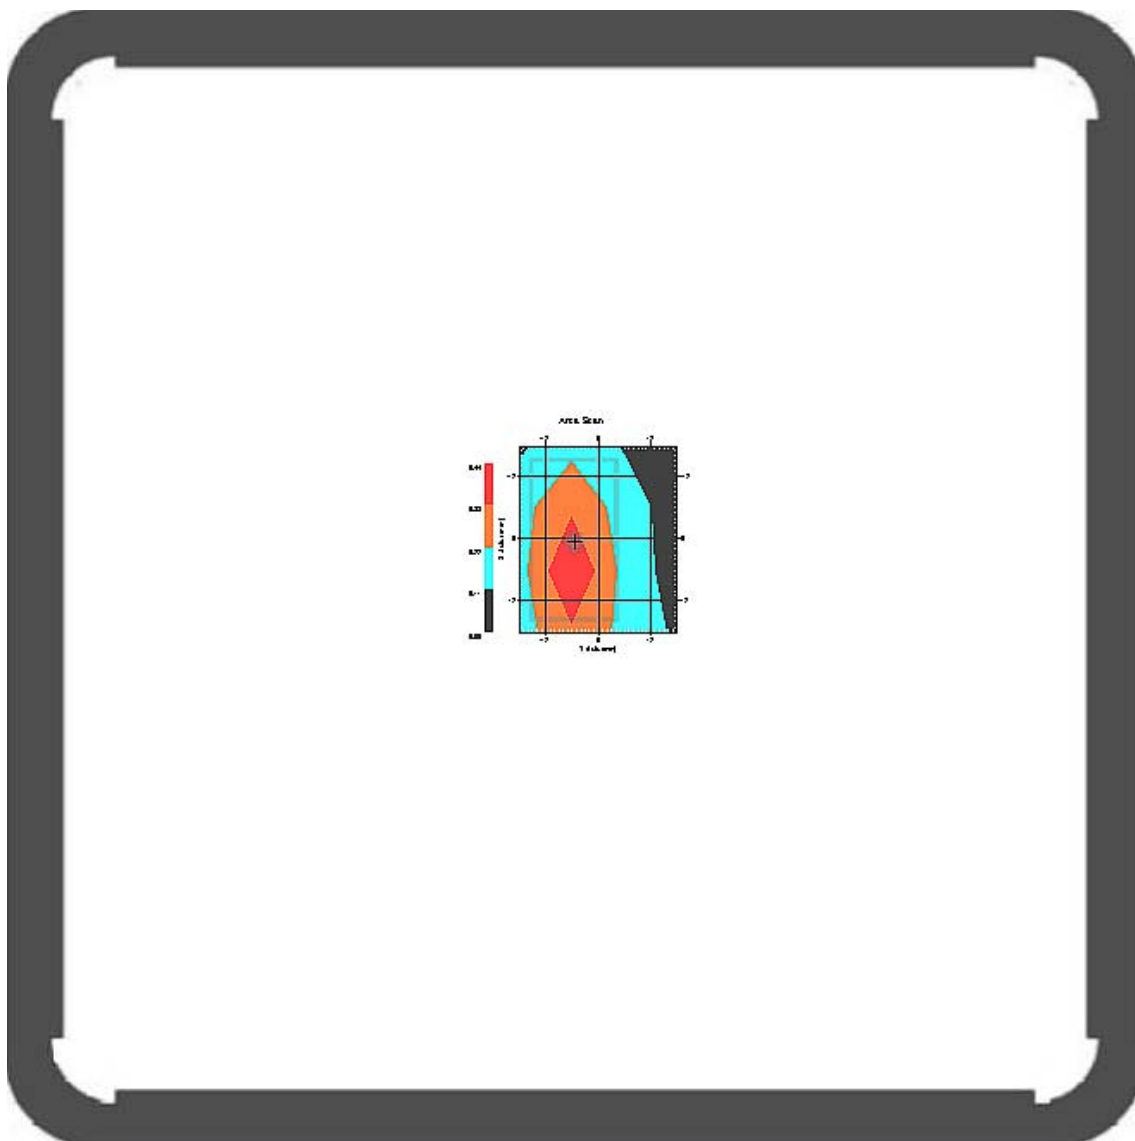

1 gram SAR value : 0.398 W/kg
 10 gram SAR value : 0.267 W/kg
 Area Scan Peak SAR : 0.440 W/kg
 Zoom Scan Peak SAR : 0.756 W/kg

This is previous page plot (zoom in)

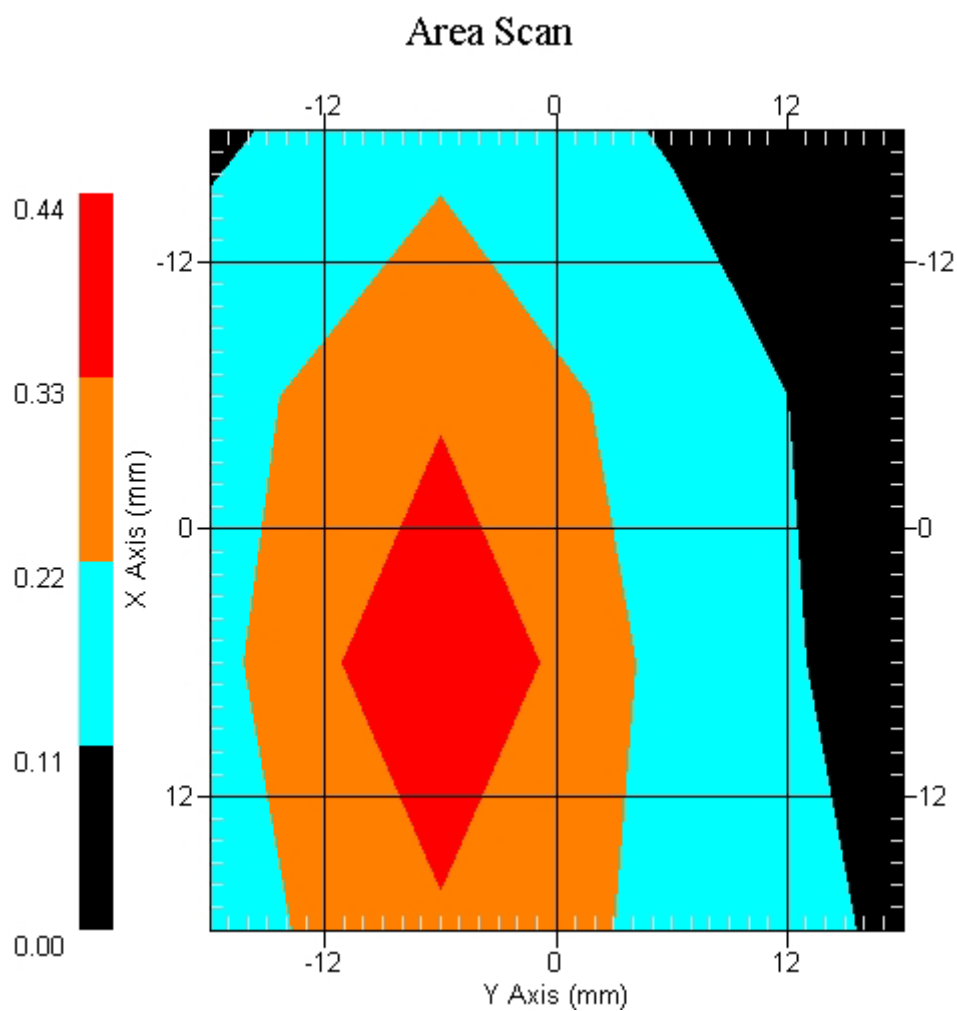

ALSAS-10U VER 2.3.6 APREL Laboratories

SAR Test Report-802.11b

Report Date : 11-Sep-2008
Measurement Date : 11-Sep-2008

Product Data

Device Name : USB
Type : Other
Model : UB811Rn
Frequency : 2450.00 MHz
Drift Time : 0 min(s)
Length : 38 mm
Width : 21.6 mm
Depth : 7.4 mm
Antenna Type : Internal

Phantom Data

Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data

Type : BODY
Serial No. : 325-B
Frequency : 2450.00 MHz
Last Calib. Date : 11-Sep-2008
Temperature : 20.20 °C
Ambient Temp. : 20.90 °C
Humidity : 51.00 RH%
Epsilon : 53.97 F/m
Sigma : 1.96 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : Probe 265
Model : E020
Type : E-Field Triangle
Serial No. : 265
Last Calib. Date : 09-May-2008
Frequency : 2450.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 3.55
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Tissue Temp. : 20.20 °C
 Ambient Temp. : 20.90 °C
 Area Scan : 6x6x1 : Measurement x=12mm, y=12mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
 Power Drift-Start : 0.188 W/kg
 Power Drift-Finish: 0.190 W/kg
 Power Drift (%) : 1.325

DUT Position : Touch EUT Front
 Channel : 6

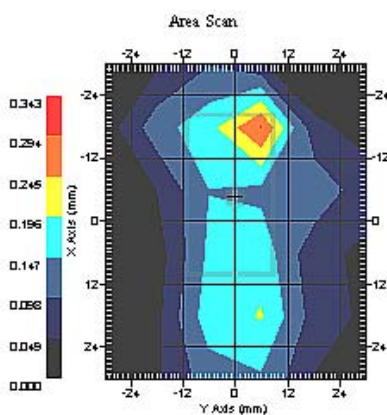

1 gram SAR value : 0.137 W/kg
 10 gram SAR value : 0.074 W/kg
 Area Scan Peak SAR : 0.295 W/kg
 Zoom Scan Peak SAR : 0.340 W/kg

This is previous page plot (zoom in)

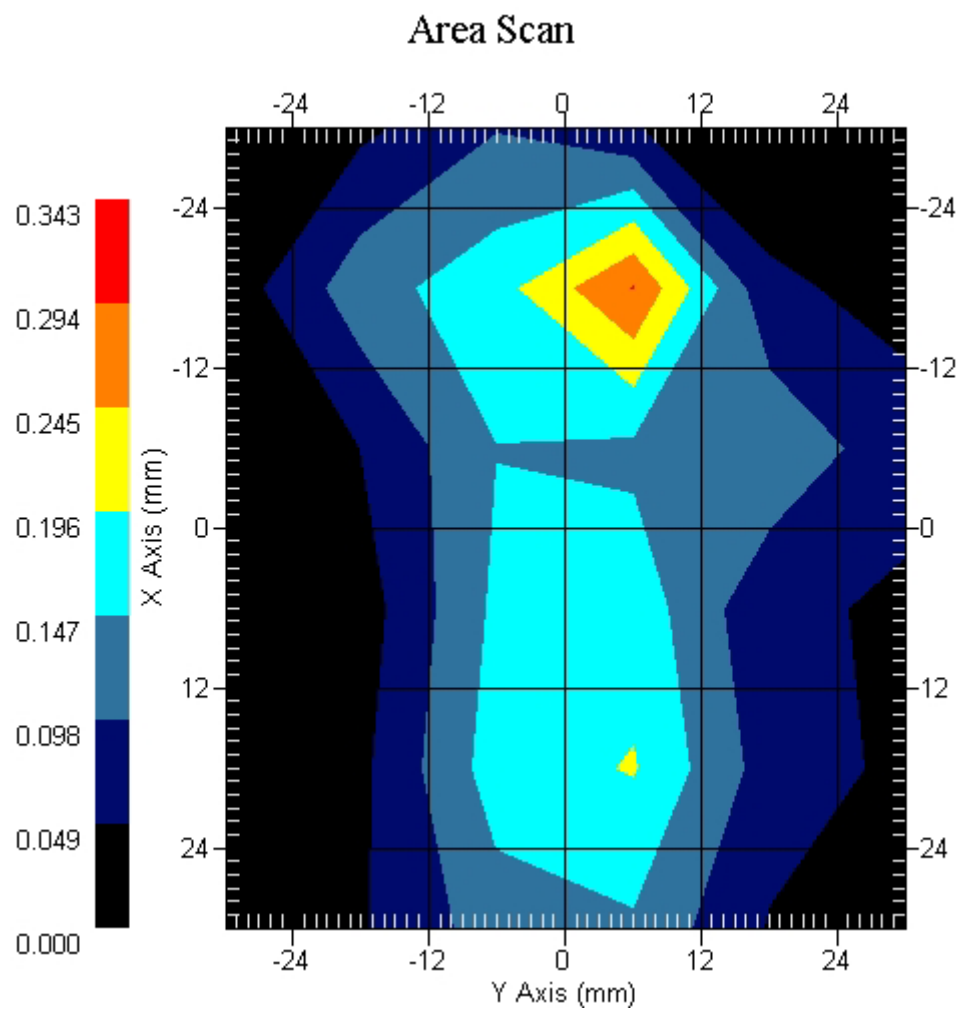

ALSAS-10U VER 2.3.6 APREL Laboratories
SAR Test Report-802.11b

Report Date : 11-Sep-2008
Measurement Date : 11-Sep-2008

Product Data

Device Name : USB
Type : Other
Model : UB811Rn
Frequency : 2450.00 MHz
Drift Time : 0 min(s)
Length : 38 mm
Width : 7.4 mm
Depth : 21.6 mm
Antenna Type : Internal

Phantom Data

Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data

Type : BODY
Serial No. : 325-B
Frequency : 2450.00 MHz
Last Calib. Date : 11-Sep-2008
Temperature : 20.20 °C
Ambient Temp. : 20.90 °C
Humidity : 51.00 RH%
Epsilon : 53.97 F/m
Sigma : 1.96 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : Probe 265
Model : E020
Type : E-Field Triangle
Serial No. : 265
Last Calib. Date : 09-May-2008
Frequency : 2450.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 3.55
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Tissue Temp. : 20.20 °C
 Ambient Temp. : 20.90 °C
 Area Scan : 6x5x1 : Measurement x=12mm, y=12mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
 Power Drift-Start : 0.200 W/kg
 Power Drift-Finish: 0.197 W/kg
 Power Drift (%) : -1.174

DUT Position : Touch EUT Side-Left
 Channel : 6

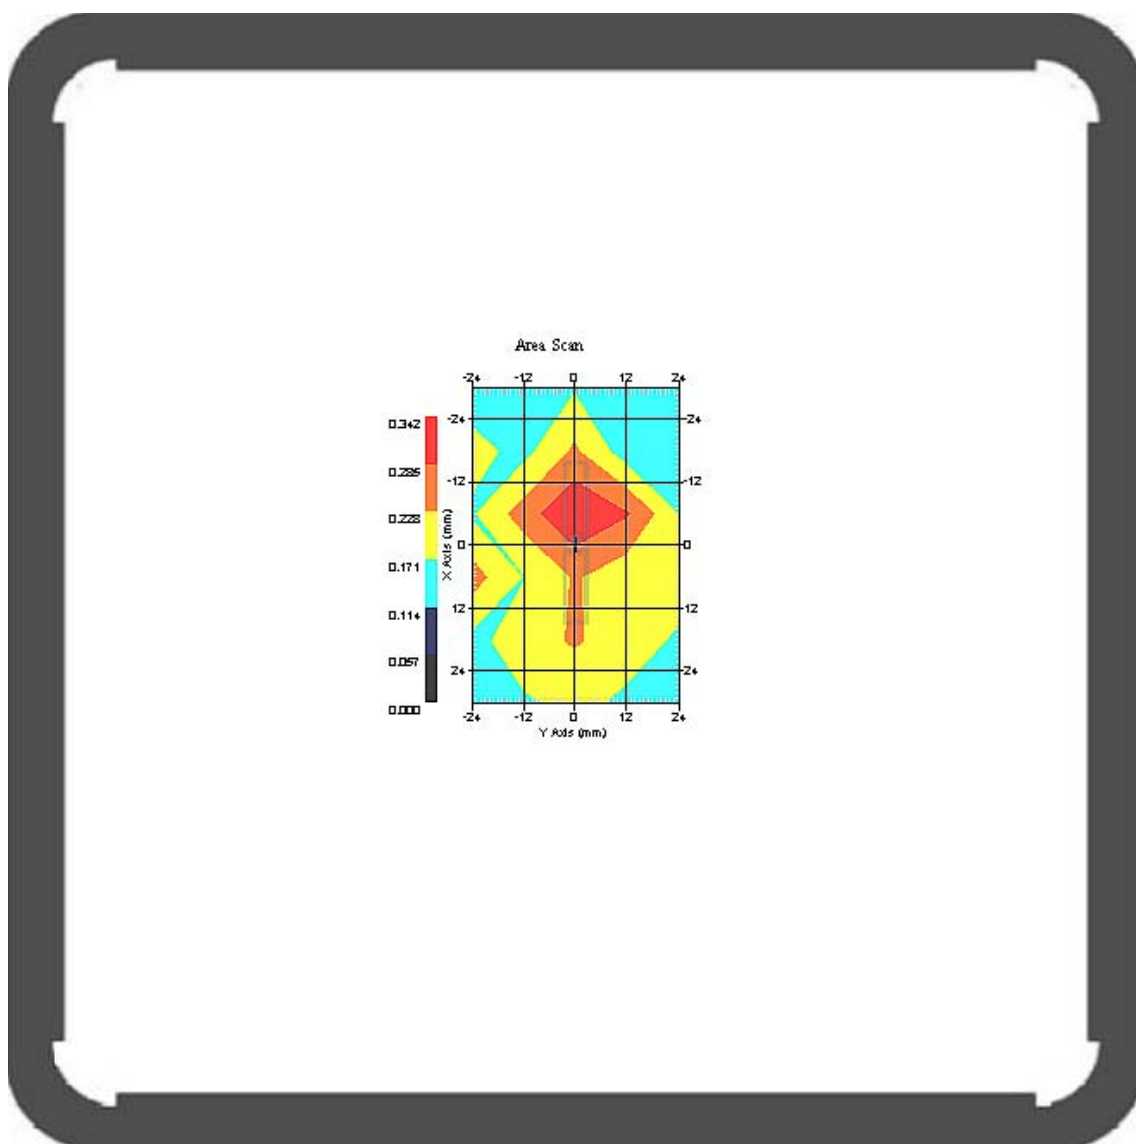

1 gram SAR value : 0.271 W/kg
 10 gram SAR value : 0.197 W/kg
 Area Scan Peak SAR : 0.340 W/kg
 Zoom Scan Peak SAR : 0.370 W/kg

This is previous page plot (zoom in)

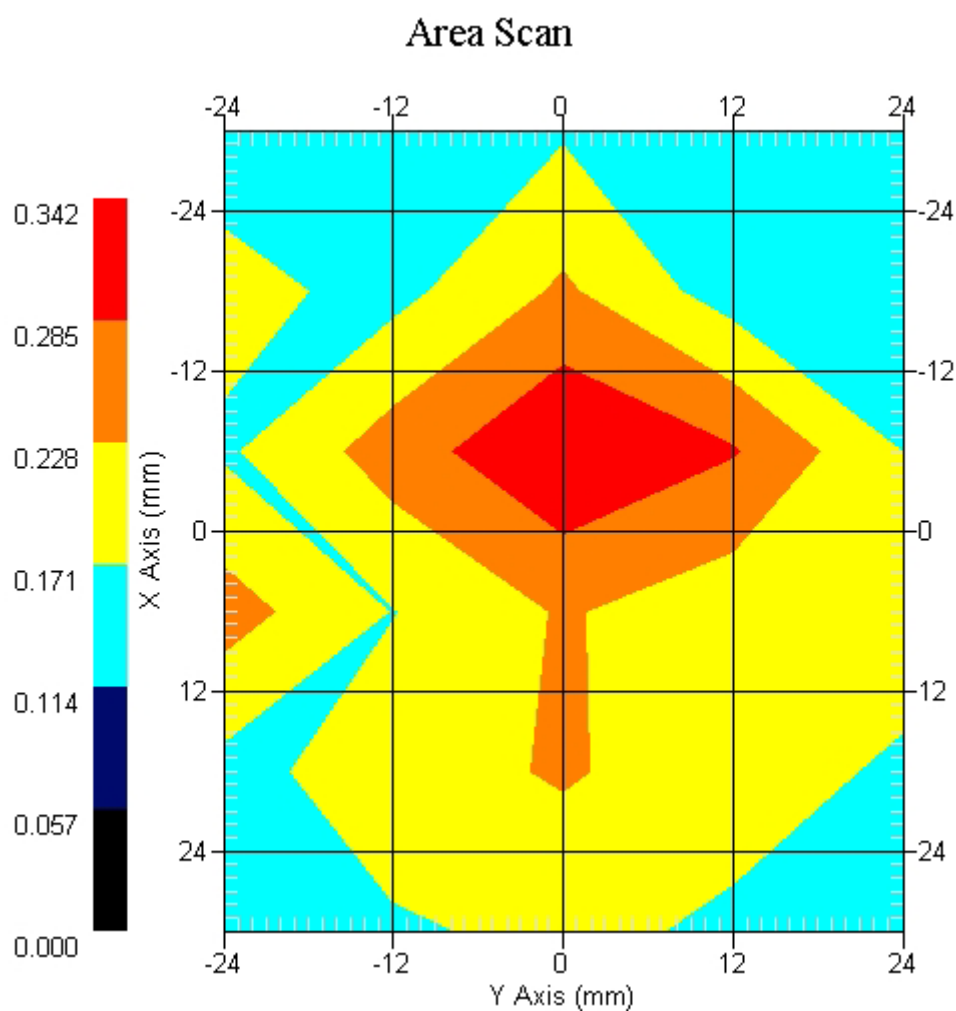

ALSAS-10U VER 2.3.6 APREL Laboratories

SAR Test Report-802.11b

Report Date : 11-Sep-2008
Measurement Date : 11-Sep-2008

Product Data

Device Name : USB
Type : Other
Model : UB811Rn
Frequency : 2450.00 MHz
Drift Time : 0 min(s)
Length : 38 mm
Width : 7.4 mm
Depth : 21.6 mm
Antenna Type : Internal

Phantom Data

Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data

Type : BODY
Serial No. : 325-B
Frequency : 2450.00 MHz
Last Calib. Date : 11-Sep-2008
Temperature : 20.20 °C
Ambient Temp. : 20.90 °C
Humidity : 51.00 RH%
Epsilon : 53.97 F/m
Sigma : 1.96 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : Probe 265
Model : E020
Type : E-Field Triangle
Serial No. : 265
Last Calib. Date : 09-May-2008
Frequency : 2450.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 3.55
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Tissue Temp. : 20.20 °C
 Ambient Temp. : 20.90 °C
 Area Scan : 6x5x1 : Measurement x=12mm, y=12mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
 Power Drift-Start : 0.170 W/kg
 Power Drift-Finish: 0.168 W/kg
 Power Drift (%) : -1.176

DUT Position : Touch EUT Side-Right
 Channel : 6

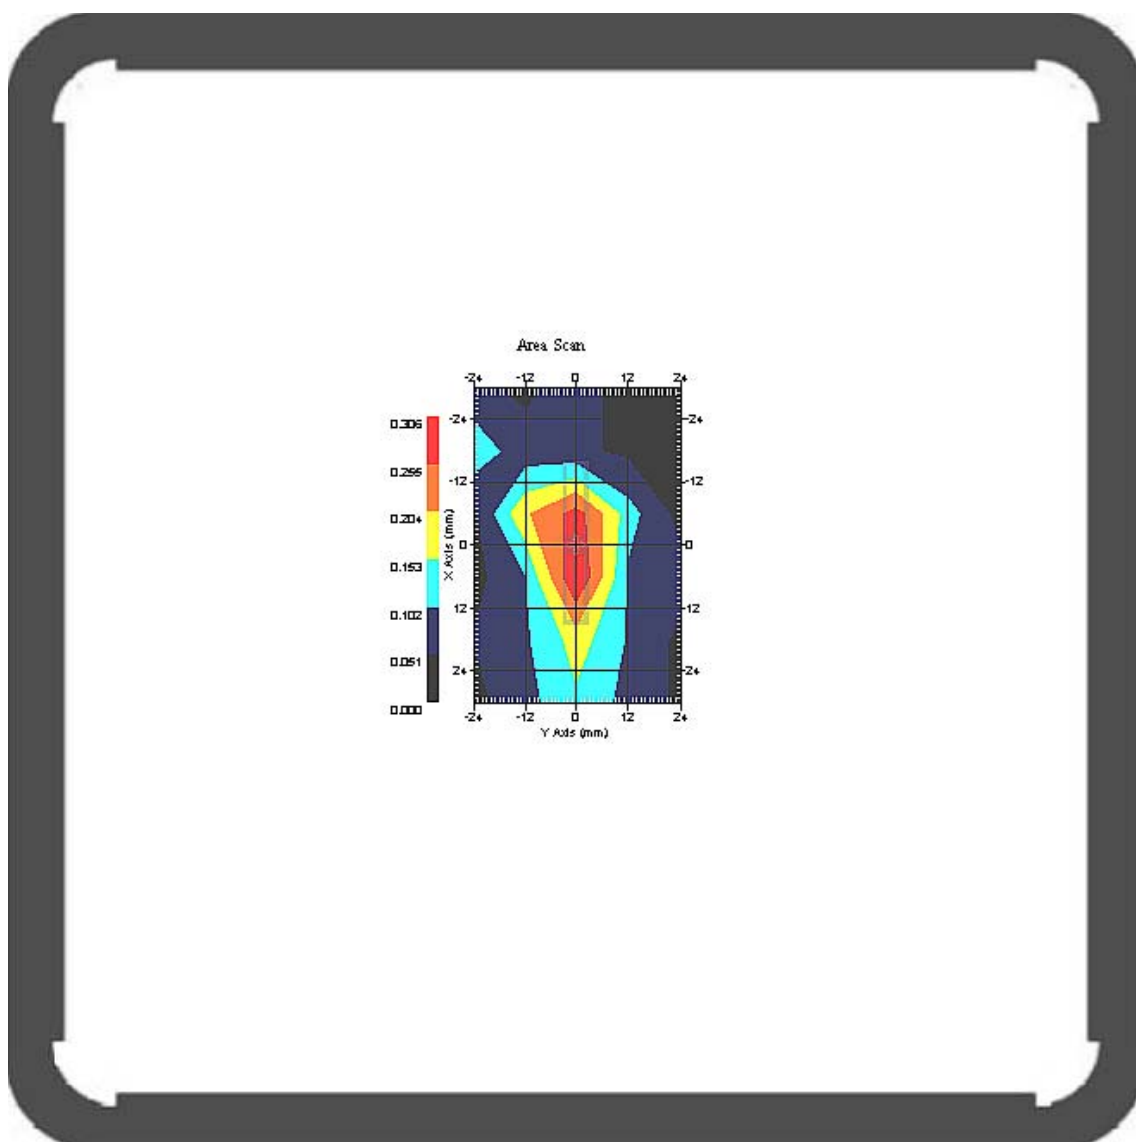

1 gram SAR value : 0.178 W/kg
 10 gram SAR value : 0.099 W/kg
 Area Scan Peak SAR : 0.303 W/kg
 Zoom Scan Peak SAR : 0.280 W/kg

This is previous page plot (zoom in)

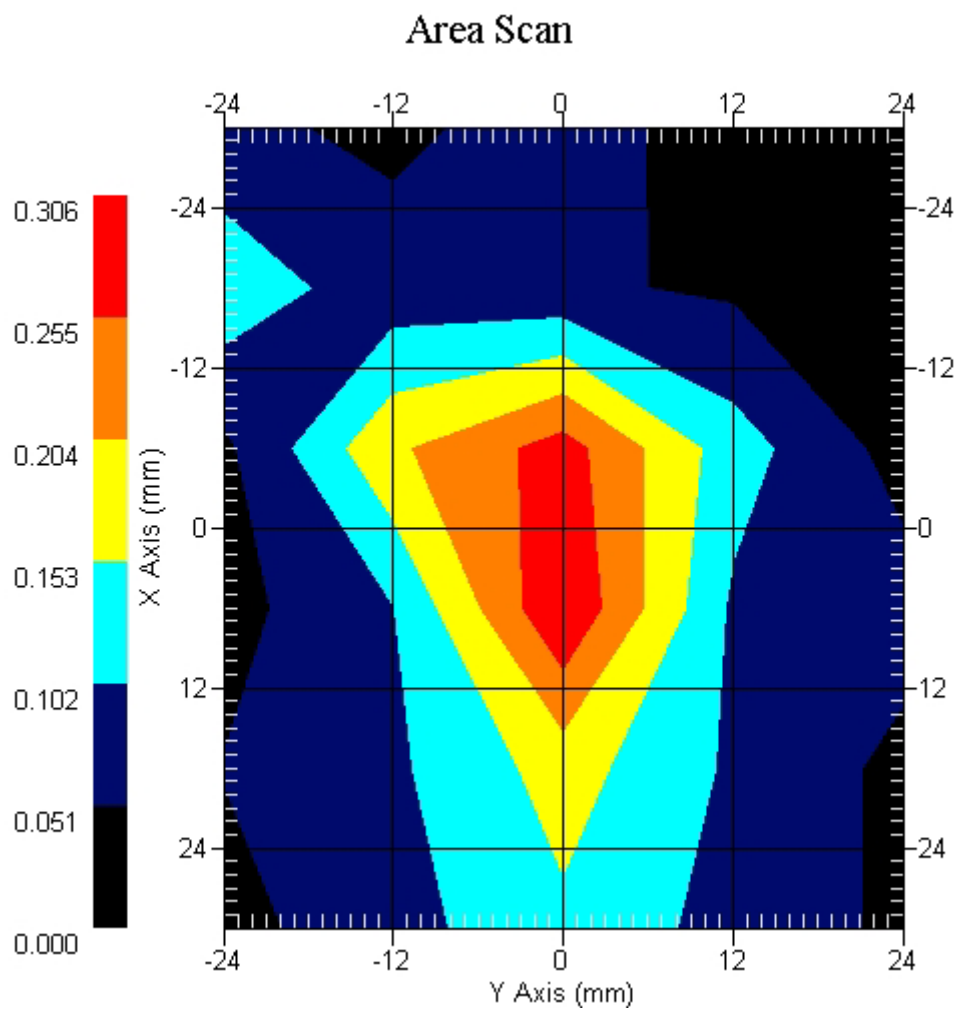

ALSAS-10U VER 2.3.6 APREL Laboratories

SAR Test Report-802.11g

Report Date : 23-Jul-2008
Measurement Date : 23-Jul-2008

Product Data

Device Name : USB
Type : Other
Model : UB811Rn
Frequency : 2450.00 MHz
Drift Time : 0 min(s)
Length : 38 mm
Width : 21.6 mm
Depth : 7.4 mm
Antenna Type : Internal

Phantom Data

Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data

Type : BODY
Serial No. : 325-B
Frequency : 2450.00 MHz
Last Calib. Date : 23-Jul-2008
Temperature : 20.30 °C
Ambient Temp. : 21.10 °C
Humidity : 52.00 RH%
Epsilon : 53.36 F/m
Sigma : 1.96 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : Probe 265
Model : E020
Type : E-Field Triangle
Serial No. : 265
Last Calib. Date : 09-May-2008
Frequency : 2450.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 3.55
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Tissue Temp. : 20.30 °C
 Ambient Temp. : 21.10 °C
 Area Scan : 4x4x1 : Measurement x=12mm, y=12mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
 Power Drift-Start : 0.048 W/kg
 Power Drift-Finish: 0.048 W/kg
 Power Drift (%) : -0.852

DUT Position : Touch EUT Bottom
 Channel : 1

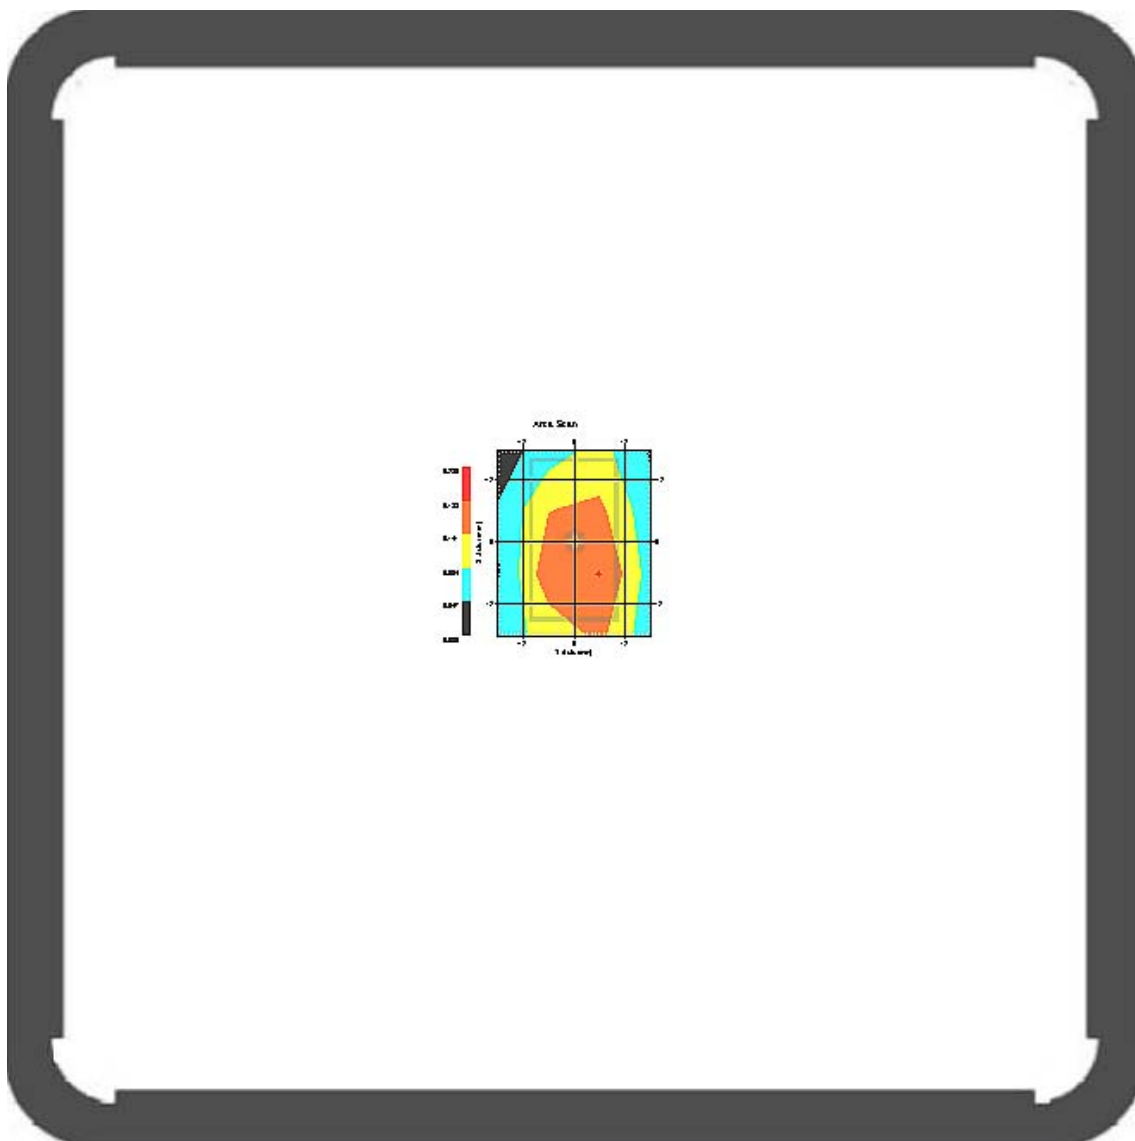

1 gram SAR value : 0.156 W/kg
 10 gram SAR value : 0.125 W/kg
 Area Scan Peak SAR : 0.190 W/kg
 Zoom Scan Peak SAR : 0.314 W/kg

This is previous page plot (zoom in)

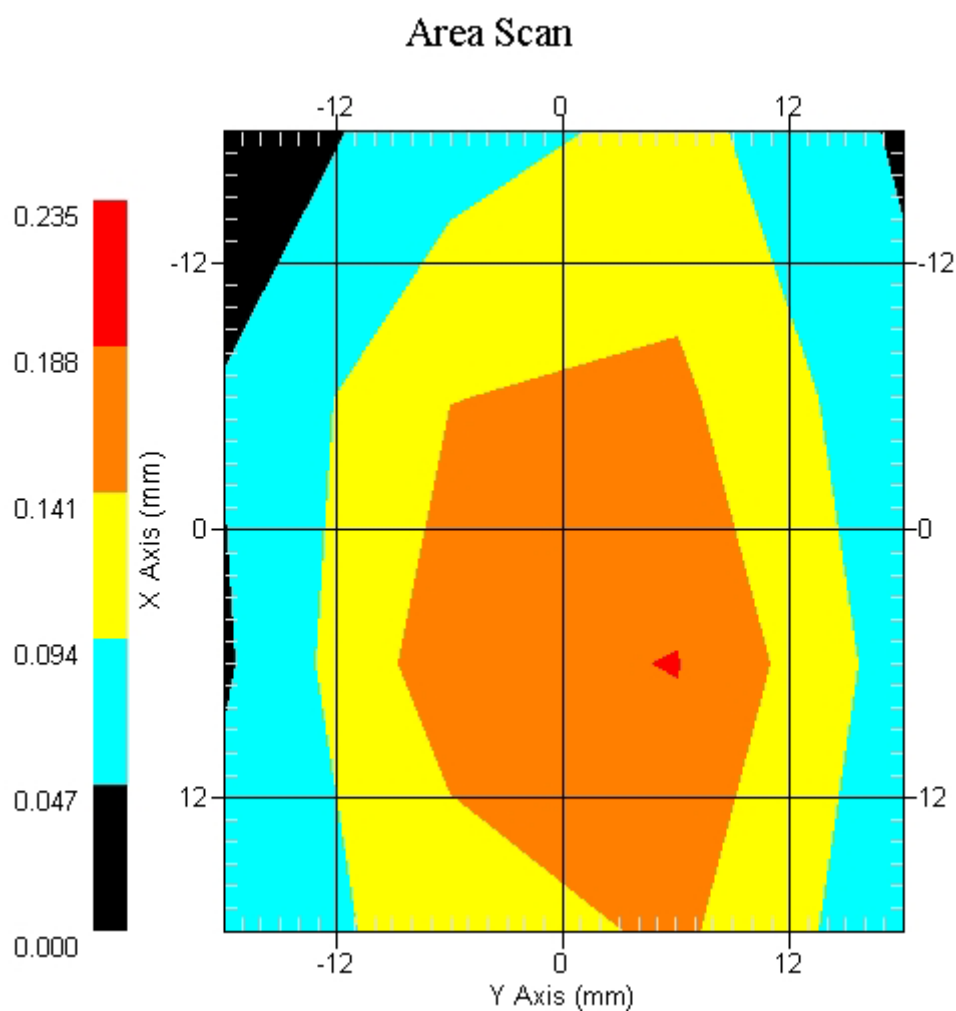

ALSAS-10U VER 2.3.6 APREL Laboratories

SAR Test Report-802.11n(HT20)

Report Date : 23-Jul-2008
Measurement Date : 23-Jul-2008

Product Data

Device Name : USB
Type : Other
Model : UB811Rn
Frequency : 2450.00 MHz
Drift Time : 0 min(s)
Length : 38 mm
Width : 21.6 mm
Depth : 7.4 mm
Antenna Type : Internal

Phantom Data

Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data

Type : BODY
Serial No. : 325-B
Frequency : 2450.00 MHz
Last Calib. Date : 23-Jul-2008
Temperature : 20.30 °C
Ambient Temp. : 21.10 °C
Humidity : 52.00 RH%
Epsilon : 53.36 F/m
Sigma : 1.96 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : Probe 265
Model : E020
Type : E-Field Triangle
Serial No. : 265
Last Calib. Date : 09-May-2008
Frequency : 2450.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 3.55
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Tissue Temp. : 20.30 °C
 Ambient Temp. : 21.10 °C
 Area Scan : 4x4x1 : Measurement x=12mm, y=12mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
 Power Drift-Start : 0.049 W/kg
 Power Drift-Finish: 0.050 W/kg
 Power Drift (%) : 2.040

DUT Position : Touch EUT Bottom
 Channel : 6

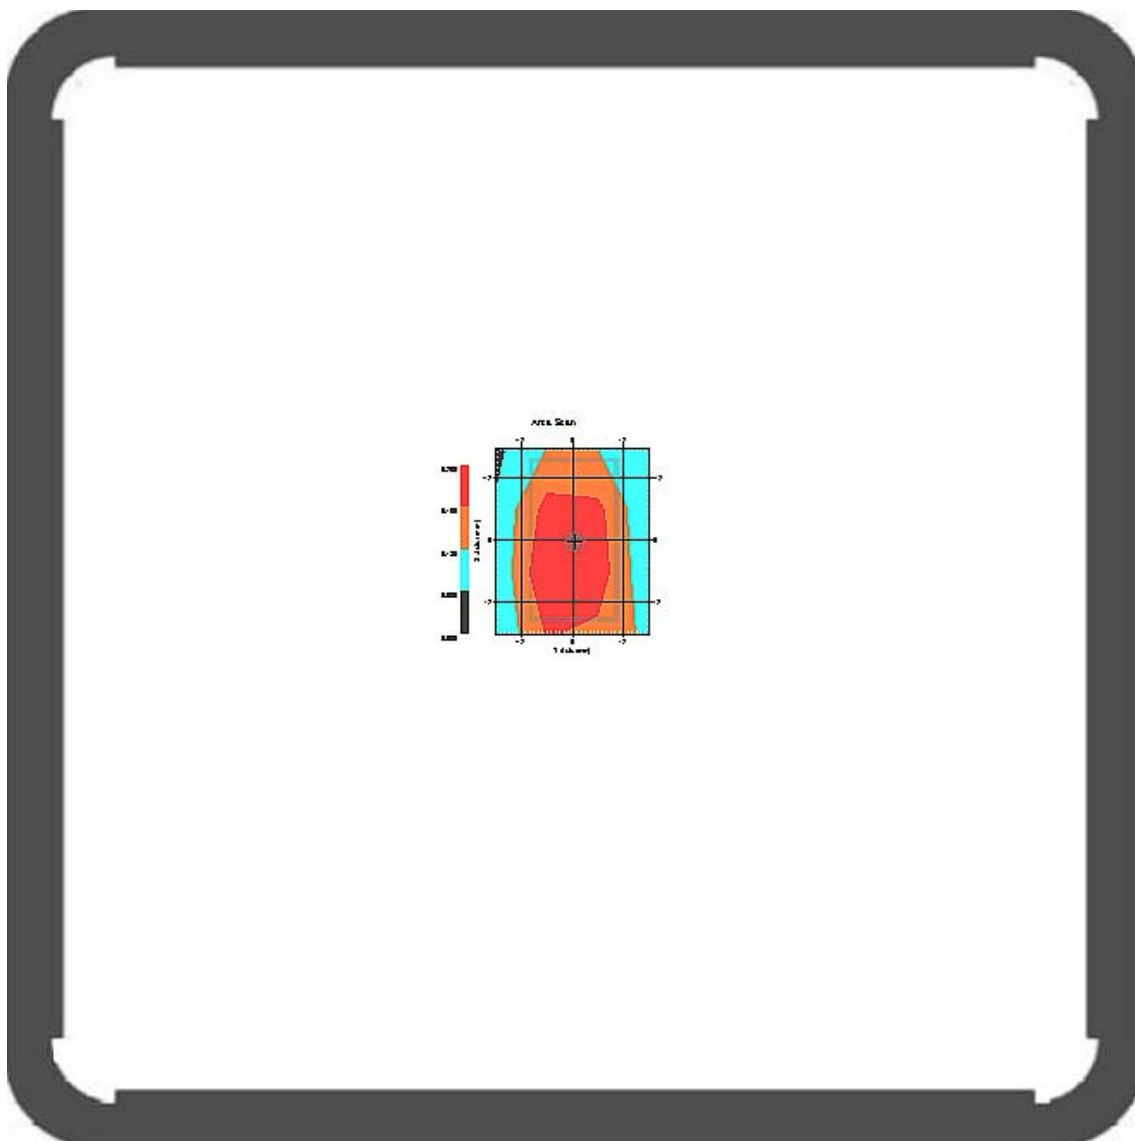

1 gram SAR value : 0.224 W/kg
 10 gram SAR value : 0.196 W/kg
 Area Scan Peak SAR : 0.260 W/kg
 Zoom Scan Peak SAR : 0.414 W/kg

This is previous page plot (zoom in)

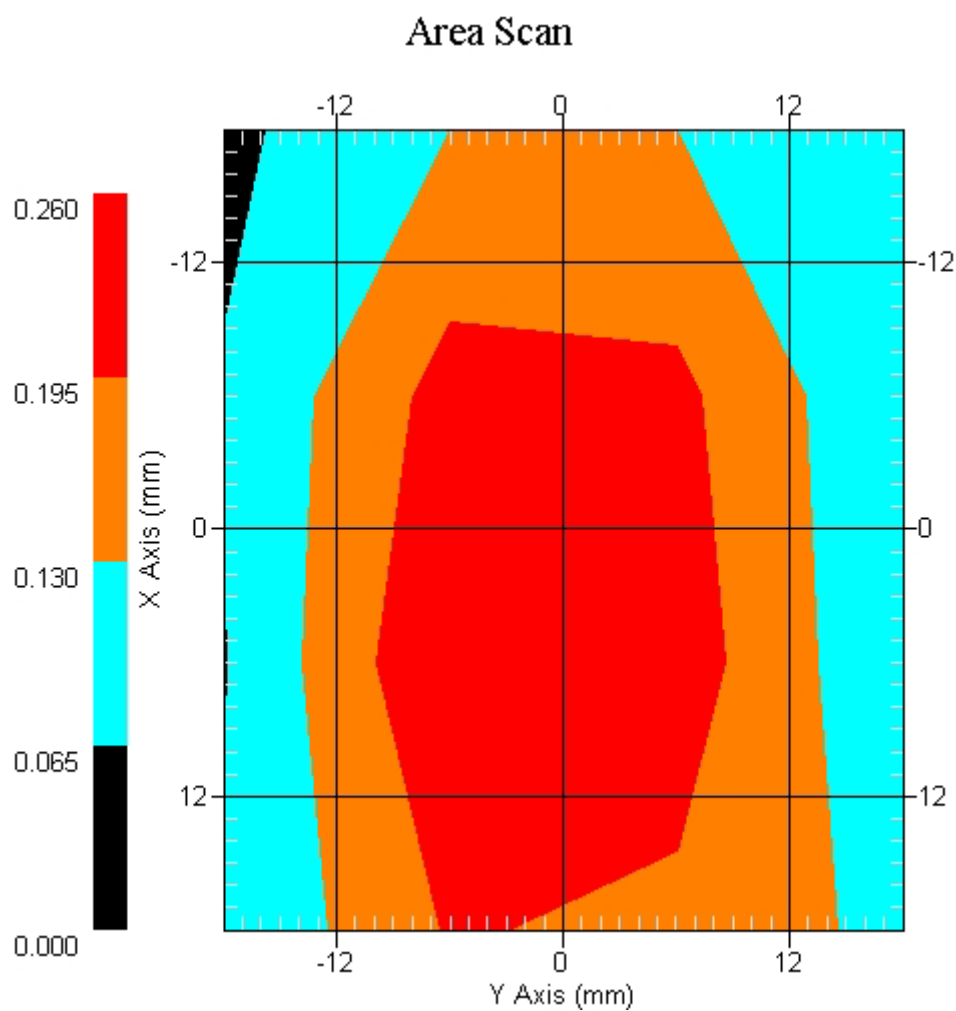

ALSAS-10U VER 2.3.6 APREL Laboratories

SAR Test Report-802.11n(HT40)

Report Date : 23-Jul-2008
Measurement Date : 23-Jul-2008

Product Data

Device Name : USB
Type : Other
Model : UB811Rn
Frequency : 2450.00 MHz
Drift Time : 0 min(s)
Length : 38 mm
Width : 21.6 mm
Depth : 7.4 mm
Antenna Type : Internal

Phantom Data

Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data

Type : BODY
Serial No. : 325-B
Frequency : 2450.00 MHz
Last Calib. Date : 23-Jul-2008
Temperature : 20.30 °C
Ambient Temp. : 21.10 °C
Humidity : 52.00 RH%
Epsilon : 53.36 F/m
Sigma : 1.96 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : Probe 265
Model : E020
Type : E-Field Triangle
Serial No. : 265
Last Calib. Date : 09-May-2008
Frequency : 2450.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 3.55
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data


Crest Factor : 1
 Tissue Temp. : 20.30 °C
 Ambient Temp. : 21.10 °C
 Area Scan : 4x4x1 : Measurement x=12mm, y=12mm, z=4mm
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm
 Power Drift-Start : 0.021 W/kg
 Power Drift-Finish: 0.021 W/kg
 Power Drift (%) : -0.463

DUT Position : Touch EUT Bottom
 Channel : 3

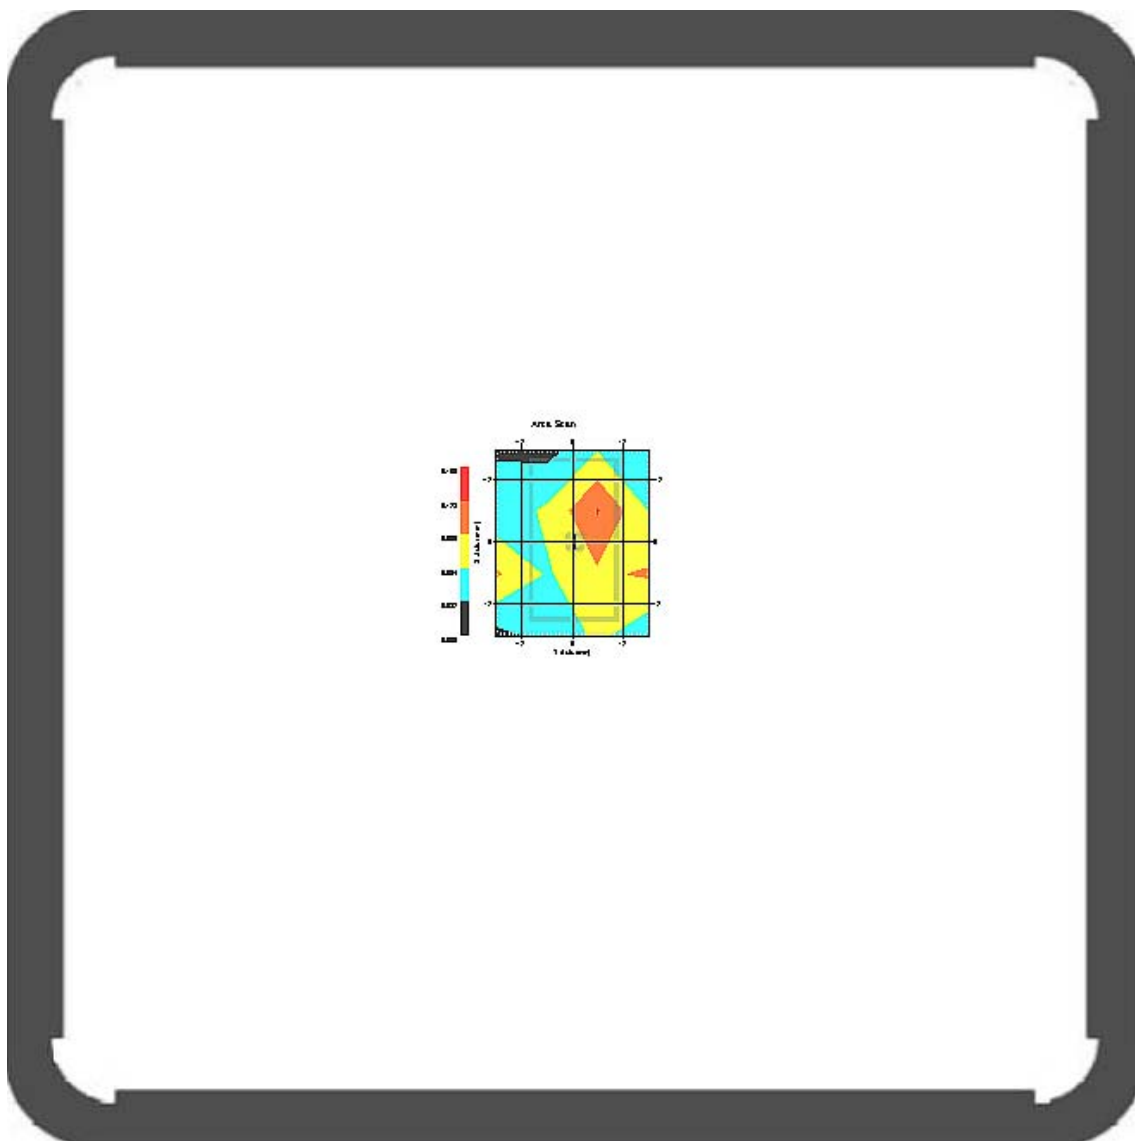



1 gram SAR value : 0.093 W/kg
 10 gram SAR value : 0.068 W/kg
 Area Scan Peak SAR : 0.130 W/kg
 Zoom Scan Peak SAR : 0.175 W/kg



This is previous page plot (zoom in)

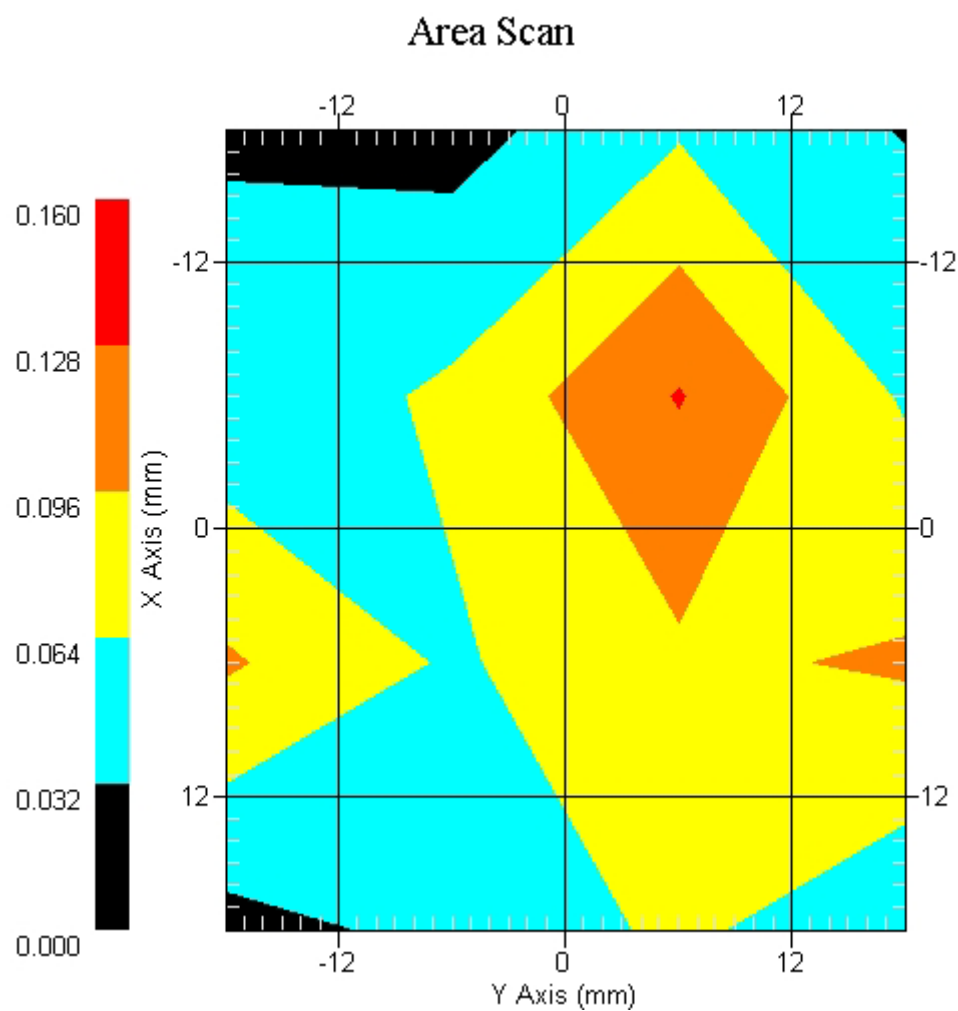

802.11b EUT Bottom Z-Axis plot
Channel: 1

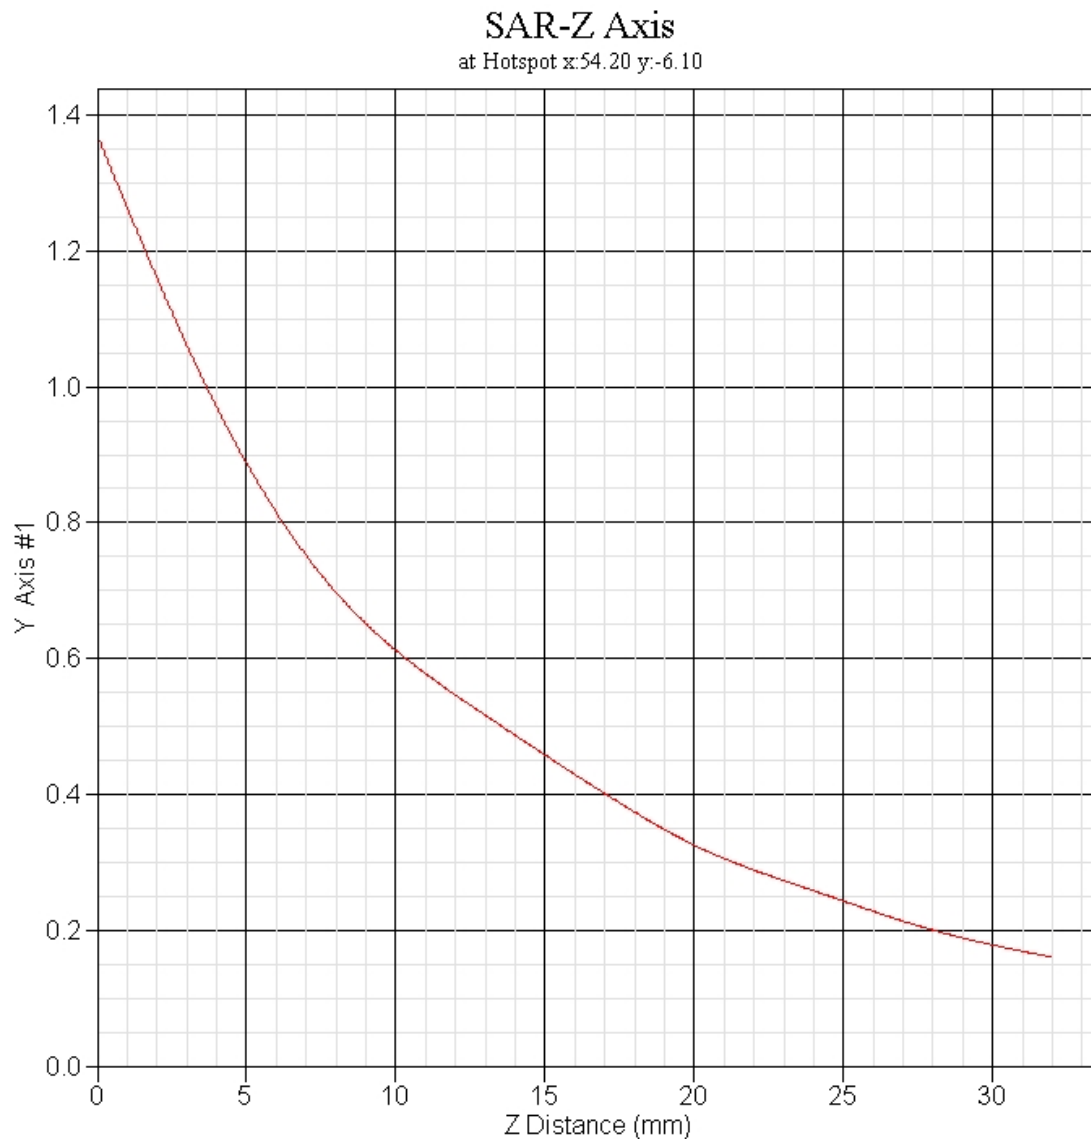

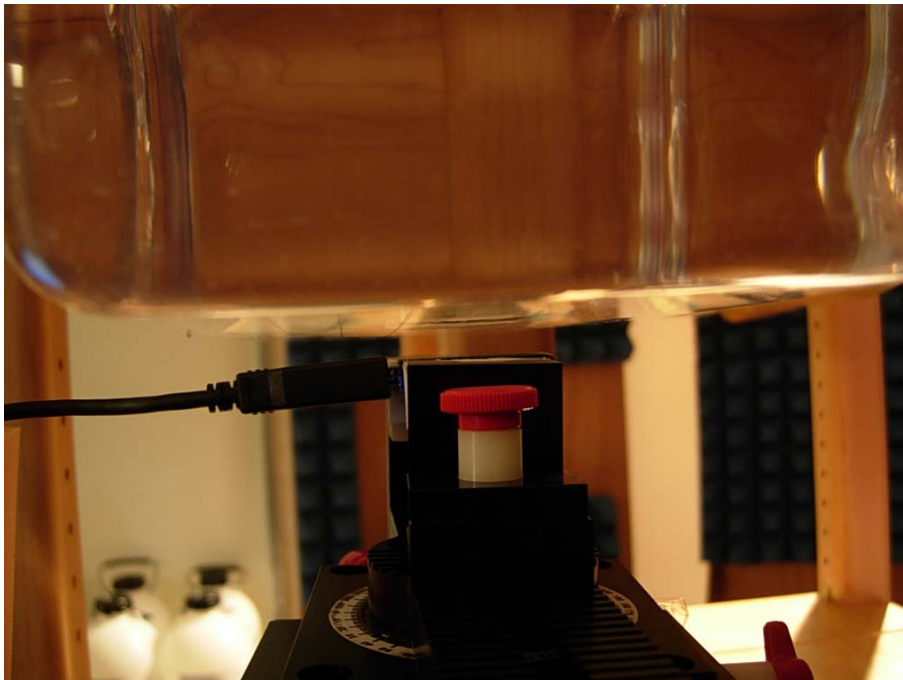Appendix C. Test Setup Photographs & EUT Photographs**Test Setup Photographs****EUT Bottom****EUT Front**

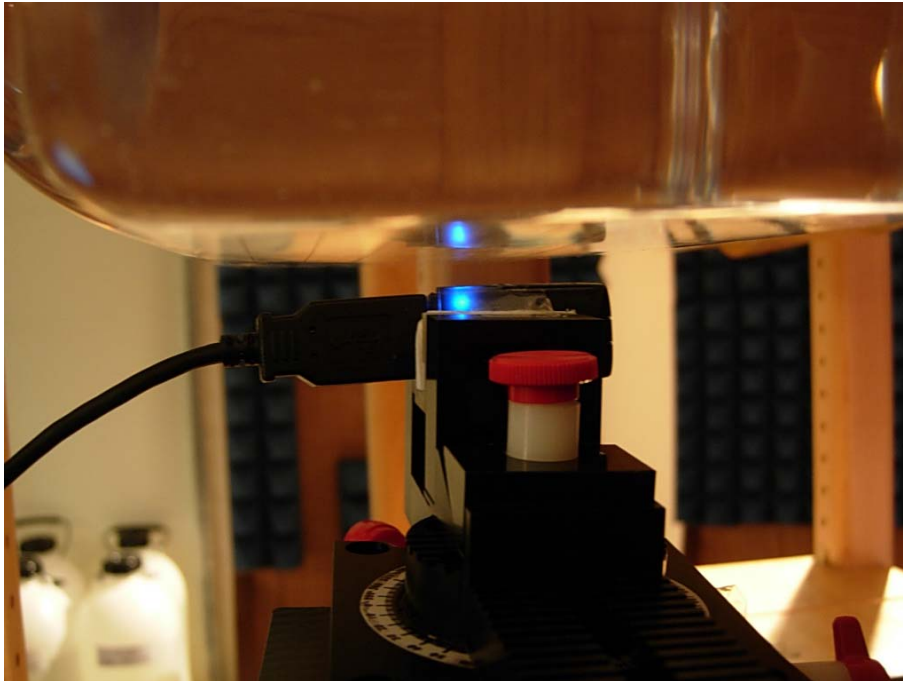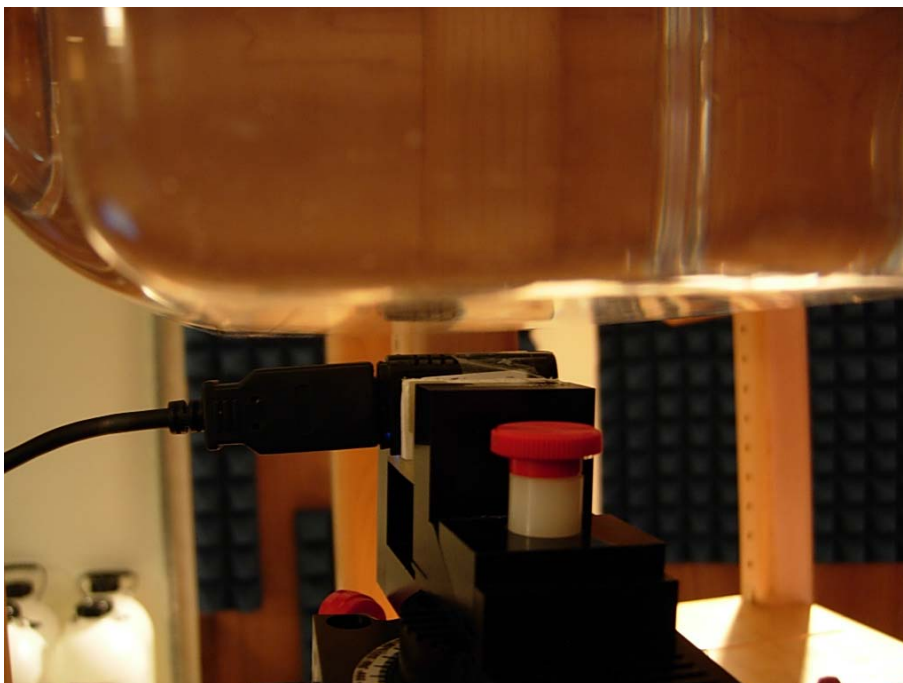EUT Side-Left**EUT Side-Right**

Note: The positions used in the measurements were according to IEEE 1528-2003.

Test EUT Photographs







Appendix D. Probe Calibration Data

Miniature Isotropic RF Probe

M/N: ALS-E-020

S/N: 265

2450 MHz Head Calibration

2450 MHz Body Calibration

NCL CALIBRATION LABORATORIES

Calibration File No.: CP-879

Client: QUIETEK

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 2450 MHz

Manufacturer: APREL Laboratories

Model No.: ALS-E-020

Serial No.: 265

HEAD Calibration


Calibration Procedure: SSI/DRB-TP-D01-032-E020-V2

Project No: QTKB-ALS-E20-CAL-5335

Calibrated: 9th May 2008
Released on: 9th May 2008

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: _____



NCL CALIBRATION LABORATORIES

51 SPECTRUM WAY
NEPEAN, ONTARIO
CANADA K2R 1E6

Division of APREL Lab.
TEL: (613) 820-4988
FAX: (613) 820-4161

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-020 265.

References

SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure

IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques"

SSI-TP-011 Tissue Calibration Procedure

IEC 62209 "Human exposure to radio frequency fields from hand-held and Head-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1 & 2: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"

IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz


Conditions


Probe 265 is a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this probe has been accurately conducted and that all information contained within this report has been reviewed for accuracy.

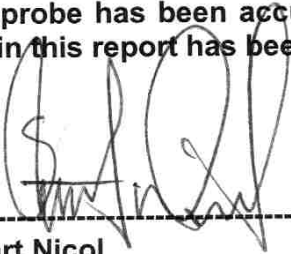

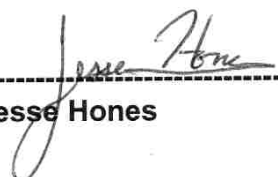Stuart Nicol

Jesse Hones

Calibration Results Summary

| | |
|-----------------------|---------------------|
| Probe Type: | E-Field Probe E-020 |
| Serial Number: | 265 |
| Frequency: | 2450 MHz |
| Sensor Offset: | 1.56 mm |
| Sensor Length: | 2.5 mm |
| Tip Enclosure: | Ertalyte* |
| Tip Diameter: | <5 mm |
| Tip Length: | 60 mm |
| Total Length: | 290 mm |

*Resistive to recommended tissue recipes per IEEE-1528

Sensitivity in Air

| | |
|---------------------------------|---|
| Channel X: | $1.2 \mu\text{V}/(\text{V}/\text{m})^2$ |
| Channel Y: | $1.2 \mu\text{V}/(\text{V}/\text{m})^2$ |
| Channel Z: | $1.2 \mu\text{V}/(\text{V}/\text{m})^2$ |
| Diode Compression Point: | 95 mV |

Sensitivity in Head Tissue

Frequency: 2450 MHz

Epsilon: 39.2 (+/-5%) **Sigma:** 1.80 S/m (+/-5%)

ConvF

Channel X: 3.67

Channel Y: 3.67

Channel Z: 3.67

Tissue sensitivity values were calculated using the load impedance of the APREL Laboratories Daq-Paq.


Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 2.44mm.



Spatial Resolution:

The measured probe tip diameter is 5 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.

Receiving Pattern 2450 MHz (Air)

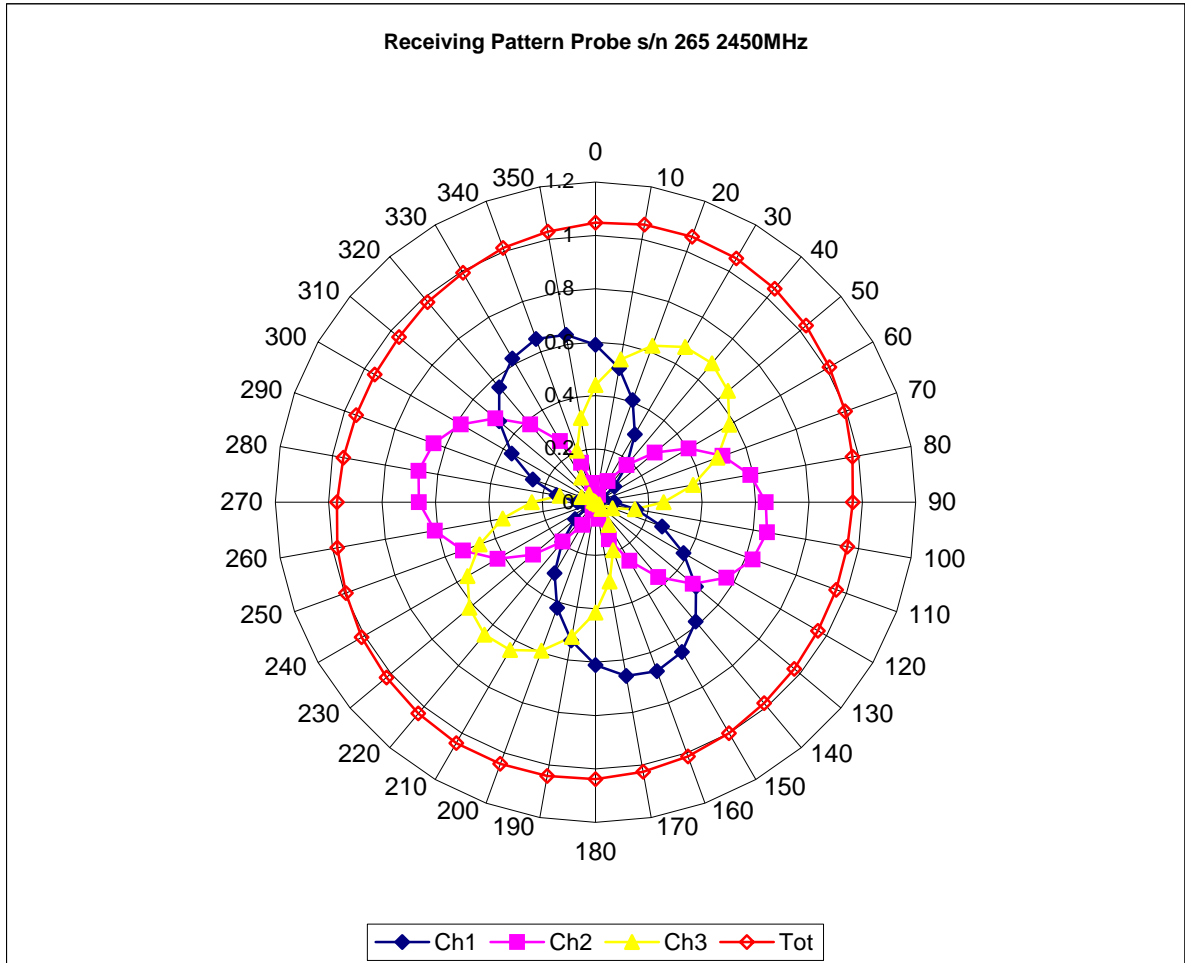


Isotropy Error 2450 MHz (Air)

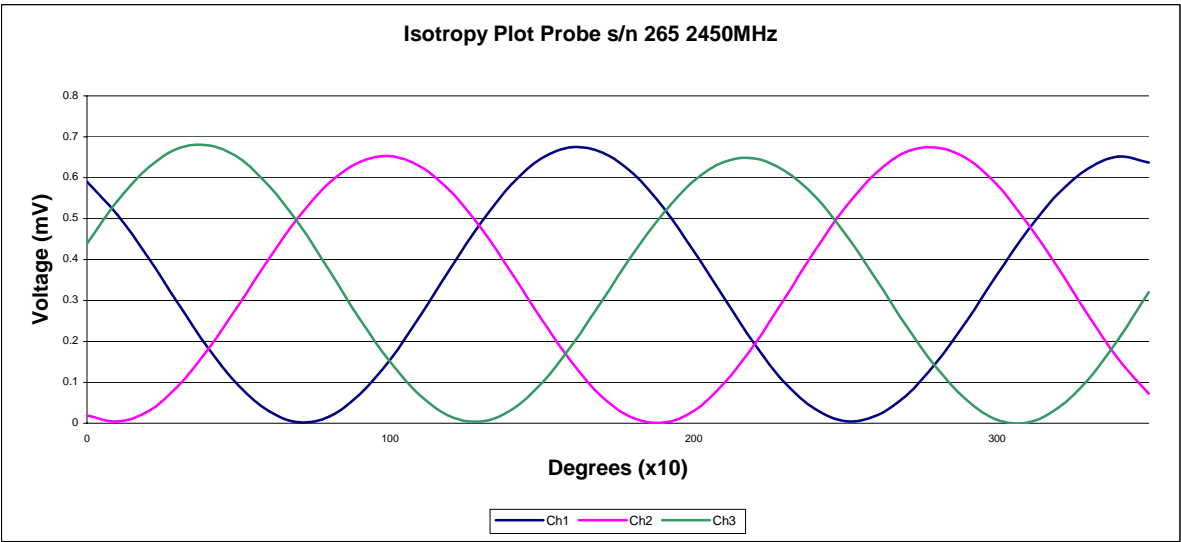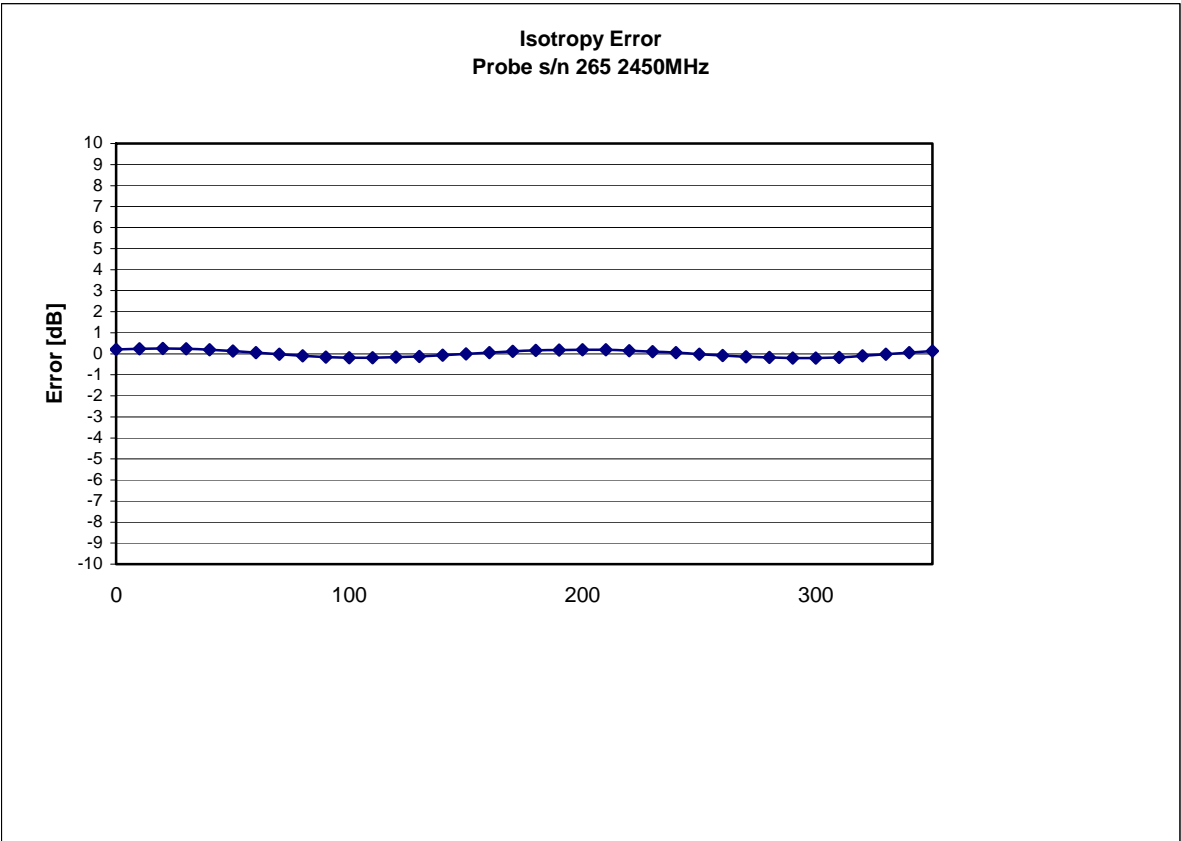


Isotropicity in Tissue:

0.10 dB

Dynamic Range

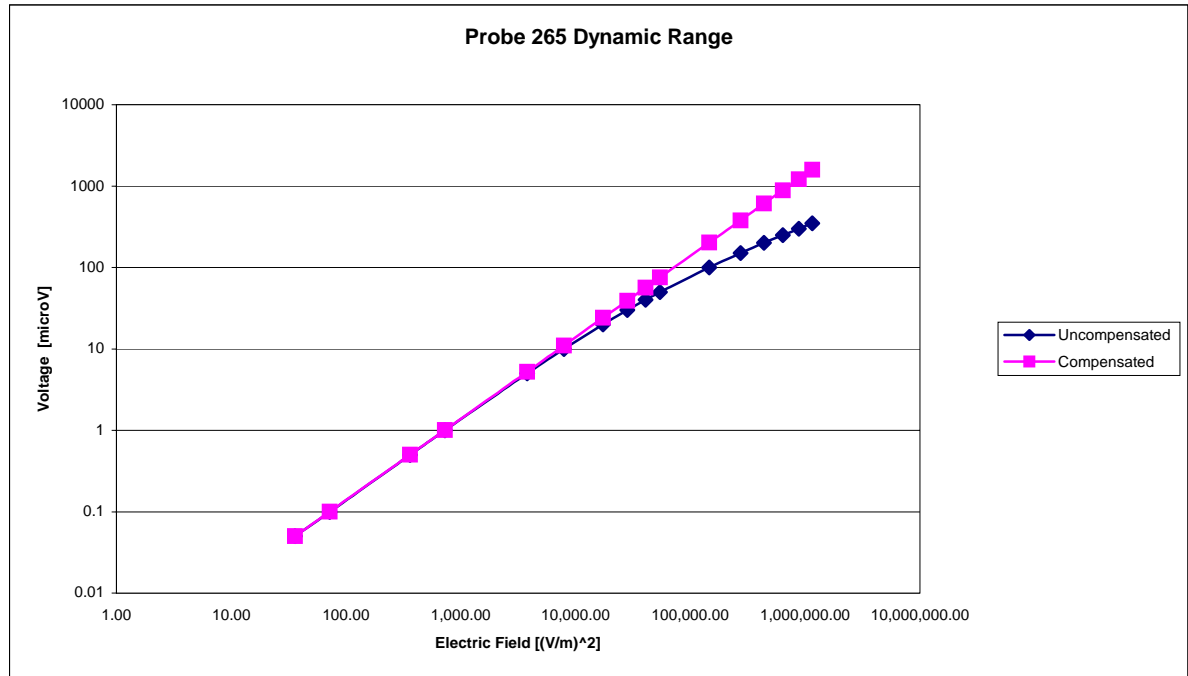

Video Bandwidth

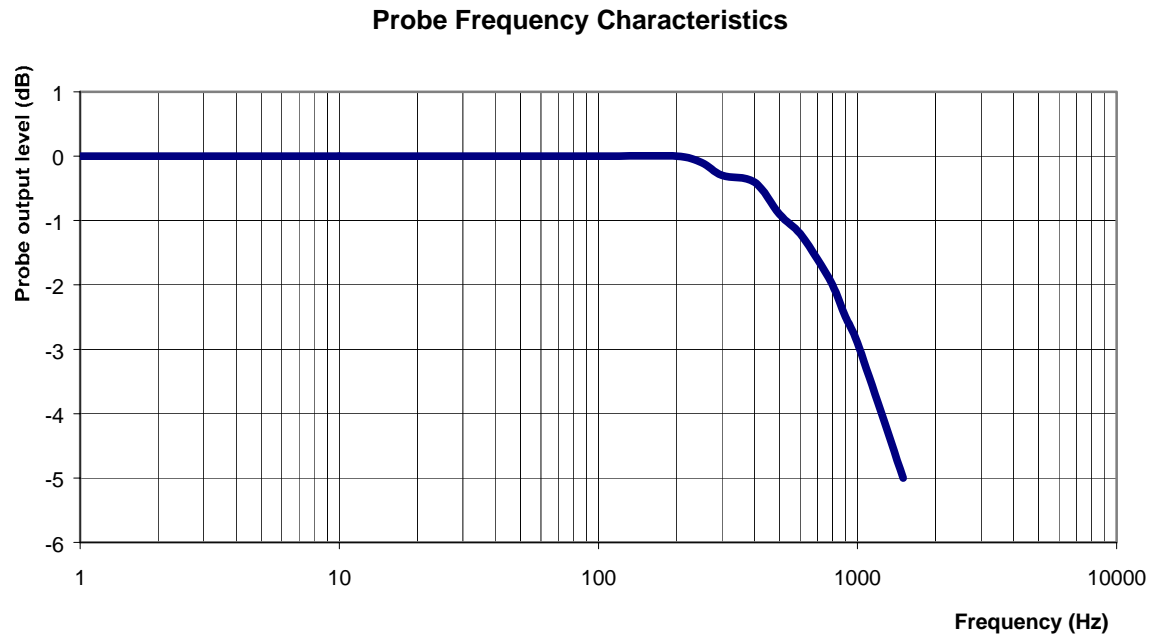

| | |
|-----------------------------------|-------------|
| Video Bandwidth at 500 Hz | 1 dB |
| Video Bandwidth at 1000 Hz | 3 dB |

Conversion Factor Uncertainty Assessment

Frequency: 2450MHz

Epsilon: 39.2 (+/-5%) **Sigma:** 1.80 S/m (+/-5%)

ConvF

Channel X: 3.67 7%(K=2)

Channel Y: 3.67 7%(K=2)

Channel Z: 3.67 7%(K=2)

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 MΩ.

Boundary Effect:

For a distance of 2.4mm the evaluated uncertainty (increase in the probe sensitivity) is less than 2%.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2008.

NCL CALIBRATION LABORATORIES

Calibration File No.: CP-880

Client: QUIETEK

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 2450 MHz

Manufacturer: APREL Laboratories

Model No.: ALS-E-020

Serial No.: 265

BODY Calibration


Calibration Procedure: SSI/DRB-TP-D01-032-E020-V2

Project No: QTKB-ALS-E20-CAL-5335

Calibrated: 9th May 2008
Released on: 9th May 2008

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: _____



NCL CALIBRATION LABORATORIES

51 SPECTRUM WAY
NEPEAN, ONTARIO
CANADA K2R 1E6

Division of APREL Lab.
TEL: (613) 820-4988
FAX: (613) 820-4161

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-020 265.

References

SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure

IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques"

SSI-TP-011 Tissue Calibration Procedure

IEC 62209 "Human exposure to radio frequency fields from hand-held and Head-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1 & 2: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"

IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz


Conditions


Probe 265 is a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this probe has been accurately conducted and that all information contained within this report has been reviewed for accuracy.



Stuart Nicol

Jesse Hones

Calibration Results Summary

| | |
|-----------------------|---------------------|
| Probe Type: | E-Field Probe E-020 |
| Serial Number: | 265 |
| Frequency: | 2450 MHz |
| Sensor Offset: | 1.56 mm |
| Sensor Length: | 2.5 mm |
| Tip Enclosure: | Ertalyte* |
| Tip Diameter: | <5 mm |
| Tip Length: | 60 mm |
| Total Length: | 290 mm |

*Resistive to recommended tissue recipes per IEEE-1528

Sensitivity in Air

| | |
|---------------------------------|---|
| Channel X: | $1.2 \mu\text{V}/(\text{V}/\text{m})^2$ |
| Channel Y: | $1.2 \mu\text{V}/(\text{V}/\text{m})^2$ |
| Channel Z: | $1.2 \mu\text{V}/(\text{V}/\text{m})^2$ |
| Diode Compression Point: | 95 mV |

Sensitivity in Body Tissue

Frequency: 2450 MHz

Epsilon: 52.7 (+/-5%) **Sigma:** 1.95 S/m (+/-5%)

ConvF

Channel X: 3.55

Channel Y: 3.55

Channel Z: 3.55

Tissue sensitivity values were calculated using the load impedance of the APREL Laboratories Daq-Paq.


Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 2.44mm.



Spatial Resolution:

The measured probe tip diameter is 5 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.

Receiving Pattern 2450 MHz (Air)

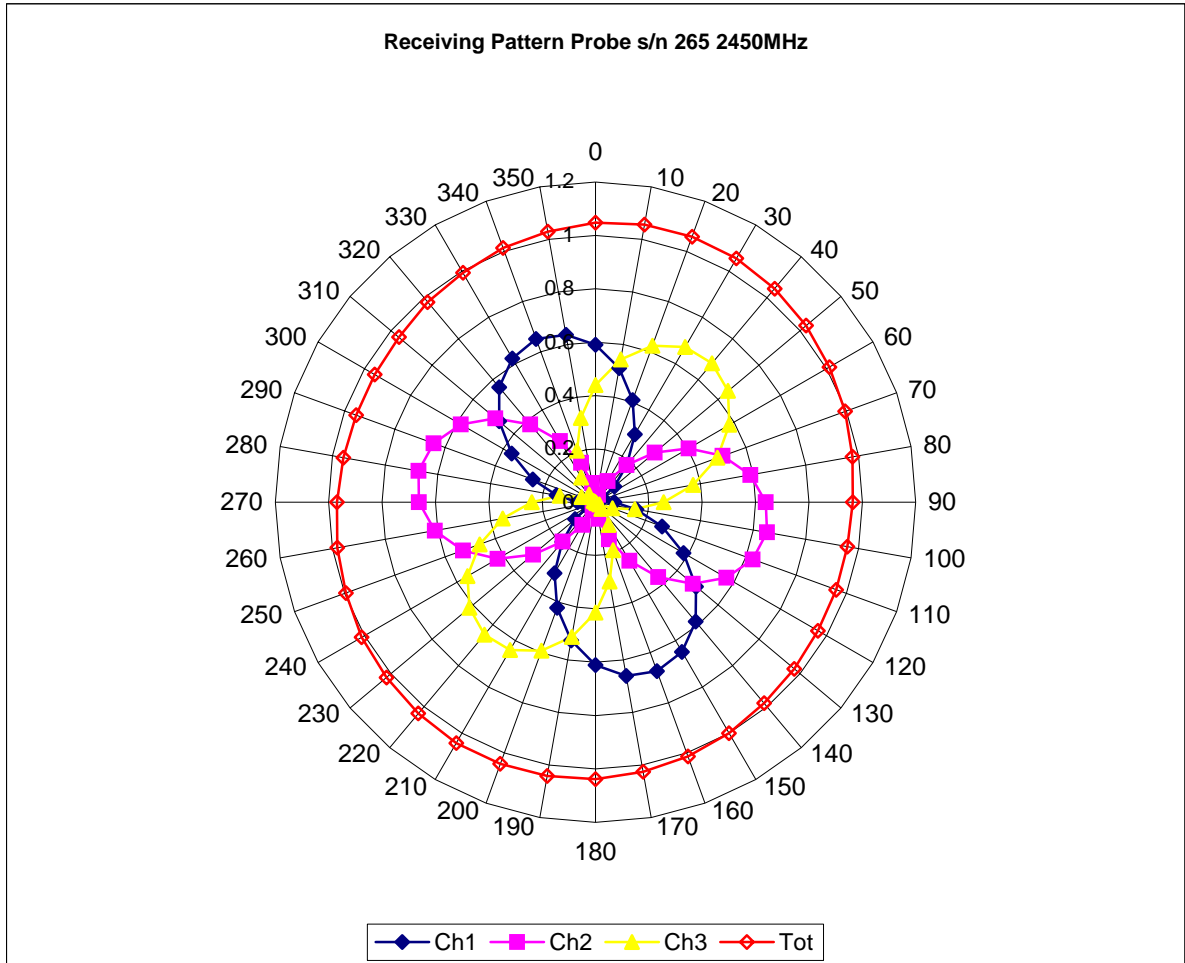


Isotropy Error 2450 MHz (Air)

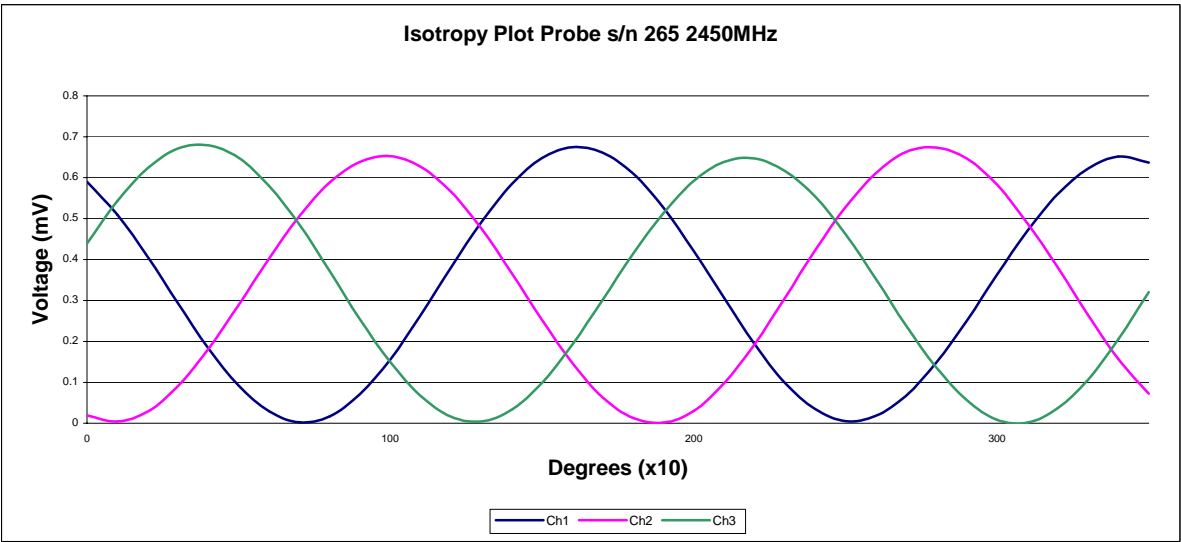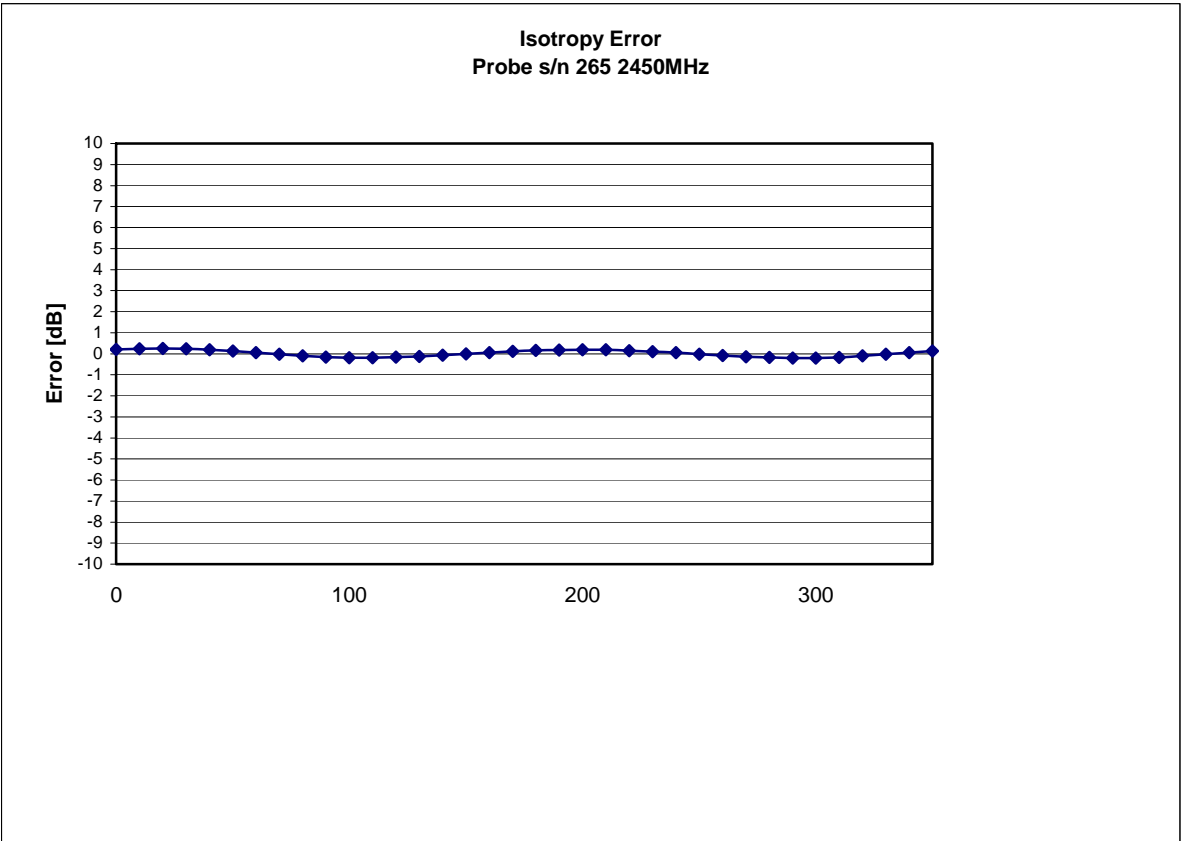


Isotropy in Tissue:

0.10 dB

Dynamic Range

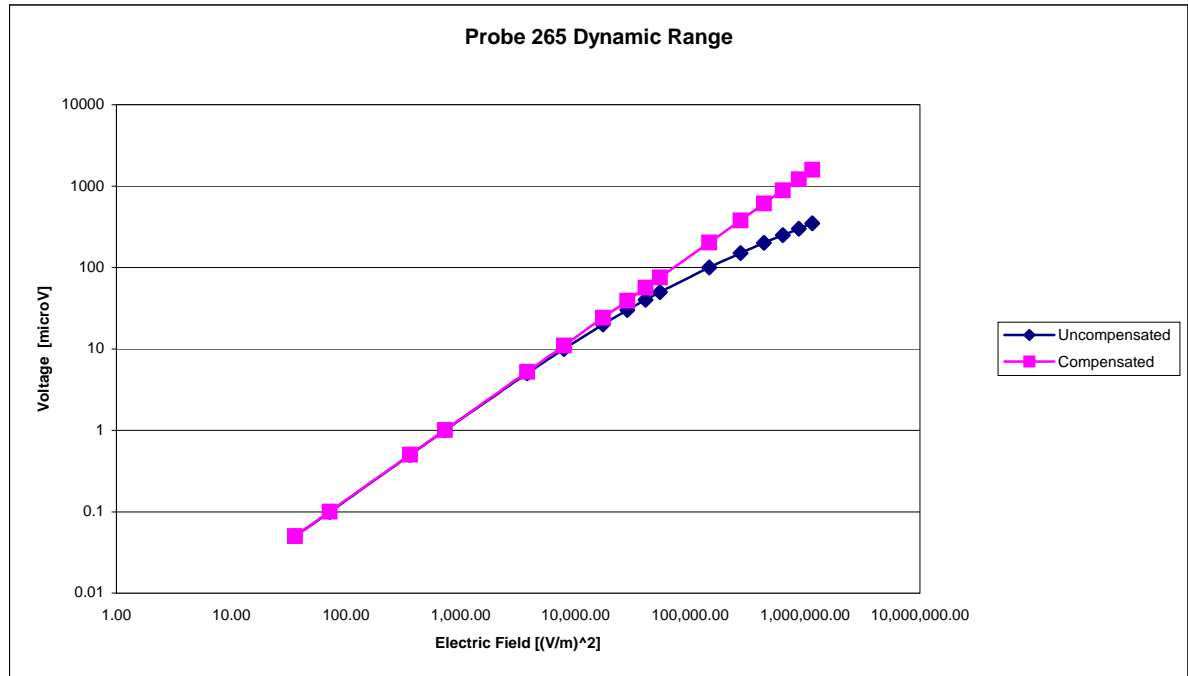

Video Bandwidth

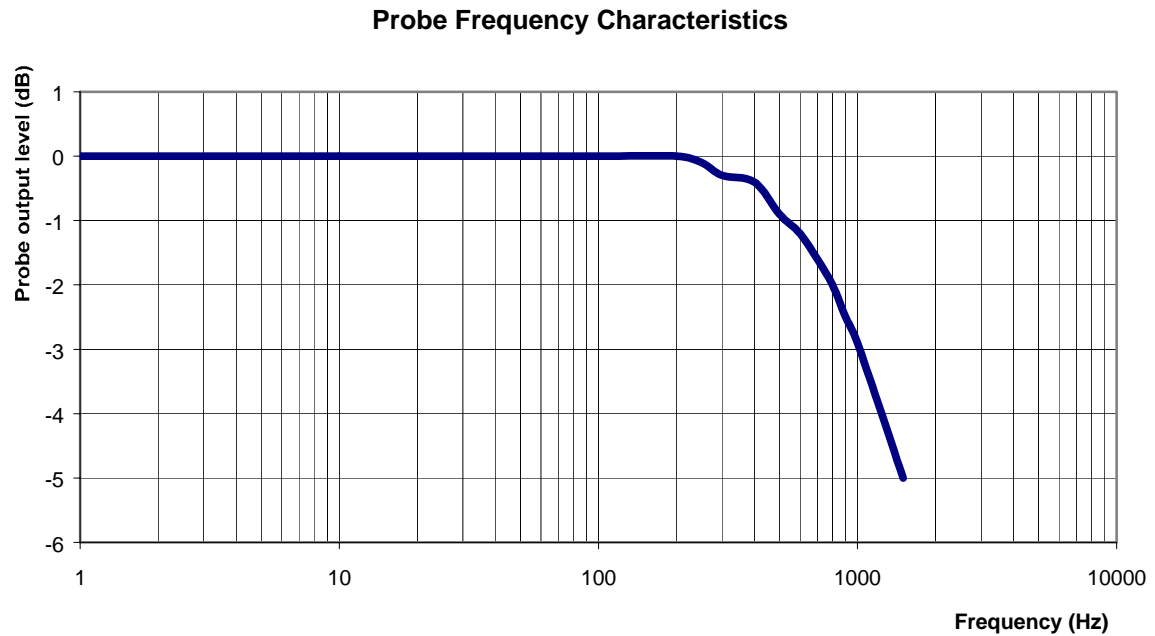

| | |
|-----------------------------------|-------------|
| Video Bandwidth at 500 Hz | 1 dB |
| Video Bandwidth at 1000 Hz | 3 dB |

Conversion Factor Uncertainty Assessment

| | |
|------------------------------|--------------------------------|
| Frequency: | 2450MHz |
| Epsilon: 52.7 (+/-5%) | Sigma: 1.95 S/m (+/-5%) |

ConvF

| | |
|------------------------|---------|
| Channel X: 3.55 | 7%(K=2) |
| Channel Y: 3.55 | 7%(K=2) |
| Channel Z: 3.55 | 7%(K=2) |

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 M Ω .

Boundary Effect:

For a distance of 2.4mm the evaluated uncertainty (increase in the probe sensitivity) is less than 2%.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2008.



Appendix E. Dipole Calibration

Validation Dipole 2450 MHz

M/N: ALS-D-2450-S-2

S/N: QTK-319

NCL CALIBRATION LABORATORIES

Calibration File No: DC-891

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Quietek Validation Dipole

Manufacturer: APREL Laboratories

Part number: ALS-D-2450-S-2

Frequency: 2.45 GHz

Serial No: QTK-319


Customer: Quietek

Project Number: QTKB-Dipole-CAL-5336

Calibrated: 9th May 2008
Released on: 9th May 2008

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: _____

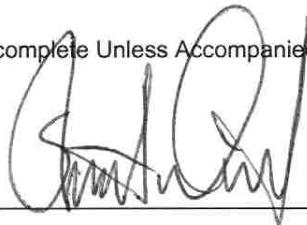

NCL CALIBRATION LABORATORIES

51 SPECTRUM WAY
NEPEAN, ONTARIO
CANADA K2R 1E6

Division of APREL Lab.
TEL: (613) 820-4988
FAX: (613) 820-4161

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 53.5 mm
Height: 30.4 mm

Electrical Specification

SWR: 1.19 U
Return Loss: -20.8 dB
Impedance: 49.4 Ω

System Validation Results

| Frequency | 1 Gram | 10 Gram | Peak |
|-----------|--------|---------|------|
| 2.45 GHz | 48.07 | 25.65 | 95.6 |

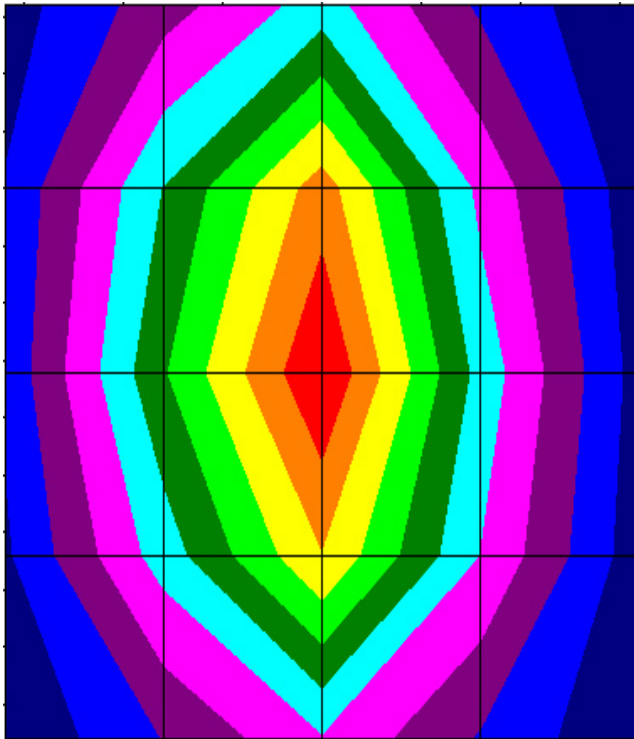

Conditions

Dipole 319 is a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 21 °C +/- 0.5°C

References


SSI-TP-018-ALSAS Dipole Calibration Procedure

SSI-TP-016 Tissue Calibration Procedure

IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

IEC 62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1 & Part 2: Procedure to determine the specific absorption rate (SAR) for mobile wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)

We the undersigned attest that to the best of our knowledge the calibration of this device has been accurately conducted and that all information contained within this report has been reviewed for accuracy.

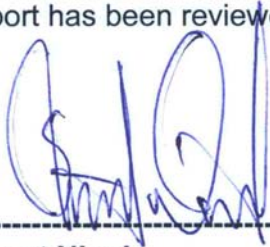

Stuart Nicol



C. Teodorian

Dipole Calibration Results

Mechanical Verification

| IEEE Length | IEEE Height | Measured Length | Measured Height |
|--------------------|--------------------|------------------------|------------------------|
| 51.5 mm | 30.4 mm | 53.5 mm | 30.4 mm |

Tissue Validation

| Head Tissue 2450 MHz | Measured |
|---|-----------------|
| Dielectric constant, ϵ_r | 40.1 |
| Conductivity, σ [S/m] | 1.78 |

Electrical Calibration

| Test | Result |
|-----------|---------------|
| S11 R/L | -20.8 dB |
| SWR | 1.2 U |
| Impedance | 49.4 Ω |

The Following Graphs are the results as displayed on the Vector Network Analyzer.


S11 Parameter Return Loss

S11 FORWARD REFLECTION

LOG MAGNITUDE

REF = -25.000 dB

5.000 dB/DIV

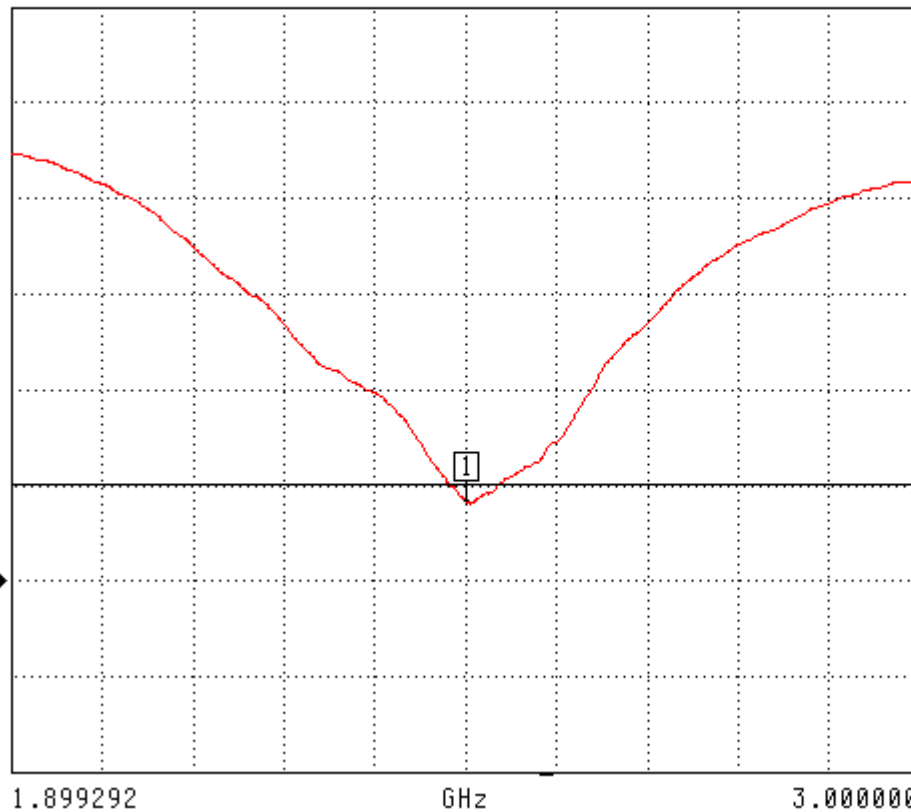

CH 1 - S11
REFERENCE PLANE
0.0000 mm

MARKER 1
2.450046 GHz
-20.796 dB

MARKER TO MAX
▶ MARKER TO MIN

MARKER READOUT
FUNCTIONS


SWR

S11 FORWARD REFLECTION

SWR

REF=500.000 mU

1.000 U/DIV

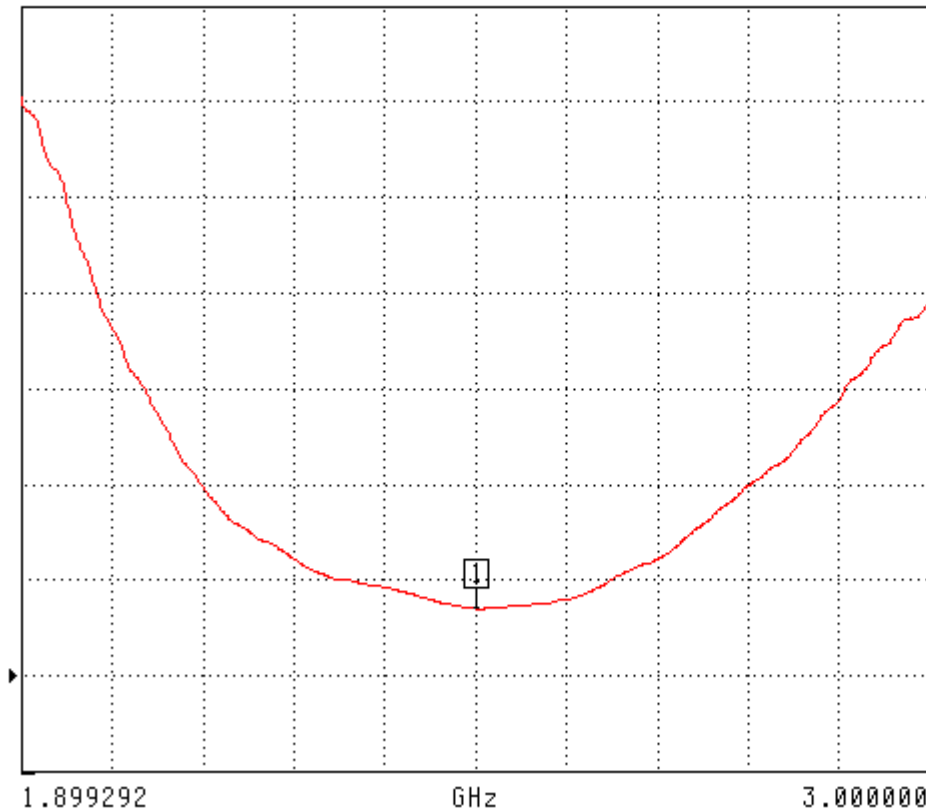

CH 1 - S11
REFERENCE PLANE
0.0000 mm


MARKER 1
2.450046 GHz
1.199 U

MARKER TO MAX
▶ MARKER TO MIN

MARKER READOUT
FUNCTIONS

Smith Chart Dipole Impedance

S11 FORWARD REFLECTION
IMPEDANCE

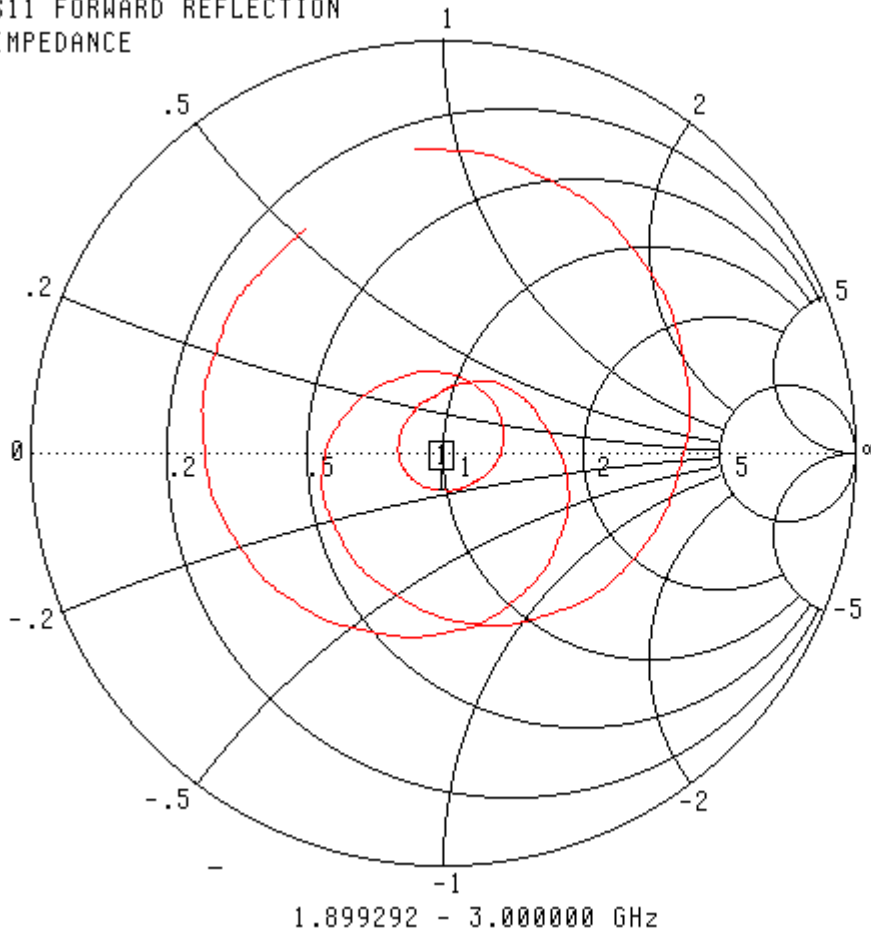

CH 1 - S11
REFERENCE PLANE
0.0000 mm


MARKER 1
2.450046 GHz
49.365 Ω
-9.232 $j\Omega$

MARKER TO MAX
▶ MARKER TO MIN

MARKER READOUT
FUNCTIONS

System Validation Results Using the Electrically Calibrated Dipole

| Frequency | 1 Gram | 10 Gram | Peak Above Feed Point |
|-----------|--------|---------|--------------------------|
| 2.45 GHz | 48.07 | 25.65 | 95.6 |

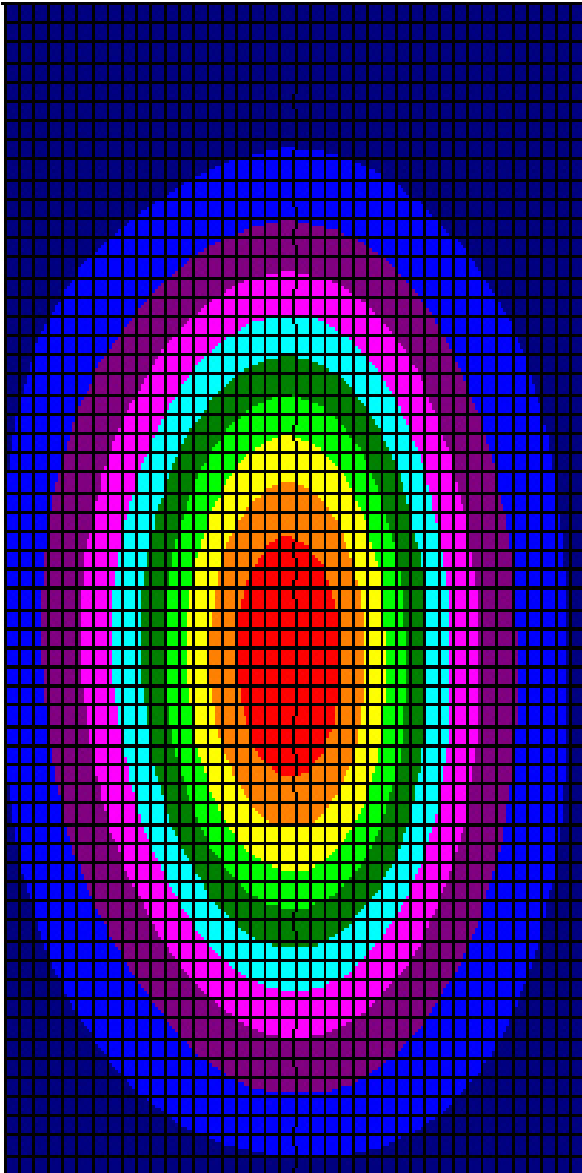

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2008.