

FCC TEST REPORT

according to

FCC Rules and Regulations

Part 15 Subpart C

Applicant	SerComm Corporation
Address	8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Equipment	ADSL VoIP Router
Model No.	IP819VGA
Serial No.	IP809VGA
FCC ID	P27WIAD2X
Trade Name	SerComm

Laboratory Accreditation



1332

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Exclusive Certification Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

Contents

1. Report of Measurements and Examinations	4
1.1. List of Measurements and Examinations	4
2. Test Configuration of Equipment under Test	5
2.1. Feature of Equipment under Test	5
2.2. RF Module Specifications	5
2.3. Test Mode and Test Software.....	6
2.4. Description of Test System	6
2.5. Connection Diagram of Test System	7
2.6. General Information of Test	8
2.7. History of this test report	8
3. Antenna Requirements	9
3.1. Standard Applicable	9
3.2. Antenna Construction and Directional Gain	9
4. Test of Conducted Emission	10
4.1. Test Limit	10
4.2. Test Procedures	10
4.3. Typical Test Setup	11
4.4. Measurement equipment	11
4.5. Test Result and Data.....	12
5. Test of Radiated Emission	25
5.1. Test Limit	25
5.2. Test Procedures	26
5.3. Typical Test Setup.....	27
5.4. Measurement equipment	27
5.5. Test Result and Data.....	28
6. 6dB Bandwidth Measurement	45
6.1. Test Procedure	45
6.2. Test Setup Layout	45
6.3. Test Result and Data.....	45
7. Maximum Peak Output Power.....	49
7.1. Test Procedure	49
7.2. Test Setup Layout	49
7.3. Test Result and Data.....	49
8. Band Edges Measurement.....	53
8.1. Test Procedure	53
8.2. Test Result and Data.....	53
8.3. Restrict band emission Measurement Data.....	58
9. Power Spectral Density Measurement	59
9.1. Test Procedure	59
9.2. Test Setup Layout	59
9.3. Test Result and Data.....	59
10. Restricted Bands of Operation	63
10.1. Labeling Requirement	63
Appendix A. Photographs of EUT.....	A1 ~ A9

CERTIFICATE OF COMPLIANCE

according to

FCC Rules and Regulations


Part 15 Subpart C

Applicant	SerComm Corporation
Address	8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Equipment	ADSL VoIP Router
Model No.	IP819VGA
Serial No.	IP809VGA
FCC ID	P27WIAD2X

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4**. The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2003)**. The test was carried out on Jul. 01, 2005 at *Exclusive Certification Corp.*

Signature

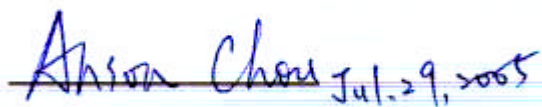Anson Chou Jul. 29, 2005

Anson Chou / Manager

1. Report of Measurements and Examinations

1.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(c)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(d)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass

Test engineer: Jerry

2. Test Configuration of Equipment under Test

2.1. Feature of Equipment under Test

Model	802.11g ADSL VoIP Gateway
Dimensions	183mm(W) * 125mm(D) * 31mm(H)
Operating Temperature	0° C to 40° C
Storage Temperature	-10° C to 70° C
Network Protocol:	TCP/IP
ADSL Interface	1 * RJ11 connector T1.413, G.DMT, G.lite, multi-mode
Ethernet Interface:	1 * 10/100BaseT (RJ45) LAN port
Phone Line Interface	1 * RJ11 connector for PSTN Phone Line 2 * RJ11 connector for standard analog telephone
LEDs	16
Power Adapter	15 V DC External

2.2. RF Module Specifications

Standards	IEEE802.11b, IEEE802.11g WLAN
Frequency	2.4 to 2.4835GHz (Industrial Scientific Medical Band)
Channels	Maximum 14 Channels, depending on regulatory authorities
Modulation	CCK, DQPSK, DBPSK, OFDM/CCK
Data Rate	Up to 54 Mbps (802.11g)
Security	WEP 64Bit, WPA 128Bit, WPA-PSK, MAC address checking
Output Power	13dBm (typical)
Receiver Sensitivity	-80dBm Min.

2.3. Test Mode and Test Software

The following test mode and test software was performed for conduction and radiation test:

- 802.11b (CH LO: 2412MHz) • 802.11b (CH MID: 2437MHz) • 802.11b (CH HI: 2462MHz)
- 802.11g (CH LO: 2412MHz) • 802.11g (CH MID: 2437MHz) • 802.11g (CH HI: 2462MHz)
- An executive programs, "telnet" Application under WIN XP.


2.4. Description of Test System

Device	Manufacturer	Model No.	Description
PC	IBM	IGV	Power Cable, Unshielding 1.8 m
Monitor	SlimAGE	510A	Power Cable, Adapter Unshielding 1.8 m Data Cable, VGA shielding 1.35 m
Keyboard	IBM	KB-0225	Data Cable, PS2, shielding 1.85 m
Mouse	IBM	MO28VO	Data Cable, USB shielding 1.85 m
Modem	ACEXX	DM-1414	Power Cable, Adapter Unshielding 1.8 m Data Cable, RS232 Unshielding 1.35 m
Printer	HP	Desk Jet400	Power Cable, Adapter Unshielding 1.8 m Data Cable, PRINT Shielding 1.6 m
Phone	CID	TC-755	Data Cable, Phone Unshielding 1.8 m
Phone	Always	AW-915	Data Cable, Phone Unshielding 1.8 m
Notebook (Remote site)	IBM	R40(2723-BV1)	Power Cable, Adapter Unshielding 1.8 m
CO-A (Remote site)	Premier	MKCOR08X	Power Cable, Adapter Unshielding 1.8 m
CO-B (Remote site)	Premier	MKCOR08X	Power Cable, Adapter Unshielding 1.8 m

Use Cable:

Cable	Description
USB	Shielding, 1.5m
RJ45	Unshielding, 10m
RJ45	Unshielding, 1.5m
RJ45*2	Unshielding, 0.5m
RJ11*2	Unshielding, 10 m

2.5. Connection Diagram of Test System

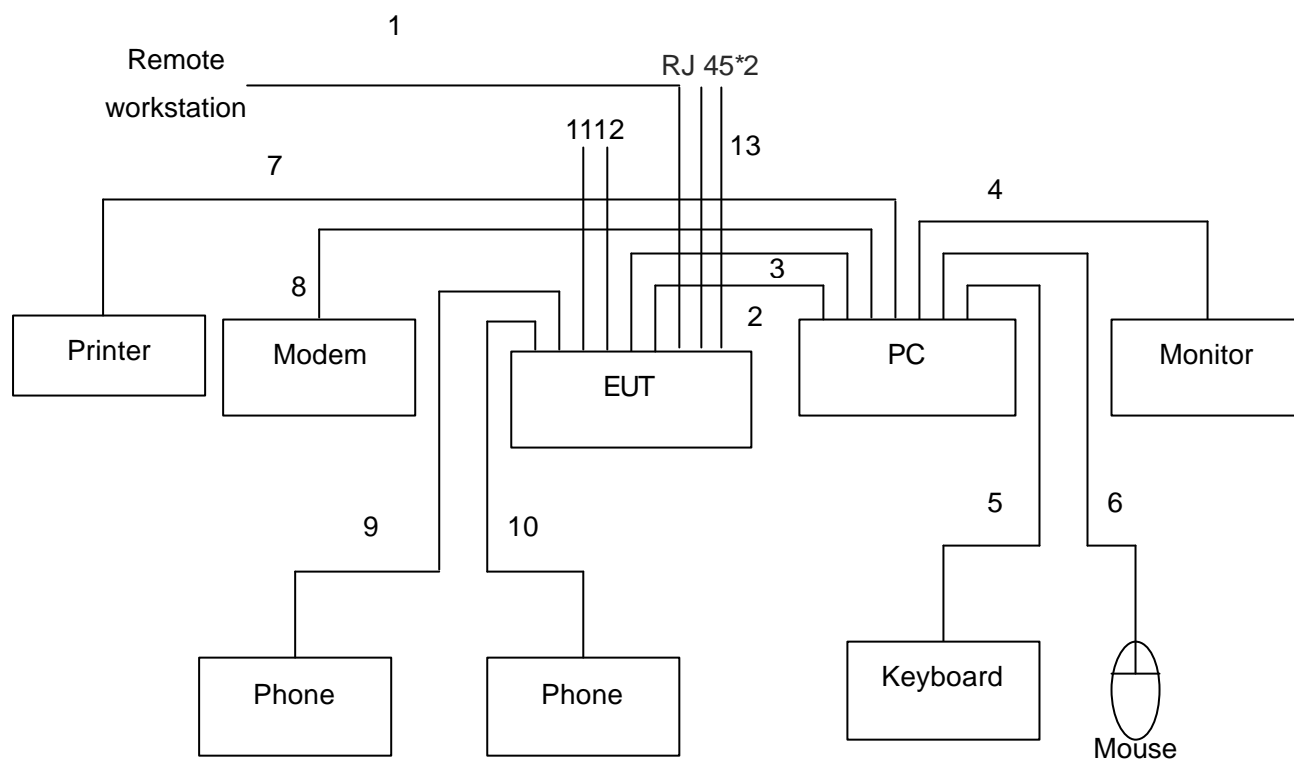

1. The RJ 45 cable is connected from Remote Workstation to the EUT.
2. The USB cable is connected from PC to the EUT.
3. The RJ 45 cable is connected from PC to the EUT.
4. The I/O cable is connected from PC to the Monitor.
5. The I/O cable is connected from PC to the Keyboard.
6. The I/O cable is connected from PC to the Mouse.
7. The I/O cable is connected from PC to the Printer.
8. The I/O cable is connected from PC to the Modem.
9. The RJ 11 cable is connected from PC to the Phone.
10. The RJ 11 cable is connected from PC to the Phone.
11. The I/O cable is connected from CO to the EUT.
12. The I/O cable is connected from TEL line to the EUT.
13. These RJ 45 cables are floating.

2.6. General Information of Test

Test Site:	Exclusive Certification Corp. 4F-2, No. 28, Lane 78, Xing-Ai Rd. Nei-hu, Taipei City 114 Taiwan R.O.C.
Test Site Location (OATS1-SD):	No.68-1, Shihbachongsi, shihding Township, Taipei County 223, Taiwan, R.O.C.
Test Voltage:	AC 120V/ 60Hz
Test in Compliance with:	ANSI C63.4-2003 FCC Part 15 Subpart C
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 24620MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

2.7. History of this test report

ORIGINAL.

3. Antenna Requirements

3.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2. Antenna Construction and Directional Gain

Antenna type 1 : Reverse SMA connector, dipole antenna

Antenna Gain: 2 dBi.

Antenna type 2 : Integral dipole antenna

Antenna Gain: 2 dBi.

4. Test of Conducted Emission

4.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

4.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3. Typical Test Setup

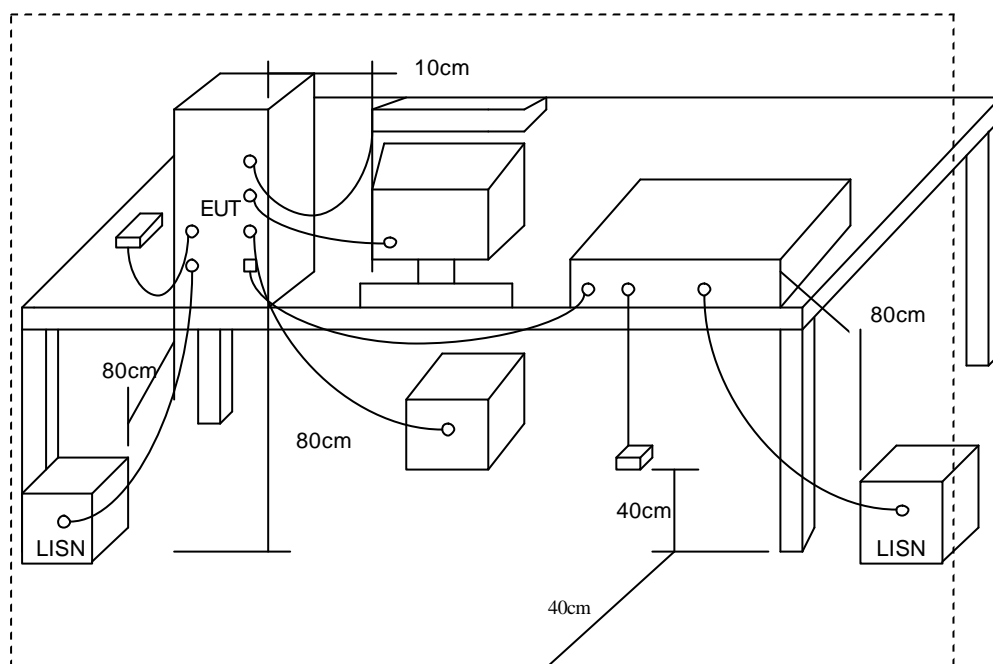


4.4. Measurement equipment

Instrument/Ancillary	Type	Manufacturer	Valid Date.
Receiver	SCR3501	Schaffner	2005/11/03
LISN	NNB-2/16Z	MESS TEC	2006/03/30
LISN	NNB-2/16Z	ROLF HEINE	2006/05/01

4.5. Test Result and Data

EVT : IP819VGA
 Power : AC120V
 Test Mode : 802.11b CH1
 Memo : ADS6818-1815-W

Pol/Phase : NEUTRAL
 Temperature : 28 °C
 Humidity : 65 %

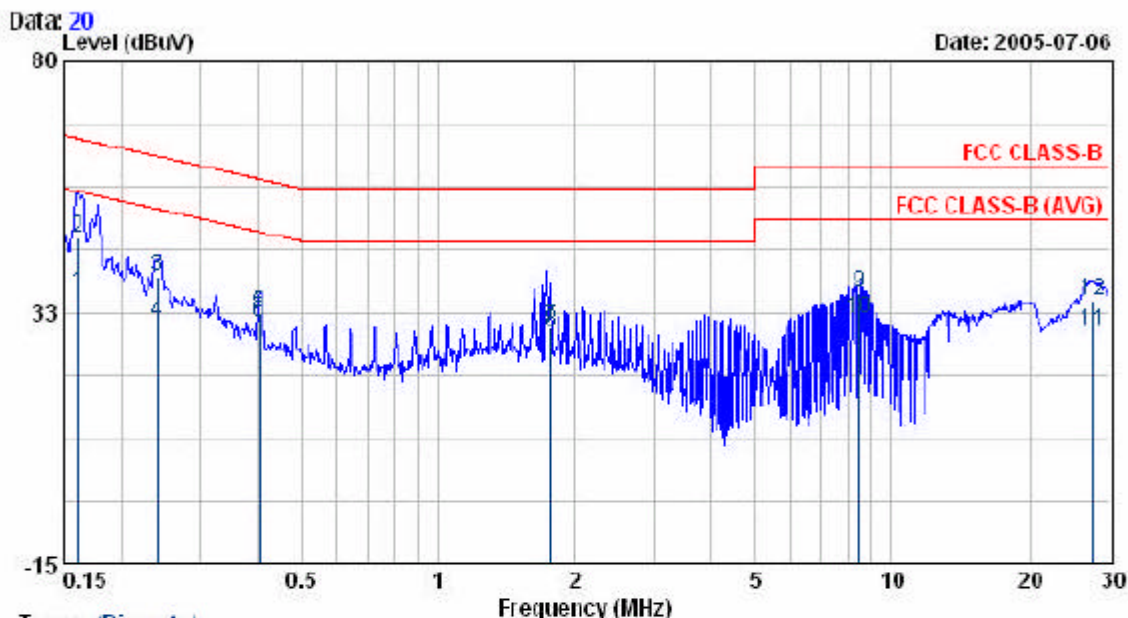


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	36.14	0.16	36.30	55.43	-19.12	AVERAGE
0.16	46.55	0.16	46.71	65.43	-18.71	QP
0.24	39.24	0.19	39.42	62.04	-22.62	QP
0.24	30.33	0.18	30.51	52.04	-21.53	AVERAGE
0.40	32.02	0.40	32.42	57.80	-25.38	QP
0.40	30.17	0.40	30.57	47.80	-17.23	AVERAGE
1.77	29.31	0.38	29.69	56.00	-26.31	QP
1.77	28.47	0.38	28.85	46.00	-17.15	AVERAGE
8.53	35.92	0.32	36.24	60.00	-23.76	QP
8.53	30.85	0.32	31.17	50.00	-18.83	AVERAGE
27.70	28.48	0.40	28.88	50.00	-21.12	AVERAGE
27.70	34.35	0.40	34.75	60.00	-25.25	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : IP819VGA
 Power : AC120V
 Test Mode : 802.11b CH1
 Memo : ADS6818-1815-W

Pol/Phase : LINE
 Temperature : 28 °C
 Humidity : 65 %

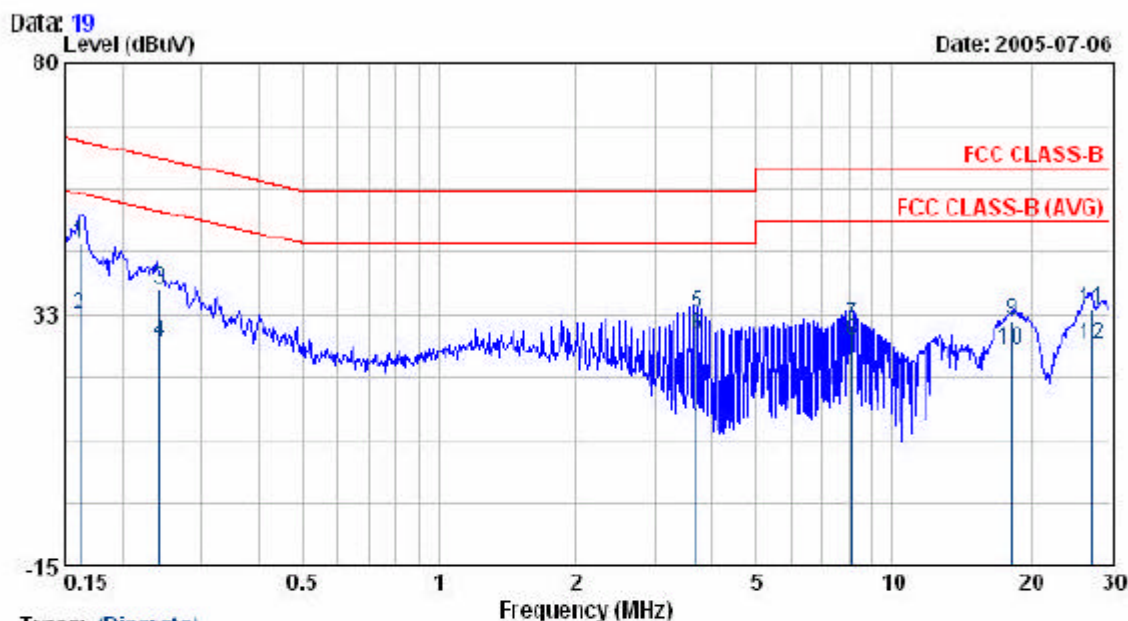


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	45.66	0.36	46.02	65.41	-19.39	QP
0.16	32.03	0.36	32.39	55.41	-23.02	AVERAGE
0.24	36.71	0.38	37.09	62.02	-24.93	QP
0.24	26.82	0.38	27.20	52.02	-24.82	AVERAGE
3.70	32.12	0.70	32.82	56.00	-23.18	QP
3.70	27.69	0.70	28.39	46.00	-17.61	AVERAGE
8.13	29.82	0.62	30.44	60.00	-29.56	QP
8.13	26.99	0.62	27.61	50.00	-22.39	AVERAGE
18.19	30.59	0.70	31.29	60.00	-28.71	QP
18.19	24.94	0.70	25.64	50.00	-24.36	AVERAGE
27.29	32.59	0.70	33.29	60.00	-26.71	QP
27.29	25.92	0.70	26.62	50.00	-23.38	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EVT : IP819V0A
 Power : AC120V
 Test Mode : 802.11b CH6
 Memo : ADS6818-1815-W

Pol/Phase : NEUTRAL
 Temperature : 28 °C
 Humidity : 65 %

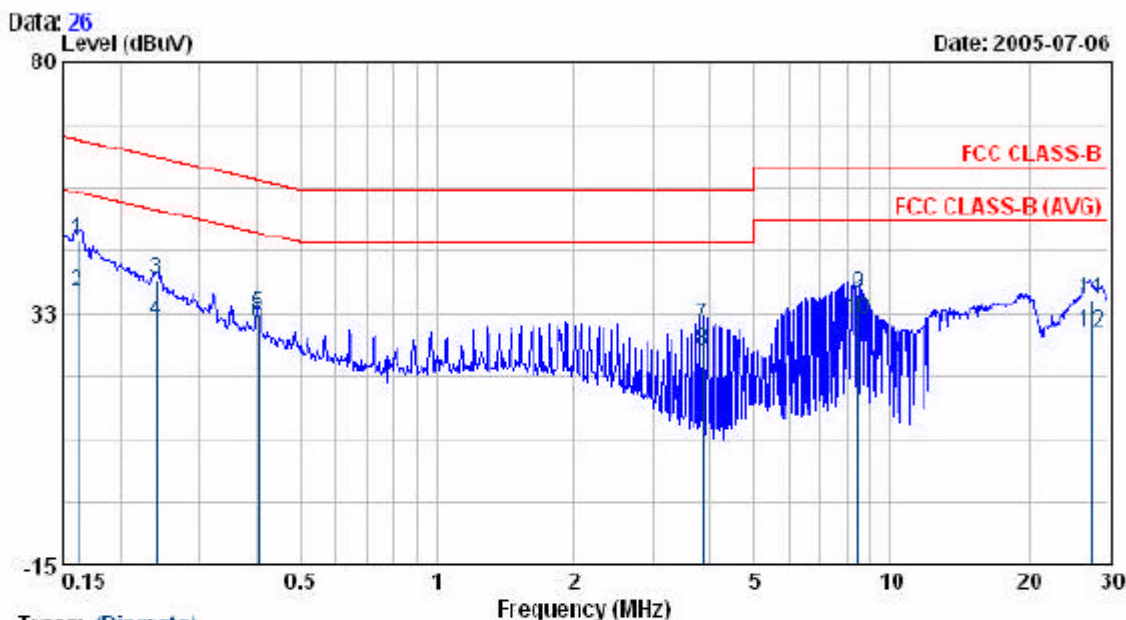


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	46.04	0.16	46.20	65.40	-19.20	QP
0.16	36.24	0.16	36.40	55.40	-19.00	AVERAGE
0.24	38.70	0.18	38.88	62.05	-23.17	QP
0.24	30.76	0.18	30.94	52.05	-21.11	AVERAGE
0.40	32.05	0.40	32.45	57.79	-25.34	QP
0.40	30.04	0.40	30.44	47.79	-17.35	AVERAGE
3.86	29.92	0.40	30.32	56.00	-25.68	QP
3.86	25.09	0.40	25.49	46.00	-20.51	AVERAGE
8.53	35.68	0.32	36.00	60.00	-24.00	QP
8.53	30.97	0.32	31.29	50.00	-18.71	AVERAGE
27.70	34.80	0.40	35.20	60.00	-24.80	QP
27.70	28.39	0.40	28.79	50.00	-21.21	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : IP819VGA
 Power : AC120V
 Test Mode : 802.11b CH6
 Memo : ADS6818-1815-W

Pol/Phase : LINE
 Temperature : 28 °C
 Humidity : 65 %

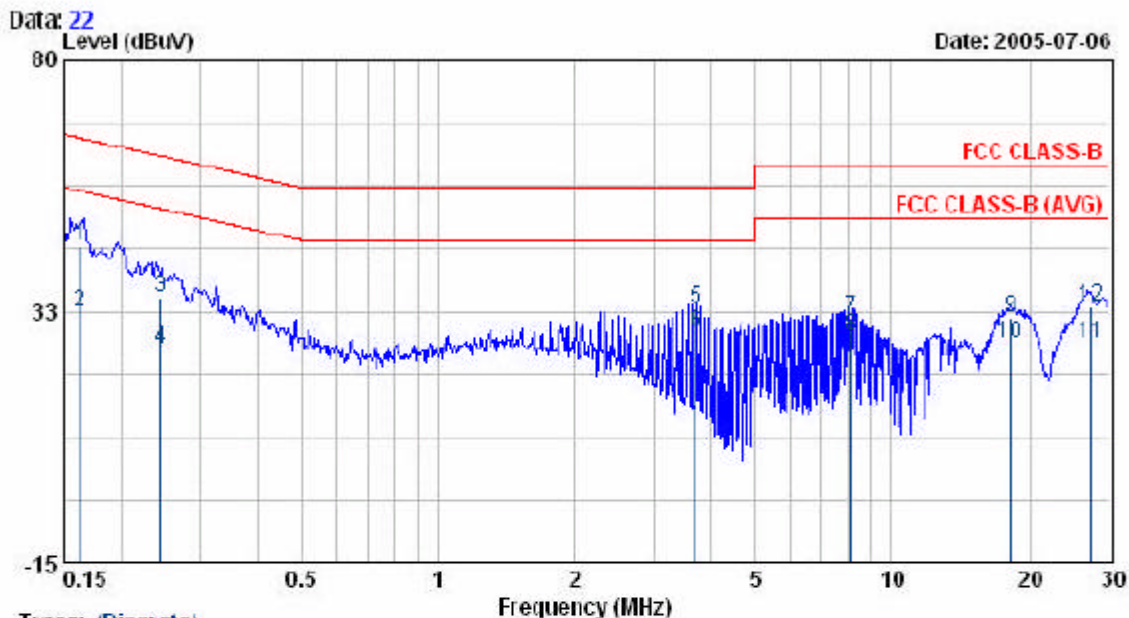


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	44.55	0.36	44.91	65.37	-20.46	QP
0.16	31.80	0.36	32.16	55.37	-23.21	AVERAGE
0.24	34.75	0.39	35.14	61.93	-26.79	QP
0.24	24.84	0.39	25.23	51.93	-26.70	AVERAGE
3.70	32.18	0.70	32.88	56.00	-23.12	QP
3.70	27.83	0.70	28.53	46.00	-17.47	AVERAGE
8.13	30.76	0.62	31.38	60.00	-28.62	QP
8.13	27.20	0.62	27.82	50.00	-22.18	AVERAGE
18.19	30.62	0.70	31.32	60.00	-28.68	QP
18.19	25.77	0.70	26.47	50.00	-23.53	AVERAGE
27.29	25.63	0.70	26.33	50.00	-23.67	AVERAGE
27.29	32.65	0.70	33.35	60.00	-26.65	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EVT : IP819VGA
 Power : AC120V
 Test Mode : 802.11b CH11
 Memo : ADS6818-1815-W

Pol/Phase : NEUTRAL
 Temperature : 28 °C
 Humidity : 65 %

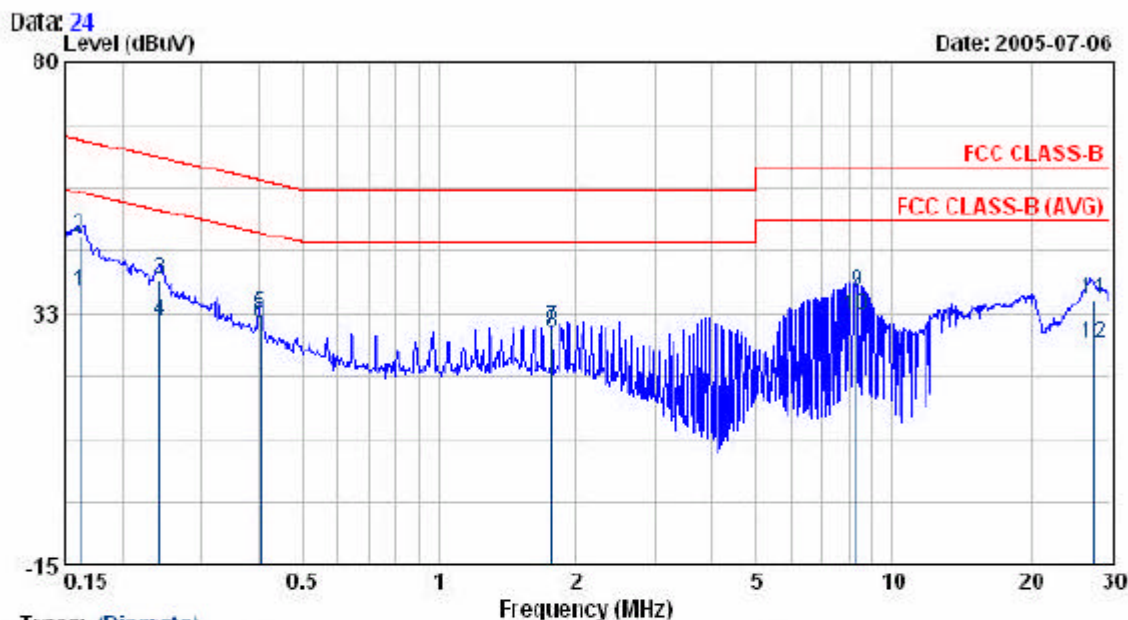

Trace: (Discrete)


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	36.21	0.16	36.37	55.38	-19.01	AVERAGE
0.16	46.88	0.16	47.04	65.38	-18.34	QP
0.24	38.96	0.18	39.04	62.03	-22.99	QP
0.24	30.89	0.18	31.07	52.03	-20.96	AVERAGE
0.40	31.99	0.40	32.39	57.80	-25.41	QP
0.40	30.17	0.40	30.57	47.80	-17.23	AVERAGE
1.77	29.25	0.38	29.63	56.00	-26.37	QP
1.77	28.38	0.38	28.76	46.00	-17.24	AVERAGE
8.37	36.05	0.32	36.37	60.00	-23.63	QP
8.37	31.83	0.32	32.15	50.00	-17.85	AVERAGE
27.70	34.70	0.40	35.10	60.00	-24.90	QP
27.70	26.50	0.40	26.90	50.00	-23.10	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : IP819VCA
 Power : AC120V
 Test Mode : 802.11b CH11
 Memo : ADS6818-1815-W

Pol/Phase : LINE
 Temperature : 28 °C
 Humidity : 65 %

Data: 25

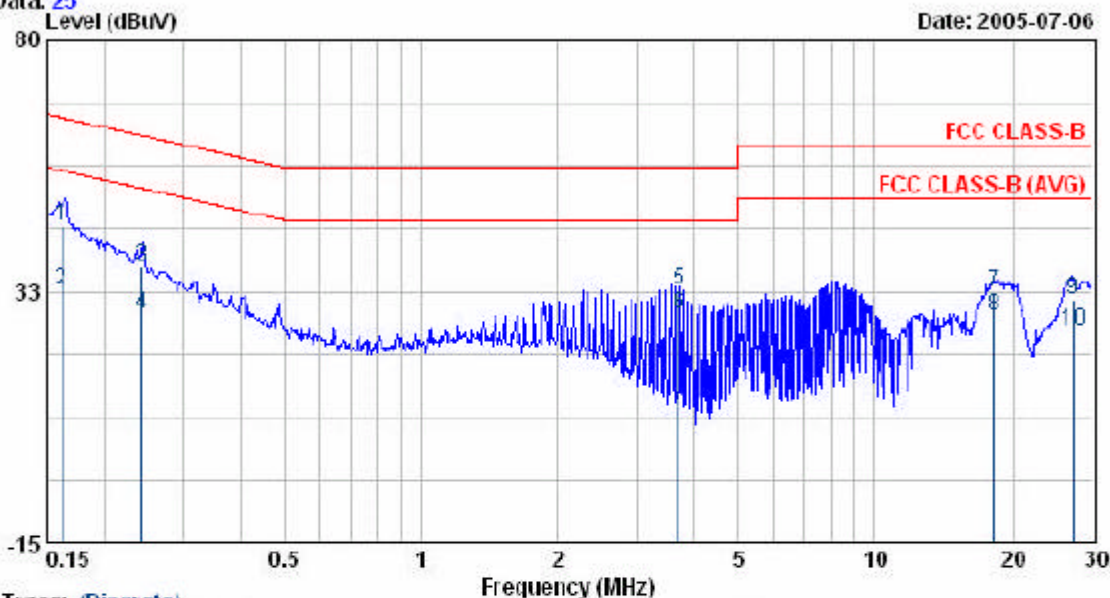


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	44.53	0.36	44.89	65.38	-20.49	QP
0.16	32.19	0.36	32.55	55.38	-22.83	AVERAGE
0.24	36.96	0.39	37.24	62.04	-24.80	QP
0.24	27.73	0.38	28.11	52.04	-23.93	AVERAGE
3.70	31.86	0.70	32.56	56.00	-23.44	QP
3.70	27.57	0.70	28.27	46.00	-17.73	AVERAGE
18.19	31.66	0.70	32.36	60.00	-27.64	QP
18.19	27.01	0.70	27.71	50.00	-22.29	AVERAGE
27.29	30.10	0.70	30.80	60.00	-29.20	QP
27.29	24.19	0.70	24.89	50.00	-25.11	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EVT : IP8197GA
 Power : AC120V
 Test Mode : 802.11g CH1
 Memo : ADS6818-1815-W

Pol/Phase : NEUTRAL
 Temperature : 28 °C
 Humidity : 65 %

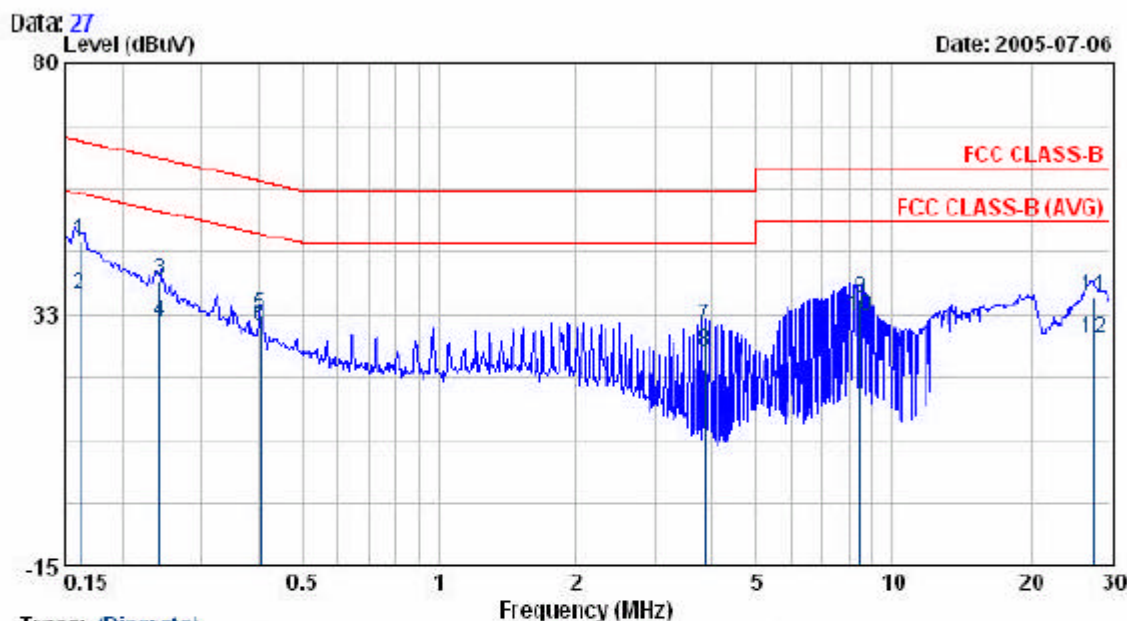


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	46.02	0.16	46.18	65.41	-19.23	QP
0.16	36.14	0.16	36.30	55.41	-19.11	AVERAGE
0.24	38.78	0.18	38.96	62.04	-23.08	QP
0.24	30.80	0.18	30.98	52.04	-21.06	AVERAGE
0.40	32.00	0.40	32.40	57.80	-25.40	QP
0.40	29.97	0.40	30.37	47.80	-17.43	AVERAGE
3.87	29.81	0.40	30.21	56.00	-25.79	QP
3.87	25.03	0.40	25.43	46.00	-20.57	AVERAGE
8.53	35.01	0.32	35.33	60.00	-24.67	QP
8.53	31.67	0.32	31.99	50.00	-18.01	AVERAGE
27.69	35.25	0.40	35.65	60.00	-24.35	QP
27.69	27.51	0.40	27.91	50.00	-22.09	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EVT : IP8197GA
 Power : AC120V
 Test Mode : 802.11g CH1
 Memo : ADS6818-1815-W

Pol/Phase : LINE
 Temperature : 28 °C
 Humidity : 65 %

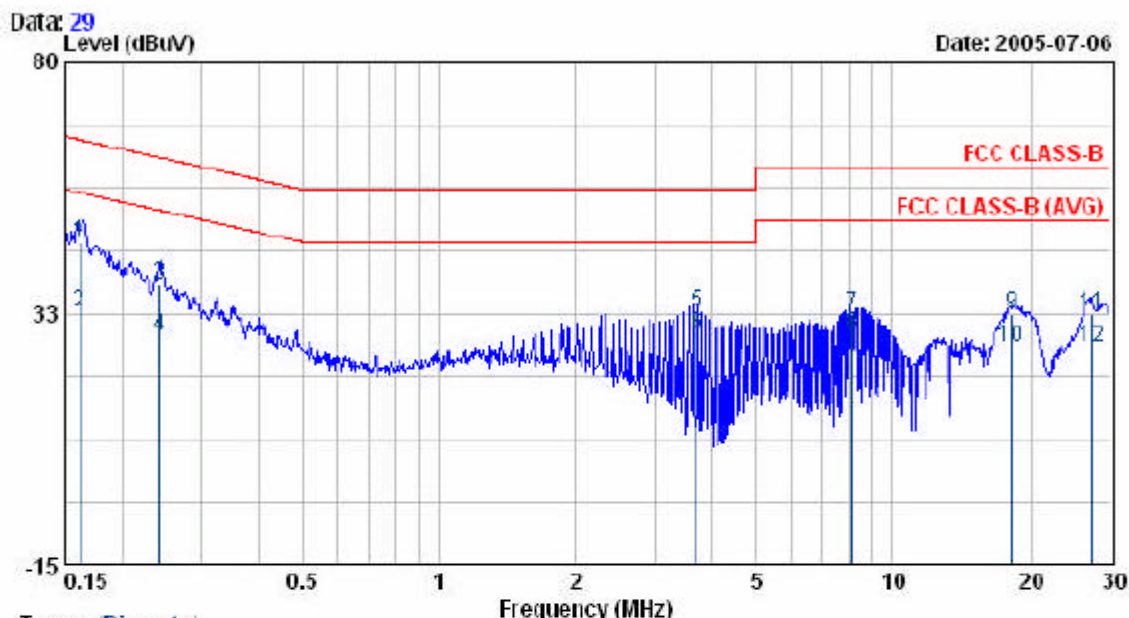


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	45.37	0.36	45.73	65.41	-19.68	QP
0.16	32.37	0.36	32.73	55.41	-22.68	AVERAGE
0.24	37.41	0.38	37.79	62.03	-24.24	QP
0.24	27.63	0.38	28.01	52.03	-24.02	AVERAGE
3.70	31.91	0.70	32.61	56.00	-23.39	QP
3.70	27.86	0.70	28.56	46.00	-17.44	AVERAGE
8.13	31.66	0.62	32.28	60.00	-27.72	QP
8.13	27.79	0.62	28.41	50.00	-21.59	AVERAGE
18.19	31.46	0.70	32.16	60.00	-27.84	QP
18.19	25.41	0.70	26.11	50.00	-23.89	AVERAGE
27.29	31.50	0.70	32.20	60.00	-27.80	QP
27.29	25.48	0.70	26.18	50.00	-23.82	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : IP819VGA
 Power : AC120V
 Test Mode : 802.11g CH6
 Memo : ADS6818-1815-W

Pol/Phase : NEUTRAL
 Temperature : 28 °C
 Humidity : 65 %

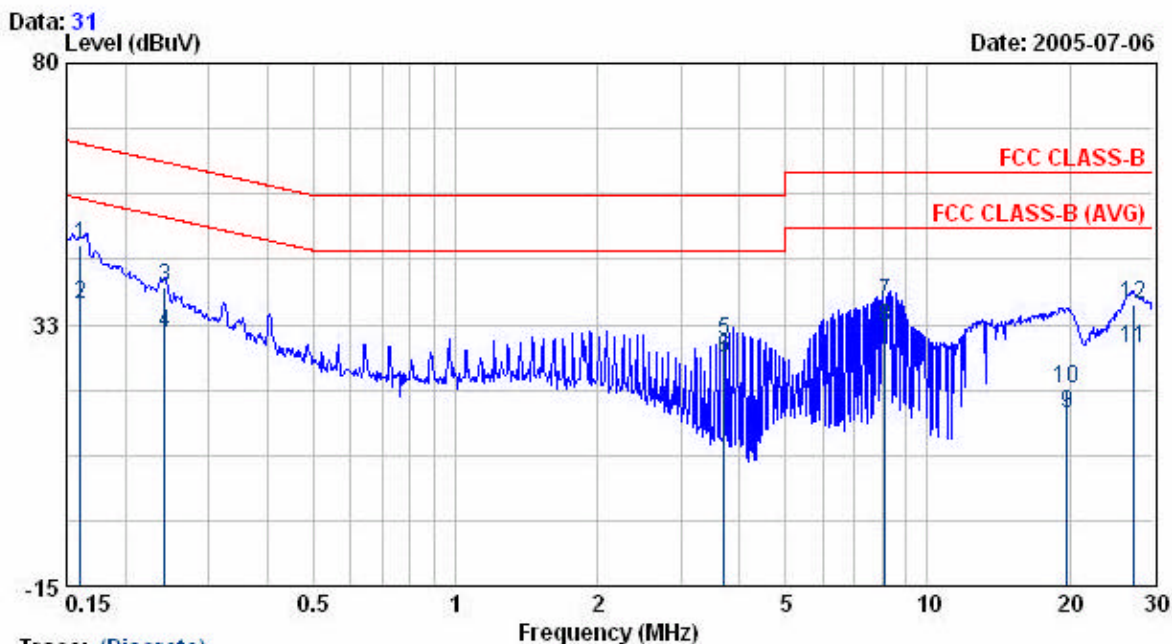


Trace: (Discrete)

Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
0.16	46.86	0.16	47.02	65.45	-18.42	QP
0.16	35.92	0.16	36.08	55.45	-19.36	AVERAGE
0.24	38.94	0.18	39.12	62.01	-22.89	QP
0.24	30.77	0.18	30.95	52.01	-21.06	AVERAGE
3.70	29.07	0.40	29.47	56.00	-26.53	QP
3.70	25.85	0.40	26.25	46.00	-19.75	AVERAGE
8.13	36.08	0.32	36.40	60.00	-23.60	QP
8.13	31.49	0.32	31.81	50.00	-18.19	AVERAGE
19.71	16.08	0.41	16.49	50.00	-33.51	AVERAGE
19.71	20.56	0.41	20.97	60.00	-39.03	QP
27.29	27.67	0.40	28.07	50.00	-21.93	AVERAGE
27.29	35.70	0.40	36.10	60.00	-23.90	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : IP819VGA
 Power : AC120V
 Test Mode : 802.11g CH6
 Memo : ADS6818-1815-W

Pol/Phase : LINE
 Temperature : 28 °C
 Humidity : 65 %

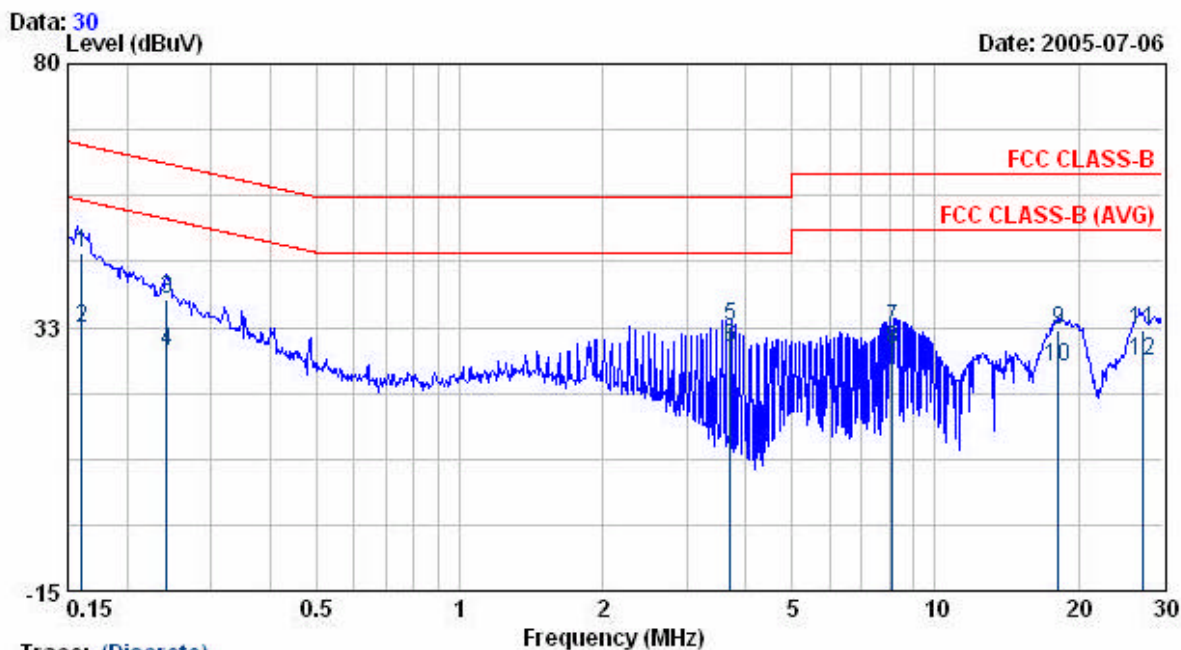

Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	45.67	0.36	46.03	65.43	-19.40	QP
0.16	32.06	0.36	32.42	55.43	-23.01	AVERAGE
0.24	37.19	0.38	37.57	62.03	-24.46	QP
0.24	27.61	0.38	27.99	52.03	-24.04	AVERAGE
3.70	31.90	0.70	32.60	56.00	-23.40	QP
3.70	28.06	0.70	28.76	46.00	-17.24	AVERAGE
8.13	31.77	0.62	32.39	60.00	-27.61	QP
8.13	27.80	0.62	28.42	50.00	-21.58	AVERAGE
18.19	31.37	0.70	32.07	60.00	-27.93	QP
18.19	24.77	0.70	25.47	50.00	-24.53	AVERAGE
27.30	31.18	0.70	31.88	60.00	-28.12	QP
27.30	25.60	0.70	26.30	50.00	-23.70	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss


EVT : IP819VGA
 Power : AC120V
 Test Mode : 802.11g CH11
 Memo : ADS6818-1815-W

Pol/Phase : NEUTRAL
 Temperature : 28 ℃
 Humidity : 65 %

Data: 32

Level (dBuV)

Date: 2005-07-06

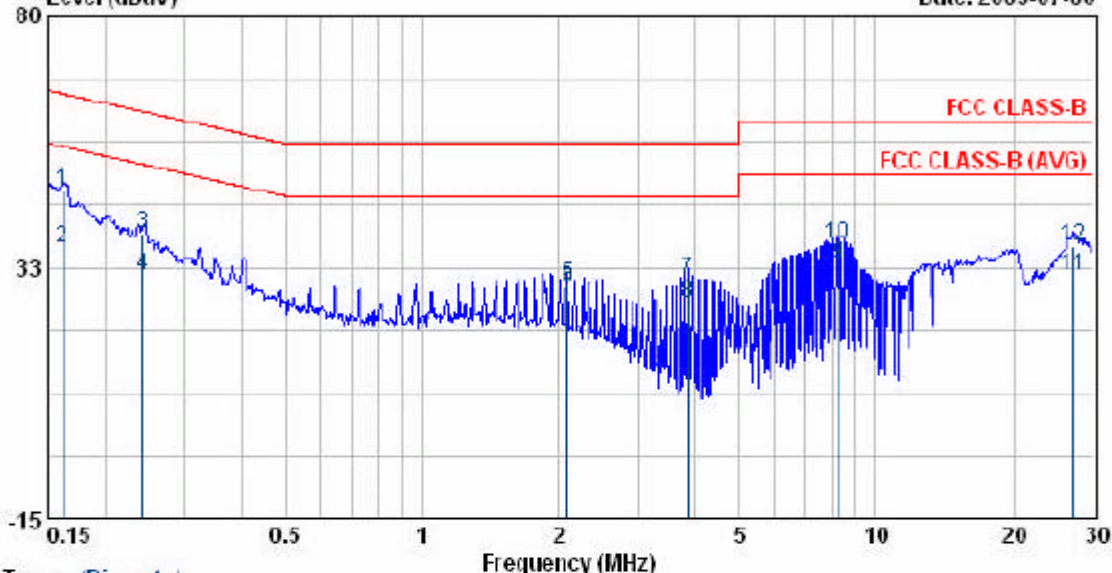


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	46.95	0.16	47.11	65.38	-18.27	QP
0.16	36.04	0.16	36.20	55.38	-19.18	AVERAGE
0.24	38.96	0.18	39.04	62.02	-22.98	QP
0.24	30.75	0.18	30.93	52.02	-21.09	AVERAGE
2.09	28.95	0.40	29.35	56.00	-26.65	QP
2.09	28.10	0.40	28.50	46.00	-17.50	AVERAGE
3.86	29.92	0.40	30.32	56.00	-25.68	QP
3.86	25.33	0.40	25.73	46.00	-20.27	AVERAGE
8.29	32.66	0.32	32.98	50.00	-17.02	AVERAGE
8.29	36.67	0.32	36.99	60.00	-23.01	QP
27.13	30.46	0.40	30.86	50.00	-19.14	AVERAGE
27.13	36.00	0.40	36.40	60.00	-23.60	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : IP819VGA
 Power : AC120V
 Test Mode : 802.11g CH11
 Memo : ADS6818-1815-W

Pol/Phase : LINE
 Temperature : 28 °C
 Humidity : 65 %

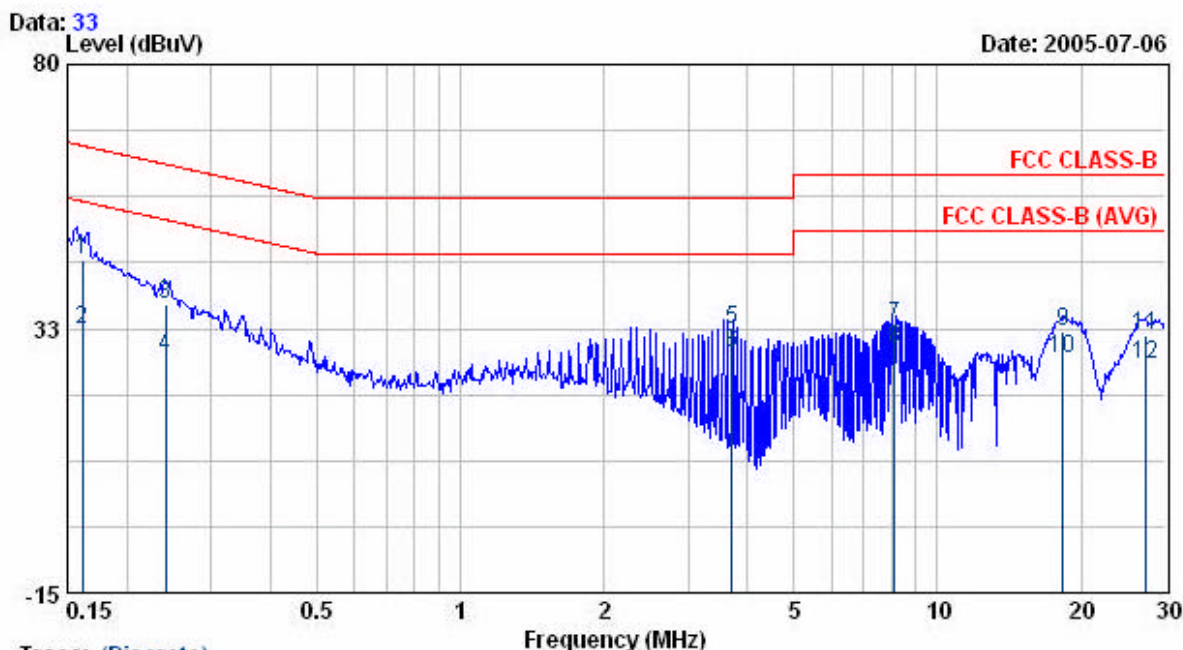

Trace: (Discrete)

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.16	44.50	0.36	44.86	65.39	-20.52	QP
0.16	31.81	0.36	32.17	55.39	-23.21	AVERAGE
0.24	36.46	0.38	36.84	62.07	-25.22	QP
0.24	27.12	0.38	27.50	52.07	-24.56	AVERAGE
3.70	31.75	0.70	32.45	56.00	-23.55	QP
3.70	27.49	0.70	28.19	46.00	-17.81	AVERAGE
8.13	32.26	0.62	32.88	60.00	-27.12	QP
8.13	28.29	0.62	28.91	50.00	-21.09	AVERAGE
18.36	31.30	0.69	31.99	60.00	-28.01	QP
18.36	26.28	0.69	26.97	50.00	-23.03	AVERAGE
27.29	30.41	0.70	31.11	60.00	-28.89	QP
27.29	25.22	0.70	25.92	50.00	-24.08	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

Test engineer: Jerry