

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	115.0 PK			3.07 H	316	73.7	41.3
2	*5580.00	105.3 AV			3.07 H	316	64.0	41.3
3	11160.00	57.0 PK	74.0	-17.0	1.62 H	173	47.5	9.5
4	11160.00	46.9 AV	54.0	-7.1	1.62 H	173	37.4	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	121.3 PK			1.72 V	258	80.0	41.3
2	*5580.00	111.2 AV			1.72 V	258	69.9	41.3
3	11160.00	57.3 PK	74.0	-16.7	2.71 V	142	47.8	9.5
4	11160.00	47.1 AV	54.0	-6.9	2.71 V	142	37.6	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.9 PK			3.08 H	313	70.9	42.0
2	*5700.00	103.7 AV			3.08 H	313	61.7	42.0
3	#5725.00	62.6 PK	68.2	-5.6	3.08 H	313	58.3	4.3
4	11400.00	57.0 PK	74.0	-17.0	1.70 H	182	47.4	9.6
5	11400.00	46.9 AV	54.0	-7.1	1.70 H	182	37.3	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.3 PK			1.72 V	258	76.3	42.0
2	*5700.00	108.5 AV			1.72 V	258	66.5	42.0
3	#5725.00	68.0 PK	68.2	-0.2	1.72 V	258	63.7	4.3
4	11400.00	57.1 PK	74.0	-16.9	2.59 V	133	47.5	9.6
5	11400.00	47.0 AV	54.0	-7.0	2.59 V	133	37.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	54.4 PK	68.2	-13.8	3.33 H	313	51.5	2.9
2	*5720.00	114.0 PK			3.33 H	313	71.9	42.1
3	*5720.00	104.9 AV			3.33 H	313	62.8	42.1
4	#5850.00	55.3 PK	68.2	-12.9	3.33 H	313	50.6	4.7
5	11440.00	57.1 PK	74.0	-16.9	1.55 H	182	47.4	9.7
6	11440.00	47.0 AV	54.0	-7.0	1.55 H	182	37.3	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	53.9 PK	68.2	-14.3	1.67 V	260	51.0	2.9
2	*5720.00	119.6 PK			1.67 V	260	77.5	42.1
3	*5720.00	110.1 AV			1.67 V	260	68.0	42.1
4	#5850.00	56.6 PK	68.2	-11.6	1.67 V	260	51.9	4.7
5	11440.00	57.4 PK	74.0	-16.6	2.66 V	138	47.7	9.7
6	11440.00	47.3 AV	54.0	-6.7	2.66 V	138	37.6	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.3 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.00	59.5 PK	68.2	-8.7	3.73 H	314	56.0	3.5
2	*5745.00	120.0 PK			3.73 H	314	77.7	42.3
3	*5745.00	111.3 AV			3.73 H	314	69.0	42.3
4	#5971.20	59.8 PK	68.2	-8.4	3.73 H	314	55.4	4.4
5	11490.00	59.2 PK	74.0	-14.8	1.62 H	359	49.5	9.7
6	11490.00	50.3 AV	54.0	-3.7	1.62 H	359	40.6	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5625.60	59.1 PK	68.2	-9.1	2.10 V	260	55.6	3.5
2	*5745.00	125.0 PK			2.10 V	260	82.7	42.3
3	*5745.00	116.3 AV			2.10 V	260	74.0	42.3
4	#5945.60	59.2 PK	68.2	-9.0	2.10 V	260	54.7	4.5
5	11490.00	61.5 PK	74.0	-12.5	3.00 V	30	51.8	9.7
6	11490.00	51.7 AV	54.0	-2.3	3.00 V	30	42.0	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.3 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.00	59.7 PK	68.2	-8.5	3.55 H	316	56.1	3.6
2	*5785.00	121.4 PK			3.55 H	316	79.0	42.4
3	*5785.00	111.9 AV			3.55 H	316	69.5	42.4
4	#5974.00	59.9 PK	68.2	-8.3	3.55 H	316	55.5	4.4
5	11570.00	59.0 PK	74.0	-15.0	1.63 H	360	49.6	9.4
6	11570.00	50.4 AV	54.0	-3.6	1.63 H	360	41.0	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.60	60.1 PK	68.2	-8.1	3.12 V	261	56.5	3.6
2	*5785.00	126.5 PK			3.12 V	261	84.1	42.4
3	*5785.00	116.9 AV			3.12 V	261	74.5	42.4
4	#5974.00	59.8 PK	68.2	-8.4	3.12 V	261	55.4	4.4
5	11570.00	61.2 PK	74.0	-12.8	3.06 V	31	51.8	9.4
6	11570.00	51.5 AV	54.0	-2.5	3.06 V	31	42.1	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.3 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.40	58.9 PK	68.2	-9.3	3.31 H	313	55.3	3.6
2	*5825.00	118.5 PK			3.31 H	313	76.0	42.5
3	*5825.00	109.1 AV			3.31 H	313	66.6	42.5
4	#5925.20	60.2 PK	68.2	-8.0	3.31 H	313	55.7	4.5
5	11650.00	58.9 PK	74.0	-15.1	1.63 H	357	49.3	9.6
6	11650.00	50.1 AV	54.0	-3.9	1.63 H	357	40.5	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.20	54.8 PK	68.2	-13.4	2.11 V	260	51.0	3.8
2	*5825.00	125.5 PK			2.11 V	260	83.0	42.5
3	*5825.00	115.5 AV			2.11 V	260	73.0	42.5
4	#5952.00	54.0 PK	68.2	-14.2	2.11 V	260	49.6	4.4
5	11650.00	61.1 PK	74.0	-12.9	2.99 V	31	51.5	9.6
6	11650.00	51.4 AV	54.0	-2.6	2.99 V	31	41.8	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.6 PK	74.0	-16.4	2.92 H	288	54.8	2.8
2	5150.00	49.7 AV	54.0	-4.3	2.92 H	288	46.9	2.8
3	*5190.00	109.5 PK			2.92 H	288	68.7	40.8
4	*5190.00	101.1 AV			2.92 H	288	60.3	40.8
5	#10380.00	56.3 PK	68.2	-11.9	1.56 H	183	47.0	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.4 PK	74.0	-11.6	2.13 V	89	59.6	2.8
2	5150.00	53.8 AV	54.0	-0.2	2.13 V	89	51.0	2.8
3	*5190.00	115.7 PK			2.13 V	89	74.9	40.8
4	*5190.00	107.7 AV			2.13 V	89	66.9	40.8
5	#10380.00	56.9 PK	68.2	-11.3	2.75 V	133	47.6	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.5 PK	74.0	-17.5	3.27 H	253	53.7	2.8
2	5150.00	48.3 AV	54.0	-5.7	3.27 H	253	45.5	2.8
3	*5230.00	114.9 PK			3.27 H	253	74.3	40.6
4	*5230.00	106.5 AV			3.27 H	253	65.9	40.6
5	5350.00	55.3 PK	74.0	-18.7	3.27 H	253	52.7	2.6
6	5350.00	47.4 AV	54.0	-6.6	3.27 H	253	44.8	2.6
7	#10460.00	55.9 PK	68.2	-12.3	1.67 H	183	46.8	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.8 PK	74.0	-10.2	1.93 V	87	61.0	2.8
2	5150.00	53.9 AV	54.0	-0.1	1.93 V	87	51.1	2.8
3	*5230.00	120.4 PK			1.93 V	87	79.8	40.6
4	*5230.00	110.9 AV			1.93 V	87	70.3	40.6
5	5350.00	57.3 PK	74.0	-16.7	1.93 V	87	54.7	2.6
6	5350.00	49.6 AV	54.0	-4.4	1.93 V	87	47.0	2.6
7	#10460.00	56.7 PK	68.2	-11.5	2.69 V	143	47.6	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.8 PK	74.0	-21.2	3.19 H	253	50.0	2.8
2	5150.00	44.3 AV	54.0	-9.7	3.19 H	253	41.5	2.8
3	*5270.00	113.6 PK			3.19 H	253	73.1	40.5
4	*5270.00	104.1 AV			3.19 H	253	63.6	40.5
5	#10540.00	56.0 PK	68.2	-12.2	1.69 H	192	47.0	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.6 PK	74.0	-18.4	2.16 V	232	52.8	2.8
2	5150.00	45.5 AV	54.0	-8.5	2.16 V	232	42.7	2.8
3	*5270.00	117.0 PK			2.16 V	232	76.5	40.5
4	*5270.00	106.5 AV			2.16 V	232	66.0	40.5
5	#10540.00	56.6 PK	68.2	-11.6	2.55 V	138	47.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	111.8 PK			3.21 H	253	71.4	40.4
2	*5310.00	102.2 AV			3.21 H	253	61.8	40.4
3	5350.00	56.9 PK	74.0	-17.1	3.21 H	253	54.3	2.6
4	5350.00	47.8 AV	54.0	-6.2	3.21 H	253	45.2	2.6
5	10620.00	56.2 PK	74.0	-17.8	1.69 H	199	47.3	8.9
6	10620.00	45.9 AV	54.0	-8.1	1.69 H	199	37.0	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	116.5 PK			1.65 V	257	76.1	40.4
2	*5310.00	106.5 AV			1.65 V	257	66.1	40.4
3	5350.00	62.6 PK	74.0	-11.4	1.65 V	257	60.0	2.6
4	5350.00	51.6 AV	54.0	-2.4	1.65 V	257	49.0	2.6
5	10620.00	56.5 PK	74.0	-17.5	2.55 V	136	47.6	8.9
6	10620.00	46.4 AV	54.0	-7.6	2.55 V	136	37.5	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.0 PK	74.0	-17.0	3.03 H	313	54.2	2.8
2	5460.00	47.4 AV	54.0	-6.6	3.03 H	313	44.6	2.8
3	#5470.00	60.1 PK	68.2	-8.1	3.03 H	313	57.2	2.9
4	*5510.00	111.6 PK			3.03 H	313	70.6	41.0
5	*5510.00	102.4 AV			3.03 H	313	61.4	41.0
6	11020.00	56.3 PK	74.0	-17.7	1.65 H	173	47.3	9.0
7	11020.00	46.4 AV	54.0	-7.6	1.65 H	173	37.4	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.8 PK	74.0	-11.2	1.67 V	256	60.0	2.8
2	5460.00	53.0 AV	54.0	-1.0	1.67 V	256	50.2	2.8
3	#5470.00	67.9 PK	68.2	-0.3	1.67 V	256	65.0	2.9
4	*5510.00	116.5 PK			1.67 V	256	75.5	41.0
5	*5510.00	107.5 AV			1.67 V	256	66.5	41.0
6	11020.00	56.6 PK	74.0	-17.4	2.70 V	148	47.6	9.0
7	11020.00	46.5 AV	54.0	-7.5	2.70 V	148	37.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	111.7 PK			3.28 H	320	70.5	41.2
2	*5550.00	103.2 AV			3.28 H	320	62.0	41.2
3	11100.00	56.5 PK	74.0	-17.5	1.69 H	173	47.2	9.3
4	11100.00	46.6 AV	54.0	-7.4	1.69 H	173	37.3	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	116.6 PK			1.76 V	254	75.4	41.2
2	*5550.00	108.0 AV			1.76 V	254	66.8	41.2
3	11100.00	57.0 PK	74.0	-17.0	2.66 V	146	47.7	9.3
4	11100.00	46.9 AV	54.0	-7.1	2.66 V	146	37.6	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	111.7 PK			3.50 H	311	69.8	41.9
2	*5670.00	101.5 AV			3.50 H	311	59.6	41.9
3	#5725.00	60.3 PK	68.2	-7.9	3.50 H	311	56.0	4.3
4	11340.00	57.2 PK	74.0	-16.8	1.63 H	177	47.4	9.8
5	11340.00	47.1 AV	54.0	-6.9	1.63 H	177	37.3	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	116.0 PK			1.71 V	246	74.1	41.9
2	*5670.00	106.7 AV			1.71 V	246	64.8	41.9
3	#5725.00	67.3 PK	68.2	-0.9	1.71 V	246	63.0	4.3
4	11340.00	57.3 PK	74.0	-16.7	2.61 V	132	47.5	9.8
5	11340.00	47.2 AV	54.0	-6.8	2.61 V	132	37.4	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	53.7 PK	68.2	-14.5	3.52 H	314	50.8	2.9
2	*5710.00	110.8 PK			3.52 H	314	68.7	42.1
3	*5710.00	102.1 AV			3.52 H	314	60.0	42.1
4	#5850.00	55.6 PK	68.2	-12.6	3.52 H	314	50.9	4.7
5	11420.00	57.1 PK	74.0	-16.9	1.60 H	173	47.5	9.6
6	11420.00	46.9 AV	54.0	-7.1	1.60 H	173	37.3	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	54.9 PK	68.2	-13.3	1.70 V	258	52.0	2.9
2	*5710.00	115.6 PK			1.70 V	258	73.5	42.1
3	*5710.00	106.6 AV			1.70 V	258	64.5	42.1
4	#5850.00	57.0 PK	68.2	-11.2	1.70 V	258	52.3	4.7
5	11420.00	57.3 PK	74.0	-16.7	2.69 V	139	47.7	9.6
6	11420.00	47.2 AV	54.0	-6.8	2.69 V	139	37.6	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.3 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.20	62.3 PK	68.2	-5.9	3.28 H	312	58.4	3.9
2	*5755.00	117.8 PK			3.28 H	312	75.5	42.3
3	*5755.00	108.8 AV			3.28 H	312	66.5	42.3
4	#5930.00	59.6 PK	68.2	-8.6	3.28 H	312	55.1	4.5
5	11510.00	58.1 PK	74.0	-15.9	1.52 H	351	48.5	9.6
6	11510.00	49.6 AV	54.0	-4.4	1.52 H	351	40.0	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	67.6 PK	68.2	-0.6	2.11 V	260	63.7	3.9
2	*5755.00	122.4 PK			2.11 V	260	80.1	42.3
3	*5755.00	113.8 AV			2.11 V	260	71.5	42.3
4	#5967.20	58.9 PK	68.2	-9.3	2.11 V	260	54.5	4.4
5	11510.00	60.5 PK	74.0	-13.5	3.08 V	38	50.9	9.6
6	11510.00	50.8 AV	54.0	-3.2	3.08 V	38	41.2	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.3 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.20	60.9 PK	68.2	-7.3	3.52 H	317	57.0	3.9
2	*5795.00	117.6 PK			3.52 H	317	75.2	42.4
3	*5795.00	108.6 AV			3.52 H	317	66.2	42.4
4	#5926.00	59.2 PK	68.2	-9.0	3.52 H	317	54.7	4.5
5	11590.00	58.0 PK	74.0	-16.0	1.58 H	358	48.6	9.4
6	11590.00	49.6 AV	54.0	-4.4	1.58 H	358	40.2	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5630.00	63.0 PK	68.2	-5.2	2.11 V	259	59.4	3.6
2	*5795.00	123.3 PK			2.11 V	259	80.9	42.4
3	*5795.00	113.6 AV			2.11 V	259	71.2	42.4
4	#5961.60	60.1 PK	68.2	-8.1	2.11 V	259	55.7	4.4
5	11590.00	60.4 PK	74.0	-13.6	3.02 V	29	51.0	9.4
6	11590.00	50.6 AV	54.0	-3.4	3.02 V	29	41.2	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	3.25 H	254	54.5	2.8
2	5150.00	49.0 AV	54.0	-5.0	3.25 H	254	46.2	2.8
3	*5210.00	107.4 PK			3.25 H	254	66.7	40.7
4	*5210.00	99.0 AV			3.25 H	254	58.3	40.7
5	#10420.00	55.9 PK	68.2	-12.3	1.58 H	189	46.8	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.6 PK	74.0	-10.4	2.11 V	269	60.8	2.8
2	5150.00	53.9 AV	54.0	-0.1	2.11 V	269	51.1	2.8
3	*5210.00	111.8 PK			2.11 V	269	71.1	40.7
4	*5210.00	103.2 AV			2.11 V	269	62.5	40.7
5	#10580.00	56.5 PK	68.2	-11.7	2.61 V	136	47.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	108.8 PK			3.20 H	253	68.3	40.5
2	*5290.00	100.1 AV			3.20 H	253	59.6	40.5
3	5350.00	58.5 PK	74.0	-15.5	3.20 H	253	55.9	2.6
4	5350.00	49.6 AV	54.0	-4.4	3.20 H	253	47.0	2.6
5	#10580.00	56.4 PK	68.2	-11.8	1.66 H	175	47.4	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	112.8 PK			1.73 V	256	72.3	40.5
2	*5290.00	104.0 AV			1.72 V	256	63.5	40.5
3	5350.00	62.7 PK	74.0	-11.3	1.72 V	256	60.1	2.6
4	5350.00	53.5 AV	54.0	-0.5	1.72 V	256	50.9	2.6
5	#10580.00	56.7 PK	68.2	-11.5	2.48 V	136	47.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.5 PK	74.0	-17.5	3.21 H	312	53.7	2.8
2	5460.00	47.3 AV	54.0	-6.7	3.21 H	312	44.5	2.8
3	#5470.00	57.5 PK	68.2	-10.7	3.21 H	312	54.6	2.9
4	*5530.00	108.8 PK			3.21 H	312	67.7	41.1
5	*5530.00	98.6 AV			3.21 H	312	57.5	41.1
6	11060.00	56.5 PK	74.0	-17.5	1.67 H	179	47.3	9.2
7	11060.00	46.6 AV	54.0	-7.4	1.67 H	179	37.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.6 PK	74.0	-11.4	1.70 V	255	59.8	2.8
2	5460.00	53.6 AV	54.0	-0.4	1.70 V	255	50.8	2.8
3	#5470.00	63.5 PK	68.2	-4.7	1.70 V	255	60.6	2.9
4	*5530.00	113.4 PK			1.70 V	255	72.3	41.1
5	*5530.00	104.1 AV			1.70 V	255	63.0	41.1
6	11060.00	56.9 PK	74.0	-17.1	2.77 V	143	47.7	9.2
7	11060.00	46.7 AV	54.0	-7.3	2.77 V	143	37.5	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	107.1 PK			3.44 H	315	65.7	41.4
2	*5610.00	98.2 AV			3.44 H	315	56.8	41.4
3	#5725.00	59.1 PK	68.2	-9.1	3.44 H	315	54.8	4.3
4	11220.00	57.1 PK	74.0	-16.9	1.70 H	189	47.4	9.7
5	11220.00	46.8 AV	54.0	-7.2	1.70 H	189	37.1	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	114.4 PK			1.67 V	248	73.0	41.4
2	*5610.00	105.0 AV			1.67 V	248	63.6	41.4
3	#5725.00	65.9 PK	68.2	-2.3	1.67 V	248	61.6	4.3
4	11220.00	57.4 PK	74.0	-16.6	2.78 V	162	47.7	9.7
5	11220.00	47.3 AV	54.0	-6.7	2.78 V	162	37.6	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	53.9 PK	68.2	-14.3	3.30 H	312	51.0	2.9
2	*5690.00	108.8 PK			3.30 H	312	66.8	42.0
3	*5690.00	99.6 AV			3.30 H	312	57.6	42.0
4	#5850.00	55.9 PK	68.2	-12.3	3.30 H	312	51.2	4.7
5	11380.00	57.2 PK	74.0	-16.8	1.56 H	188	47.5	9.7
6	11380.00	47.1 AV	54.0	-6.9	1.56 H	188	37.4	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.0 PK	68.2	-13.2	1.72 V	260	52.1	2.9
2	*5690.00	114.3 PK			1.72 V	260	72.3	42.0
3	*5690.00	104.3 AV			1.72 V	260	62.3	42.0
4	#5850.00	57.2 PK	68.2	-11.0	1.72 V	260	52.5	4.7
5	11380.00	57.4 PK	74.0	-16.6	2.69 V	149	47.7	9.7
6	11380.00	47.3 AV	54.0	-6.7	2.69 V	149	37.6	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.3 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.20	65.6 PK	68.2	-2.6	3.53 H	312	61.7	3.9
2	*5775.00	114.5 PK			3.53 H	312	72.1	42.4
3	*5775.00	105.3 AV			3.53 H	312	62.9	42.4
4	#5933.60	59.6 PK	68.2	-8.6	3.53 H	312	55.1	4.5
5	11550.00	57.8 PK	74.0	-16.2	1.66 H	360	48.3	9.5
6	11550.00	49.5 AV	54.0	-4.5	1.66 H	360	40.0	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.60	67.9 PK	68.2	-0.3	2.12 V	260	64.0	3.9
2	*5775.00	120.0 PK			2.12 V	260	77.6	42.4
3	*5775.00	110.4 AV			2.12 V	260	68.0	42.4
4	#5947.20	58.9 PK	68.2	-9.3	2.12 V	260	54.4	4.5
5	11550.00	60.2 PK	74.0	-13.8	3.10 V	35	50.7	9.5
6	11550.00	50.3 AV	54.0	-3.7	3.10 V	35	40.8	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.8 PK	74.0	-17.2	3.15 H	258	54.0	2.8
2	5150.00	47.8 AV	54.0	-6.2	3.15 H	258	45.0	2.8
3	*5250.00	104.5 PK			3.15 H	258	63.9	40.6
4	*5250.00	95.8 AV			3.15 H	258	55.2	40.6
5	5350.00	62.1 PK	74.0	-11.9	3.15 H	258	59.5	2.6
6	5350.00	49.6 AV	54.0	-4.4	3.15 H	258	47.0	2.6
7	#10500.00	56.1 PK	68.2	-12.1	1.61 H	360	47.0	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.77 V	258	63.0	2.8
2	5150.00	53.2 AV	54.0	-0.8	1.77 V	258	50.4	2.8
3	*5250.00	110.6 PK			1.77 V	258	70.0	40.6
4	*5250.00	101.9 AV			1.77 V	258	61.3	40.6
5	5350.00	70.0 PK	74.0	-4.0	1.77 V	258	67.4	2.6
6	5350.00	53.9 AV	54.0	-0.1	1.77 V	258	51.3	2.6
7	#10500.00	56.5 PK	68.2	-11.7	2.77 V	138	47.4	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 61 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.7 PK	74.0	-18.3	3.25 H	317	52.9	2.8
2	5460.00	46.0 AV	54.0	-8.0	3.25 H	317	43.2	2.8
3	#5470.00	56.8 PK	68.2	-11.4	3.25 H	317	53.9	2.9
4	*5570.00	103.9 PK			3.25 H	317	62.6	41.3
5	*5570.00	95.7 AV			3.25 H	317	54.4	41.3
6	#5725.00	58.6 PK	68.2	-9.6	3.25 H	317	54.3	4.3
7	11140.00	56.8 PK	74.0	-17.2	1.74 H	193	47.4	9.4
8	11140.00	46.7 AV	54.0	-7.3	1.74 H	193	37.3	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.8 PK	74.0	-10.2	1.70 V	249	61.0	2.8
2	5460.00	53.9 AV	54.0	-0.1	1.70 V	249	51.1	2.8
3	#5470.00	65.0 PK	68.2	-3.2	1.70 V	249	62.1	2.9
4	*5570.00	111.6 PK			1.70 V	249	70.3	41.3
5	*5570.00	101.8 AV			1.70 V	249	60.5	41.3
6	#5725.00	66.2 PK	68.2	-2.0	1.70 V	249	61.9	4.3
7	11140.00	56.9 PK	74.0	-17.1	2.73 V	140	47.5	9.4
8	11140.00	46.9 AV	54.0	-7.1	2.73 V	140	37.5	9.4


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge_CDD

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 36

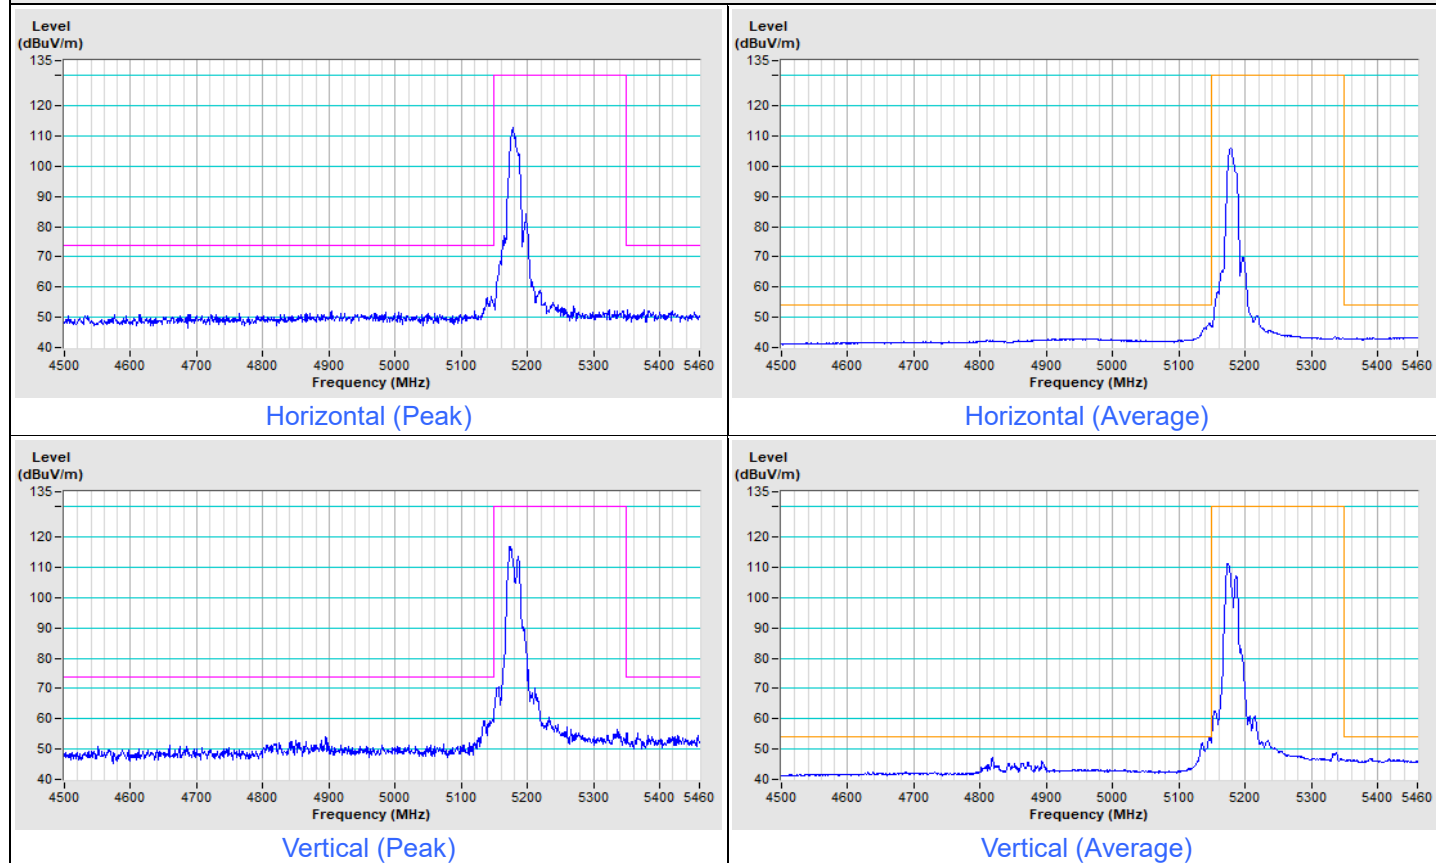


802.11a Channel 48

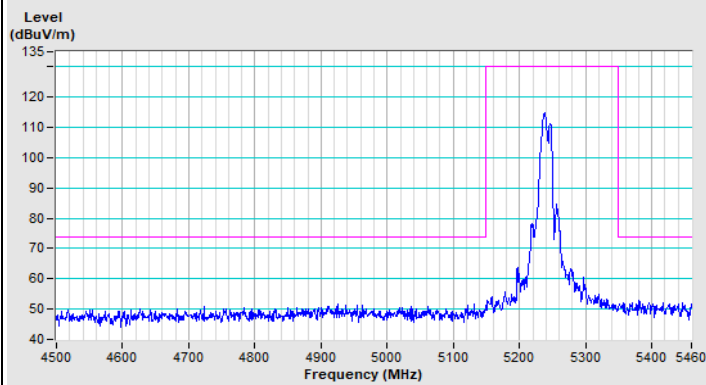


Horizontal (Peak)

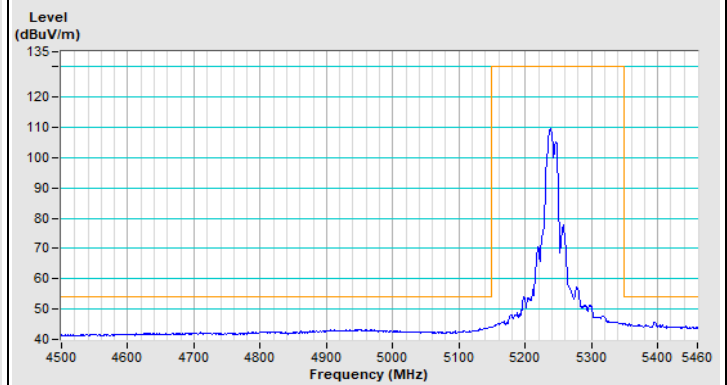

Horizontal (Average)

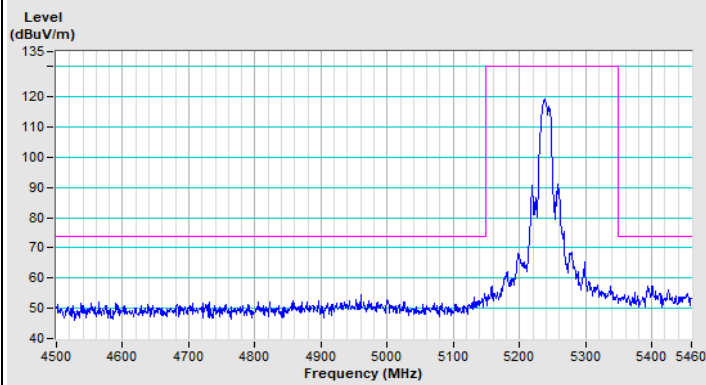


Vertical (Peak)

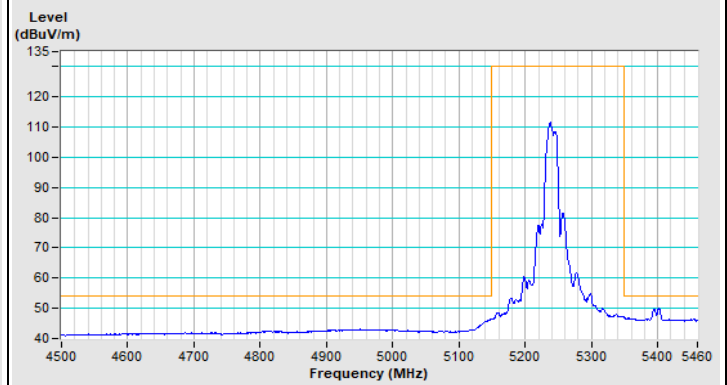


Vertical (Average)


802.11a Channel 52

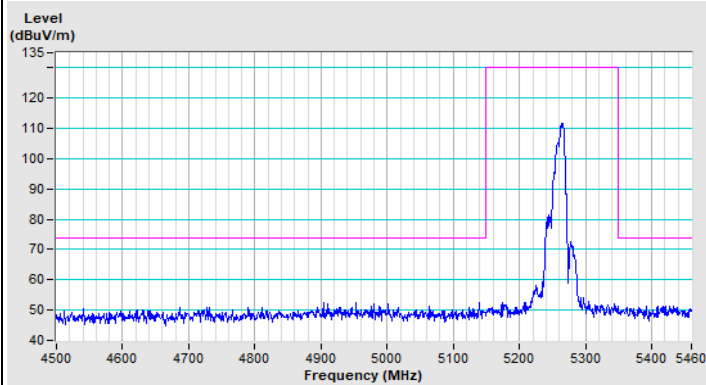


Horizontal (Peak)

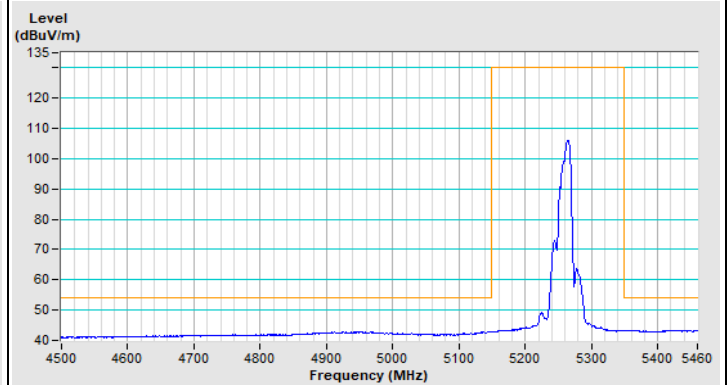

Horizontal (Average)

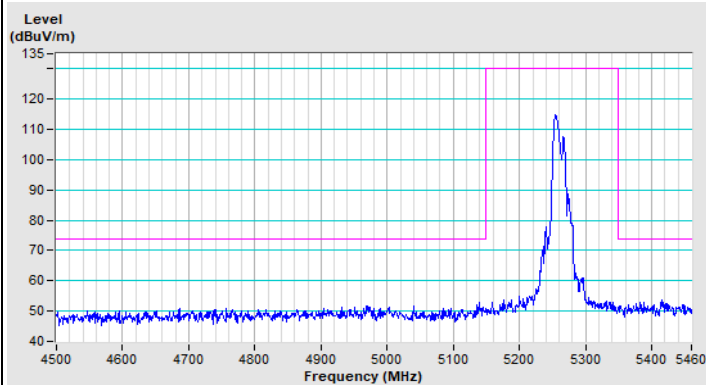


Vertical (Peak)

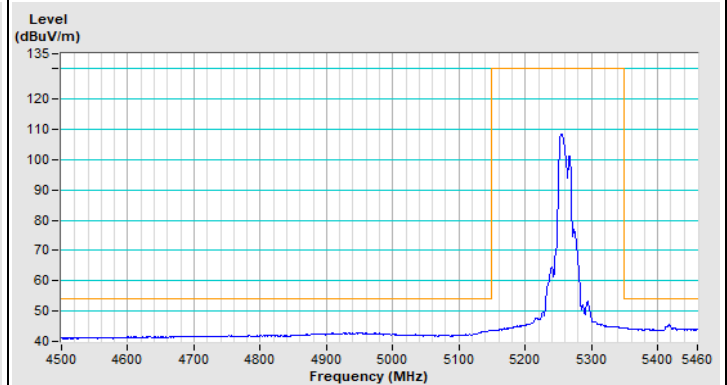


Vertical (Average)


802.11a Channel 64

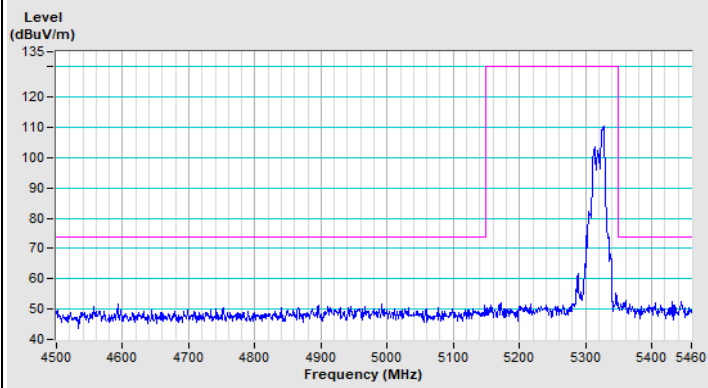


Horizontal (Peak)

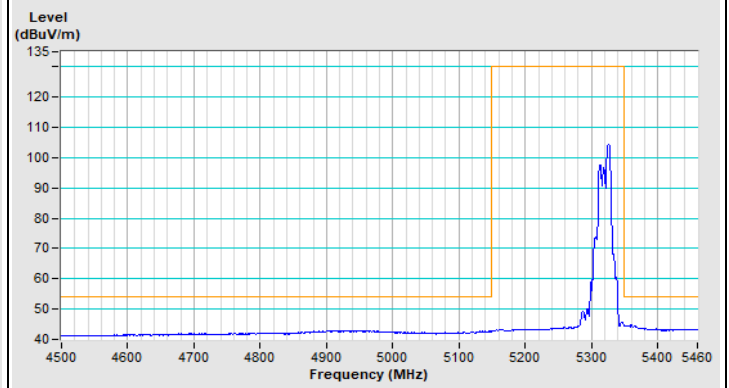

Horizontal (Average)

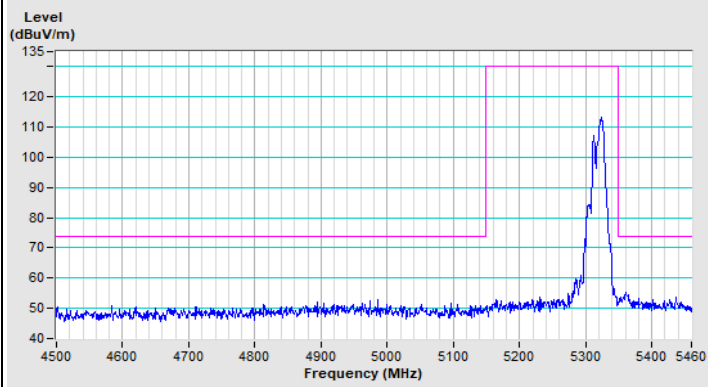


Vertical (Peak)

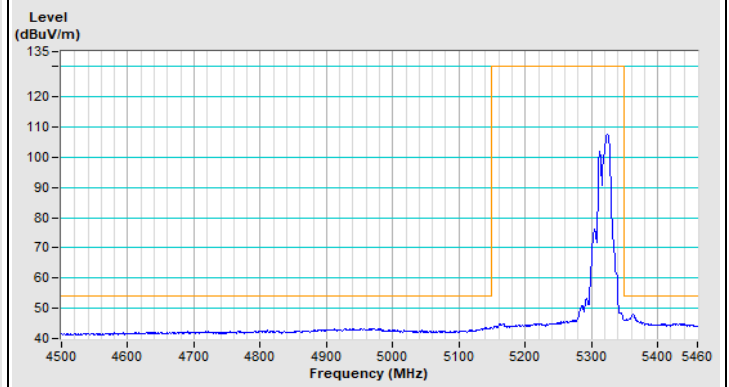


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

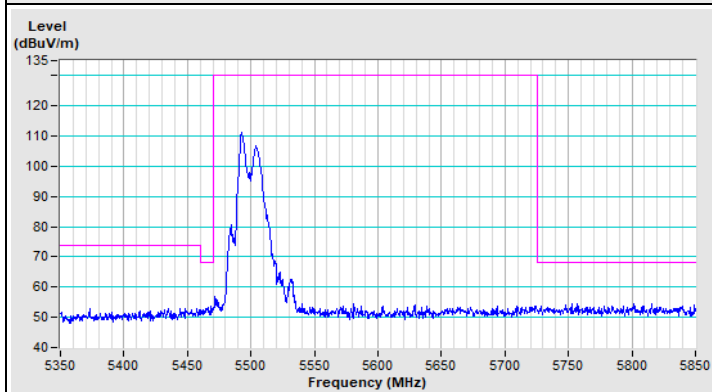


Horizontal (Peak)

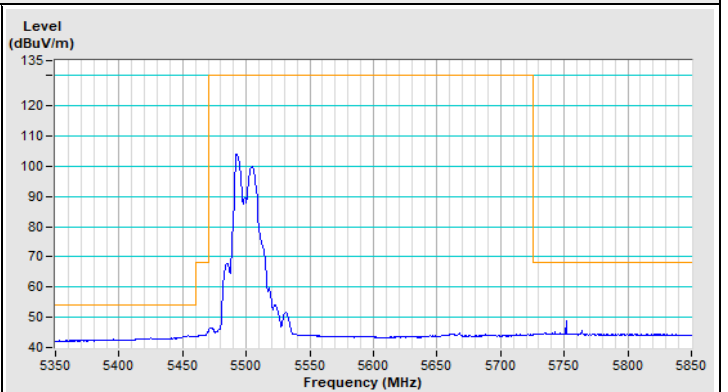

Horizontal (Average)

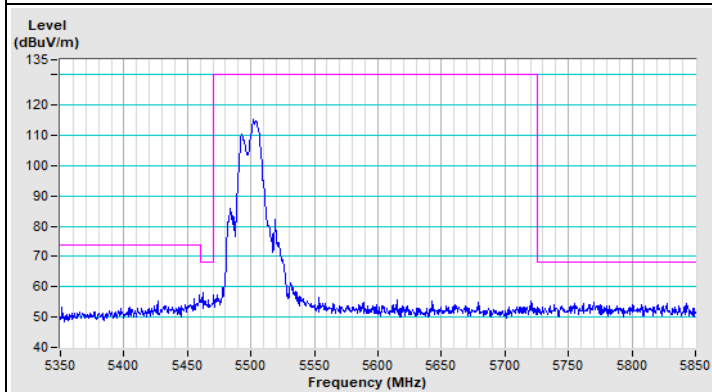


Vertical (Peak)

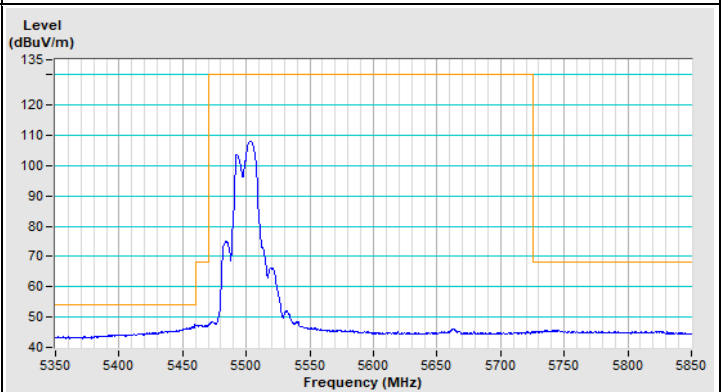


Vertical (Average)

802.11a Channel 140

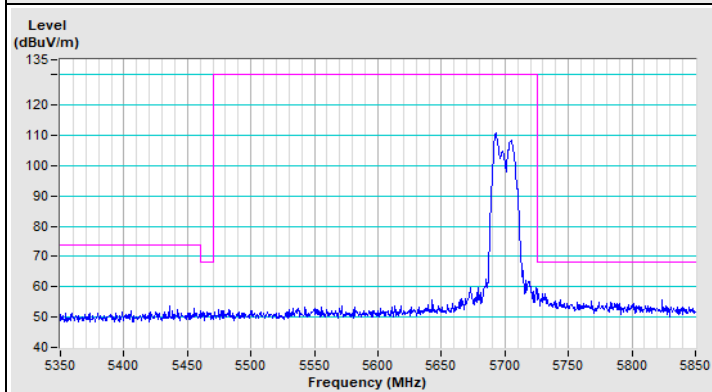


Horizontal (Peak)

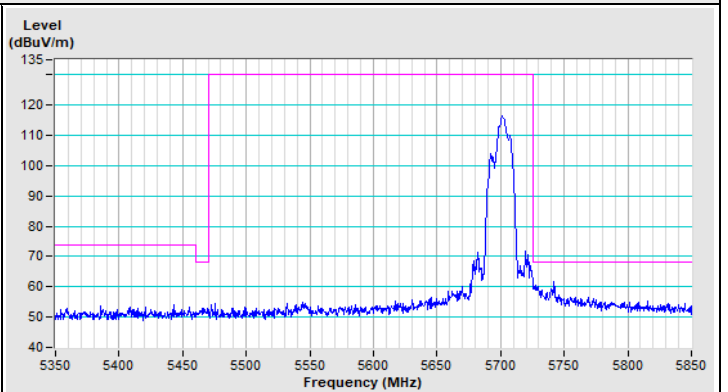

Vertical (Peak)



Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11a Channel 144


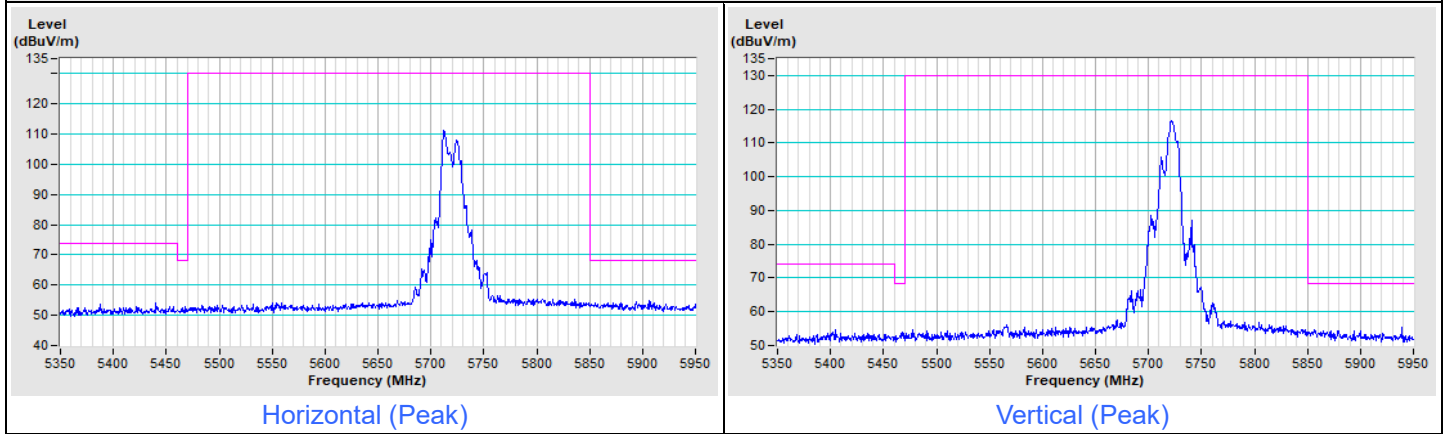


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------



802.11a Channel 149

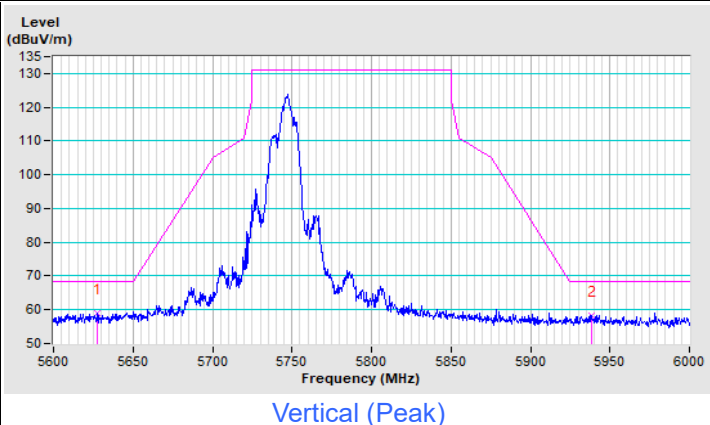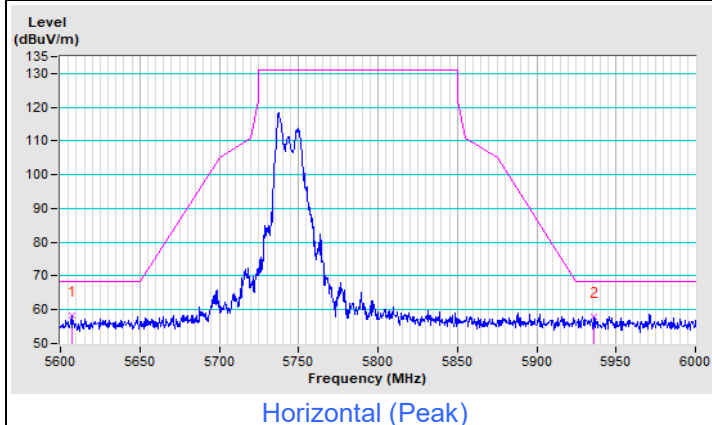

802.11a Channel 157

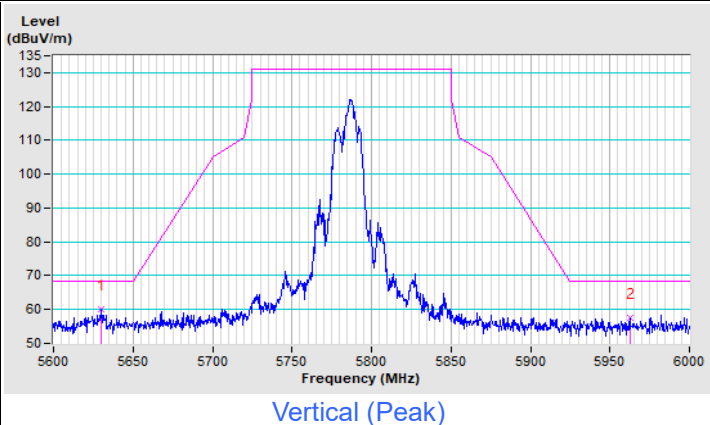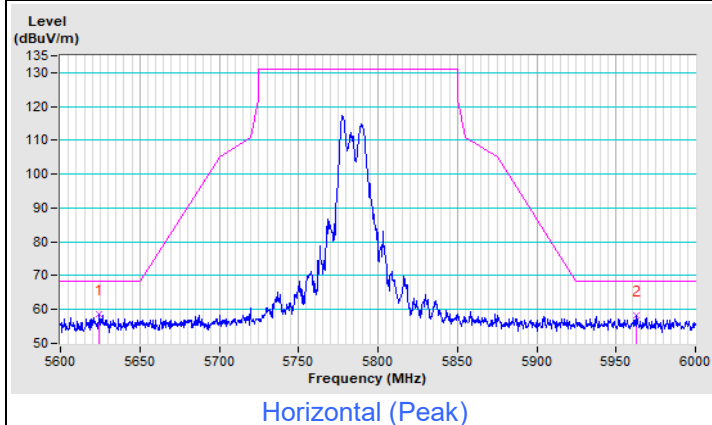


802.11a Channel 165



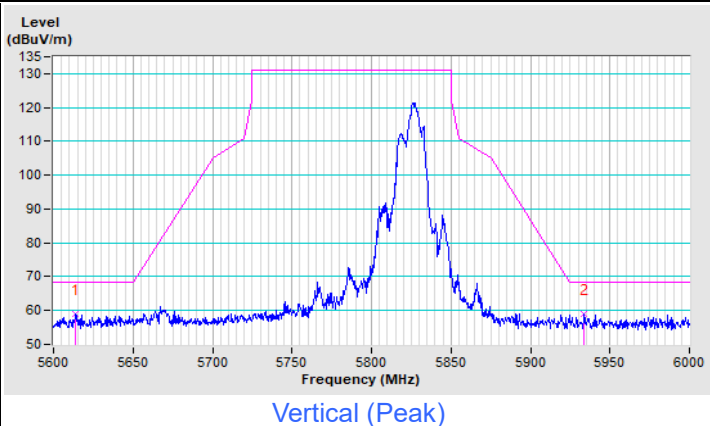
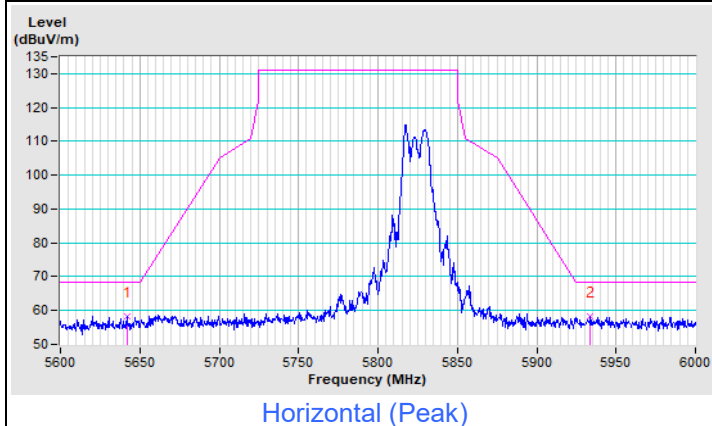


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) Channel 36

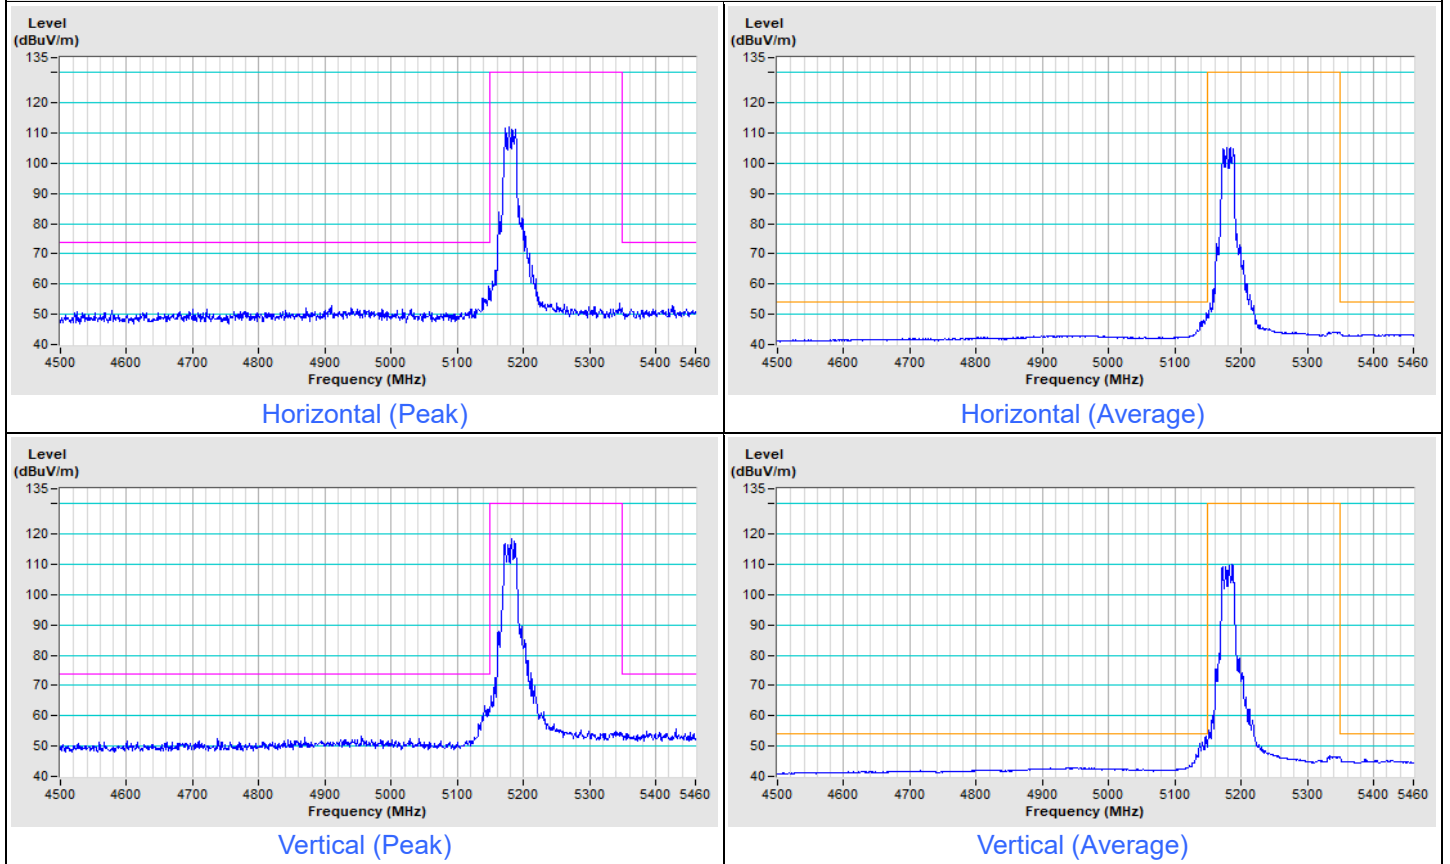


802.11be (EHT20) Channel 48

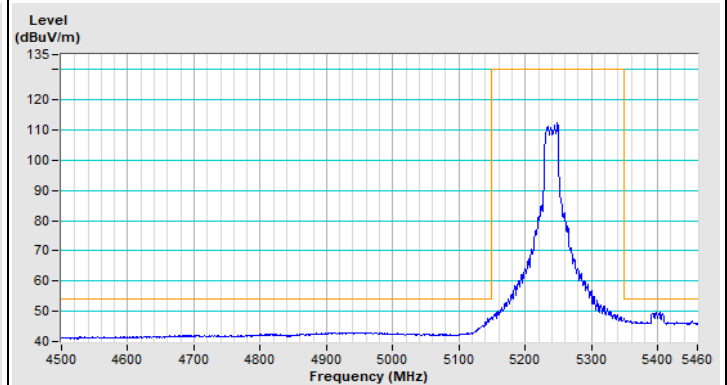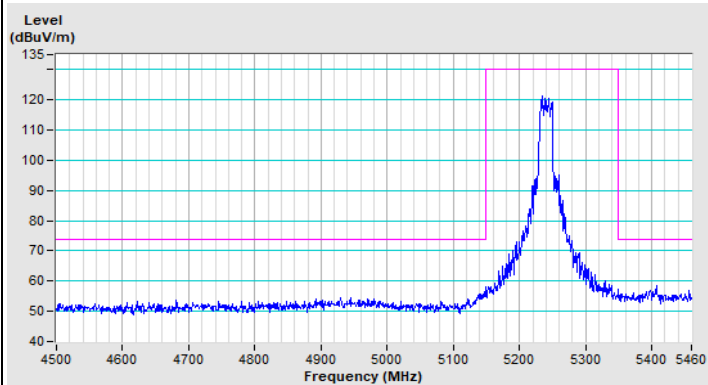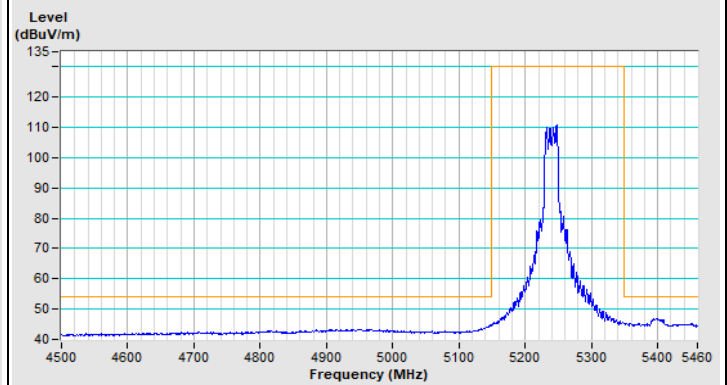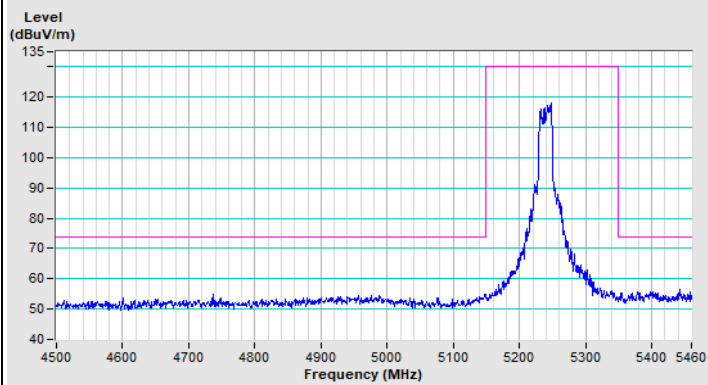


802.11be (EHT20) Channel 52

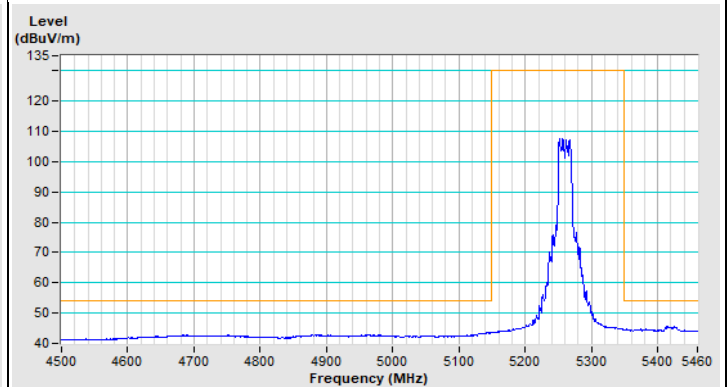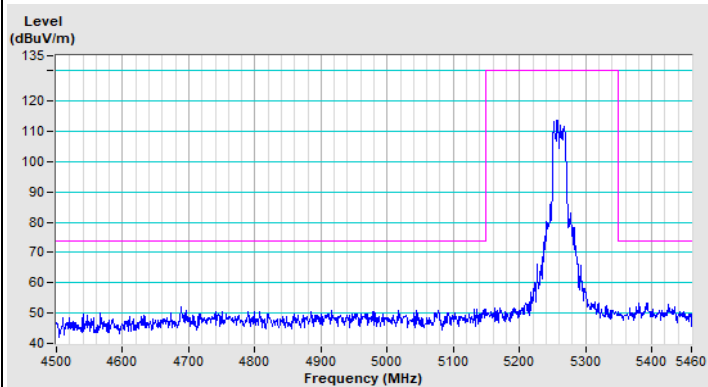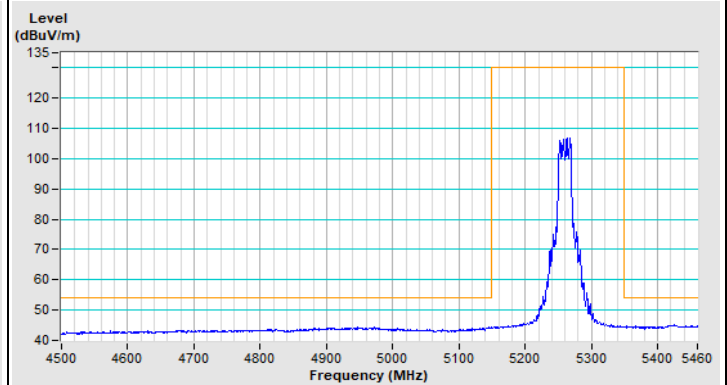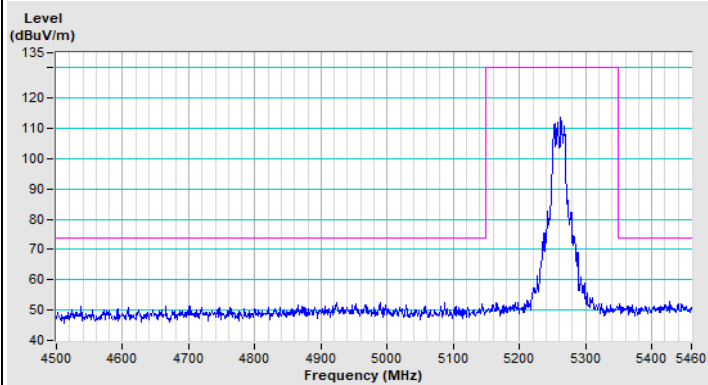


802.11be (EHT20) Channel 64

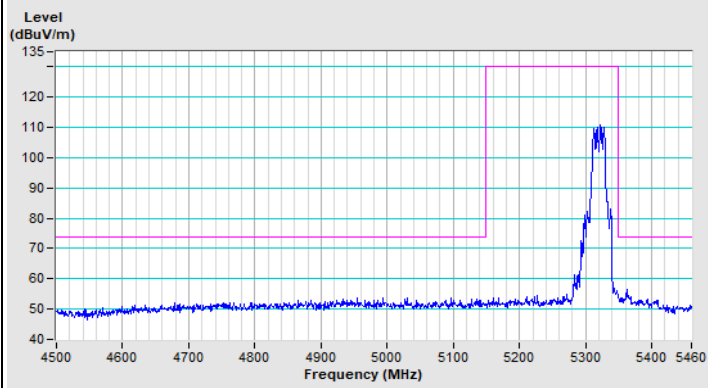


Horizontal (Peak)

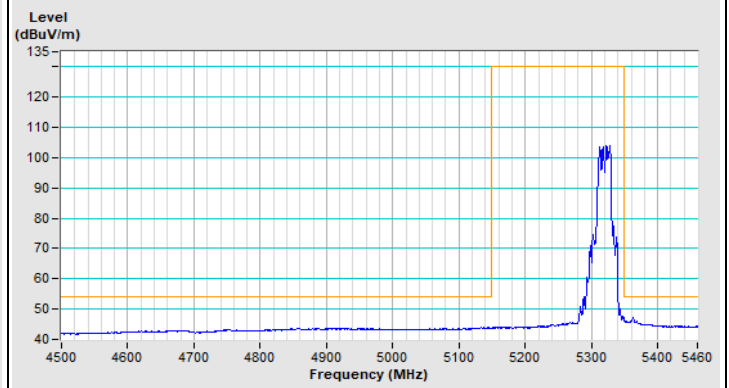

Horizontal (Average)

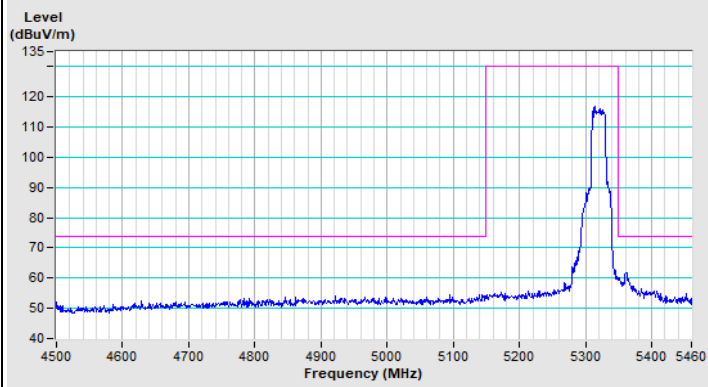


Vertical (Peak)

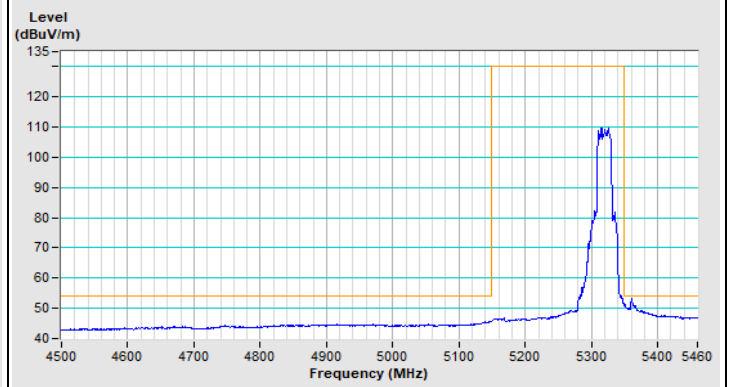


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

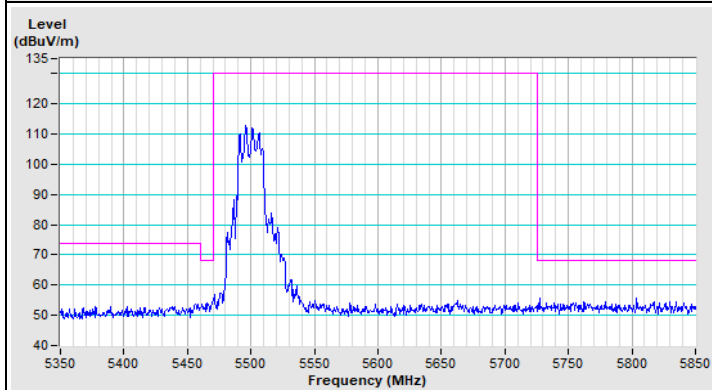


Horizontal (Peak)

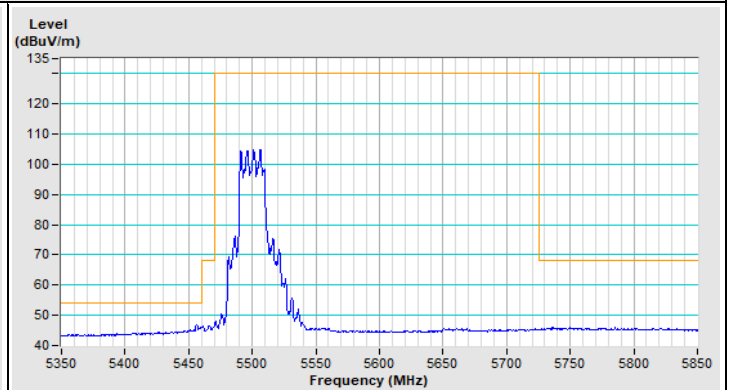

Horizontal (Average)

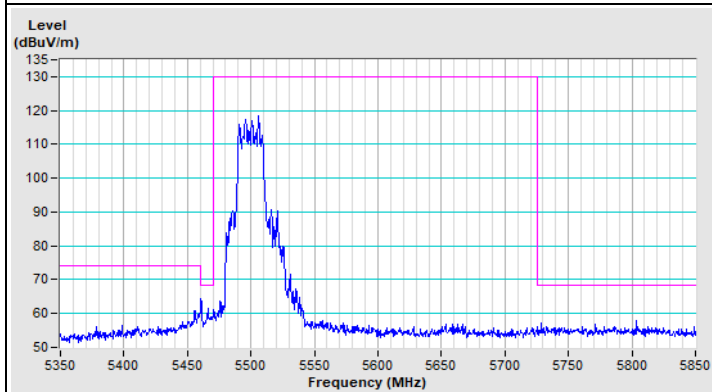


Vertical (Peak)

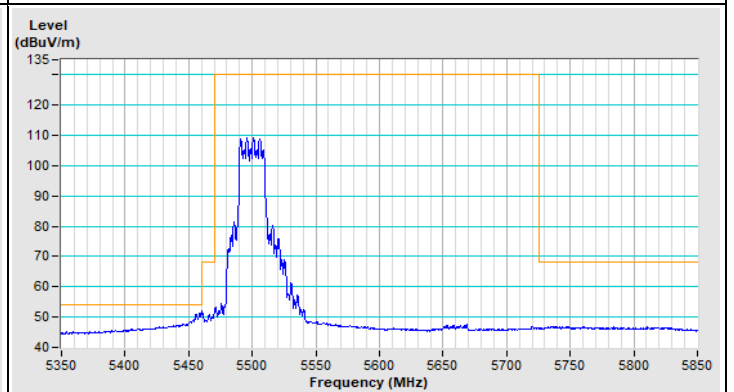


Vertical (Average)

802.11be (EHT20) Channel 140

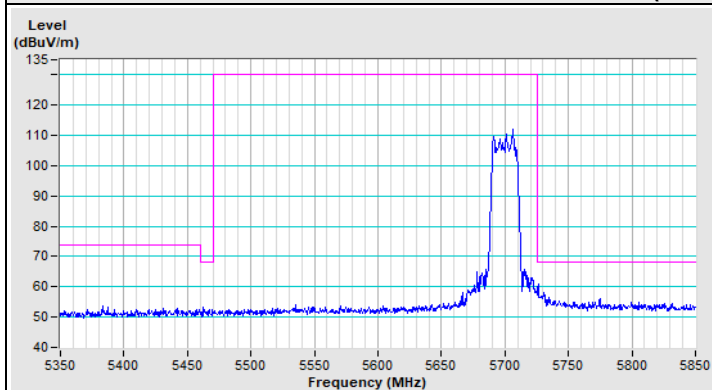


Horizontal (Peak)

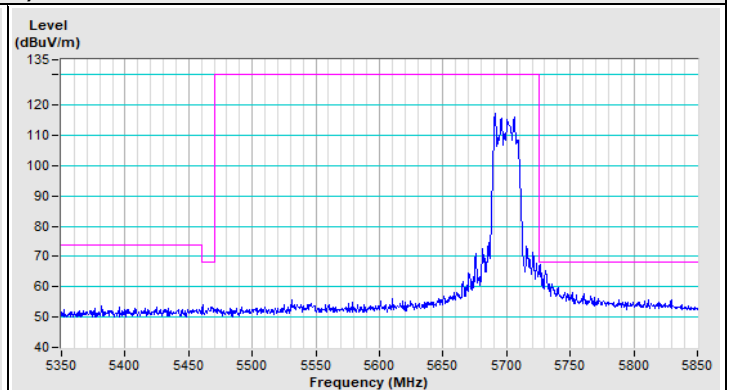

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT20) Channel 144

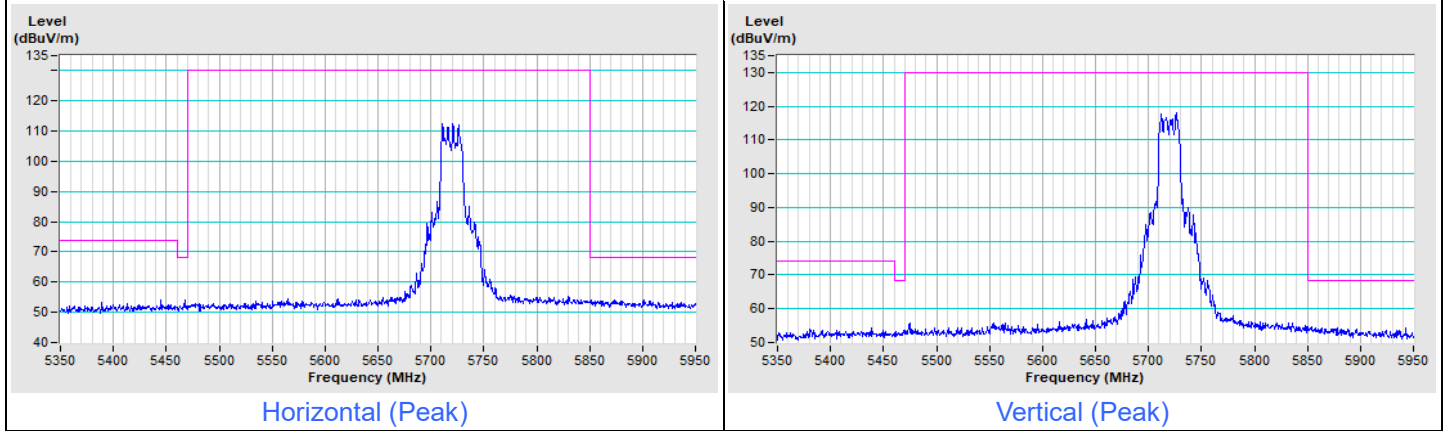


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) Channel 149

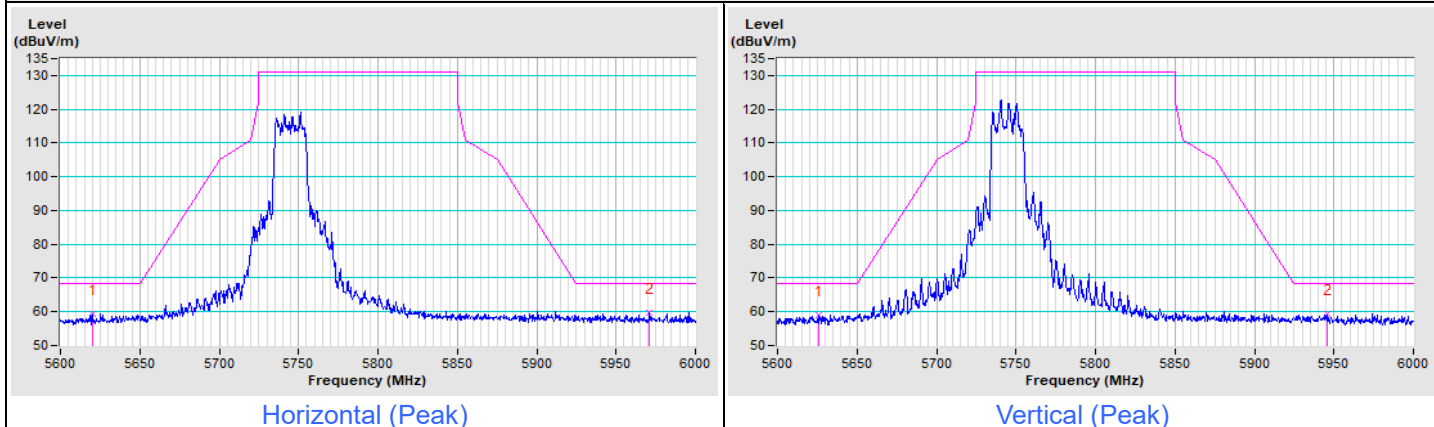

802.11be (EHT20) Channel 157

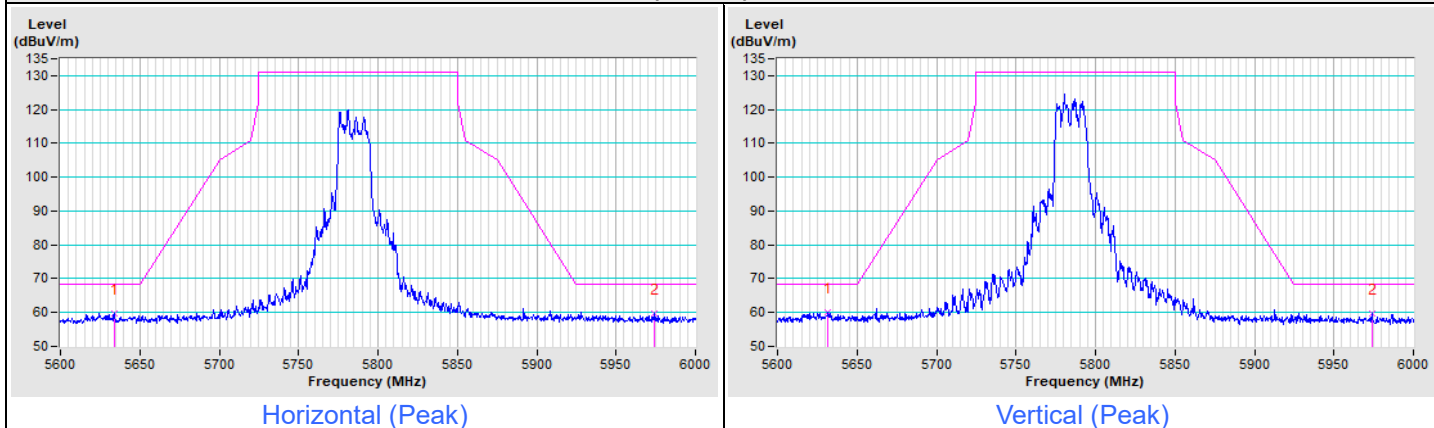


802.11be (EHT20) Channel 165




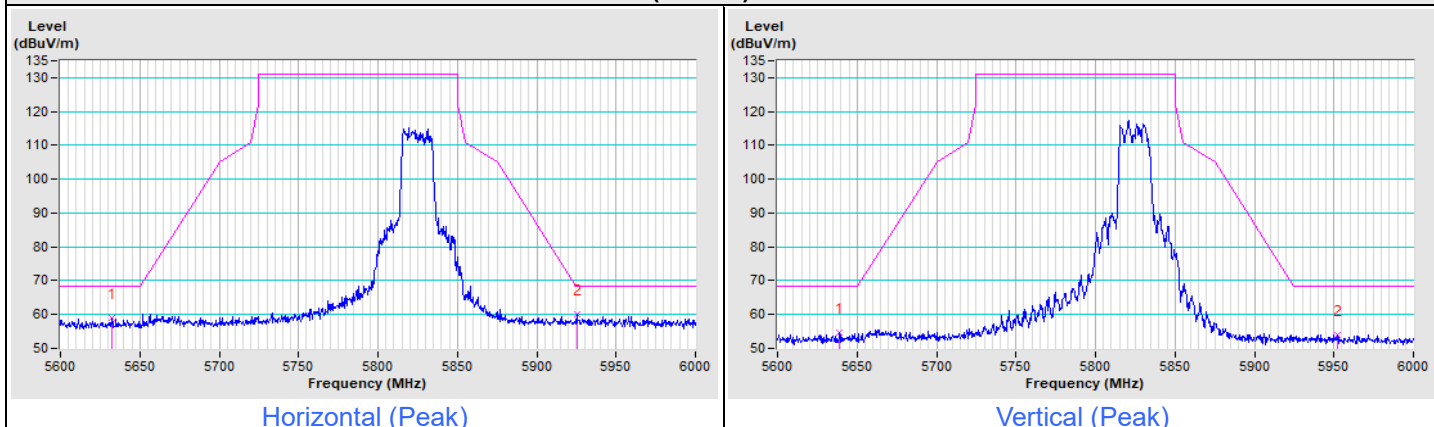


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT40) Channel 38

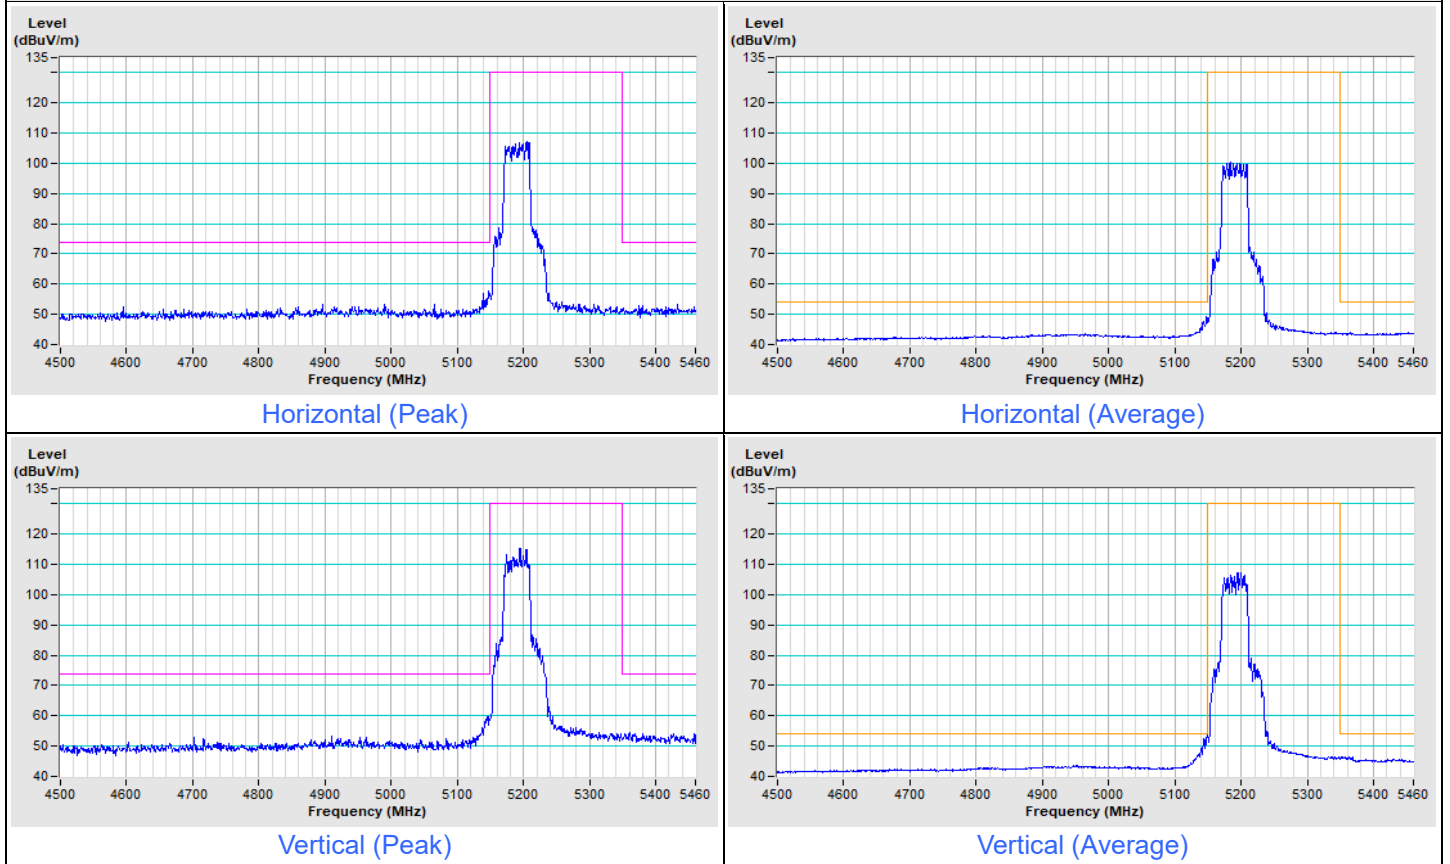


802.11be (EHT40) Channel 46

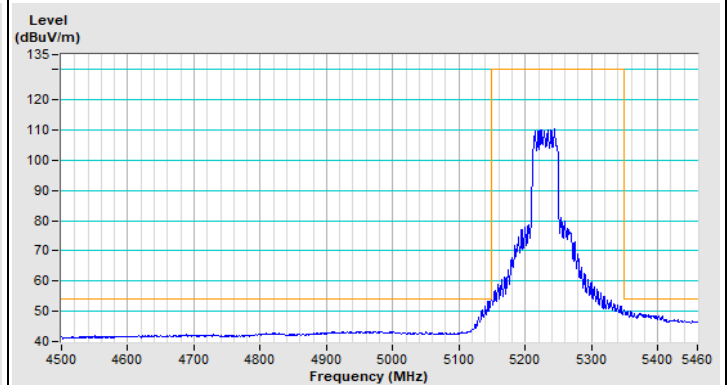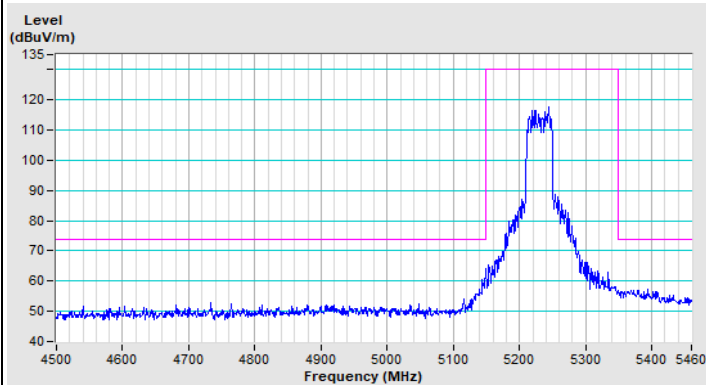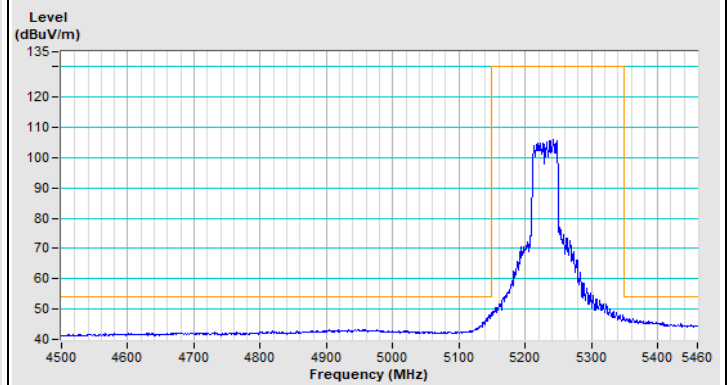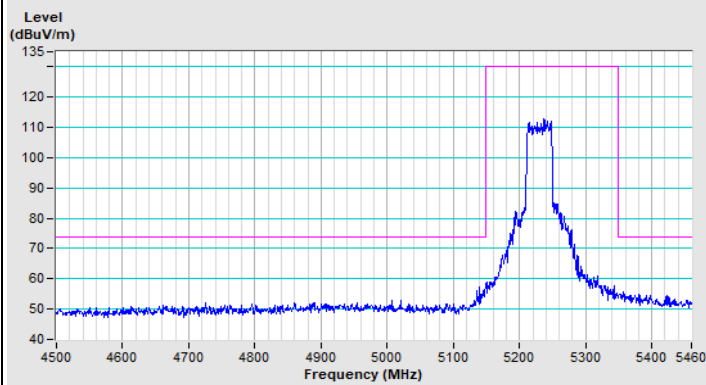


802.11be (EHT40) Channel 54

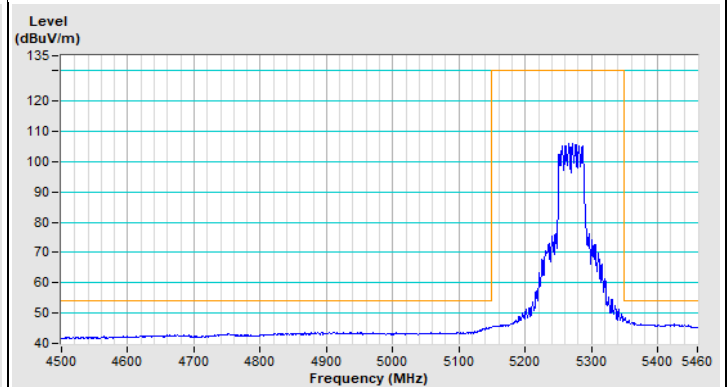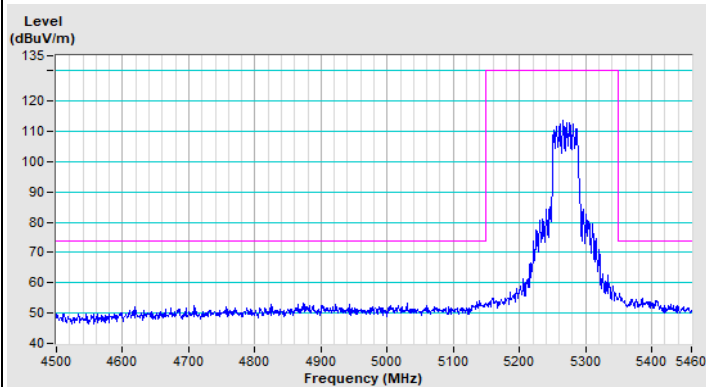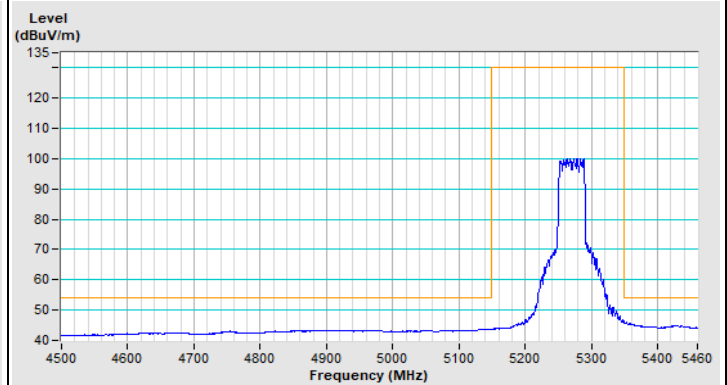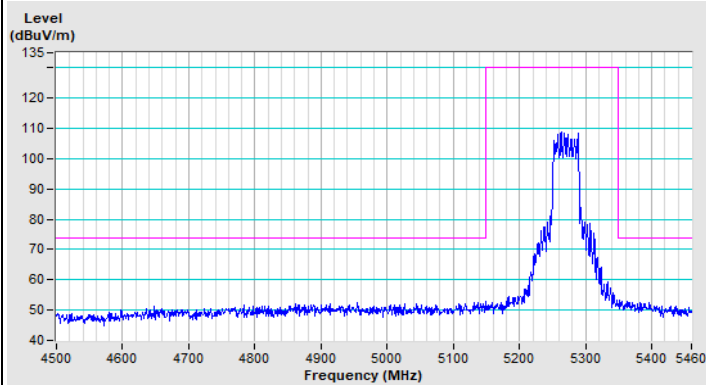


802.11be (EHT40) Channel 62

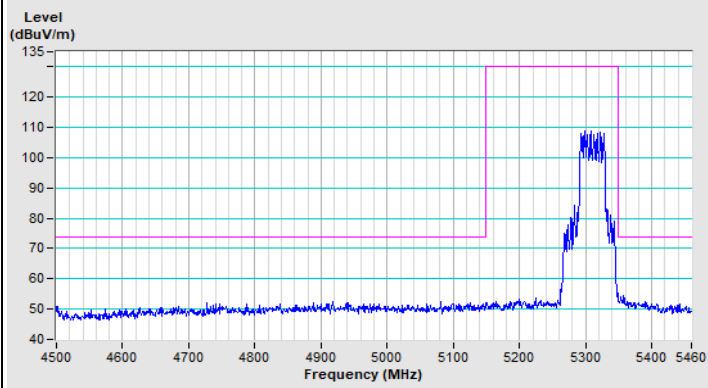


Horizontal (Peak)

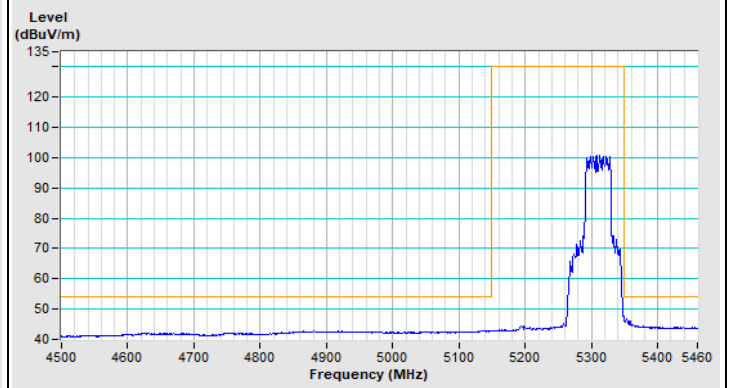

Horizontal (Average)

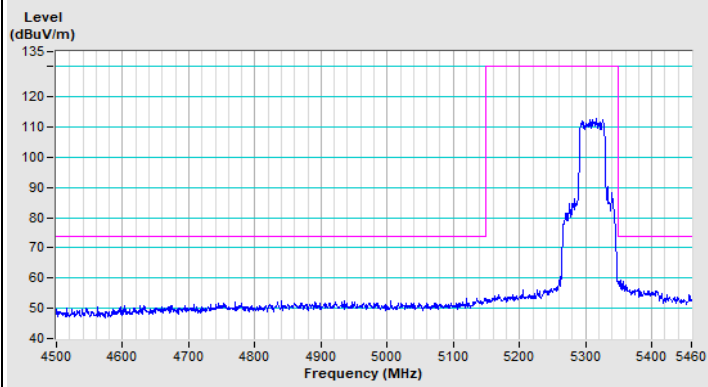





Vertical (Peak)

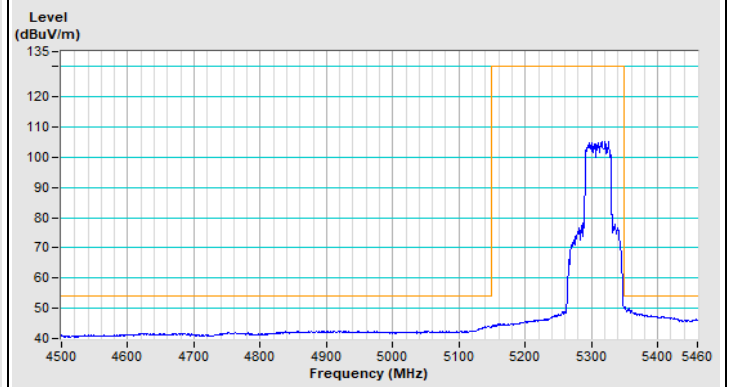



Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 102

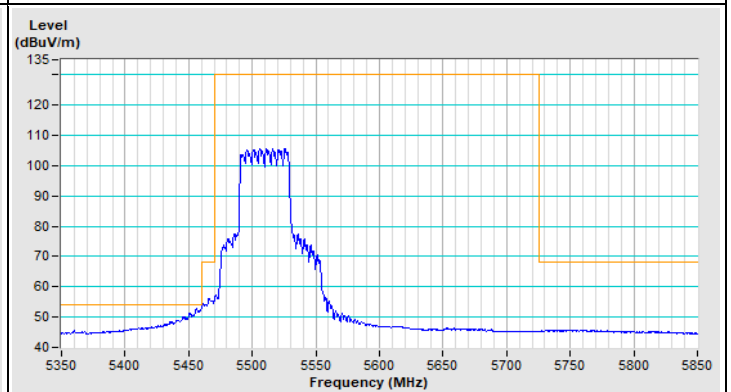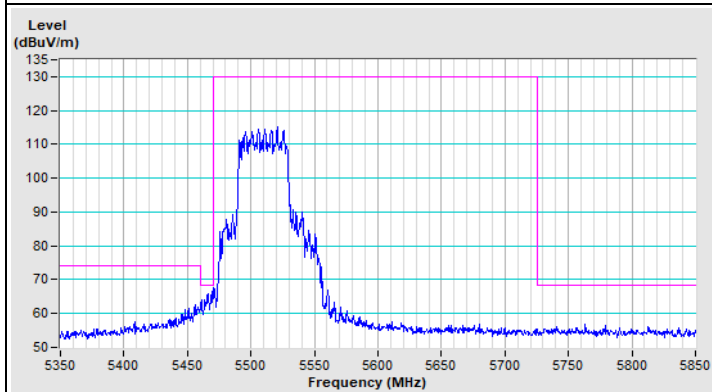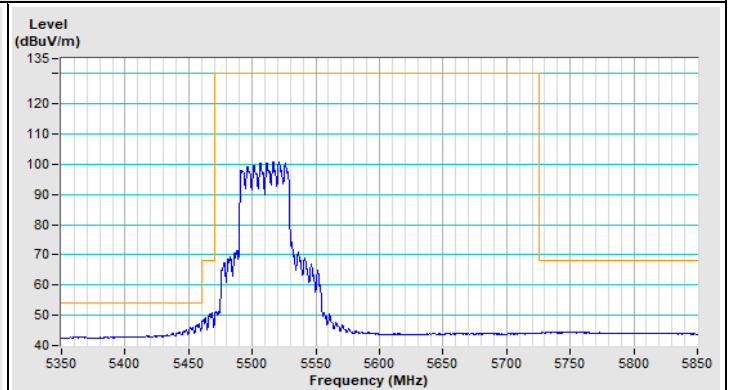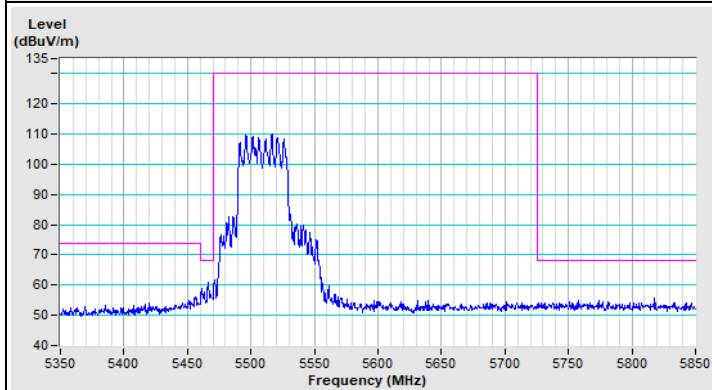


802.11be (EHT40) Channel 134

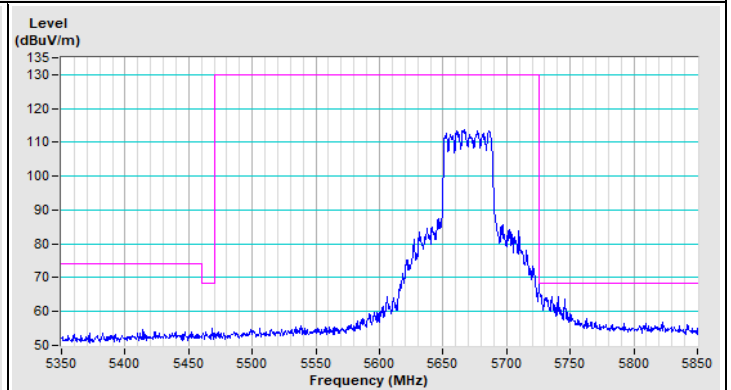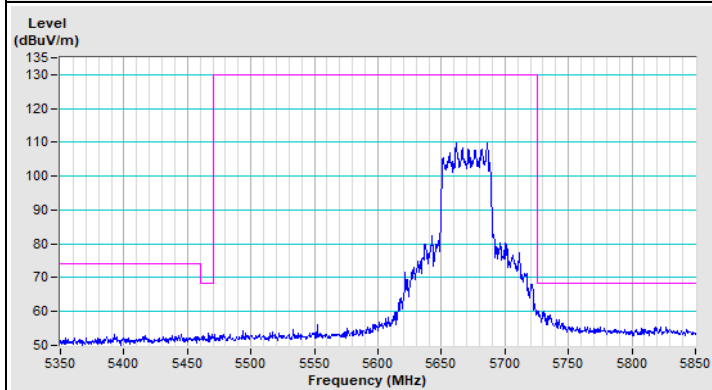


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 142

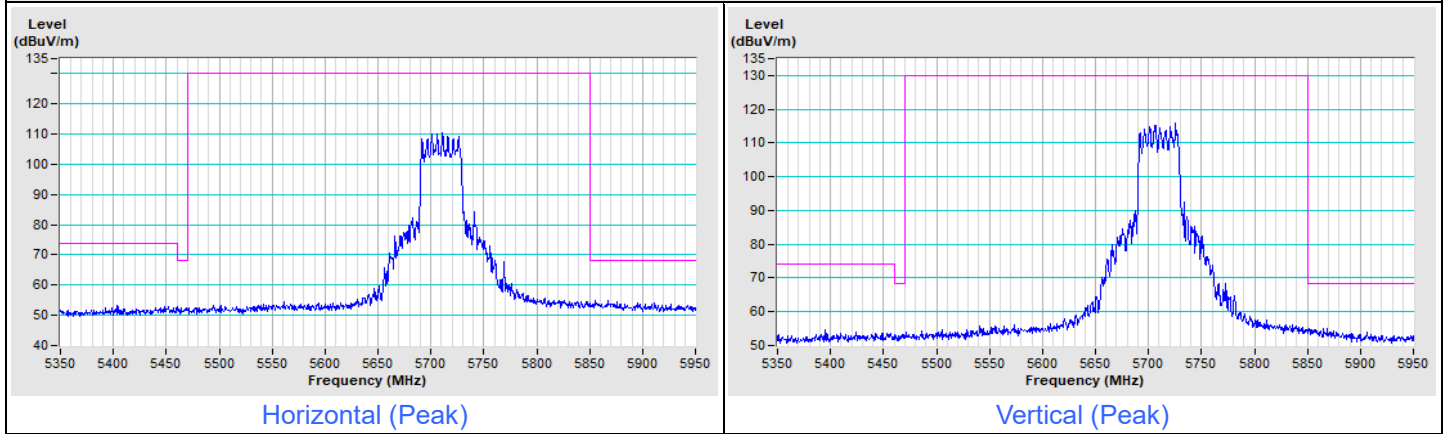


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 151

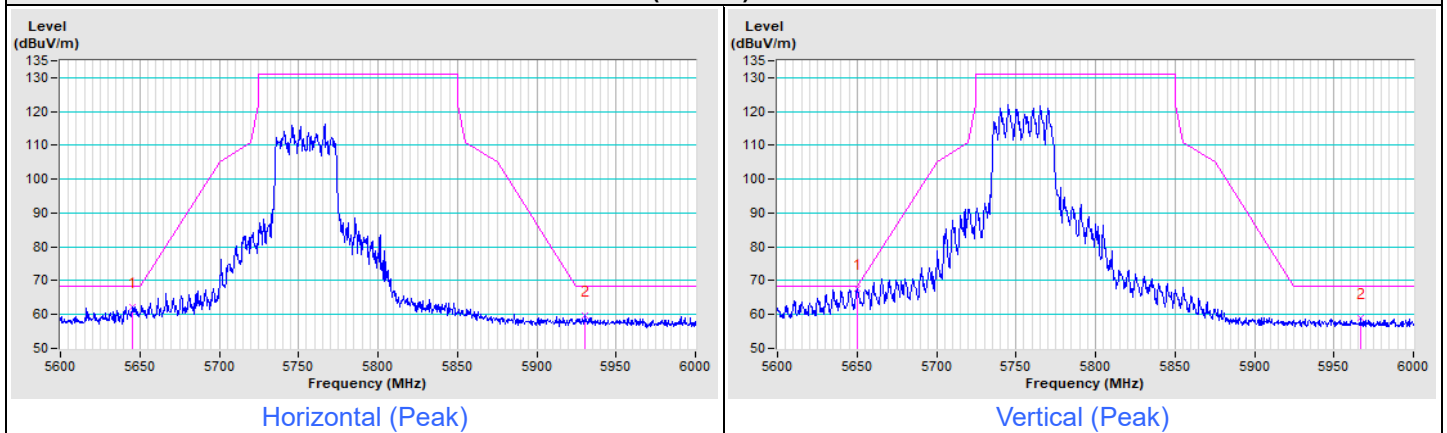


802.11be (EHT40) Channel 159

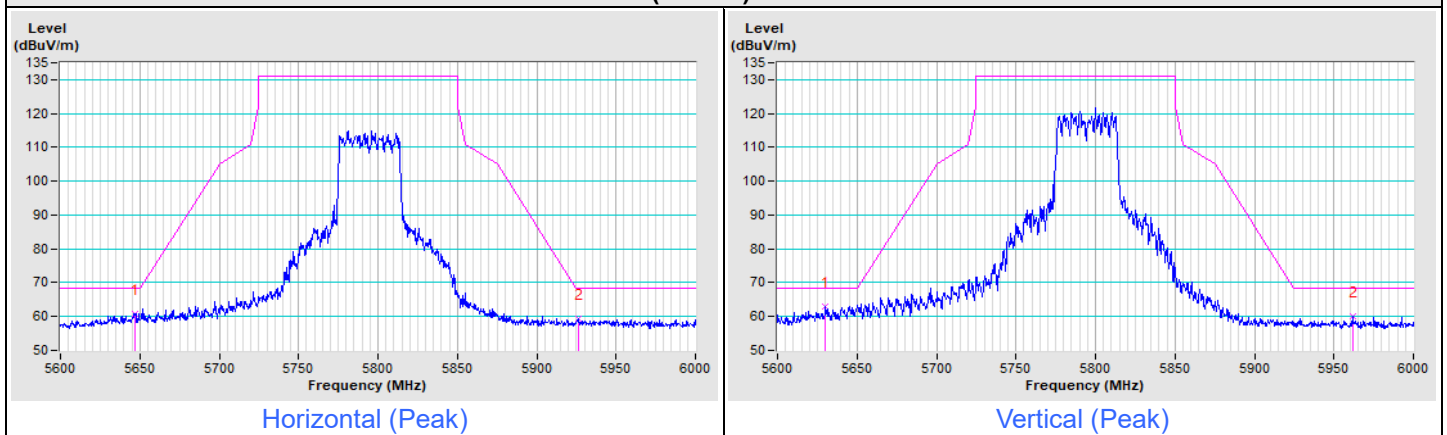


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) Channel 42

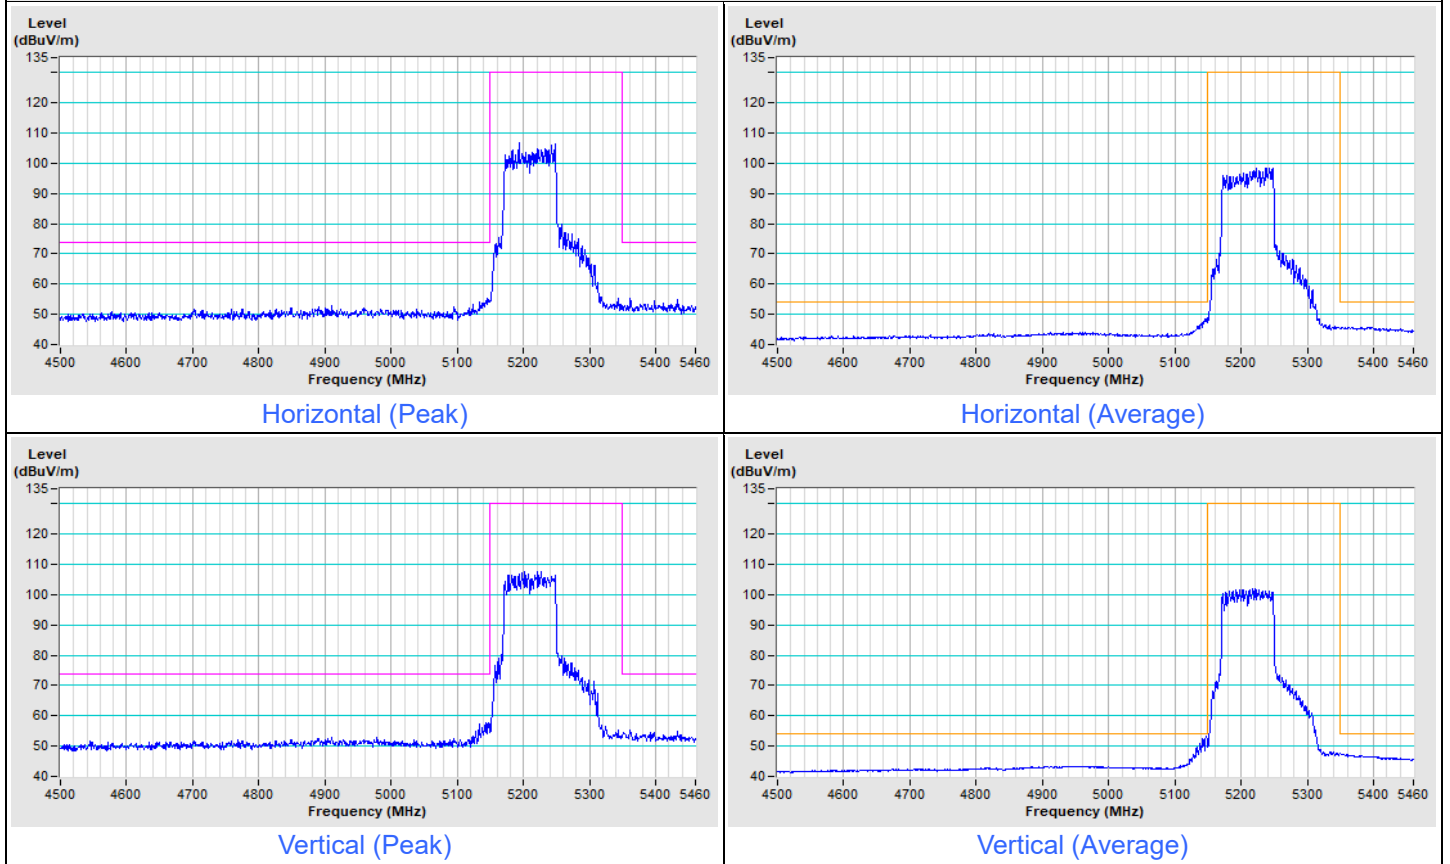


802.11be (EHT80) Channel 58

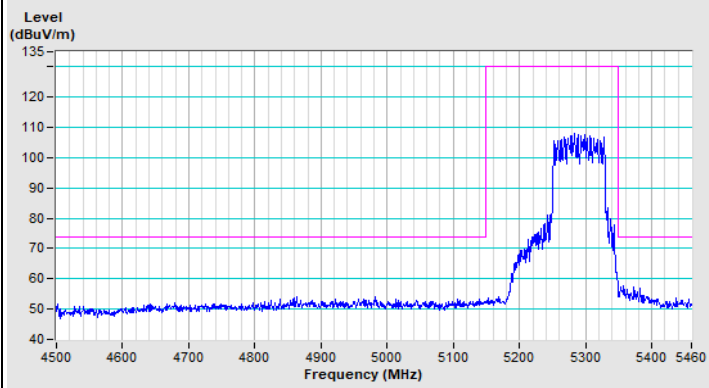


Horizontal (Peak)

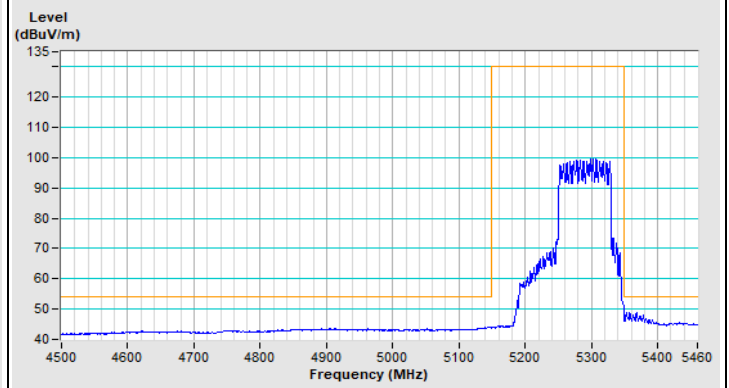

Horizontal (Average)

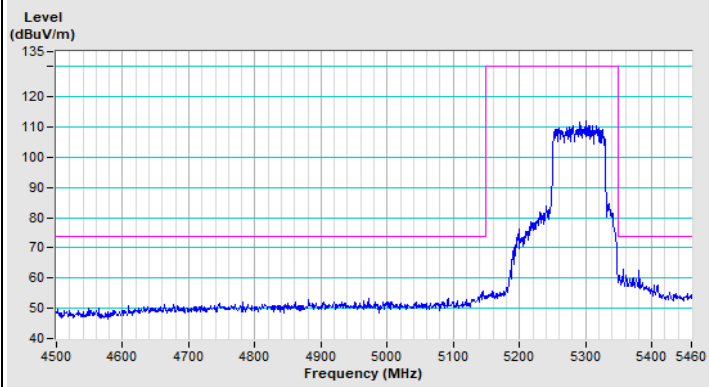


Vertical (Peak)

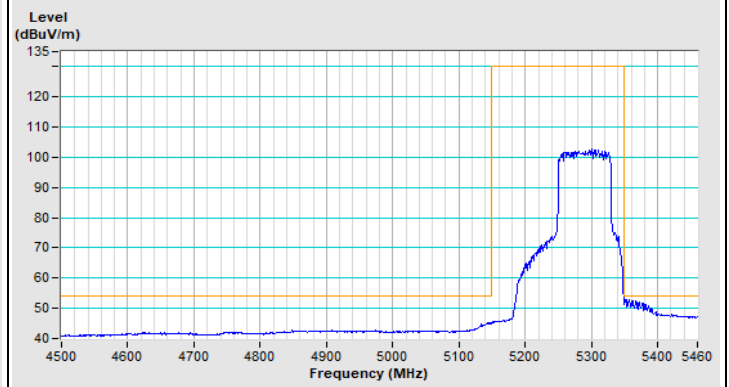


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 106

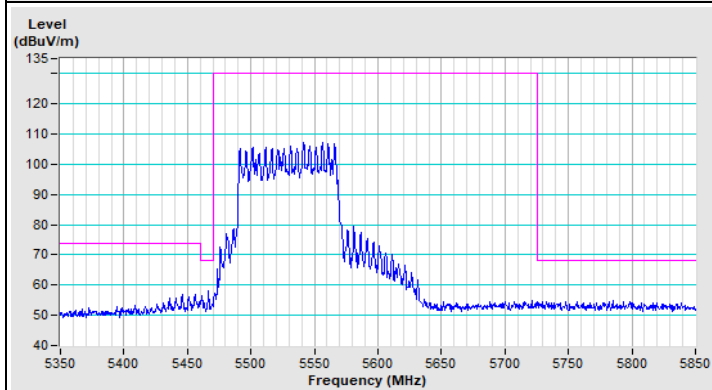


Horizontal (Peak)

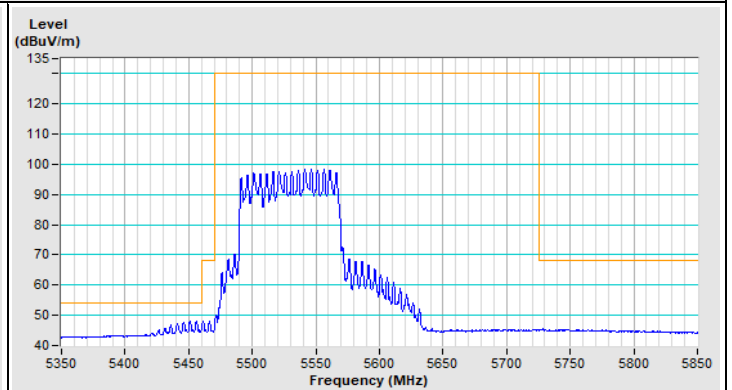

Horizontal (Average)

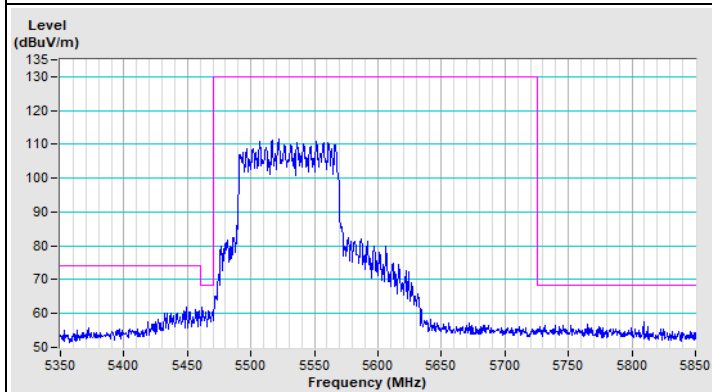


Vertical (Peak)

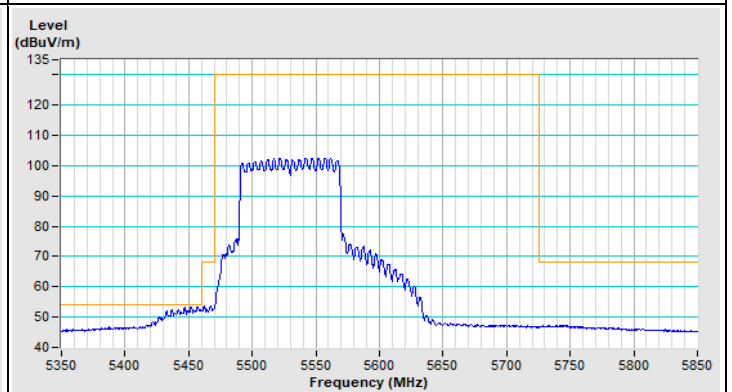


Vertical (Average)

802.11be (EHT80) Channel 122

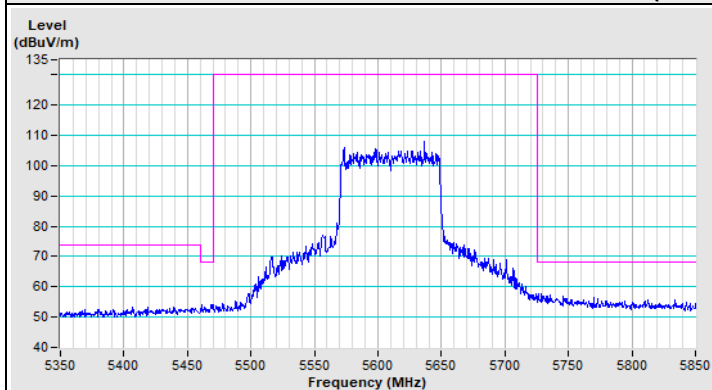


Horizontal (Peak)

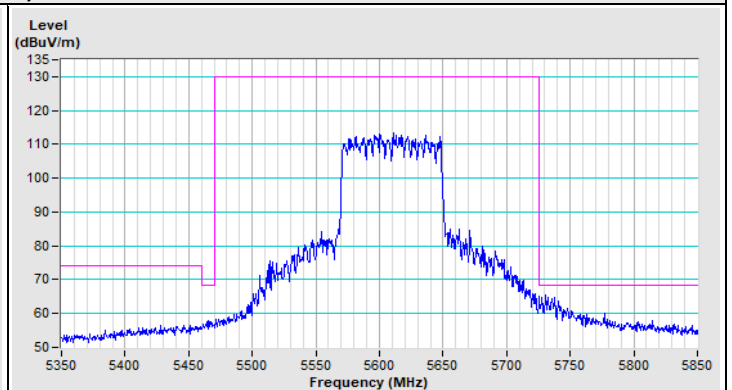

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 138

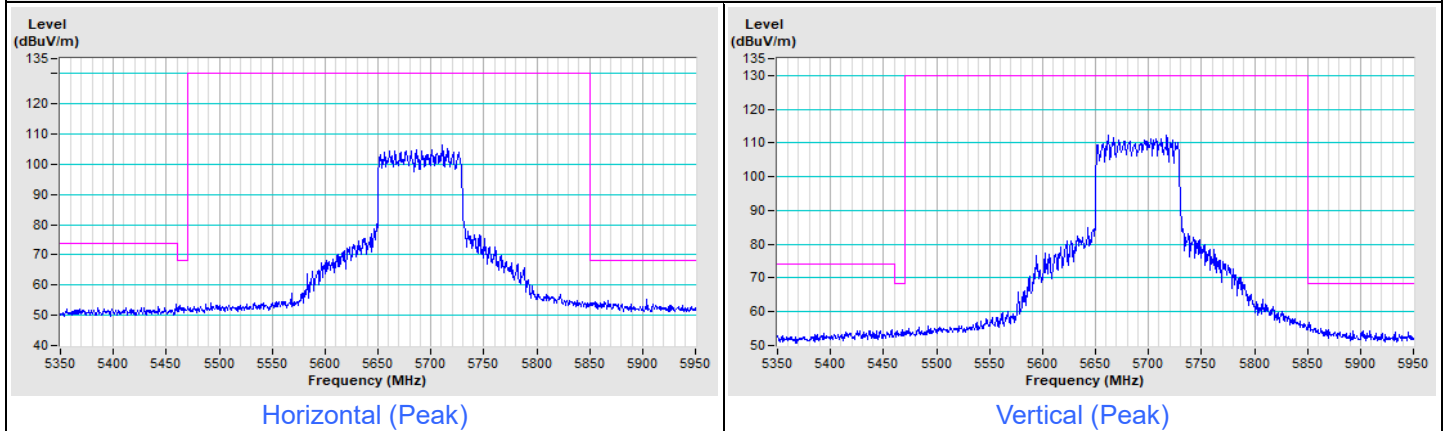


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 155

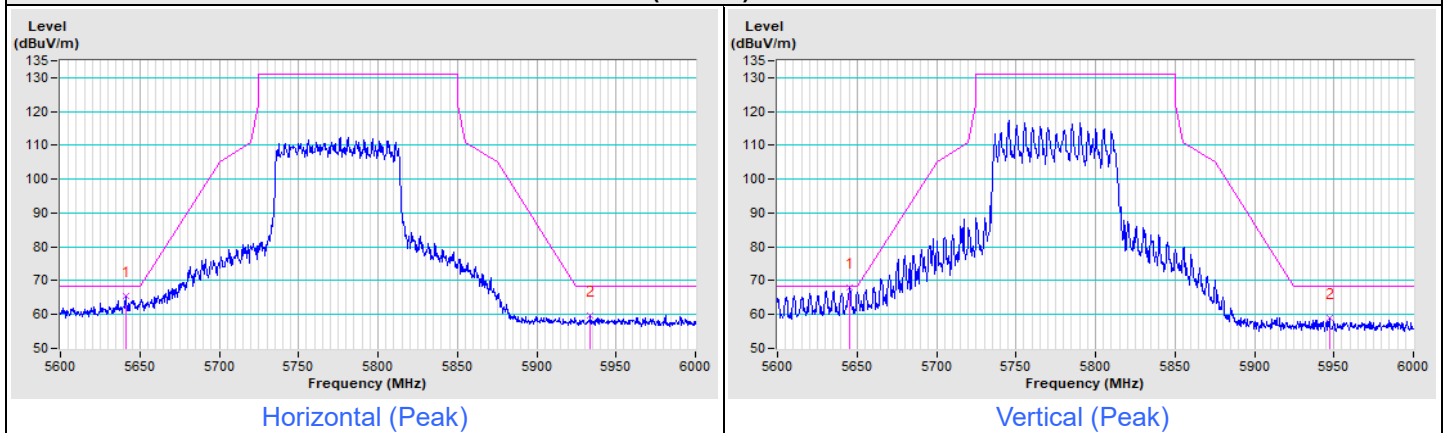


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) Channel 50

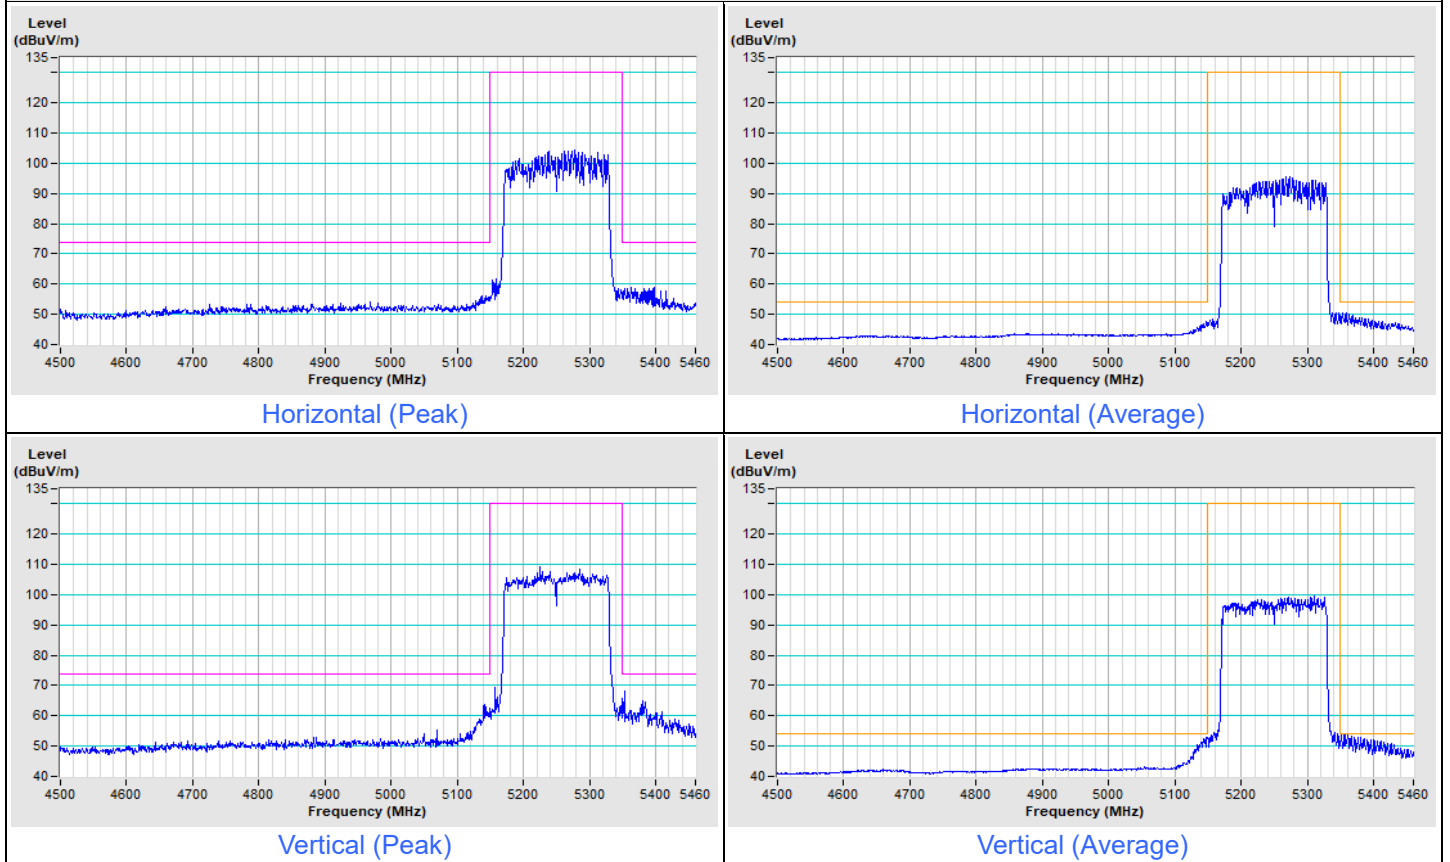

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 114

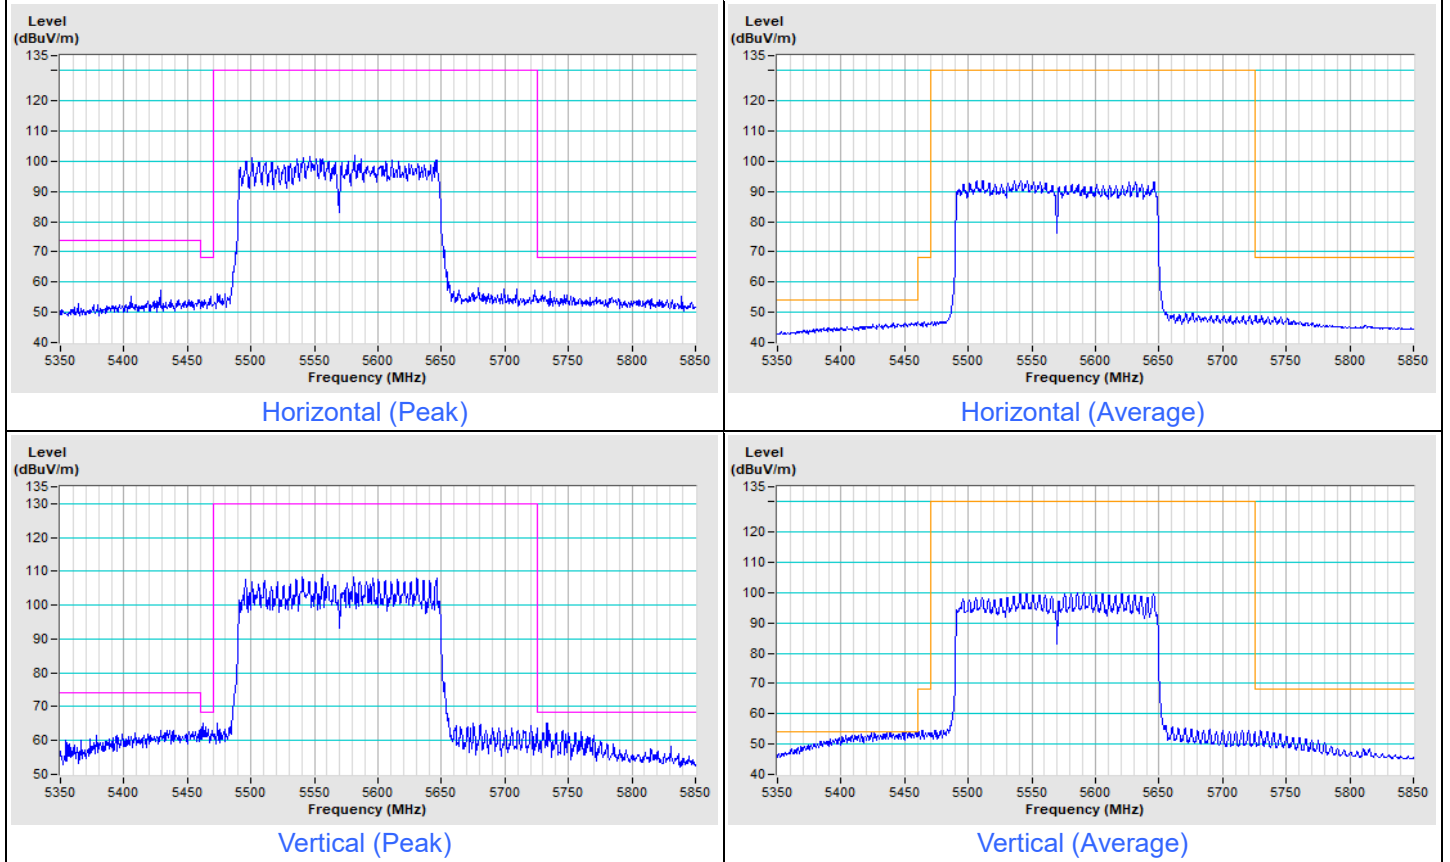

Beamforming Mode

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 75.8 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	1.60 H	231	57.9	2.5
2	5150.00	48.3 AV	54.0	-5.7	1.60 H	231	45.8	2.5
3	*5180.00	112.6 PK			1.60 H	231	72.4	40.2
4	*5180.00	101.1 AV			1.60 H	231	60.9	40.2
5	#10360.00	65.0 PK	68.2	-3.2	1.25 H	228	55.9	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.5 PK	74.0	-6.5	1.73 V	266	65.0	2.5
2	5150.00	51.3 AV	54.0	-2.7	1.73 V	266	48.8	2.5
3	*5180.00	119.0 PK			1.73 V	266	78.8	40.2
4	*5180.00	108.4 AV			1.73 V	266	68.2	40.2
5	#10360.00	56.4 PK	68.2	-11.8	1.64 V	236	47.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 75.8 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	115.5 PK			1.57 H	229	75.4	40.1
2	*5200.00	103.3 AV			1.57 H	229	63.2	40.1
3	#10400.00	55.6 PK	68.2	-12.6	1.45 H	185	46.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	122.8 PK			1.89 V	260	82.7	40.1
2	*5200.00	110.3 AV			1.89 V	260	70.2	40.1
3	#10400.00	56.4 PK	68.2	-11.8	2.36 V	251	47.2	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 75.8 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	116.3 PK			1.61 H	232	76.2	40.1
2	*5240.00	107.0 AV			1.61 H	232	66.9	40.1
3	5350.00	59.4 PK	74.0	-14.6	1.61 H	232	57.1	2.3
4	5350.00	46.1 AV	54.0	-7.9	1.61 H	232	43.8	2.3
5	#10480.00	56.2 PK	68.2	-12.0	1.84 H	178	47.0	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	125.8 PK			1.80 V	259	85.7	40.1
2	*5240.00	113.2 AV			1.80 V	259	73.1	40.1
3	5350.00	65.2 PK	74.0	-8.8	1.80 V	259	62.9	2.3
4	5350.00	52.2 AV	54.0	-1.8	1.80 V	259	49.9	2.3
5	#10480.00	57.5 PK	68.2	-10.7	1.33 V	255	48.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 75.8 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.1 PK	74.0	-18.9	1.58 H	228	52.7	2.4
2	5150.00	43.7 AV	54.0	-10.3	1.58 H	228	41.3	2.4
3	*5260.00	111.3 PK			1.58 H	228	71.2	40.1
4	*5260.00	99.5 AV			1.58 H	228	59.4	40.1
5	#10520.00	56.4 PK	68.2	-11.8	1.54 H	188	47.2	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.4 PK	74.0	-15.6	1.66 V	276	55.9	2.5
2	5150.00	46.7 AV	54.0	-7.3	1.66 V	276	44.2	2.5
3	*5260.00	118.3 PK			1.66 V	276	78.2	40.1
4	*5260.00	106.3 AV			1.66 V	276	66.2	40.1
5	#10520.00	57.2 PK	68.2	-11.0	1.63 V	254	7.0	50.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 75.8 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	111.4 PK			1.55 H	233	71.4	40.0
2	*5300.00	99.7 AV			1.55 H	233	59.7	40.0
3	10600.00	56.2 PK	74.0	-17.8	1.77 H	156	47.0	9.2
4	10600.00	44.6 AV	54.0	-9.4	1.77 H	156	35.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.6 PK			1.69 V	279	78.6	40.0
2	*5300.00	106.5 AV			1.69 V	279	66.5	40.0
3	10600.00	57.5 PK	74.0	-16.5	1.85 V	258	48.3	9.2
4	10600.00	45.5 AV	54.0	-8.5	1.85 V	258	36.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 75.8 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.4 PK			1.59 H	227	71.4	40.0
2	*5320.00	99.8 AV			1.59 H	227	59.8	40.0
3	5350.00	59.7 PK	74.0	-14.3	1.59 H	227	57.3	2.4
4	5350.00	46.6 AV	54.0	-7.4	1.59 H	227	44.2	2.4
5	10640.00	56.8 PK	74.0	-17.2	2.36 H	295	48.0	8.8
6	10640.00	44.7 AV	54.0	-9.3	2.36 H	295	35.9	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.3 PK			1.78 V	260	78.3	40.0
2	*5320.00	106.5 AV			1.78 V	260	66.5	40.0
3	5350.00	62.4 PK	74.0	-11.6	1.78 V	260	60.1	2.3
4	5350.00	49.1 AV	54.0	-4.9	1.78 V	260	46.8	2.3
5	10640.00	57.4 PK	74.0	-16.6	1.77 V	145	48.6	8.8
6	10640.00	45.6 AV	54.0	-8.4	1.77 V	145	36.8	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 75.8 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.3 PK	74.0	-17.7	1.56 H	228	53.8	2.5
2	5460.00	45.1 AV	54.0	-8.9	1.56 H	228	42.6	2.5
3	#5470.00	61.2 PK	68.2	-7.0	1.56 H	228	58.7	2.5
4	*5500.00	110.8 PK			1.56 H	228	70.6	40.2
5	*5500.00	98.6 AV			1.56 H	228	58.4	40.2
6	11000.00	56.3 PK	74.0	-17.7	1.74 H	48	46.9	9.4
7	11000.00	44.2 AV	54.0	-9.8	1.74 H	48	34.8	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.8 PK	74.0	-14.2	1.64 V	275	57.4	2.4
2	5460.00	47.7 AV	54.0	-6.3	1.64 V	275	45.3	2.4
3	#5470.00	66.5 PK	68.2	-1.7	1.64 V	275	64.1	2.4
4	*5500.00	117.9 PK			1.64 V	275	77.7	40.2
5	*5500.00	105.6 AV			1.64 V	275	65.4	40.2
6	11000.00	57.8 PK	74.0	-16.2	1.98 V	158	48.5	9.3
7	11000.00	45.6 AV	54.0	-8.4	1.98 V	158	36.3	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 75.8 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	111.1 PK			1.54 H	236	70.2	40.9
2	*5580.00	99.3 AV			1.54 H	236	58.4	40.9
3	11160.00	56.1 PK	74.0	-17.9	1.34 H	158	46.8	9.3
4	11160.00	44.5 AV	54.0	-9.5	1.34 H	158	35.2	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	118.3 PK			1.68 V	178	77.5	40.8
2	*5580.00	106.5 AV			1.68 V	178	65.7	40.8
3	11160.00	57.6 PK	74.0	-16.4	2.36 V	251	48.4	9.2
4	11160.00	45.5 AV	54.0	-8.5	2.36 V	251	36.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 75.8 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.1 PK			1.56 H	279	68.6	41.5
2	*5700.00	99.2 AV			1.56 H	279	57.7	41.5
3	#5725.00	64.6 PK	68.2	-3.6	1.56 H	279	60.8	3.8
4	11400.00	56.1 PK	74.0	-17.9	1.69 H	254	46.5	9.6
5	11400.00	44.2 AV	54.0	-9.8	1.69 H	254	34.6	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	117.0 PK			1.54 V	274	75.6	41.4
2	*5700.00	106.3 AV			1.54 V	274	64.9	41.4
3	#5725.00	67.9 PK	68.2	-0.3	1.54 V	274	64.2	3.7
4	11400.00	57.1 PK	74.0	-16.9	1.64 V	235	47.6	9.5
5	11400.00	45.1 AV	54.0	-8.9	1.64 V	235	35.6	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 75.8 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.8 PK	68.2	-12.4	1.69 H	228	53.3	2.5
2	*5720.00	110.2 PK			1.69 H	228	68.6	41.6
3	*5720.00	99.1 AV			1.69 H	228	57.5	41.6
4	11440.00	56.2 PK	74.0	-17.8	1.39 H	265	46.7	9.5
5	11440.00	44.1 AV	54.0	-9.9	1.39 H	265	34.6	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.9 PK	68.2	-10.3	1.57 V	278	55.5	2.4
2	*5720.00	117.7 PK			1.57 V	278	76.2	41.5
3	*5720.00	105.2 AV			1.57 V	278	63.7	41.5
4	11440.00	57.4 PK	74.0	-16.6	1.96 V	357	47.9	9.5
5	11440.00	45.6 AV	54.0	-8.4	1.96 V	357	36.1	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.00	59.1 PK	68.2	-9.1	3.06 H	296	55.7	3.4
2	*5745.00	117.9 PK			3.06 H	296	76.3	41.6
3	*5745.00	106.0 AV			3.06 H	296	64.4	41.6
4	#5935.83	59.3 PK	68.2	-8.9	3.06 H	296	55.2	4.1
5	11490.00	56.3 PK	74.0	-17.7	1.58 H	254	46.9	9.4
6	11490.00	44.1 AV	54.0	-9.9	1.58 H	254	34.7	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.20	61.4 PK	68.2	-6.8	1.55 V	274	57.9	3.5
2	*5745.00	122.5 PK			1.55 V	274	80.9	41.6
3	*5745.00	111.0 AV			1.55 V	274	69.4	41.6
4	#5929.39	59.8 PK	68.2	-8.4	1.55 V	274	55.7	4.1
5	11490.00	57.5 PK	74.0	-16.5	2.31 V	145	48.1	9.4
6	11490.00	45.6 AV	54.0	-8.4	2.31 V	145	36.2	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5621.64	59.2 PK	68.2	-9.0	3.15 H	291	55.9	3.3
2	*5785.00	120.2 PK			3.15 H	291	116.2	4.0
3	*5785.00	108.2 AV			3.15 H	291	104.2	4.0
4	#5938.63	58.8 PK	68.2	-9.4	3.15 H	291	54.7	4.1
5	11570.00	56.2 PK	74.0	-17.8	1.69 H	325	46.7	9.5
6	11570.00	44.1 AV	54.0	-9.9	1.69 H	325	34.6	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5630.56	61.8 PK	68.2	-6.4	1.74 V	254	58.4	3.4
2	*5785.00	124.6 PK			1.74 V	254	82.8	41.8
3	*5785.00	113.0 AV			1.74 V	254	71.2	41.8
4	#5934.55	58.7 PK	68.2	-9.5	1.74 V	254	54.6	4.1
5	11570.00	57.5 PK	74.0	-16.5	1.85 V	254	48.0	9.5
6	11570.00	45.5 AV	54.0	-8.5	1.85 V	254	36.0	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.24	59.7 PK	68.2	-8.5	3.06 H	298	56.2	3.5
2	*5825.00	118.6 PK			3.06 H	298	76.8	41.8
3	*5825.00	105.4 AV			3.06 H	298	63.6	41.8
4	#5958.16	60.1 PK	68.2	-8.1	3.06 H	298	55.9	4.2
5	11650.00	56.4 PK	74.0	-17.6	2.41 H	158	47.0	9.4
6	11650.00	44.3 AV	54.0	-9.7	2.41 H	158	34.9	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.60	60.2 PK	68.2	-8.0	1.58 V	279	56.7	3.5
2	*5825.00	123.2 PK			1.58 V	279	81.4	41.8
3	*5825.00	110.7 AV			1.58 V	279	68.9	41.8
4	#5928.19	60.2 PK	68.2	-8.0	1.58 V	279	56.1	4.1
5	11650.00	57.2 PK	74.0	-16.8	2.35 V	169	47.8	9.4
6	11650.00	45.8 AV	54.0	-8.2	2.35 V	169	36.4	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.9 PK	74.0	-13.1	3.06 H	303	58.4	2.5
2	5150.00	47.4 AV	54.0	-6.6	3.06 H	303	44.9	2.5
3	*5190.00	113.6 PK			3.06 H	303	73.4	40.2
4	*5190.00	98.6 AV			3.06 H	303	58.4	40.2
5	#10380.00	56.3 PK	68.2	-11.9	1.66 H	258	47.1	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.1 PK	74.0	-7.9	1.73 V	281	63.6	2.5
2	5150.00	51.7 AV	54.0	-2.3	1.73 V	281	49.2	2.5
3	*5190.00	118.4 PK			1.73 V	281	78.2	40.2
4	*5190.00	103.3 AV			1.73 V	281	63.1	40.2
5	#10380.00	57.5 PK	68.2	-10.7	2.35 V	145	48.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.0 PK	74.0	-8.0	3.05 H	295	63.5	2.5
2	5150.00	51.9 AV	54.0	-2.1	3.05 H	295	49.4	2.5
3	*5230.00	118.1 PK			3.05 H	295	78.0	40.1
4	*5230.00	104.5 AV			3.05 H	295	64.4	40.1
5	5350.00	62.3 PK	74.0	-11.7	3.05 H	295	60.0	2.3
6	5350.00	50.0 AV	54.0	-4.0	3.05 H	295	47.7	2.3
7	#10460.00	56.2 PK	68.2	-12.0	1.85 H	142	47.0	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	1.81 V	259	64.0	2.5
2	5150.00	52.4 AV	54.0	-1.6	1.81 V	259	49.9	2.5
3	*5230.00	123.0 PK			1.81 V	259	82.9	40.1
4	*5230.00	109.0 AV			1.81 V	259	68.9	40.1
5	5350.00	62.9 PK	74.0	-11.1	1.81 V	259	60.6	2.3
6	5350.00	50.5 AV	54.0	-3.5	1.81 V	259	48.2	2.3
7	#10460.00	57.4 PK	68.2	-10.8	1.88 V	255	48.2	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.7 PK	74.0	-19.3	3.06 H	295	52.2	2.5
2	5150.00	43.3 AV	54.0	-10.7	3.06 H	295	40.8	2.5
3	*5270.00	113.2 PK			3.06 H	295	73.1	40.1
4	*5270.00	99.6 AV			3.06 H	295	59.5	40.1
5	#10540.00	56.2 PK	68.2	-12.0	2.25 H	146	47.1	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.79 V	255	56.3	2.5
2	5150.00	47.0 AV	54.0	-7.0	1.79 V	255	44.5	2.5
3	*5270.00	118.4 PK			1.79 V	255	78.3	40.1
4	*5270.00	104.4 AV			1.79 V	255	64.3	40.1
5	#10540.00	57.4 PK	68.2	-10.8	1.64 V	360	48.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	111.4 PK			3.02 H	296	71.4	40.0
2	*5310.00	98.4 AV			3.02 H	296	58.4	40.0
3	5350.00	64.7 PK	74.0	-9.3	3.02 H	296	62.4	2.3
4	5350.00	47.9 AV	54.0	-6.1	3.02 H	296	45.6	2.3
5	10620.00	56.1 PK	74.0	-17.9	2.26 H	325	47.2	8.9
6	10620.00	44.3 AV	54.0	-9.7	2.26 H	325	35.4	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	116.7 PK			1.79 V	256	76.7	40.0
2	*5310.00	103.6 AV			1.79 V	256	63.6	40.0
3	5350.00	67.0 PK	74.0	-7.0	1.79 V	256	64.7	2.3
4	5350.00	49.4 AV	54.0	-4.6	1.79 V	256	47.1	2.3
5	10620.00	57.4 PK	74.0	-16.6	2.35 V	125	48.5	8.9
6	10620.00	45.6 AV	54.0	-8.4	2.35 V	125	36.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.3 PK	74.0	-14.7	3.02 H	270	56.9	2.4
2	5460.00	47.4 AV	54.0	-6.6	3.02 H	270	45.0	2.4
3	#5470.00	61.4 PK	68.2	-6.8	3.02 H	270	59.0	2.4
4	*5510.00	112.0 PK			3.02 H	270	71.8	40.2
5	*5510.00	97.2 AV			3.02 H	270	57.0	40.2
6	11020.00	56.4 PK	74.0	-17.6	2.35 H	169	47.0	9.4
7	11020.00	44.3 AV	54.0	-9.7	2.35 H	169	34.9	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.2 PK	74.0	-8.8	1.63 V	259	62.8	2.4
2	5460.00	51.0 AV	54.0	-3.0	1.63 V	259	48.6	2.4
3	#5470.00	66.0 PK	68.2	-2.2	1.63 V	259	63.6	2.4
4	*5510.00	118.8 PK			1.63 V	259	78.6	40.2
5	*5510.00	105.0 AV			1.63 V	259	64.8	40.2
6	11020.00	57.5 PK	74.0	-16.5	1.55 V	251	48.1	9.4
7	11020.00	45.6 AV	54.0	-8.4	1.55 V	251	36.2	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	112.0 PK			3.06 H	278	71.4	40.6
2	*5550.00	98.6 AV			3.06 H	278	58.0	40.6
3	11100.00	56.2 PK	74.0	-17.8	1.87 H	149	46.8	9.4
4	11100.00	44.1 AV	54.0	-9.9	1.87 H	149	34.7	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	120.2 PK			1.58 V	279	79.6	40.6
2	*5550.00	104.7 AV			1.58 V	279	64.1	40.6
3	11100.00	57.4 PK	74.0	-16.6	1.84 V	156	48.0	9.4
4	11100.00	45.2 AV	54.0	-8.8	1.84 V	156	35.8	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	110.1 PK			3.02 H	288	68.8	41.3
2	*5670.00	97.1 AV			3.02 H	288	55.8	41.3
3	#5725.00	60.1 PK	68.2	-8.1	3.02 H	288	56.4	3.7
4	11340.00	56.1 PK	74.0	-17.9	2.69 H	215	46.8	9.3
5	11340.00	44.2 AV	54.0	-9.8	2.69 H	215	34.9	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	116.7 PK			1.71 V	259	75.4	41.3
2	*5670.00	104.1 AV			1.71 V	259	62.8	41.3
3	#5725.00	64.8 PK	68.2	-3.4	1.71 V	259	61.1	3.7
4	11340.00	57.3 PK	74.0	-16.7	1.87 V	48	48.0	9.3
5	11340.00	45.3 AV	54.0	-8.7	1.87 V	48	36.0	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.6 PK	68.2	-11.6	1.89 H	254	54.2	2.4
2	*5710.00	110.0 PK			3.01 H	285	68.5	41.5
3	*5710.00	98.1 AV			3.01 H	285	56.6	41.5
4	11420.00	56.8 PK	74.0	-17.2	2.01 H	251	47.3	9.5
5	11420.00	44.8 AV	54.0	-9.2	2.01 H	251	35.3	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.2 PK	68.2	-11.0	1.69 V	258	54.8	2.4
2	*5710.00	117.2 PK			1.69 V	258	75.7	41.5
3	*5710.00	104.6 AV			1.69 V	258	63.1	41.5
4	11420.00	57.4 PK	74.0	-16.6	1.84 V	157	47.9	9.5
5	11420.00	45.3 AV	54.0	-8.7	1.84 V	157	35.8	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.12	62.5 PK	68.2	-5.7	3.02 H	288	59.1	3.4
2	*5755.00	117.4 PK			3.02 H	288	75.7	41.7
3	*5755.00	103.3 AV			3.02 H	288	61.6	41.7
4	#5954.44	58.1 PK	68.2	-10.1	3.02 H	288	53.9	4.2
5	11510.00	56.2 PK	74.0	-17.8	1.24 H	184	46.8	9.4
6	11510.00	44.3 AV	54.0	-9.7	1.24 H	184	34.9	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.52	66.3 PK	68.2	-1.9	1.71 V	256	62.8	3.5
2	*5755.00	123.9 PK			1.71 V	256	82.2	41.7
3	*5755.00	110.8 AV			1.71 V	256	69.1	41.7
4	#5931.35	58.6 PK	68.2	-9.6	1.71 V	256	54.5	4.1
5	11510.00	57.1 PK	74.0	-16.9	1.34 V	158	47.7	9.4
6	11510.00	45.3 AV	54.0	-8.7	1.34 V	158	35.9	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.68	60.8 PK	68.2	-7.4	3.04 H	287	57.3	3.5
2	*5795.00	117.4 PK			3.04 H	287	75.6	41.8
3	*5795.00	104.6 AV			3.04 H	287	62.8	41.8
4	#5929.99	59.2 PK	68.2	-9.0	3.04 H	287	55.1	4.1
5	11590.00	56.6 PK	74.0	-17.4	2.41 H	158	47.0	9.6
6	11590.00	44.5 AV	54.0	-9.5	2.41 H	158	34.9	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.16	64.2 PK	68.2	-4.0	1.67 V	258	60.7	3.5
2	*5795.00	124.7 PK			1.67 V	258	82.9	41.8
3	*5795.00	111.4 AV			1.67 V	258	69.6	41.8
4	#5943.87	59.3 PK	68.2	-8.9	1.67 V	258	55.2	4.1
5	11590.00	57.0 PK	74.0	-17.0	1.34 V	189	47.4	9.6
6	11590.00	44.8 AV	54.0	-9.2	1.34 V	189	35.2	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.3 PK	74.0	-13.7	3.03 H	236	57.8	2.5
2	5150.00	48.5 AV	54.0	-5.5	3.03 H	292	46.0	2.5
3	*5210.00	112.2 PK			3.03 H	292	72.1	40.1
4	*5210.00	95.6 AV			3.03 H	292	55.5	40.1
5	5350.00	58.5 PK	74.0	-15.5	3.03 H	292	56.2	2.3
6	5350.00	46.3 AV	54.0	-7.7	3.03 H	292	44.0	2.3
7	#10420.00	56.6 PK	68.2	-11.6	1.87 H	46	47.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.3 PK	74.0	-9.7	1.69 V	258	61.8	2.5
2	5150.00	52.0 AV	54.0	-2.0	1.69 V	258	49.5	2.5
3	*5210.00	119.4 PK			1.69 V	258	79.3	40.1
4	*5210.00	102.4 AV			1.69 V	258	62.3	40.1
5	5350.00	62.1 PK	74.0	-11.9	1.69 V	258	59.8	2.3
6	5350.00	50.1 AV	54.0	-3.9	1.69 V	258	47.8	2.3
7	#10420.00	57.4 PK	68.2	-10.8	1.84 V	152	48.2	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	3.05 H	291	56.4	2.5
2	5150.00	46.8 AV	54.0	-7.2	3.05 H	291	44.3	2.5
3	*5290.00	111.2 PK			3.05 H	291	71.2	40.0
4	*5290.00	94.3 AV			3.05 H	291	54.3	40.0
5	5350.00	69.6 PK	74.0	-4.4	3.05 H	291	67.3	2.3
6	5350.00	48.9 AV	54.0	-5.1	3.05 H	291	46.6	2.3
7	#10580.00	56.4 PK	68.2	-11.8	1.63 H	236	47.3	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.67 V	260	57.1	2.5
2	5150.00	47.5 AV	54.0	-6.5	1.67 V	260	45.0	2.5
3	*5290.00	118.6 PK			1.67 V	260	78.6	40.0
4	*5290.00	101.7 AV			1.67 V	260	61.7	40.0
5	5350.00	73.0 PK	74.0	-1.0	1.67 V	260	70.7	2.3
6	5350.00	53.3 AV	54.0	-0.7	1.67 V	260	51.0	2.3
7	#10580.00	57.5 PK	68.2	-10.7	1.57 V	148	48.4	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.1 PK	74.0	-9.9	2.98 H	291	61.7	2.4
2	5460.00	50.1 AV	54.0	-3.9	2.98 H	291	47.7	2.4
3	#5470.00	63.1 PK	68.2	-5.1	2.98 H	291	60.7	2.4
4	*5530.00	111.2 PK			2.98 H	291	70.7	40.5
5	*5530.00	95.2 AV			2.98 H	291	54.7	40.5
6	11060.00	56.3 PK	74.0	-17.7	1.87 H	145	47.0	9.3
7	11060.00	44.2 AV	54.0	-9.8	1.87 H	145	34.9	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	68.0 PK	74.0	-6.0	1.68 V	258	65.6	2.4
2	5460.00	53.6 AV	54.0	-0.4	1.68 V	258	51.2	2.4
3	#5470.00	68.0 PK	68.2	-0.2	1.68 V	258	65.6	2.4
4	*5530.00	118.1 PK			1.68 V	258	77.6	40.5
5	*5530.00	101.9 AV			1.68 V	258	61.4	40.5
6	11060.00	57.4 PK	74.0	-16.6	1.68 V	52	48.1	9.3
7	11060.00	45.6 AV	54.0	-8.4	1.68 V	52	36.3	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	111.4 PK			3.03 H	288	70.4	41.0
2	*5610.00	98.6 AV			3.03 H	288	57.6	41.0
3	#5725.00	57.4 PK	68.2	-10.8	3.03 H	288	53.7	3.7
4	11220.00	56.4 PK	74.0	-17.6	1.84 H	197	47.5	8.9
5	11220.00	44.6 AV	54.0	-9.4	1.84 H	197	35.7	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	118.5 PK			1.66 V	259	77.5	41.0
2	*5610.00	102.9 AV			1.66 V	259	61.9	41.0
3	#5725.00	61.7 PK	68.2	-6.5	1.66 V	259	58.0	3.7
4	11220.00	57.6 PK	74.0	-16.4	1.87 V	45	48.7	8.9
5	11220.00	45.3 AV	54.0	-8.7	1.87 V	45	36.4	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	53.3 PK	68.2	-14.9	3.03 H	287	50.9	2.4
2	*5690.00	110.4 PK			3.03 H	287	69.0	41.4
3	*5690.00	94.6 AV			3.03 H	287	53.2	41.4
4	11380.00	56.2 PK	74.0	-17.8	1.74 H	123	46.7	9.5
5	11380.00	44.3 AV	54.0	-9.7	1.74 H	123	34.8	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.9 PK	68.2	-11.3	1.68 V	258	54.5	2.4
2	*5690.00	117.5 PK			1.68 V	258	76.1	41.4
3	*5690.00	101.7 AV			1.68 V	258	60.3	41.4
4	11380.00	57.3 PK	74.0	-16.7	2.14 V	152	47.8	9.5
5	11380.00	45.2 AV	54.0	-8.8	2.14 V	152	35.7	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.16	63.7 PK	68.2	-4.5	3.03 H	293	60.2	3.5
2	*5775.00	117.1 PK			3.03 H	293	75.3	41.8
3	*5775.00	100.3 AV			3.03 H	293	58.5	41.8
4	#5943.35	58.7 PK	68.2	-9.5	3.03 H	293	54.6	4.1
5	11550.00	56.4 PK	74.0	-17.6	2.51 H	148	46.9	9.5
6	11550.00	44.3 AV	54.0	-9.7	2.51 H	148	34.8	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.48	66.5 PK	68.2	-1.7	1.66 V	259	63.1	3.4
2	*5775.00	123.9 PK			1.66 V	259	82.1	41.8
3	*5775.00	107.2 AV			1.66 V	259	65.4	41.8
4	#5937.27	58.8 PK	68.2	-9.4	1.66 V	259	54.7	4.1
5	11550.00	57.7 PK	74.0	-16.3	1.58 V	254	48.2	9.5
6	11550.00	45.6 AV	54.0	-8.4	1.58 V	254	36.1	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	3.02 H	295	57.7	2.5
2	5150.00	44.3 AV	54.0	-9.7	3.02 H	295	41.8	2.5
3	*5250.00	108.4 PK			3.02 H	295	68.3	40.1
4	*5250.00	91.3 AV			3.02 H	295	51.2	40.1
5	5350.00	68.2 PK	74.0	-5.8	3.02 H	295	65.9	2.3
6	5350.00	48.3 AV	54.0	-5.7	3.02 H	295	46.0	2.3
7	#10500.00	56.2 PK	68.2	-12.0	1.47 H	45	47.1	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.7 PK	74.0	-9.3	1.77 V	256	62.2	2.5
2	5150.00	48.3 AV	54.0	-5.7	1.77 V	256	45.8	2.5
3	*5250.00	115.5 PK			1.77 V	256	75.4	40.1
4	*5250.00	98.7 AV			1.77 V	256	58.6	40.1
5	5350.00	72.0 PK	74.0	-2.0	1.77 V	256	69.7	2.3
6	5350.00	52.0 AV	54.0	-2.0	1.77 V	256	49.7	2.3
7	#10500.00	57.4 PK	68.2	-10.8	1.36 V	224	48.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 72.3 % RH
Tested By	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.1 PK	74.0	-11.9	3.05 H	289	59.7	2.4
2	5460.00	47.5 AV	54.0	-6.5	3.05 H	289	45.1	2.4
3	#5470.00	62.1 PK	68.2	-6.1	3.05 H	289	59.7	2.4
4	*5570.00	111.8 PK			3.05 H	289	71.1	40.7
5	*5570.00	92.2 AV			3.05 H	289	51.5	40.7
6	#5725.00	56.1 PK	68.2	-12.1	3.05 H	289	52.4	3.7
7	11140.00	56.2 PK	74.0	-17.8	2.41 H	156	47.0	9.2
8	11140.00	44.3 AV	54.0	-9.7	2.41 H	156	35.1	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.2 PK	74.0	-7.8	1.68 V	256	63.8	2.4
2	5460.00	53.6 AV	54.0	-0.4	1.68 V	256	51.2	2.4
3	#5470.00	66.6 PK	68.2	-1.6	1.68 V	256	64.2	2.4
4	*5570.00	119.0 PK			1.68 V	256	78.3	40.7
5	*5570.00	99.6 AV			1.68 V	256	58.9	40.7
6	#5725.00	60.8 PK	68.2	-7.4	1.68 V	256	57.1	3.7
7	11140.00	57.6 PK	74.0	-16.4	1.85 V	245	48.4	9.2
8	11140.00	45.7 AV	54.0	-8.3	1.85 V	245	36.5	9.2


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.





Plot of Band Edge_Beamforming

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) Channel 36

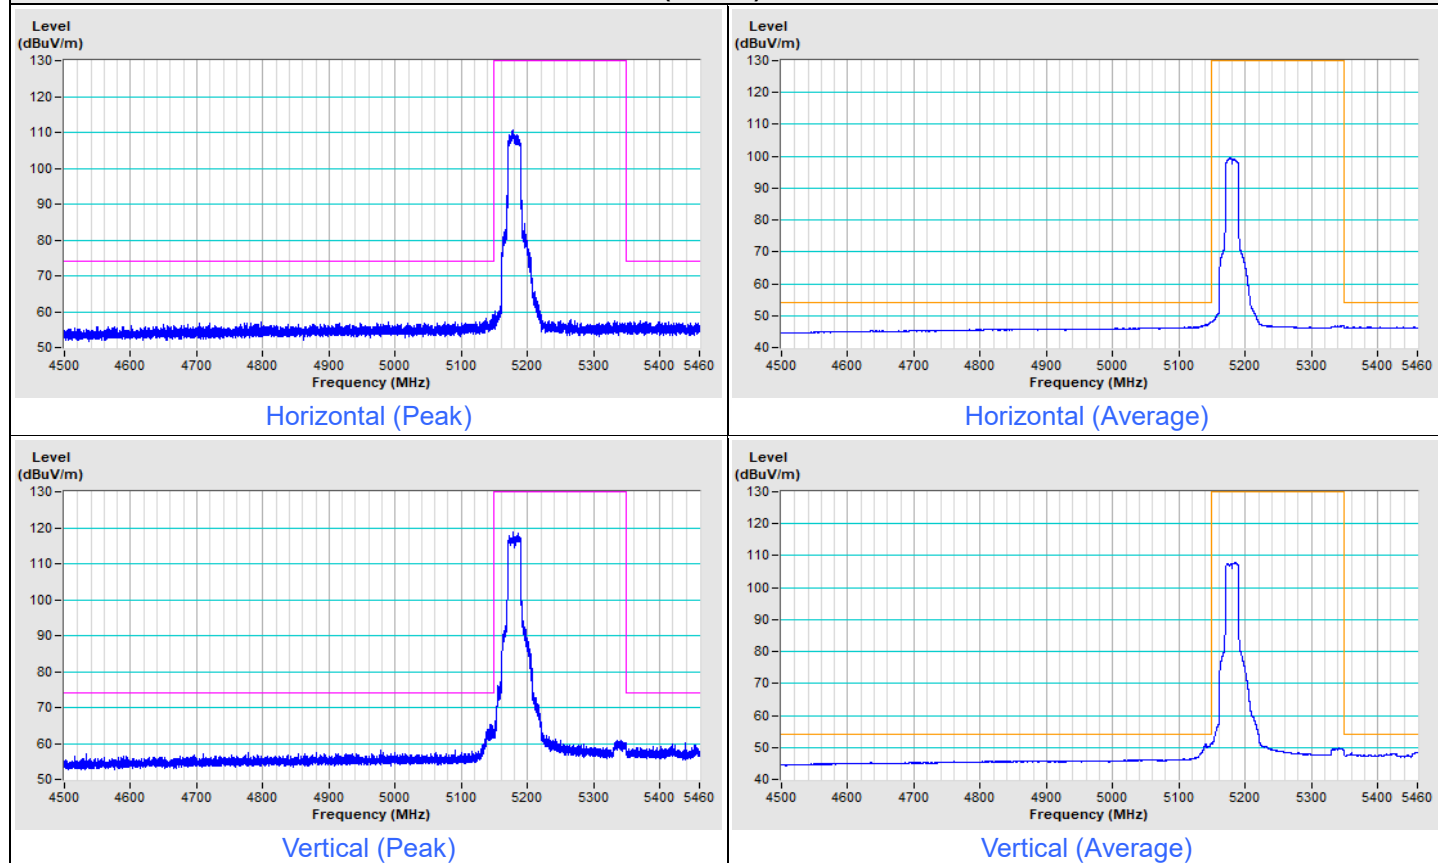


802.11be (EHT20) Channel 48

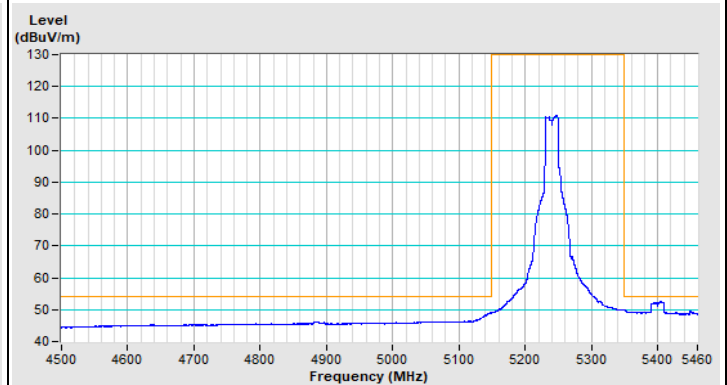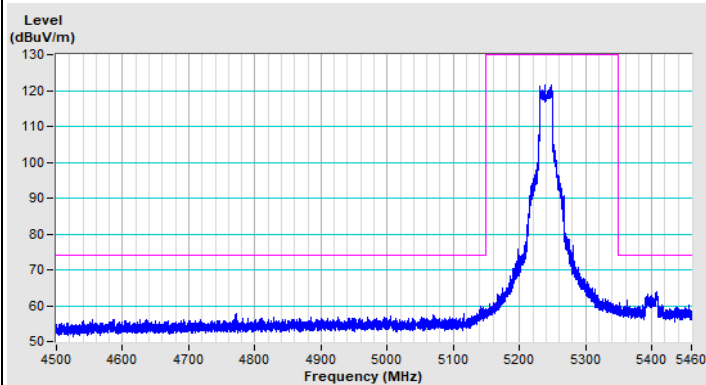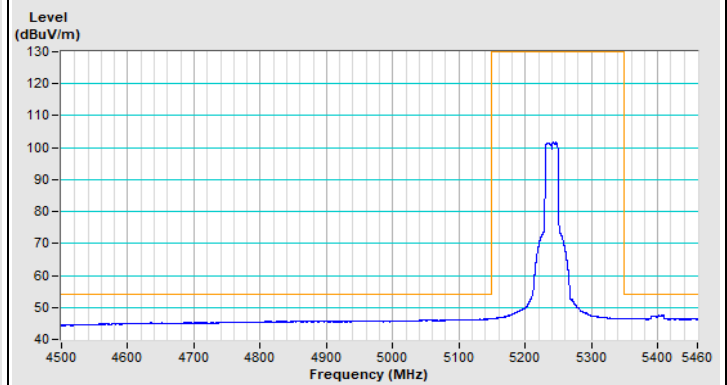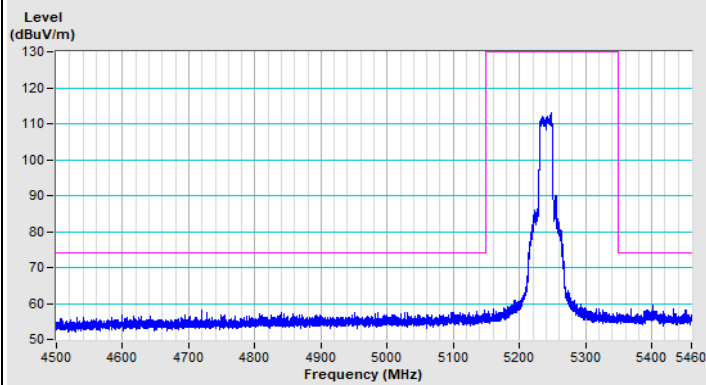


802.11be (EHT20) Channel 52

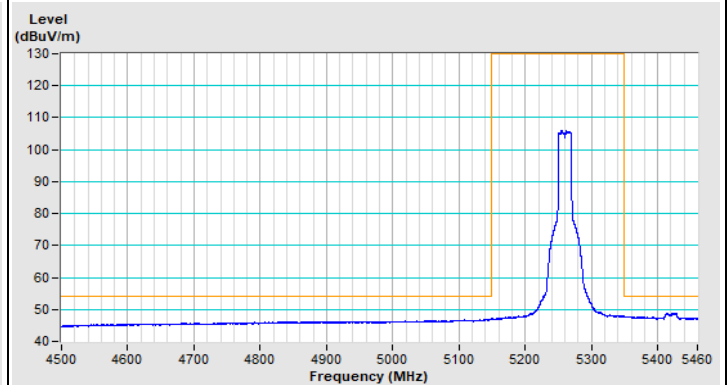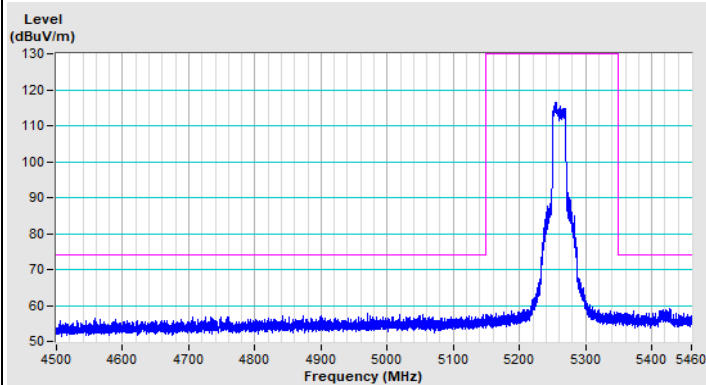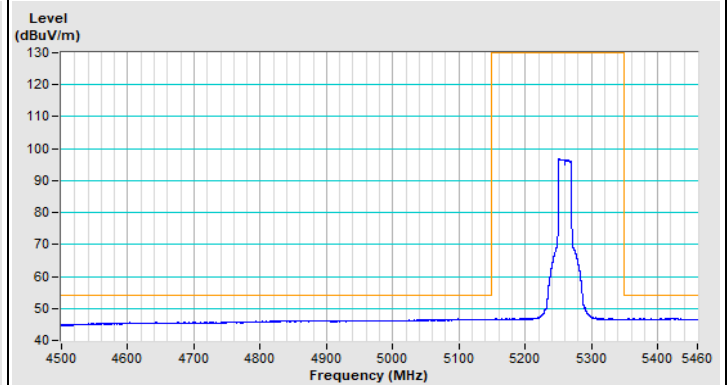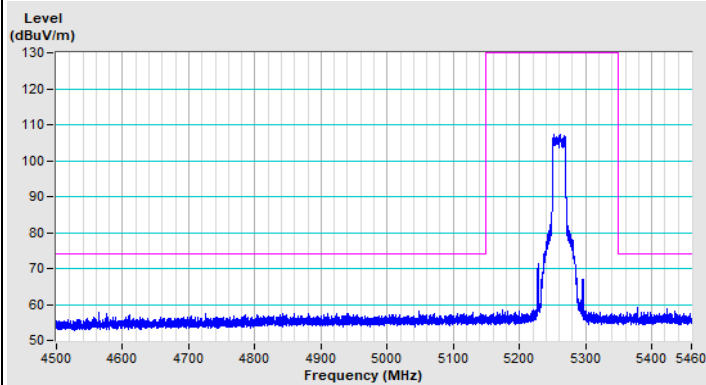


802.11be (EHT20) Channel 64

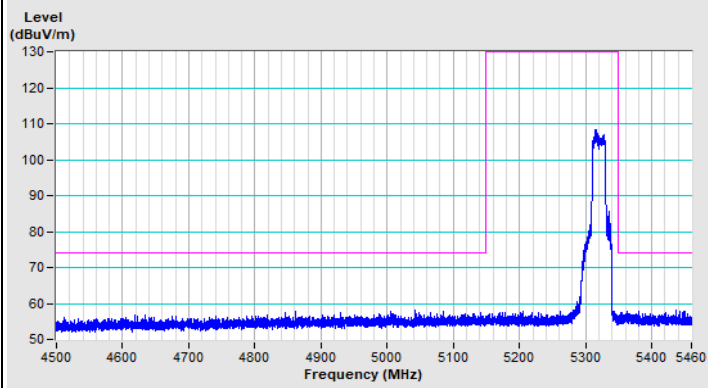


Horizontal (Peak)

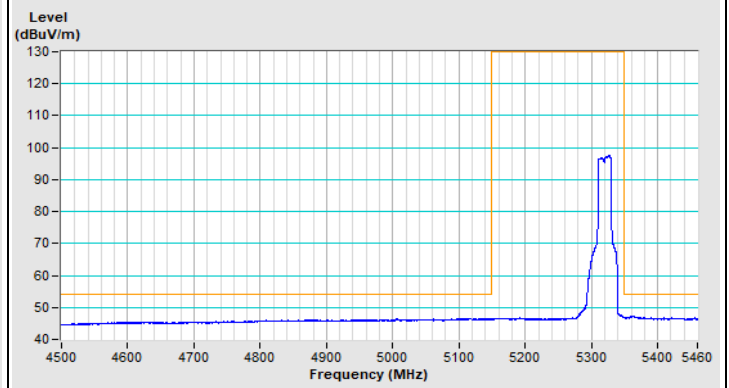

Horizontal (Average)

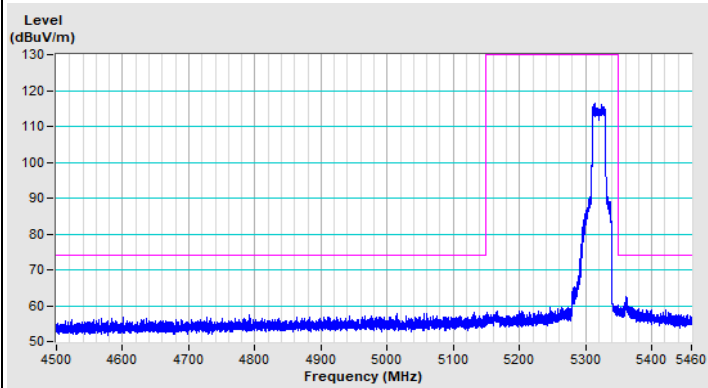


Vertical (Peak)

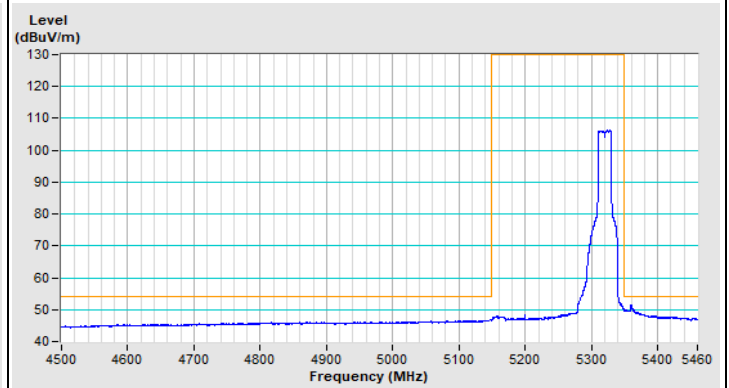


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

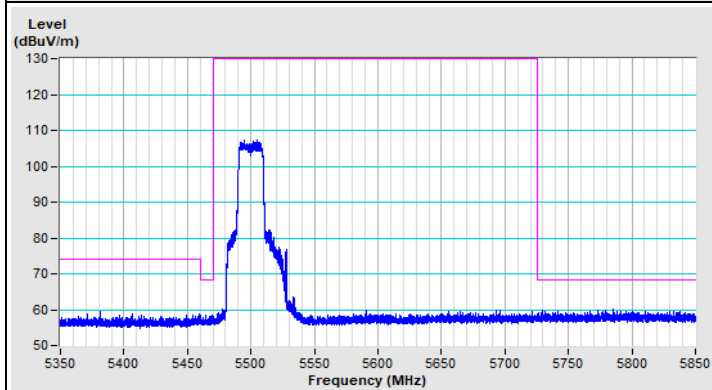


Horizontal (Peak)

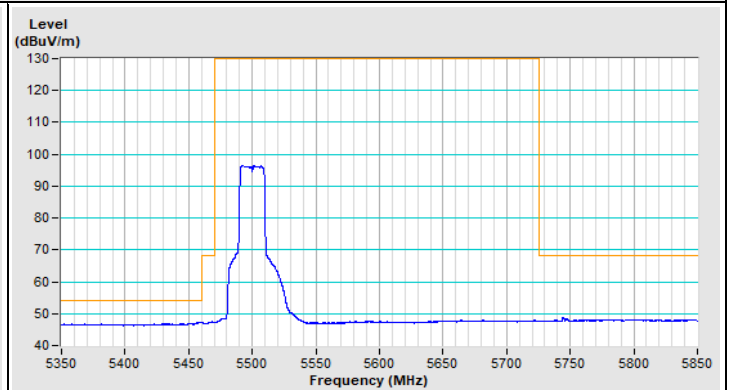

Horizontal (Average)

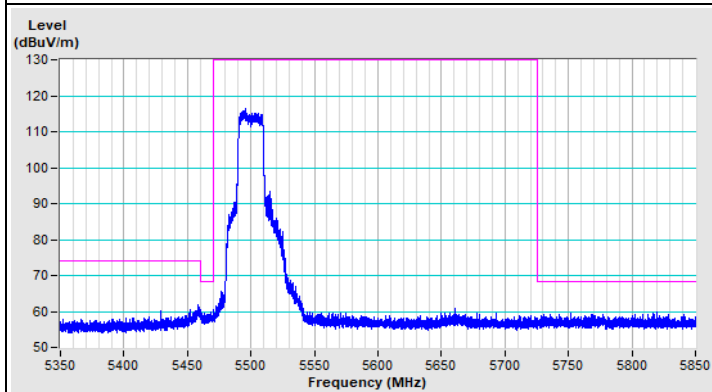


Vertical (Peak)

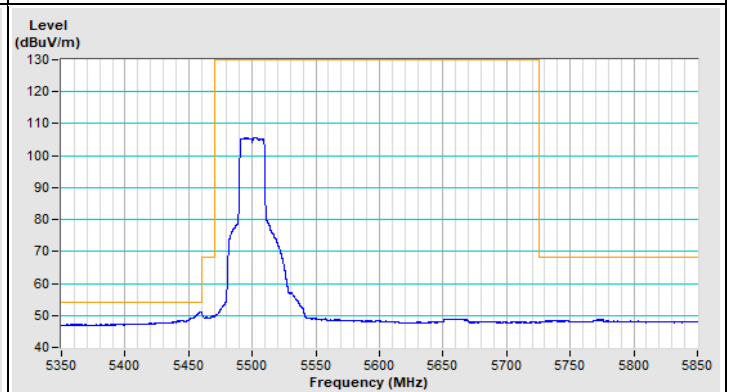


Vertical (Average)

802.11be (EHT20) Channel 140

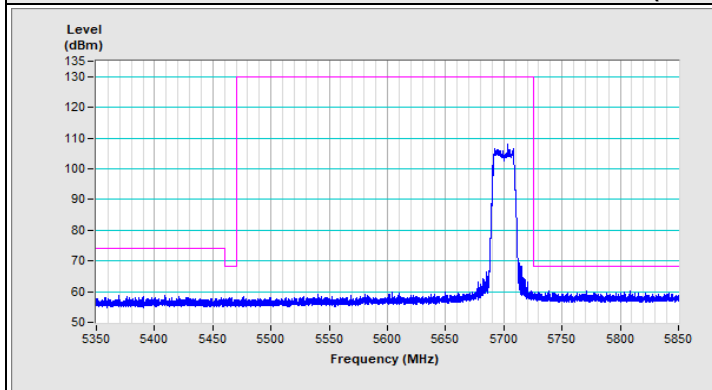


Horizontal (Peak)

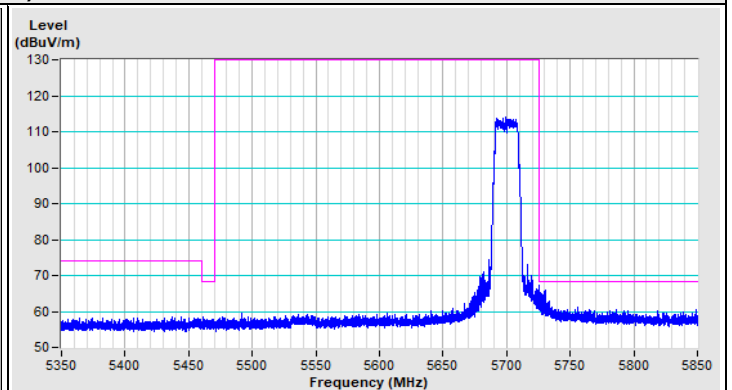

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT20) Channel 144

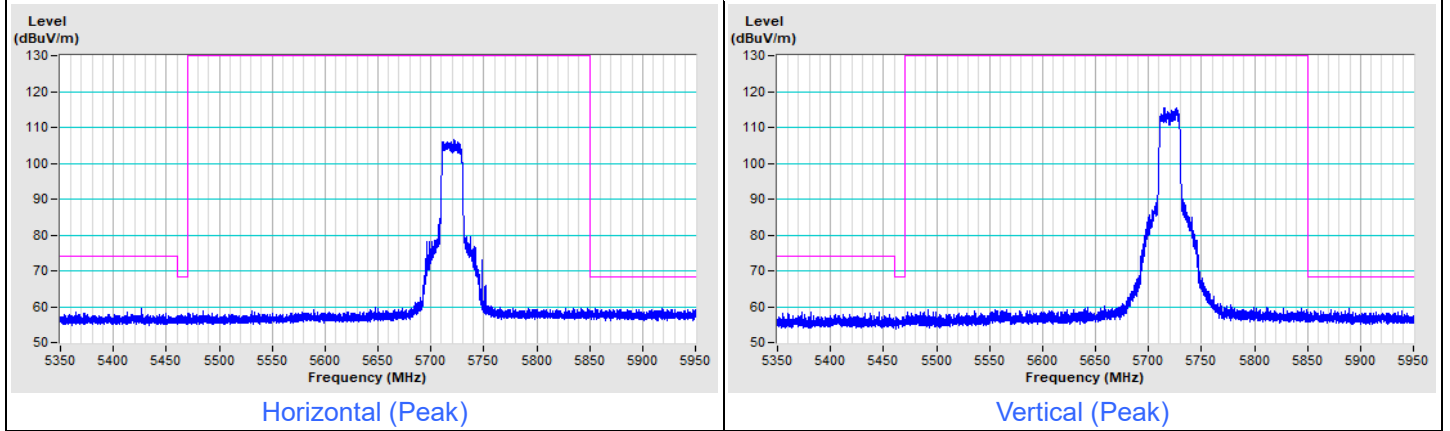


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) Channel 149

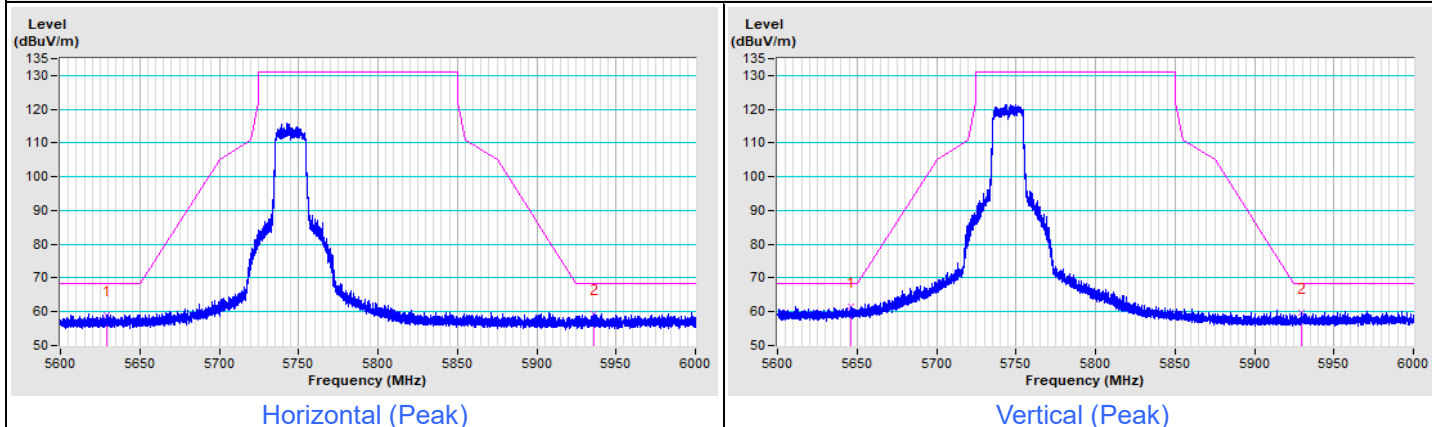

802.11be (EHT20) Channel 157

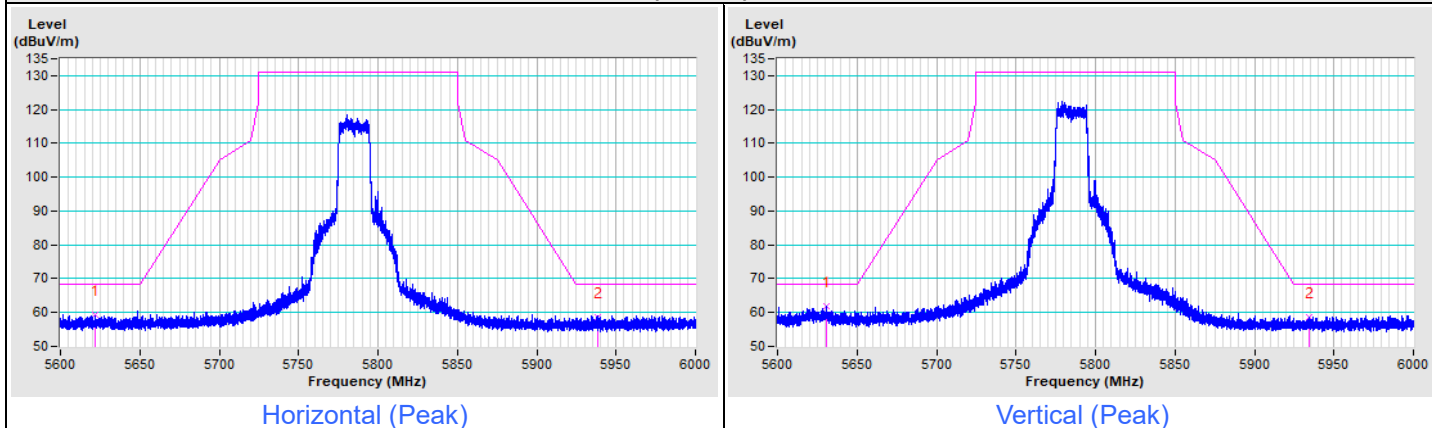


802.11be (EHT20) Channel 165




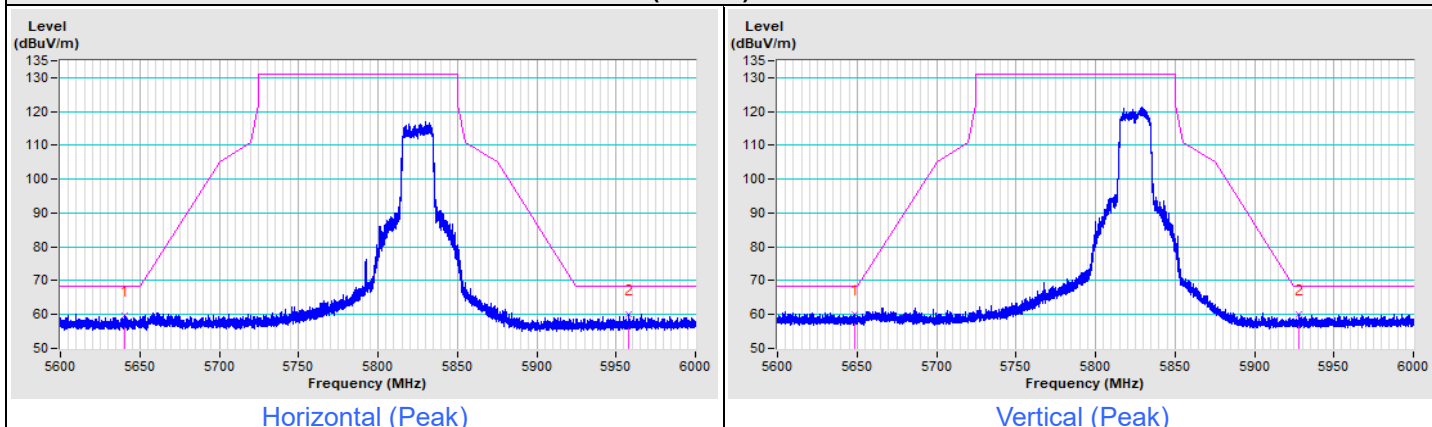


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT40) Channel 38

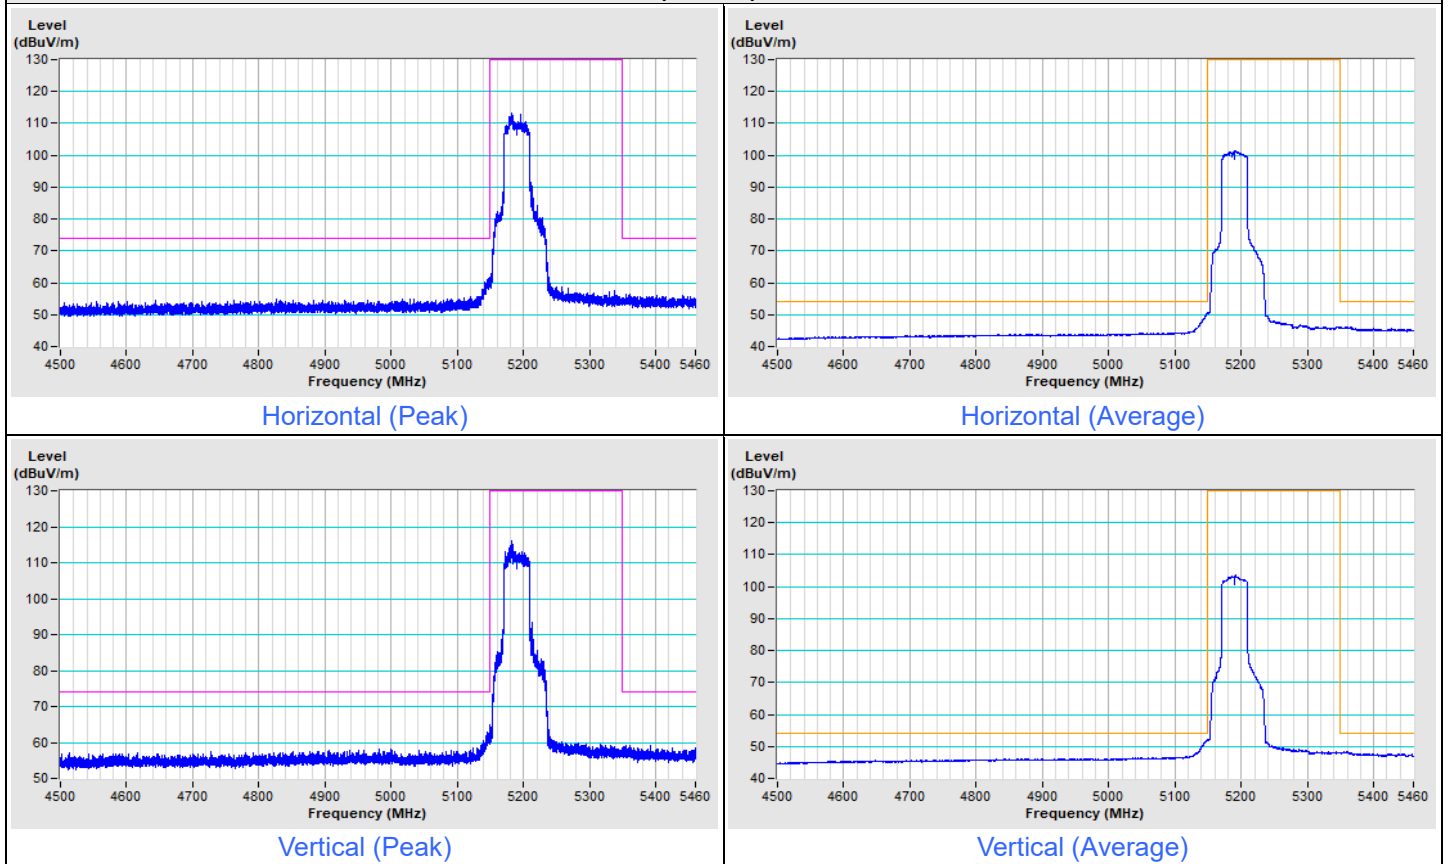


802.11be (EHT40) Channel 46

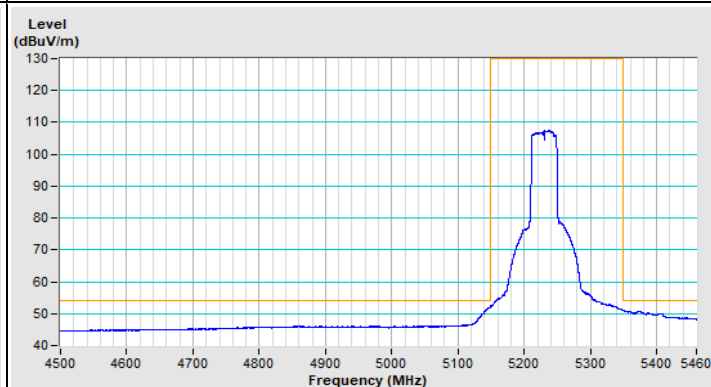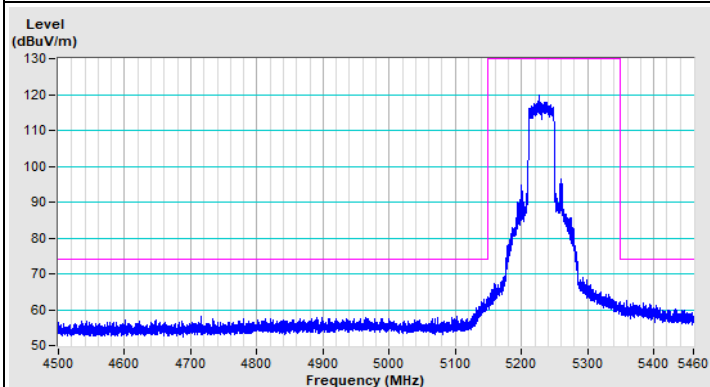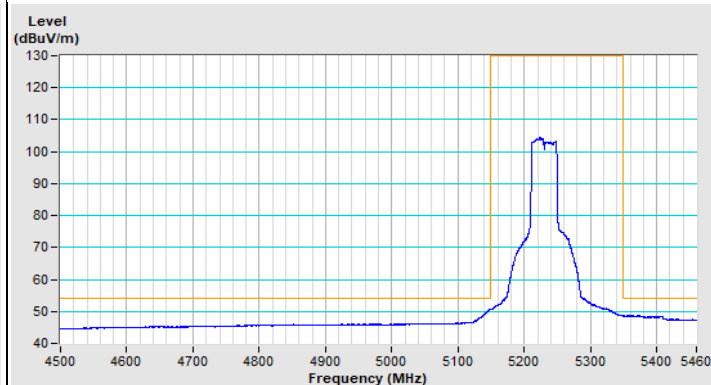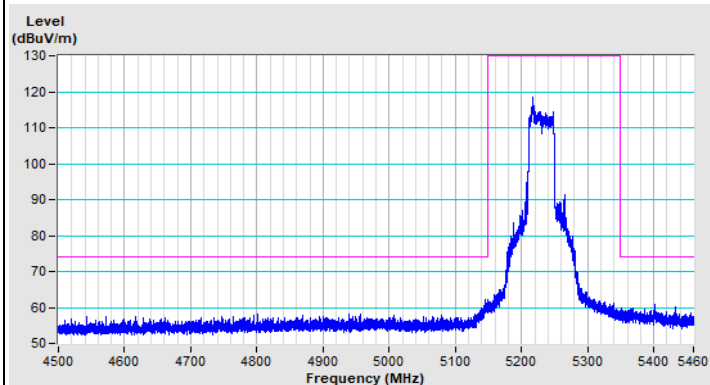


802.11be (EHT40) Channel 54

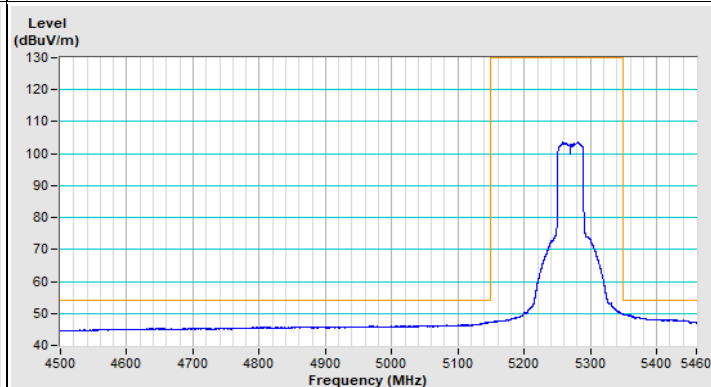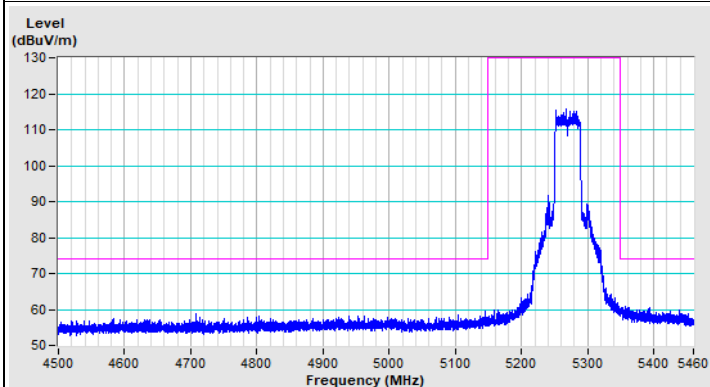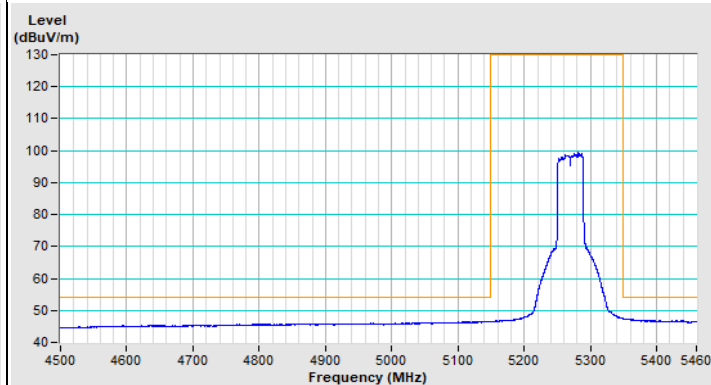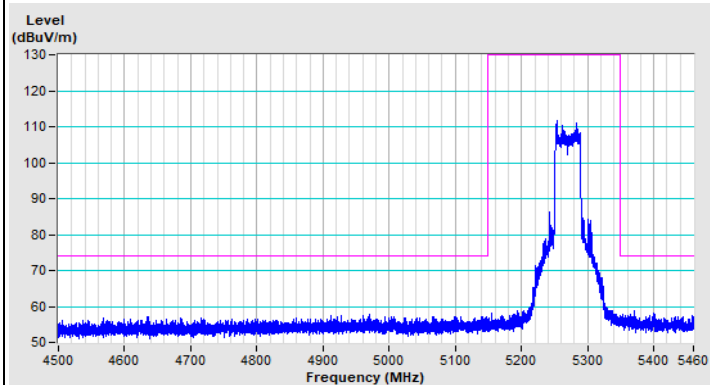


802.11be (EHT40) Channel 62

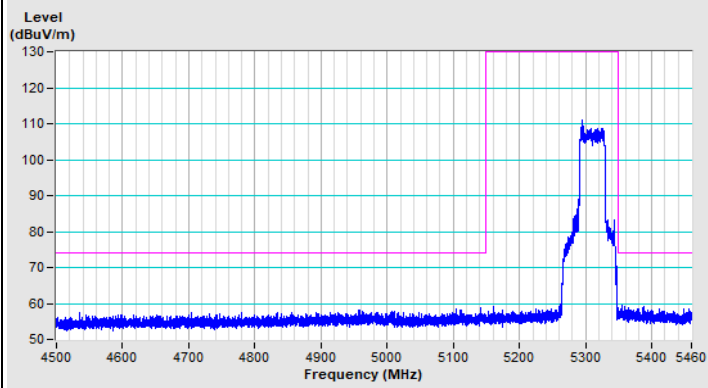


Horizontal (Peak)

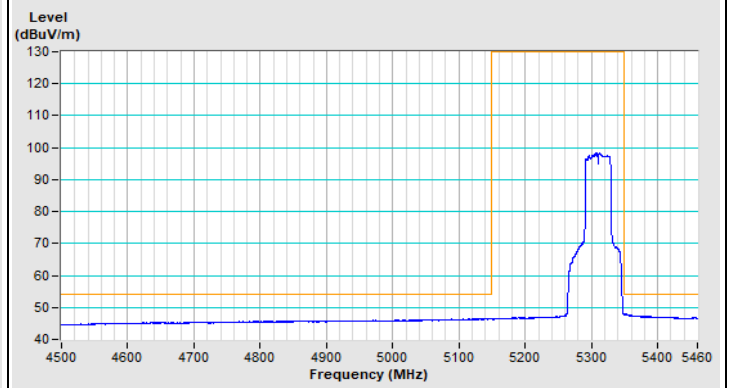

Horizontal (Average)

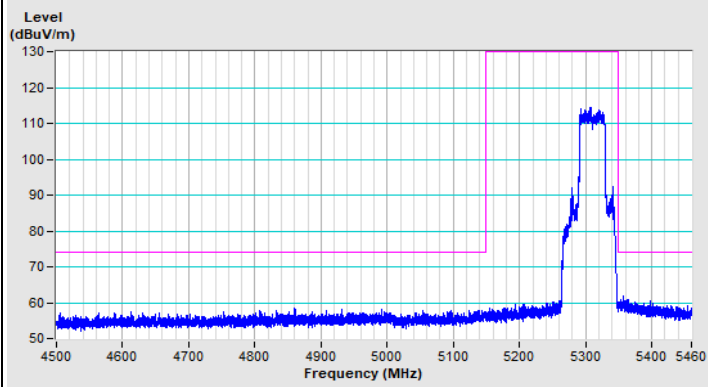


Vertical (Peak)

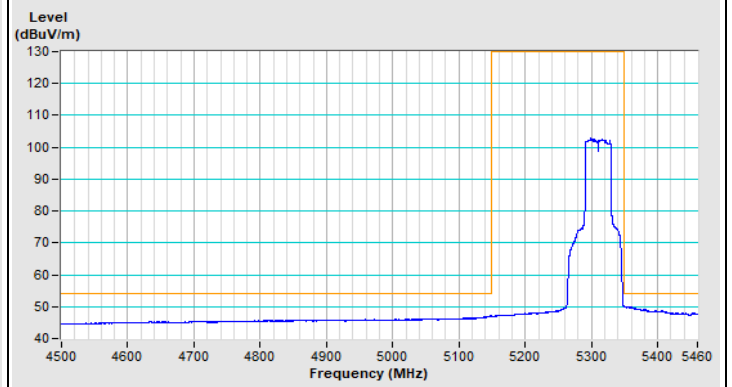


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 102

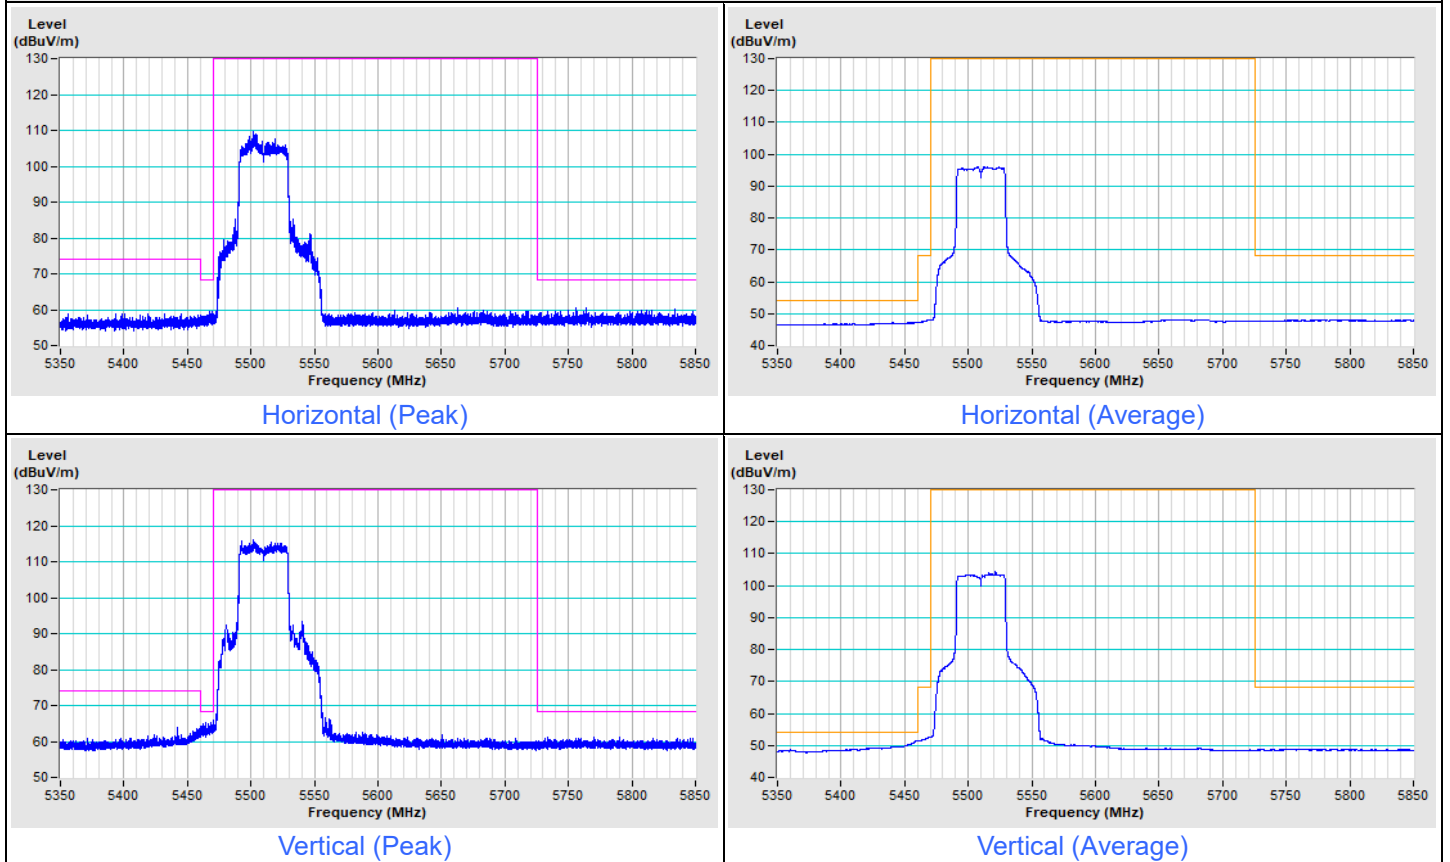


802.11be (EHT40) Channel 134

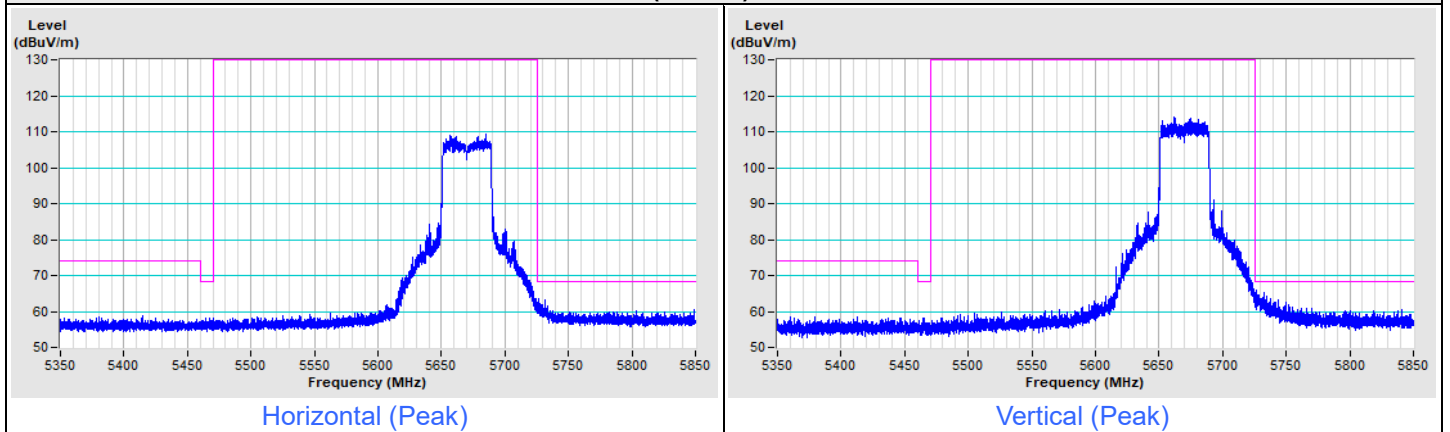


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 142

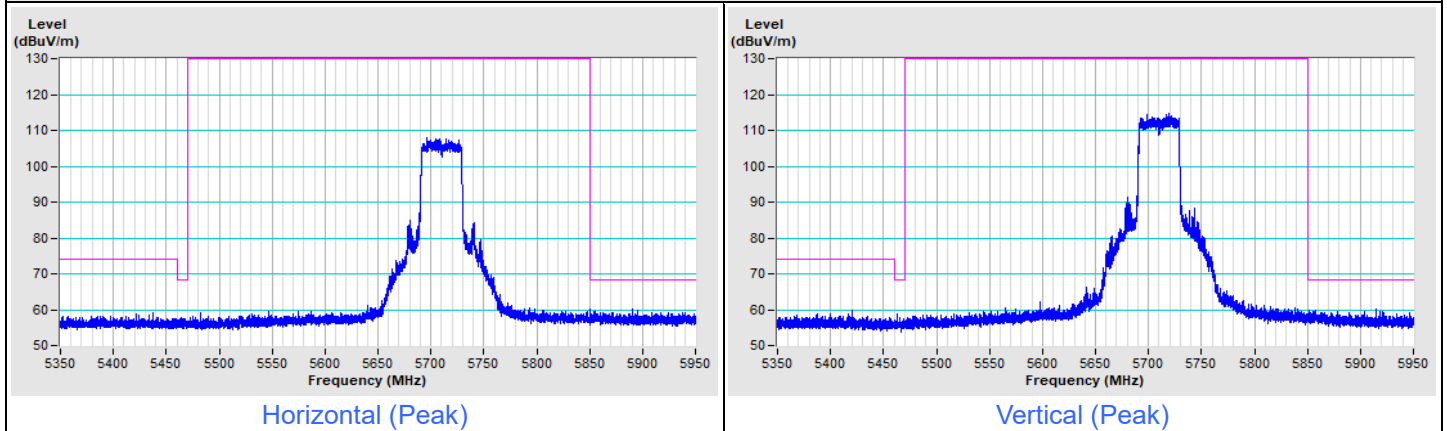


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 151

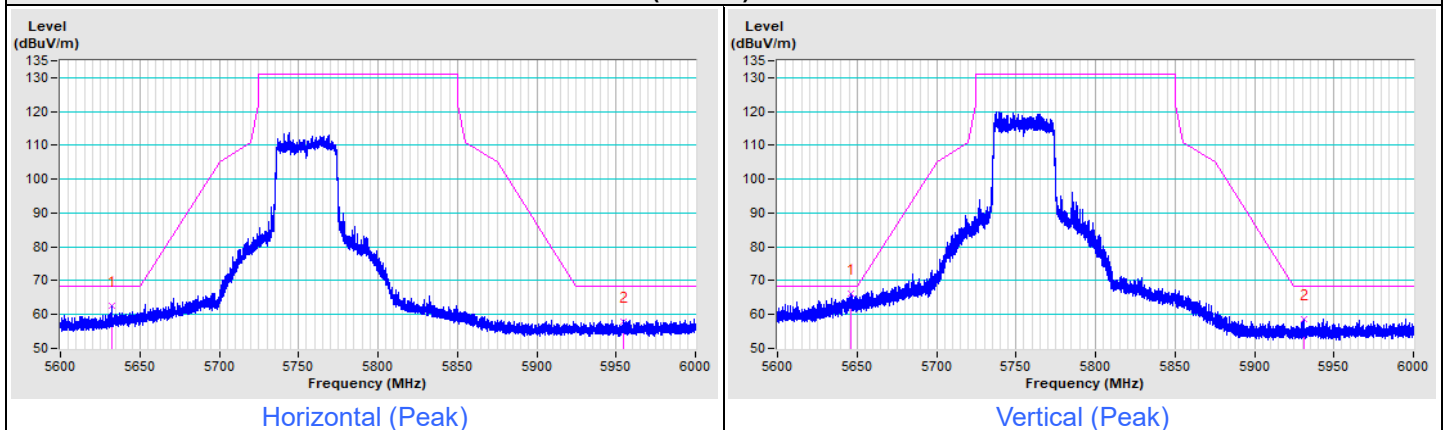


802.11be (EHT40) Channel 159

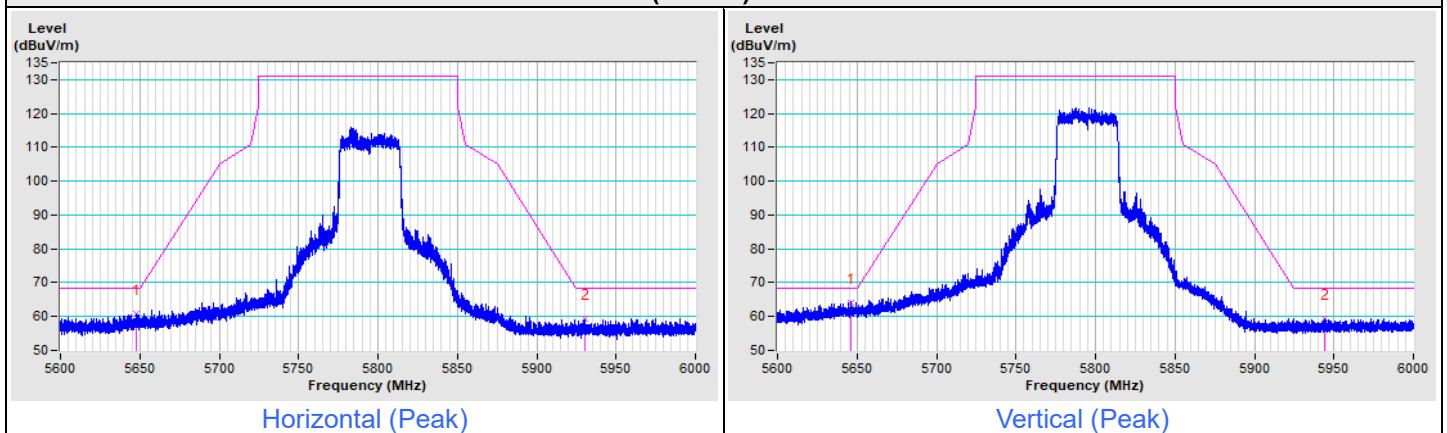


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) Channel 42

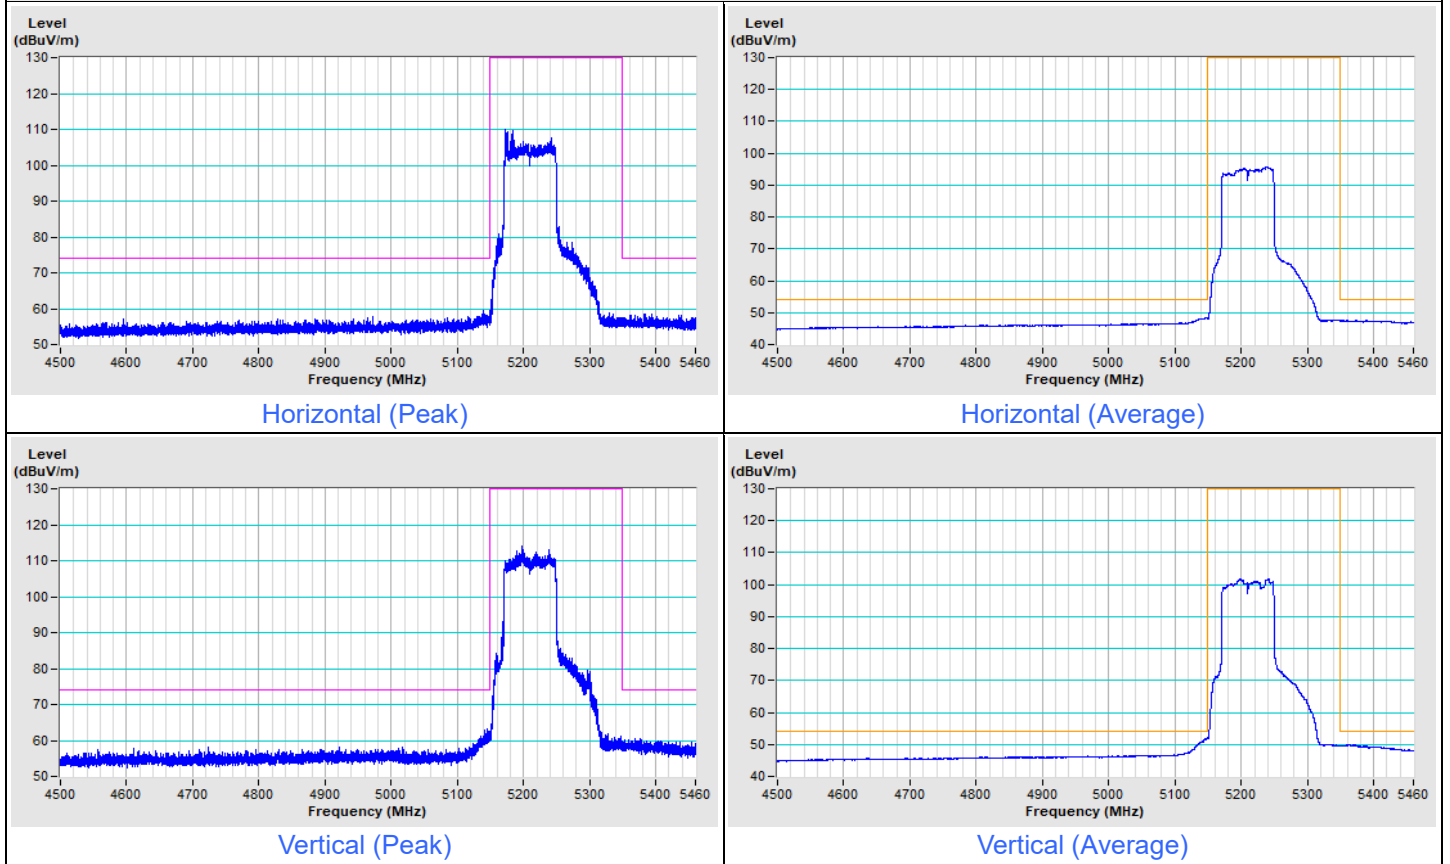


802.11be (EHT80) Channel 58

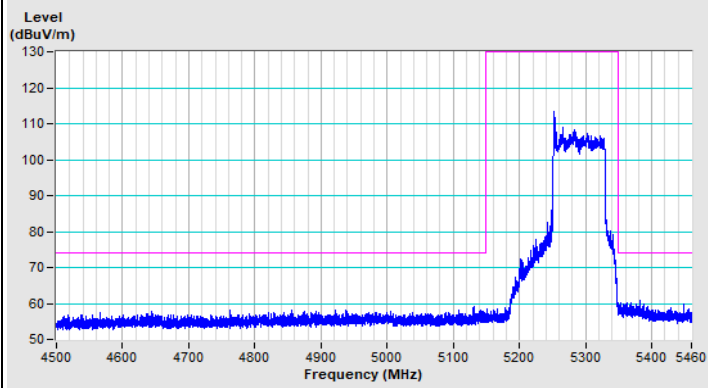


Horizontal (Peak)

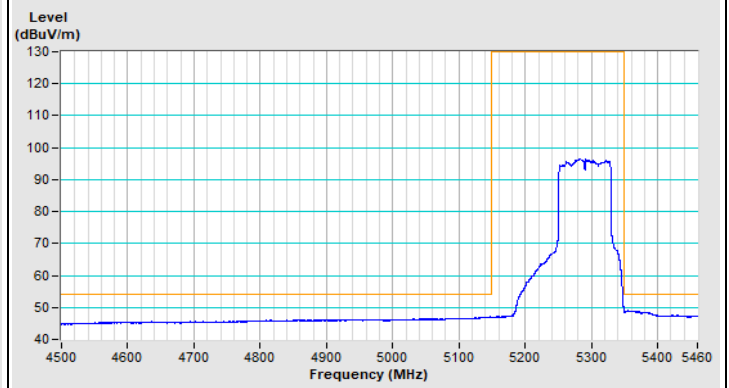

Horizontal (Average)

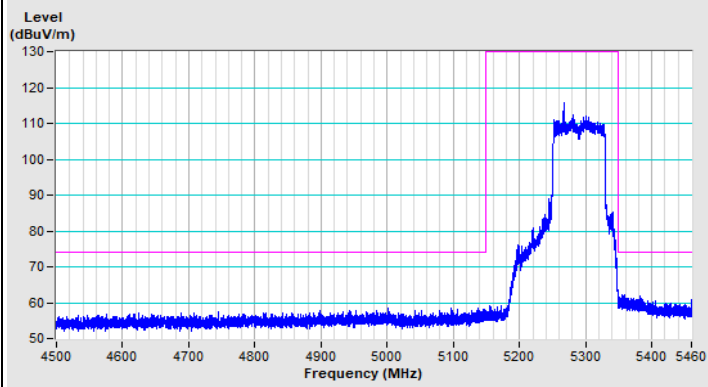


Vertical (Peak)

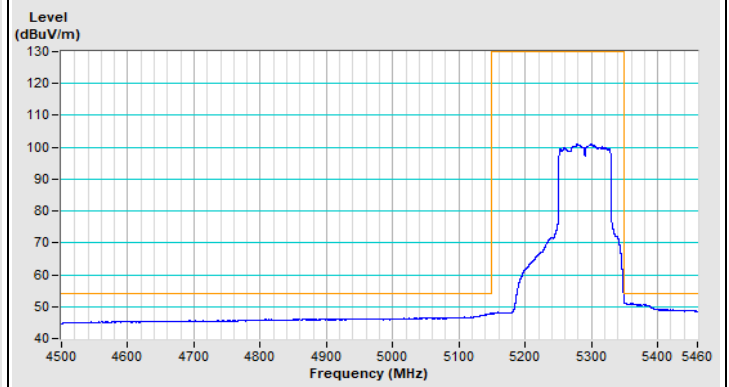


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 106

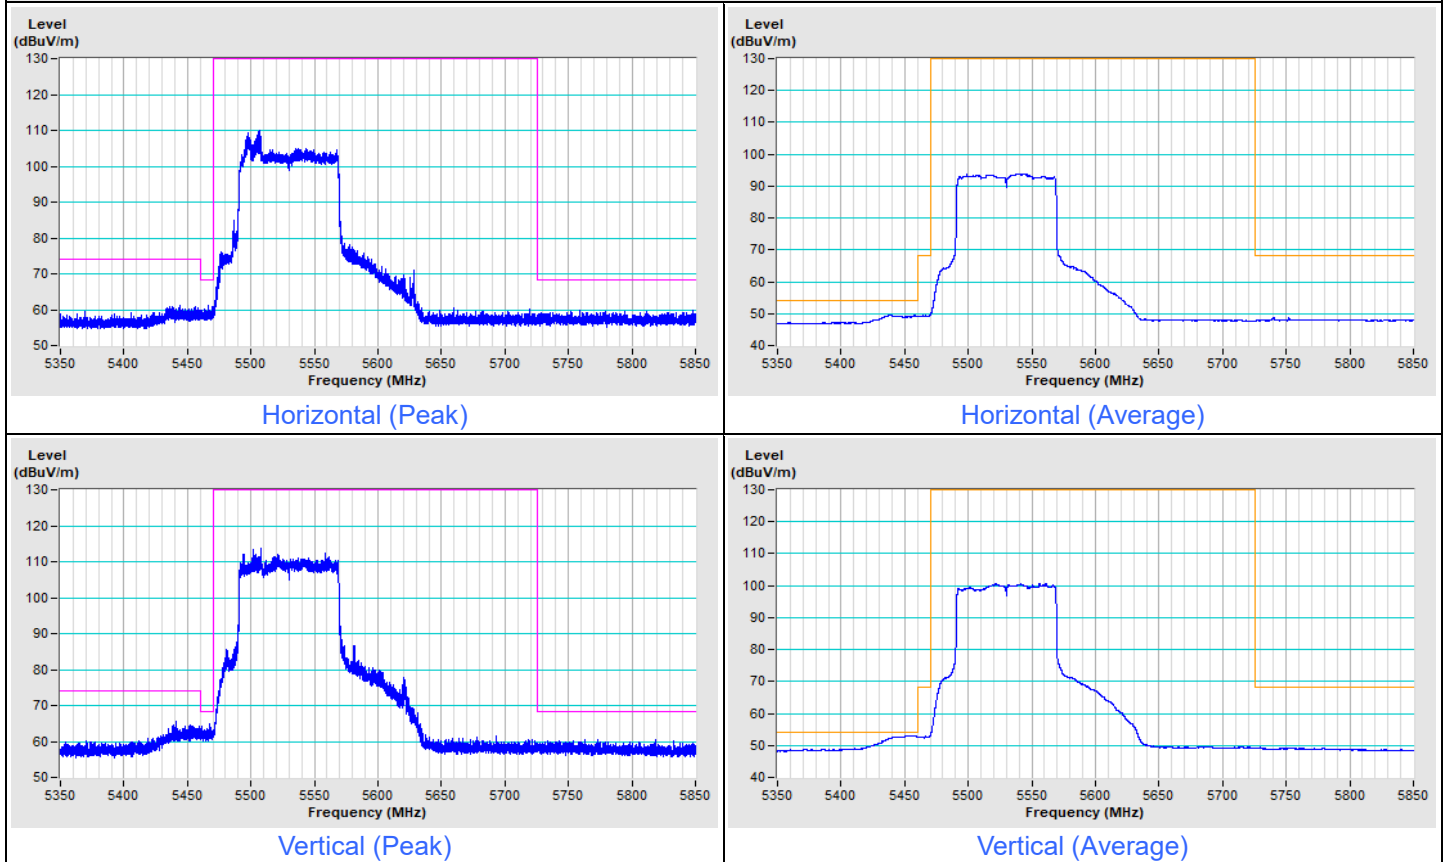


802.11be (EHT80) Channel 122

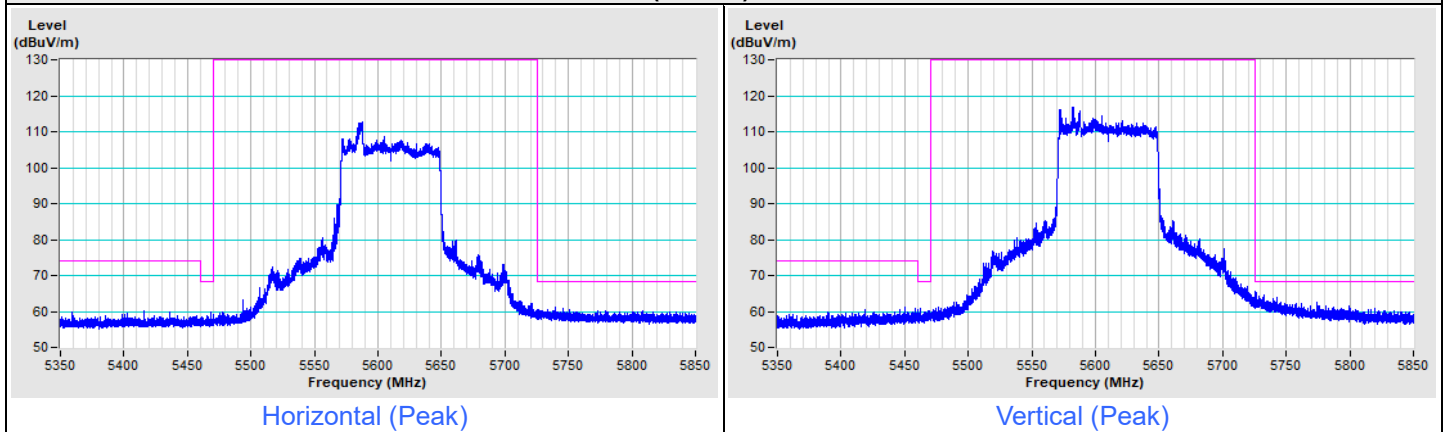


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 138

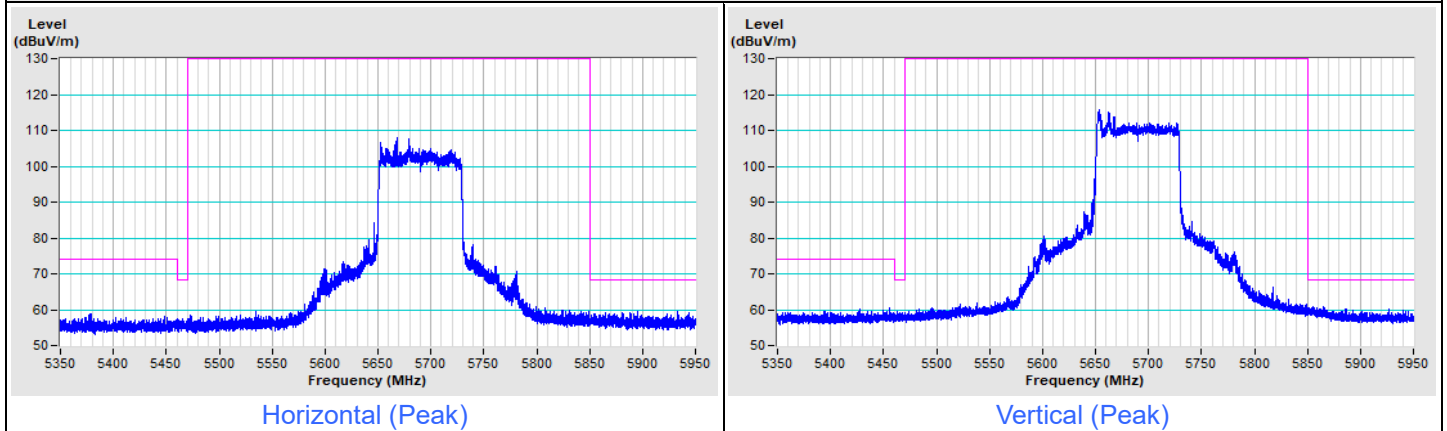


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 155

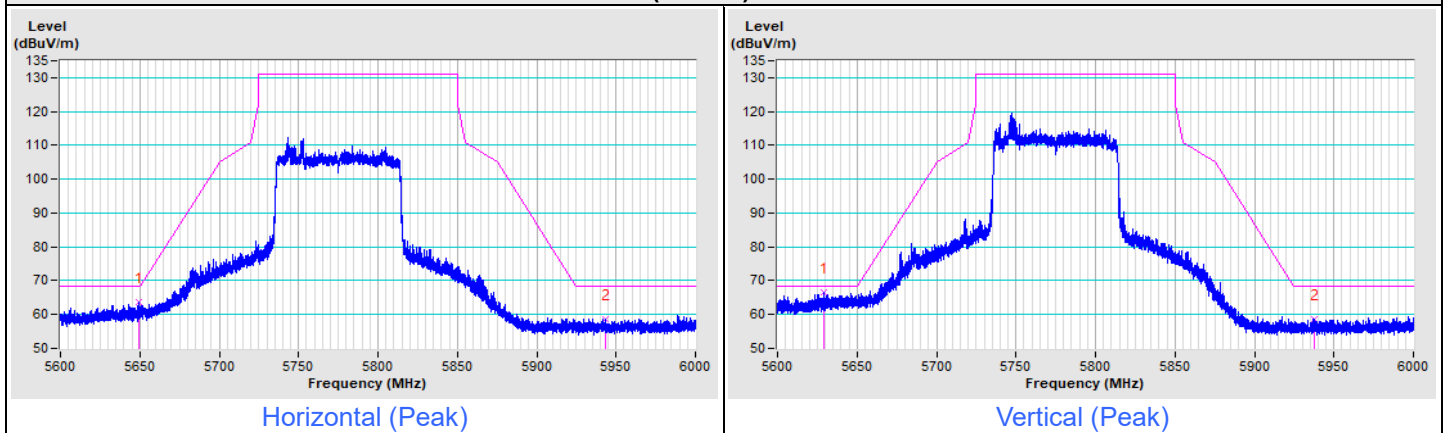


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) Channel 50

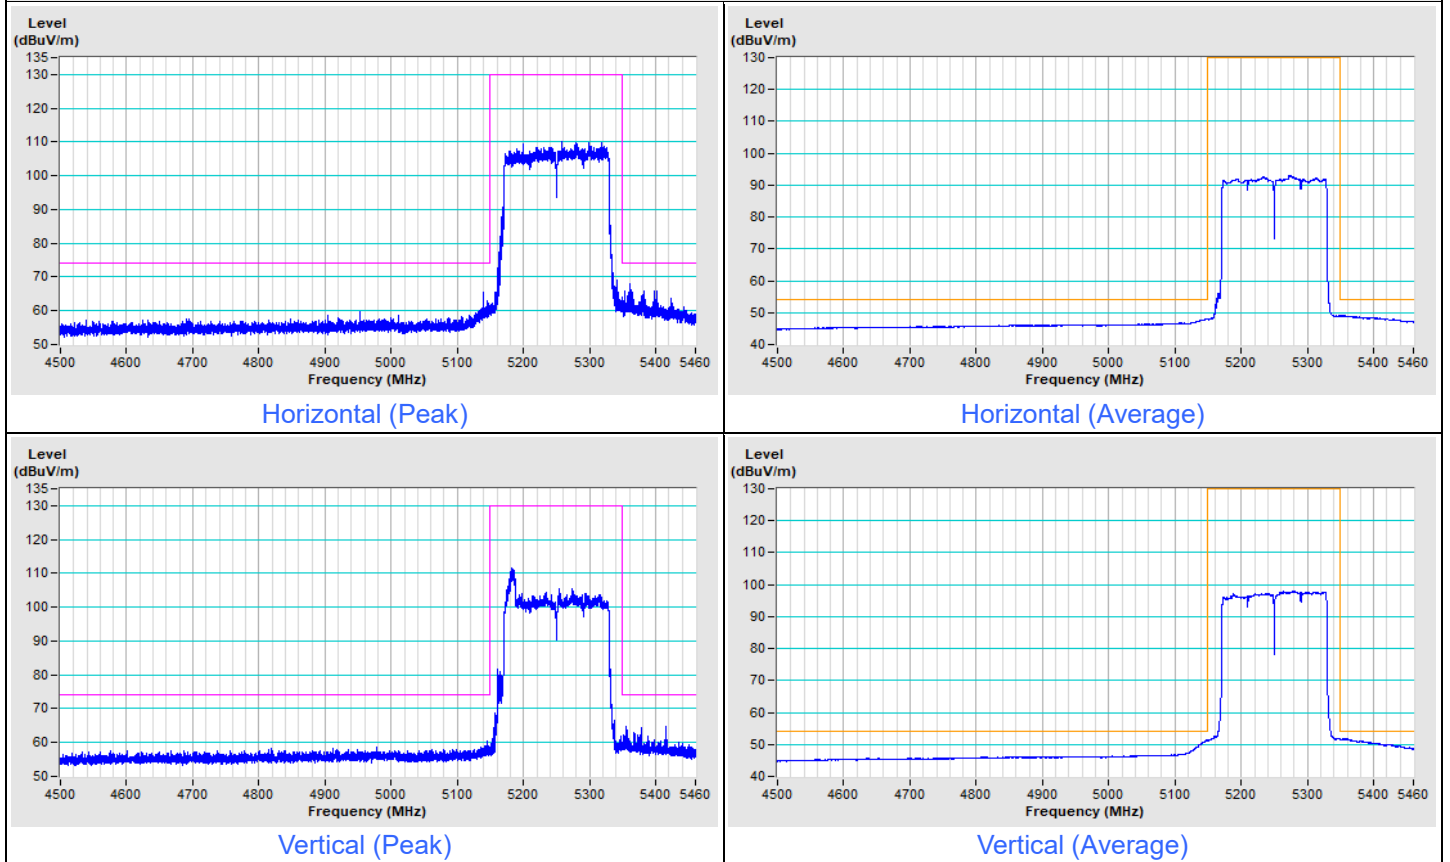

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 114

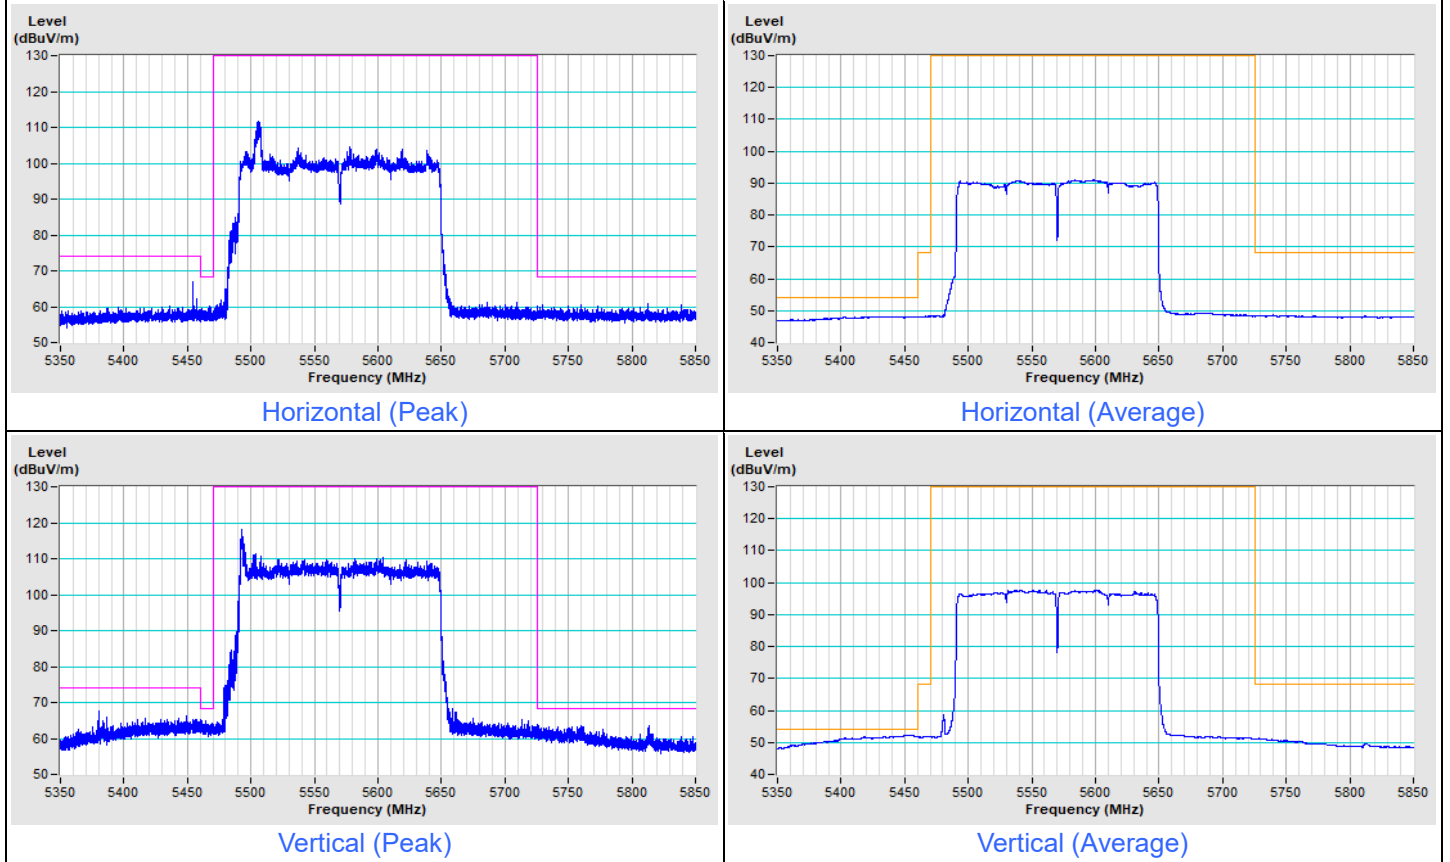

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---