


## ID Label/Location

FCC ID: P2G-RDR-ICL

Drawing and details of FCC label:

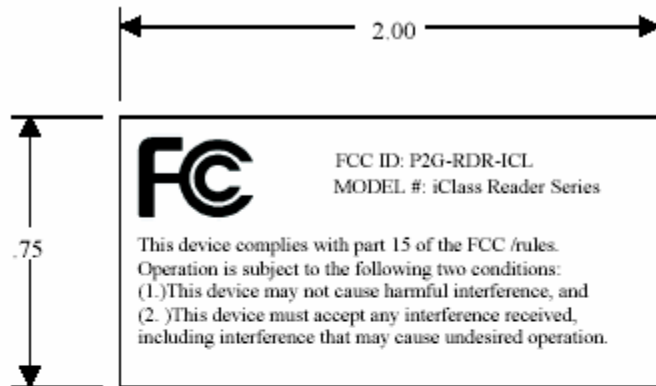

### NOTES:

1. MINIMUM LETTER HEIGHT .047 INCH, UNLESS OTHERWISE SPECIFIED.
2. UNLESS OTHERWISE SPECIFIED, TOLERANCES TO BE:  
0.005 FOR LINEAR DIMENSIONS,  
0.5 FOR ANGULAR DIMENSIONS,  
0.003 FOR HOLE DIAMETER DIMENSIONS.
3. **FACESTOCK:** FASSON U.L. Gloss is a destructible cast-coated high gloss stock.  
Basis Weight: 60# per ream 10%  
(500 sheets 25" X 38")  
Caliper: 0.00340 inches 10%  
Tensile: MD 26# per inch width  
CD 16# per inch width  
Tear: MD 55 grams per sheet  
CD 60 grams per sheet  
Stiffness: MD 125 mg  
C D 65 mg
4. **ADHESIVE:** FASSON A351 adhesive is a clear adhesive featuring good initial tack, high shear and minimum cold flow. Suitable for use on a wide variety of substrates,  
Type: Solvent Acrylic  
Minimum Application  
Temperature: +45 f  
Service Temperature  
Range: -65 F to +200 F
5. **Liner:** 40# SCK is a bleached super-calendered kraft stock featuring high internal strength, toughness and tear resistance. Used primarily for roll-to-roll label applications  
Basis Weight: 41# per ream 10%  
(500 sheets 25" x 36")  
Caliper: 0.0025 inches 10%  
Tensile: MD 35# per inch width  
CD 16# per inch width  
Tear: MD 35 grams  
C D 45 grams
6. Total Construction Caliper: 0.0071 inches 10%
7. Shelf Life: One year when stored at 72 F at 50% RH

Location of label on EUT:

