




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/21/2005 10:05:19 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify G550	Relative Permittivity:	39.70
Relative Humidity:	50%	Conductivity:	1.399
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.00 mm
DUT Position:	Left touch	Max SAR Z-axis Location:	-130.40 mm
Antenna Configuration:	integral	Max E Field:	25.14 V/m
Test Frequency:	1880MHz	SAR 1g:	0.768 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.460 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.299 W/kg
Type of Modulation:		SAR End:	0.302 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.04 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

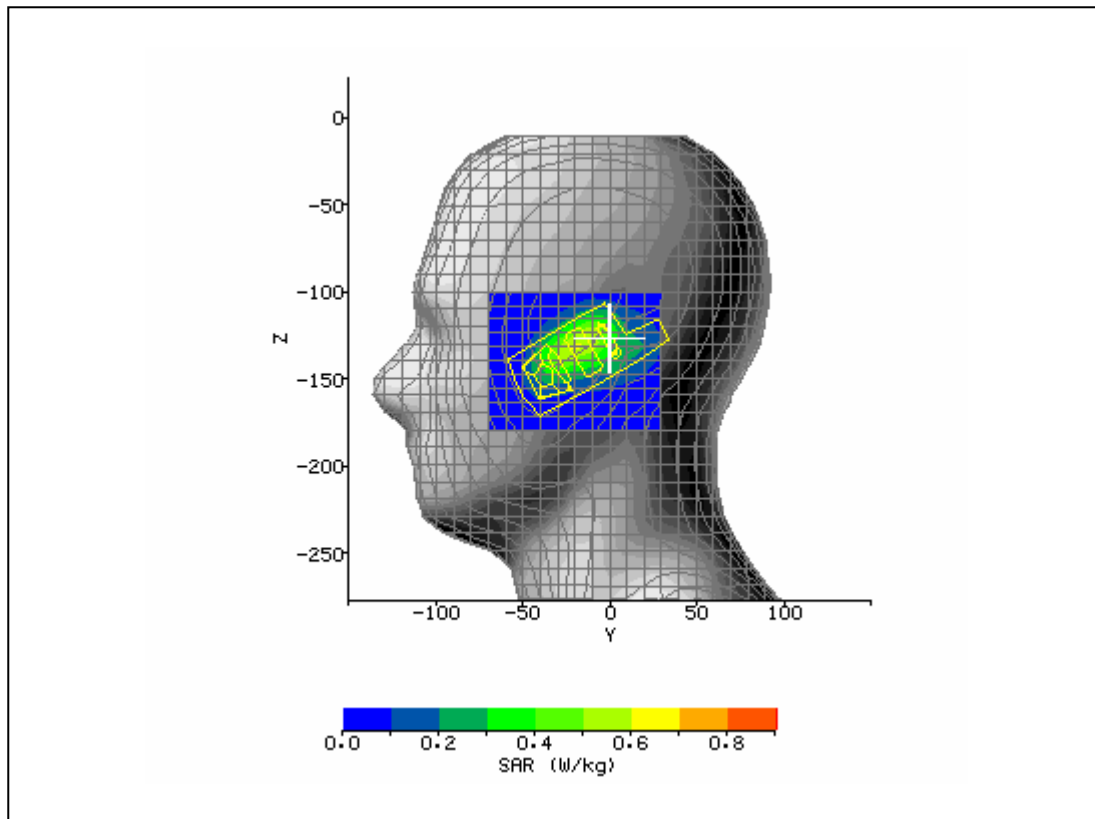


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/21/2005 10:38:18 AM	DUT Battery Model/No:	
Filename:	lefttch661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify G550	Relative Permittivity:	39.70
Relative Humidity:	50%	Conductivity:	1.399
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-5.00 mm
DUT Position:	Left tilt	Max SAR Z-axis Location:	-126.40 mm
Antenna Configuration:	integral	Max E Field:	24.49 V/m
Test Frequency:	1880MHz	SAR 1g:	0.741 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.431 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.289 W/kg
Type of Modulation:		SAR End:	0.289 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

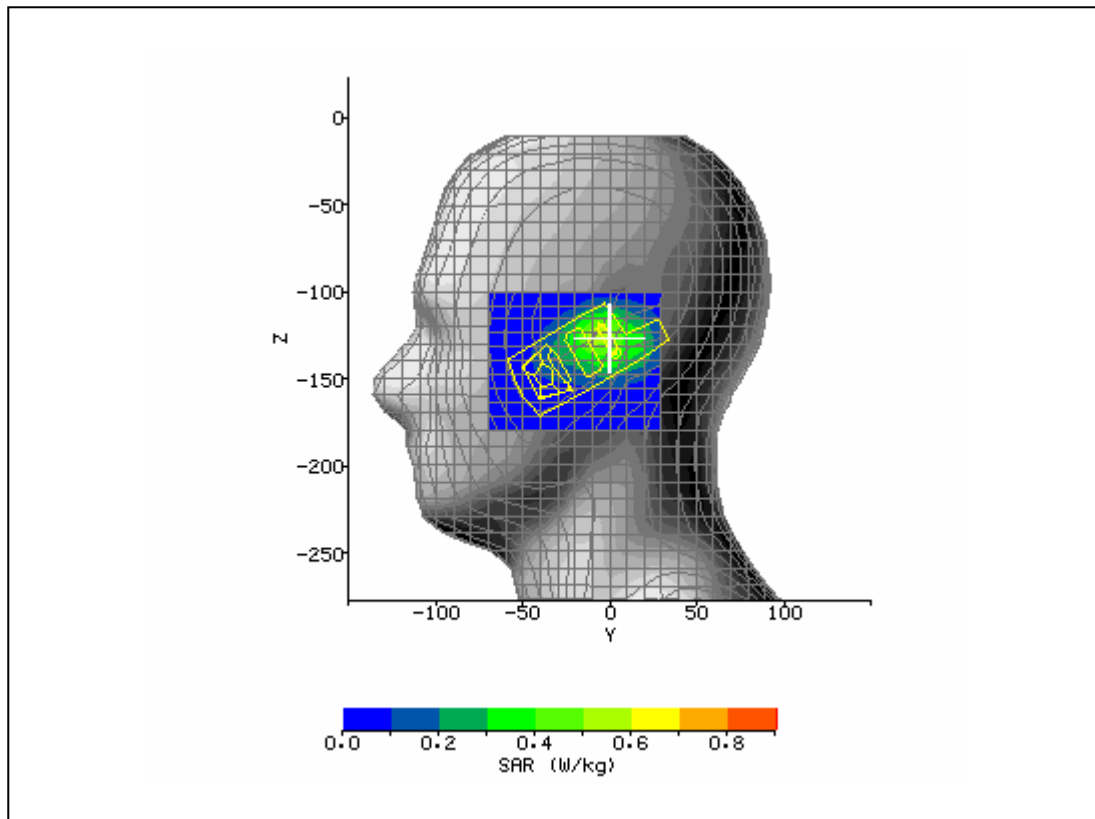


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/14/2005 3:35:51 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify G550	Relative Permittivity:	39.70
Relative Humidity:	50%	Conductivity:	1.399
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	2.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-112.80 mm
Antenna Configuration:	integral	Max E Field:	25.02 V/m
Test Frequency:	1880MHz	SAR 1g:	0.636 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.334 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.162 W/kg
Type of Modulation:		SAR End:	0.164 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.07 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

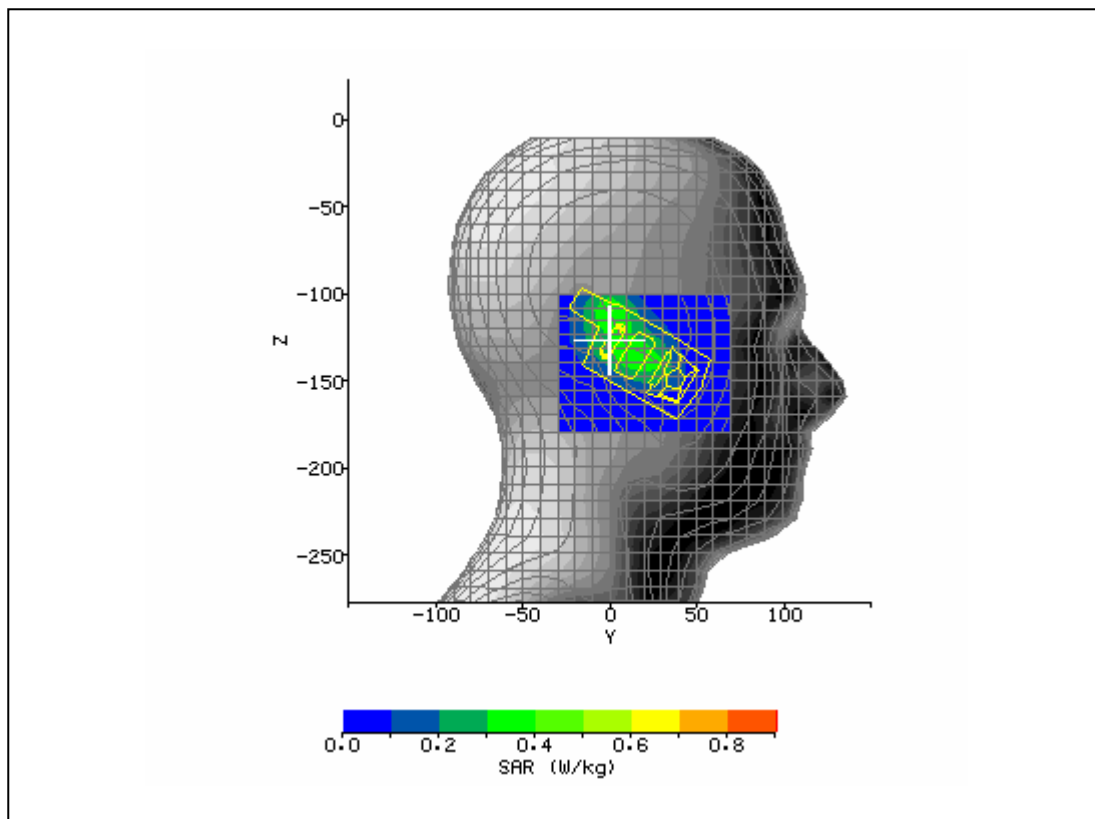


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/14/2005 5:02:53 PM	DUT Battery Model/No:	
Filename:	righttlt661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify G550	Relative Permittivity:	39.70
Relative Humidity:	50%	Conductivity:	1.399
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	8.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-112.00 mm
Antenna Configuration:	integral	Max E Field:	32.16 V/m
Test Frequency:	1880MHz	SAR 1g:	1.271 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.612 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.338 W/kg
Type of Modulation:		SAR End:	0.341 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.04 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

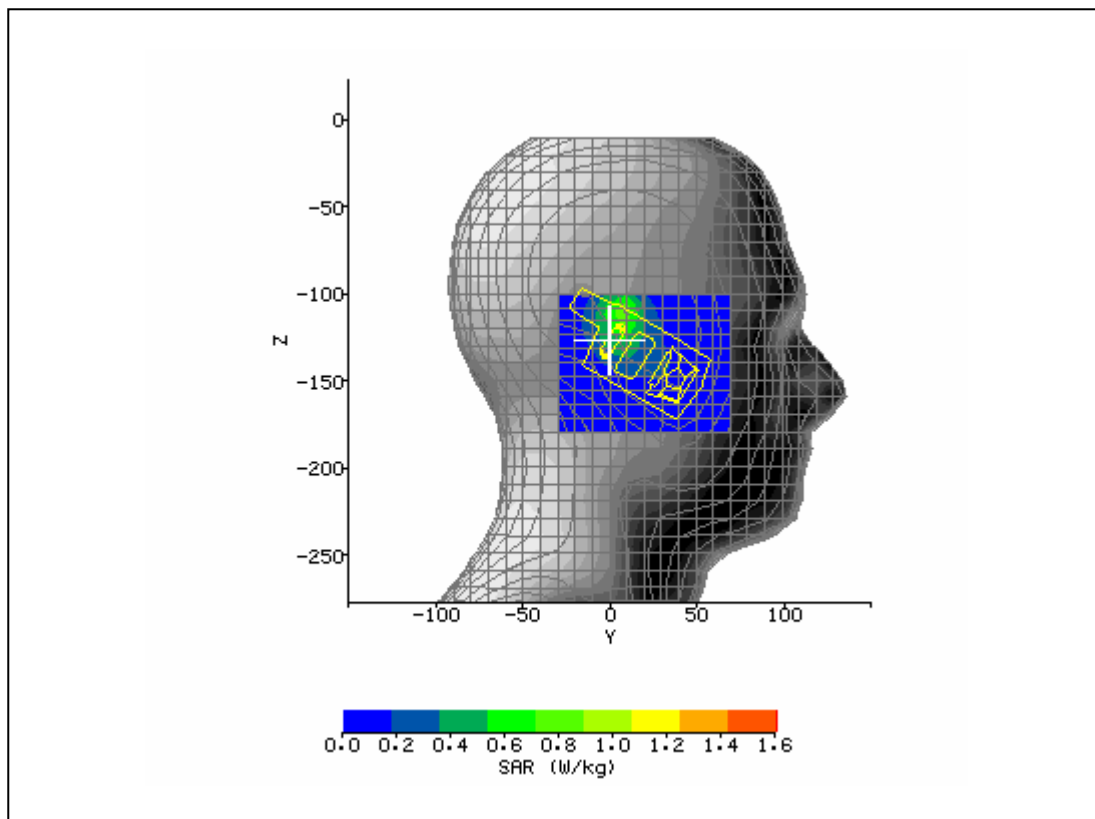


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/21/2005 11:10:45 AM	DUT Battery Model/No:	
Filename:	lefttl661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify G550	Relative Permittivity:	39.86
Relative Humidity:	50%	Conductivity:	1.382
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	7.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-114.40 mm
Antenna Configuration:	integral	Max E Field:	27.10 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.780 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.398 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.213 W/kg
Type of Modulation:		SAR End:	0.213 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

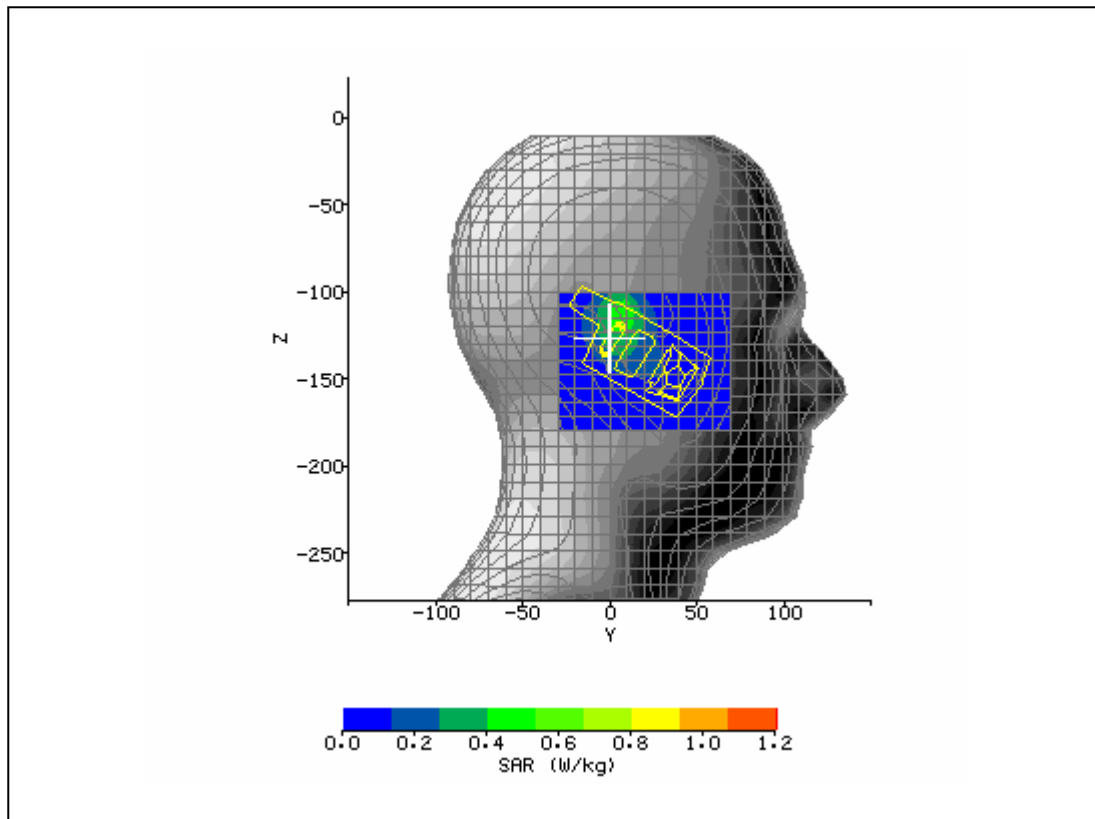


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/21/2005 11:40:18 AM	DUT Battery Model/No:	
Filename:	righttlt512_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify G550	Relative Permittivity:	39.60
Relative Humidity:	50%	Conductivity:	1.430
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	7.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-114.40 mm
Antenna Configuration:	integral	Max E Field:	36.61 V/m
Test Frequency:	1909.8MHz	SAR 1g:	1.481 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.759 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.407 W/kg
Type of Modulation:		SAR End:	0.407 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

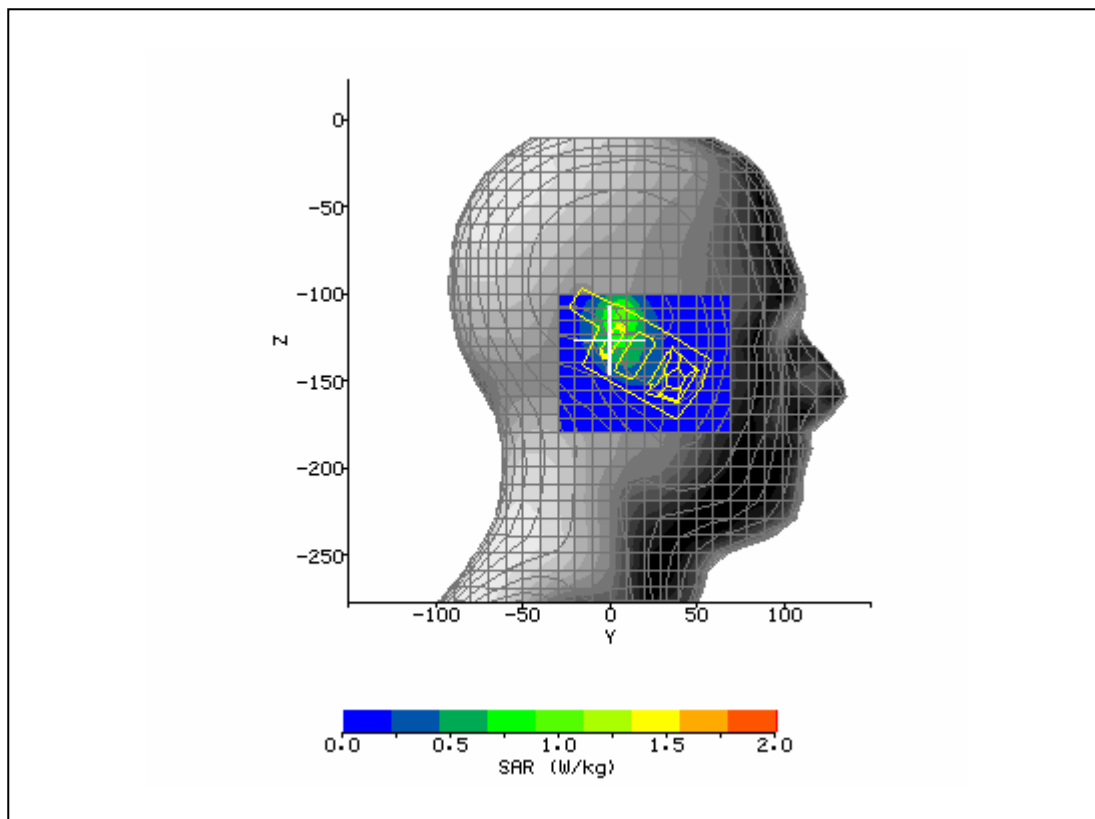

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/22/2005 3:54:50 PM	DUT Battery Model/No:	
Filename:	righttlt885_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify G550	Relative Permittivity:	53.11
Relative Humidity:	50%	Conductivity:	1.576
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	15.00 mm
DUT Position:	body 1.5 cm	Max SAR Z-axis Location:	-137.60 mm
Antenna Configuration:	integral	Max E Field:	10.14 V/m
Test Frequency:	1880MHz	SAR 1g:	0.139 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.086 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.042 W/kg
Type of Modulation:		SAR End:	0.041 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.08 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

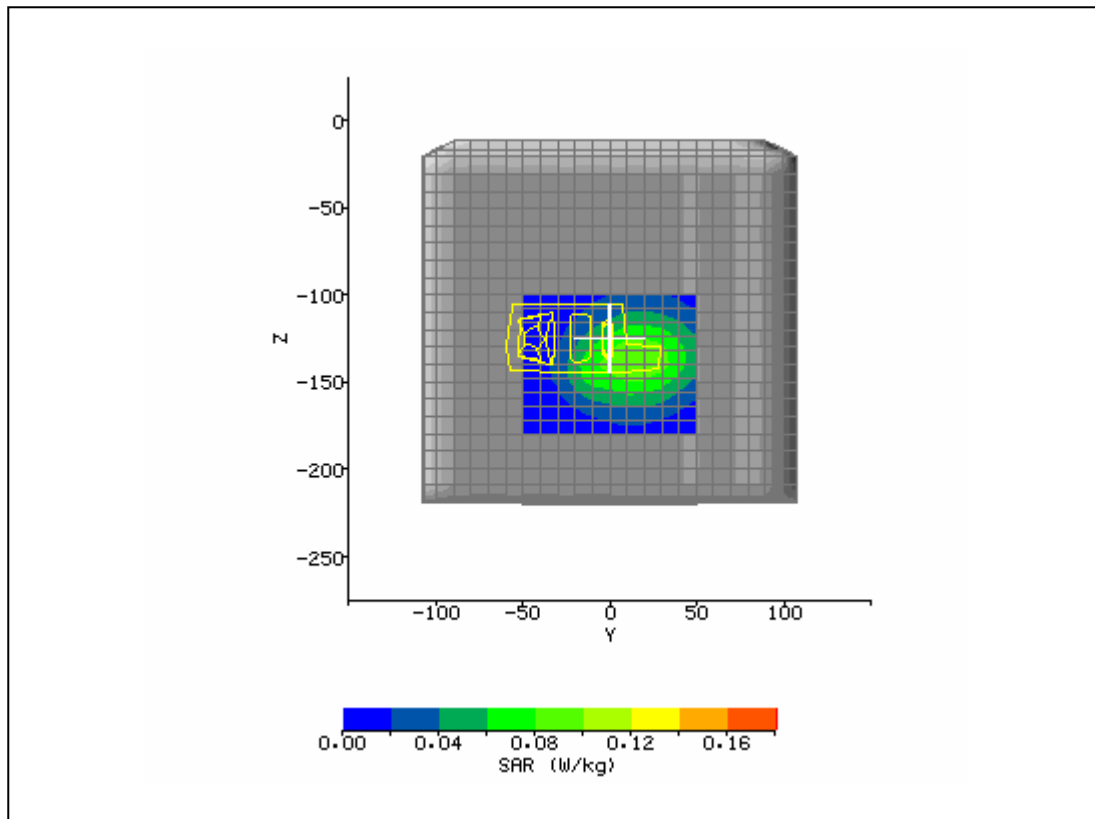

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/22/2005 4:25:20 PM	DUT Battery Model/No:	
Filename:	661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify G550	Relative Permittivity:	53.31
Relative Humidity:	50%	Conductivity:	1.559
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	16.00 mm
DUT Position:	body 1.5 cm	Max SAR Z-axis Location:	-136.80 mm
Antenna Configuration:	integral	Max E Field:	8.03 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.085 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.053 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.025 W/kg
Type of Modulation:		SAR End:	0.024 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.04 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

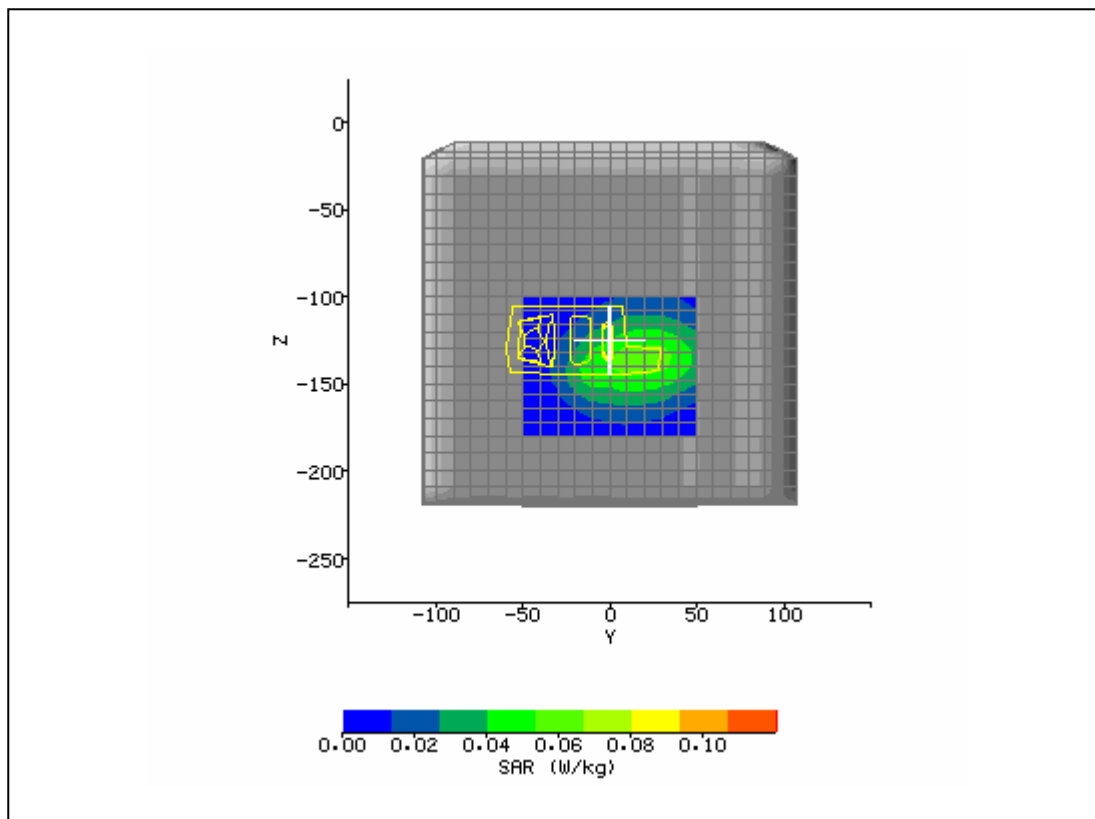

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/22/2005 4:56:22 PM	DUT Battery Model/No:	
Filename:	512_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify G550	Relative Permittivity:	53.01
Relative Humidity:	50%	Conductivity:	1.581
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	18.00 mm
DUT Position:	body 1.5 cm	Max SAR Z-axis Location:	-136.00 mm
Antenna Configuration:	integral	Max E Field:	12.15 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.197 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.122 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.060 W/kg
Type of Modulation:		SAR End:	0.060 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

