

**CETECOM Inc.**



**CETECOM Inc.**

411 Dixon Landing Road, Milpitas, CA-95035, USA  
Phone: +1 408 586 6200 Fax: +1 408 586 6299  
www.cetecom.com

---

Issued test report consists of 50 Pages

Page 1 (50)

---

<p><b>FCC LISTED, REG. NO.: 101450</b> <b>&amp;</b> <b>RECOGNIZED BY INDUSTRY CANADA</b> <b>IC – 3925</b></p>
---

**Test report no.:191FCC/2001**  
**FCC Part 15.247**  
**(B090H2)**

**Table of Contents****1 General information****1.1 Notes****1.2 Testing laboratory****1.3 Details of applicant****1.4 Application details****1.5 Test item****1.6 Test standards****2 Technical test****2.1 Summary of test results****2.2 Test report****1 General information****1.1 Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

**TEST REPORT PREPARED BY:****EMC & Radio Engineer: Harpreet Sidhu****1.2 Testing laboratory****CETECOM Inc.**

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: [lothar.schmidt@cetecomusa.com](mailto:lothar.schmidt@cetecomusa.com)Internet: [www.cetecom.com](http://www.cetecom.com)

**1.3 Details of applicant**

**Name** : Uniwill Computer Corp.  
**Street** : 14F, No. 67, Sec-1, Ching Shan Rd., Hsiy Chang City  
**City** : Taipei  
**Country** : Taiwan  
**Contact** : Tony Kuan  
**Telephone** : +886 2 852 16 888 Ext.-357  
**Telefax** : +886 2 852 15 666  
**e-mail** : [tony\\_kuan@uniwill.com.tw](mailto:tony_kuan@uniwill.com.tw)

**1.4 Application details**

**Date of receipt of application** : 2001-09-10  
**Date of receipt of test item** : 2001-09-21  
**Date of test** : 2001-09-28, 2001-10-01/05

**1.5 Test item**

**Manufacturer** : Applicant  
**Name of EUT** : B090H2 USB Dongle  
**Description** : [Class-2 BT Module](#)  
**Model No.** : B090H2  
**Serial No.** : N/A  
**FCC ID** :

**Additional informations**

**Frequency** : 2.402 – 2.480 GHz  
**Type of modulation** : FHSS  
**Number of channels** : 79  
**Antenna** : External  
**Power supply** : Via USB  
**Output power** : 0 dBm  
**Extreme Vol. Limits** :  
**Extreme Temp. Limits** : 0°C - +35°C

**1.6 Test standards: FCC Part 15 §15.247**

**2 Technical test****2.1 Summary of test results**

**No deviations from the technical specification(s) were ascertained in the course of the tests performed.**

**Technical responsibility for area of testing :**

**2001-11-01****EMC & Radio****Lothar Schmidt**

---

**Date****Section****Name****Signature**

## **2.2 Testreport**

### **TEST REPORT**

**Test report no. : 191FCC/2001  
(B090H2)**

**TEST REPORT REFERENCE****LIST OF MEASUREMENTS**

<b>Paragraph</b>	<b>PARAMETER TO BE MEASURED</b>	<b>PAGE</b>
	<b>Transmitter parameters</b>	
§ 15.204	Antenna gain	7
§ 15.247 (a)	Carrier frequency separation	8
§ 15.247 (a)	Number of hopping channels	9
§ 15.247 (a)	Time of occupancy (dwell time)	13
§ 15.247 (a)(1)	Spectrum Bandwidth of a FHSS System	16
§ 15.247 (b)(2)	Maximum peak output power	20
§15.247	Band edge compliance	28
§ 15.247 (c)(1)	Emission limitations	30
§ 15.107/207	AC Line Conducted Emission	43
	<b>Receiver parameters</b>	
§ 15.209	Spurious radiations - Radiated	45
	Test equipment listing	50

**Antenna Gain**


**SUBCLAUSE § 15.204**

**The max gain is +4.45dBi**

**(measured effective radiated power – measured conducted power with a temporary RF-connector)**

CARRIER FREQUENCY SEPERATION

§15.247(a)

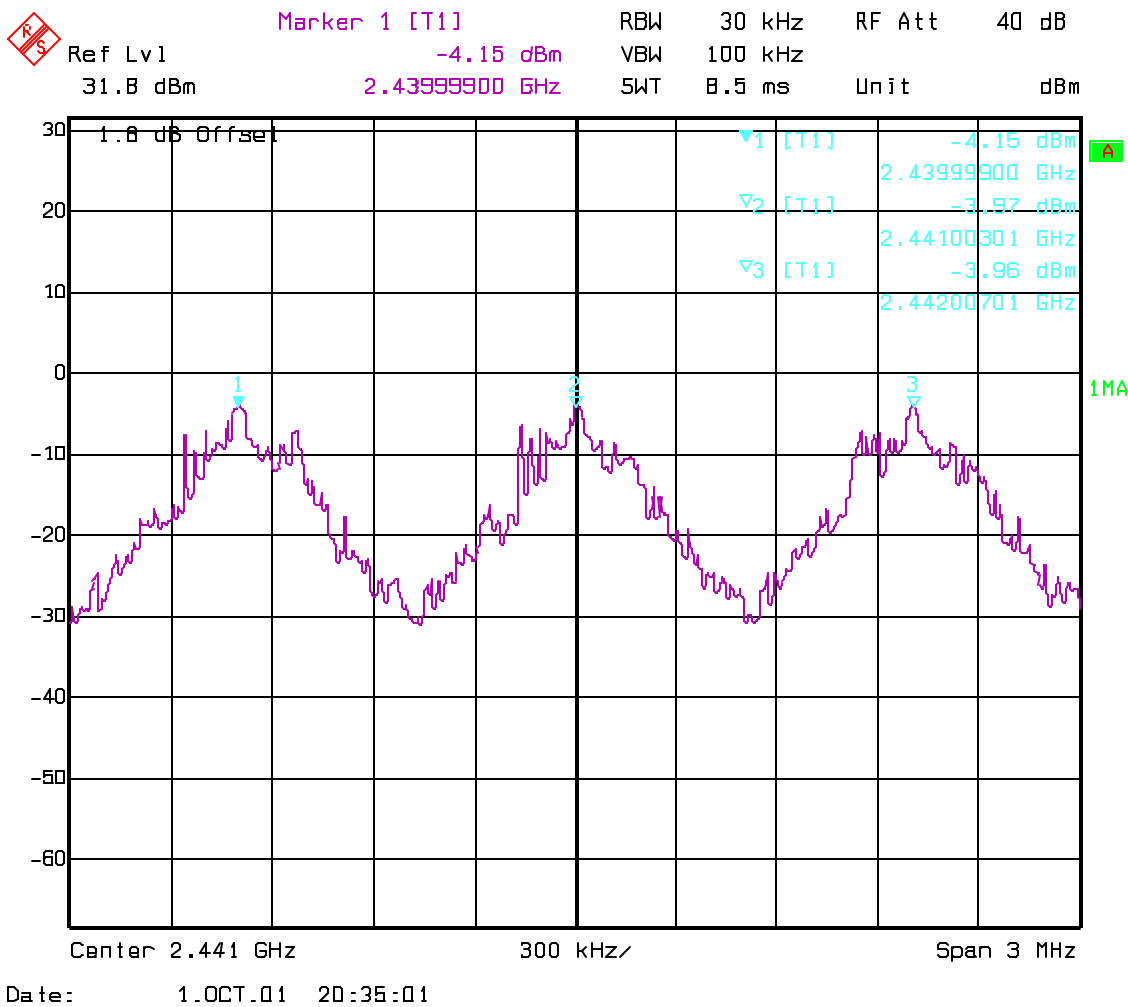



**§15.247(a)**

**The right red line corresponds to the left red line from the next plot.**

Ref Lvl 21.8 dBm

Marker 2 [T1] -3.52 dBm

2.42404810 GHz

RBW 300 kHz

VBW 300 kHz

SWT 5 ms

RF Att 30 dB

Unit dBm


1.8 dB Offset

Start 2.4 GHz


2.5 MHz

Stop 2.425 GHz


Date: 1.OCT.01 23:14:29

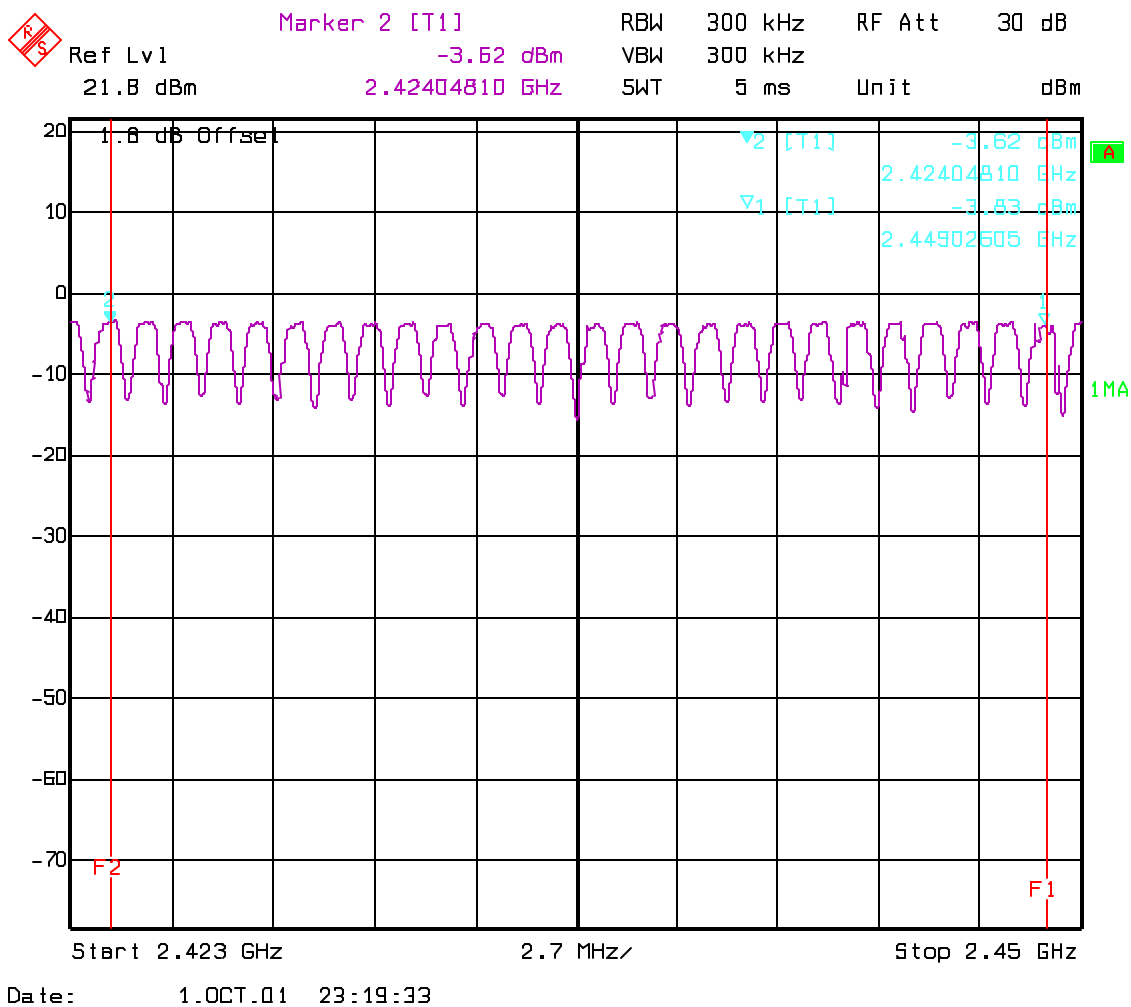

Plot 3: Total 19

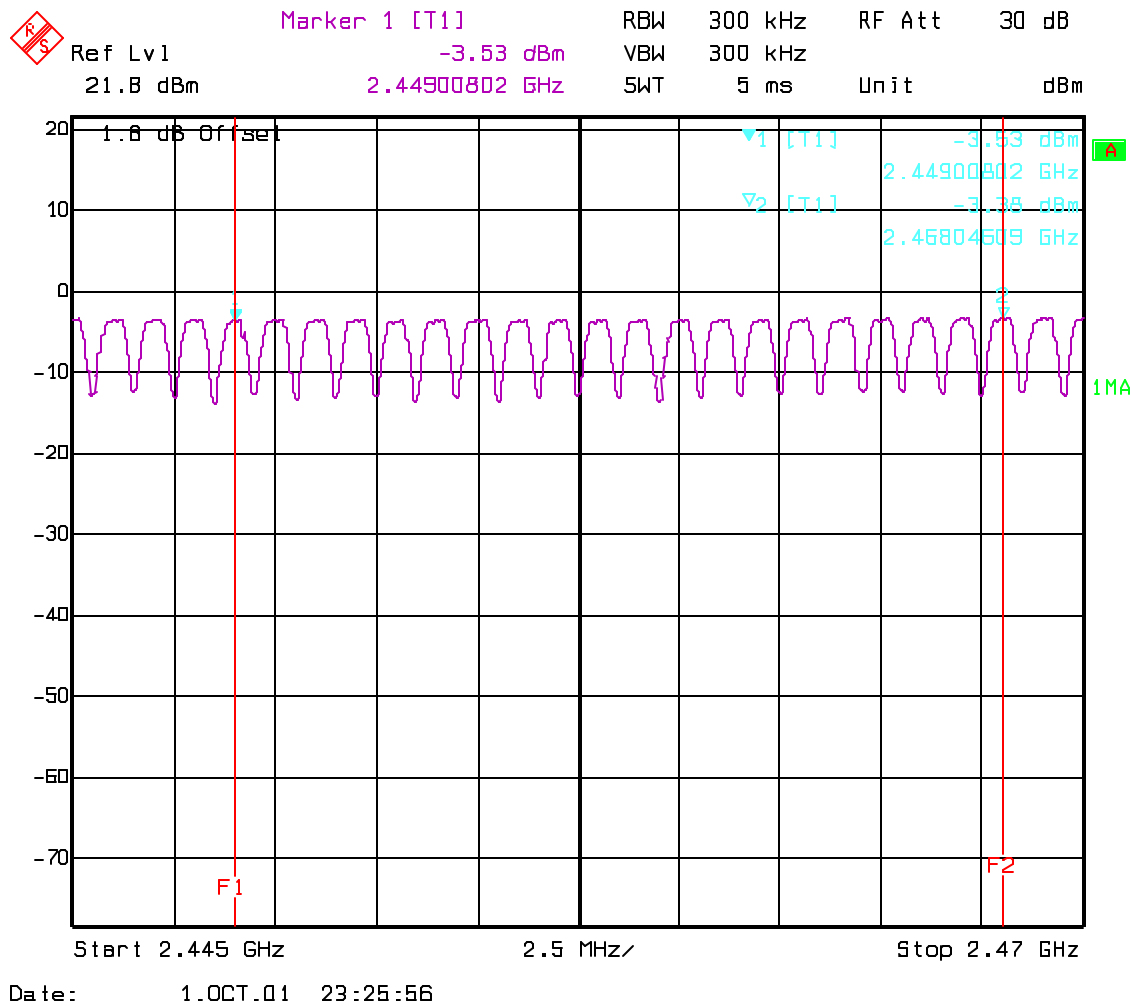

Plot 4: Total 12

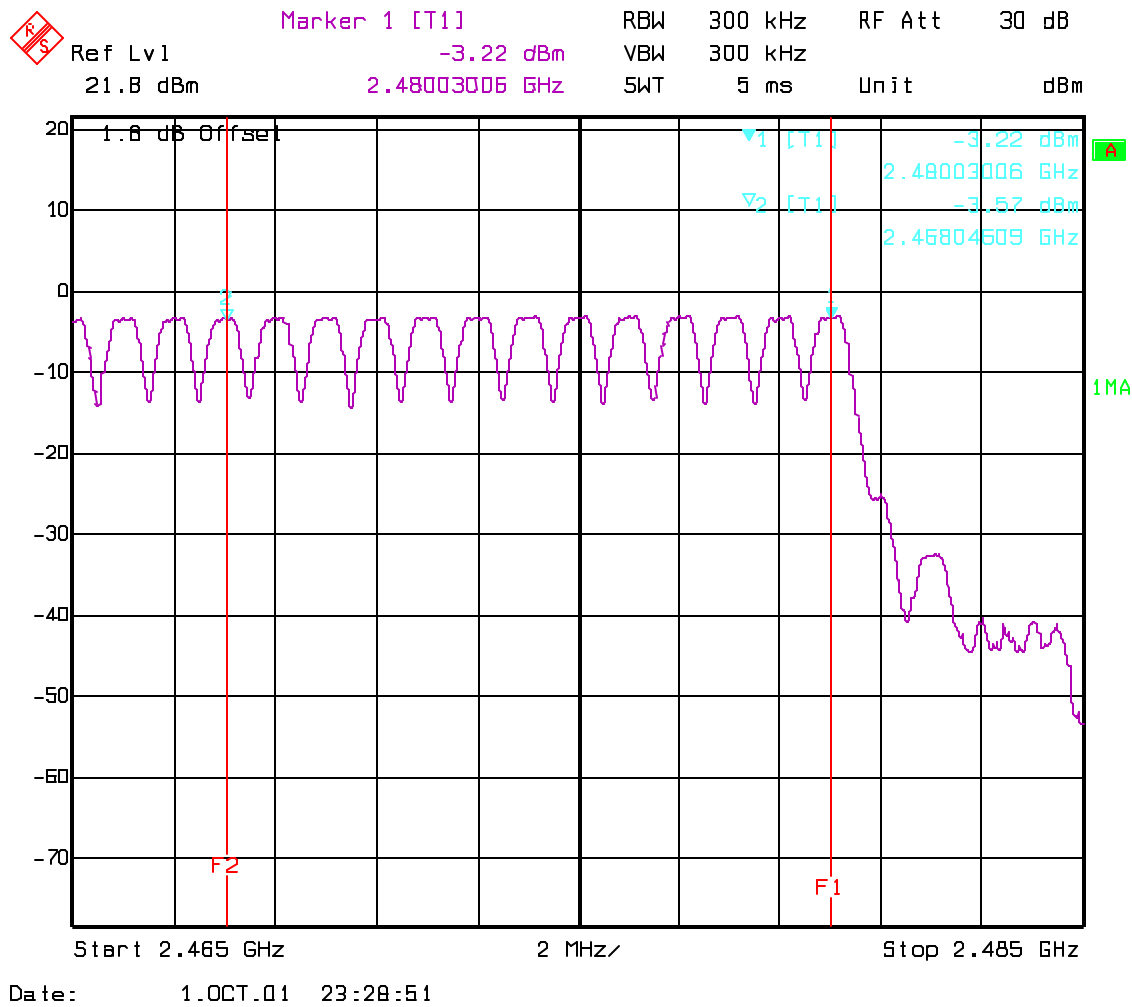


TIME OF OCCUPANCY (DWELL TIME) FOR DH1

§15.247(a)

The system makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So you have each channel 10.13 times per second and so for 30 seconds you have 303.9 times of appearance .

Each Tx-time per appearance is 501µs.


So we have 303.9 \* 501 µs = 152.25 ms per 30 seconds.

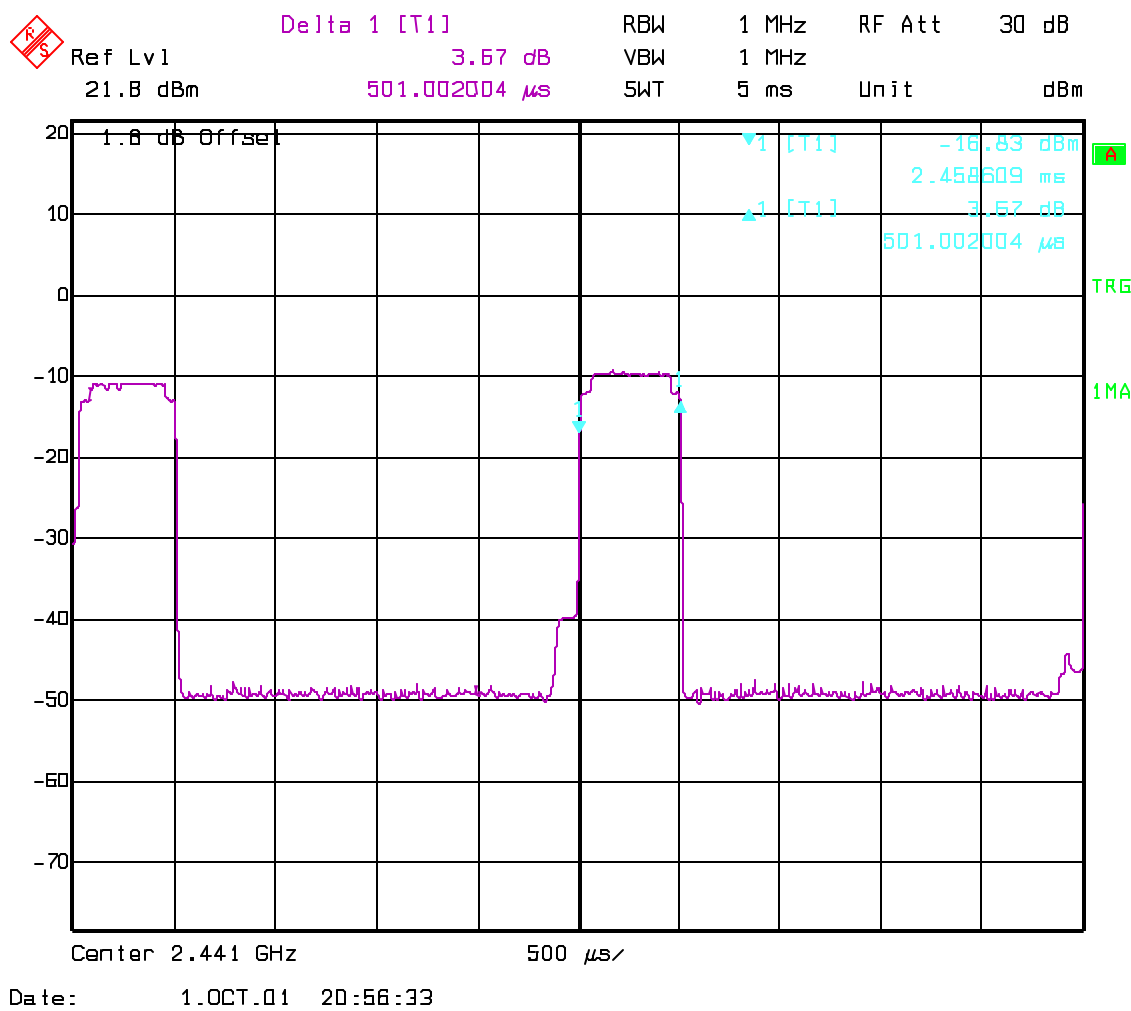

TIME OF OCCUPANCY (DWELL TIME) FOR DH3

§15.247(a)


A DH3 Packets need 3 time slots for transmit and 1 for receicing, then the system makes worst case 400 hops per second with 79 channels. So you have each channel 5.1 times per second and so for 30 seconds you have 153 times of appearance .  
Each Tx-time per appearance is 1.73 ms.  
So we have 153 \* 1.73 ms = 264.69 ms per 30 seconds.

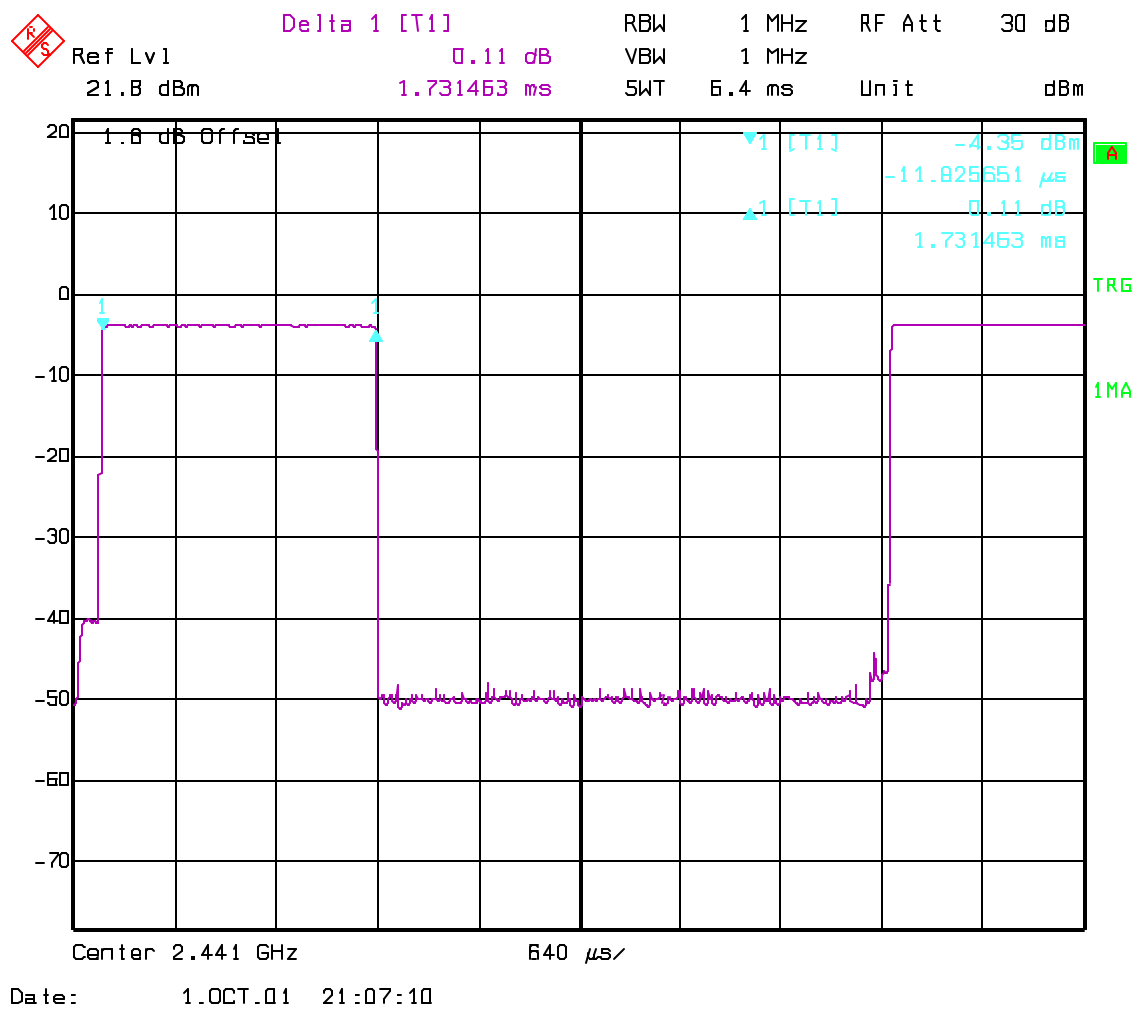

TIME OF OCCUPANCY (DWELL TIME) FOR DH5

§15.247(a)

At DH5 Packets you need 5 time slots for transmit and 1 for receicing,then the system makes worst case 266,7 hops per second with 79 channels. So you have each channel 3.36 times per second and so for 30 seconds you have 100,8 times of appearance .  
Each tx-time per appearance is 2.98 ms.  
So we have 100.8 \* 2.98ms = 300.384 ms per 30 seconds.

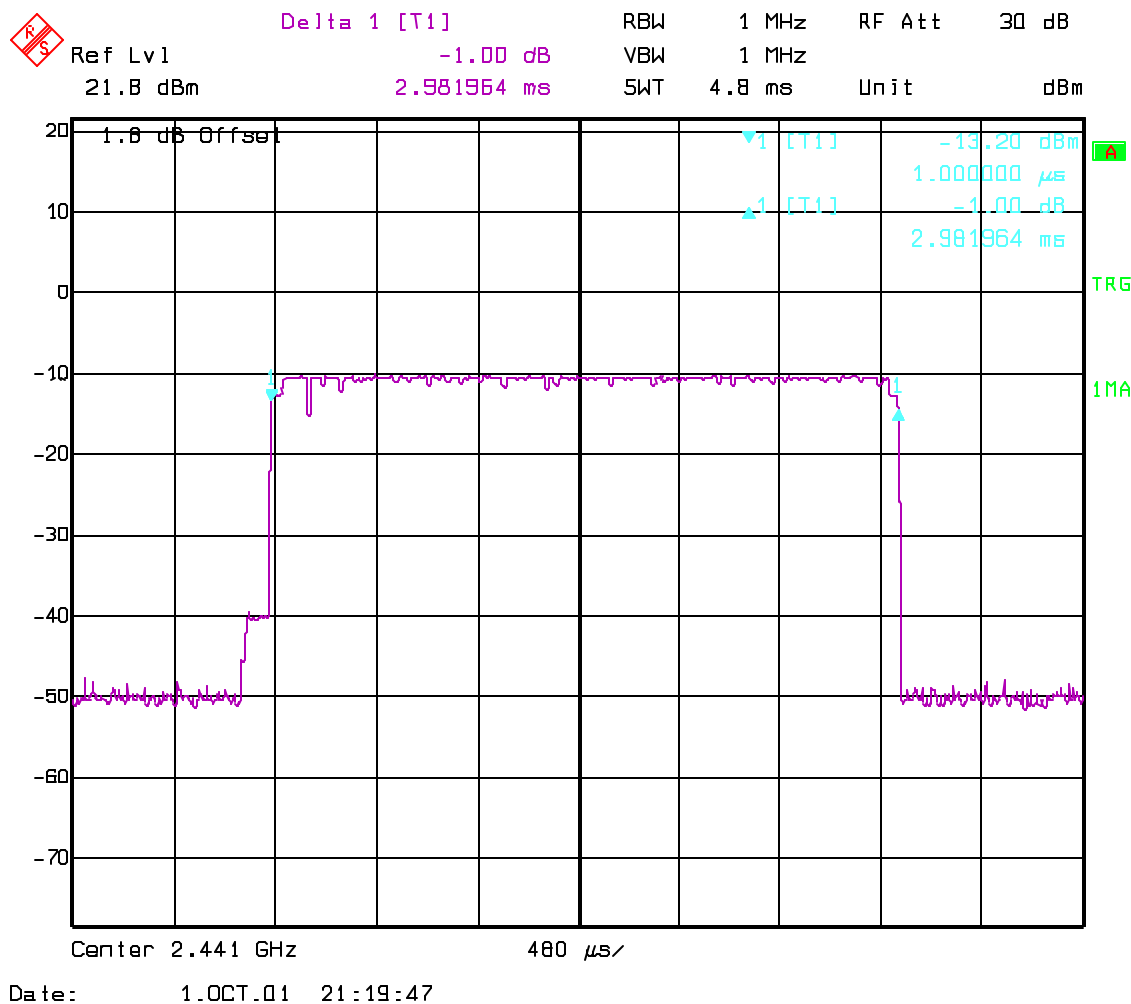

**SPECTRUM BANDWIDTH OF FHSS SYSTEM****§15.247(a)****20 dB bandwidth**

TEST CONDITIONS		20 dB BANDWIDTH ( kHz )		
Frequency (MHz)		2402	2441	2480
$T_{nom}(23)^{\circ}C$	$V_{nom}$	723.44	765.33	799.59
Measurement uncertainty		$\pm 3dB$		


**RBW / VBW as provided in the "Measurement Guidelines" (DA 00-705, March 30, 2000)****LIMIT****SUBCLAUSE §15.247(a) (1)****The maximum 20dB bandwidth shall be at maximum 1000 KHz**



SPECTRUM BANDWIDTH OF FHSS SYSTEM  
20 dB bandwidth

§15.247(a)


Lowest Channel: 2402MHz

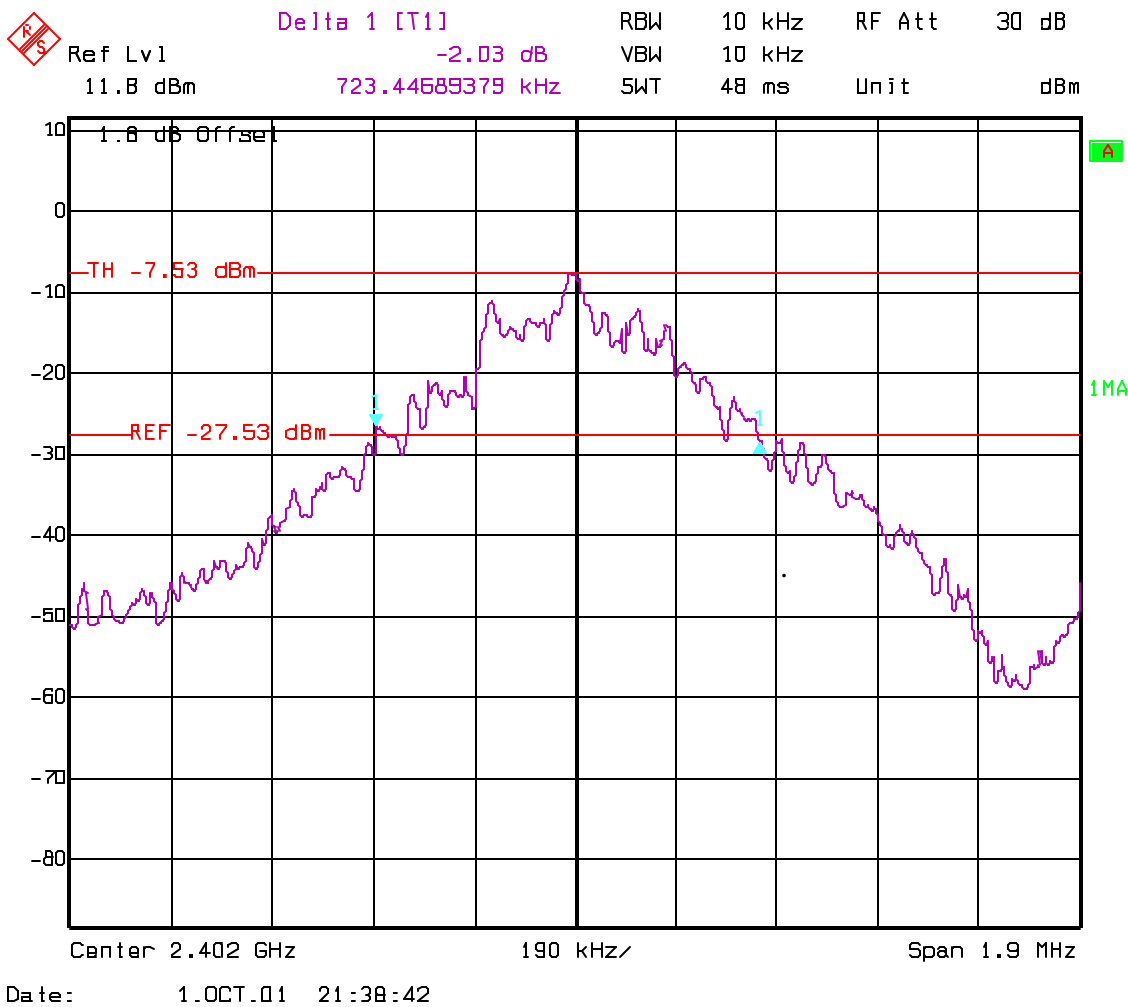

SPECTRUM BANDWIDTH OF FHSS SYSTEM  
20 dB bandwidth

§15.247(a)


Mid Channel: 2441MHz

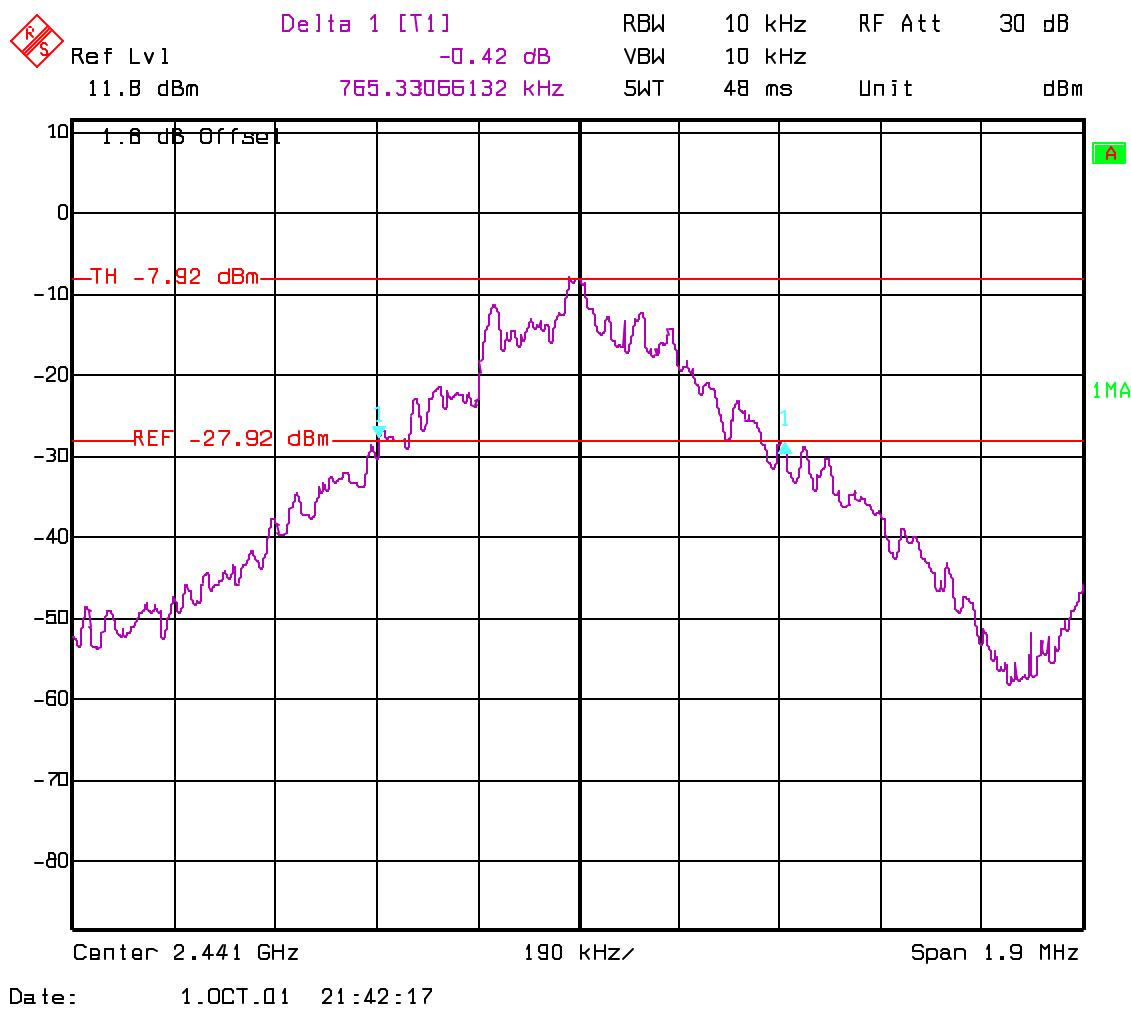

SPECTRUM BANDWIDTH OF FHSS SYSTEM  
20 dB bandwidth

§15.247(a)

Highest Channel: 2480MHz

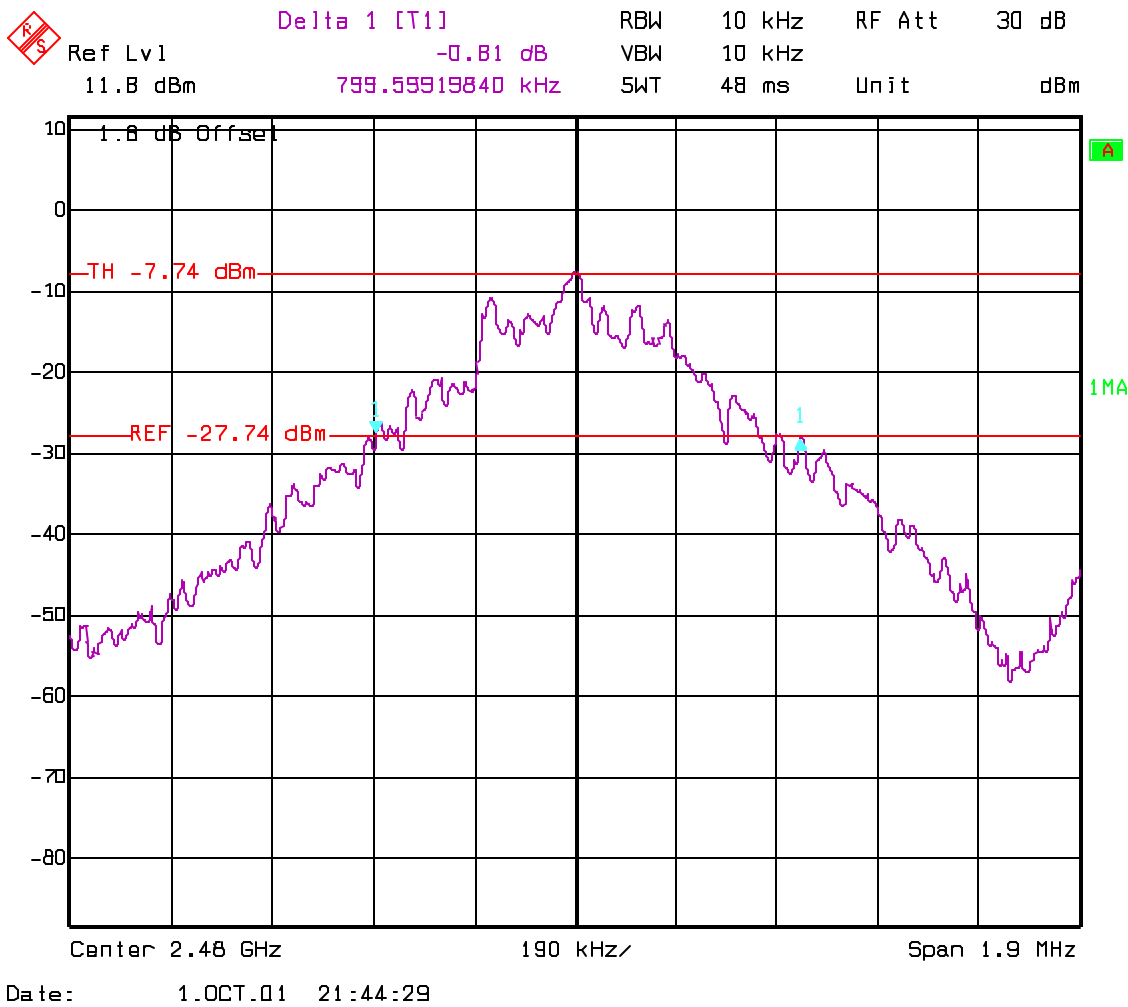

**MAXIMUM PEAK OUTPUT POWER  
(conducted)****SUBCLAUSE § 15.247 (b) (1)**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)			
Frequency (MHz)		2402		2441	2480
$T_{nom}$ ( 23 ) °C	$V_{nom}$	PK	-3.09	-3.26	-2.53
Measurement uncertainty		±3dB			


**RBW / VBW : 3 MHz****LIMIT****SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)


Lowest Channel: 2402MHz

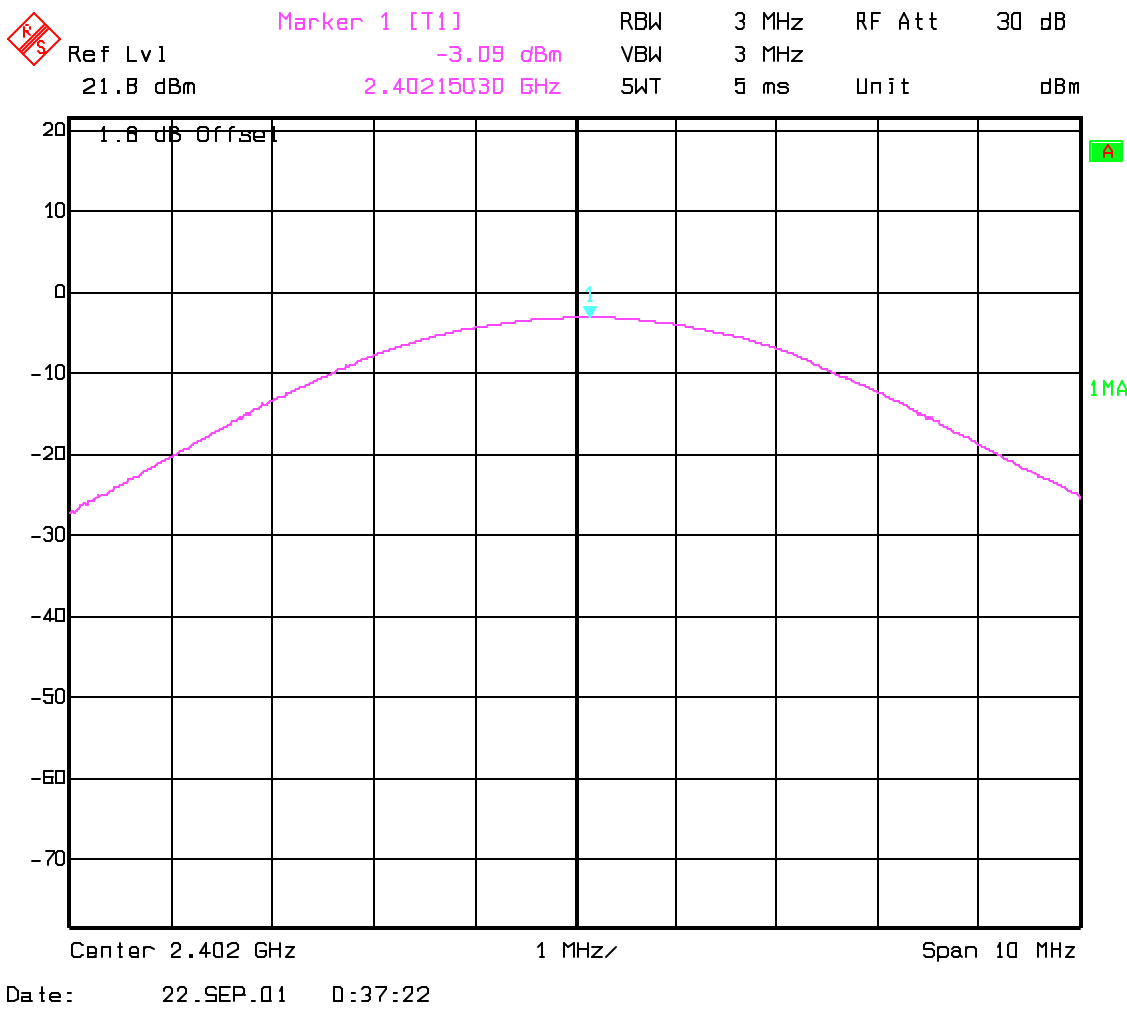

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)


Mid Channel: 2441MHz

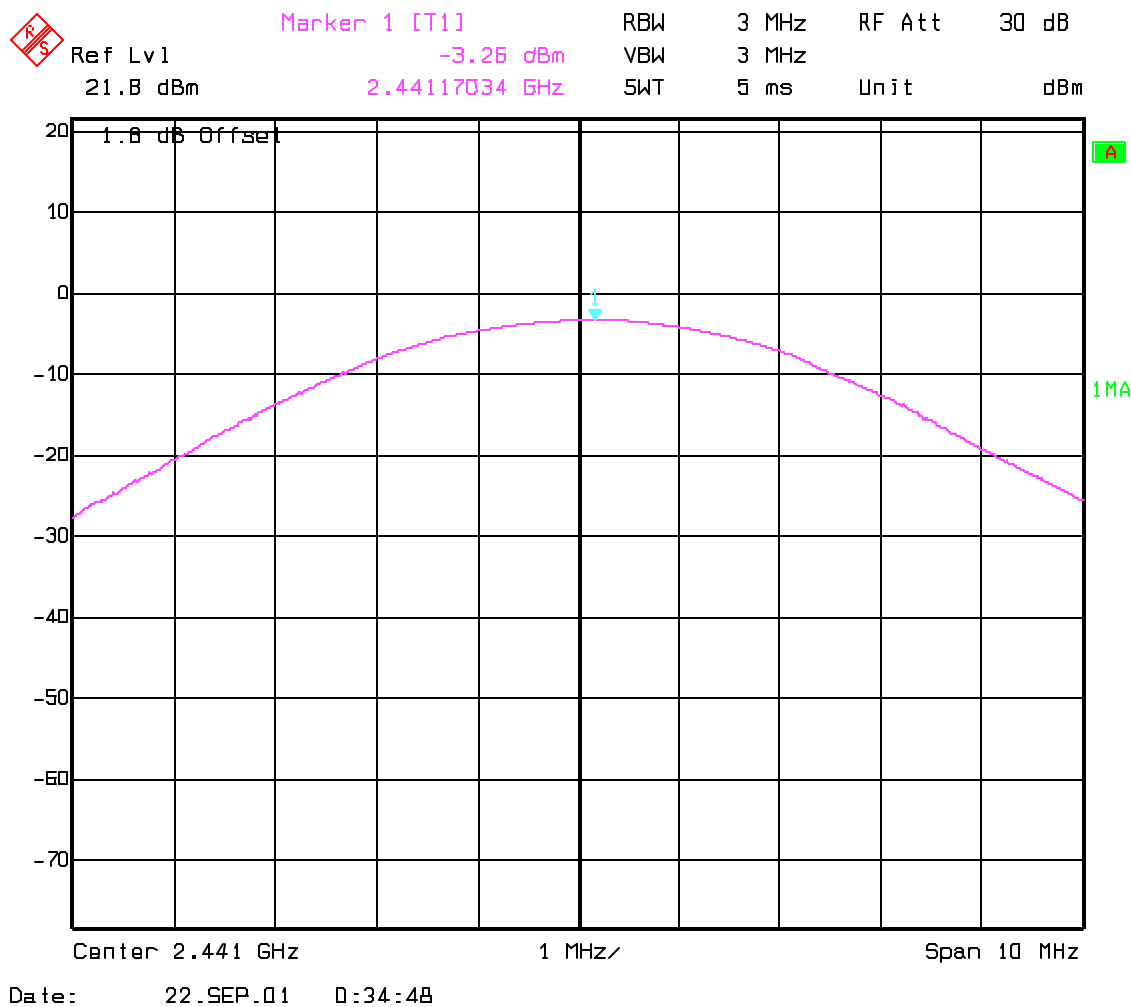

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)

Highest Channel: 2480MHz

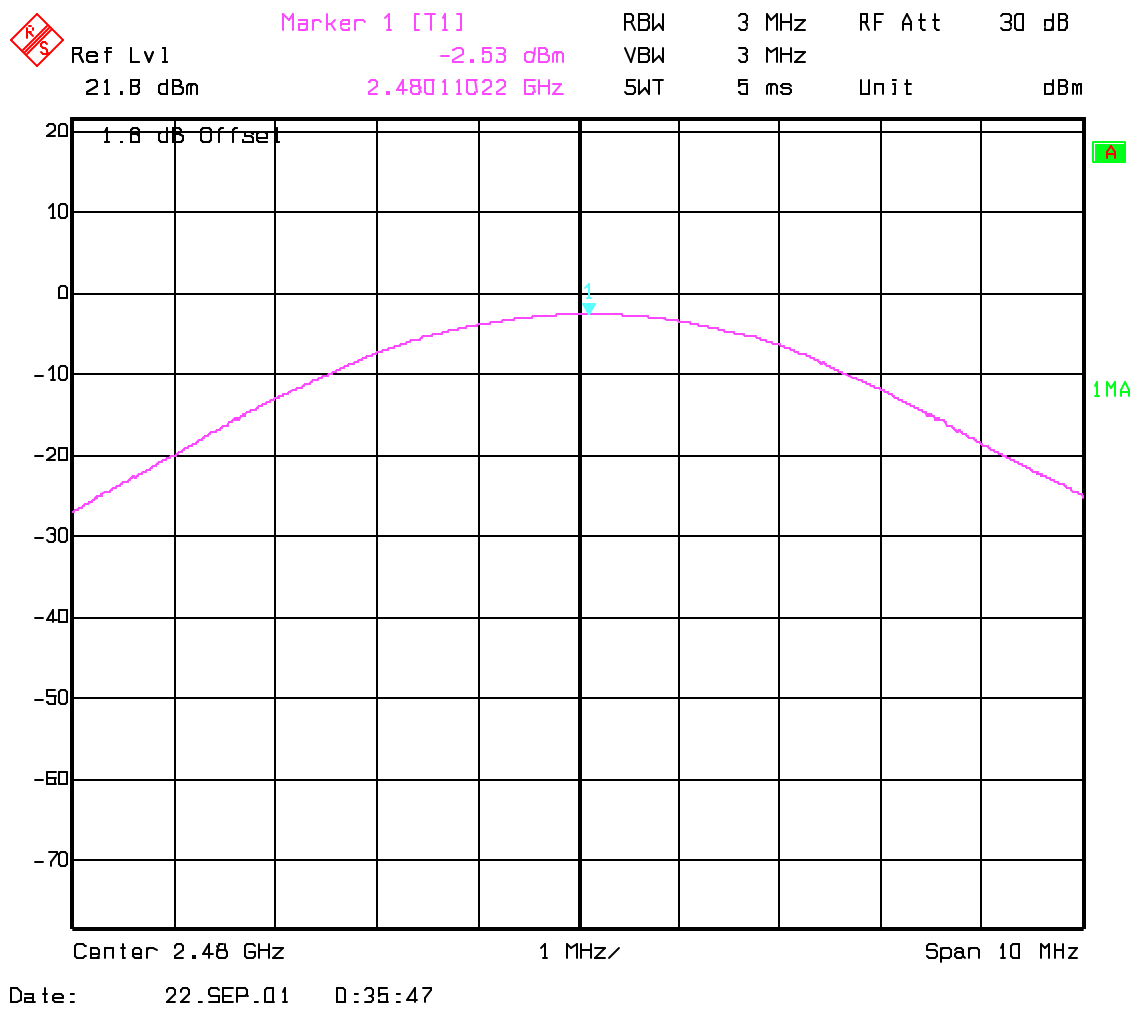

**MAXIMUM PEAK OUTPUT POWER  
(RADIATED)****SUBCLAUSE § 15.247 (b) (1)****EIRP:**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
$T_{nom} (23) ^\circ C$	$V_{nom}$	2.44	1.02	1.02
Measurement uncertainty		$\pm 3dB$		

**RBW/VBW : 3 MHz****LIMIT****SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt




**PEAK OUTPUT POWER (RADIATED)**

§15.247 (b) (1)

**Lowest Channel: 2402MHz**

**ANALYZER SETTINGS: RBW = 3MHz VBW = 3MHz**

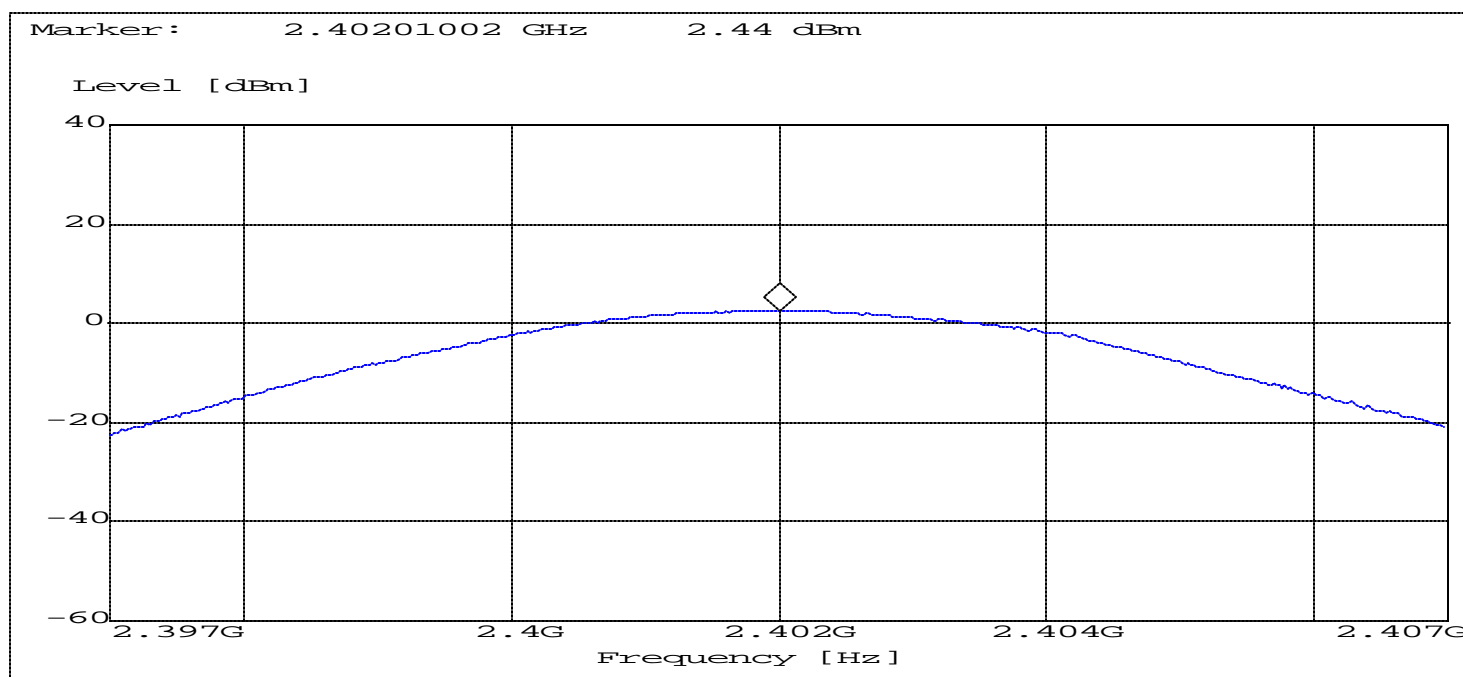


## PEAK OUTPUT POWER (RADIATED)

§15.247 (b) (1)

Mid Channel: 2441MHz

ANALYZER SETTINGS: RBW = 3MHz VBW = 3MHz

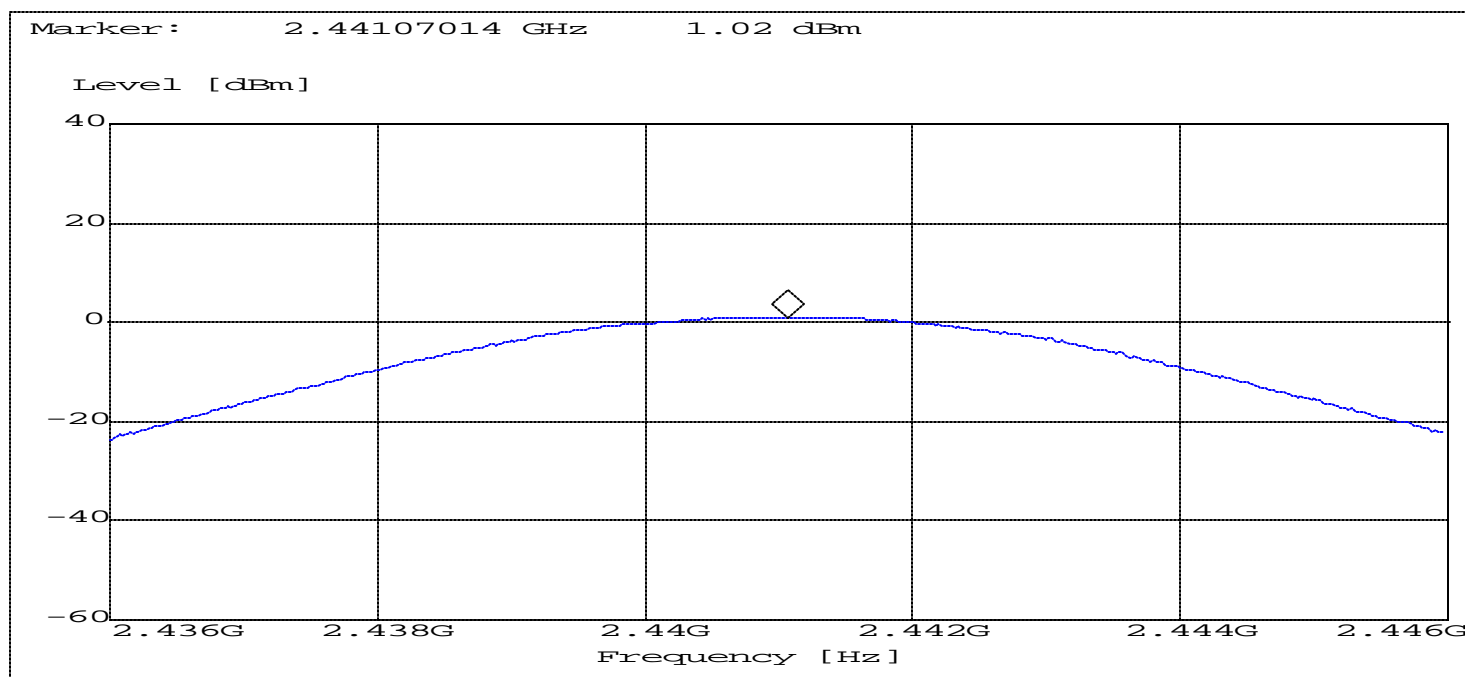


**PEAK OUTPUT POWER (RADIATED)**

**§15.247 (b) (1)**

**Highest Channel: 2480MHz**


**ANALYZER SETTINGS: RBW = 3MHz VBW = 3MHz**

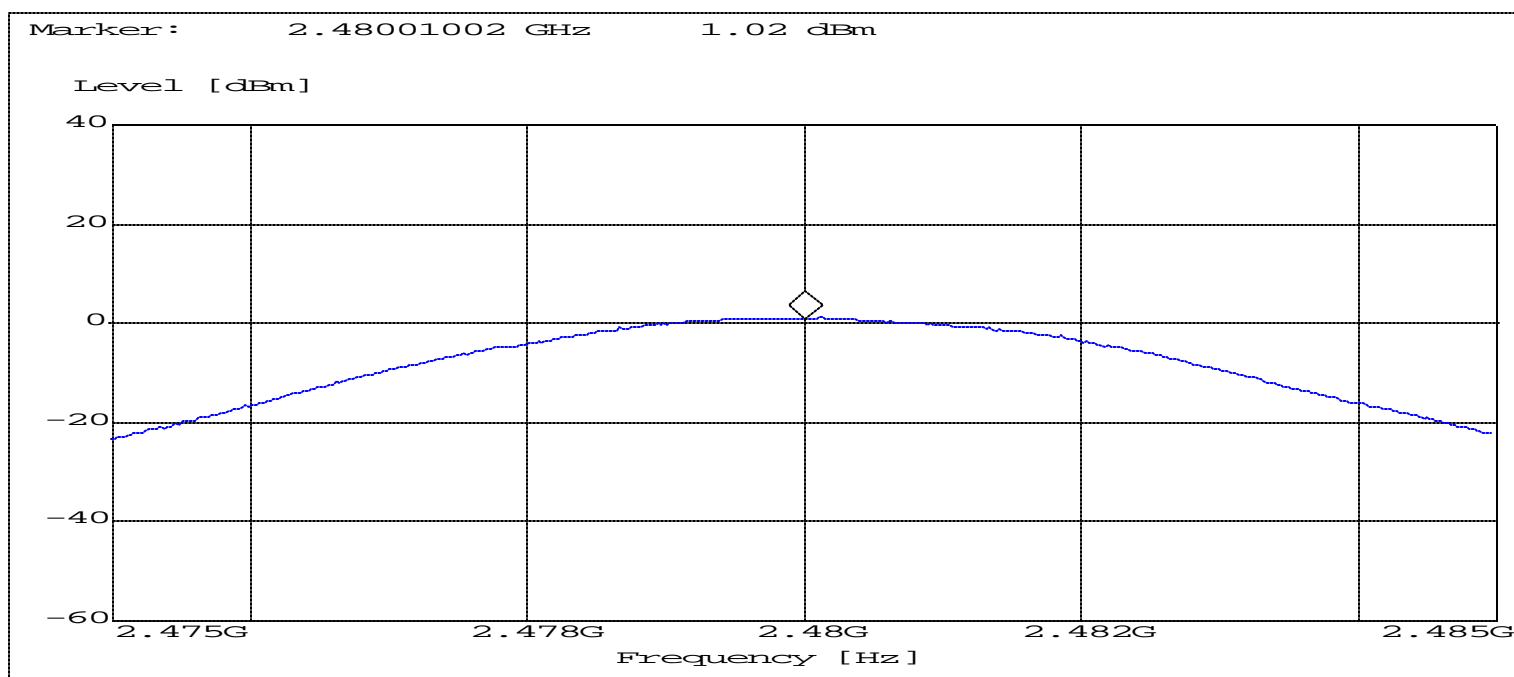

**BAND EDGE COMPLIANCE OF CONDUCTED EMISSIONS**

§15.247 (c)


**Low frequency section**  
**(valid for both hopping ON & OFF)**

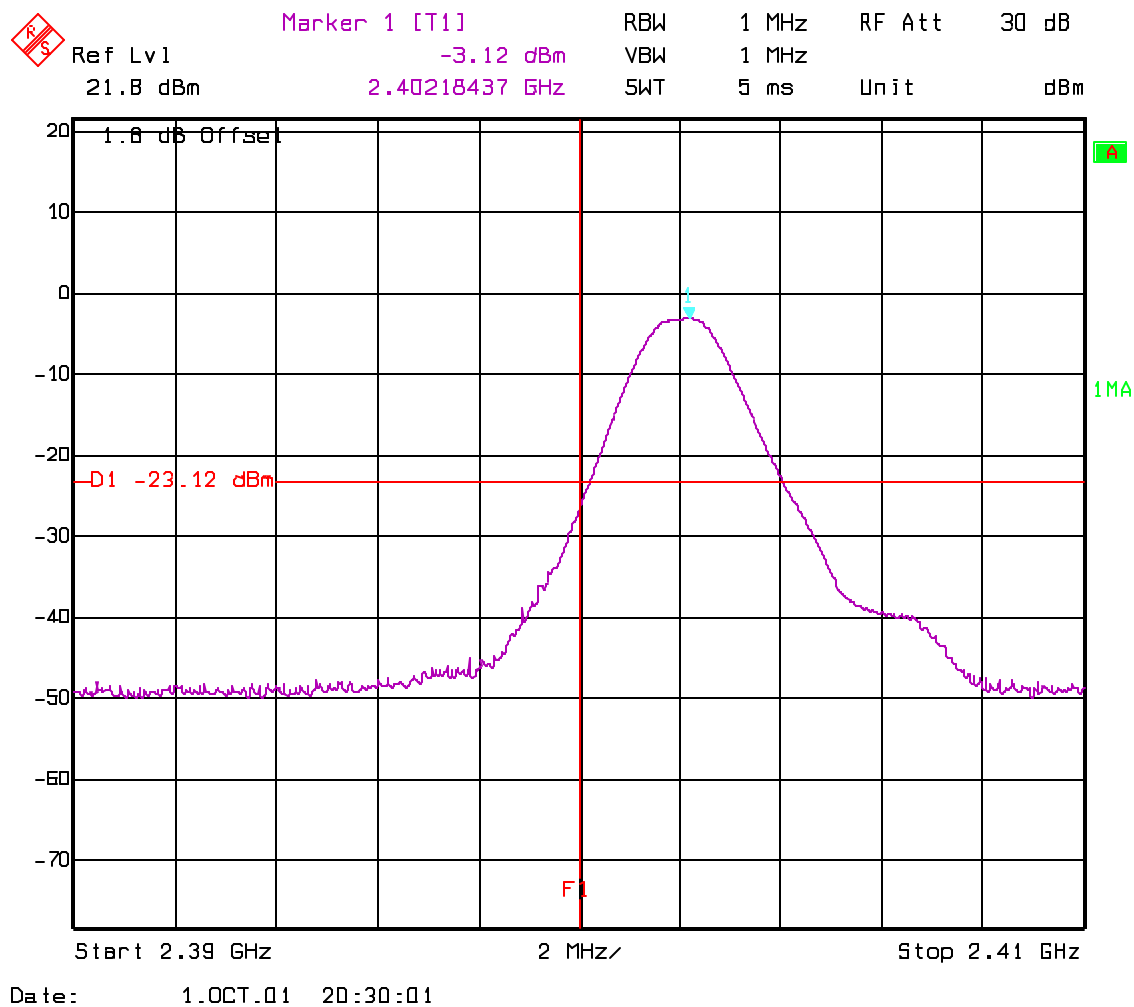

BAND EDGE COMPLIANCE OF CONDUCTED EMISSIONS

§15.247 (c)

high frequency section  
(valid for both hopping ON & OFF)

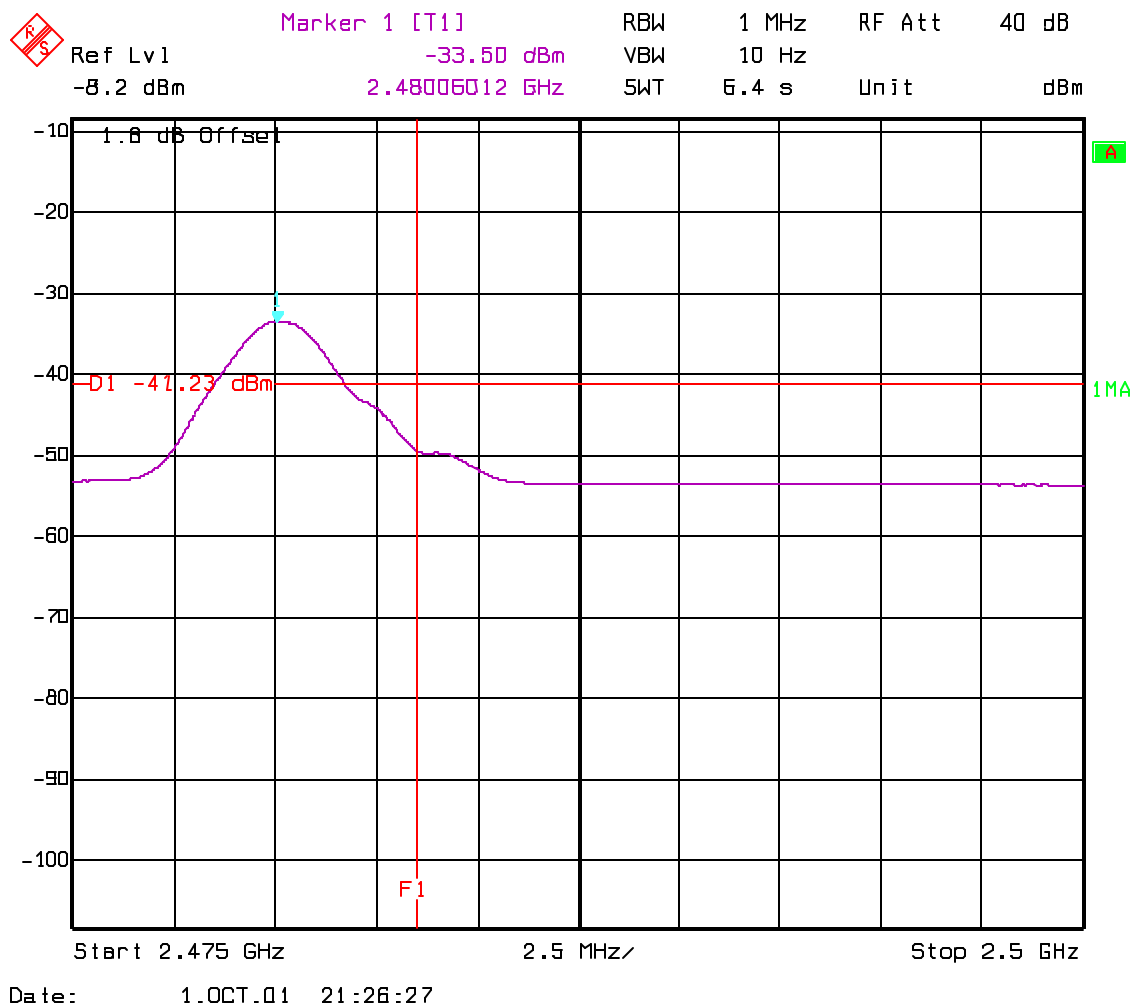

**EMISSION LIMITATIONS - Conducted (Transmitter)**

**§ 15.247 (c) (1)**

**LIMITS**


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**NOTE:** Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Lowest Channel(2402MHz): 30MHz - 25 GHz

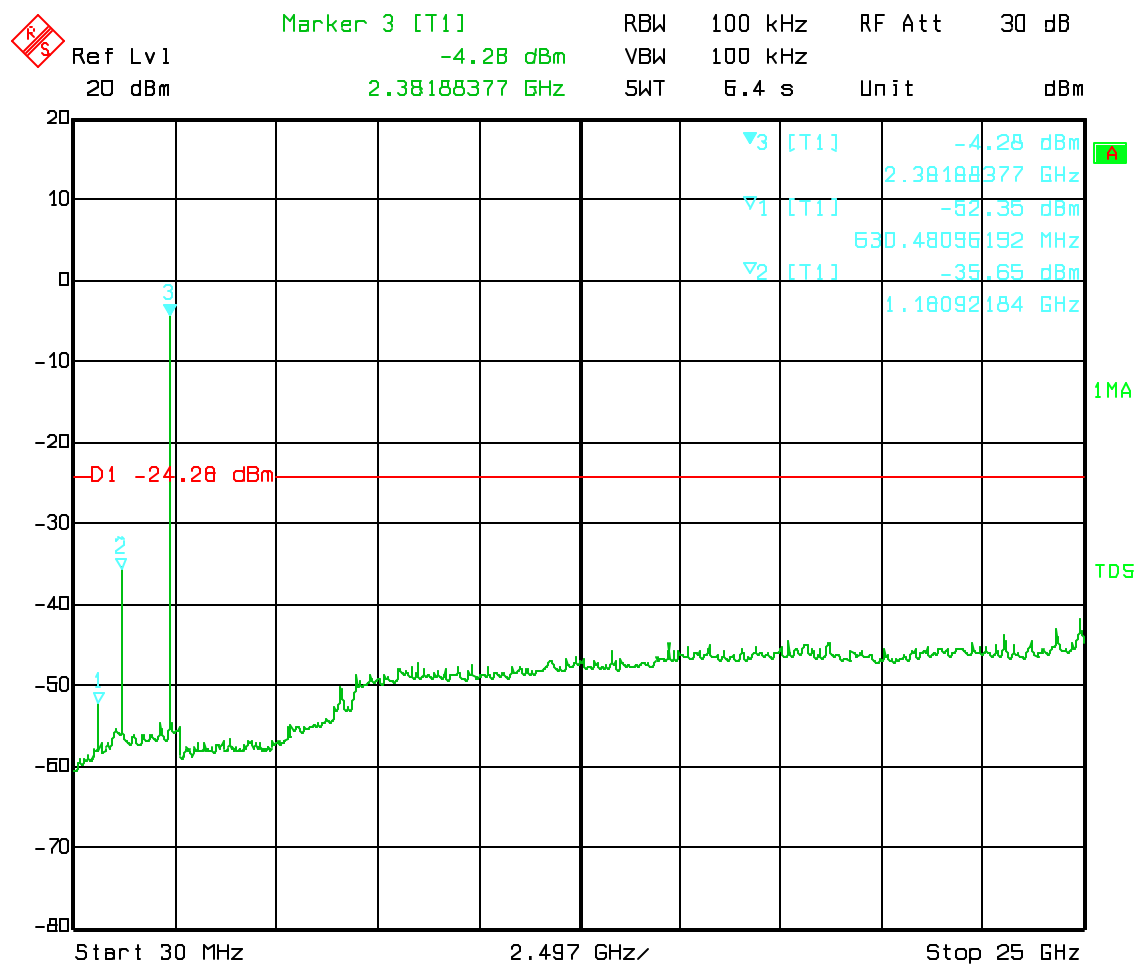


NOTE: The peak above the limit line is the carrier frequency.

EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Mid Channel(2441MHz): 30MHz - 25GHz

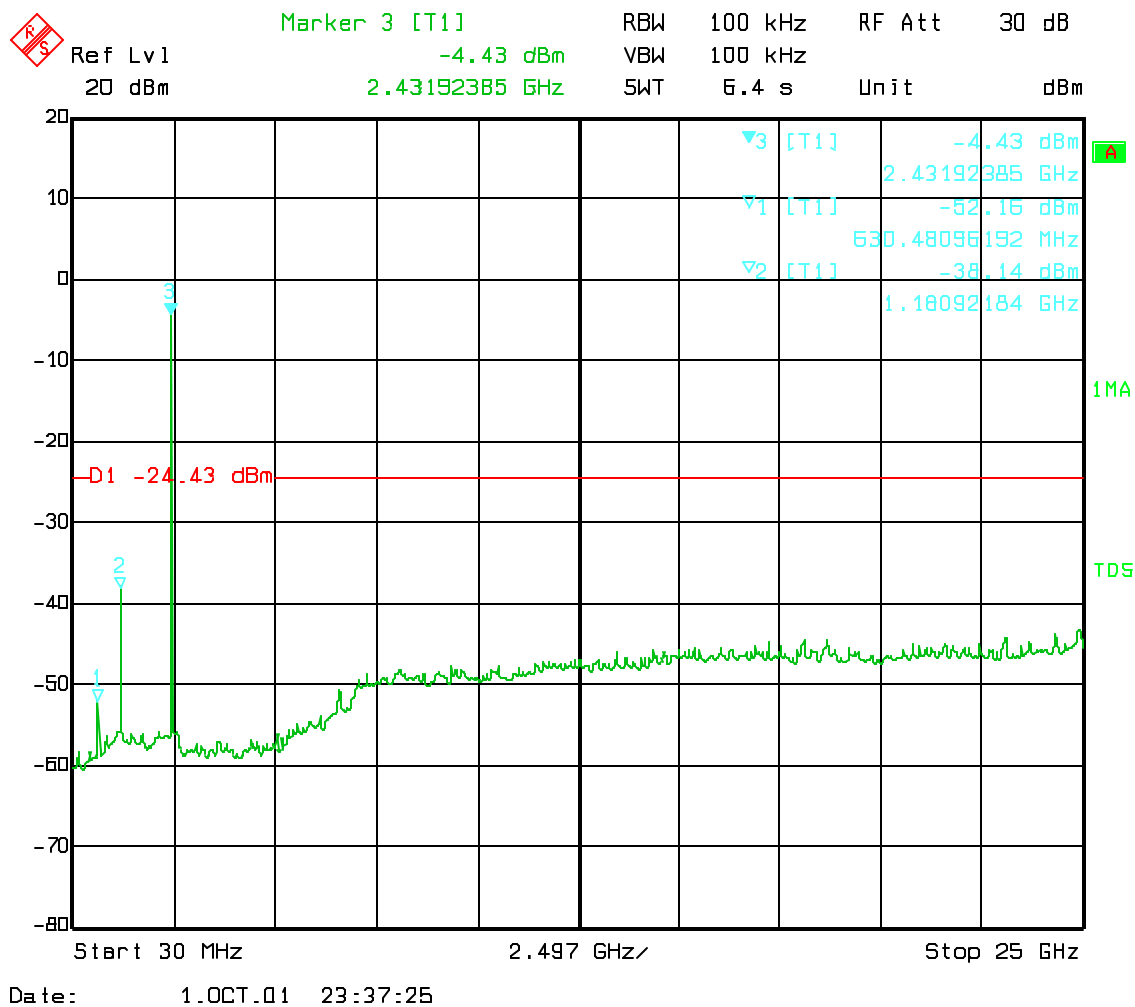


NOTE: The peak above the limit line is the carrier frequency.



EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Highest Channel(2480MHz): 30MHz - 25GHz

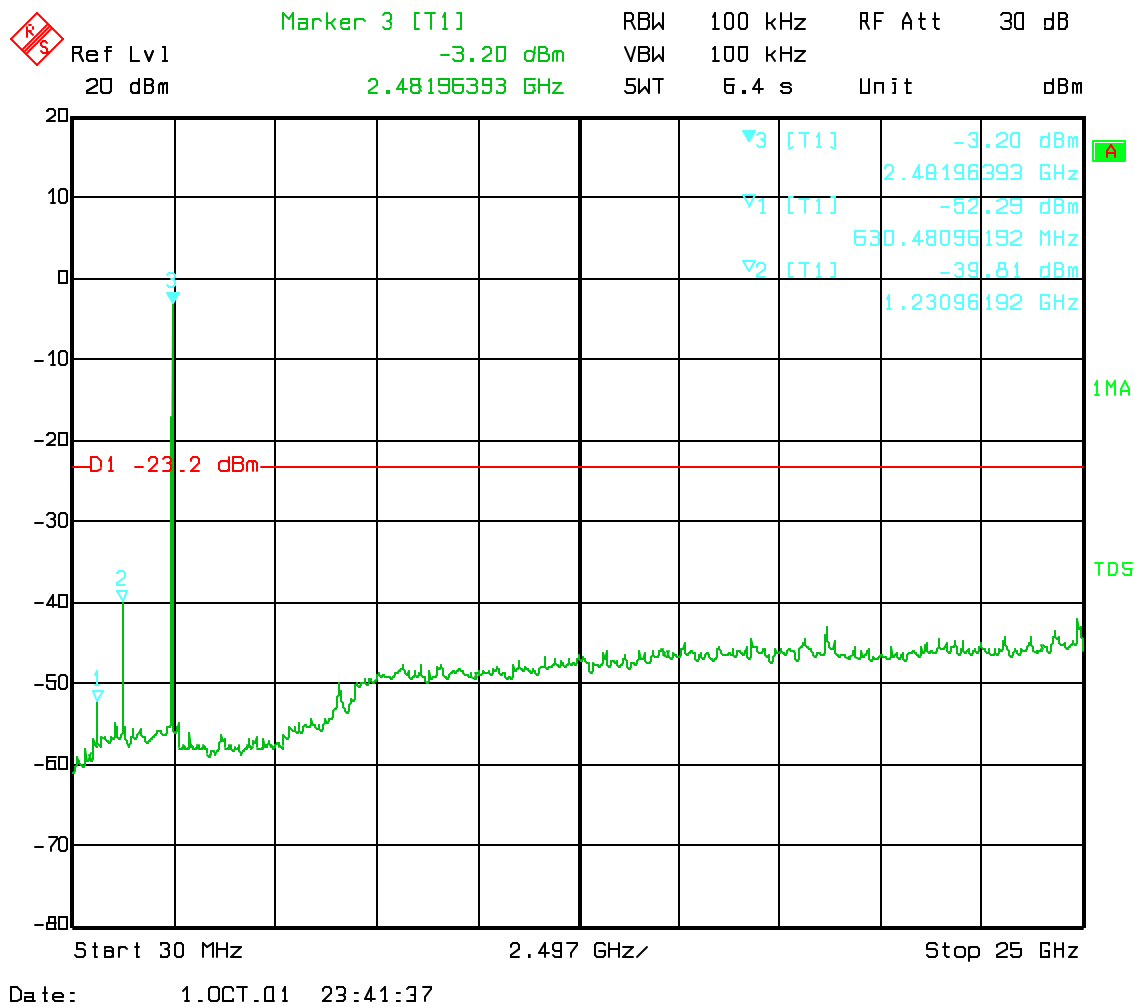

NOTE: The peak above the limit line is the carrier frequency.

**EMISSION LIMITATIONS - Radiated (Transmitter)****SUBCLAUSE § 15.247 (c) (1)****LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.


**Results for the radiated measurements below 30MHz according § 15.33**

Frequency (MHz)	Measured values	Remarks
16-30	No emissions found, caused by the EUT	This is valid for all the tested channels

## EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Lowest Channel(2402MHz): 30MHz – 1GHz

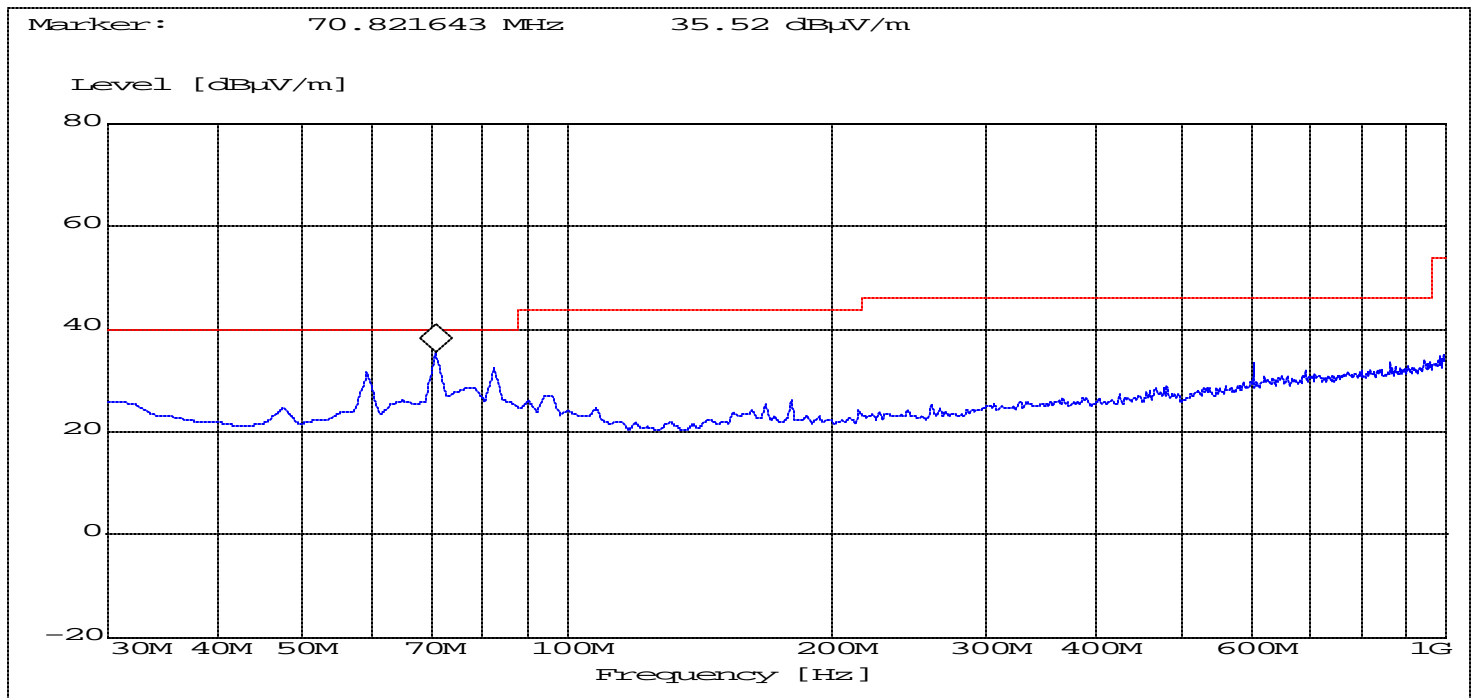


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Lowest Channel(2402MHz): 1GHz – 8GHz

NOTE: The peak above the limit line is the carrier frequency.

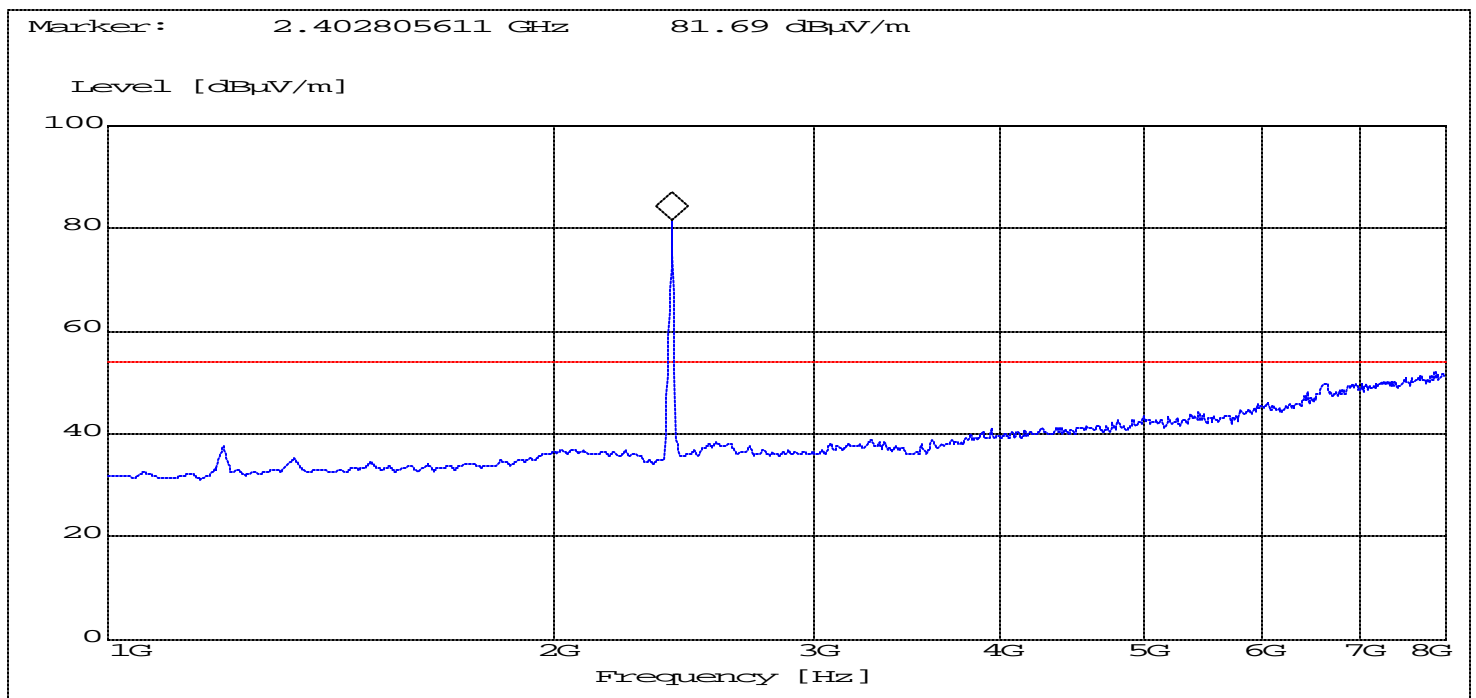


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

Mid Channel(2441MHz): 30MHz – 1GHz

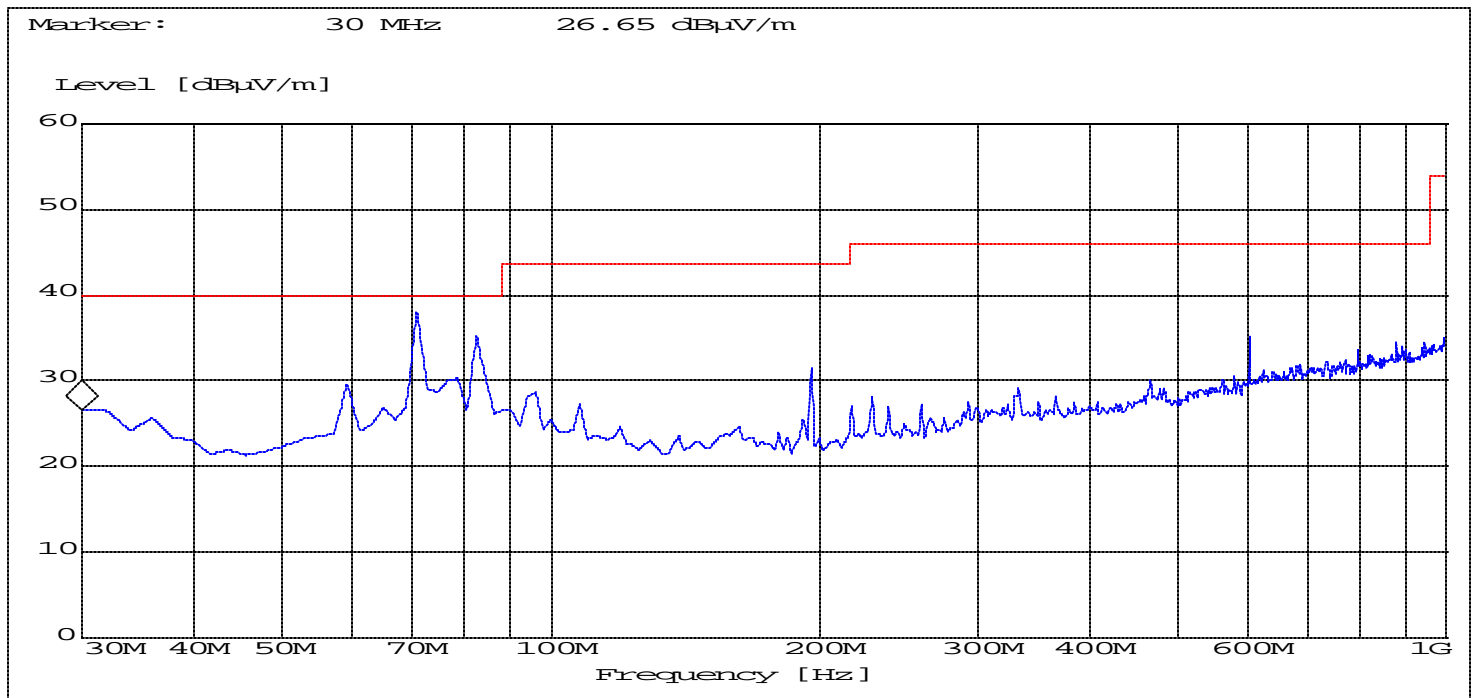


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Mid Channel(2441MHz): 1GHz – 8GHz

NOTE: The peak above the limit line is the carrier frequency.

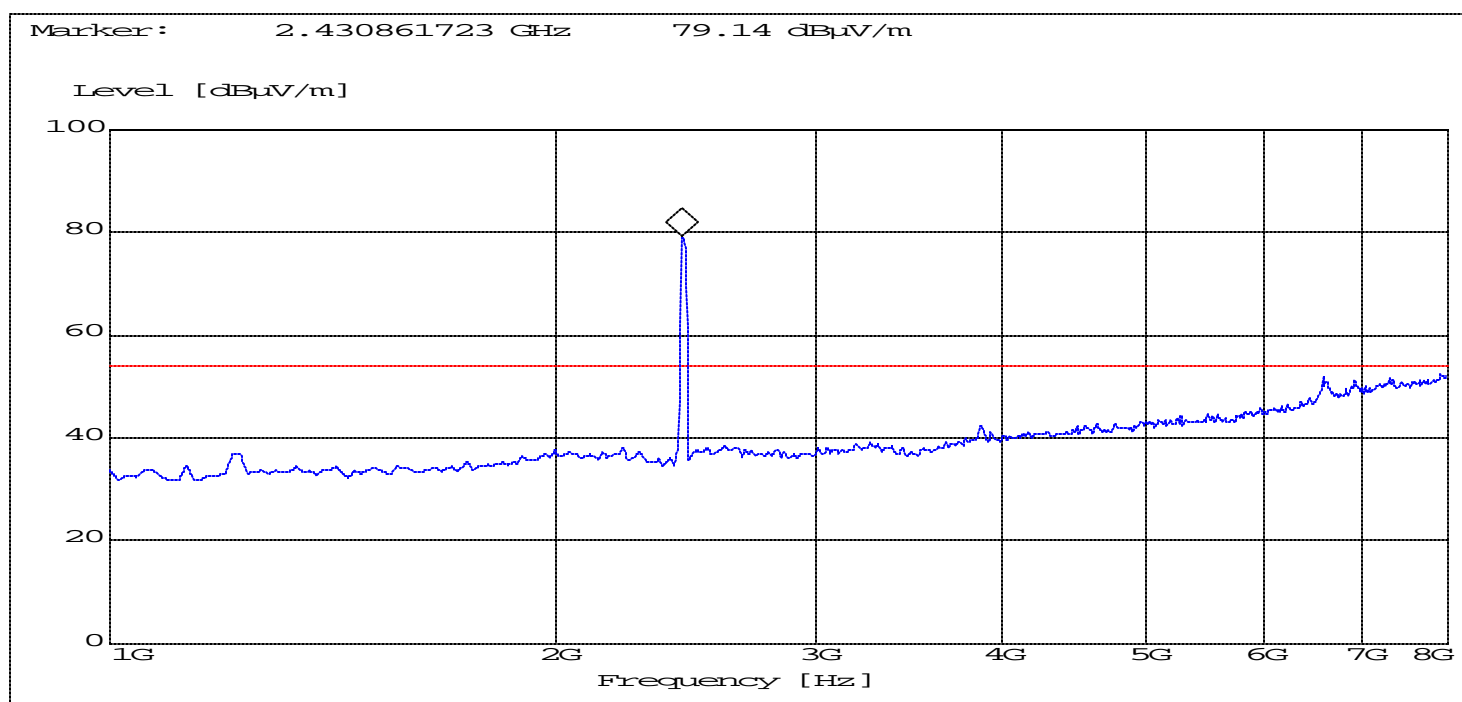


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

**EMISSION LIMITATIONS - Radiated (Transmitter)**

**SUBCLAUSE § 15.247 (c) (1)**

**Highest Channel(2480MHz): 30MHz – 1GHz**

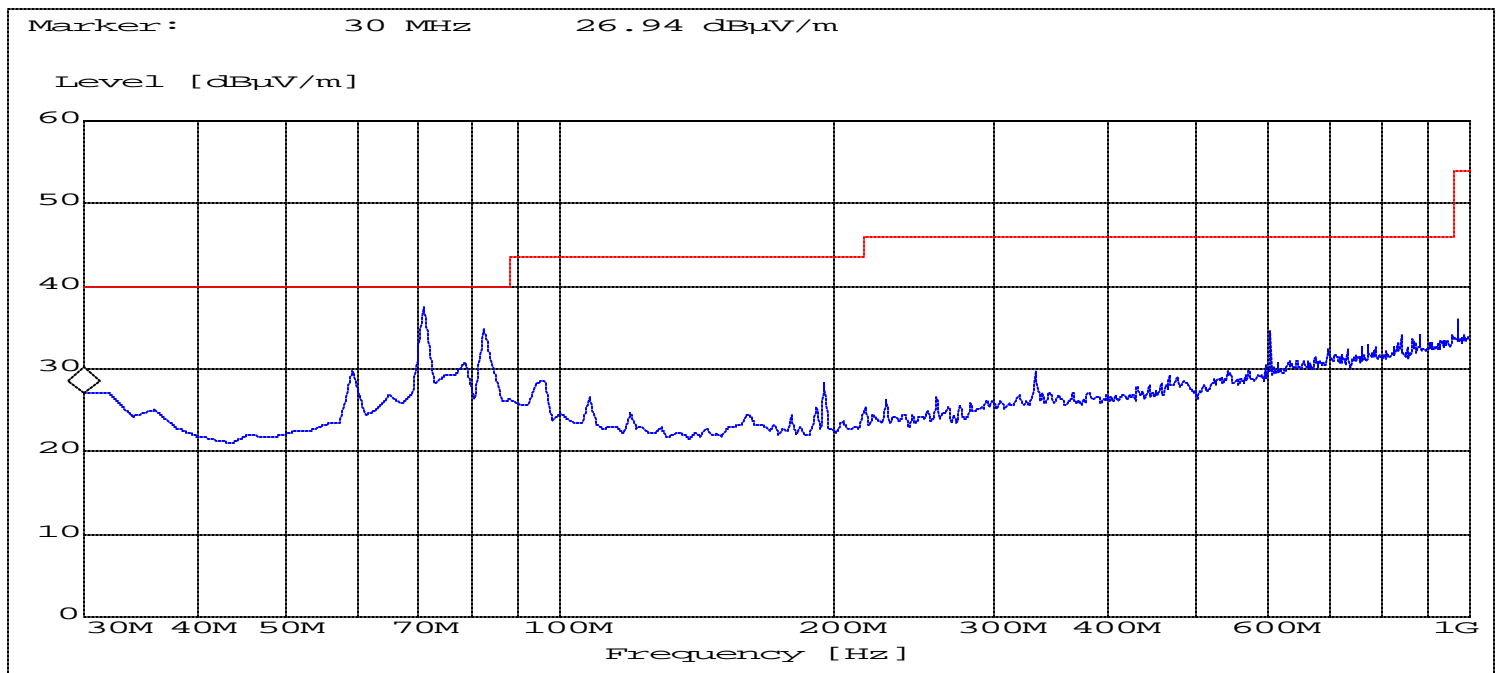


**ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz**

## EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Highest Channel(2480MHz): 1GHz – 8GHz

NOTE: The peak above the limit line is the carrier frequency.

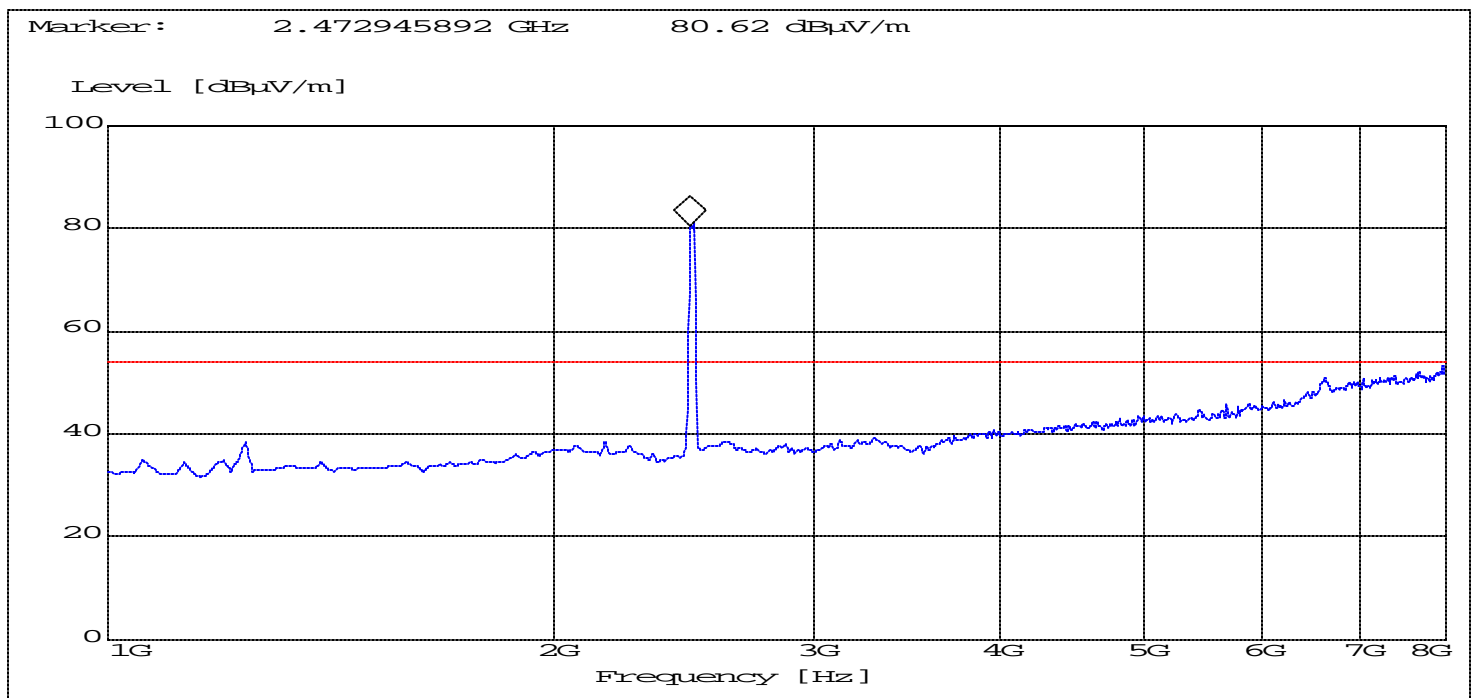

ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz




## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

8GHz – 18GHz

(This plot is valid for all three channels)

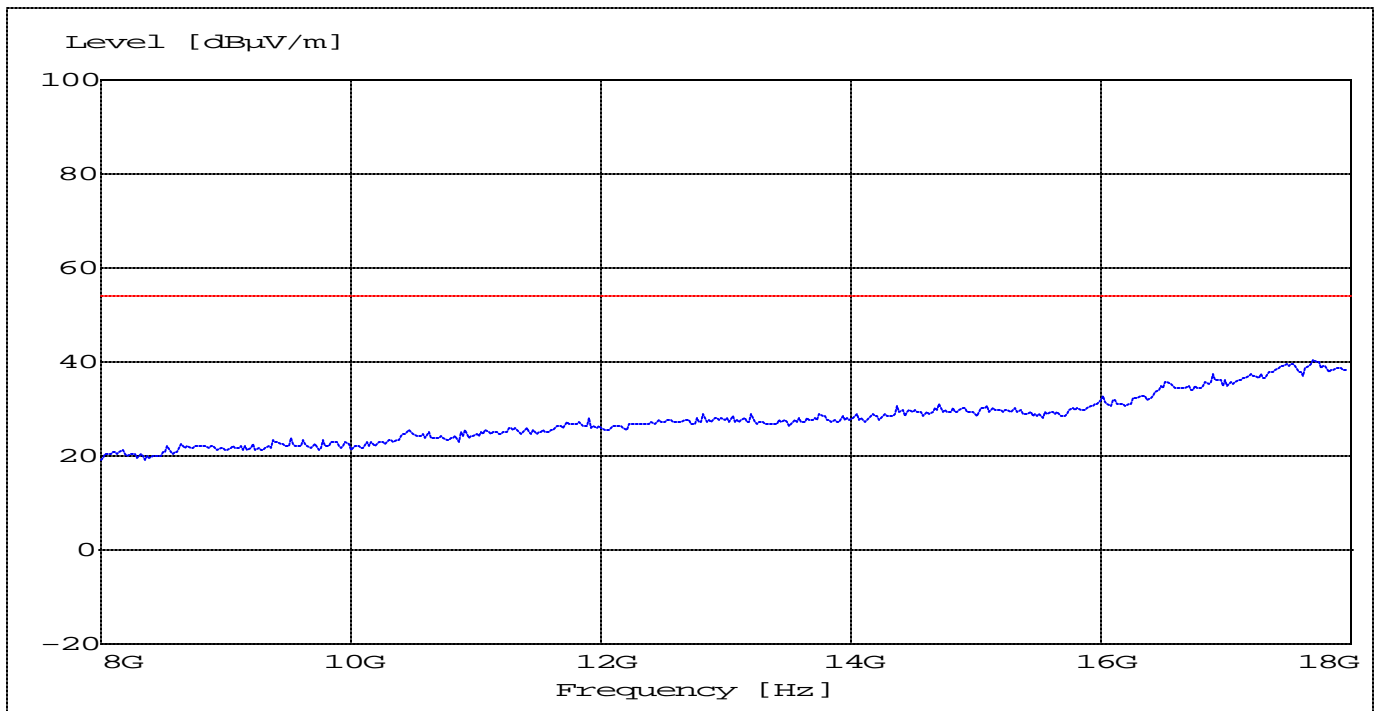


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

18GHz – 25GHz

(This plot is valid for all three channels)

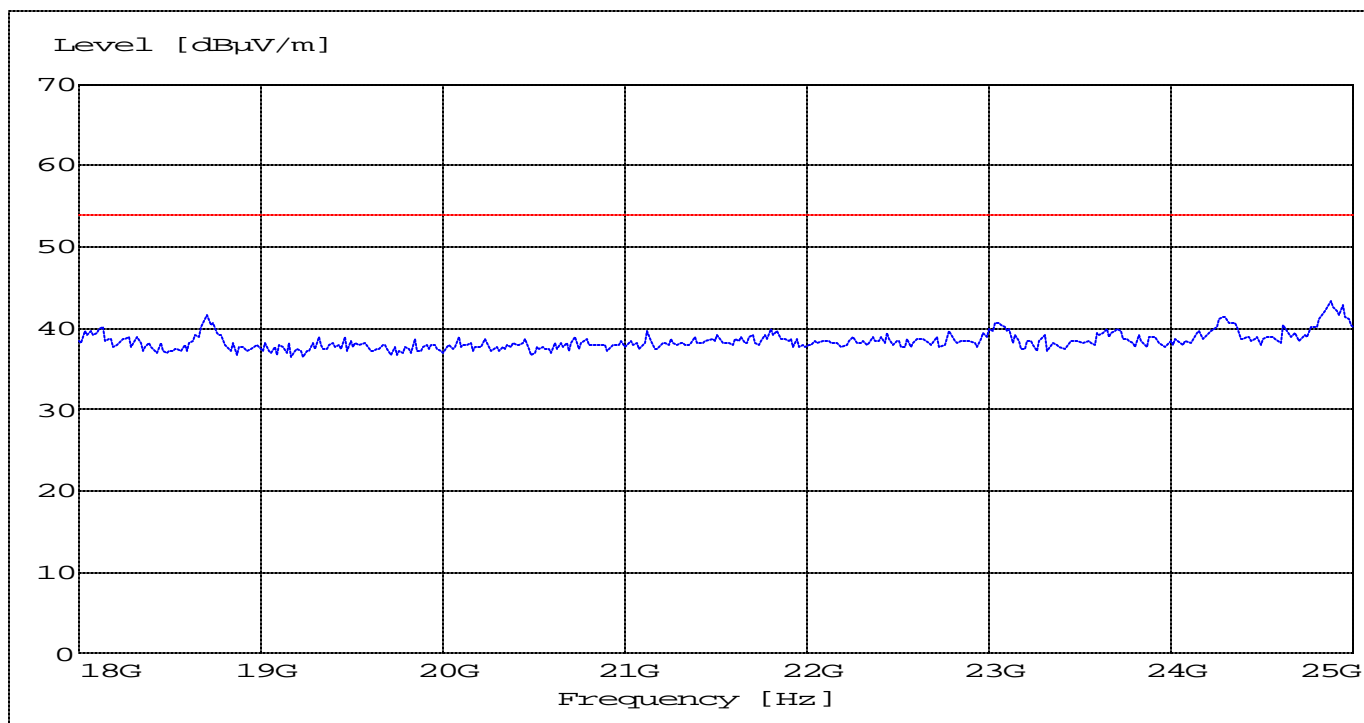


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter

Phase: Line

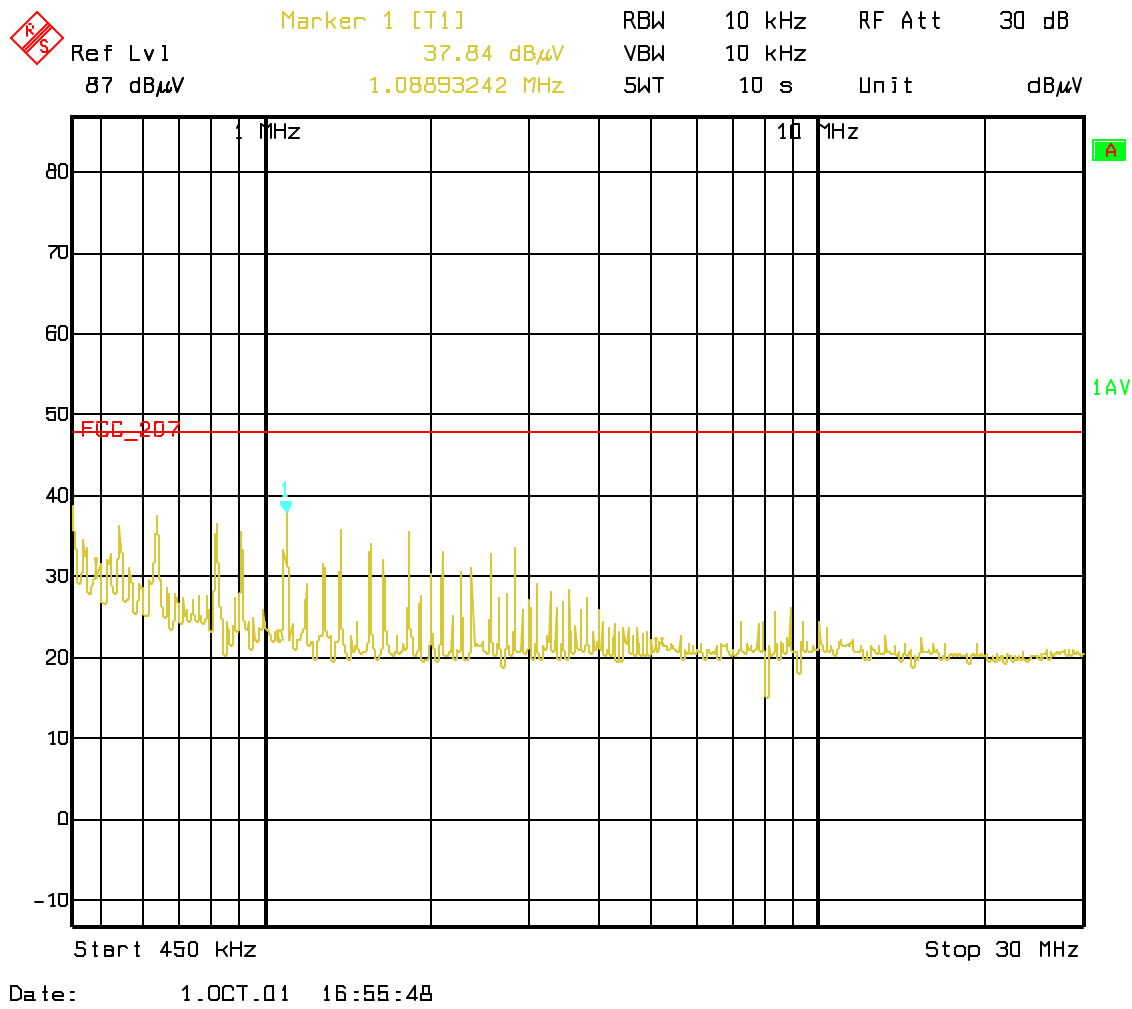


Technical specification : 15.107 / 15.207 (Revised as of October 1, 1991 )

Limit

0.45 to 30 MHz	250 $\mu$ V / 47.96 dB $\mu$ V
----------------	--------------------------------

Phase: Neutral

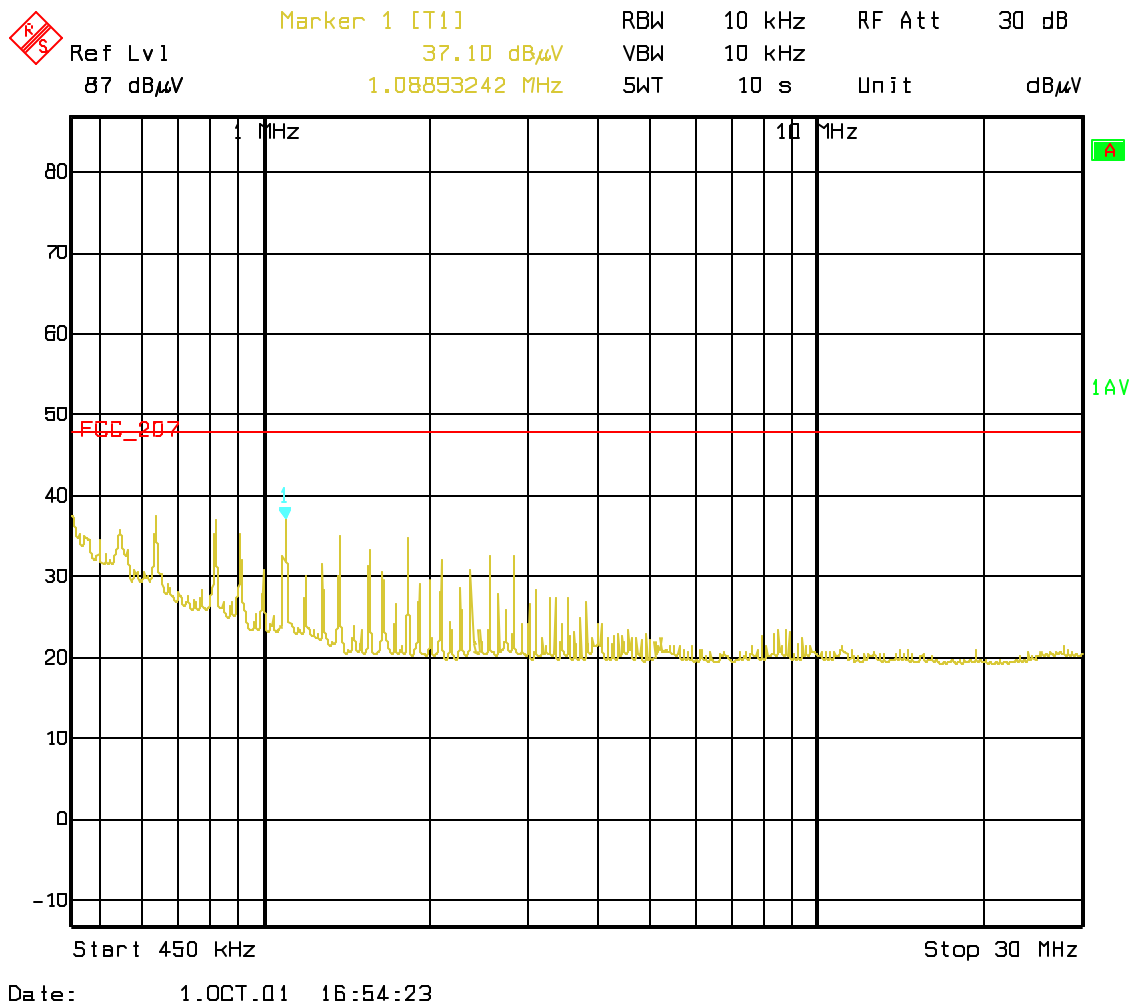

Technical specification : 15.107 / 15.207 (Revised as of October 1, 1991 )

Limit

0.45 to 30 MHz	250 μV / 47.96 dBμV
----------------	---------------------

**RECEIVER SPURIOUS RADIATION**

§ 15.209

**Limits**

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

**NOTE:**


1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. Measurements were done on low, mid & high channels, but plots depicting the worst case are submitted in the test report.

## RECEIVER SPURIOUS RADIATION

§ 15.209

30MHz – 1GHz

(This plot is valid for all three channels)

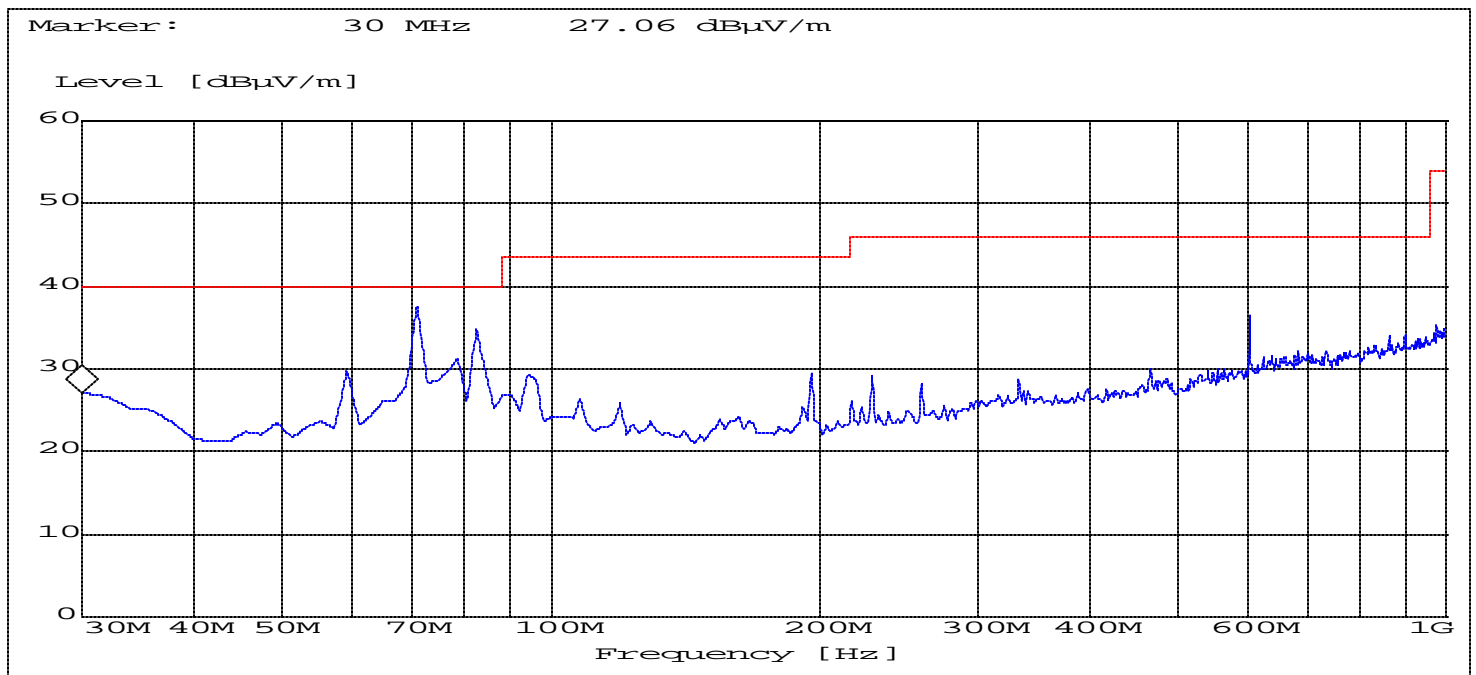


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

## RECEIVER SPURIOUS RADIATION

§ 15.209

1GHz – 8GHz

(This plot is valid for all three channels)

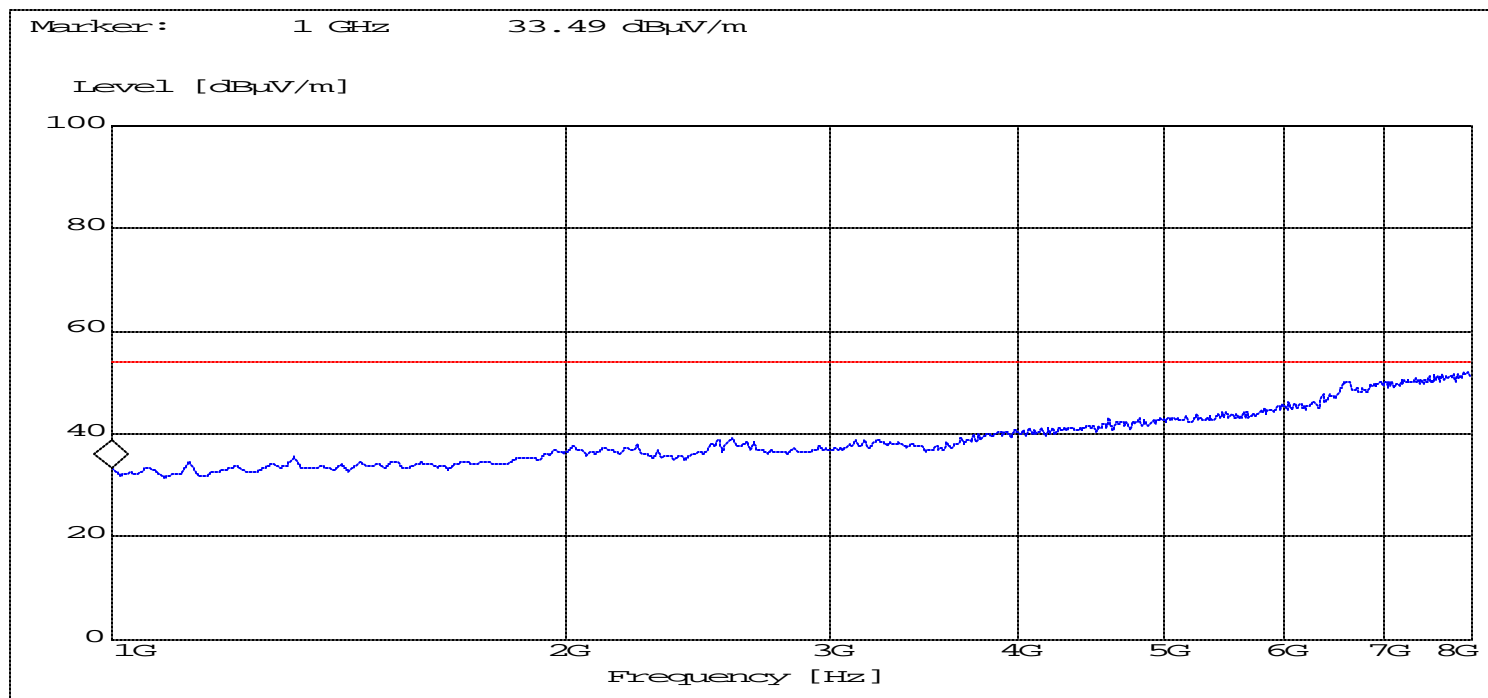


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

**RECEIVER SPURIOUS RADIATION**

**§ 15.209**

**8GHz – 18GHz**

**(This plot is valid for all three channels)**

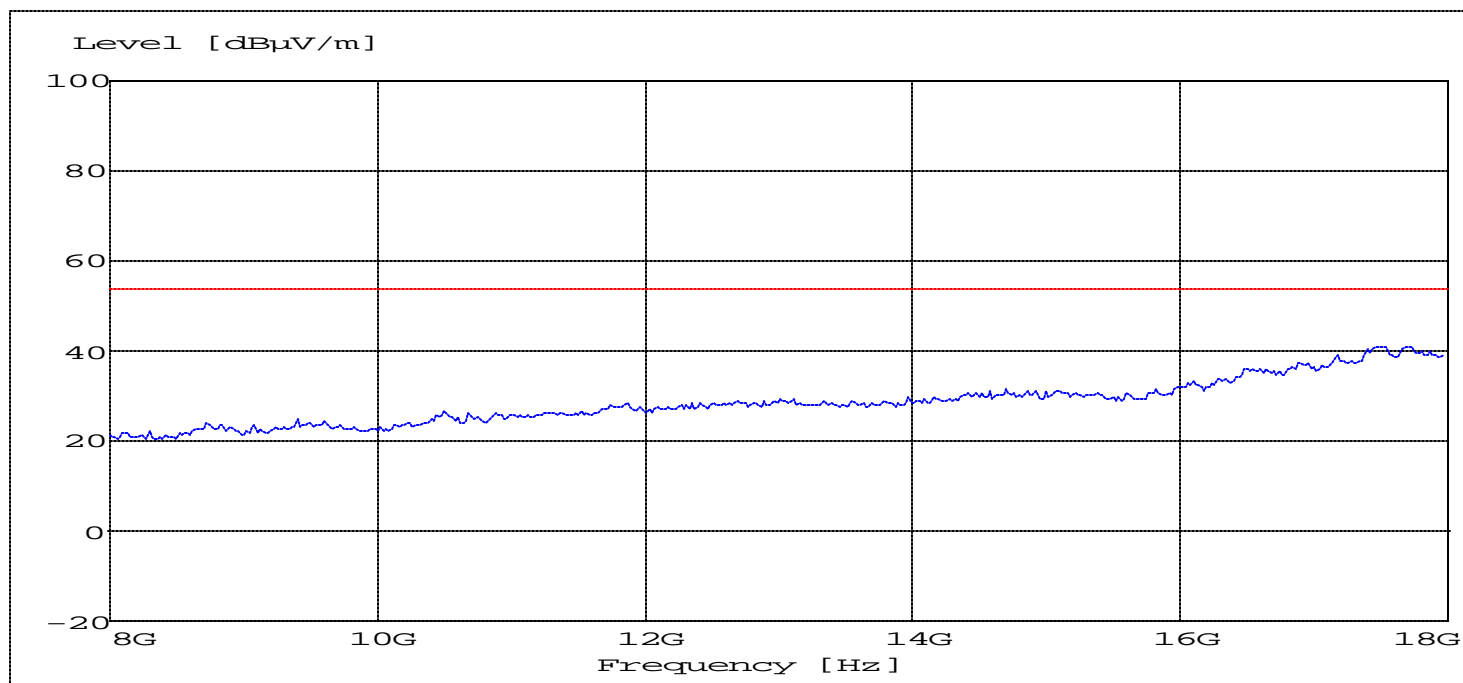

**ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz**




## RECEIVER SPURIOUS RADIATION

§ 15.209

18GHz – 25GHz

(This plot is valid for all three channels)

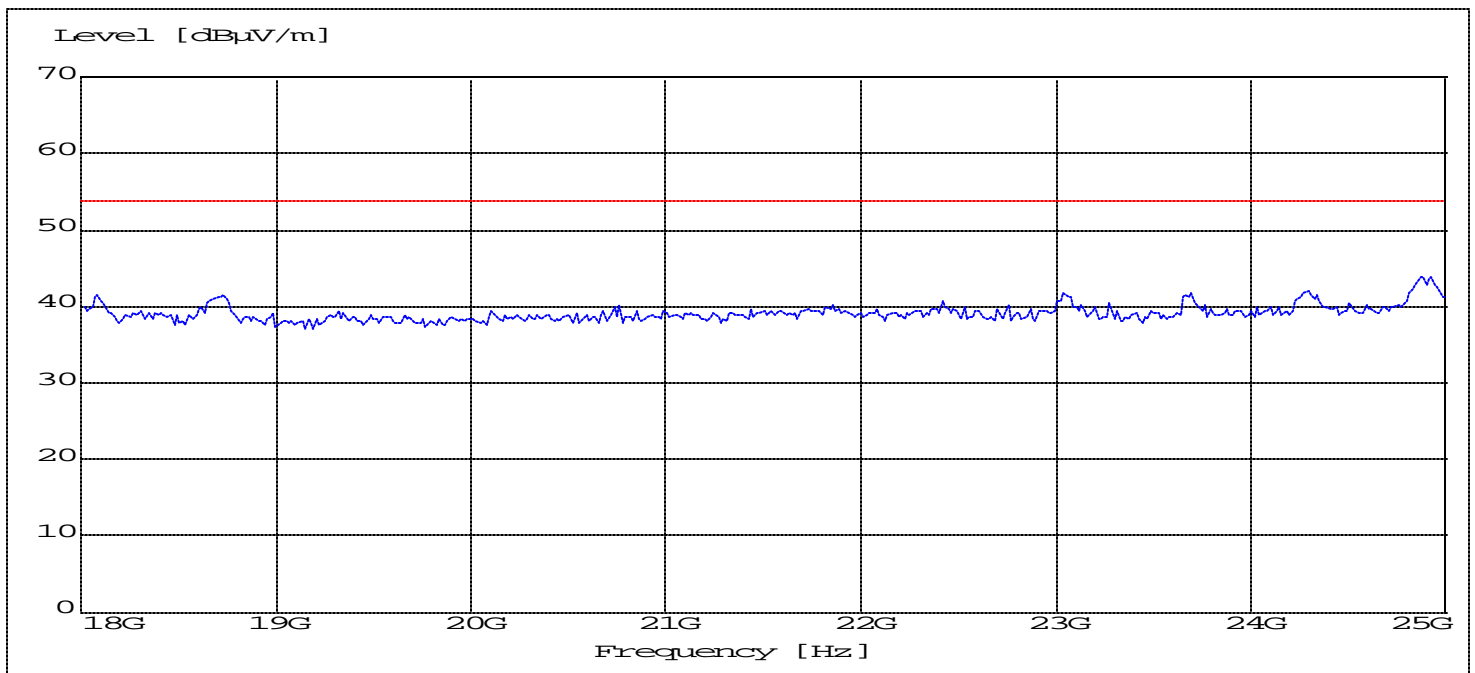

ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

[illegible]